

Print this Calibration Test page first!

Size: Height: 167.75, Bust: 104.25, Waist: 87.5, Hips: 111
Pattern Name: -

Notes

How to print Printing

Once your Calibration Test Page has been printed, measure the 4"x 4" (10cm) scale box with a ruler. If the lengths match, you can confidently print your pattern. If the rulers do not match, set your print settings to 100% or Actual and retry.

Cutting

Your printouts will always have a dashed border to perfectly match your sheets. Cut off the right edge of each page. Be careful not to cut beyond the dashed mark, otherwise your patterns will not align accurately.

Tapping

Group each sheet by the second number marked on each pate i.e. in a group 1, there are: 1/1, 2/1, 3/1, 4/1, etc. In a group 2: 1/2, 2/2 etc. 2. Place page 1/1 on top of the page 2/1, overlapping the right side edge. Match corners and crosses and secure with a pin or tape. Then use a scotch tape to permanently attach the sheets together.



Pattern Name: -

Seam Allowance: 1 (3/8 in)

Pattern pieces:


1. "CENTER FRONT", MAIN FABRIC: Cut 2
2. "SIDE FRONT", MAIN FABRIC: Cut 2
3. "CENTER BACK", MAIN FABRIC: Cut 1
4. "SIDE BACK", MAIN FABRIC: Cut 2
5. "SLEEVE", MAIN FABRIC: Cut 2
6. "FRONT NECK FACING", MAIN FABRIC, FUSIBLE INTERFACING: Cut 2
7. "BACK NECK FACING", MAIN FABRIC, FUSIBLE INTERFACING: Cut 1
8. "COLLAR STAND", MAIN FABRIC, FUSIBLE INTERFACING: Cut 2
9. "WELT", MAIN FABRIC, FUSIBLE INTERFACING: Cut 2
10. "INNER POCKET BAG", LINING: Cut 2
11. "OUTER POCKET BAG", MAIN FABRIC: Cut 2





Pattern Specs (Circumferences are divided by 2):


1. Hem max 3.00 none (1 1/8 in)
2. Seam allowance max 2.00 none (3/4 in)
3. Seam allowance p max 1.50 none (5/8 in)
4. Stretch factor 1.00 none (3/8 in)
5. Stretch factor horizontal 1.00 none (3/8 in)
6. Stretch factor vertical 1.00 none (3/8 in)
7. Front neck drop 8.96 cm (3 1/2 in)
8. Pocket entry length 12.52 cm (4 7/8 in)
9. Waist to pocket length 4.67 cm (1 7/8 in)
10. Side seam pocket position 3.22 cm (1 1/4 in)
11. Pocket width welt 3.00 cm (1 1/8 in)
12. Button diameter 1.00 cm (3/8 in)
13. Front buttons quantity 13.00 pc
14. Front length from HPS to hem 103.42 cm (40 3/4 in)
15. Across chest 54.96 cm (21 5/8 in)
16. Center front length to hem 94.65 cm (37 1/4 in)
17. Center back length to hem 98.95 cm (39 in)
18. Across front 40.52 cm (16 in)
19. Across back 36.56 cm (14 3/8 in)
20. Across shoulders 40.23 cm (15 7/8 in)

21. Side seam 73.43 cm (28 7/8 in)
22. Waist 47.43 cm (18 5/8 in)
23. Low hips 60.44 cm (23 3/4 in)
24. Hemline sweep 132.64 cm (52 1/4 in)
25. Armhole length front 24.69 cm (9 3/4 in)
26. Armhole length back 30.18 cm (11 7/8 in)
27. Neck opening 15.96 cm (6 1/4 in)
28. Back neck drop 3.70 cm (1 1/2 in)
29. Shoulder width 12.59 cm (5 in)
30. Neckline length 44.97 cm (17 3/4 in)
31. Seam allowance poc max 3.00 none (1 1/8 in)
32. Pocket bag height 17.70 cm (7 in)
33. Sleeve length 58.24 cm (22 7/8 in)
34. Sleeve upper arm width 37.29 cm (14 5/8 in)
35. Sleeve opening 25.57 cm (10 1/8 in)
36. Sleeve cap length 56.25 none (22 1/8 in)
37. Stand height 3.00 cm (1 1/8 in)
38. Collar length 44.97 cm (17 3/4 in)


Paper Size: A0;
Print Actual Size (100% Scale);

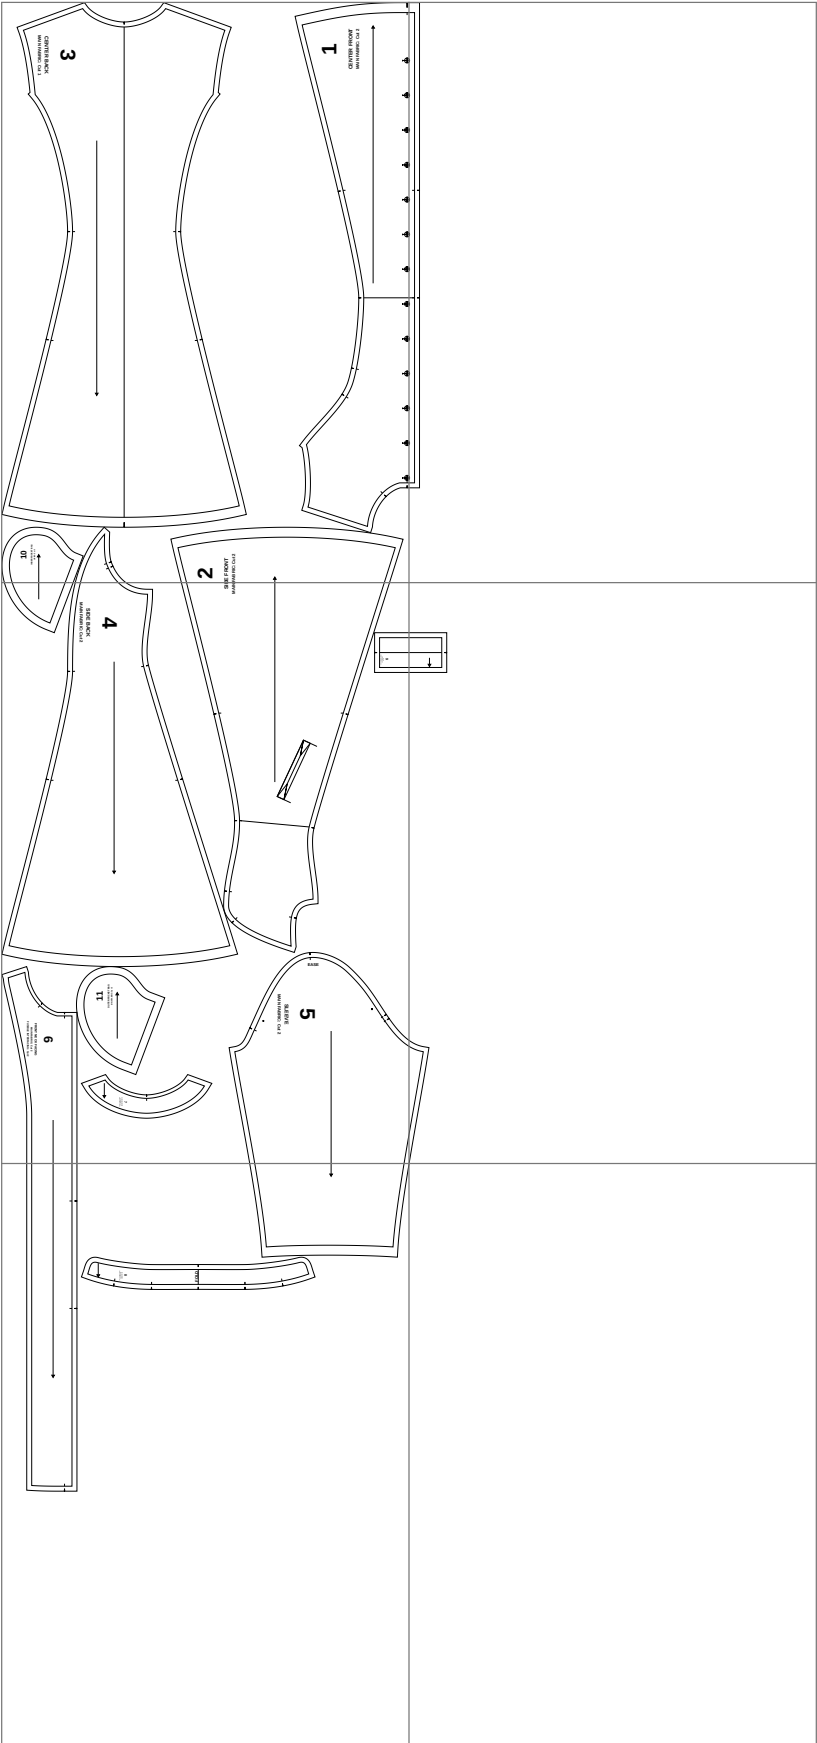

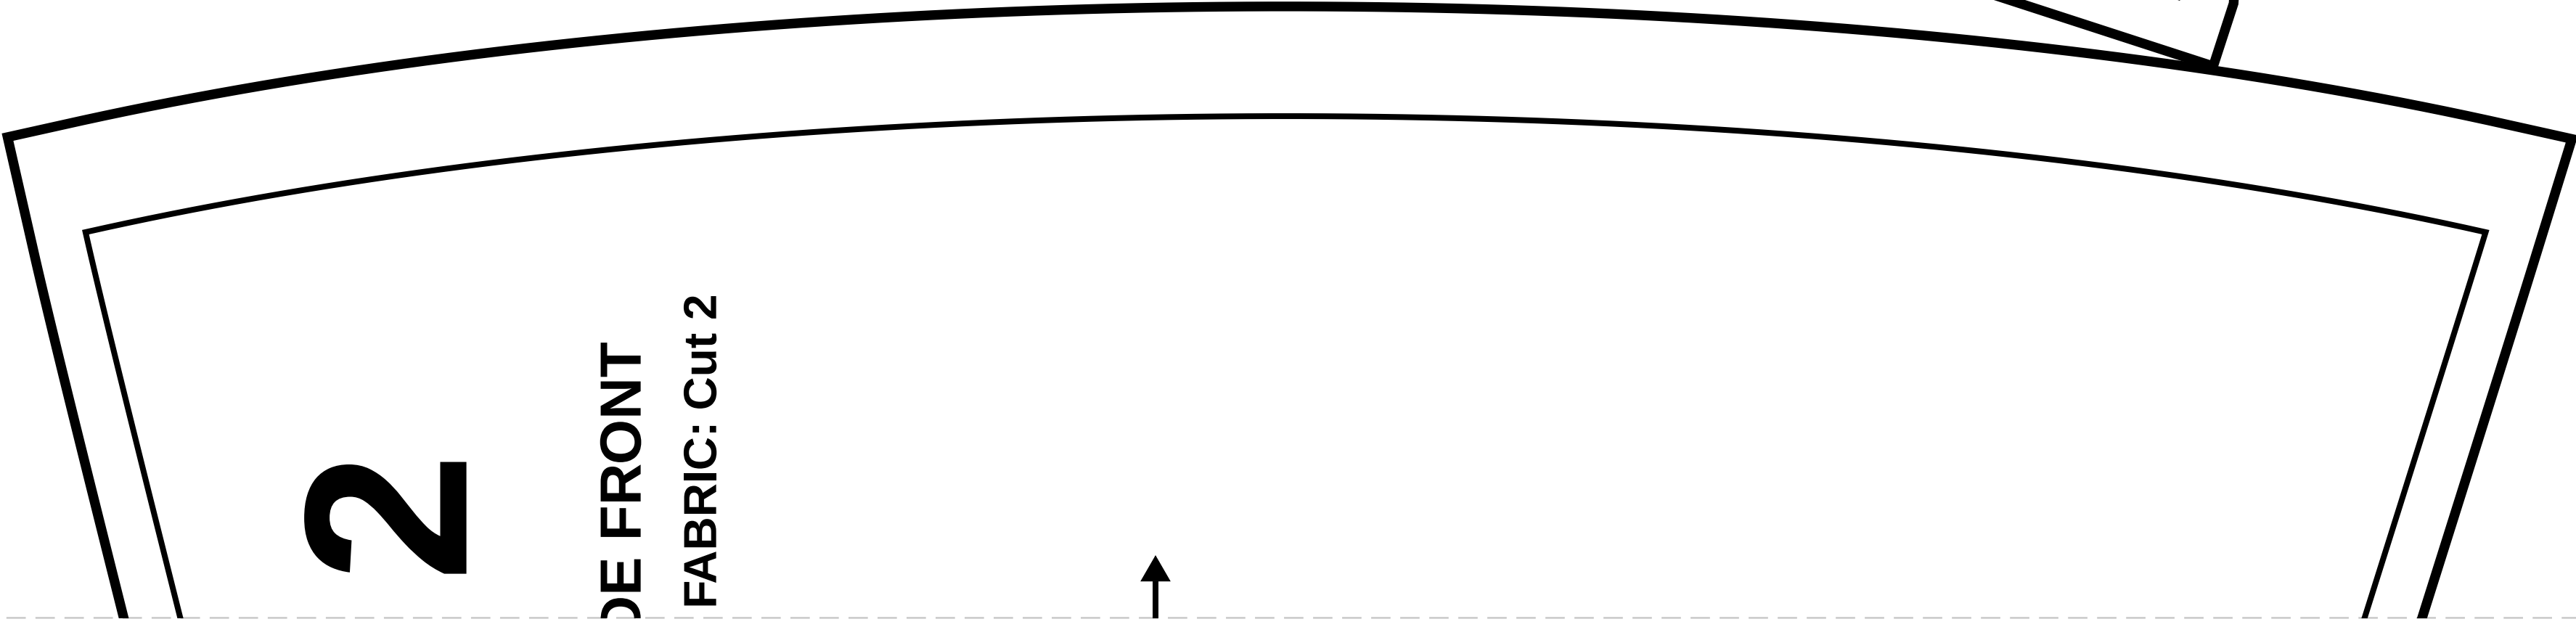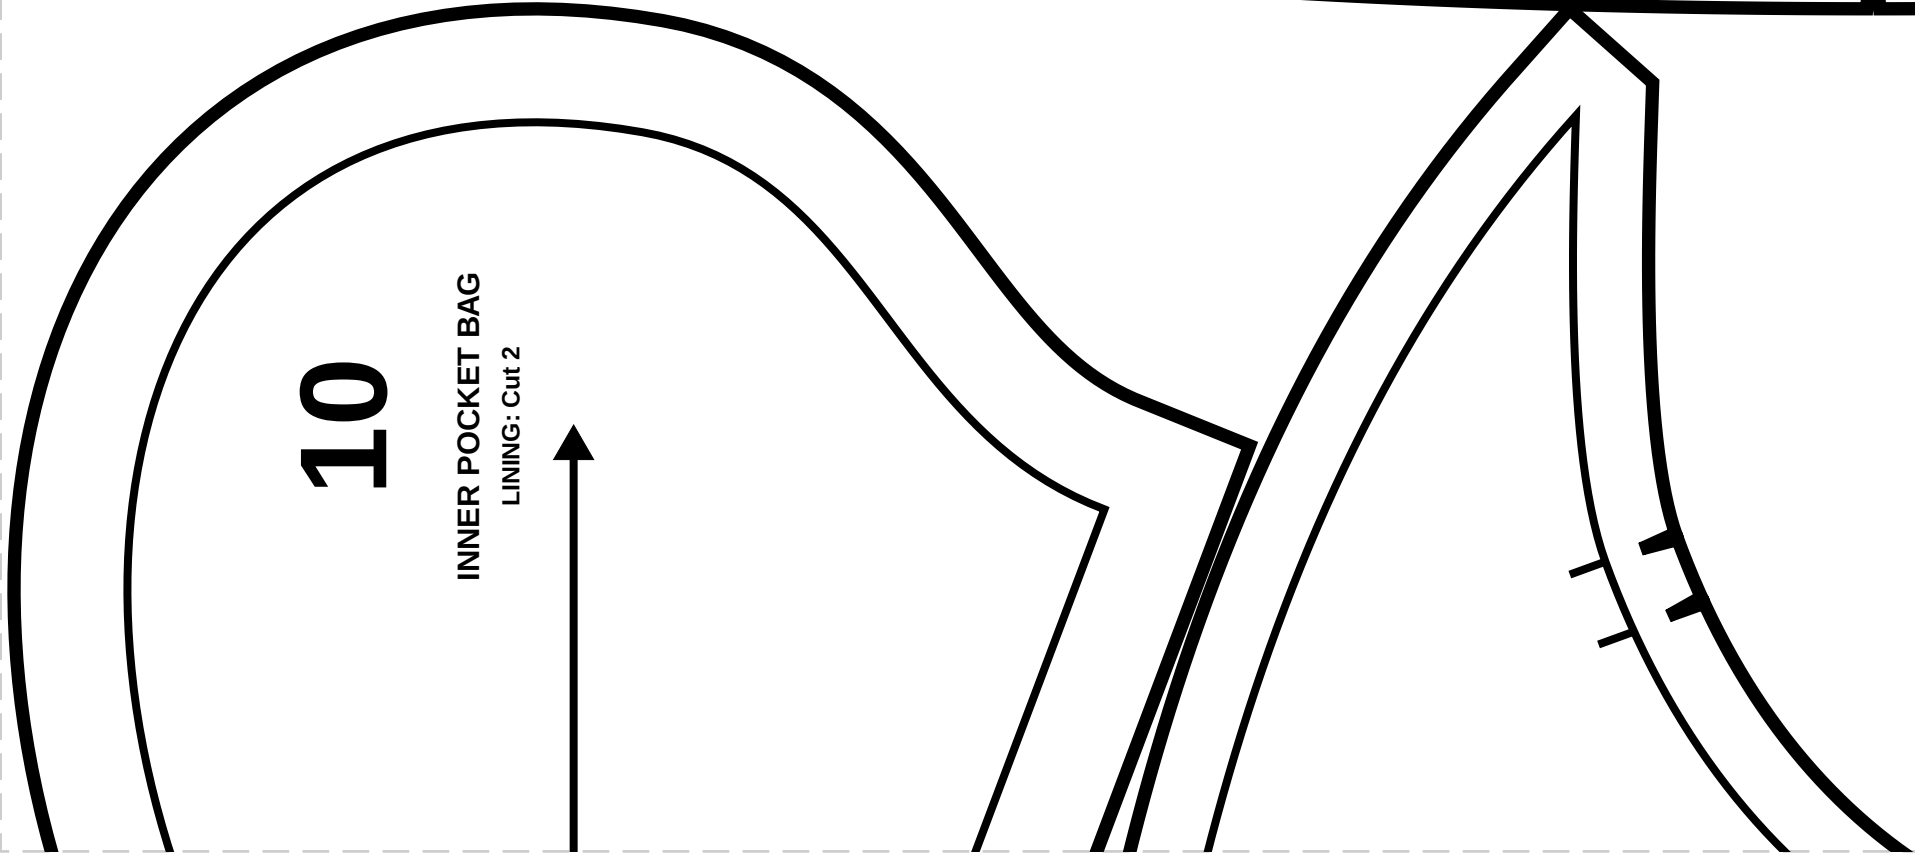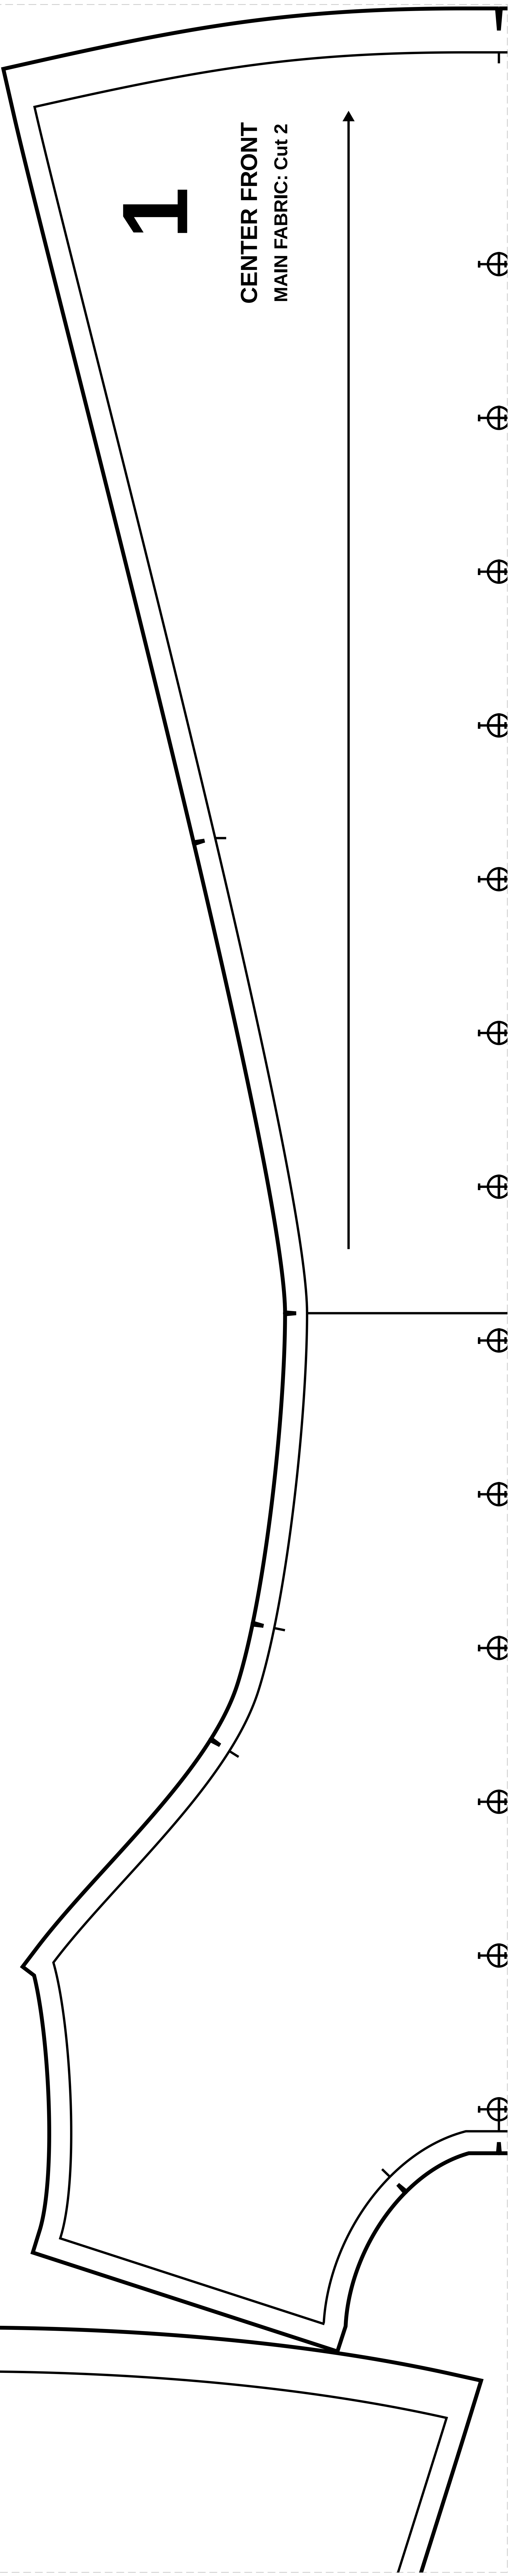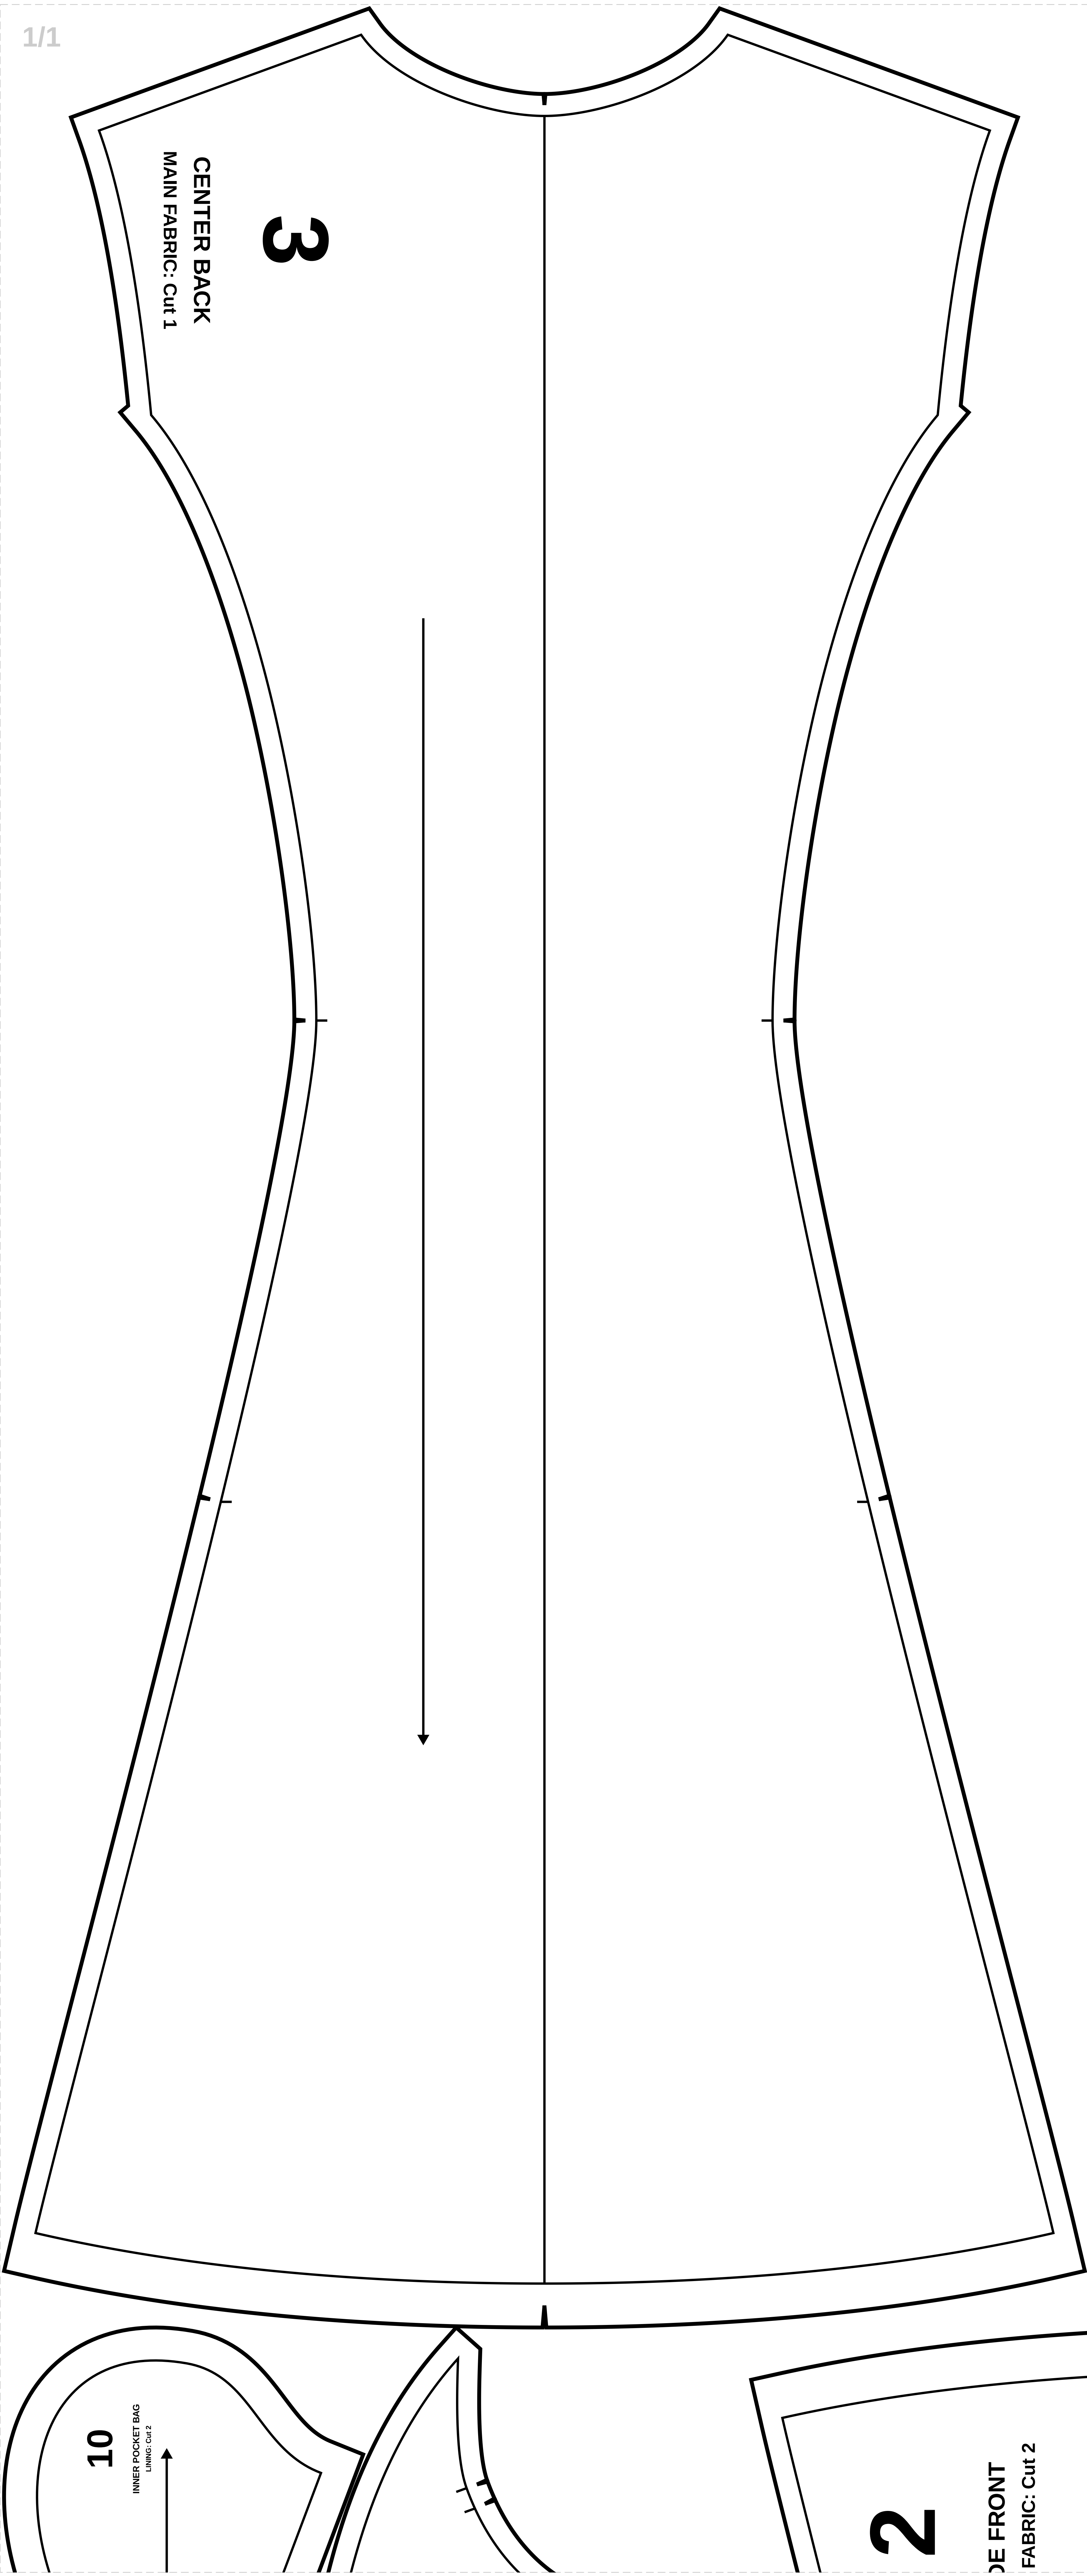

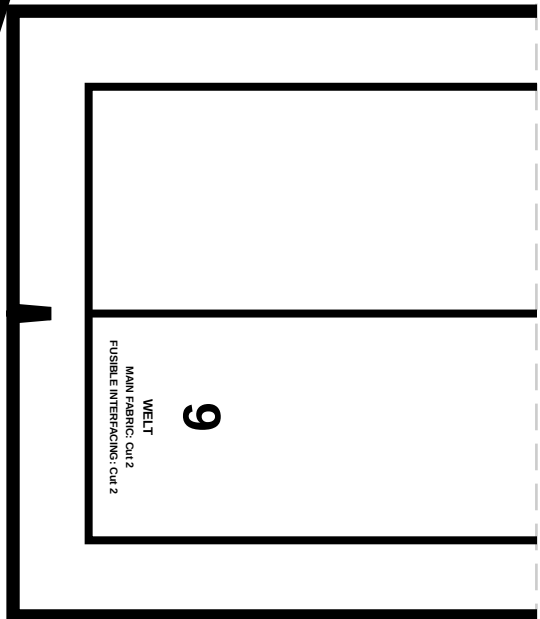

SIL
MAIN

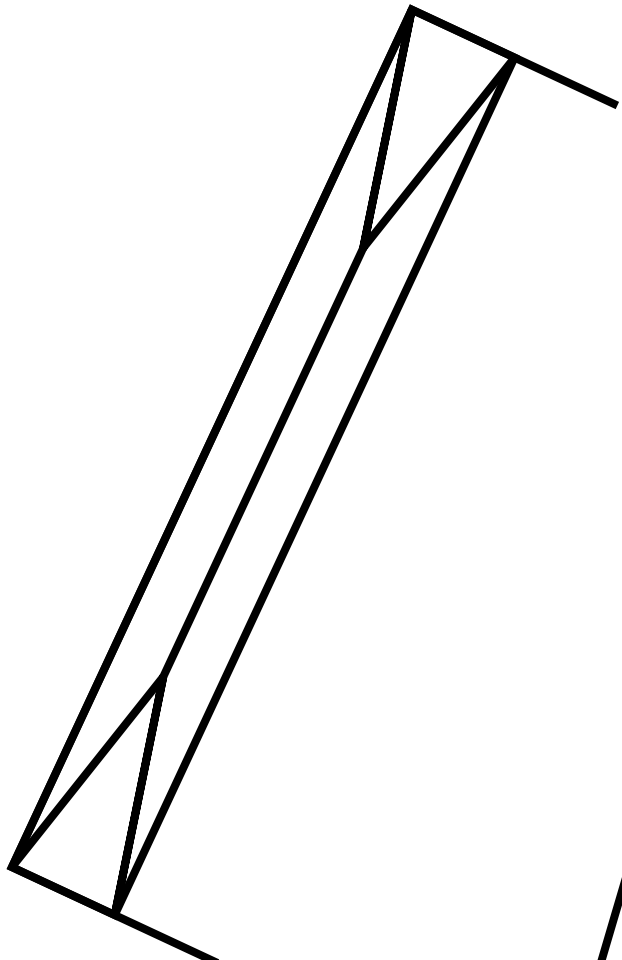

4

SIDE BACK

MAIN FABRIC: Cut 2



EASE

5

SLEEVE

MAIN FABRIC: Cut 2

11

OUTER POCKET BAG

MAIN FABRIC: Cut 2



7

MAIN FABRIC: Cut 2



6

FRONT NECK FACING

MAIN FABRIC: Cut 2

FUSIBLE INTERFACING: Cut 2

