

# Print this Calibration Test page first!

Size: Height: 167.75, Bust: 124.25, Waist: 110.5, Hips: 130.75  
Pattern Name: -

## Notes

## How to print Printing

Once your Calibration Test Page has been printed, measure the 4"x 4" (10cm) scale box with a ruler. If the lengths match, you can confidently print your pattern. If the rulers do not match, set your print settings to 100% or Actual and retry.

## Cutting

Your printouts will always have a dashed border to perfectly match your sheets. Cut off the right edge of each page. Be careful not to cut beyond the dashed mark, otherwise your patterns will not align accurately.

## Tapping

Group each sheet by the second number marked on each pate i.e. in a group 1, there are: 1/1, 2/1, 3/1, 4/1, etc. In a group 2: 1/2, 2/2 etc. 2. Place page 1/1 on top of the page 2/1, overlapping the right side edge. Match corners and crosses and secure with a pin or tape. Then use a scotch tape to permanently attach the sheets together.



Pattern Name: -

Seam Allowance: 1 (3/8 in)

Pattern pieces:


1. "CENTER FRONT", MAIN FABRIC: Cut 2
2. "SIDE FRONT", MAIN FABRIC: Cut 2
3. "CENTER BACK", MAIN FABRIC: Cut 1
4. "SIDE BACK", MAIN FABRIC: Cut 2
5. "SLEEVE", MAIN FABRIC: Cut 2
6. "FRONT NECK FACING", MAIN FABRIC, FUSIBLE INTERFACING: Cut 2
7. "BACK NECK FACING", MAIN FABRIC, FUSIBLE INTERFACING: Cut 1
8. "COLLAR STAND", MAIN FABRIC, FUSIBLE INTERFACING: Cut 2
9. "WELT", MAIN FABRIC, FUSIBLE INTERFACING: Cut 2
10. "INNER POCKET BAG", LINING: Cut 2
11. "OUTER POCKET BAG", MAIN FABRIC: Cut 2


Pattern Specs (Circumferences are divided by 2):




1. Hem max 3.00 none (1 1/8 in)
2. Seam allowance max 2.00 none (3/4 in)
3. Seam allowance p max 1.50 none (5/8 in)
4. Stretch factor 1.00 none (3/8 in)
5. Stretch factor horizontal 1.00 none (3/8 in)
6. Stretch factor vertical 1.00 none (3/8 in)
7. Front neck drop 9.59 cm (3 3/4 in)
8. Pocket entry length 13.77 cm (5 3/8 in)
9. Waist to pocket length 4.88 cm (1 7/8 in)
10. Side seam pocket position 4.14 cm (1 5/8 in)
11. Pocket width welt 3.00 cm (1 1/8 in)
12. Button diameter 1.00 cm (3/8 in)
13. Front buttons quantity 14.00 pc
14. Front length from HPS to hem 106.73 cm (42 in)
15. Across chest 65.17 cm (25 5/8 in)
16. Center front length to hem 97.31 cm (38 1/4 in)
17. Center back length to hem 99.57 cm (39 1/4 in)
18. Across front 47.36 cm (18 5/8 in)
19. Across back 39.72 cm (15 5/8 in)
20. Across shoulders 42.29 cm (16 5/8 in)

21. Side seam 72.54 cm (28 1/2 in)
22. Waist 59.16 cm (23 1/4 in)
23. Low hips 71.35 cm (28 1/8 in)
24. Hemline sweep 143.54 cm (56 1/2 in)
25. Armhole length front 27.08 cm (10 5/8 in)
26. Armhole length back 32.78 cm (12 7/8 in)
27. Neck opening 17.21 cm (6 3/4 in)
28. Back neck drop 3.82 cm (1 1/2 in)
29. Shoulder width 12.99 cm (5 1/8 in)
30. Neckline length 48.24 cm (19 in)
31. Seam allowance poc max 3.00 none (1 1/8 in)
32. Pocket bag height 19.44 cm (7 5/8 in)
33. Sleeve length 58.54 cm (23 in)
34. Sleeve upper arm width 46.46 cm (18 1/4 in)
35. Sleeve opening 27.55 cm (10 7/8 in)
36. Sleeve cap length 61.66 none (24 1/4 in)
37. Stand height 3.00 cm (1 1/8 in)
38. Collar length 48.24 cm (19 in)

Paper Size: A0;  
Print Actual Size (100% Scale);

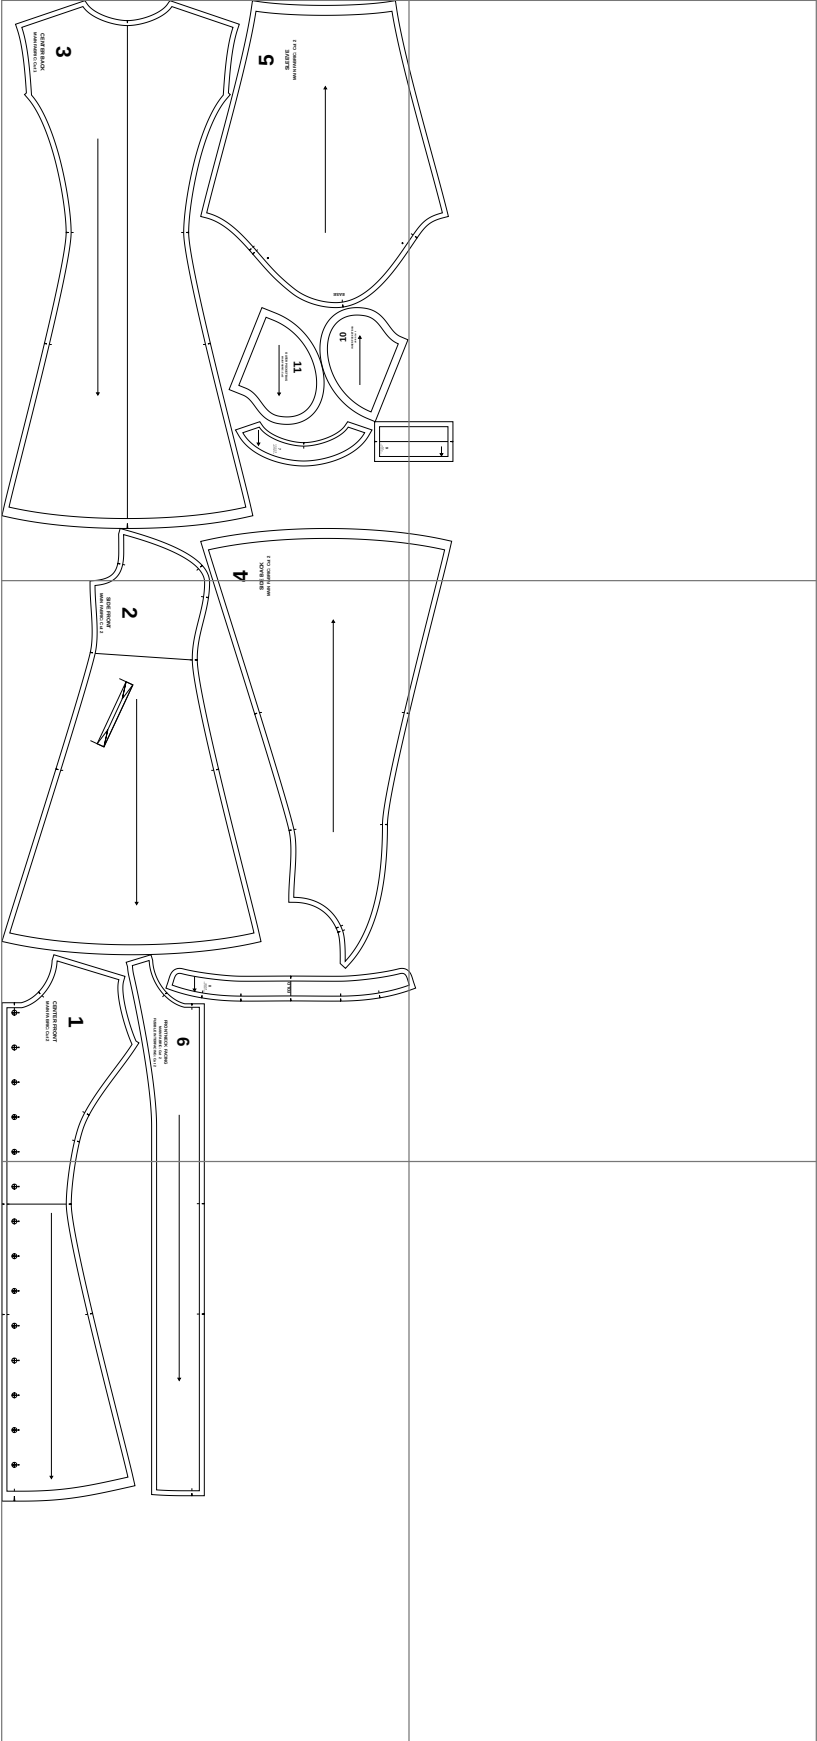

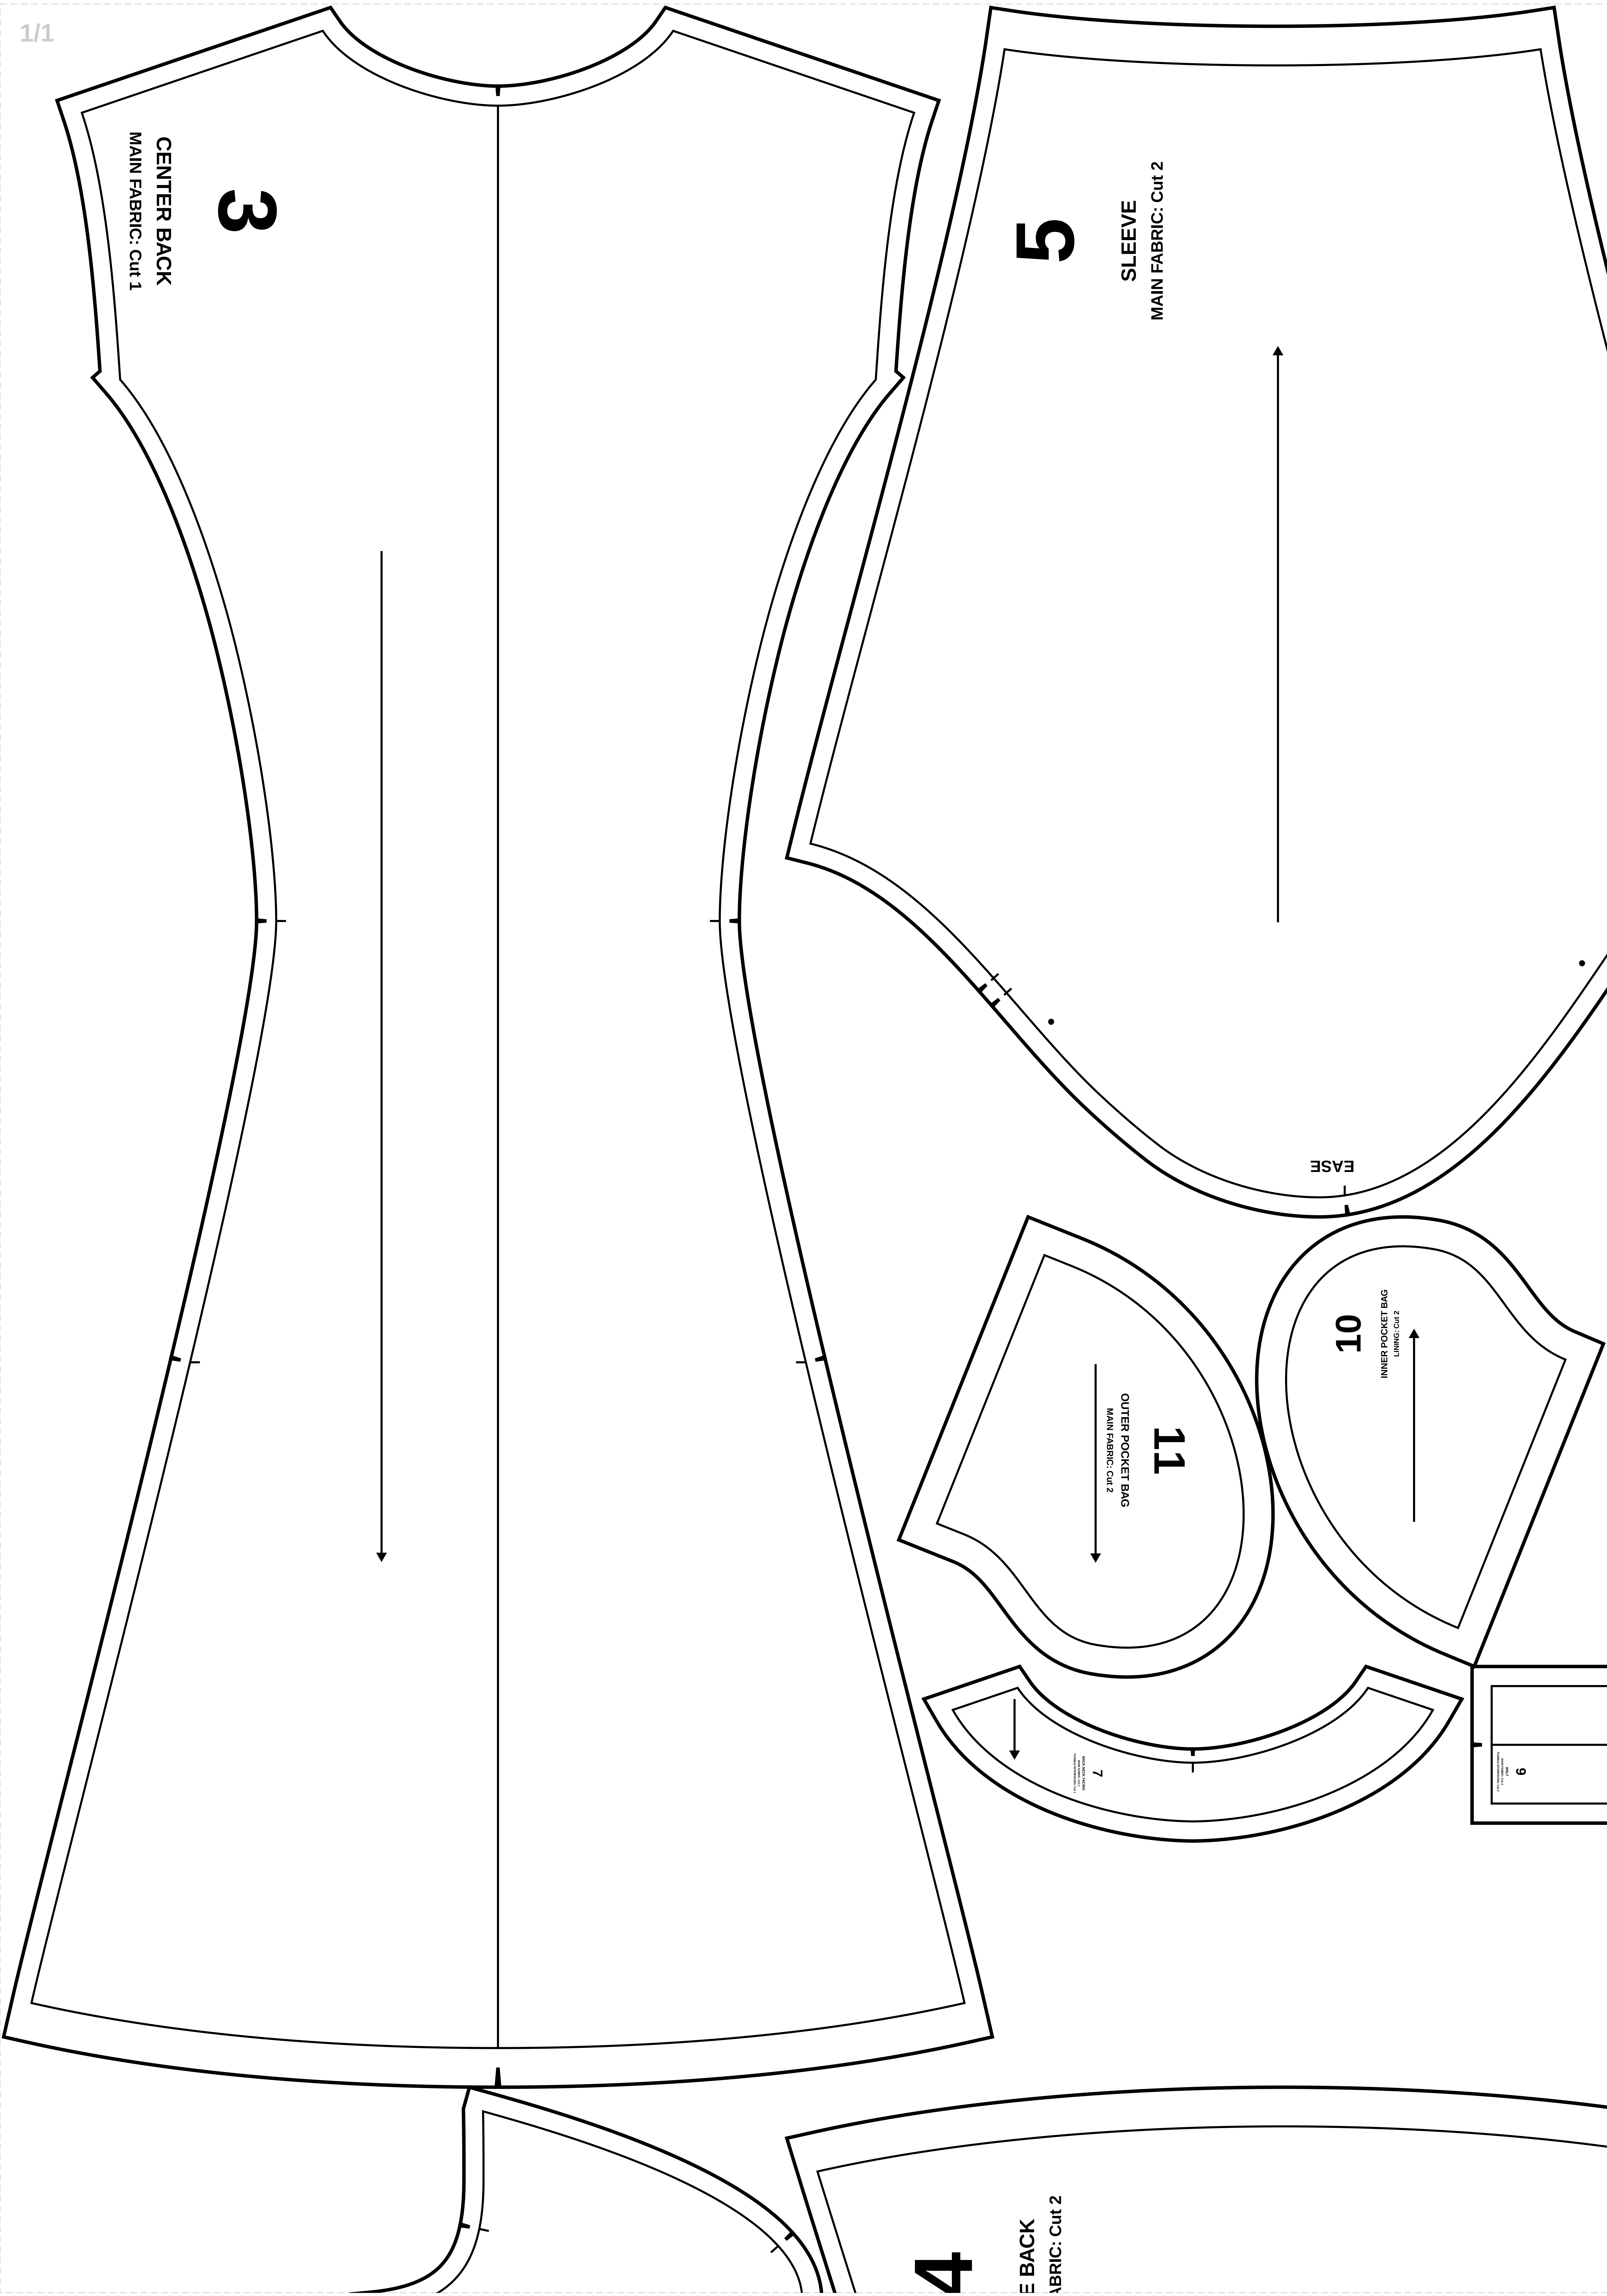

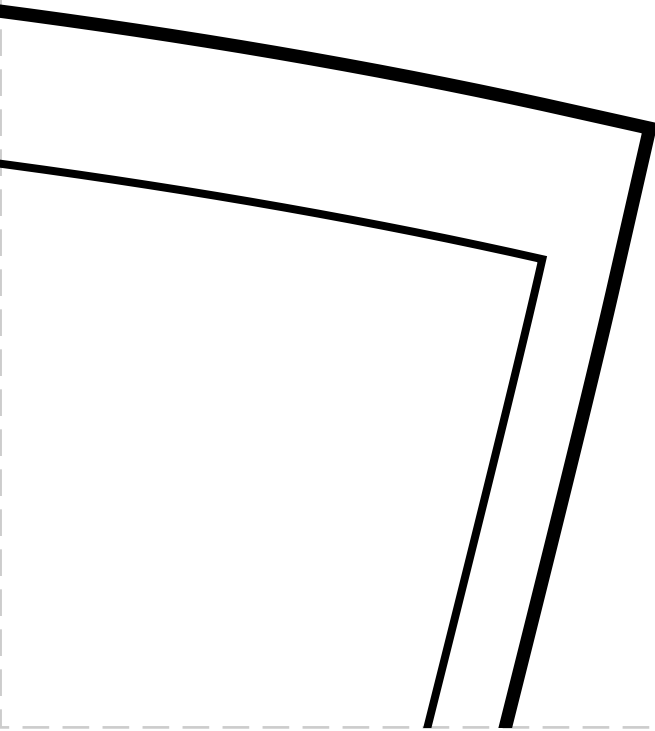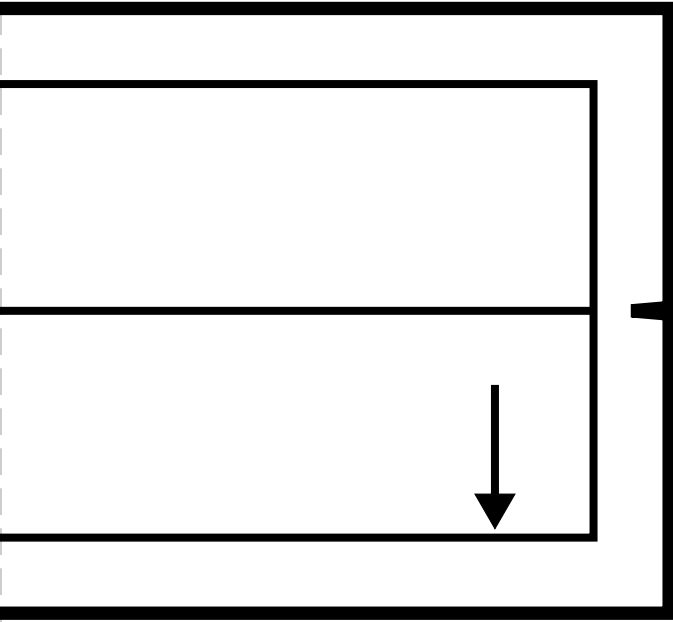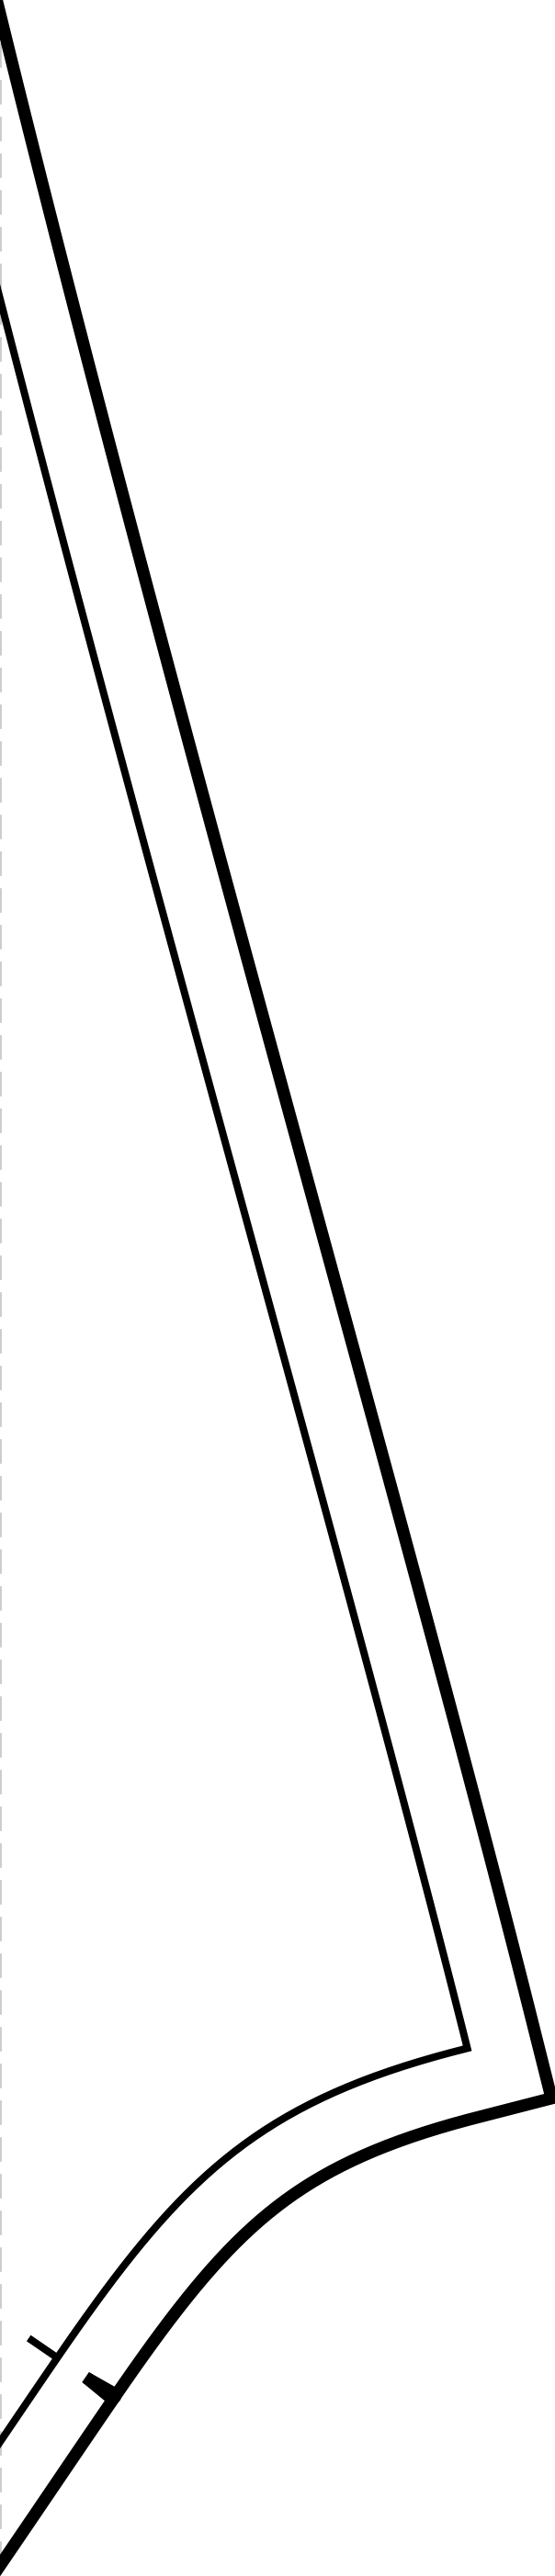

MAIN FABRIC  
SIDE



FOLD

8

8

6

FRONT NECK FACING  
MAIN FABRIC: Cut 2  
FUSIBLE INTERFACING: Cut 2

1

CENTER FRONT  
MAIN FABRIC: Cut 2

2

SIDE FRONT  
MAIN FABRIC: Cut 2

