

Print this Calibration Test page first!

Size: Height: 167.75, Bust: 124.25, Waist: 110.5, Hips: 130.75

Notes

How to print Printing

Once your Calibration Test Page has been printed, measure the 4"x 4" (10cm) scale box with a ruler. If the lengths match, you can confidently print your pattern. If the rulers do not match, set your print settings to 100% or Actual and retry.

Cutting

Your printouts will always have a dashed border to perfectly match your sheets. Cut off the right edge of each page. Be careful not to cut beyond the dashed mark, otherwise your patterns will not align accurately.

Tapping

Group each sheet by the second number marked on each pate i.e. in a group 1, there are: 1/1, 2/1, 3/1, 4/1, etc. In a group 2: 1/2, 2/2 etc. 2. Place page 1/1 on top of the page 2/1, overlapping the right side edge. Match corners and crosses and secure with a pin or tape. Then use a scotch tape to permanently attach the sheets together.



Seam Allowance: 1 (3/8 in)

Pattern pieces:

1. "FRONT", MAIN FABRIC: Cut 2
2. "BACK", MAIN FABRIC: Cut 2
3. "FRONT NECK FACING", MAIN FABRIC, FUSIBLE INTERFACING: Cut 2
4. "BACK NECK FACING", MAIN FABRIC, FUSIBLE INTERFACING: Cut 2

Pattern Specs (Circumferences are divided by 2):

1. Hem max 3.00 none (1 1/8 in)
2. Seam allowance max 2.00 none (3/4 in)
3. Seam allowance p max 1.50 none (5/8 in)
4. Stretch factor 1.00 none (3/8 in)
5. Stretch factor horizontal 1.00 none (3/8 in)
6. Stretch factor vertical 1.00 none (3/8 in)
7. Front neck drop 19.75 cm (7 3/4 in)
8. Button diameter 1.00 cm (3/8 in)
9. Front buttons quantity 9.00 pc
10. Across chest 65.17 cm (25 5/8 in)
11. Waist 59.08 cm (23 1/4 in)
12. Hips 71.35 cm (28 1/8 in)
13. Front length from HPS to hem 89.08 cm (35 1/8 in)
14. Center front length to hem 69.32 cm (27 1/4 in)
15. Center back length to hem 65.86 cm (25 7/8 in)
16. Across front 45.20 cm (17 3/4 in)
17. Across back 39.72 cm (15 5/8 in)
18. Across shoulders 43.96 cm (17 1/4 in)
19. Side seam 41.51 cm (16 3/8 in)
20. Hemline sweep 70.67 cm (27 7/8 in)
21. Armhole length front 25.20 cm (9 7/8 in)
22. Armhole length back 29.51 cm (11 5/8 in)
23. Neck opening 24.86 cm (9 3/4 in)
24. Neckline length 75.53 cm (29 3/4 in)
25. Back neck drop 4.64 cm (1 7/8 in)
26. Shoulder width 9.01 cm (3 1/2 in)
27. Bust dart to bust dart 29.96 cm (11 3/4 in)

Technical drawing of a dress pattern, showing three pieces: 1. FRONT, 2. BACK, and 3. SLEEVE. The drawing includes a grid background and various construction lines and labels.

1 FRONT
 FRONT OF DRESS
 1. Neckline: 1/2" (1.27 cm)
 2. Shoulder: 1/2" (1.27 cm)
 3. Sleeve: 1/2" (1.27 cm)
 4. Waist: 1/2" (1.27 cm)
 5. Hem: 1/2" (1.27 cm)


2 BACK
 BACK OF DRESS
 1. Neckline: 1/2" (1.27 cm)
 2. Shoulder: 1/2" (1.27 cm)
 3. Sleeve: 1/2" (1.27 cm)
 4. Waist: 1/2" (1.27 cm)
 5. Hem: 1/2" (1.27 cm)

3 SLEEVE
 SLEEVE OF DRESS
 1. Neckline: 1/2" (1.27 cm)
 2. Shoulder: 1/2" (1.27 cm)
 3. Sleeve: 1/2" (1.27 cm)
 4. Waist: 1/2" (1.27 cm)
 5. Hem: 1/2" (1.27 cm)

1/1

FRONT

MAIN FABRIC: Cut 2

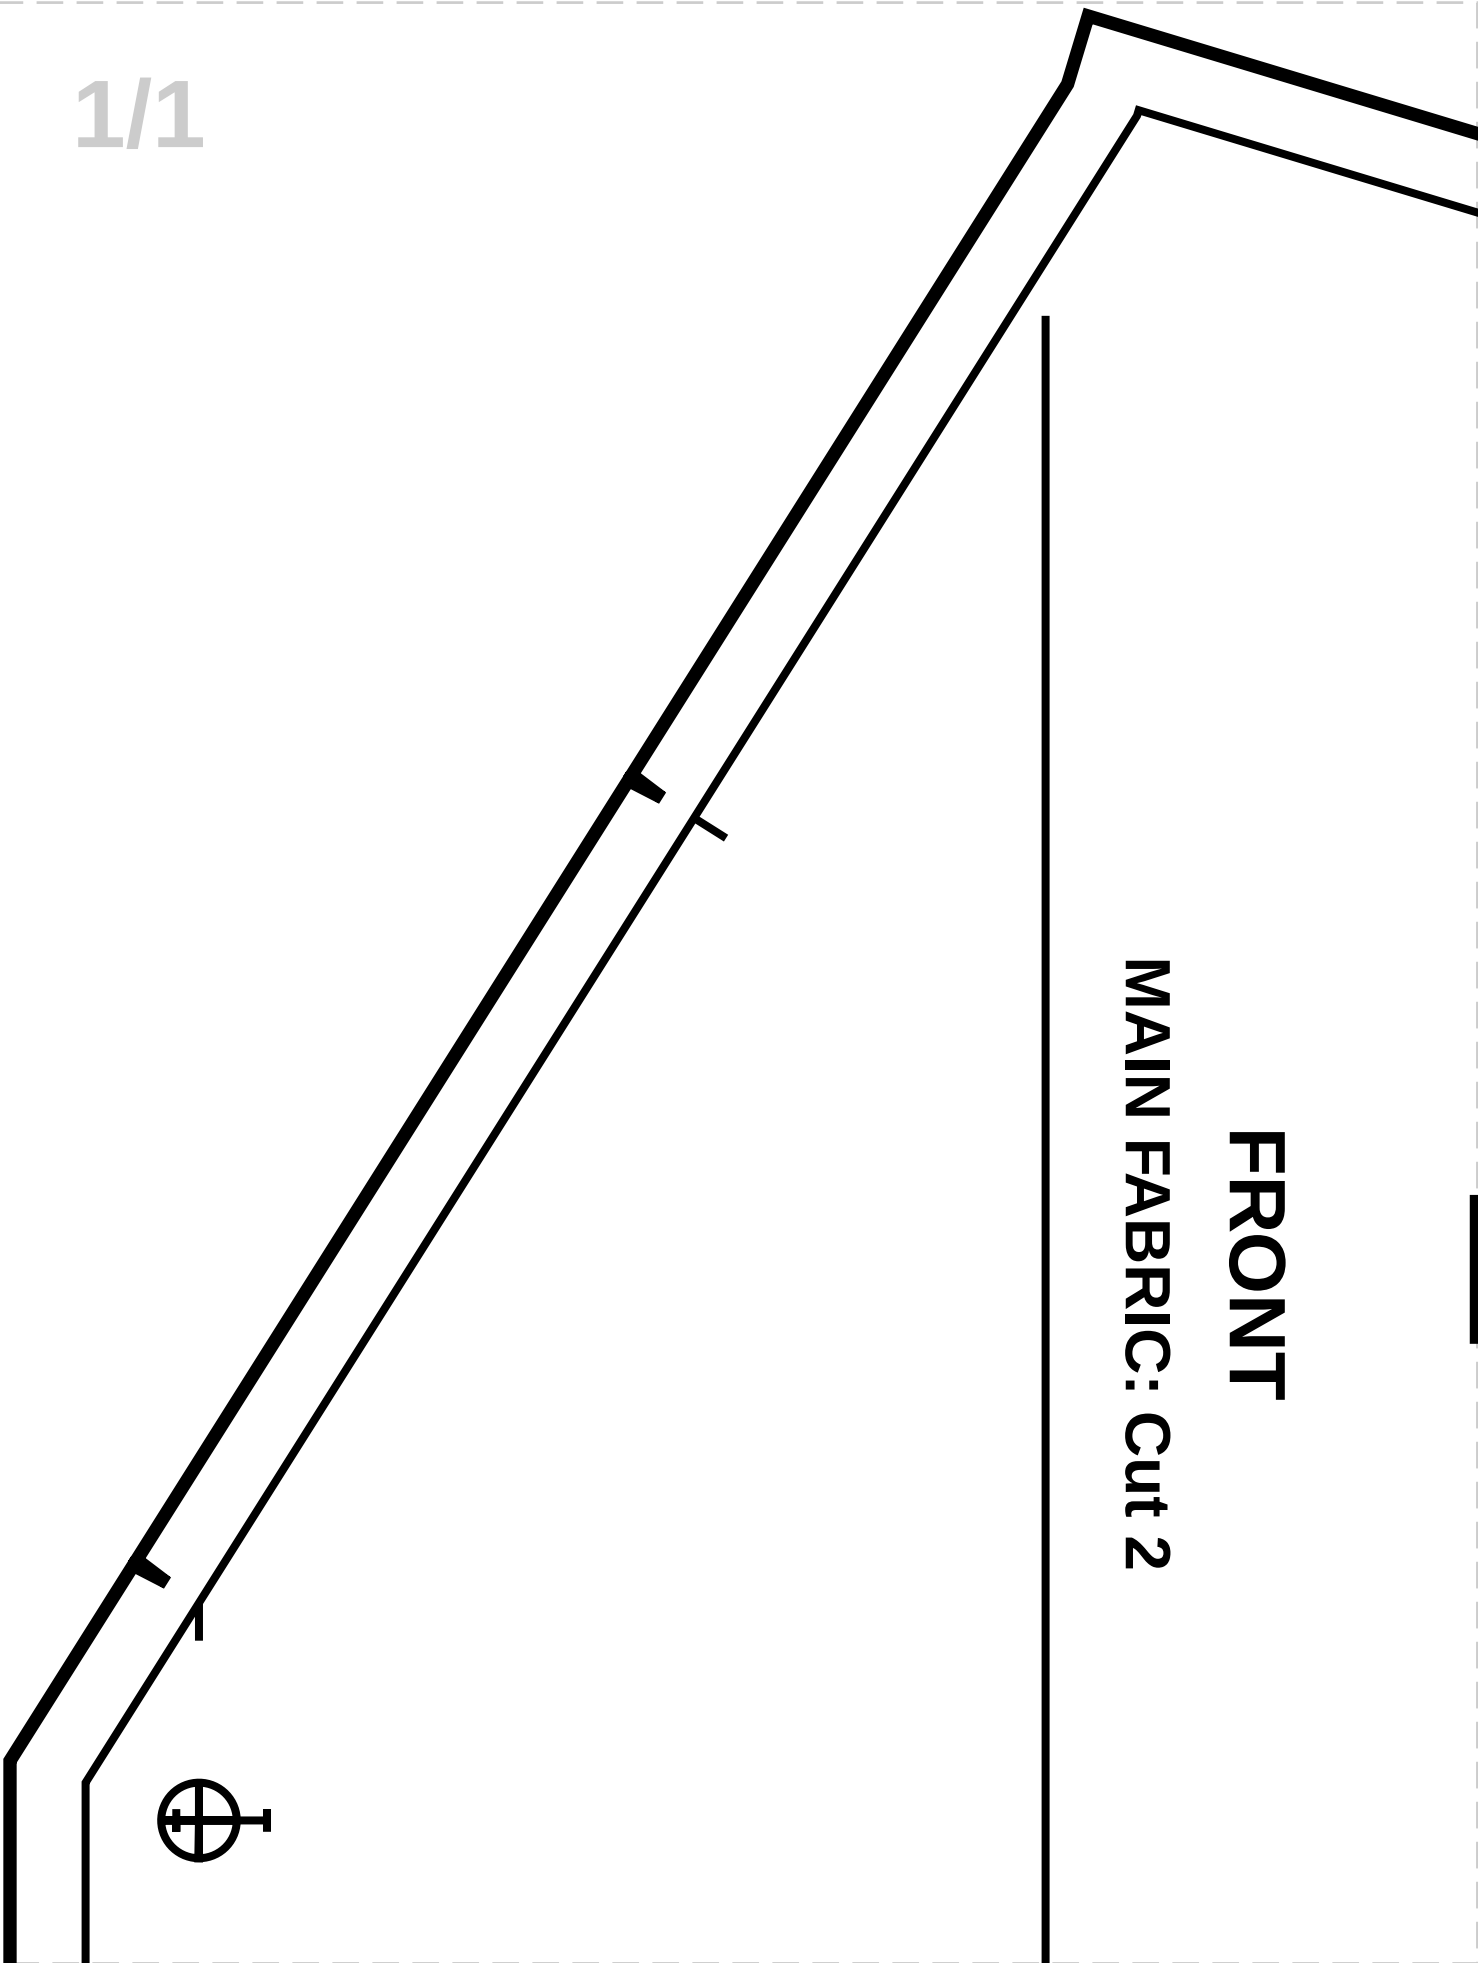

1/2


4

BACK NECK FACING
MAIN FABRIC: CUT 2
FUSIBLE INTERFACING: CUT 2






2/1

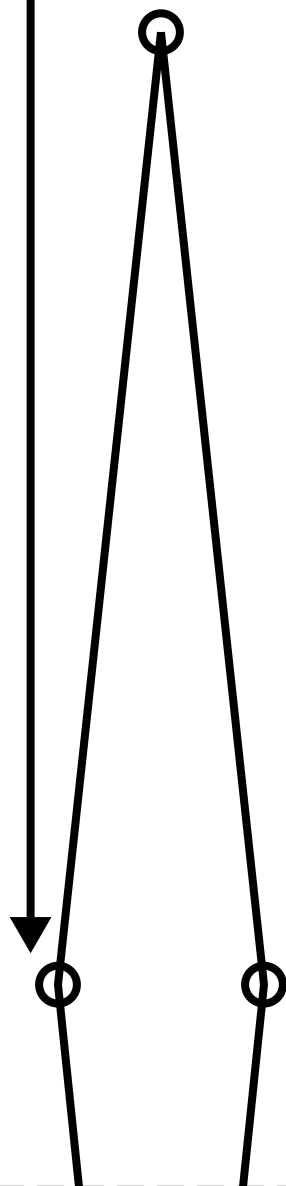


2/2

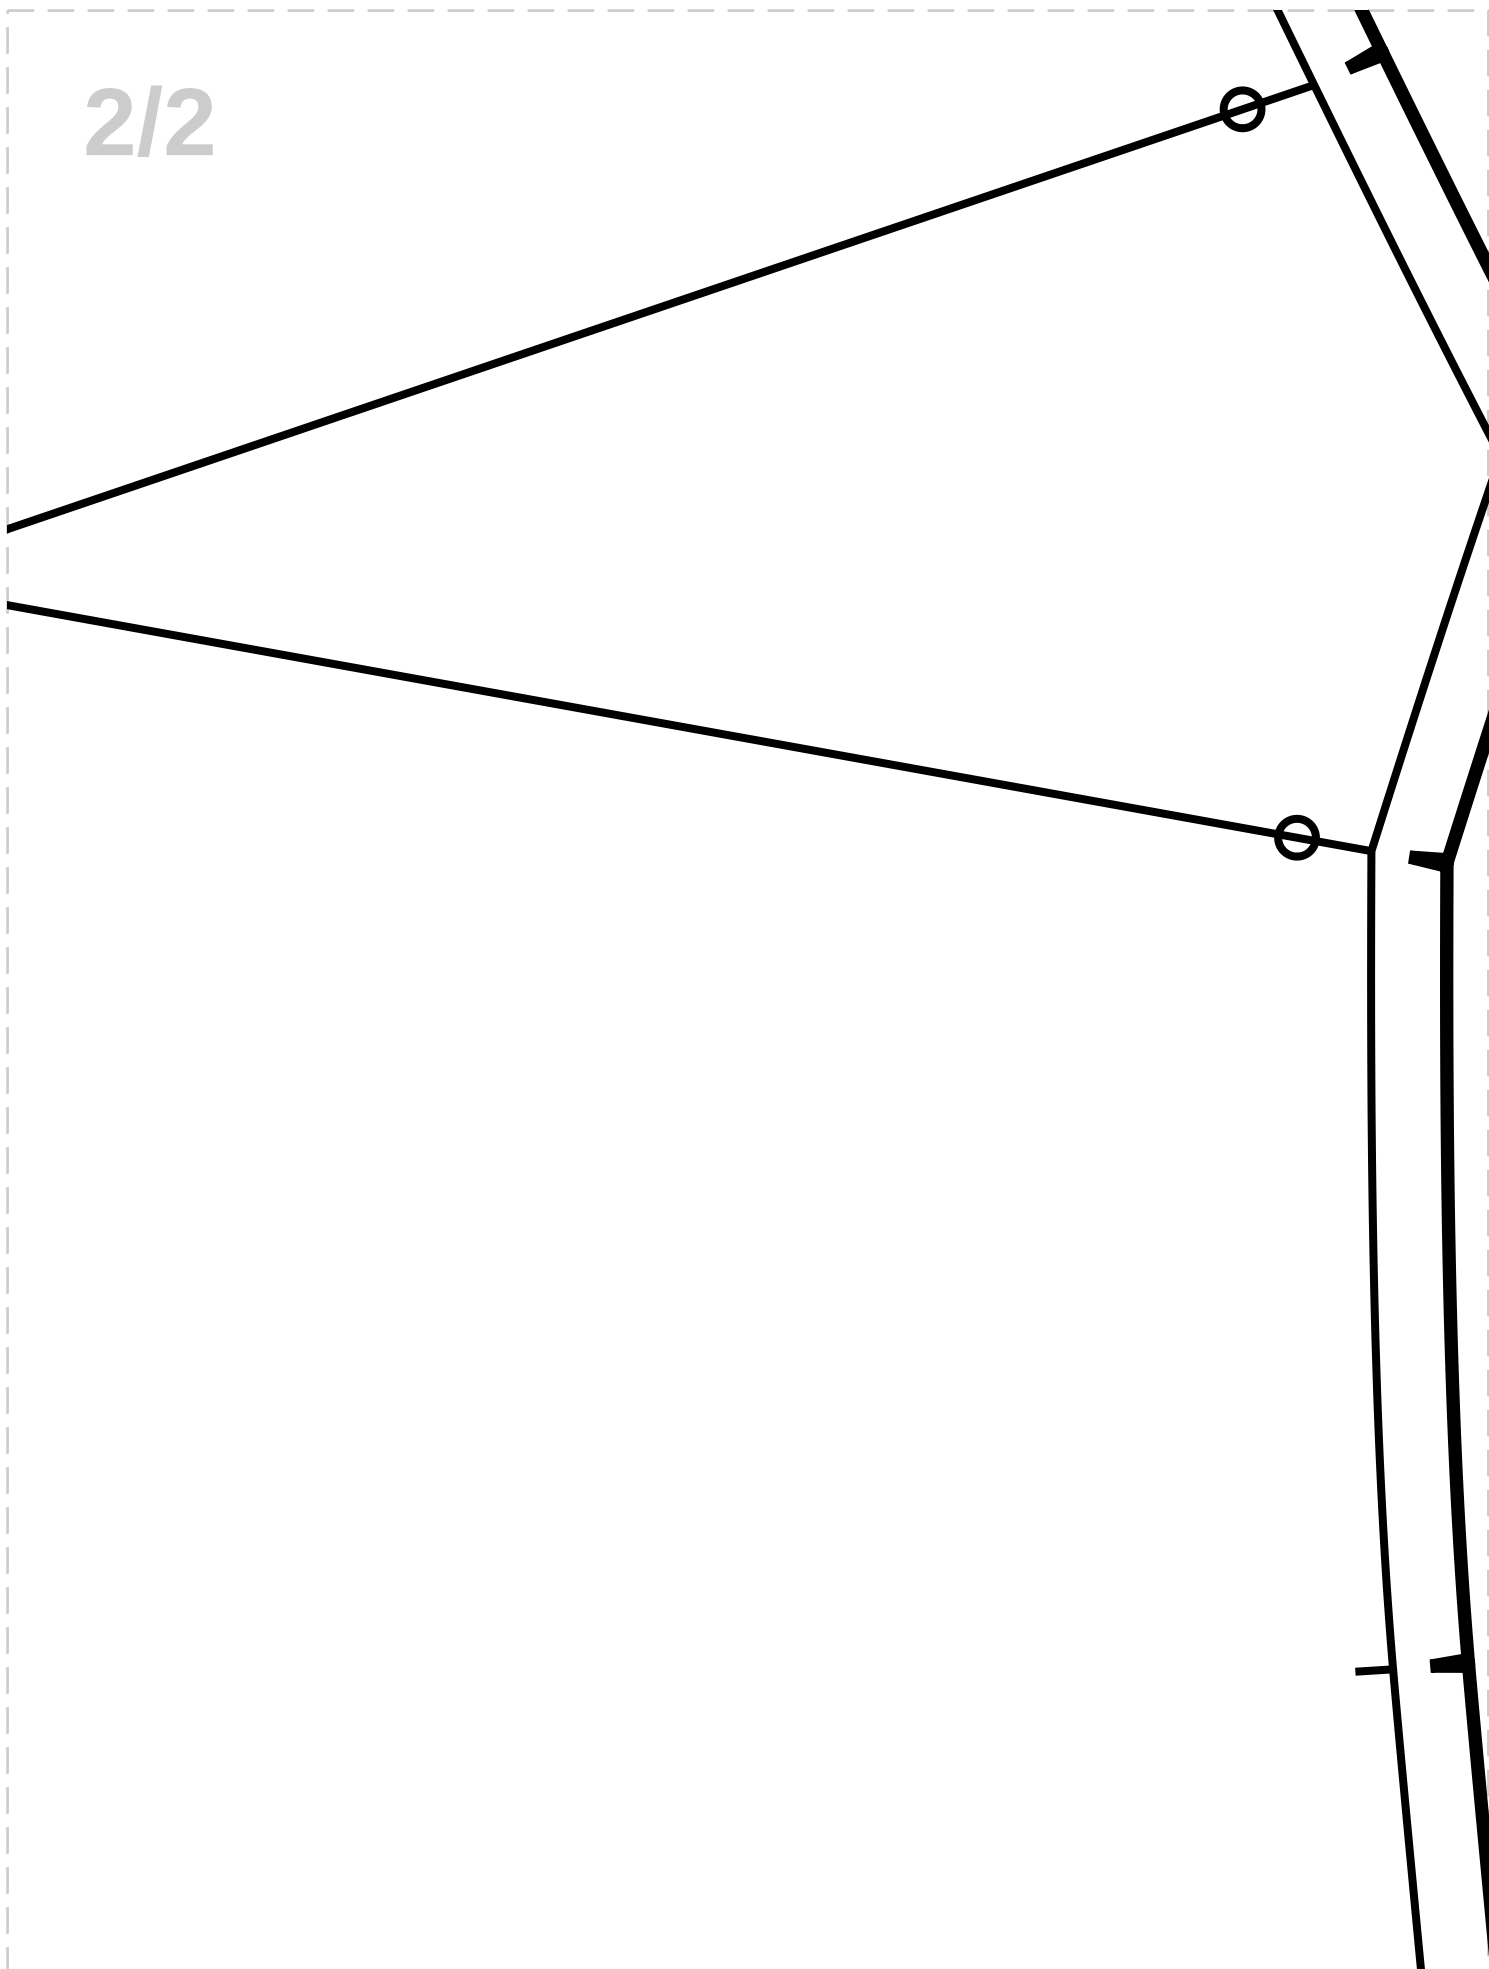


2/3




3/1

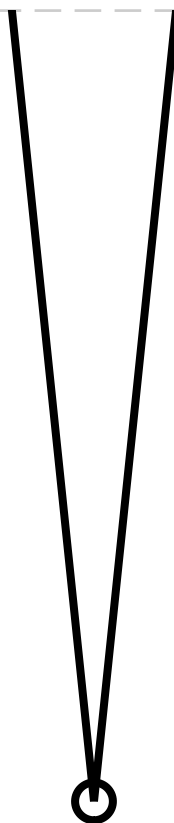


3/2

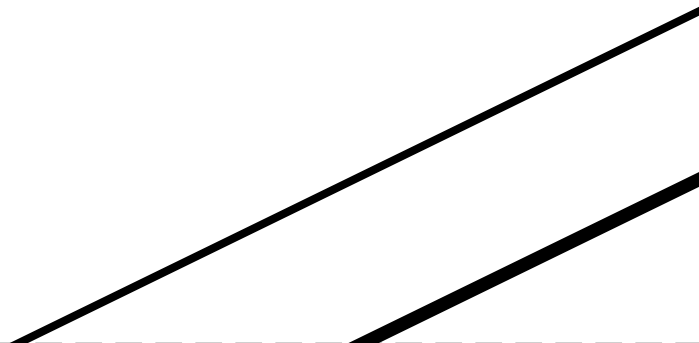



3/3

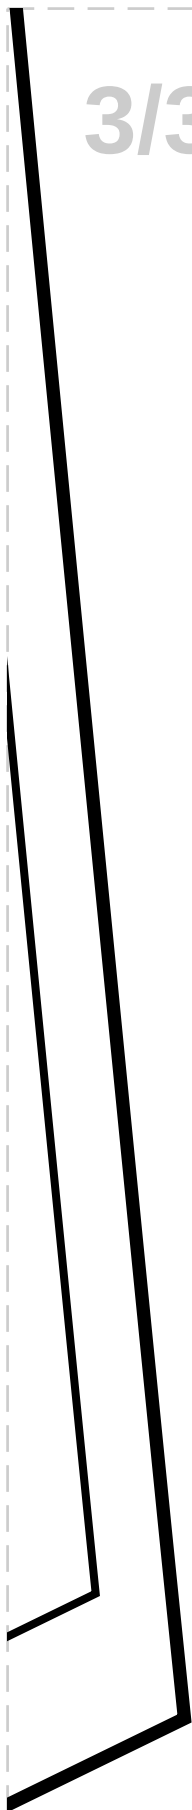

4/1

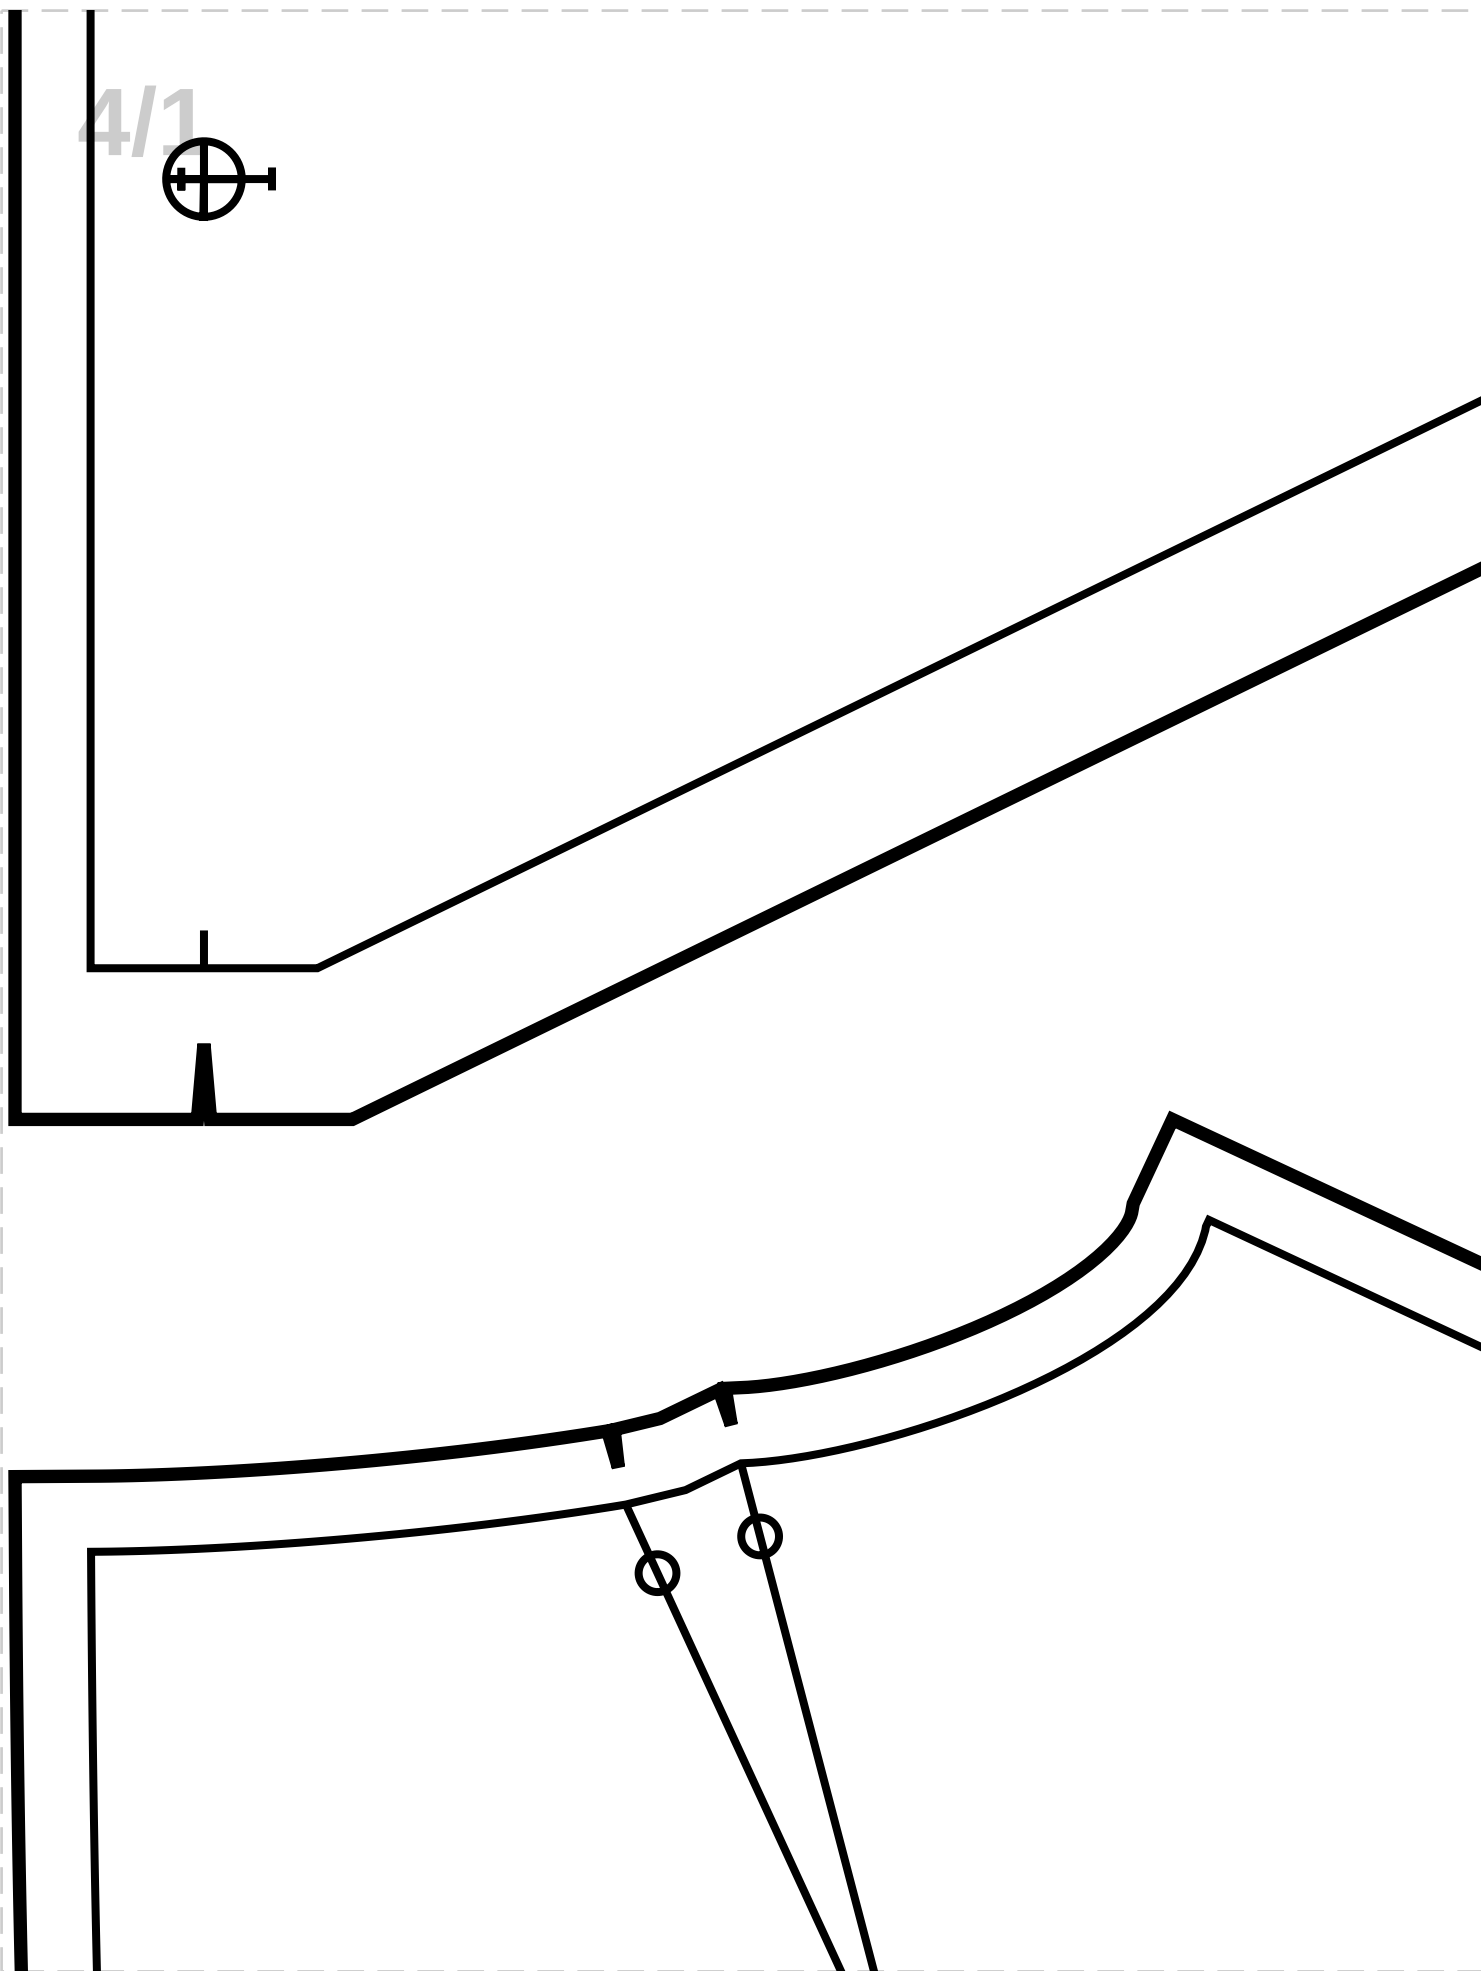

4/2

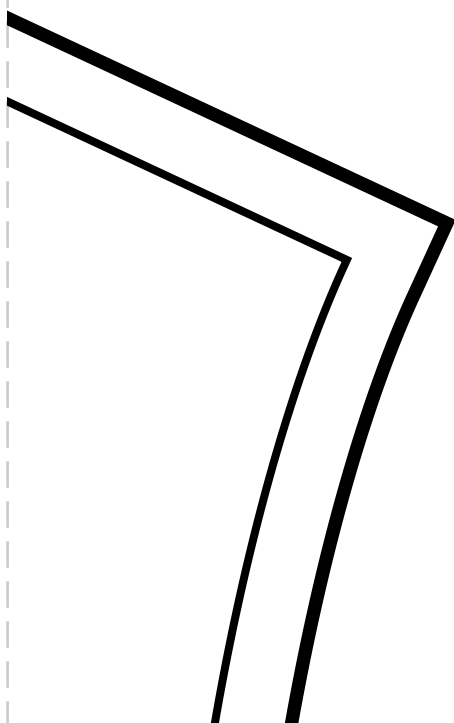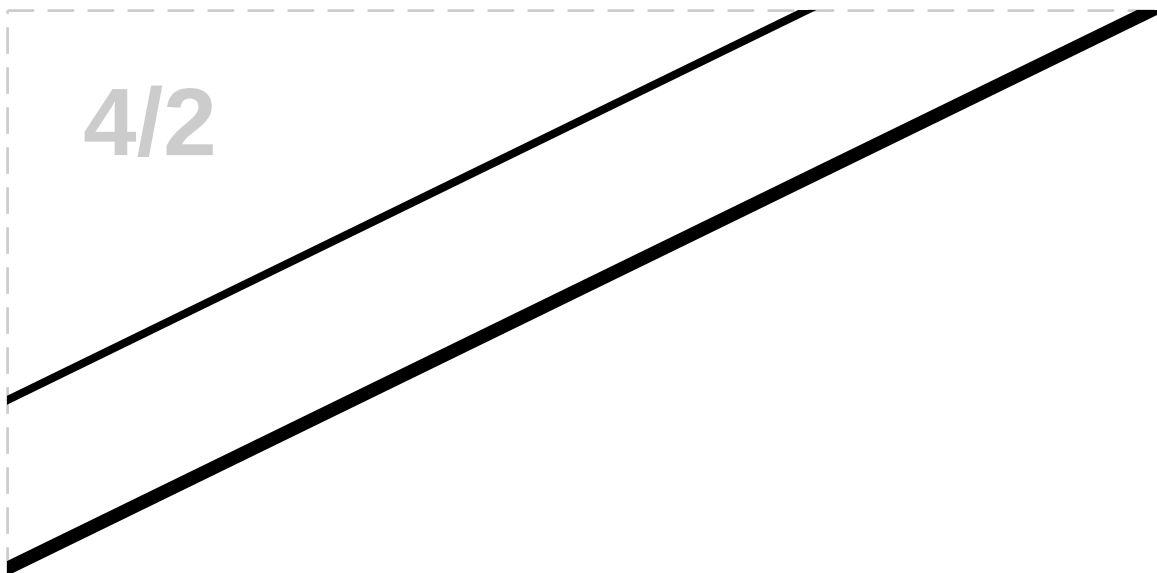

4/3




2


BACK

MAIN FABRIC: Cut 2

5/1


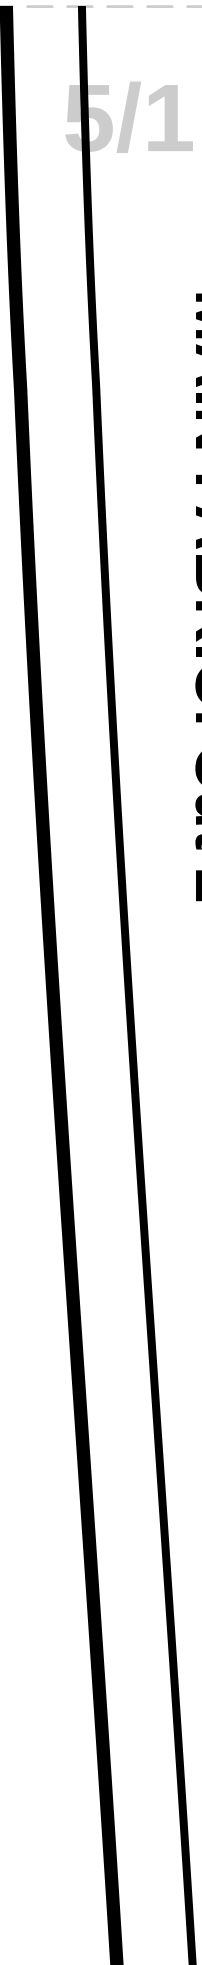


5/2

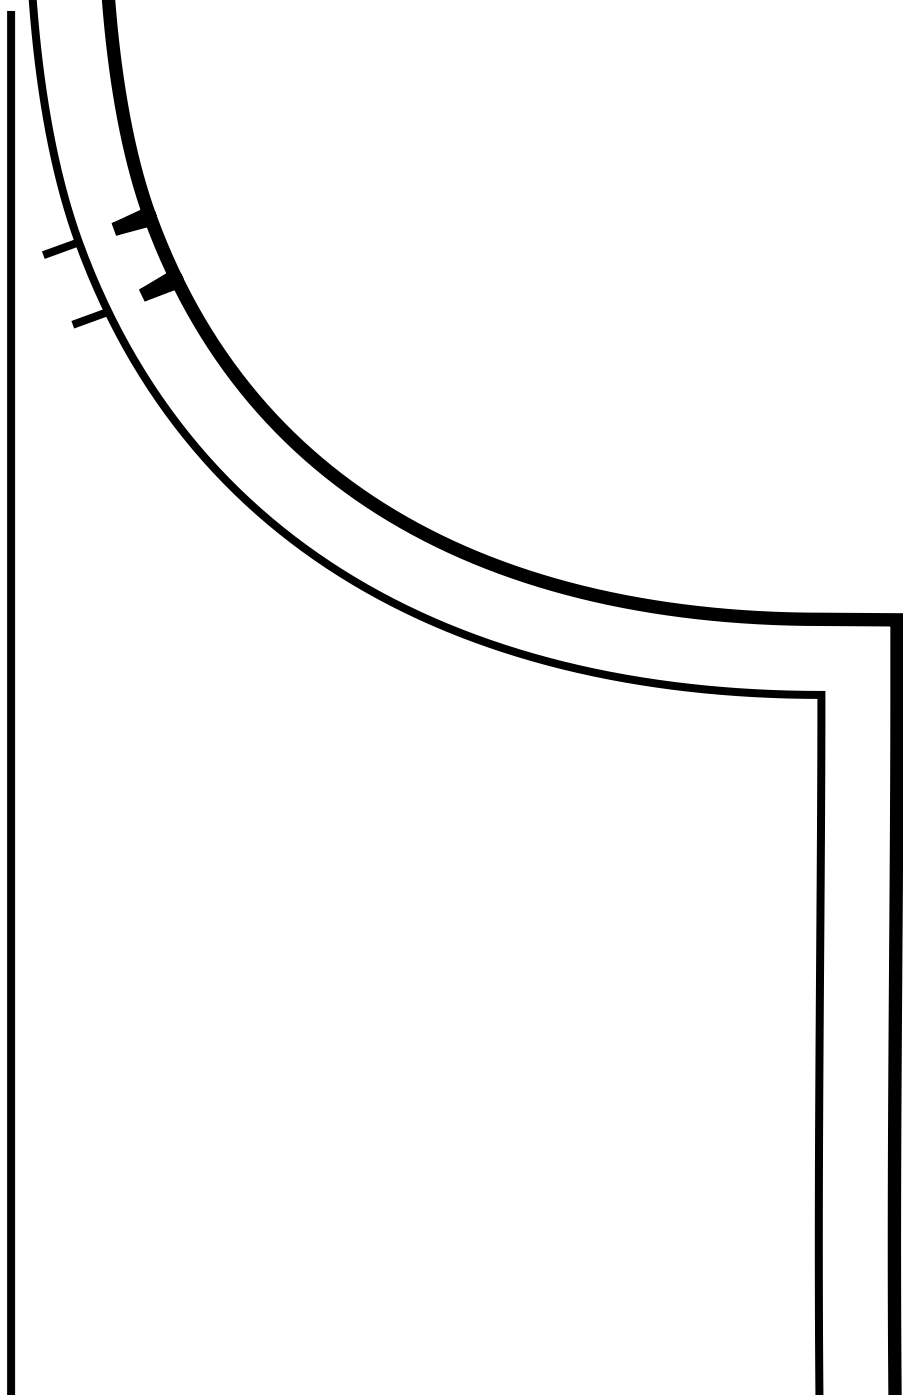


5/3

6/1

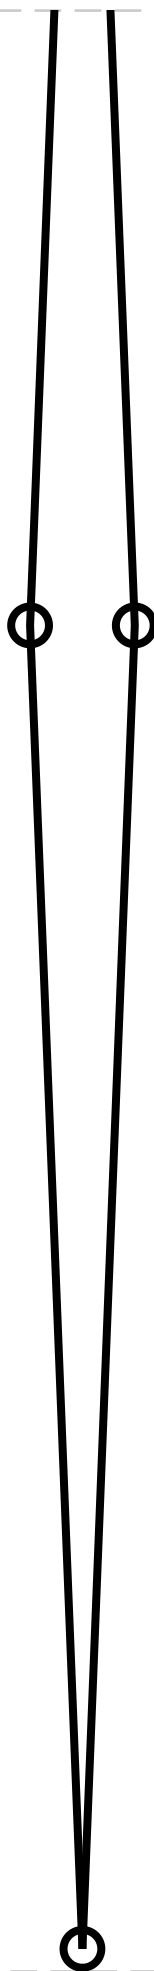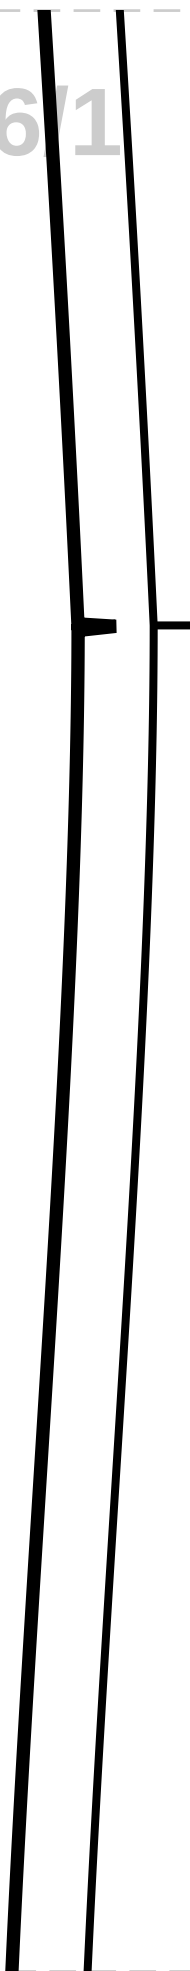


6/2

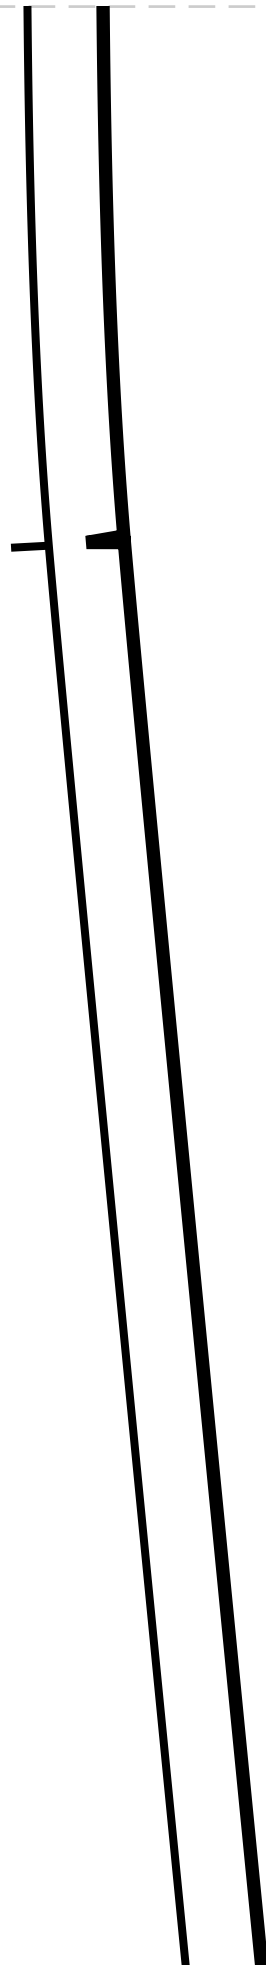


6/3


7/1

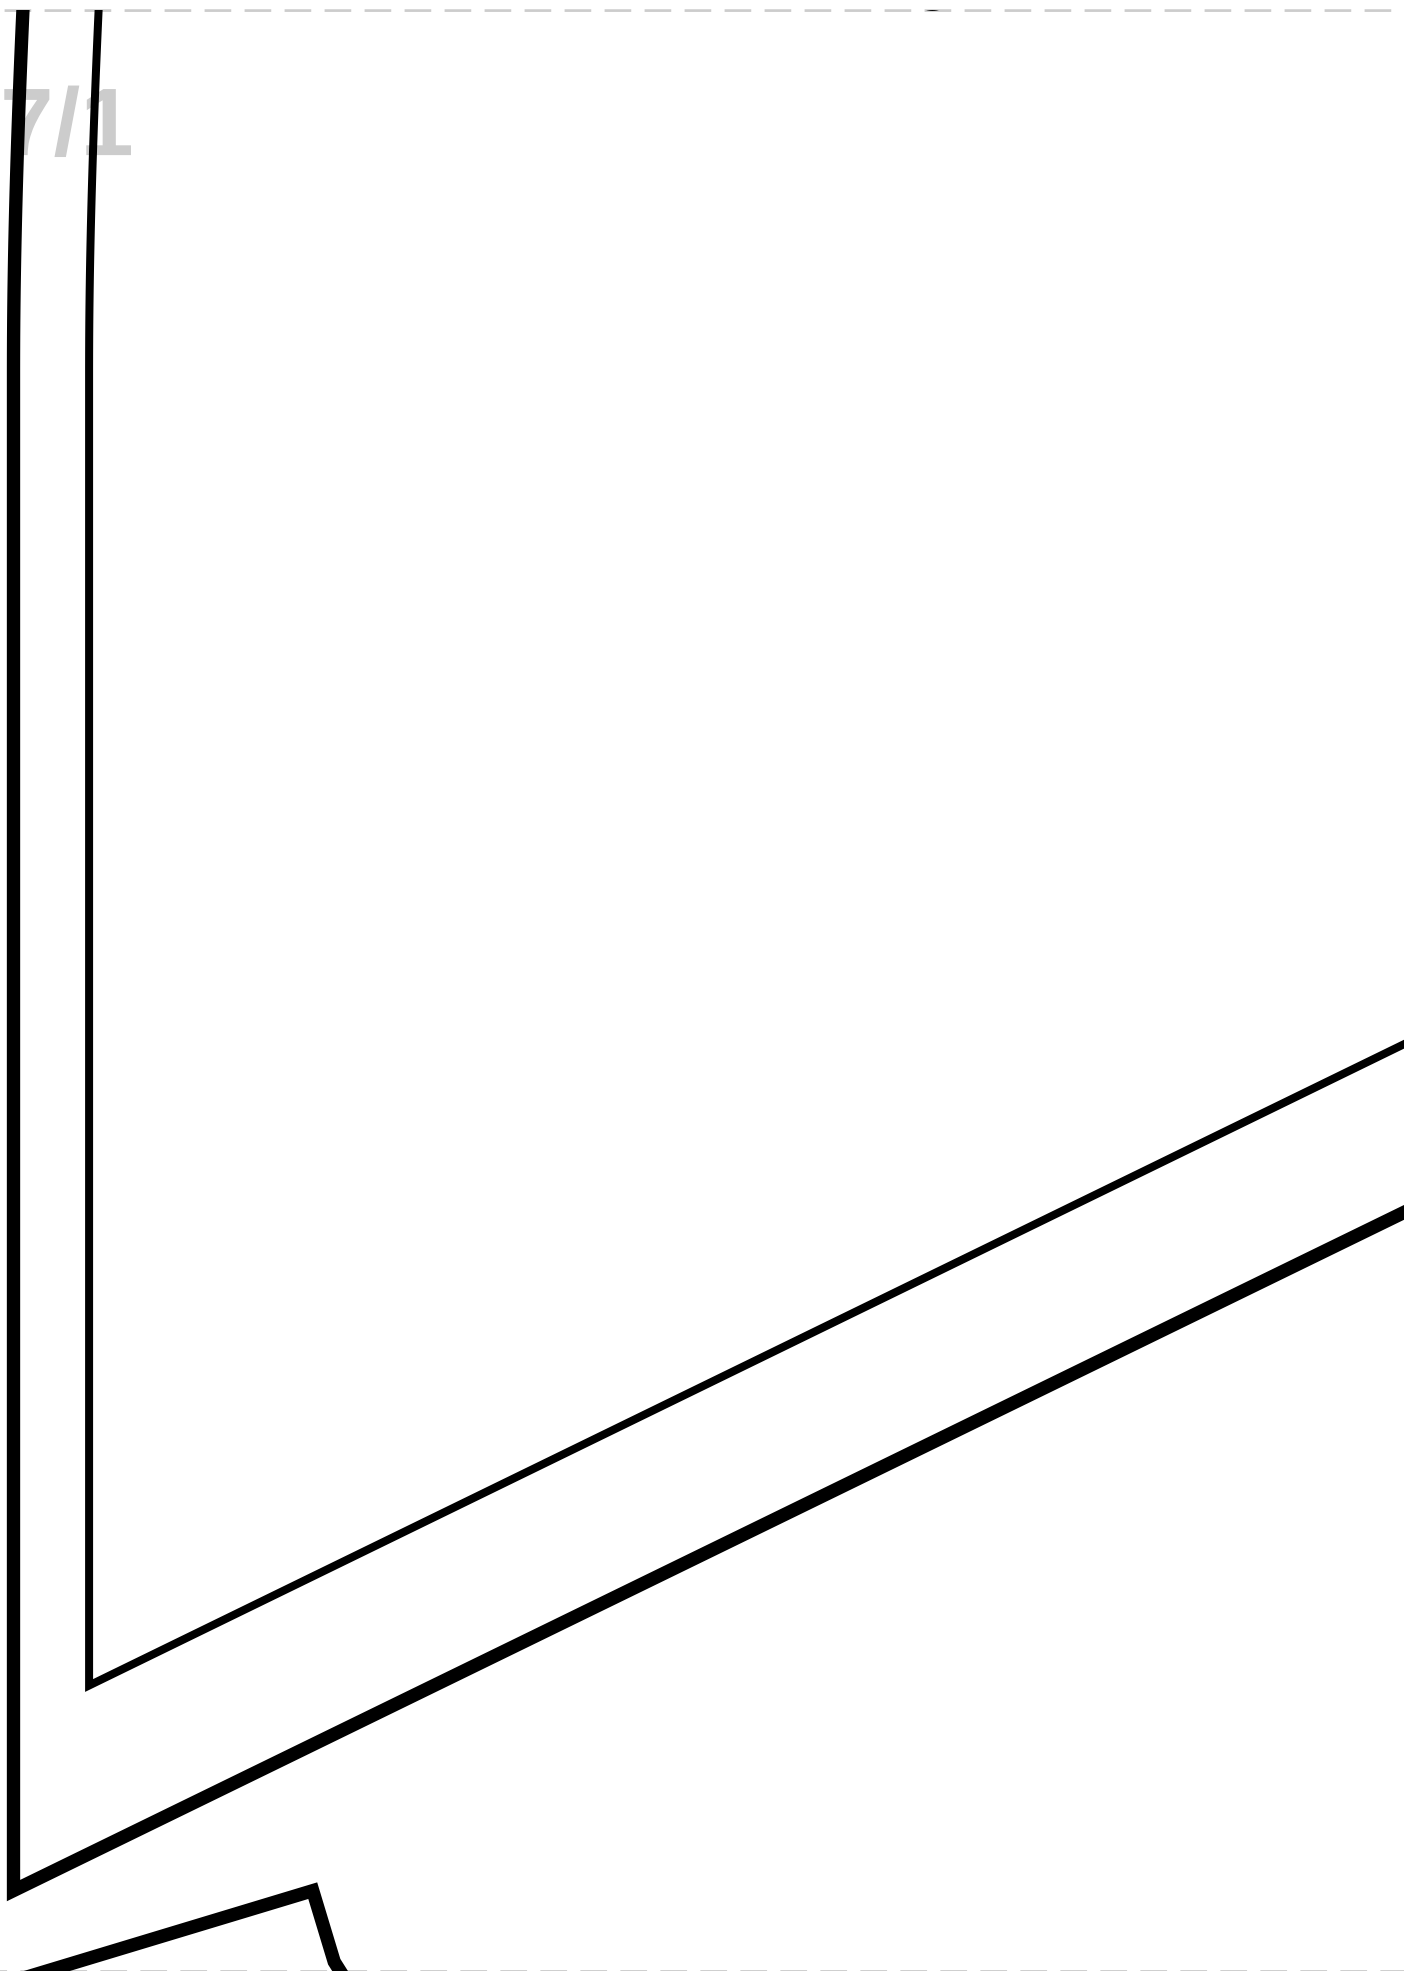

7/2

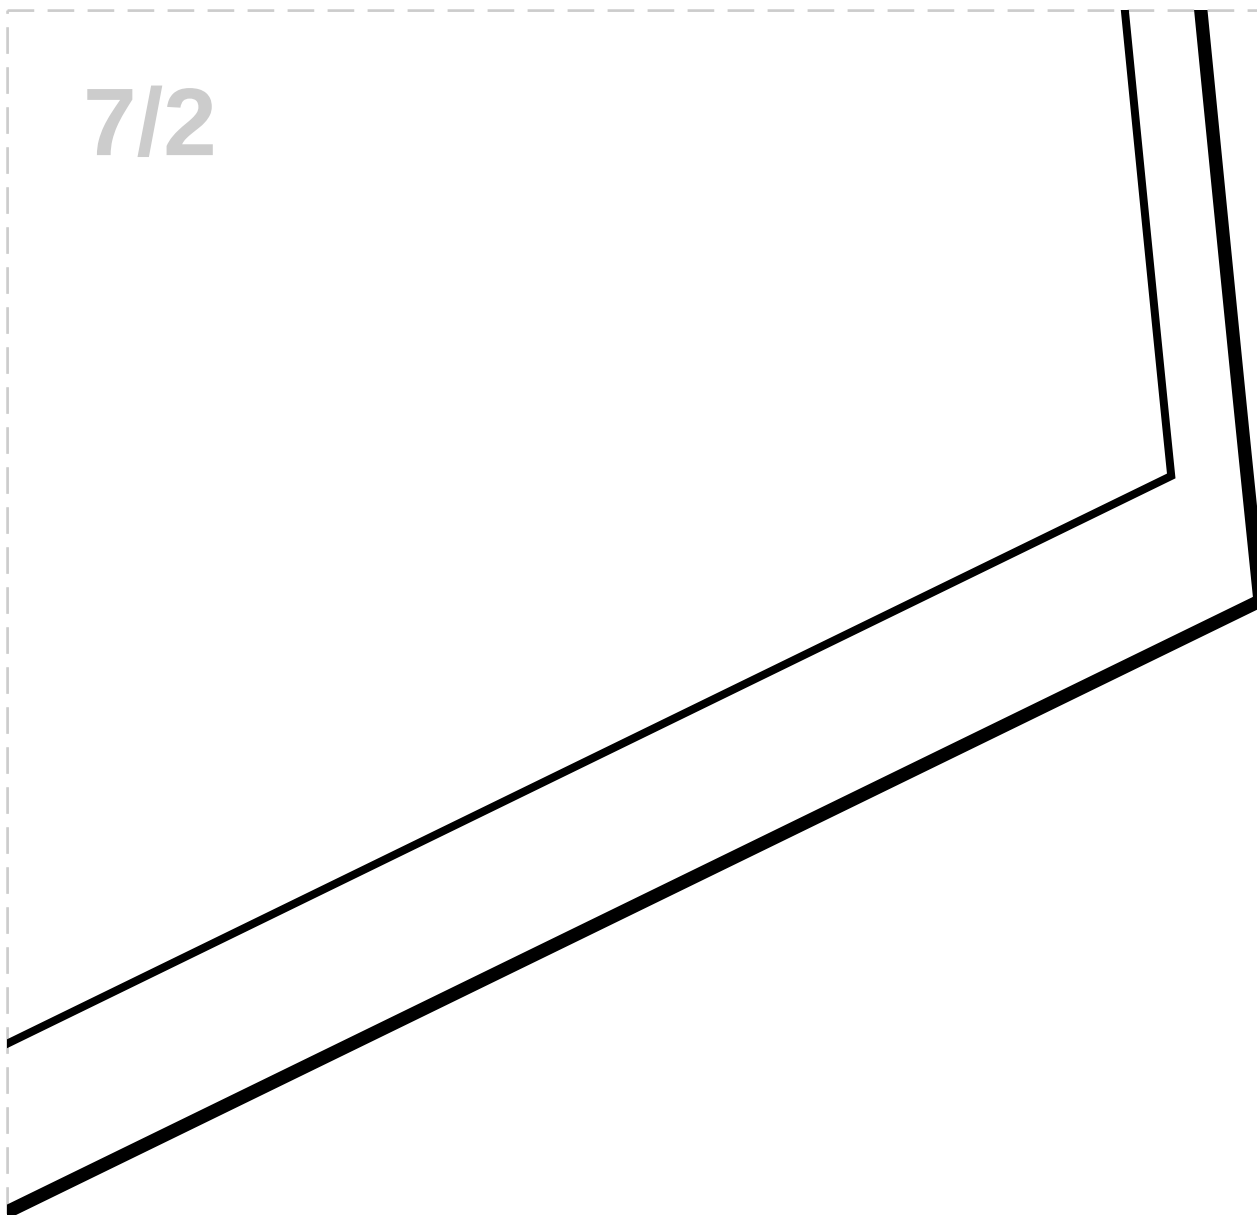

7/3

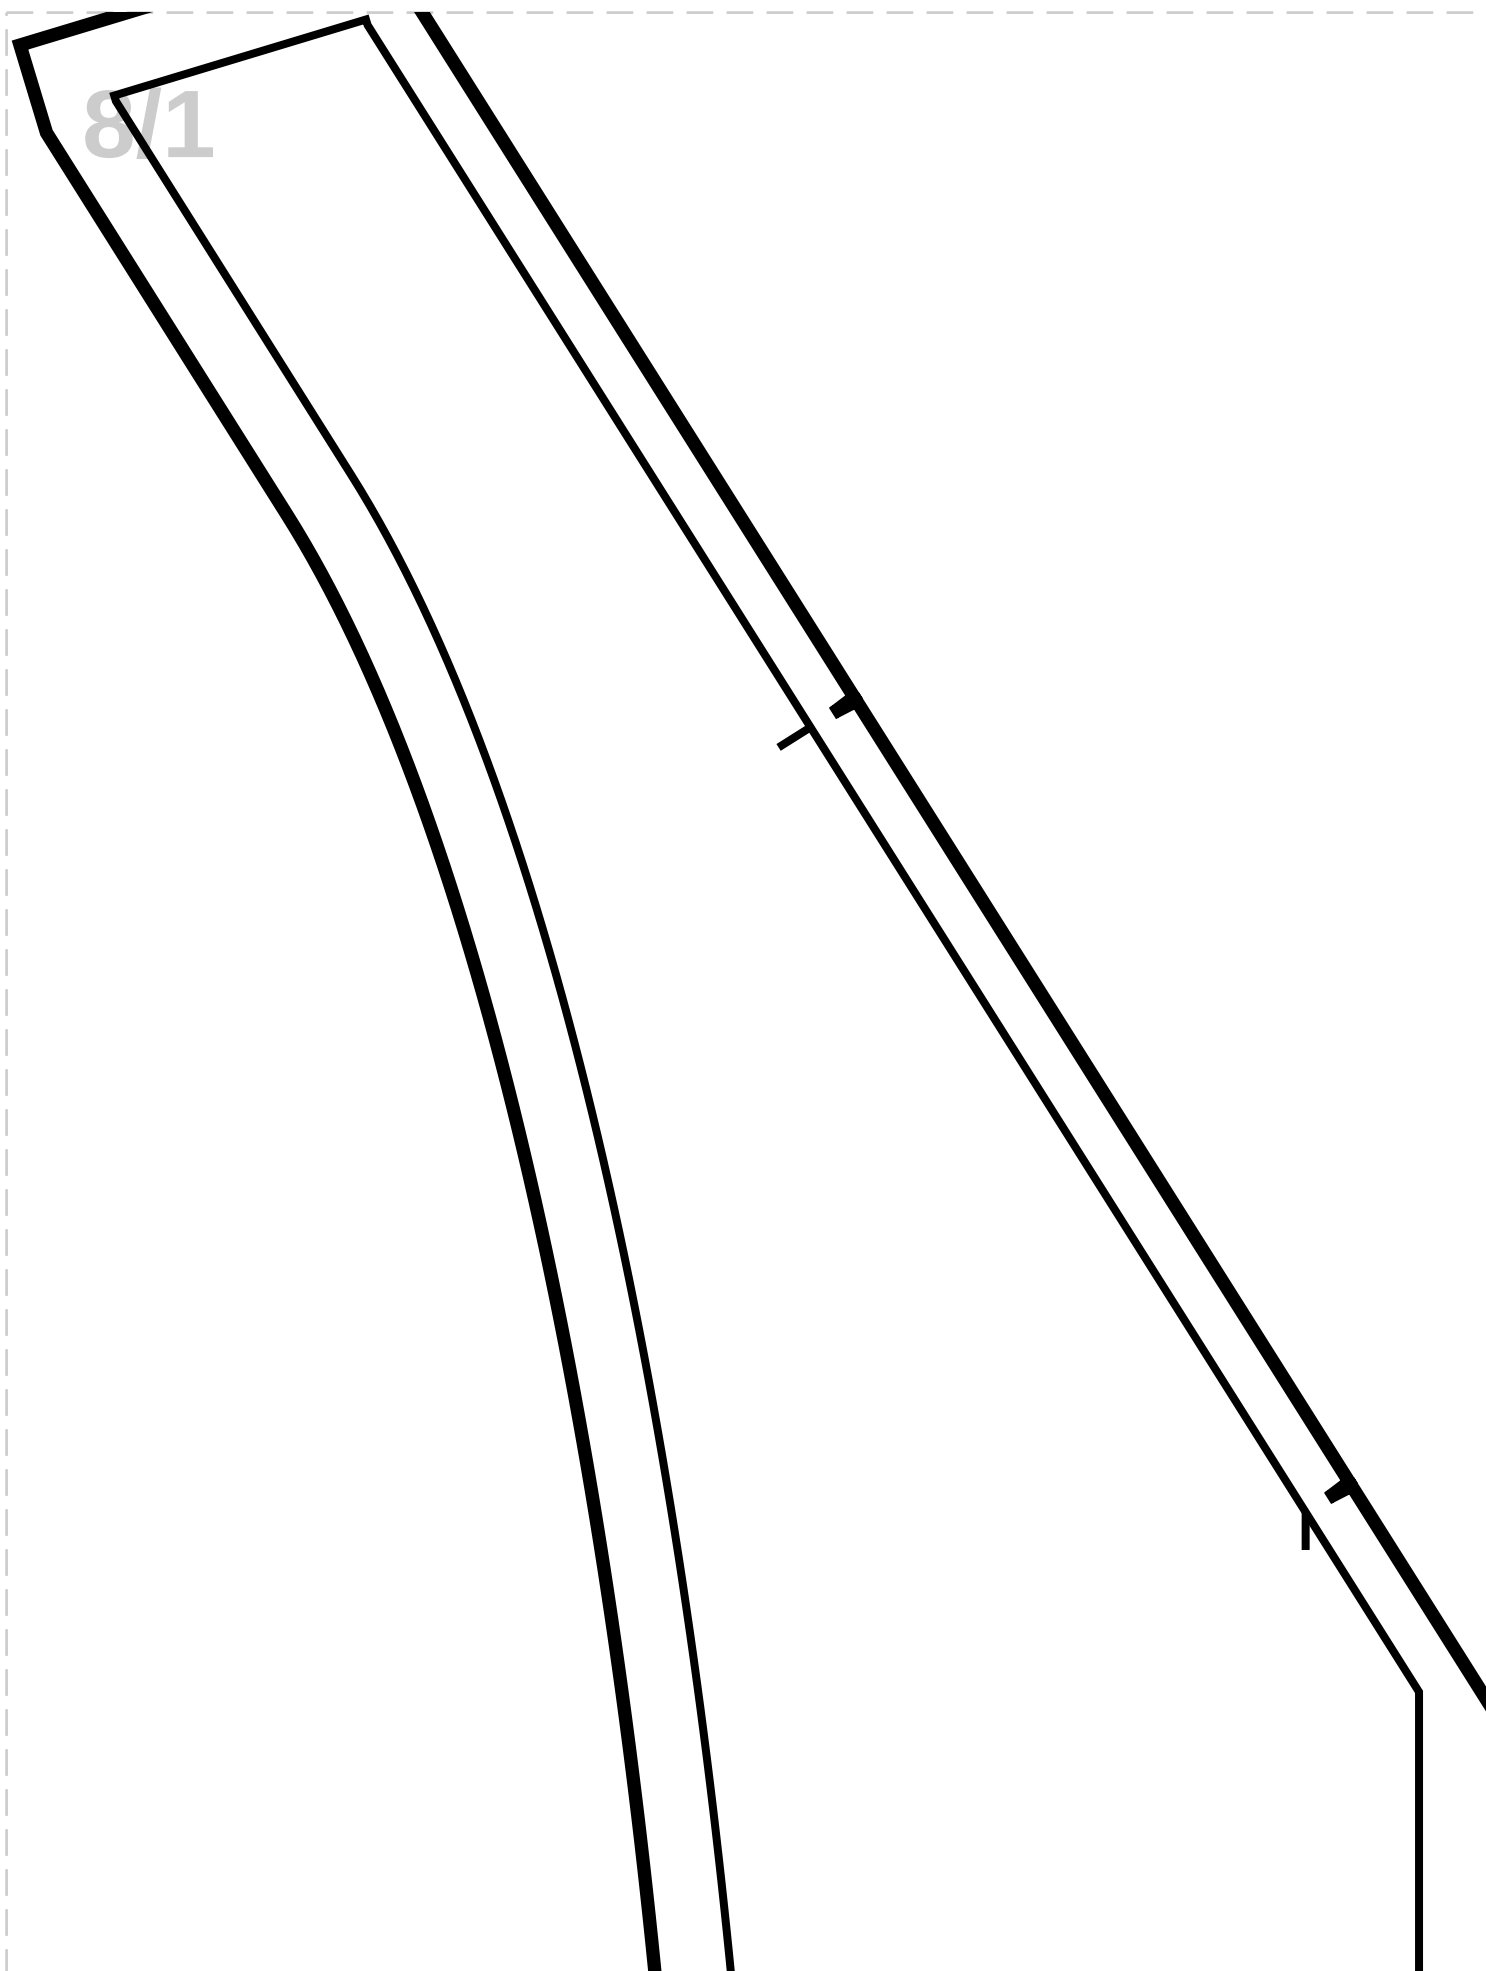

8/2



8/3

9/1



9/2

9/3

10/1



FRONT
MAIN
FUSIBLE I

10/2


10/3

3

NECK FACING

FABRIC: Cut 2

INTERFACING: Cut 2

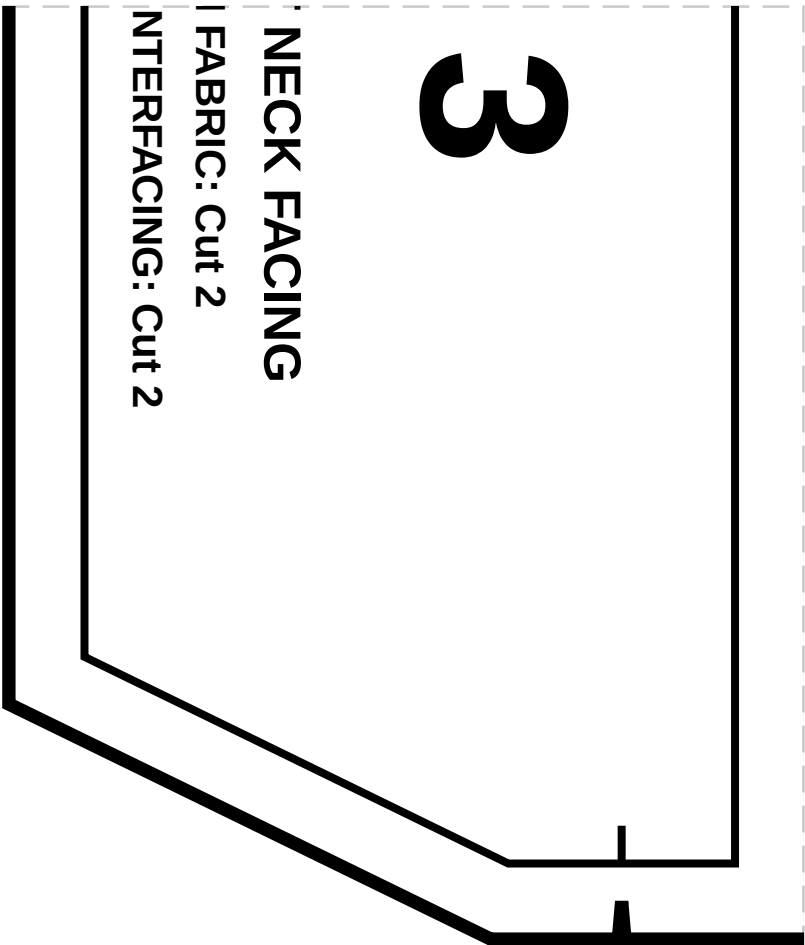

11/2

11/3