CozySewPatterns

SEWING PATTERNS

Print this Calibration Test page first!

Size: Height: 167.75, Bust: 95.25, Waist: 78.75, Hips: 102.75
SIZE 10

Notes

How to print

Printing


Once your Calibration Test Page has been printed, measure the 4”x 4” (10cm) scale box with a ruler. If the lengths match, you can confidently print your pattern. If the rulers do not match, set your print settings to 100% or Actual and retry.

Cutting

Your printouts will always have a dashed border to perfectly match your sheets. Cut off the right edge of each page. Be careful not to cut beyond the dashed mark, otherwise your patterns will not align accurately.

Tapping

Group each sheet by the second number marked on each pate i.e. in a group 1, there are: 1/1, 2/1, 3/1, 4/1, etc. In a group 2: 1/2, 2/2 etc. 2. Place page 1/1 on top of the page 2/1, overlapping the right side edge. Match corners and crosses and secure with a pin or tape. Then use a scotch tape to permanently attach the sheets together.

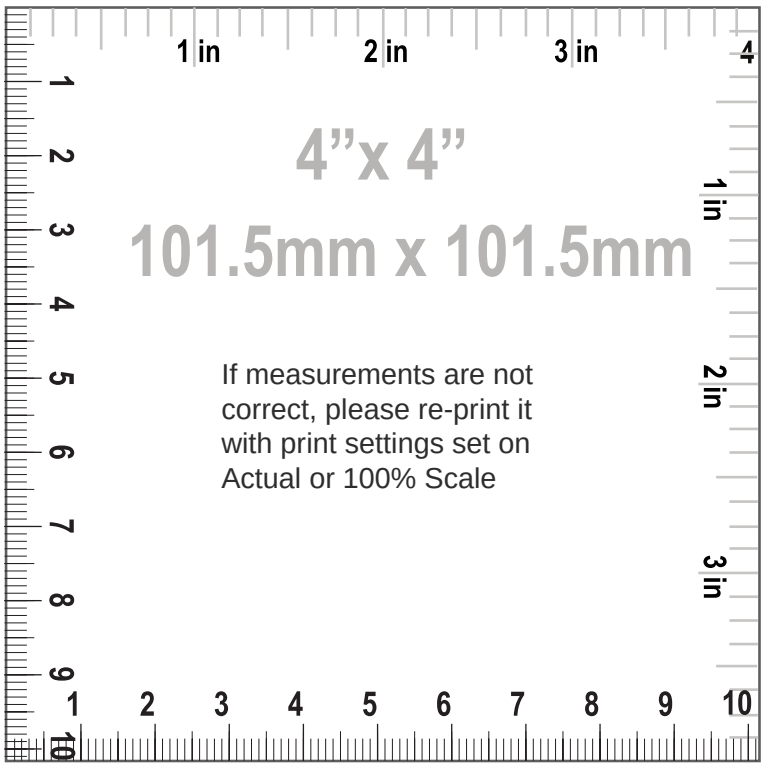

SIZE 10
Seam Allowance: 1 (3/8 in)

Pattern pieces:

1. "PANTS FRONT", MAIN FABRIC: Cut 2
2. "PANTS BACK", MAIN FABRIC: Cut 2
3. "WAISTBAND", MAIN FABRIC: Cut 1
4. "POCKET BAG", MAIN FABRIC: Cut 2
5. "FLY FACING", MAIN FABRIC: Cut 1
6. "POCKET LINING", LINING: Cut 2
7. "FLY INTERFACING", FUSIBLE INTERFACING: Cut 1
8. "FUSIBLE INTERFACING FOR WAISTBAND", FUSIBLE INTERFACING: Cut 2
9. "BACK POCKET WELT", MAIN FABRIC, FUSIBLE INTERFACING: Cut 2
10. "BACK INNER POCKET BAG", LINING: Cut 2
11. "BACK OUTER POCKET BAG", LINING: Cut 2

Pattern Specs (Circumferences are divided by 2):


1. Hem max 3.00 none (1 1/8 in)
2. Seam allowance max 2.00 none (3/4 in)
3. Stretch factor 1.00 none (3/8 in)
4. Stretch factor horizontal 1.00 none (3/8 in)
5. Stretch factor vertical 1.00 none (3/8 in)
6. Pocket bag height 28.25 cm (11 1/8 in)
7. Pocket side seam 18.74 cm (7 3/8 in)
8. Pocket waist seam 18.74 cm (7 3/8 in)
9. Back pocket entry length 12.55 cm (5 in)
10. Side seam back pocket position 8.70 cm (3 3/8 in)
11. Waist to back pocket length 13.08 cm (5 1/8 in)
12. Back pocket width welt 2.50 cm (1 in)
13. Fly zipper length 23.00 cm (9 in)
14. Waist 43.39 cm (17 1/8 in)
15. Hips 51.84 cm (20 3/8 in)
16. Pleat depth 1.33 cm (1/2 in)
17. Thigh 33.34 cm (13 1/8 in)
18. Knee 27.05 cm (10 5/8 in)
19. Bottom opening 19.56 cm (7 3/4 in)

20. Front rise 30.44 cm (12 in)
21. Back rise 41.80 cm (16 1/2 in)
22. Crotch height 28.85 cm (11 3/8 in)
23. Inseam length 67.80 cm (26 3/4 in)
24. Pants side seam length 97.43 cm (38 3/8 in)
25. Waistband partly elastic width 3.00 cm (1 1/8 in)
26. Waistband width 3.30 cm (1 1/4 in)
27. Waistband length 96.18 cm (37 7/8 in)
28. Waistband partly elastic length 45.85 cm (18 in)
29. Waistband button diameter 1.00 cm (3/8 in)
30. Waistband buttons quantity 1.00 pc
31. Seam allowance poc max 3.00 none (1 1/8 in)
32. Back pocket bag height 10.67 cm (4 1/4 in)

CozySewPatterns


SEWING PATTERNS


Paper Size: A4;
Print Actual Size (100% Scale);

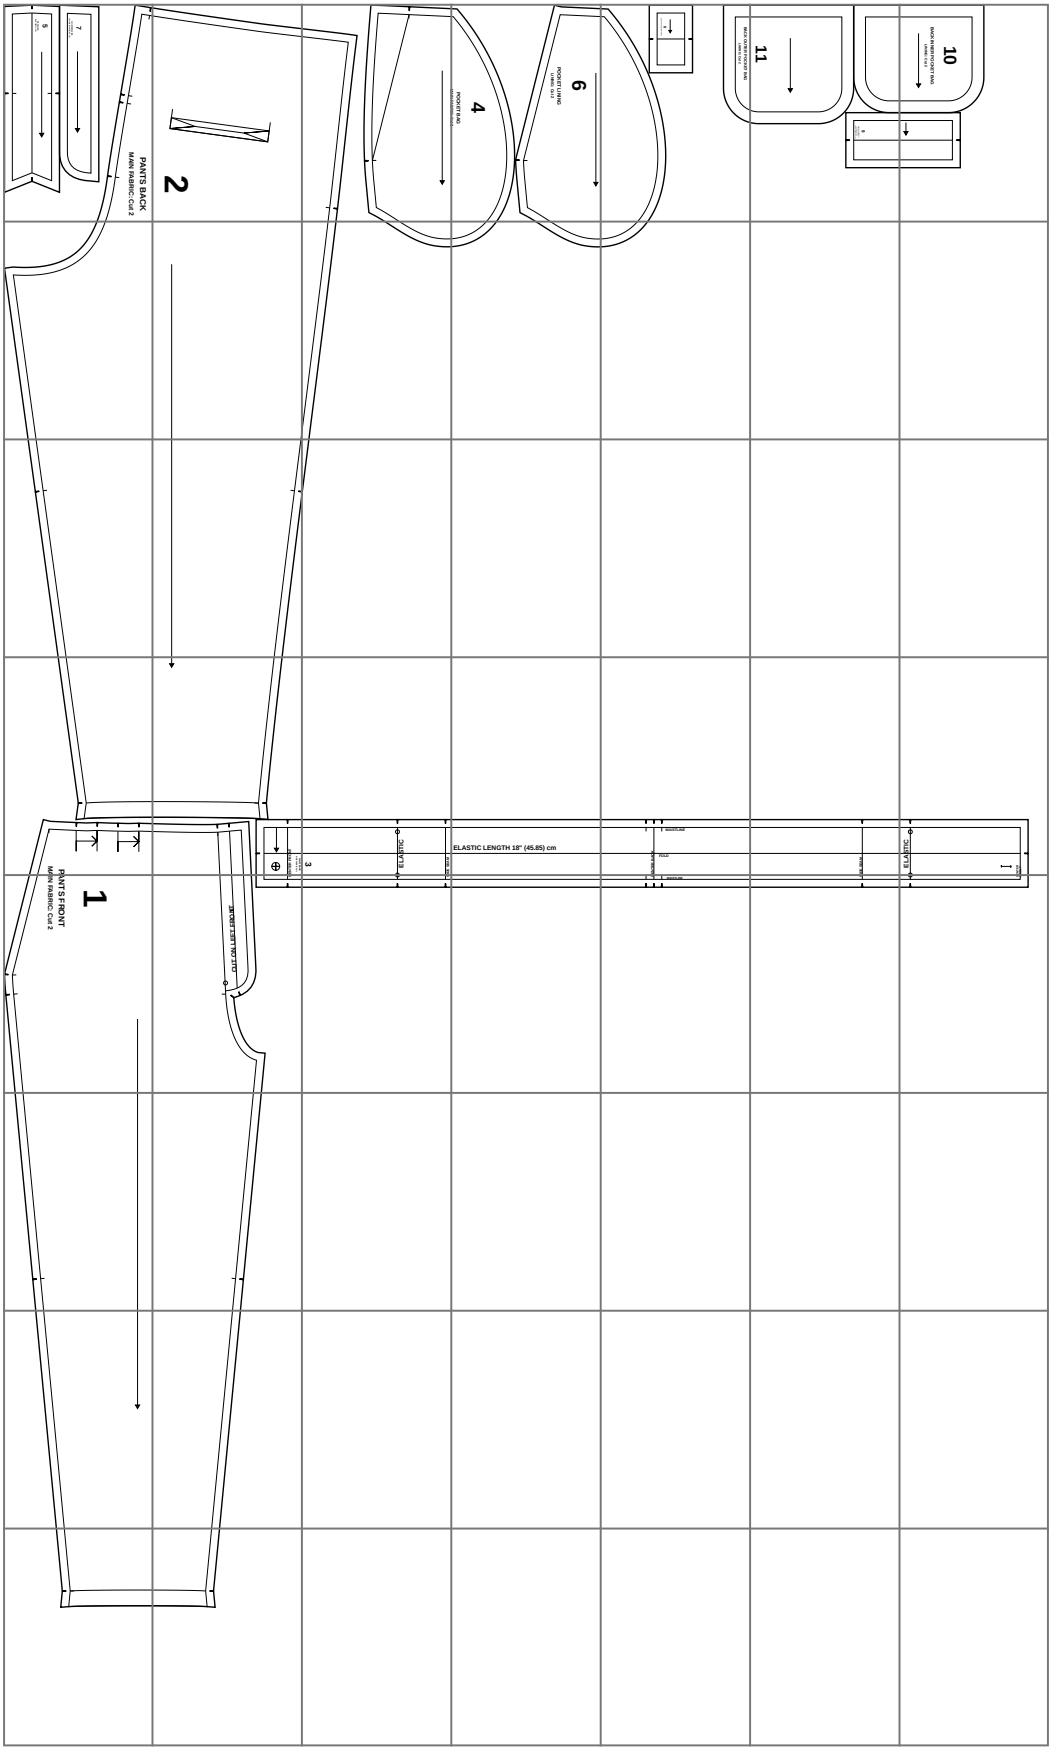


PANTS BACK


MAIN FABRIC: Cut 2

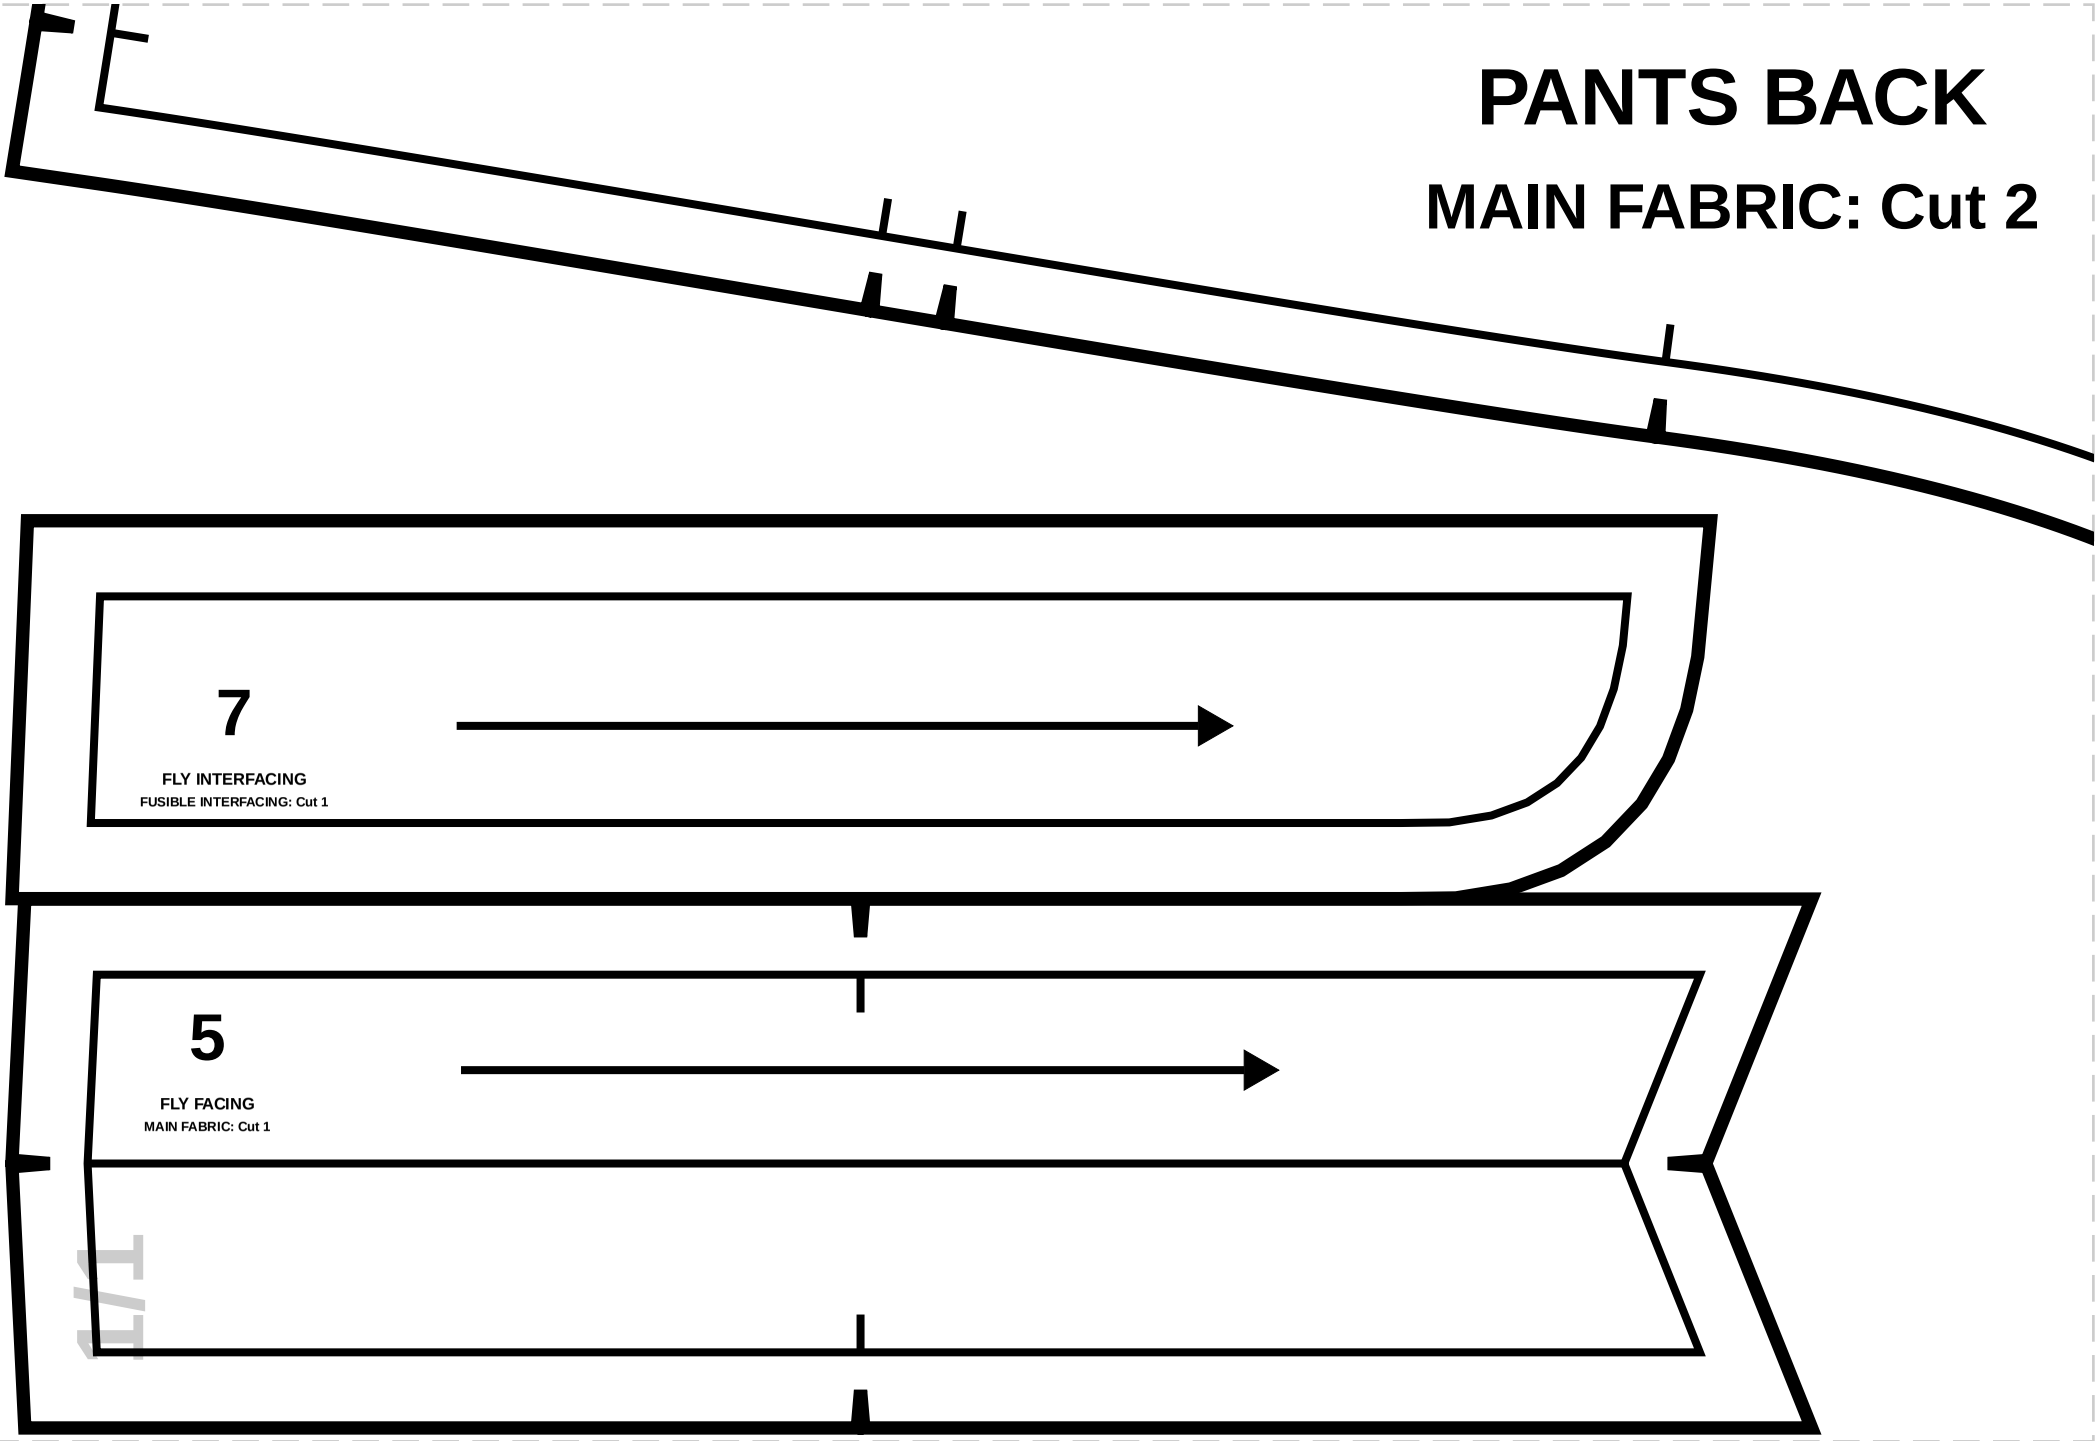


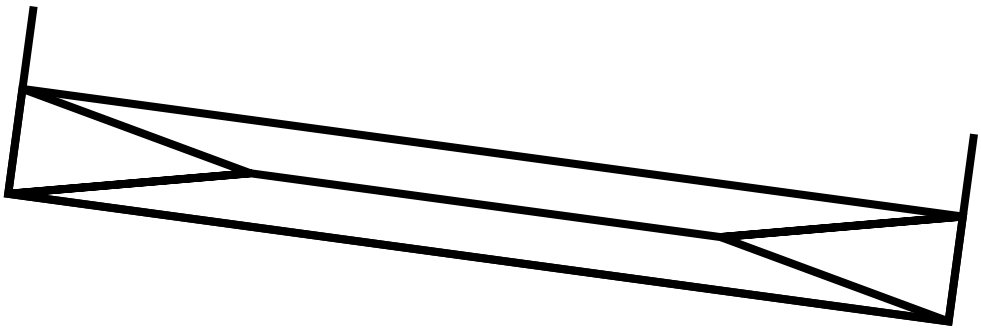



2

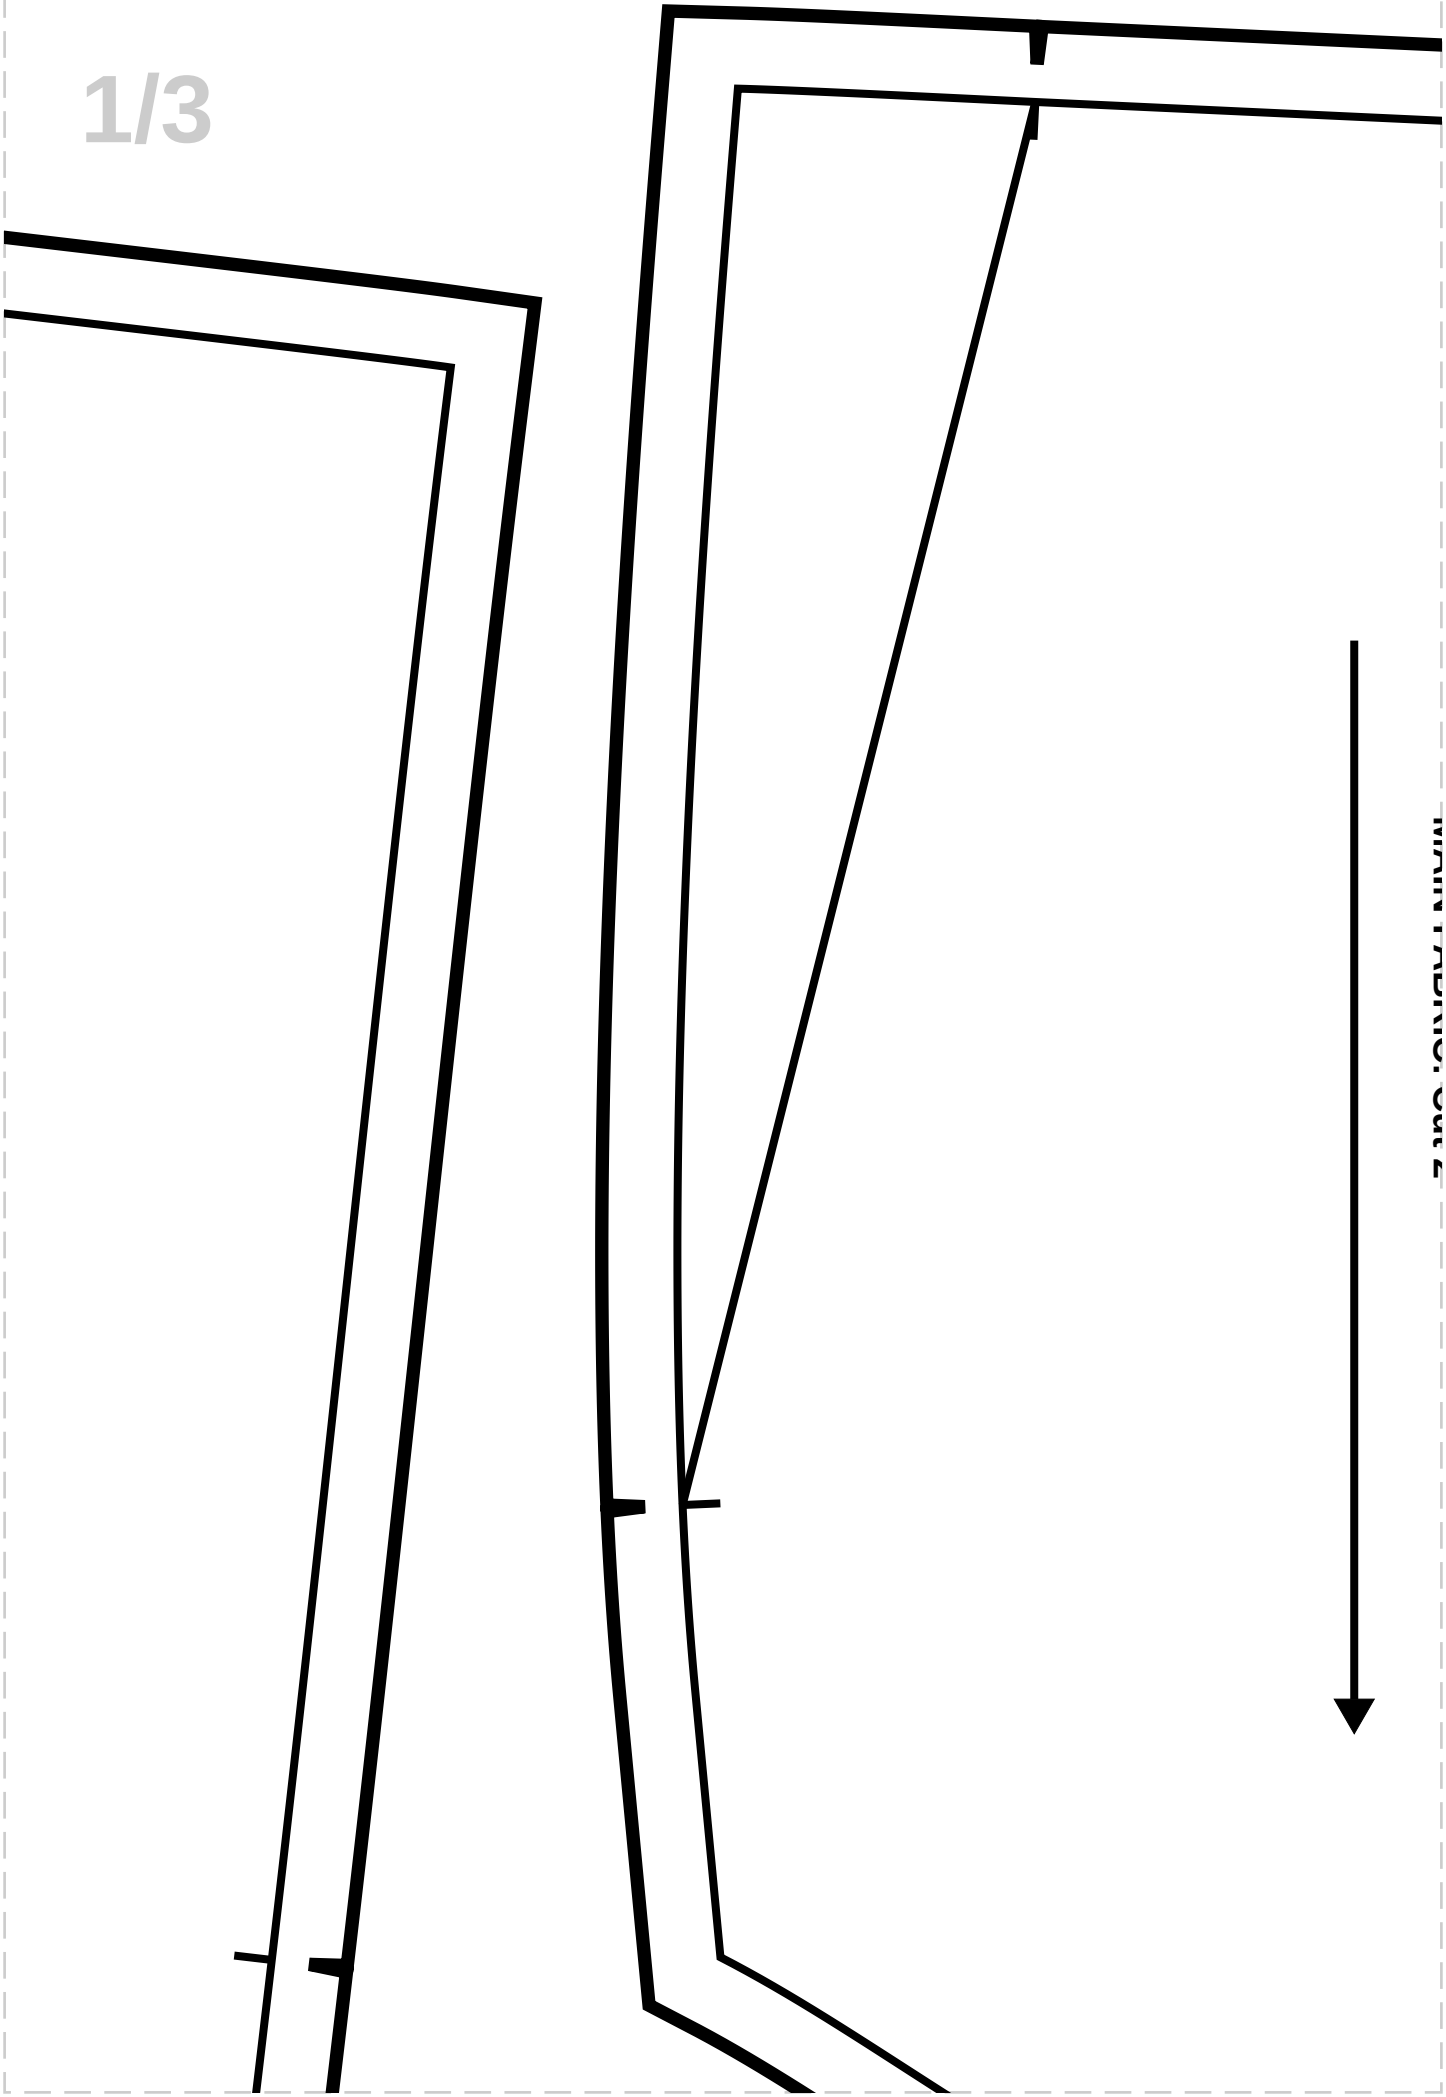

MAIN FABRIC Cut 2

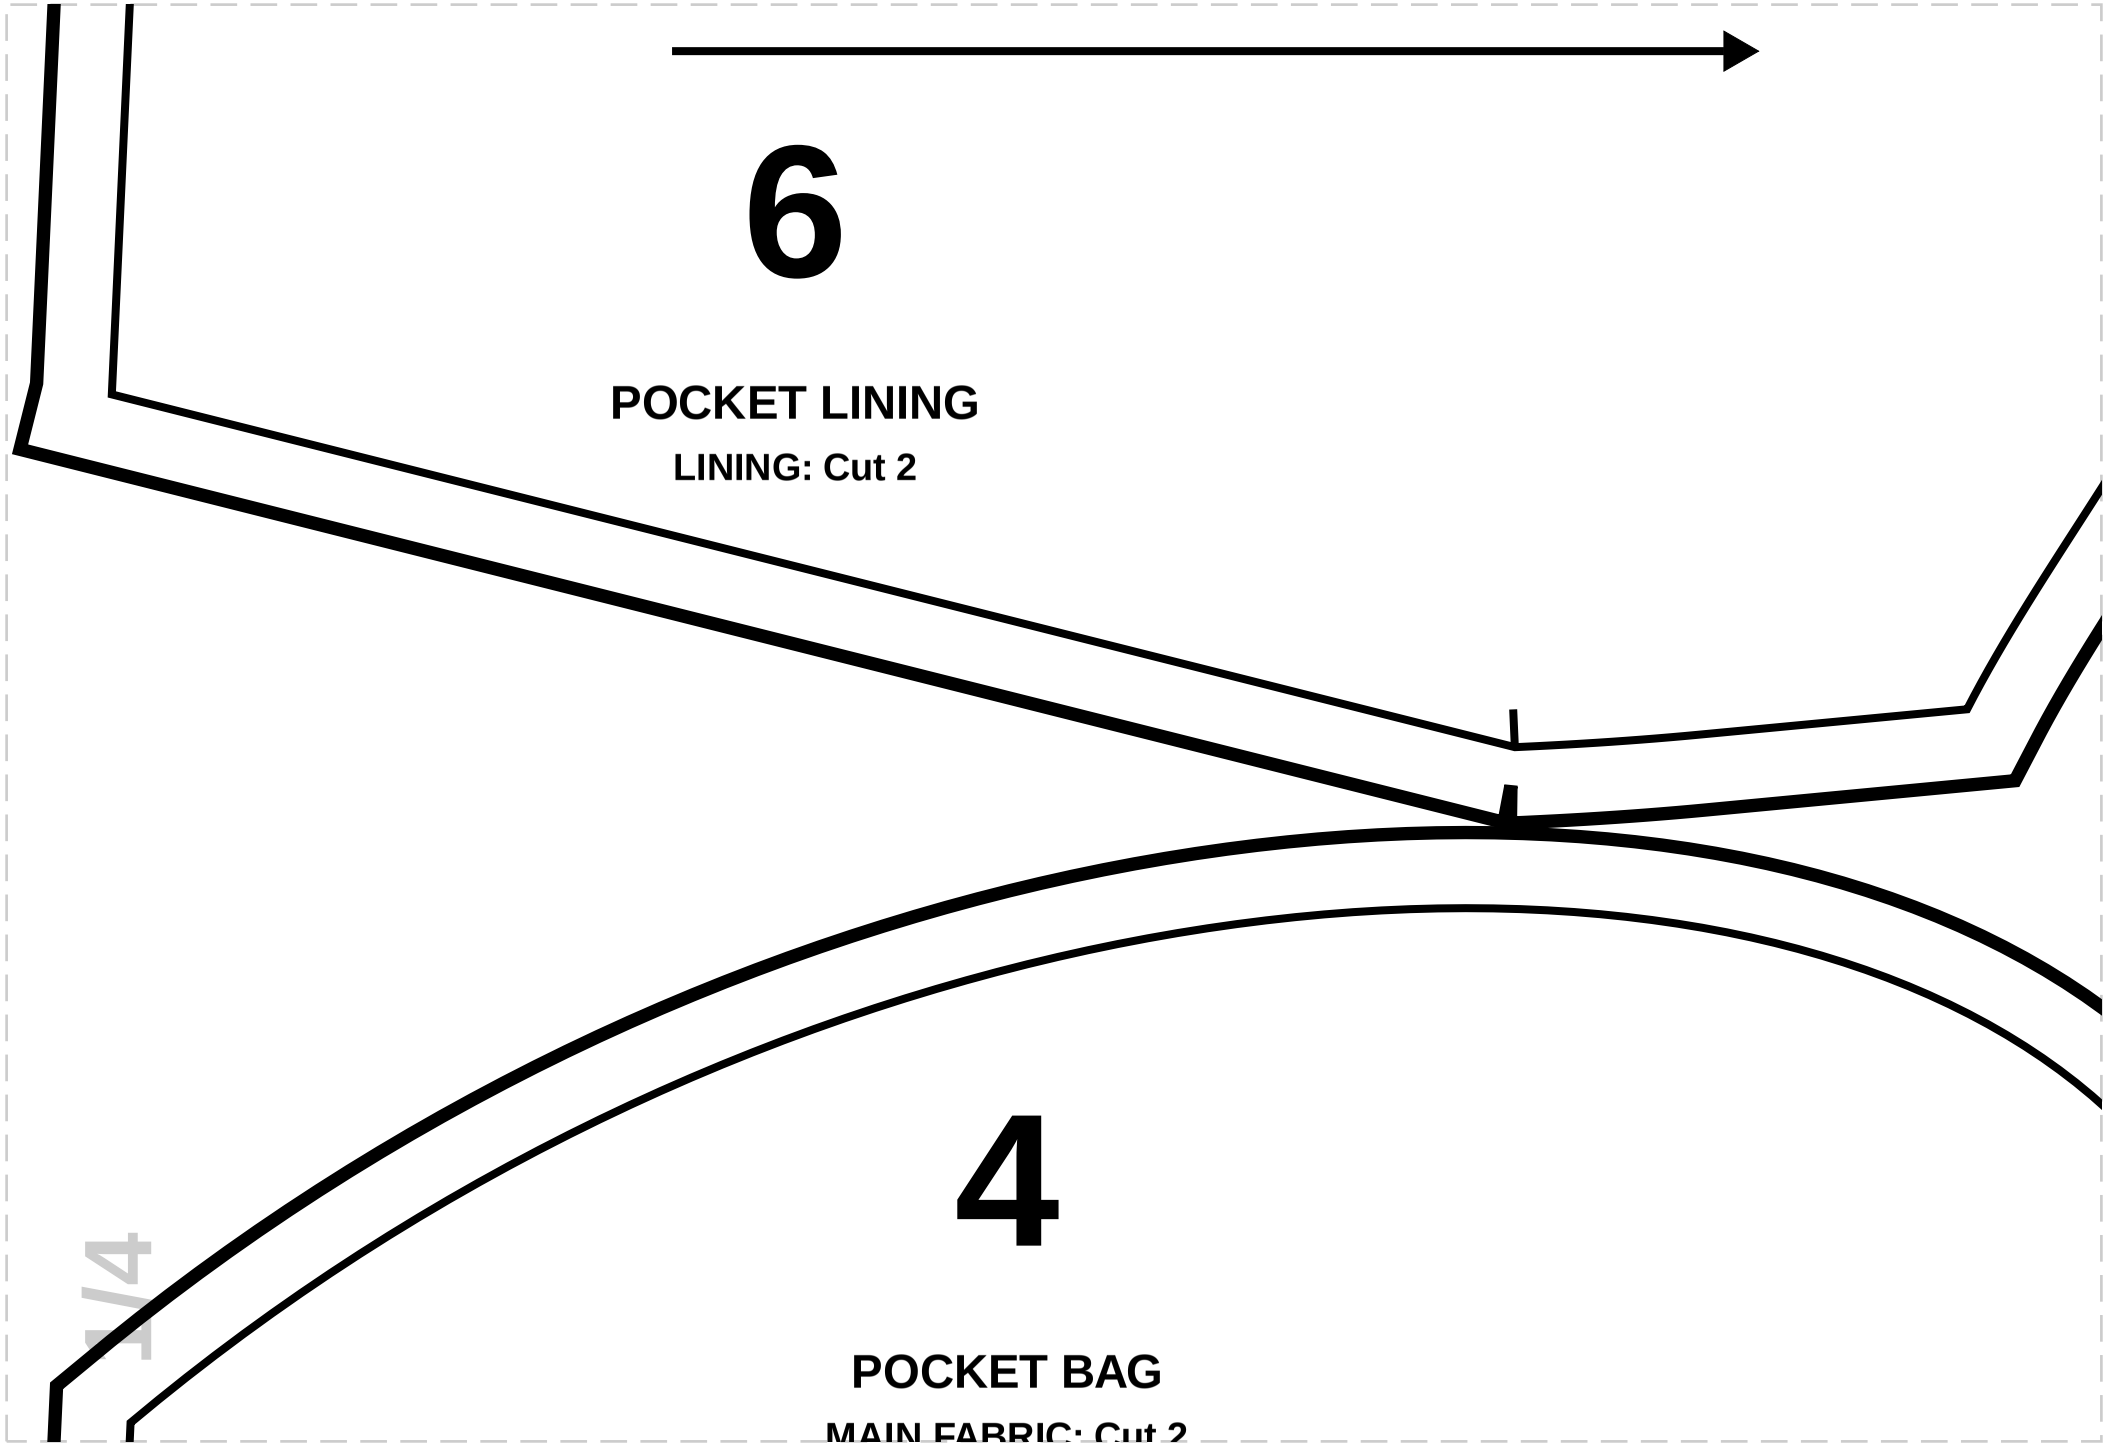

6
POCKET LINING
LINING: Cut 2
4
POCKET BAG
MAIN FABRIC: Cut 2

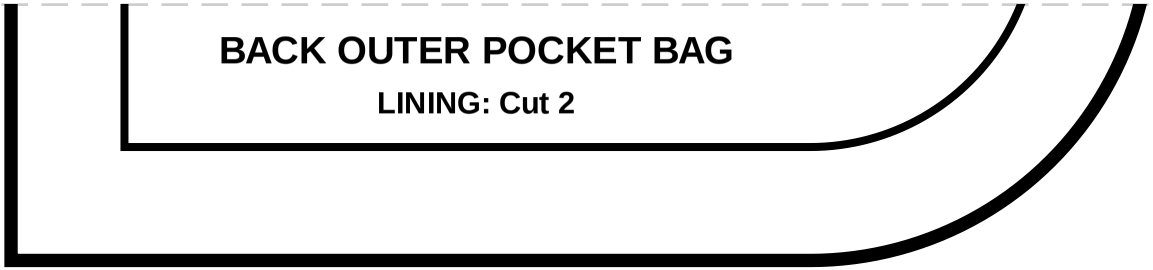

BACK OUTER POCKET BAG
LINING: Cut 2

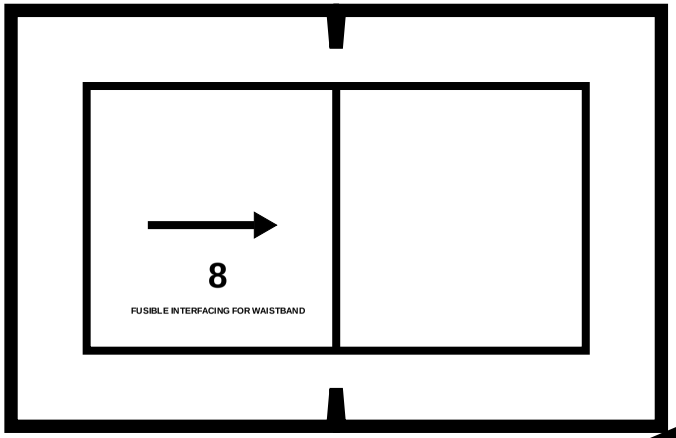

8
FUSIBLE INTERFACING FOR WAISTBAND

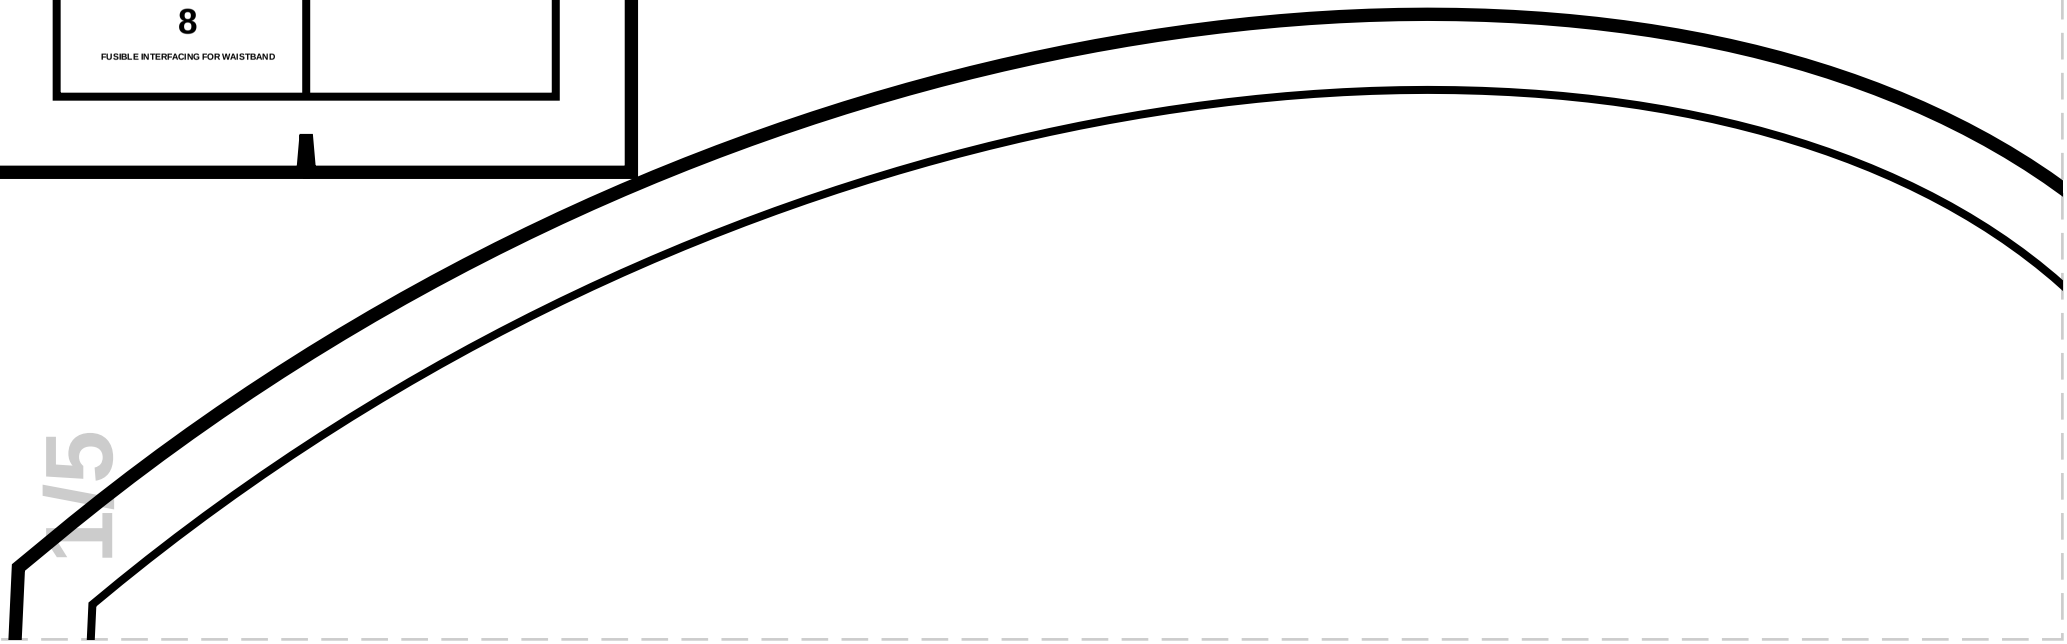


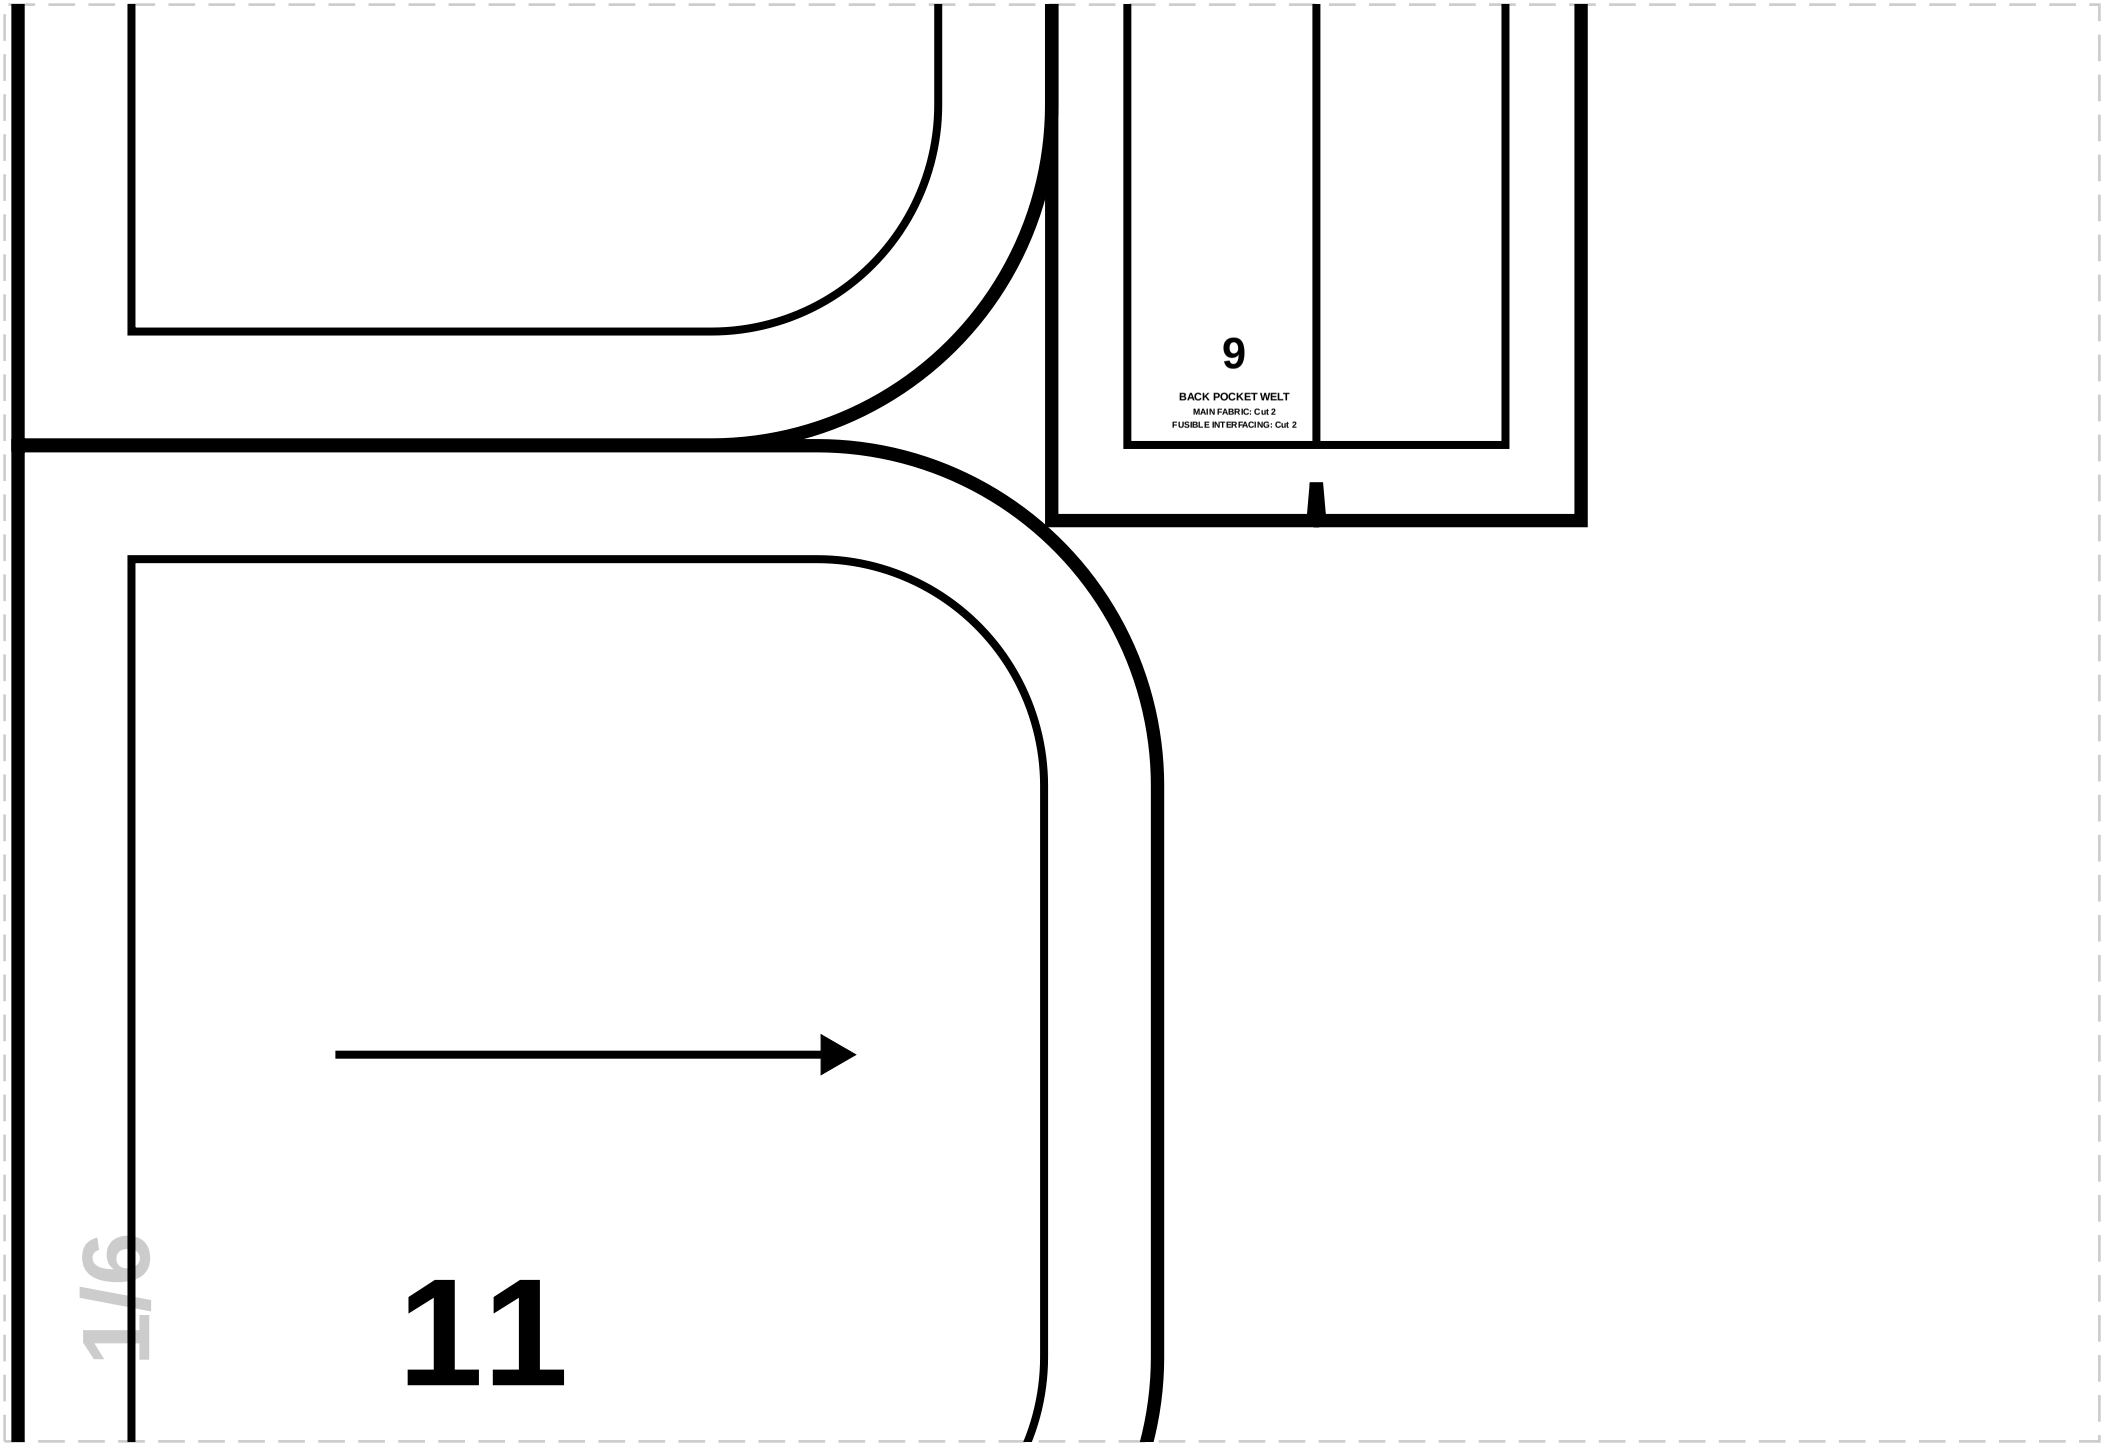

9
BACK POCKET WELT
MAIN FABRIC: Cut 2
FUSIBLE INTERFACING: Cut 2
11
1/6

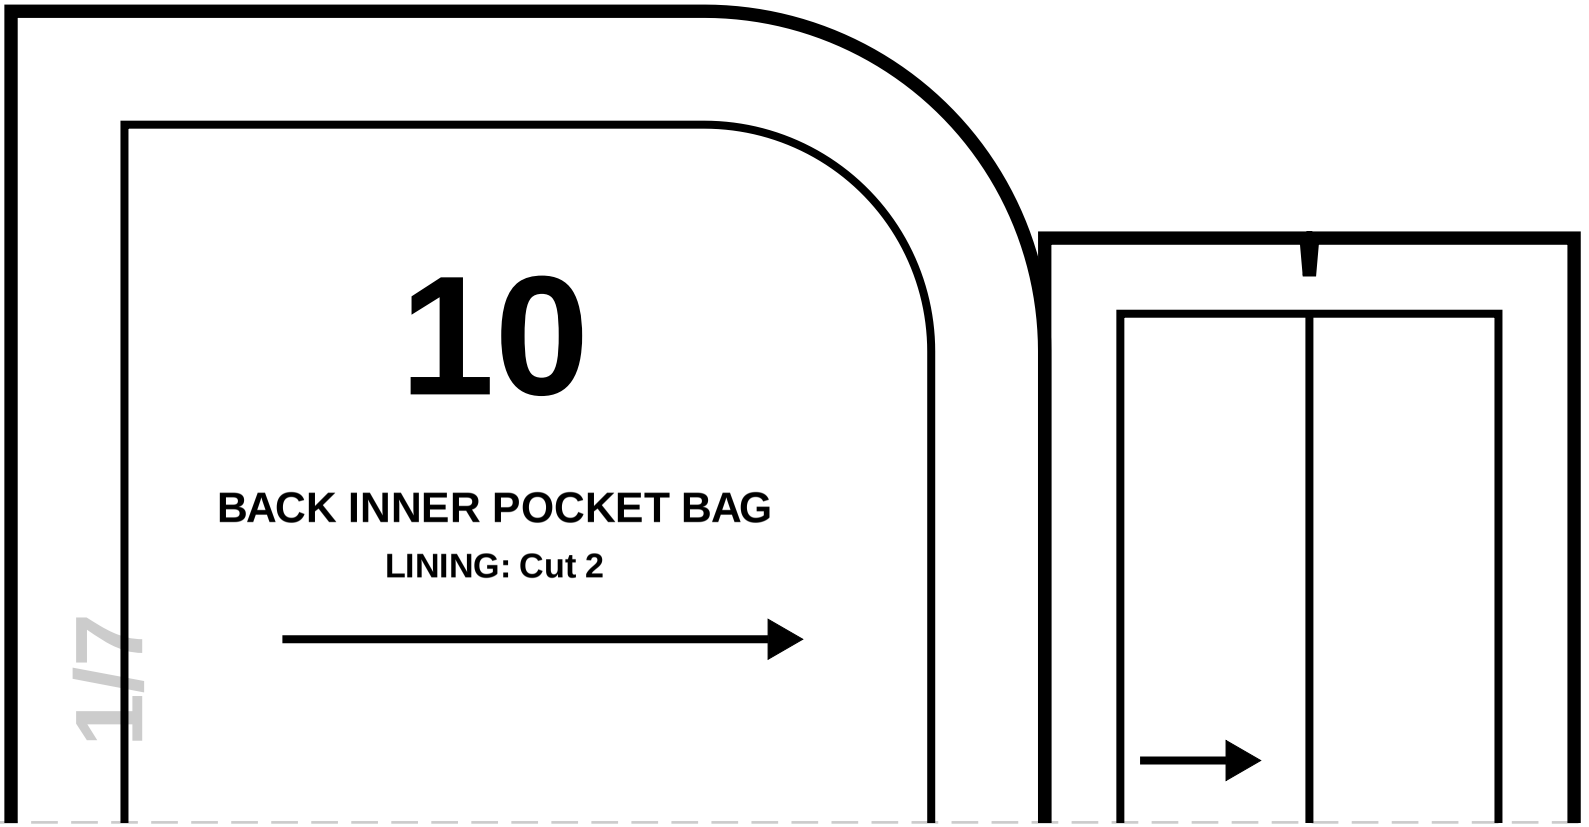

10
BACK INNER POCKET BAG
LINING: Cut 2
1/7

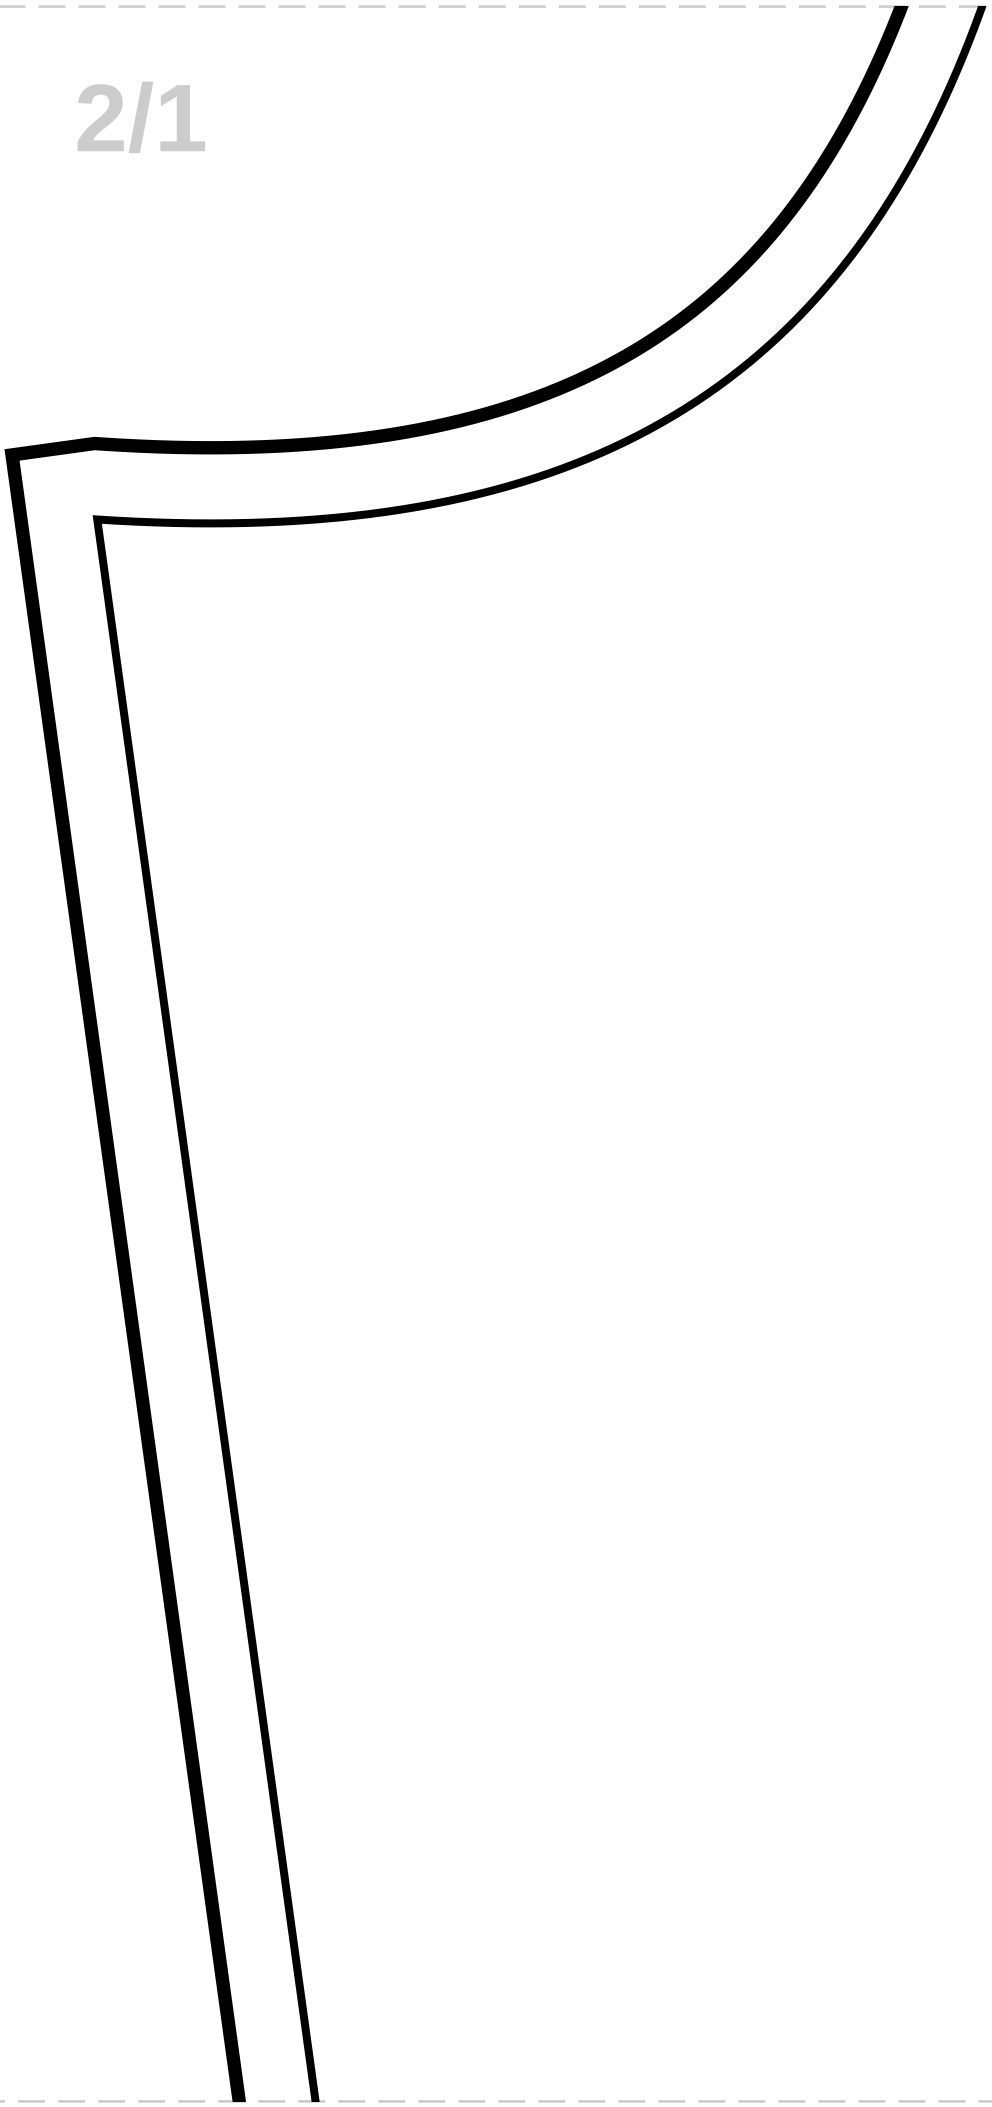



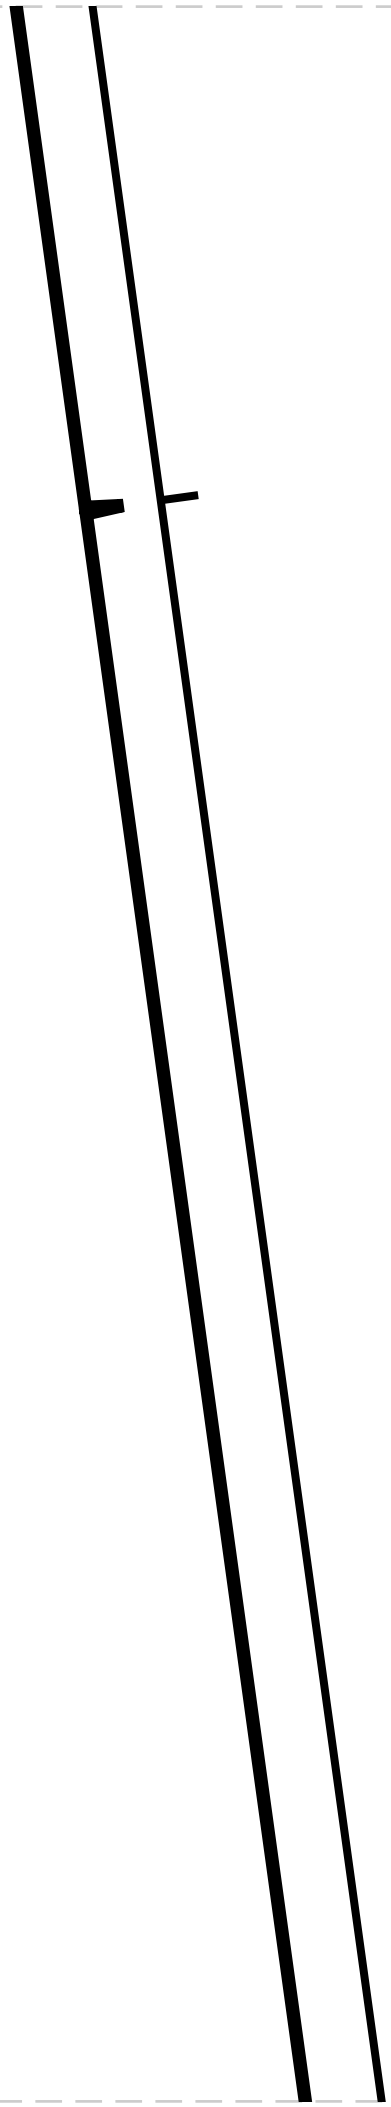

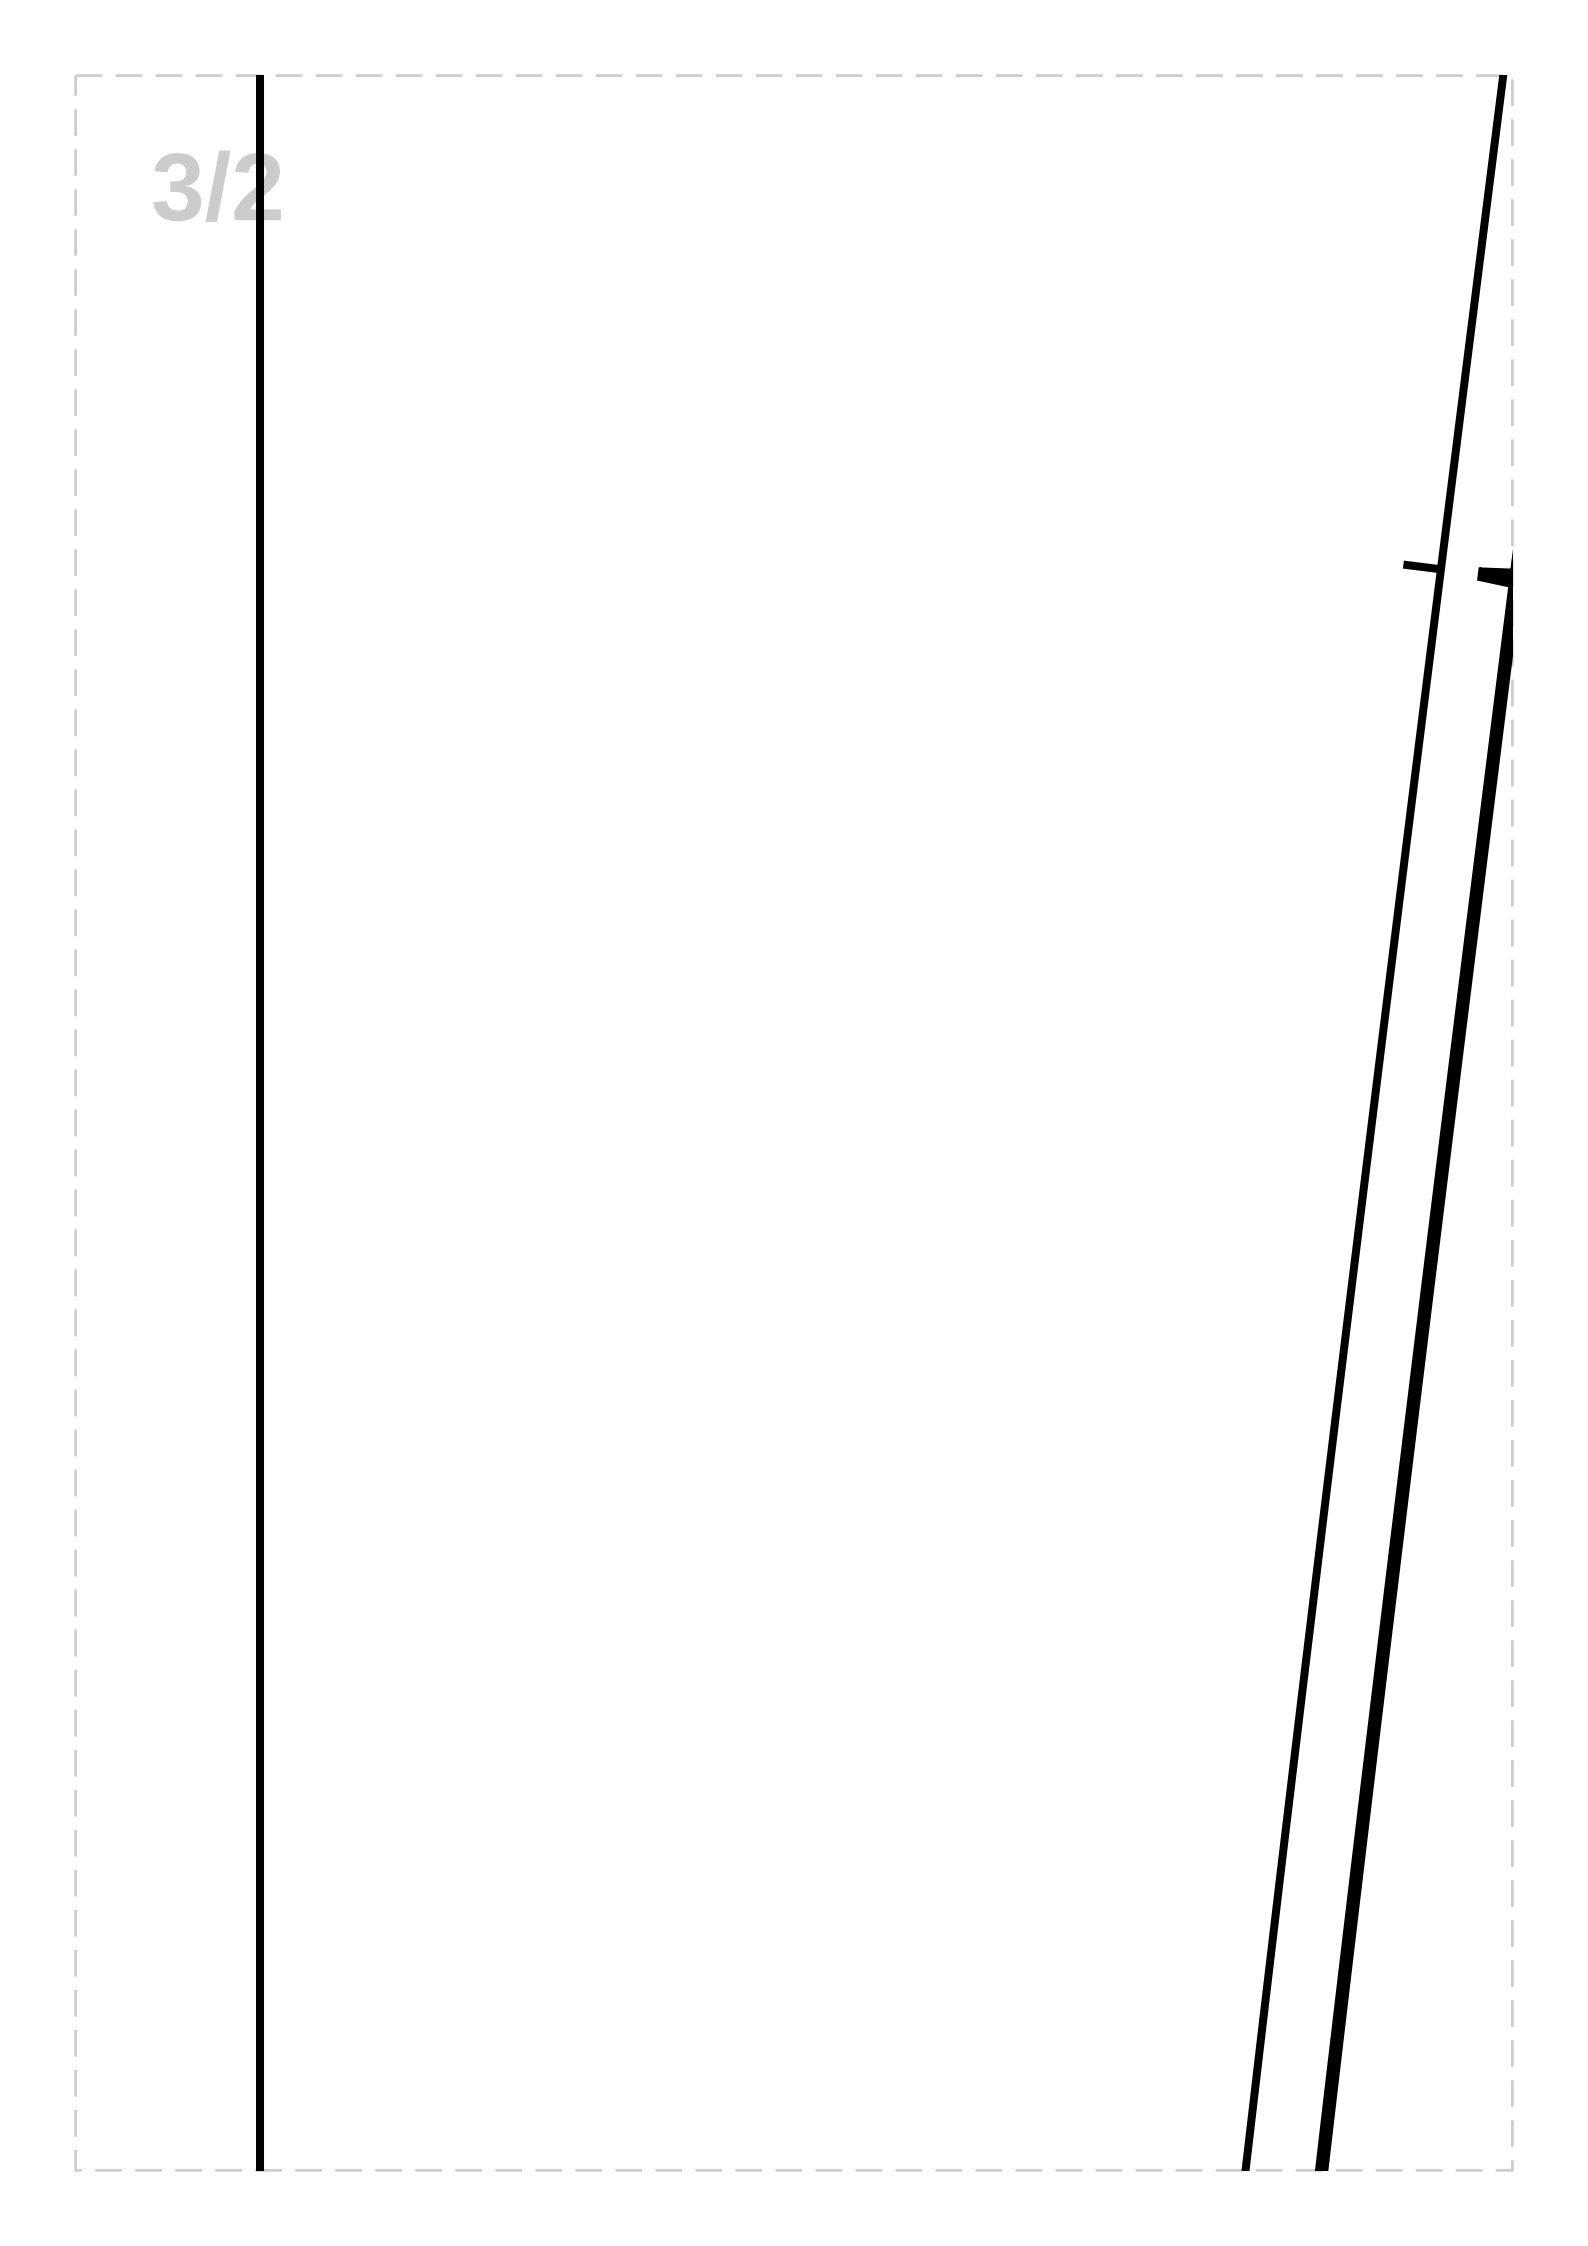


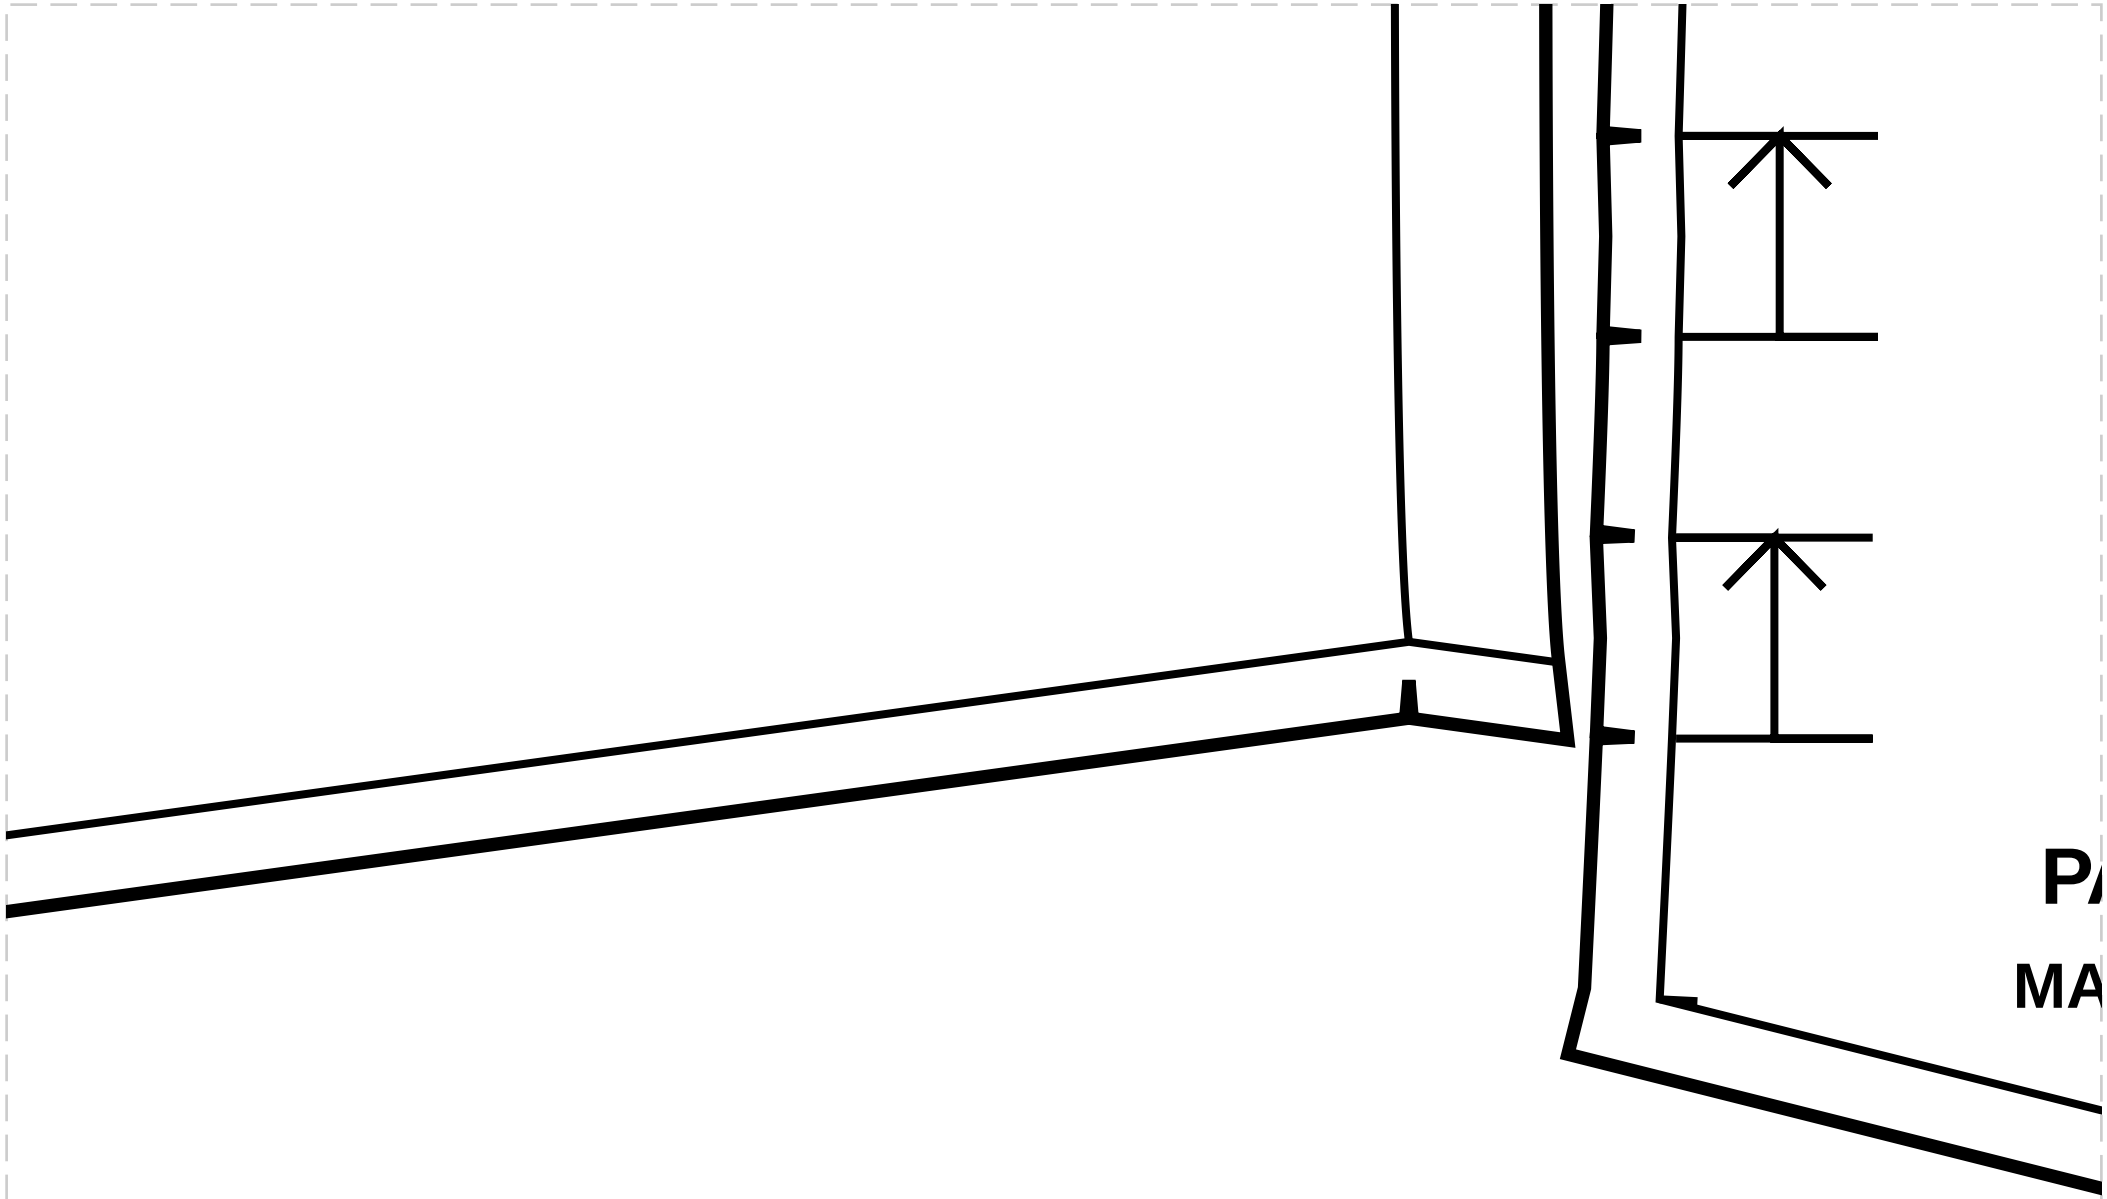
P
MA


4/2


CENTER FRONT


WAISTBAND
MAIN FABRIC: Cut 1

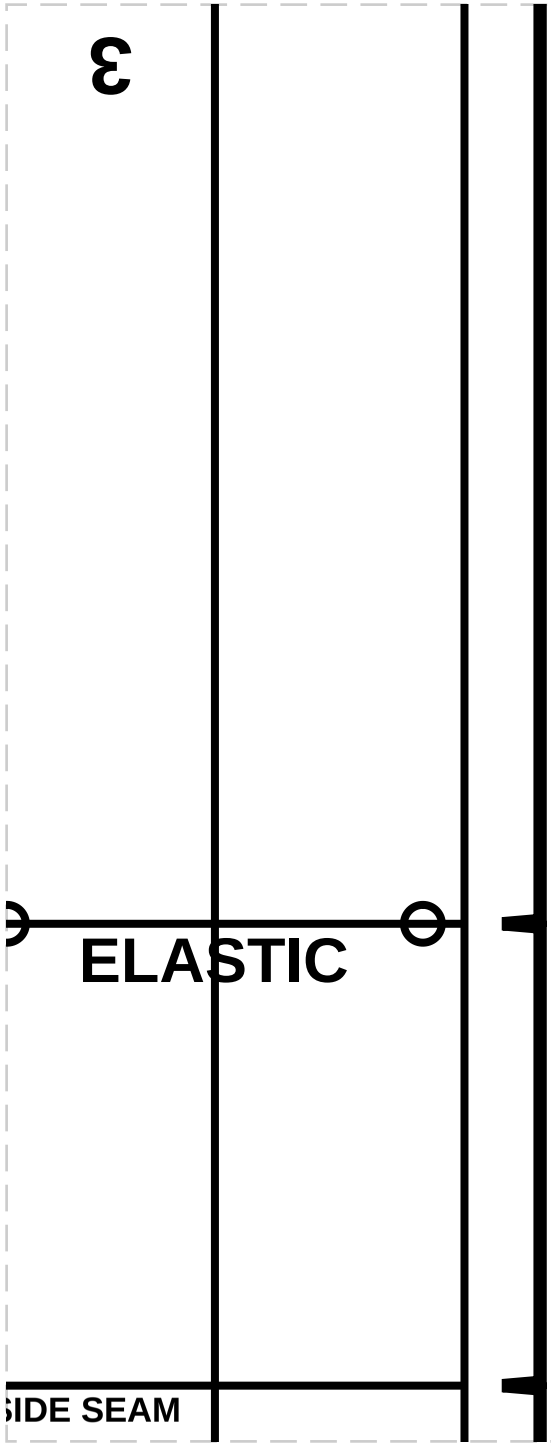
ε
ELASTIC
SIDE SEAM

ELASTIC LENGTH 18" (45.85) cm

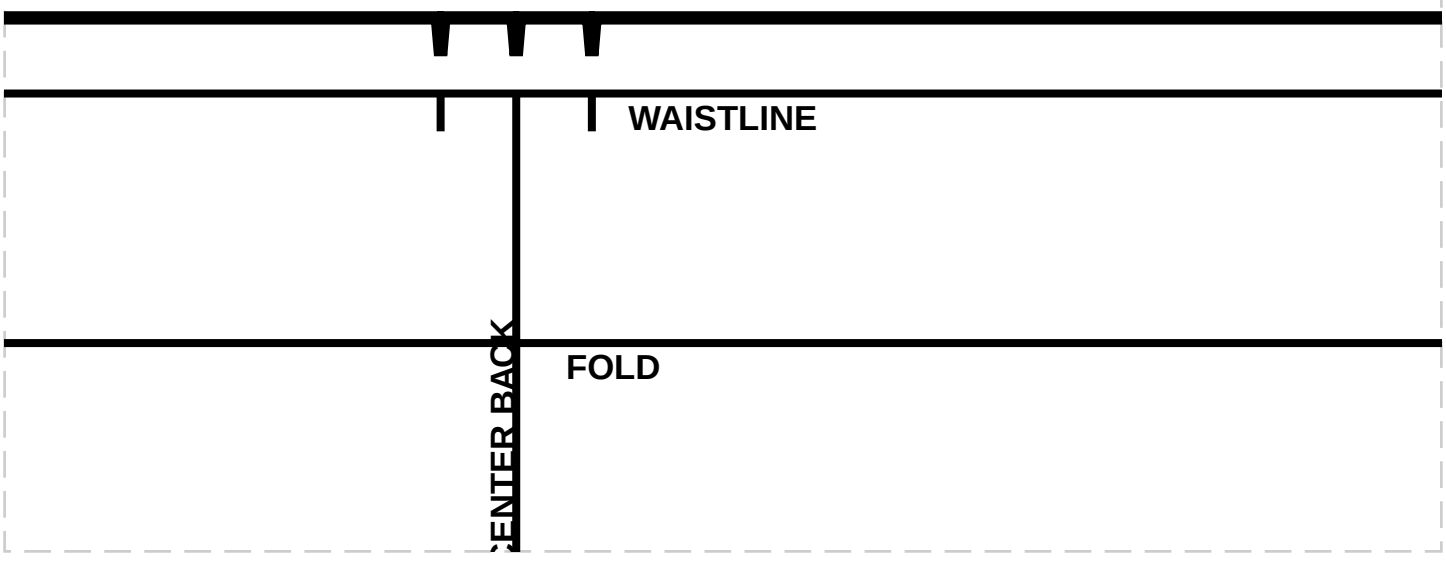
WAISTLINE
FOLD
CENTER BACK

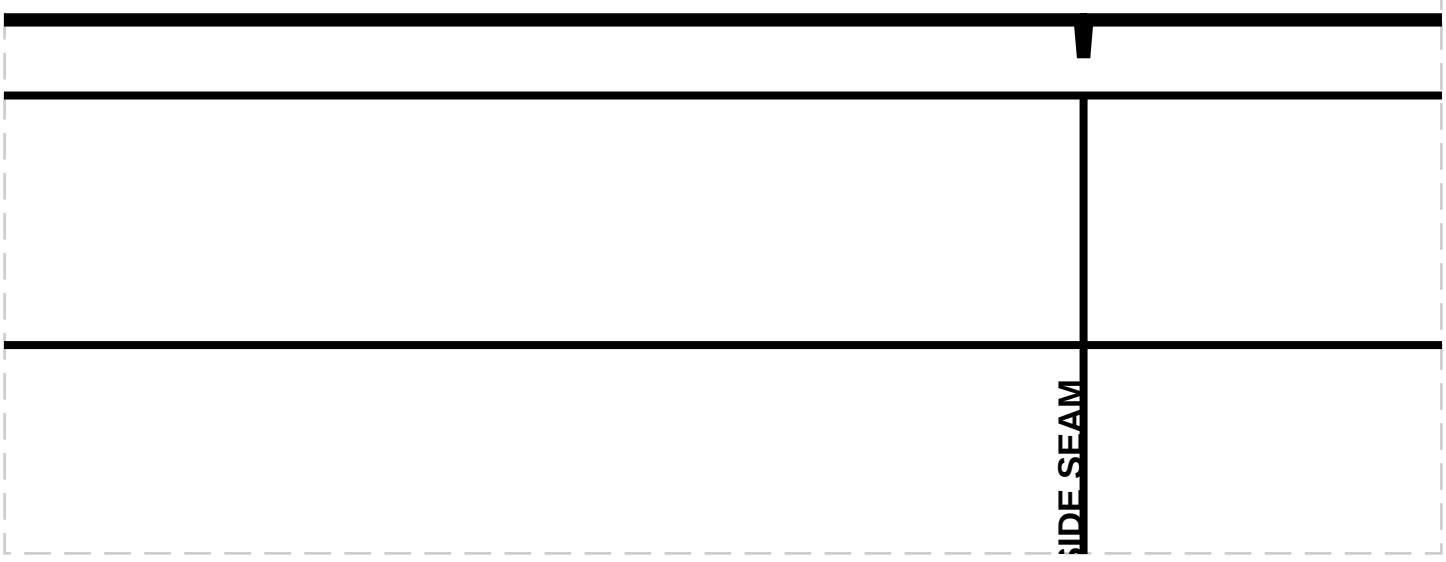

SIDE SEAM

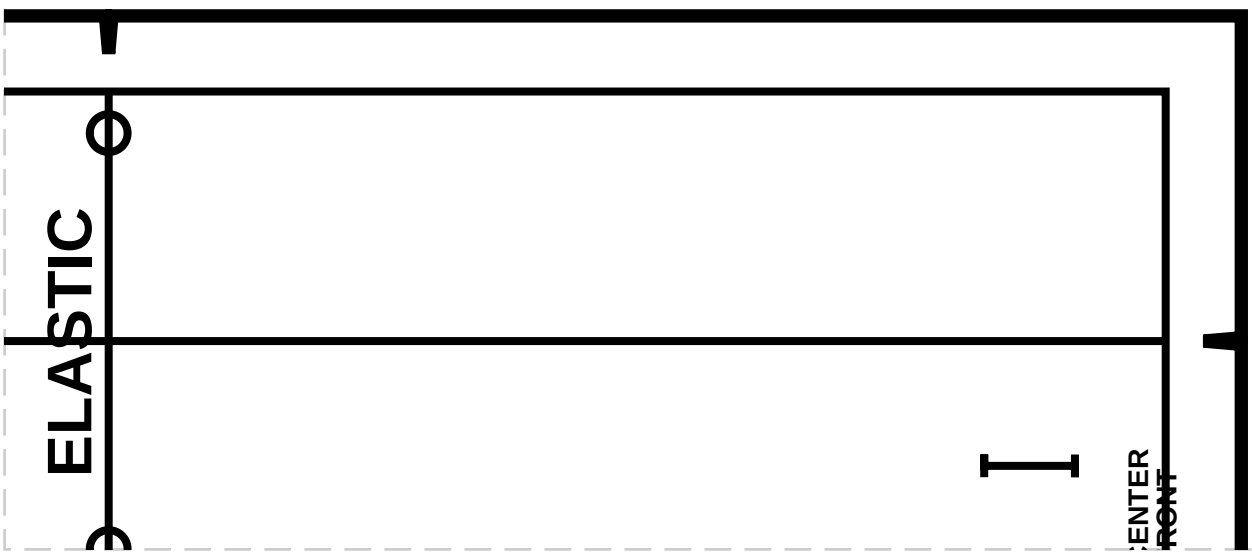
ELASTIC
CENTER
FRONT


1

ANTS FRONT


IN FABRIC: Cut 2

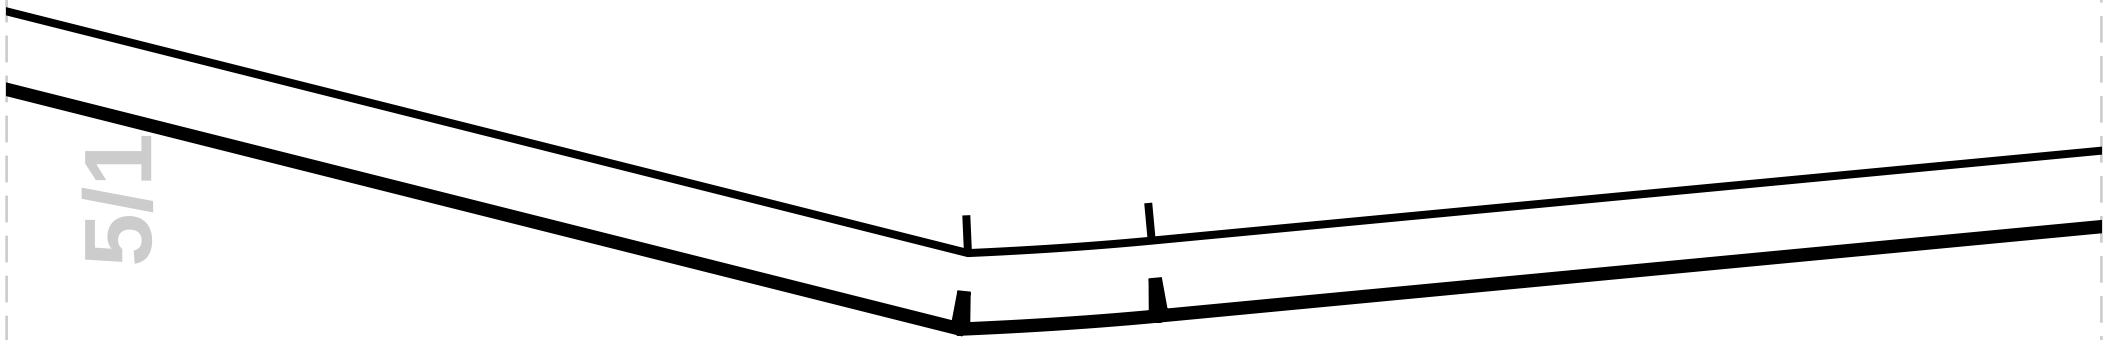

5/1

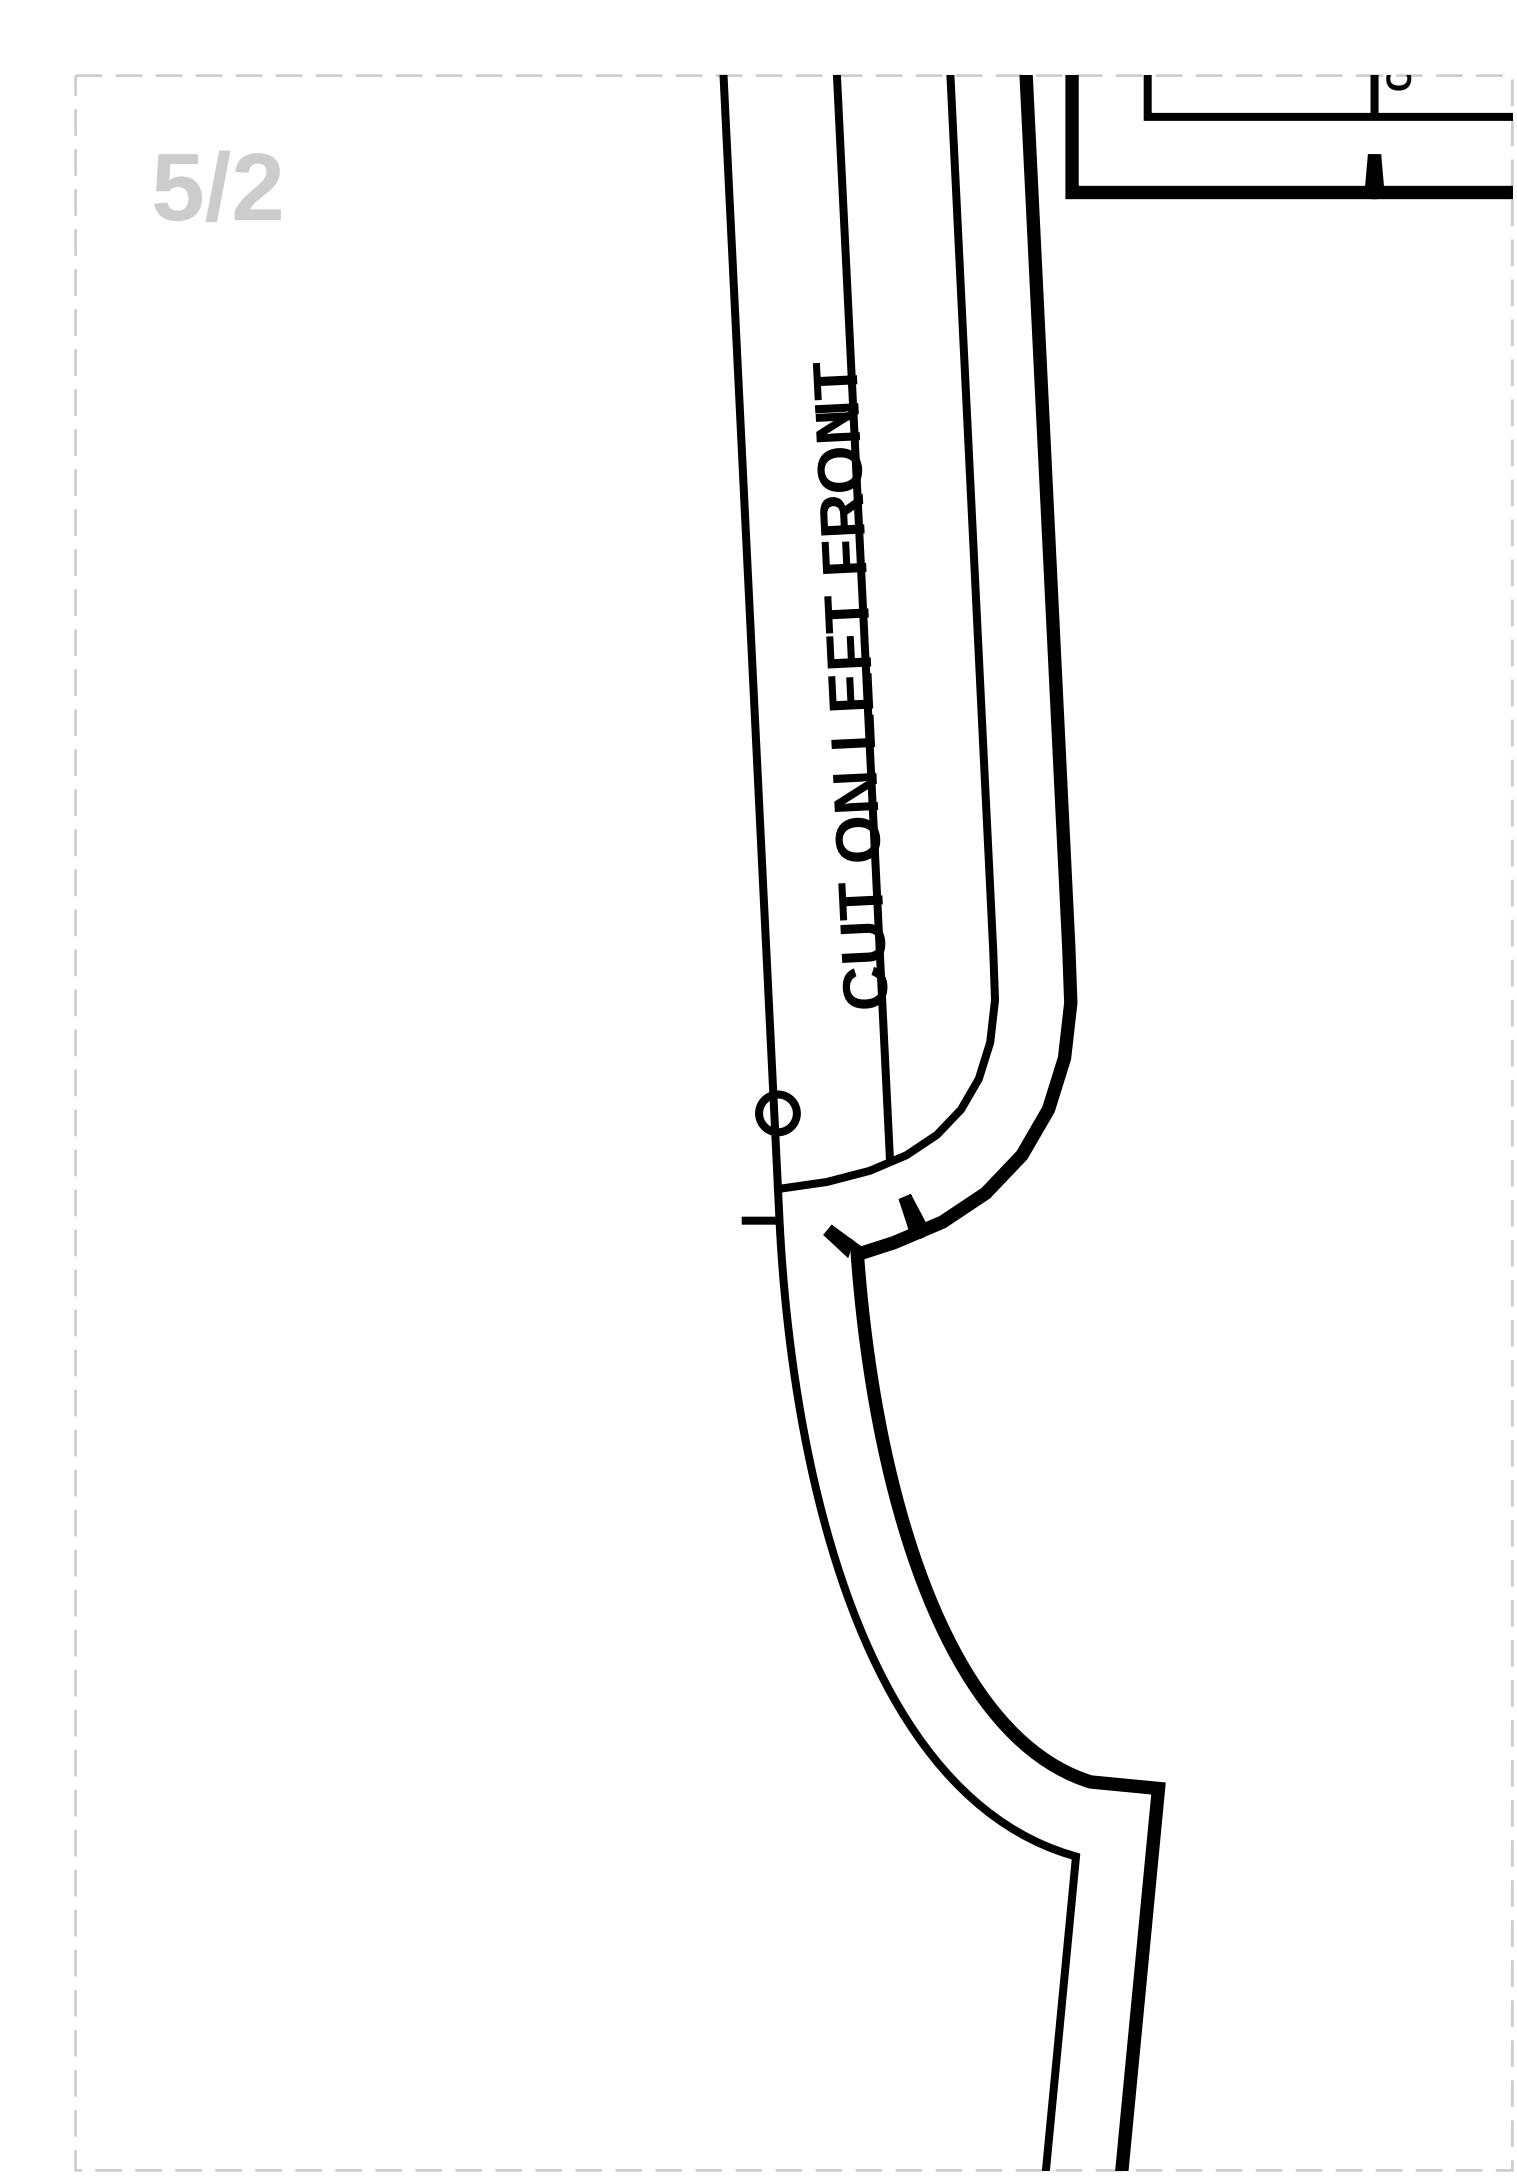
CUT ON LEEFRONT







WAISTLINE


v_1

5/7

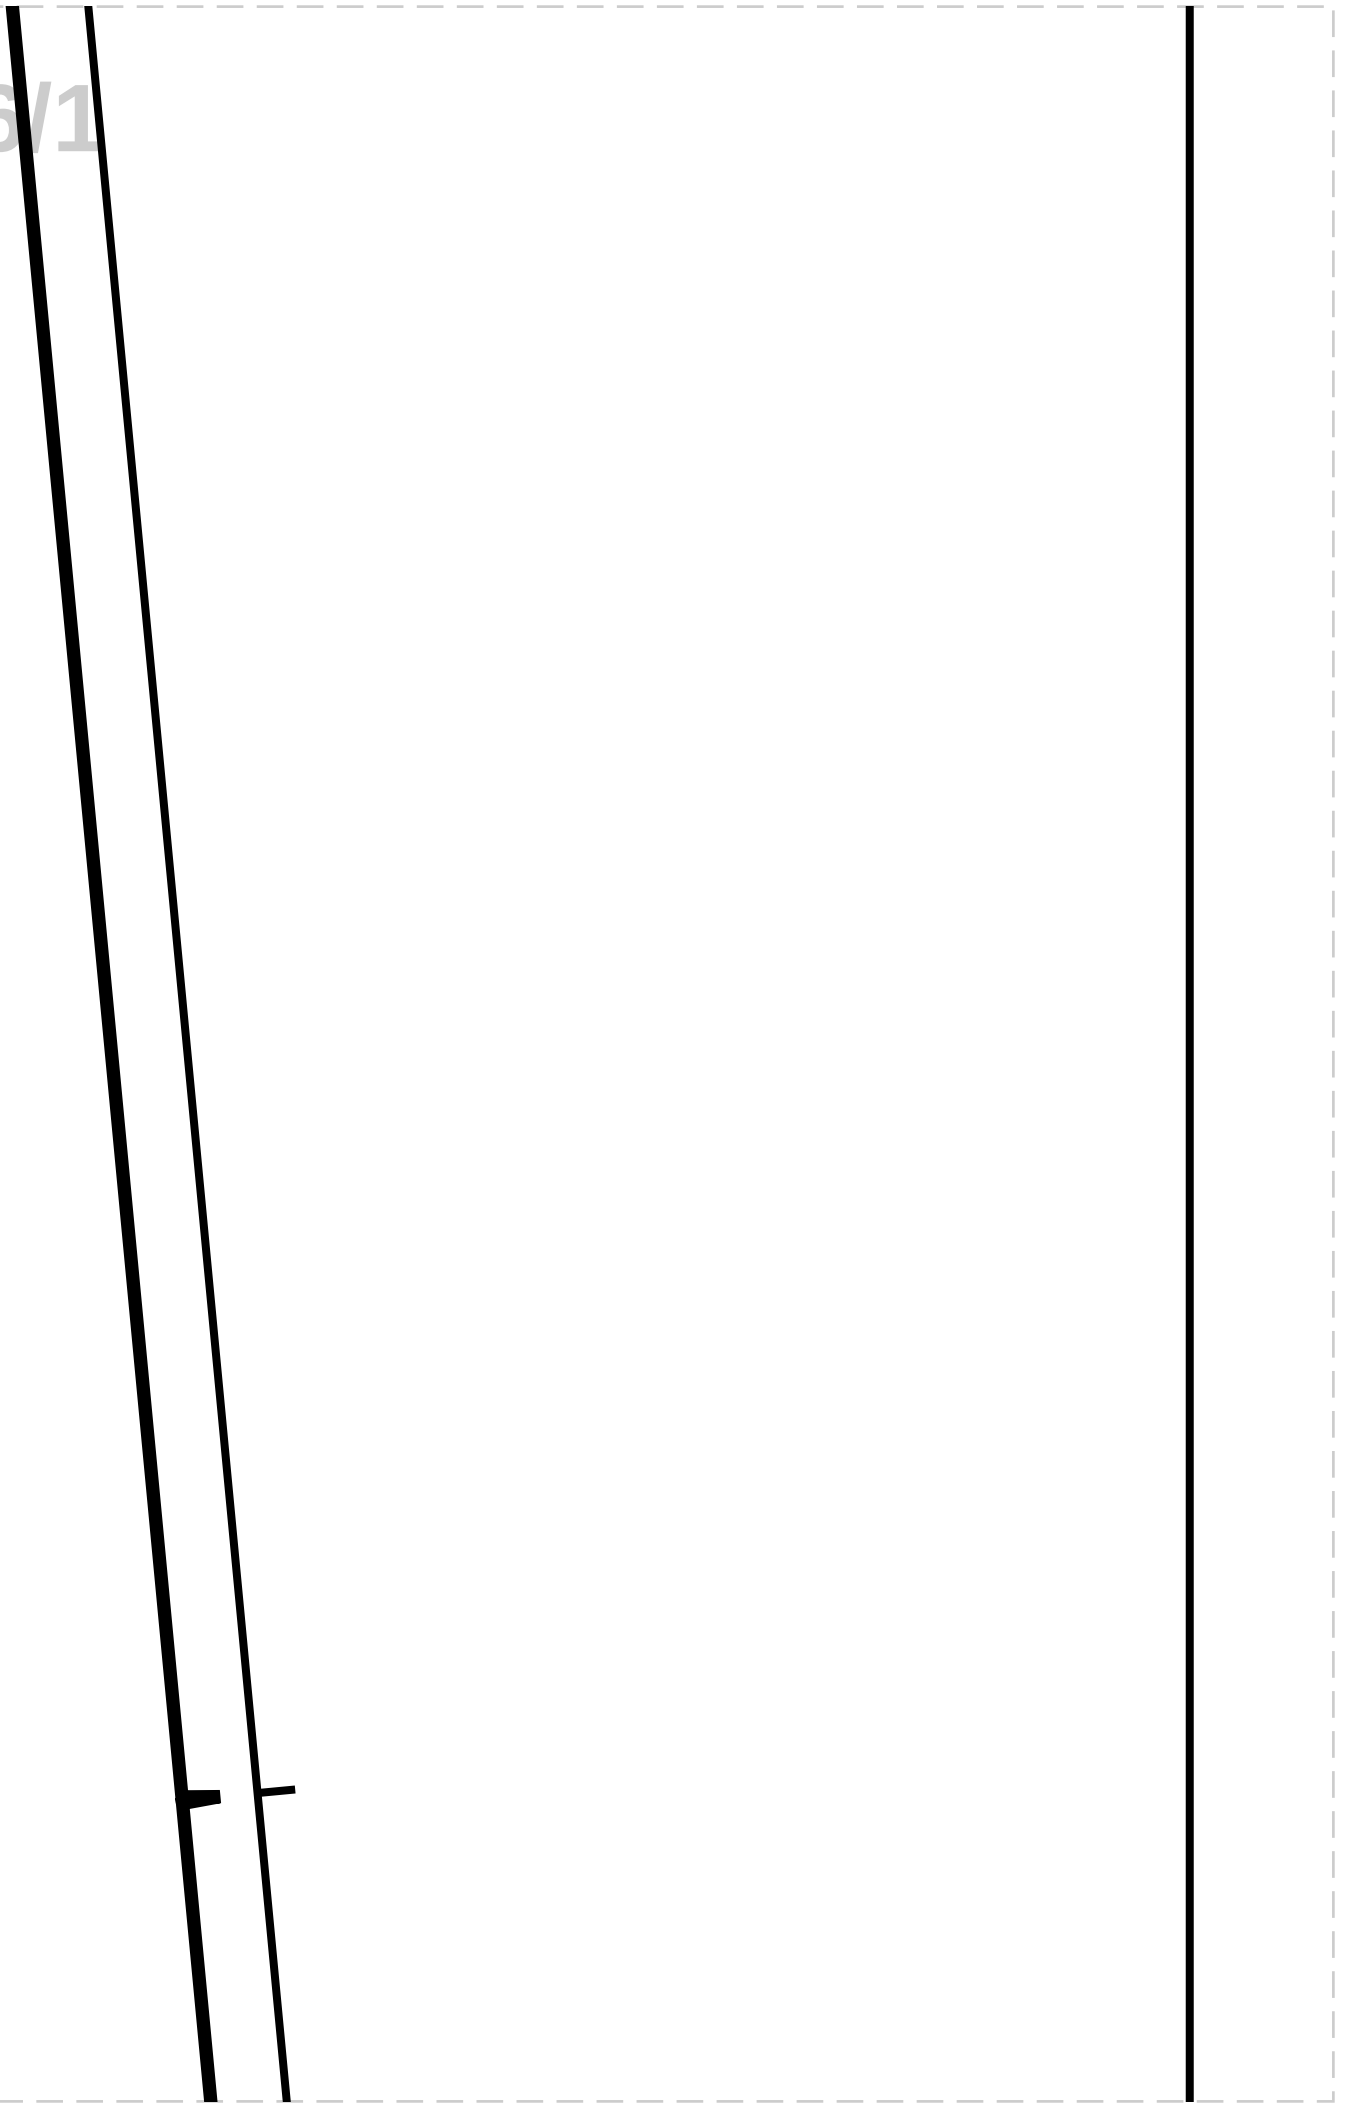


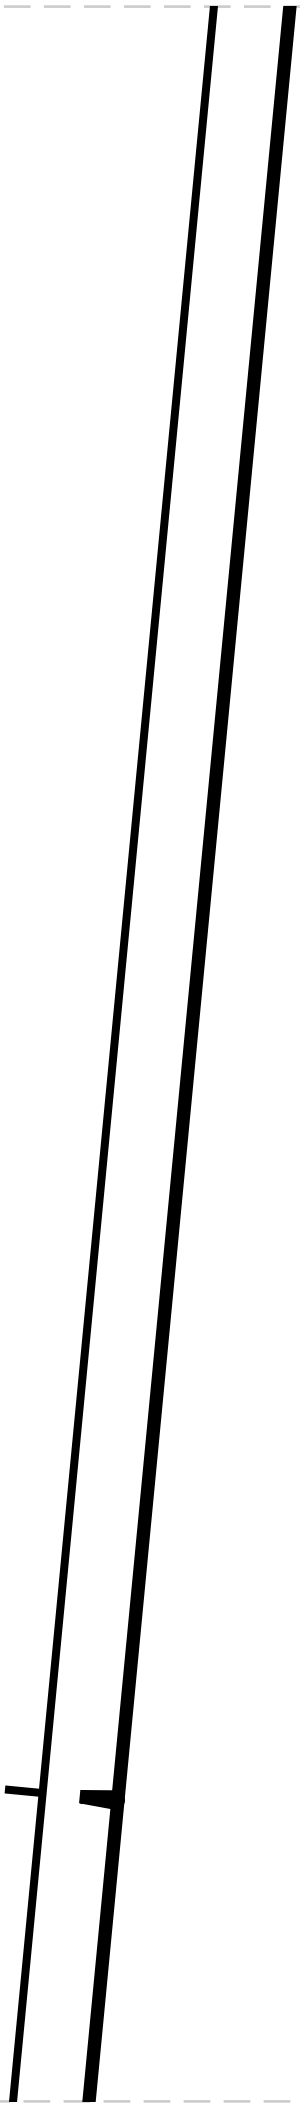


6/3

6/4

6/5

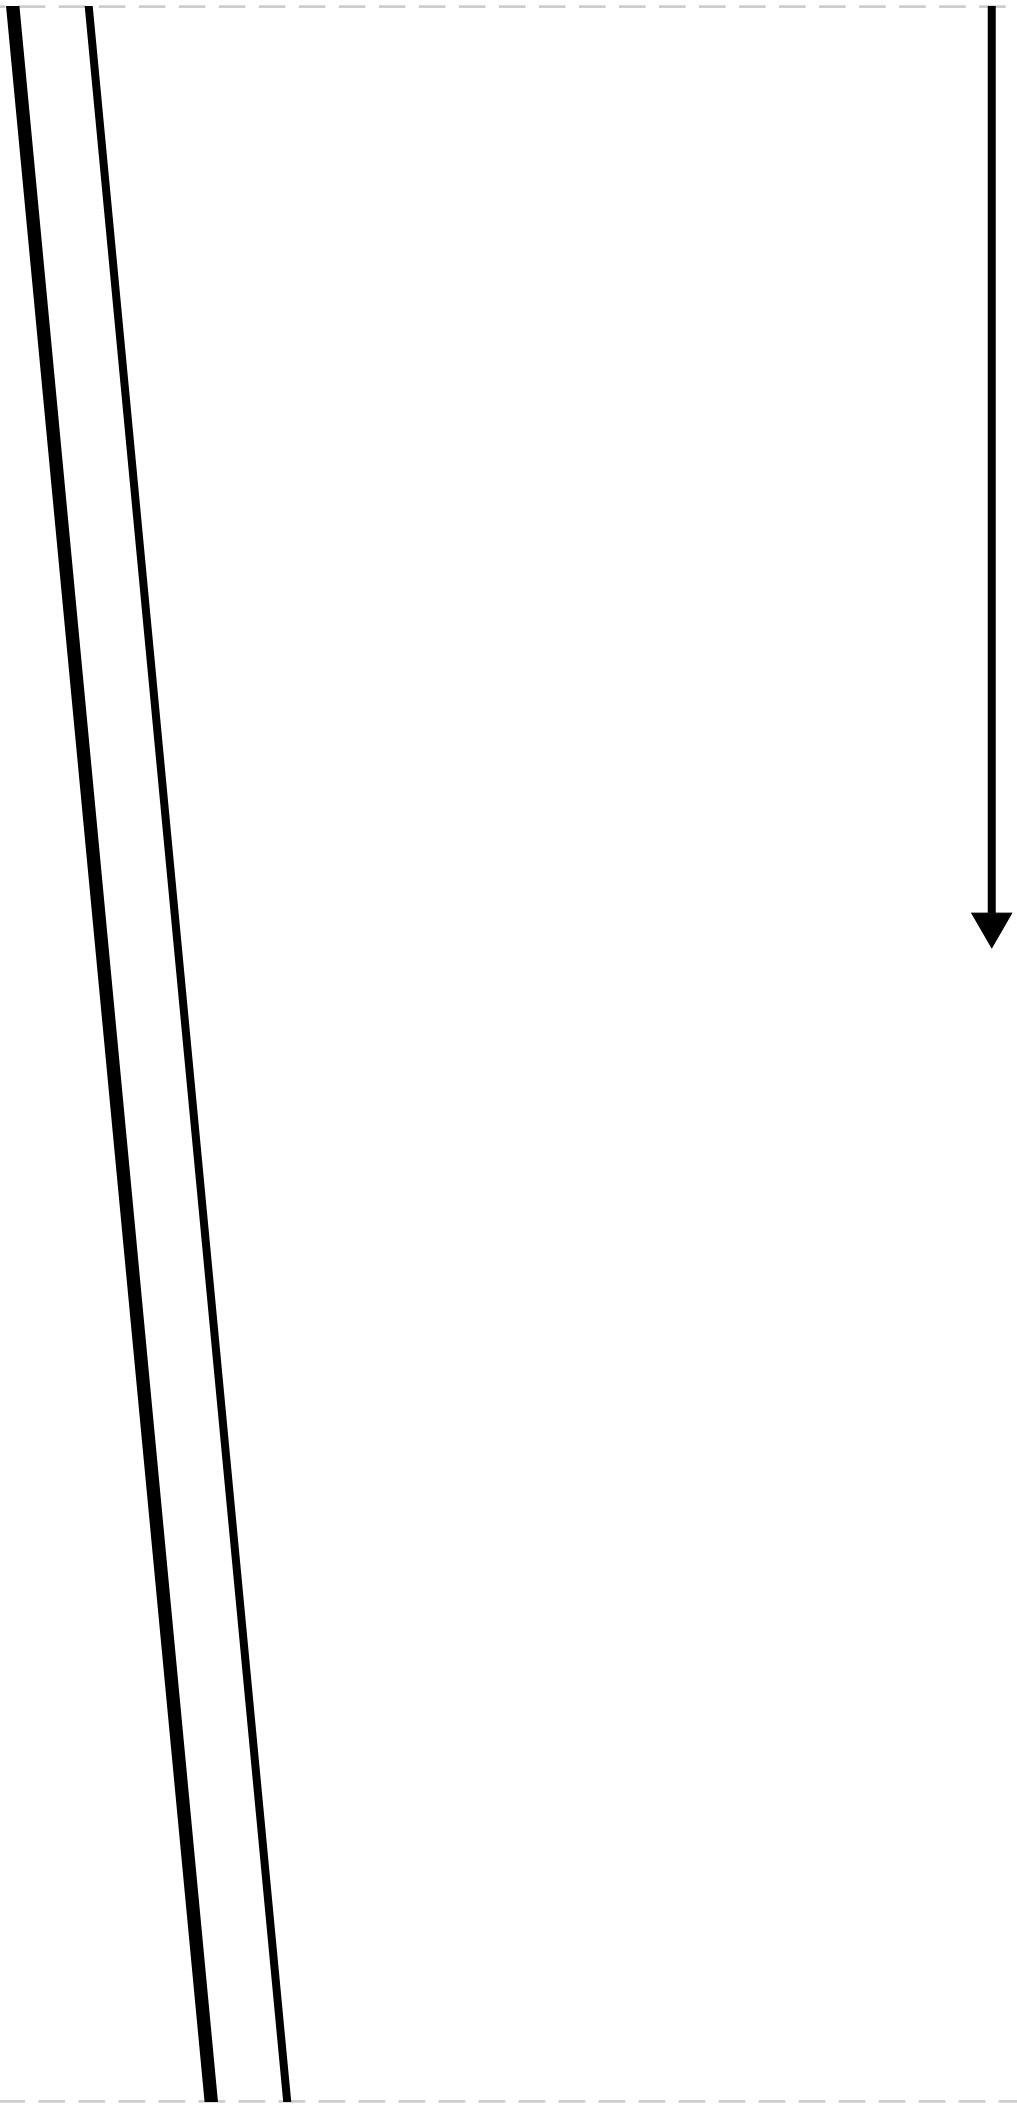

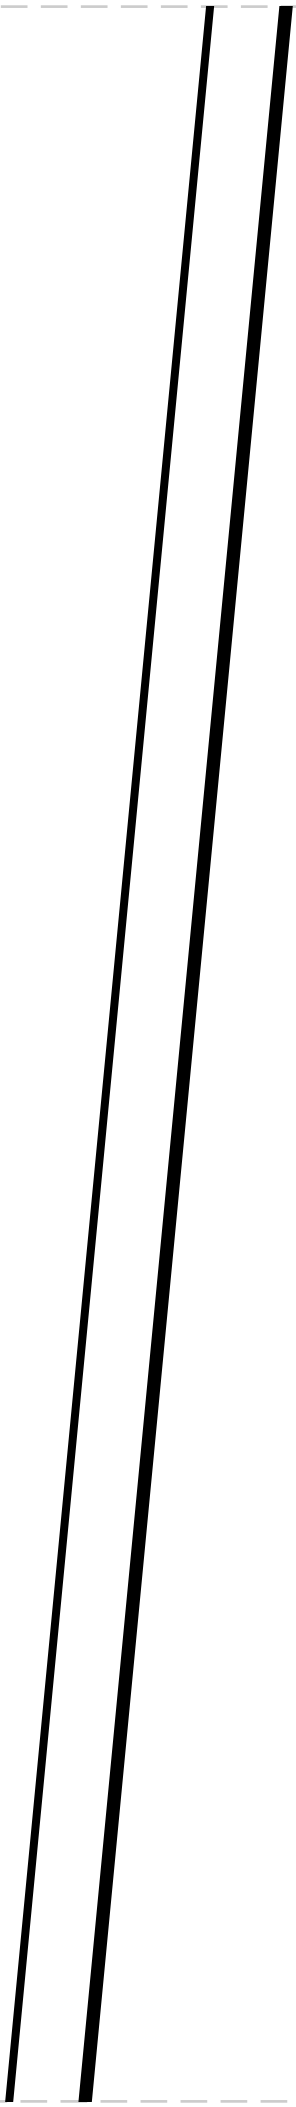


7/3

7/4


7/5

7/6

8/1

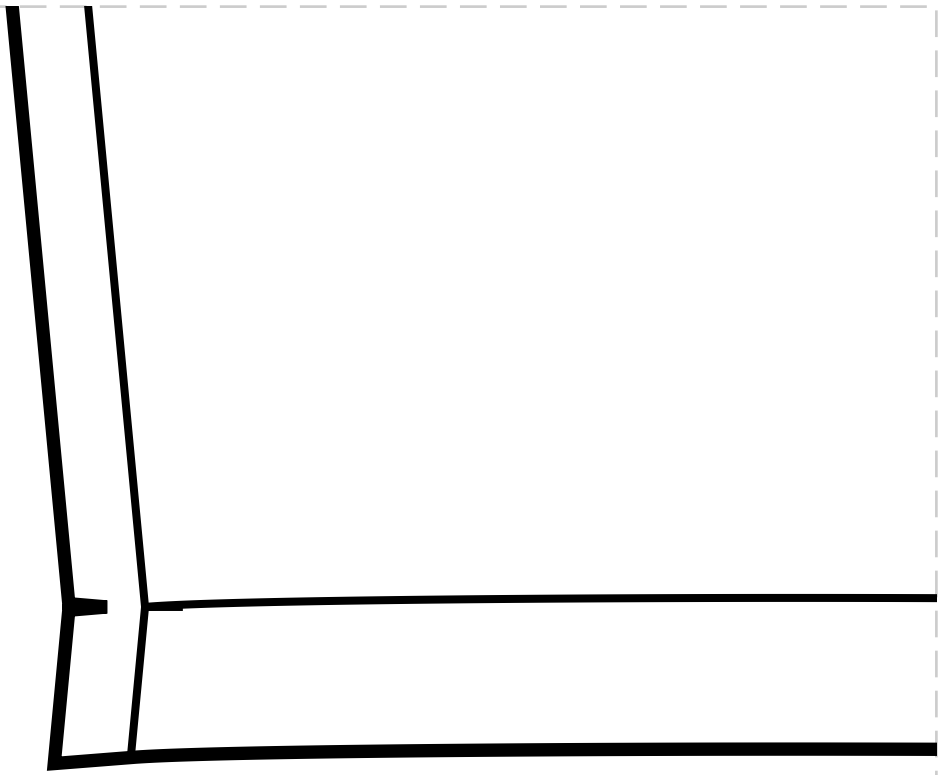

8/2

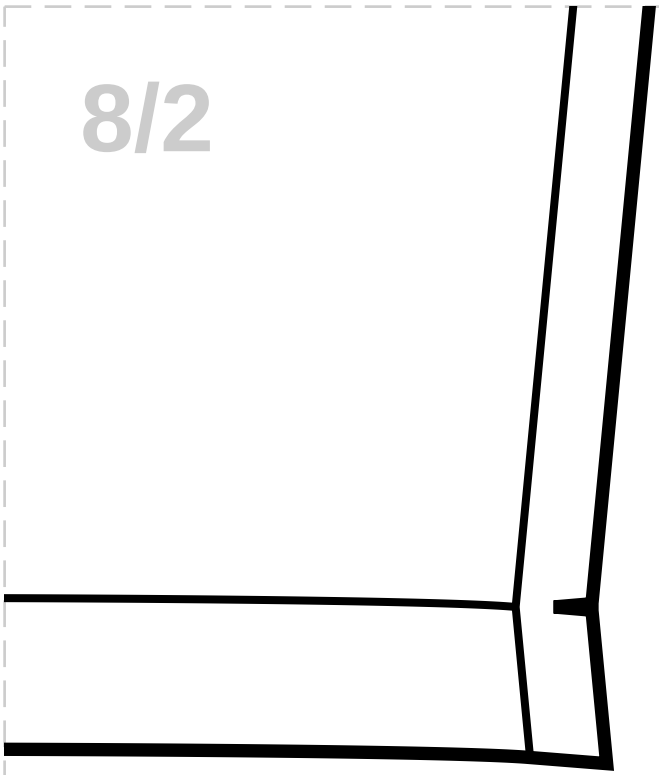

8/3

8/4

8/5

8/6

8/7