**CozySewPatterns**

SEWING PATTERNS

# Print this Calibration Test page first!

Size: Height: 167.75, Bust: 109.25, Waist: 93.25, Hips: 115.5
SIZE 16

## Notes

## How to print

### Printing


Once your Calibration Test Page has been printed, measure the 4”x 4” (10cm) scale box with a ruler. If the lengths match, you can confidently print your pattern. If the rulers do not match, set your print settings to 100% or Actual and retry.

### Cutting

Your printouts will always have a dashed border to perfectly match your sheets. Cut off the right edge of each page. Be careful not to cut beyond the dashed mark, otherwise your patterns will not align accurately.

### Tapping

Group each sheet by the second number marked on each pate i.e. in a group 1, there are: 1/1, 2/1, 3/1, 4/1, etc. In a group 2: 1/2, 2/2 etc. 2. Place page 1/1 on top of the page 2/1, overlapping the right side edge. Match corners and crosses and secure with a pin or tape. Then use a scotch tape to permanently attach the sheets together.

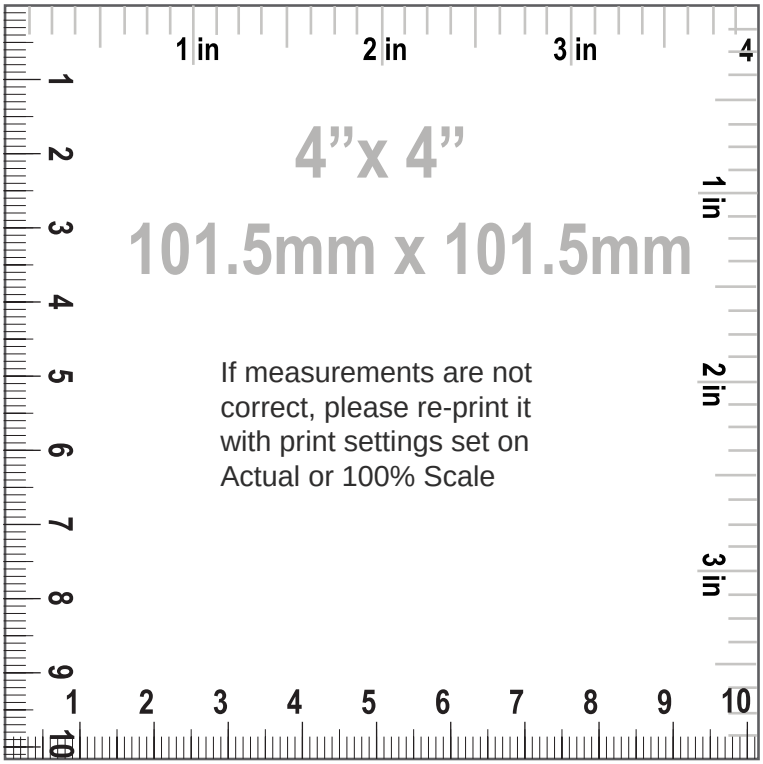

SIZE 16
Seam Allowance: 1 (3/8 in)

## Pattern pieces:

1. "PANTS FRONT", MAIN FABRIC: Cut 2
2. "PANTS BACK", MAIN FABRIC: Cut 2
3. "WAISTBAND", MAIN FABRIC: Cut 1
4. "POCKET BAG", MAIN FABRIC: Cut 2
5. "FLY FACING", MAIN FABRIC: Cut 1
6. "POCKET LINING", LINING: Cut 2
7. "FLY INTERFACING", FUSIBLE INTERFACING: Cut 1
8. "FUSIBLE INTERFACING FOR WAISTBAND", FUSIBLE INTERFACING: Cut 2
9. "BACK POCKET WELT", MAIN FABRIC, FUSIBLE INTERFACING: Cut 2
10. "BACK INNER POCKET BAG", LINING: Cut 2
11. "BACK OUTER POCKET BAG", LINING: Cut 2

## Pattern Specs (Circumferences are divided by 2):


1. Hem max 3.00 none (1 1/8 in)
2. Seam allowance max 2.00 none (3/4 in)
3. Stretch factor 1.00 none (3/8 in)
4. Stretch factor horizontal 1.00 none (3/8 in)
5. Stretch factor vertical 1.00 none (3/8 in)
6. Pocket bag height 29.68 cm (11 5/8 in)
7. Pocket side seam 19.83 cm (7 3/4 in)
8. Pocket waist seam 19.83 cm (7 3/4 in)
9. Back pocket entry length 14.18 cm (5 5/8 in)
10. Side seam back pocket position 9.74 cm (3 7/8 in)
11. Waist to back pocket length 13.68 cm (5 3/8 in)
12. Back pocket width welt 2.50 cm (1 in)
13. Fly zipper length 23.00 cm (9 in)
14. Waist 50.34 cm (19 7/8 in)
15. Hips 58.27 cm (23 in)
16. Pleat depth 1.50 cm (5/8 in)
17. Thigh 37.50 cm (14 3/4 in)
18. Knee 30.14 cm (11 7/8 in)
19. Bottom opening 21.33 cm (8 3/8 in)

20. Front rise 32.27 cm (12 3/4 in)
21. Back rise 46.08 cm (18 1/8 in)
22. Crotch height 30.53 cm (12 in)
23. Inseam length 67.15 cm (26 3/8 in)
24. Pants side seam length 98.69 cm (38 7/8 in)
25. Waistband partly elastic width 3.00 cm (1 1/8 in)
26. Waistband width 3.30 cm (1 1/4 in)
27. Waistband length 109.92 cm (43 1/4 in)
28. Waistband partly elastic length 53.24 cm (21 in)
29. Waistband button diameter 1.00 cm (3/8 in)
30. Waistband buttons quantity 1.00 pc
31. Seam allowance poc max 3.00 none (1 1/8 in)
32. Back pocket bag height 12.06 cm (4 3/4 in)


# CozySewPatterns

SEWING PATTERNS


Paper Size: A4;
Print Actual Size (100% Scale);

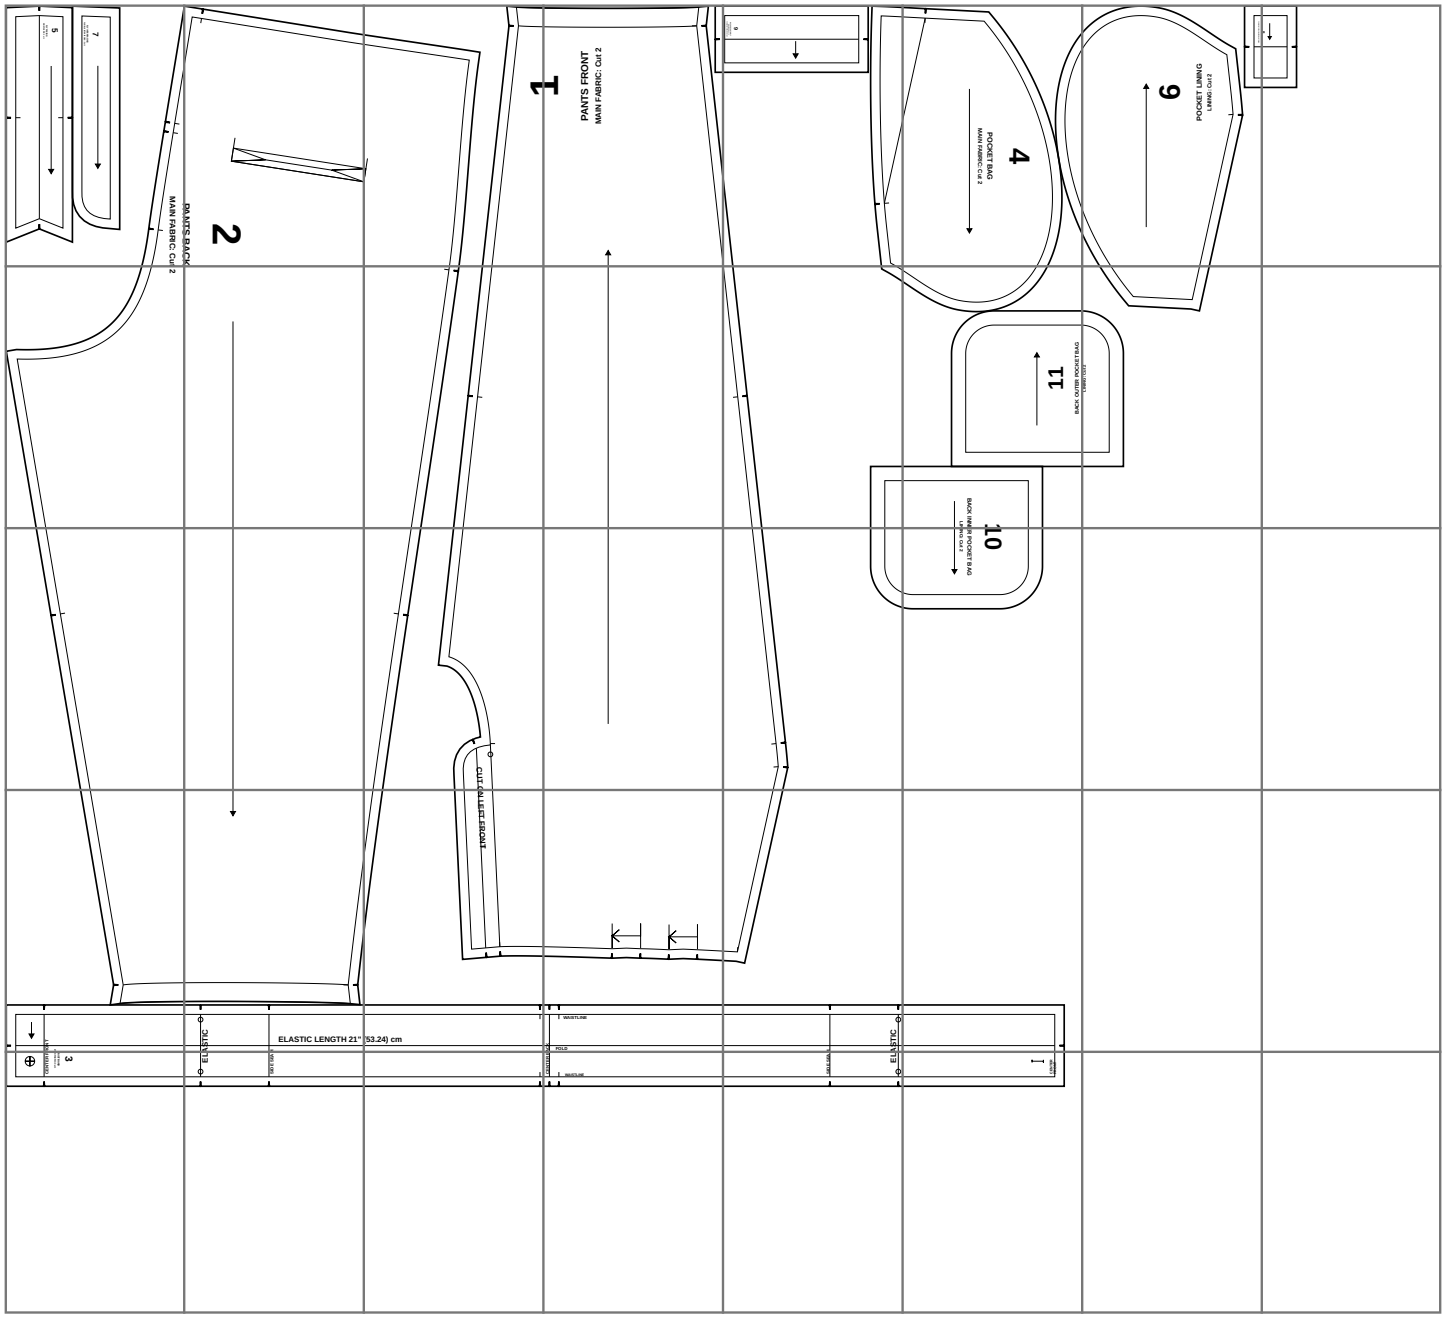

MAIN FABRIC: Cut

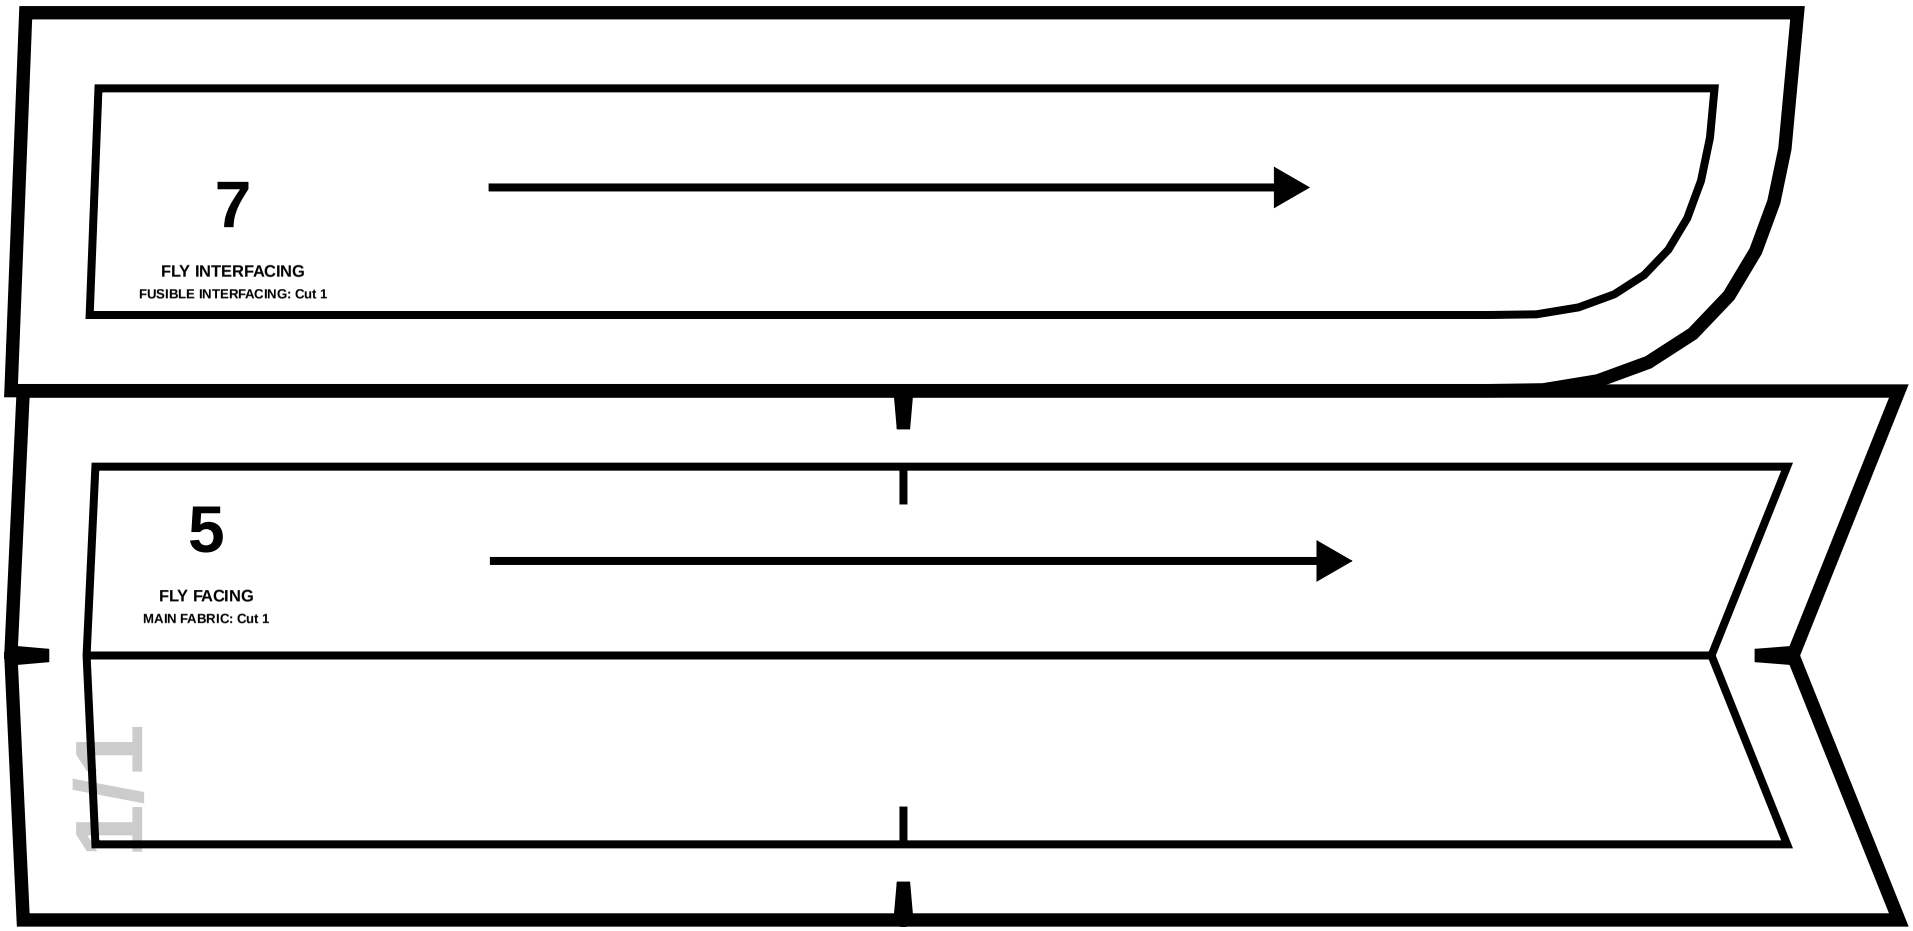




1/1

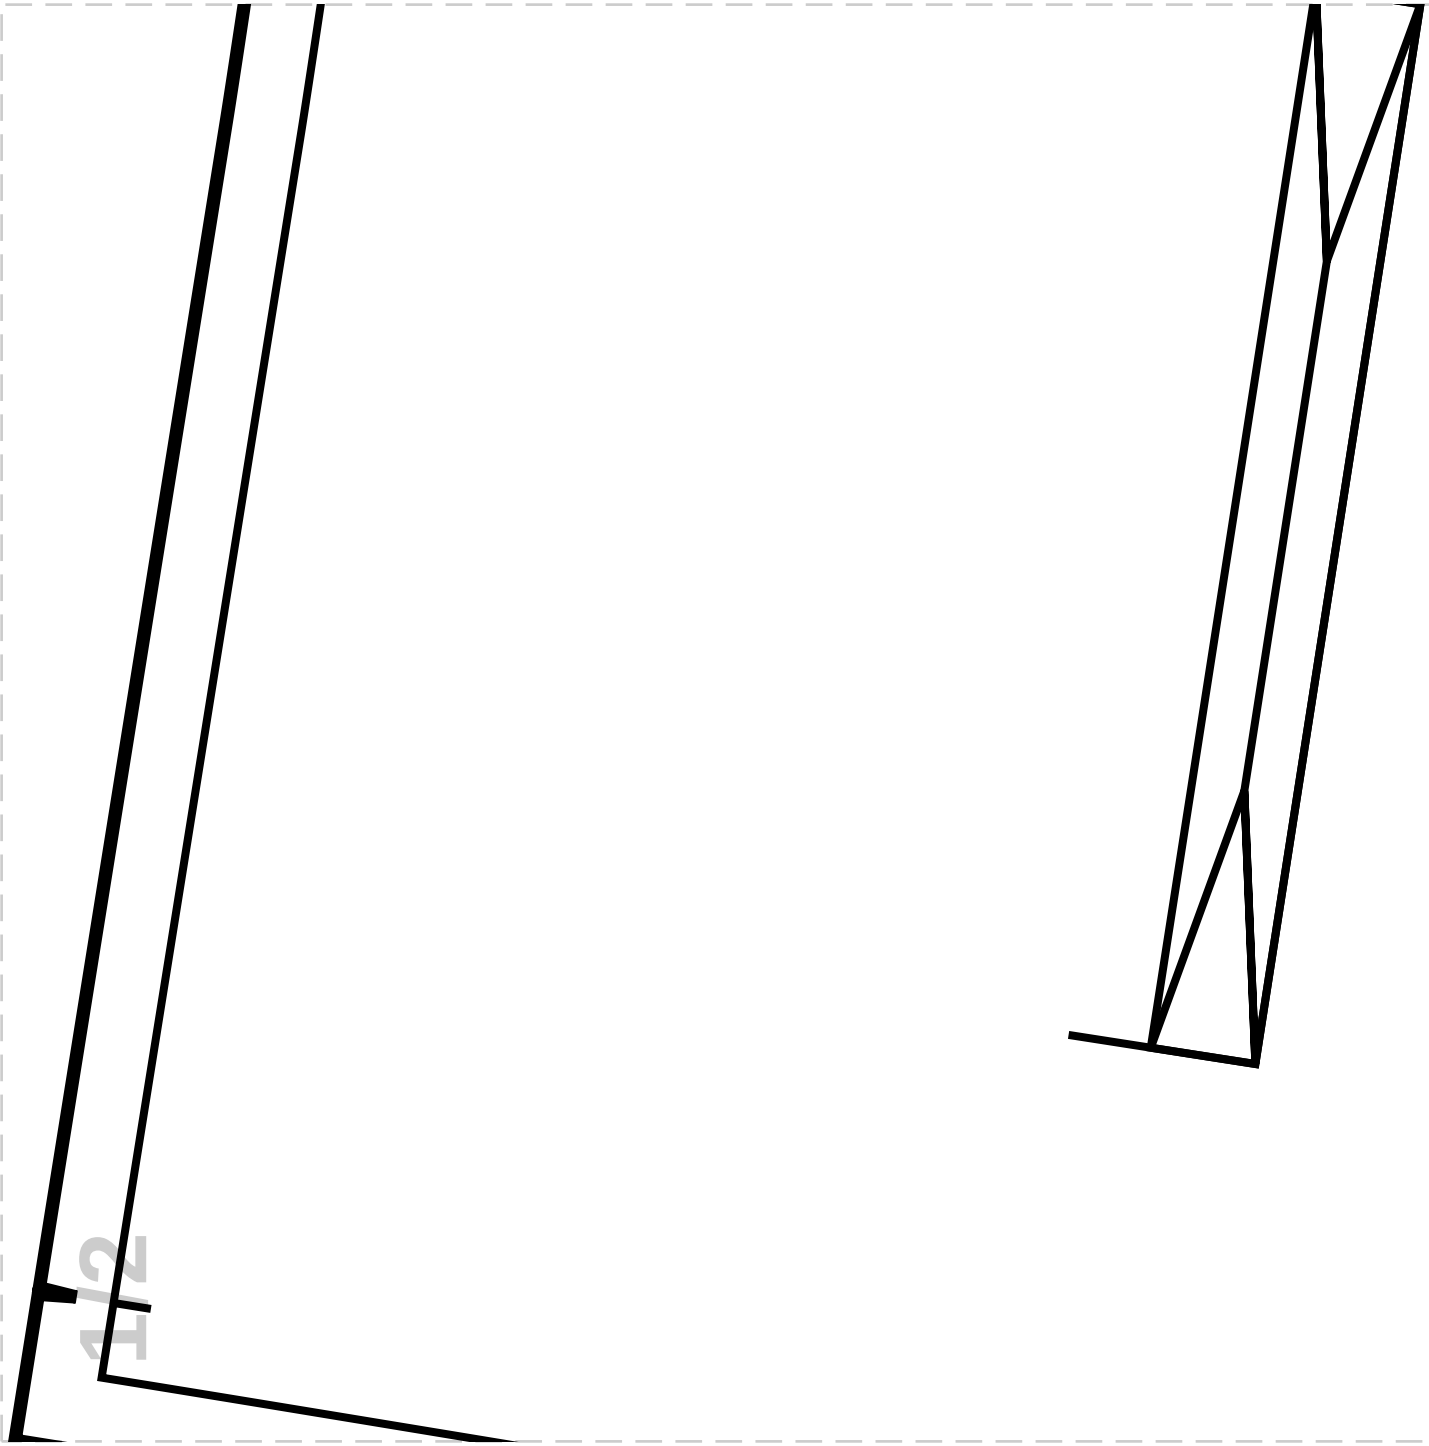




# 2

## PANTS BACK

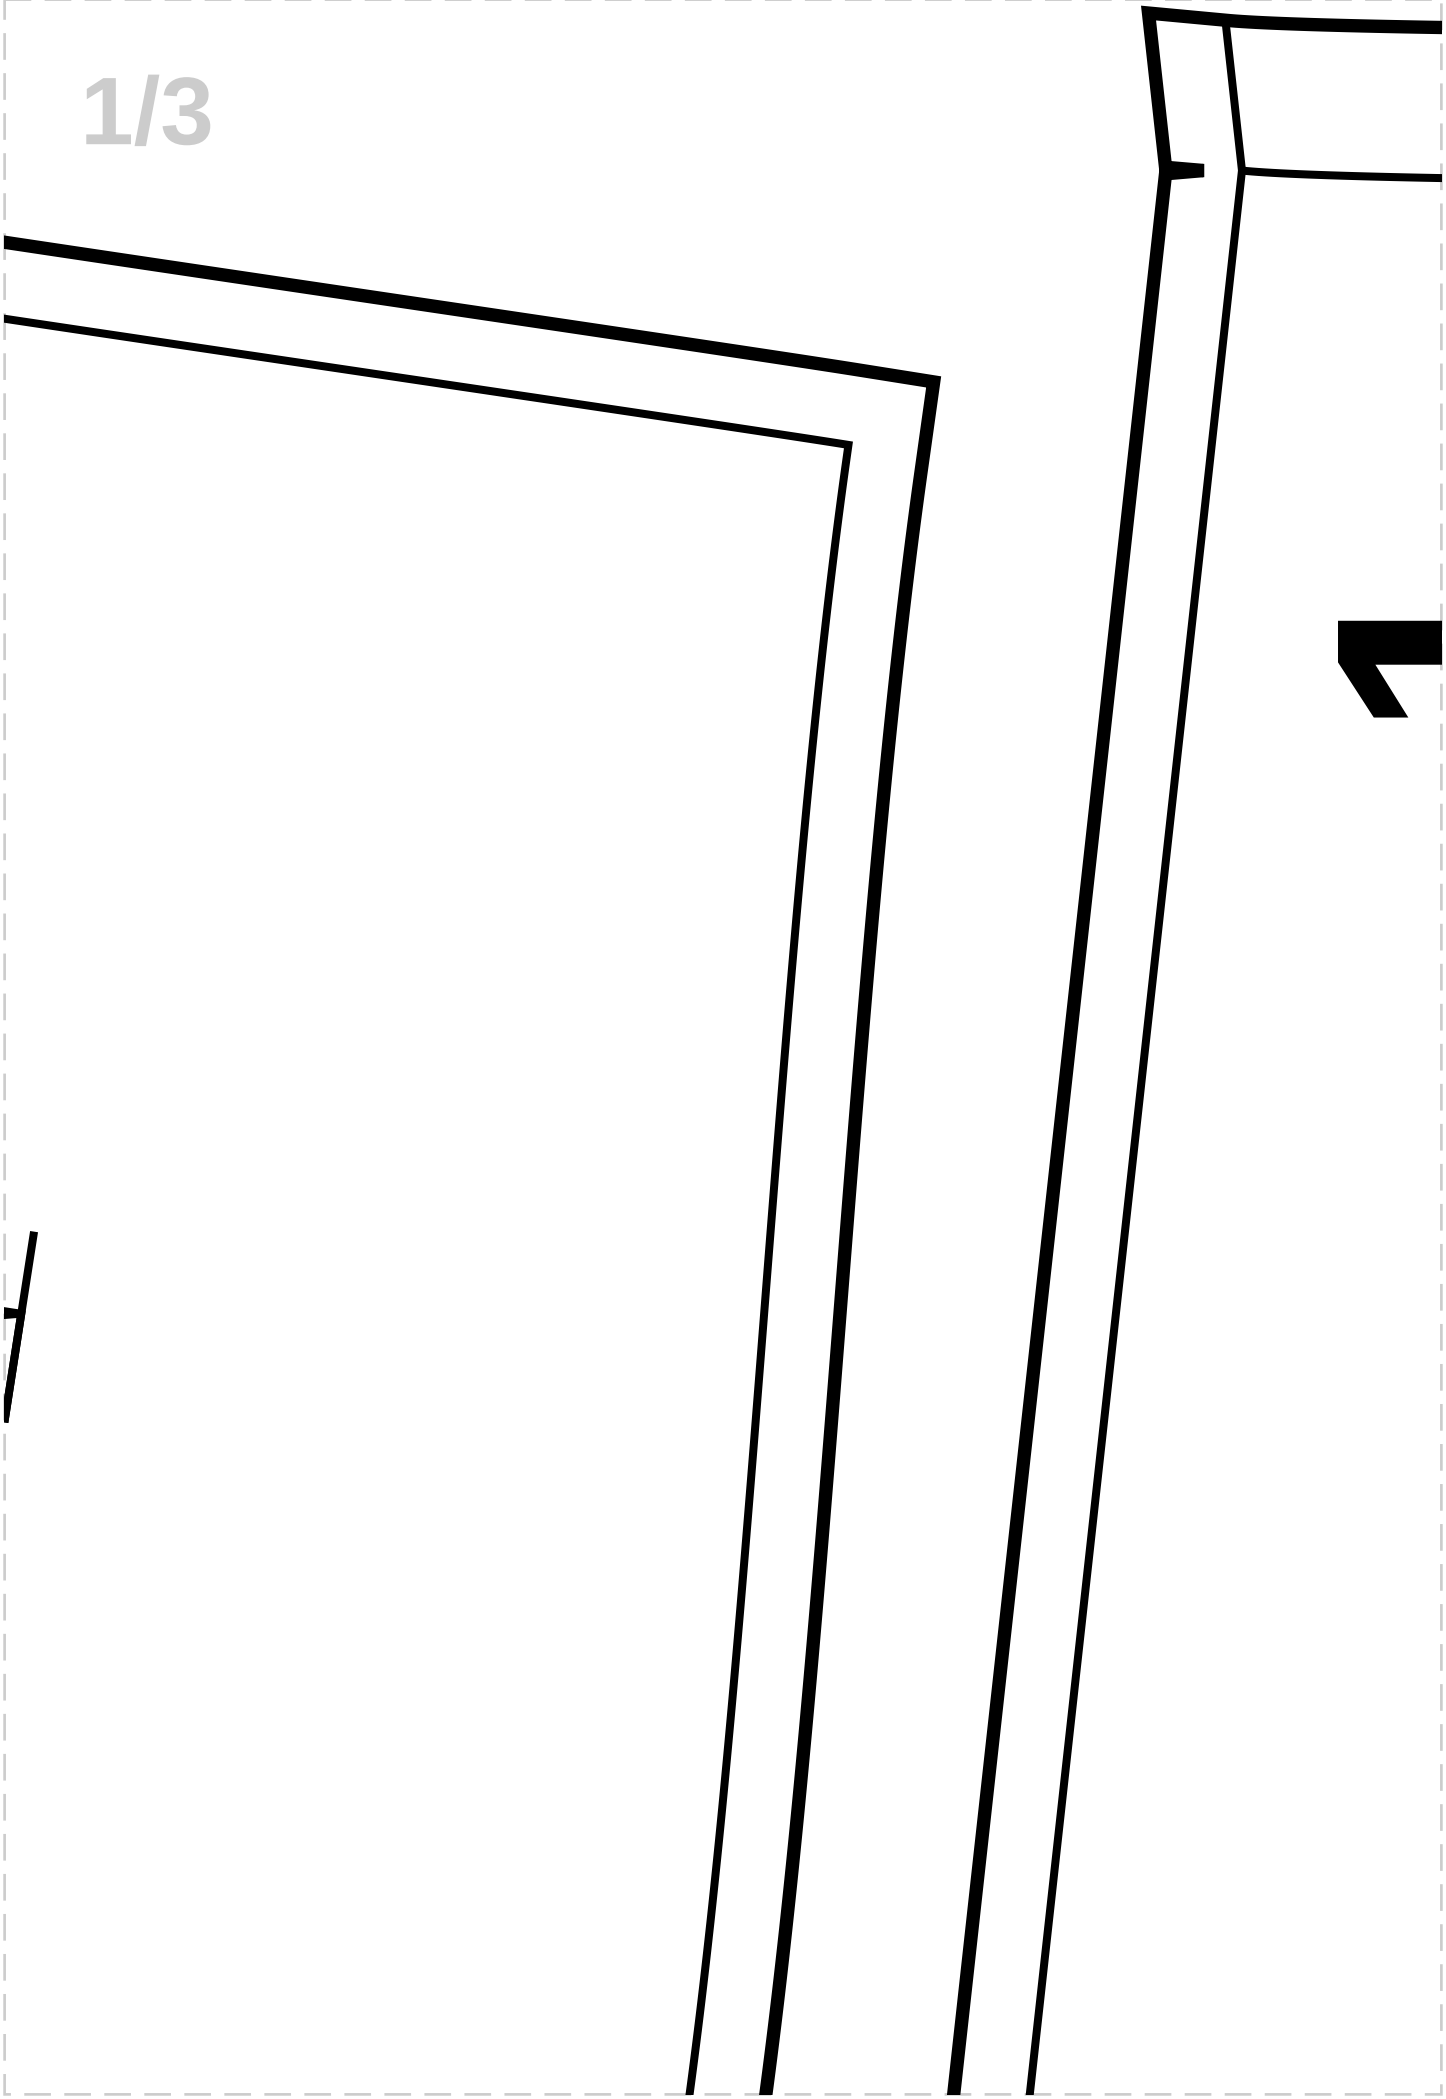

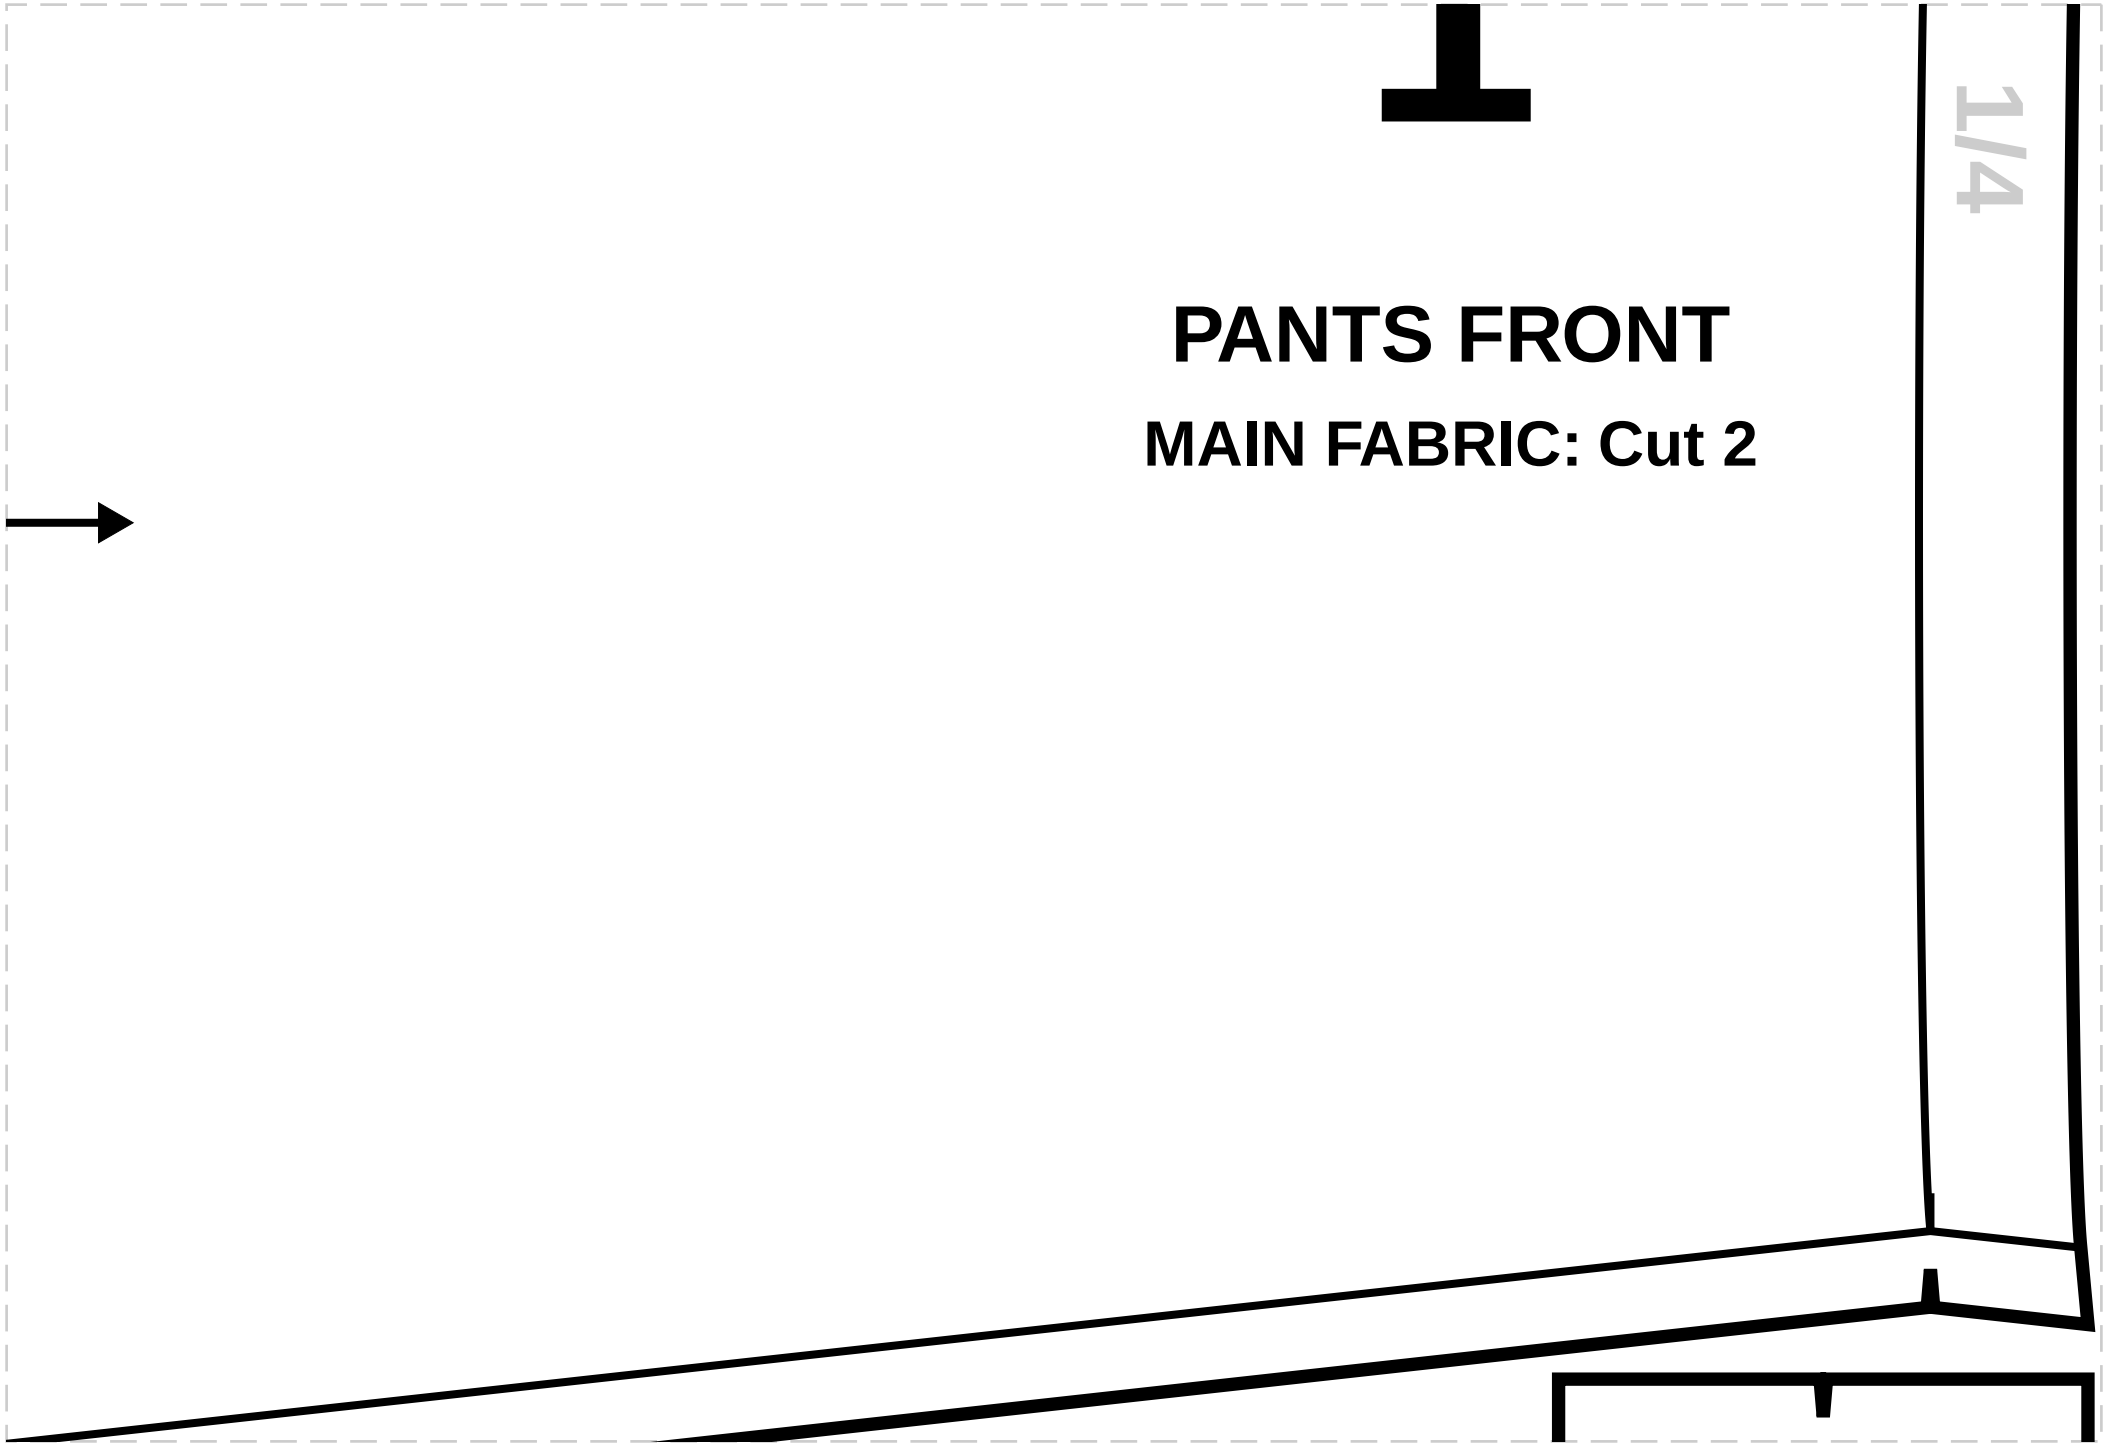
1/4
PANTS FRONT
MAIN FABRIC: Cut 2

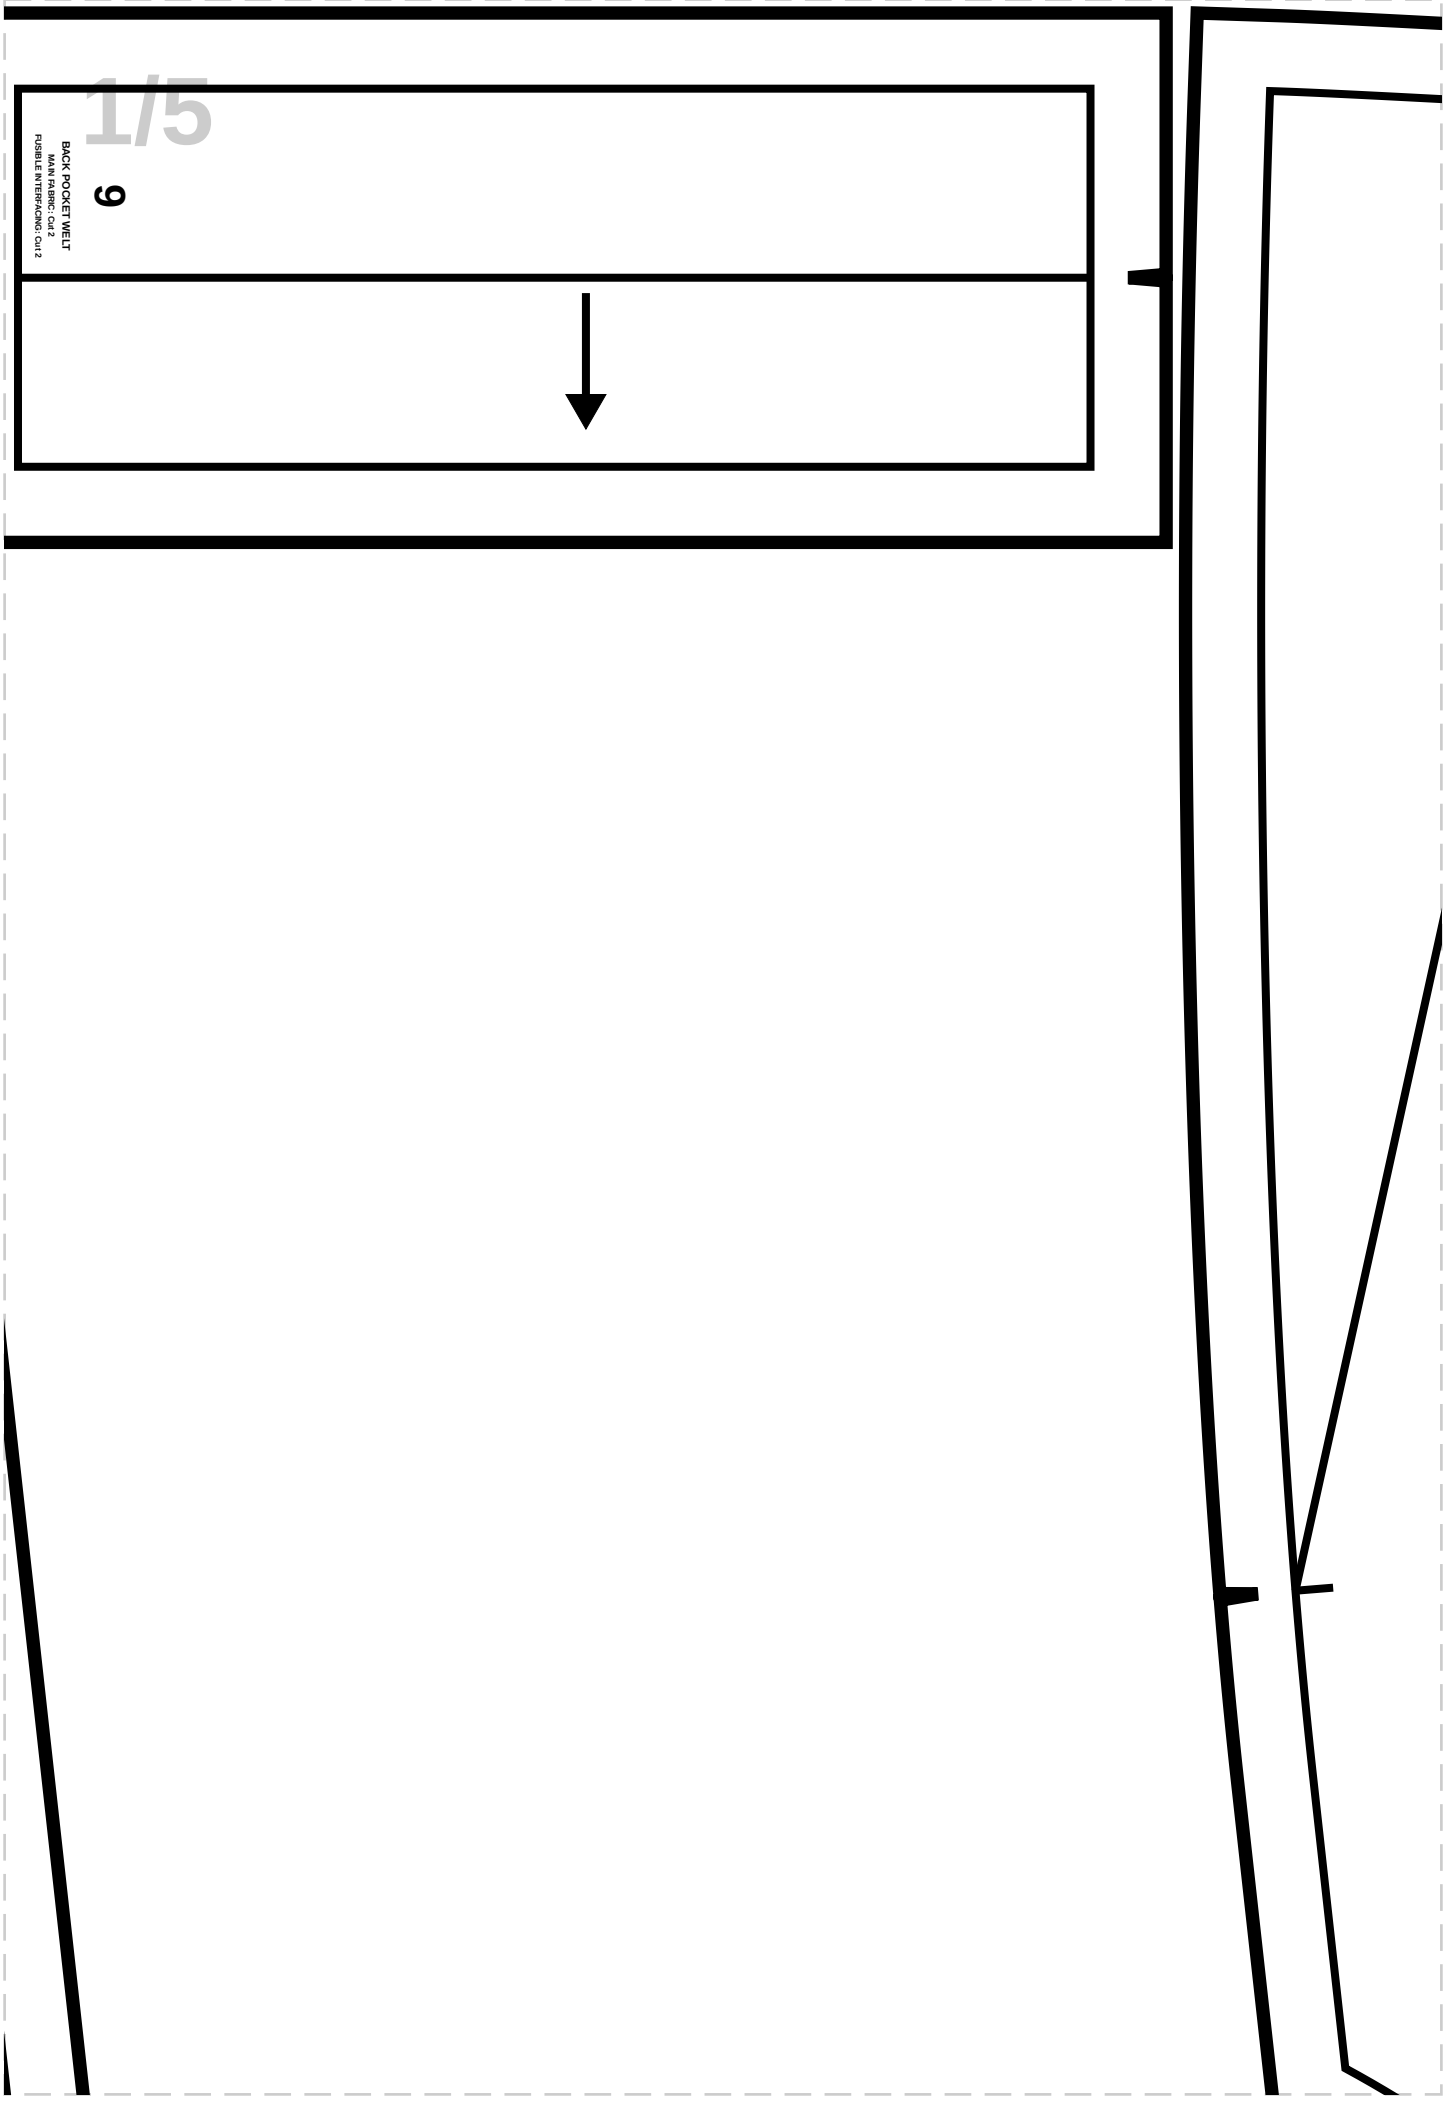

9
BACK POCKET WELT
MAIN FABRIC : Cut 2
FUSIBLE INTERFACING: Cut 2

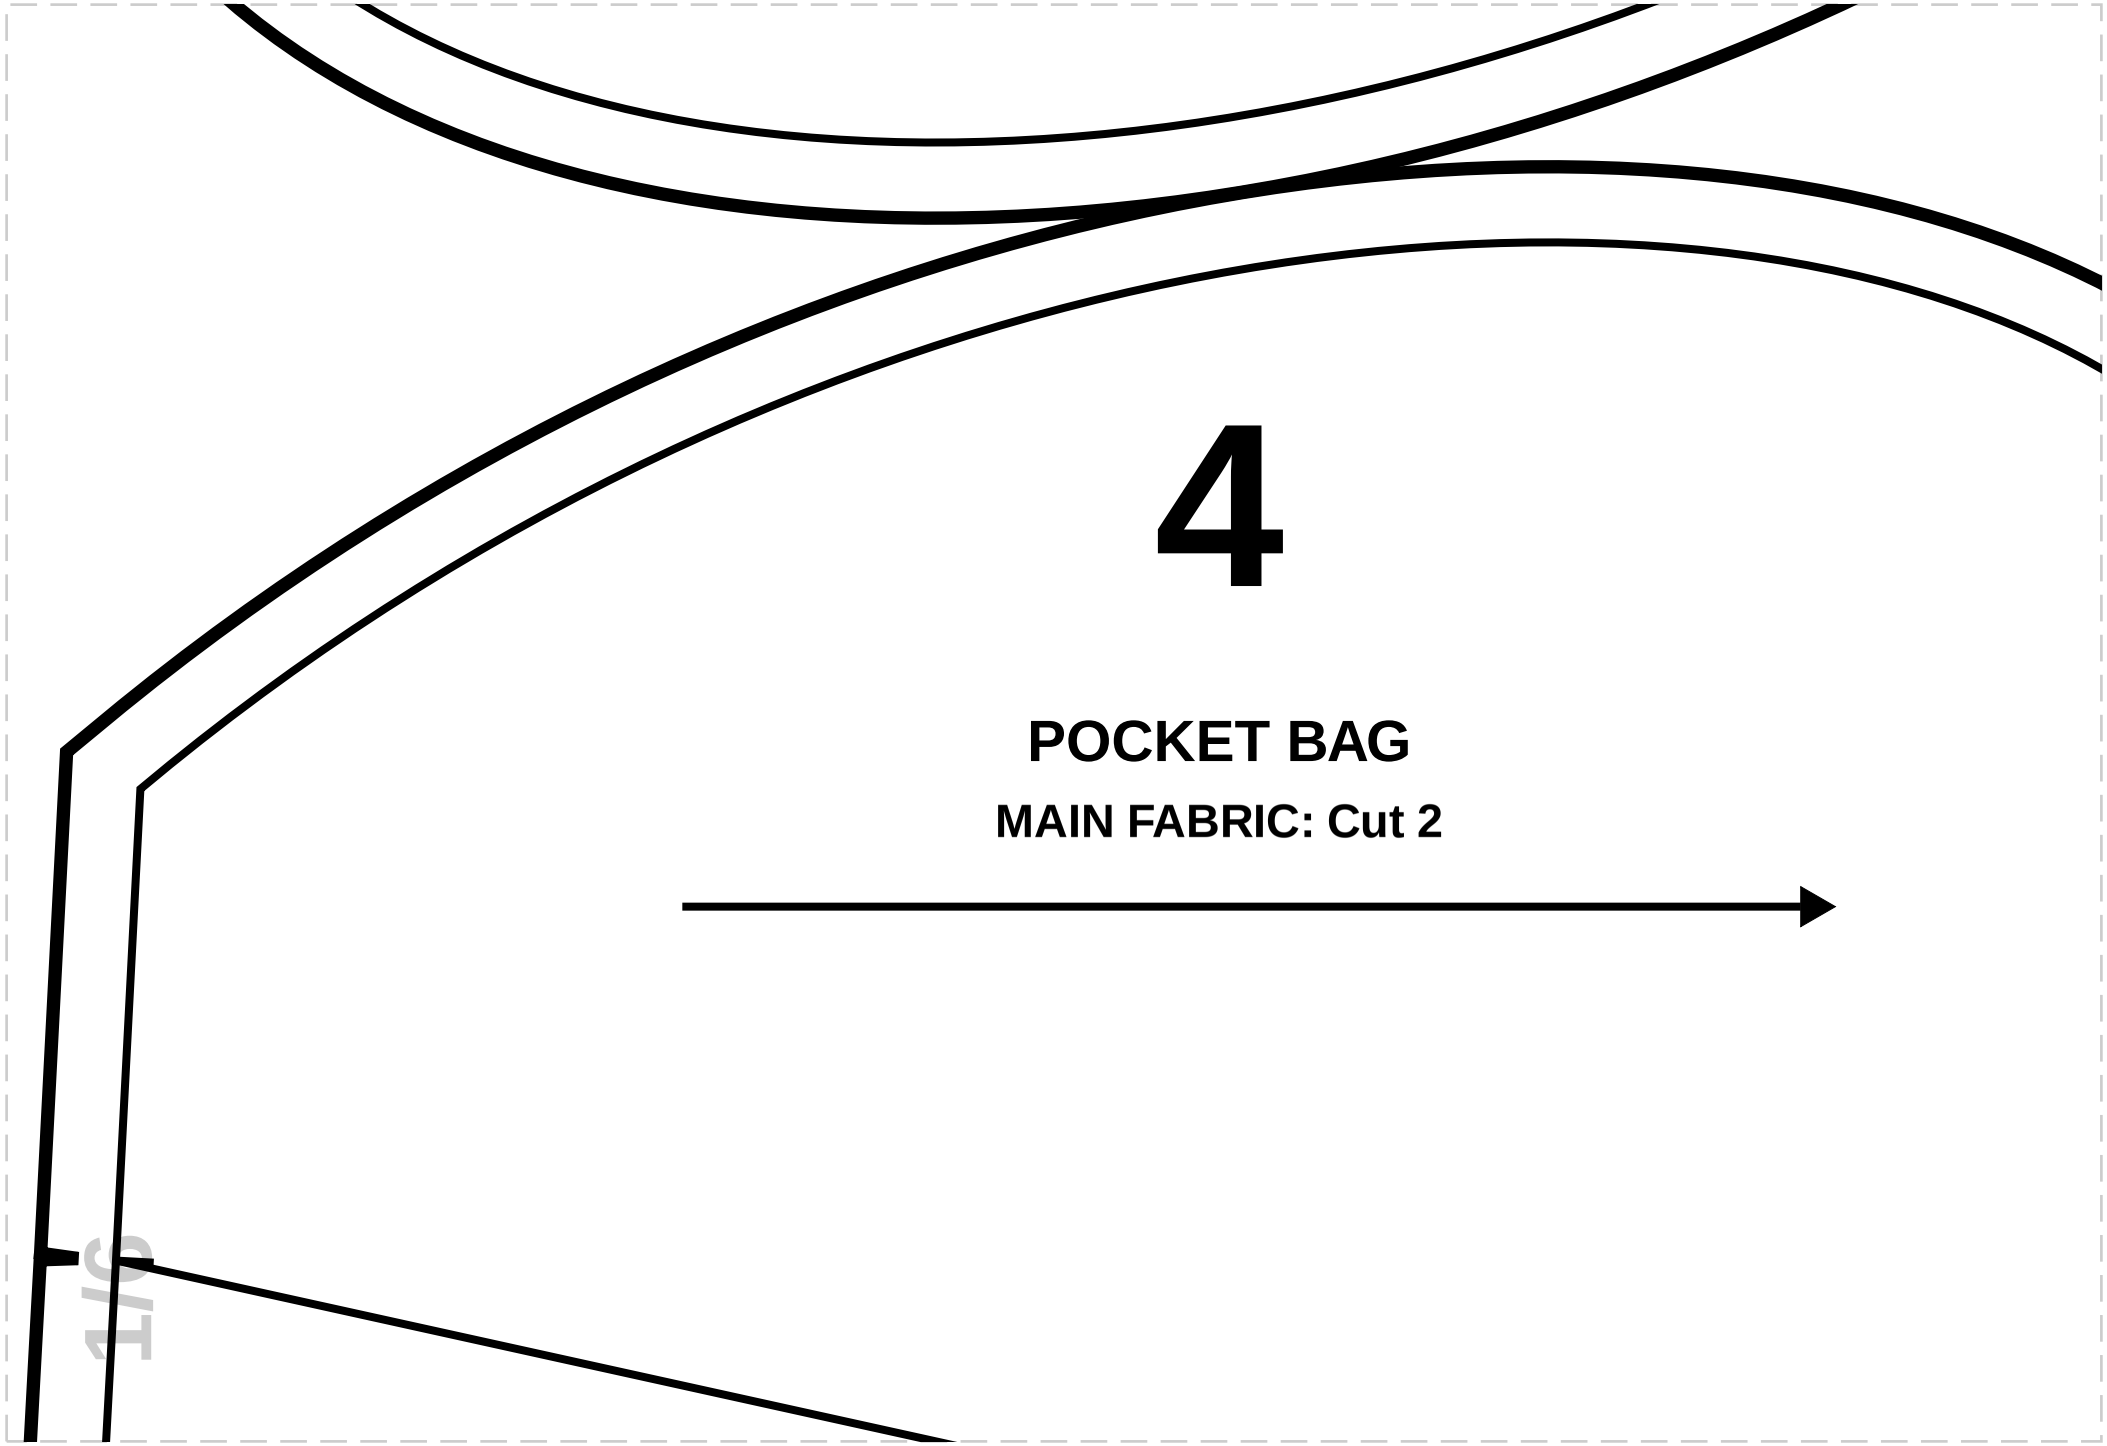

4
POCKET BAG
MAIN FABRIC: Cut 2
4/6

# 6


## POCKET LINING

### LINING: Cut 2

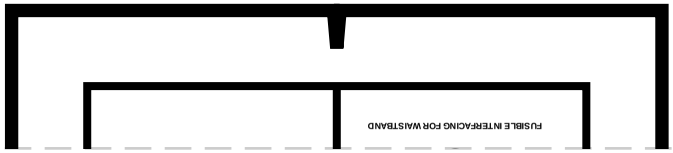


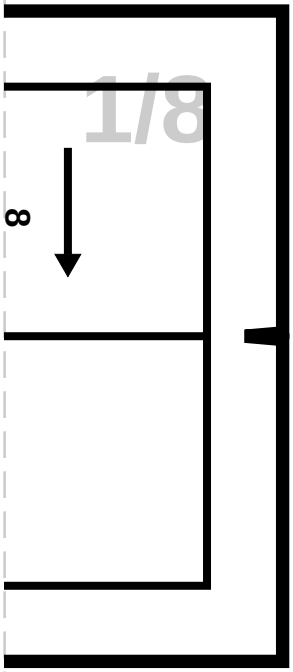

8

2

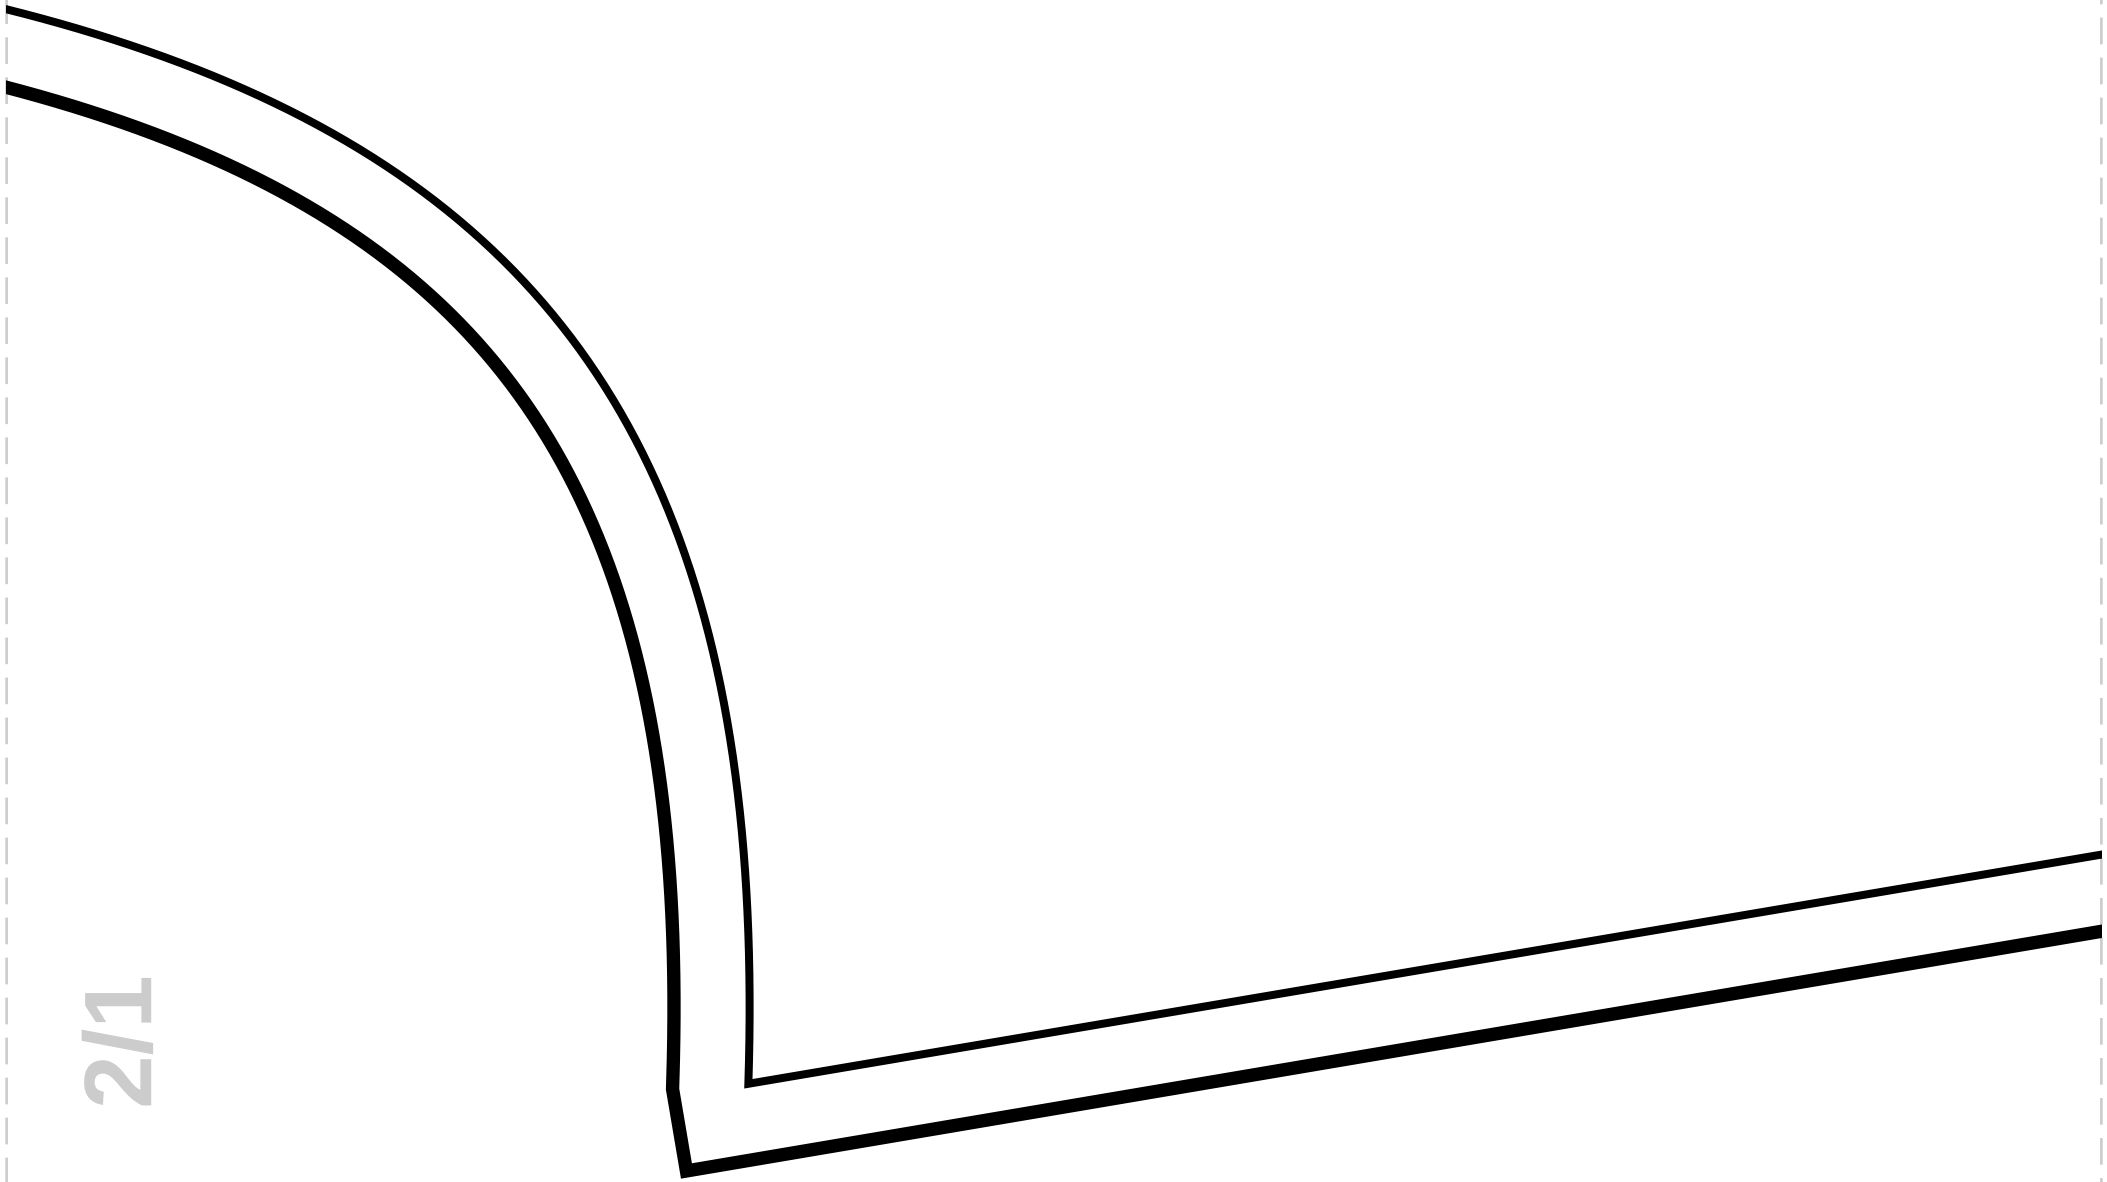


2/1

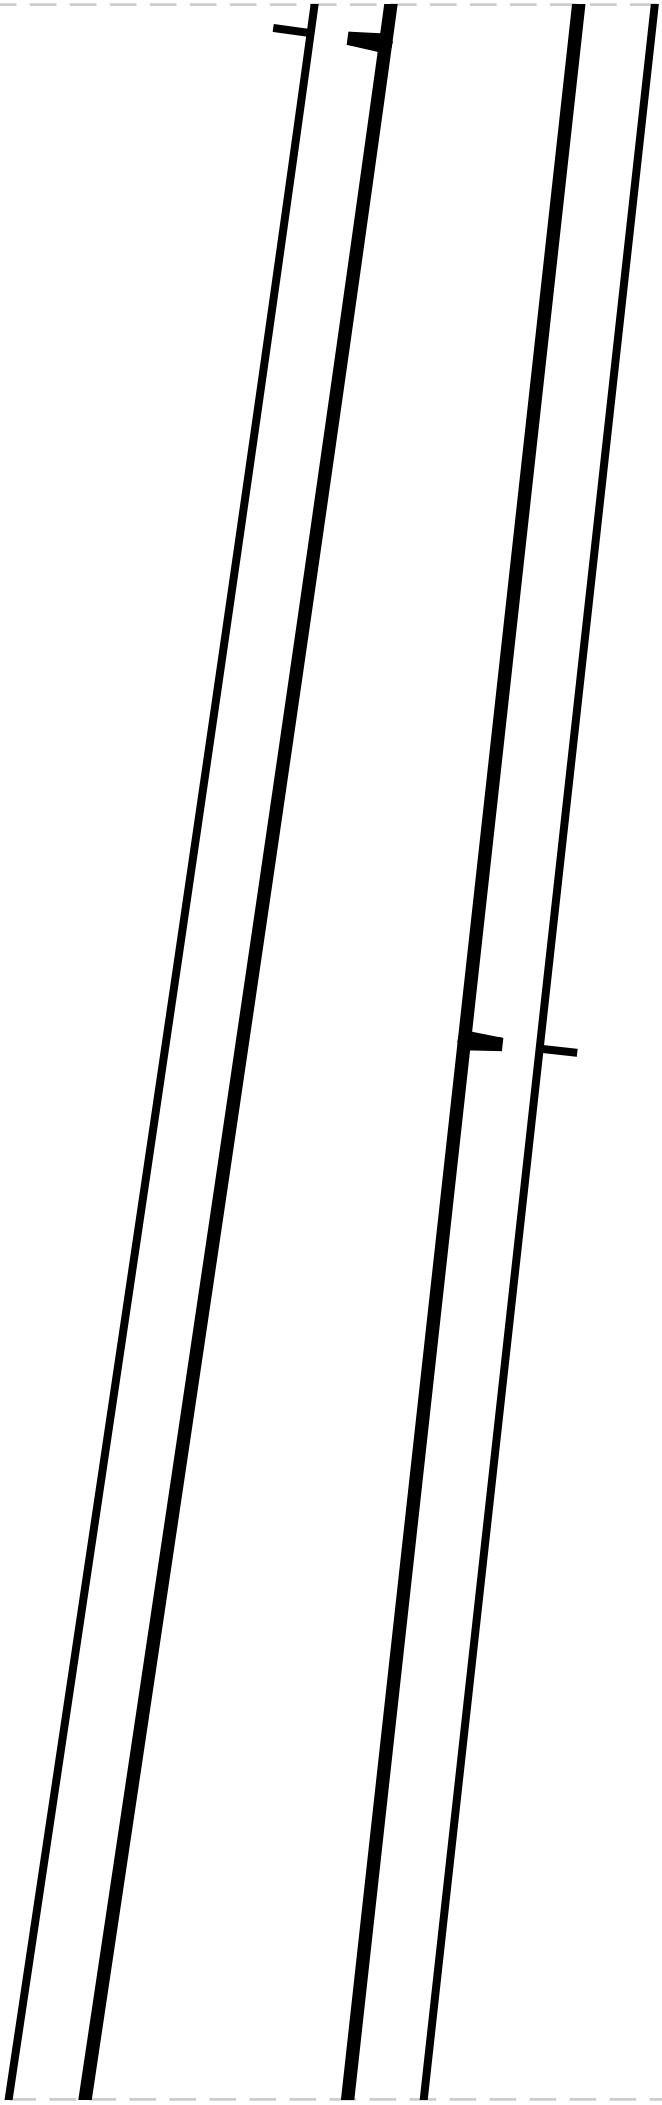

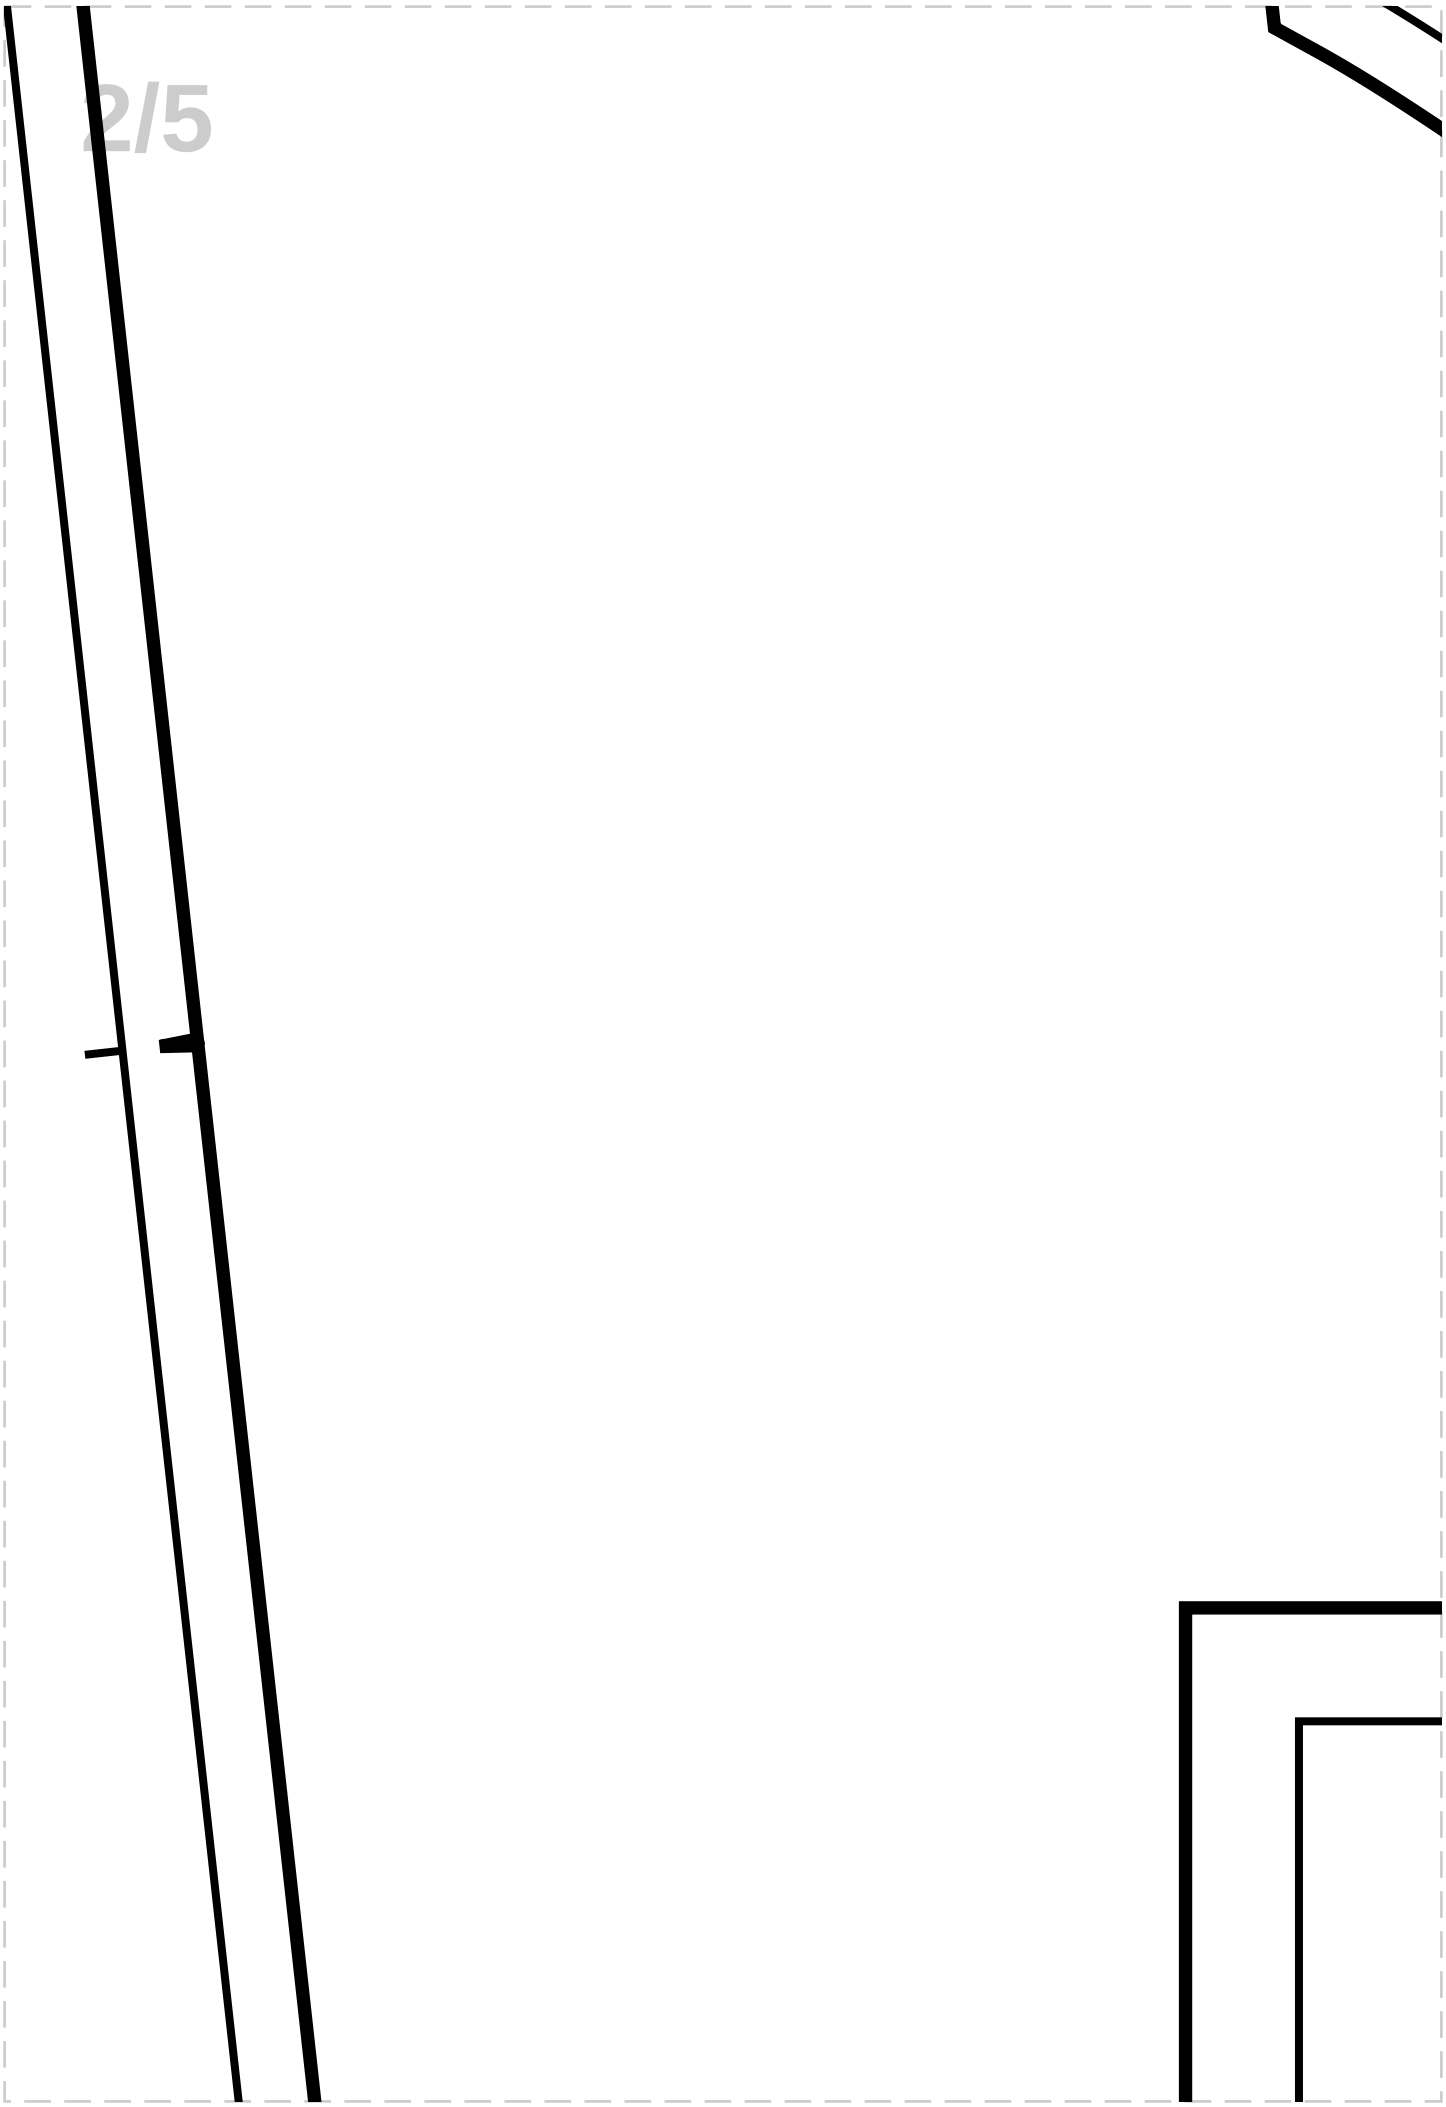


11
BACK OUTER POCKET BAG
BACK INNE
LIN


LINING: Cut 2

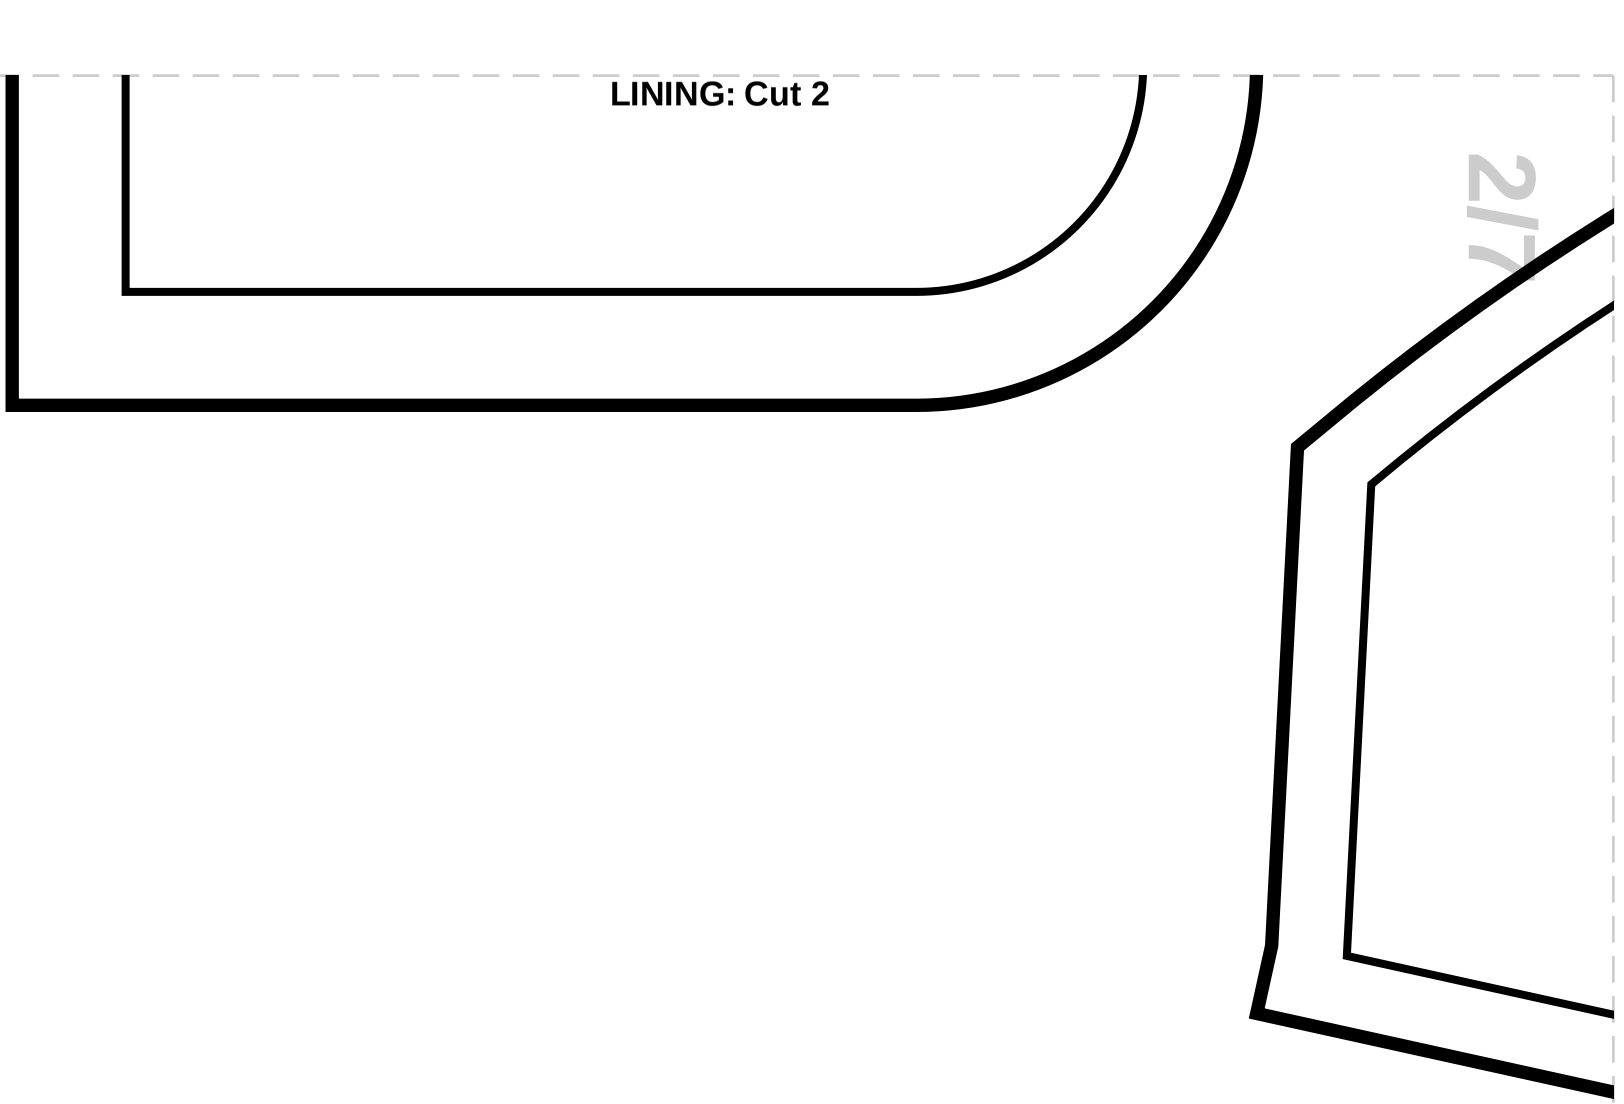



3/1

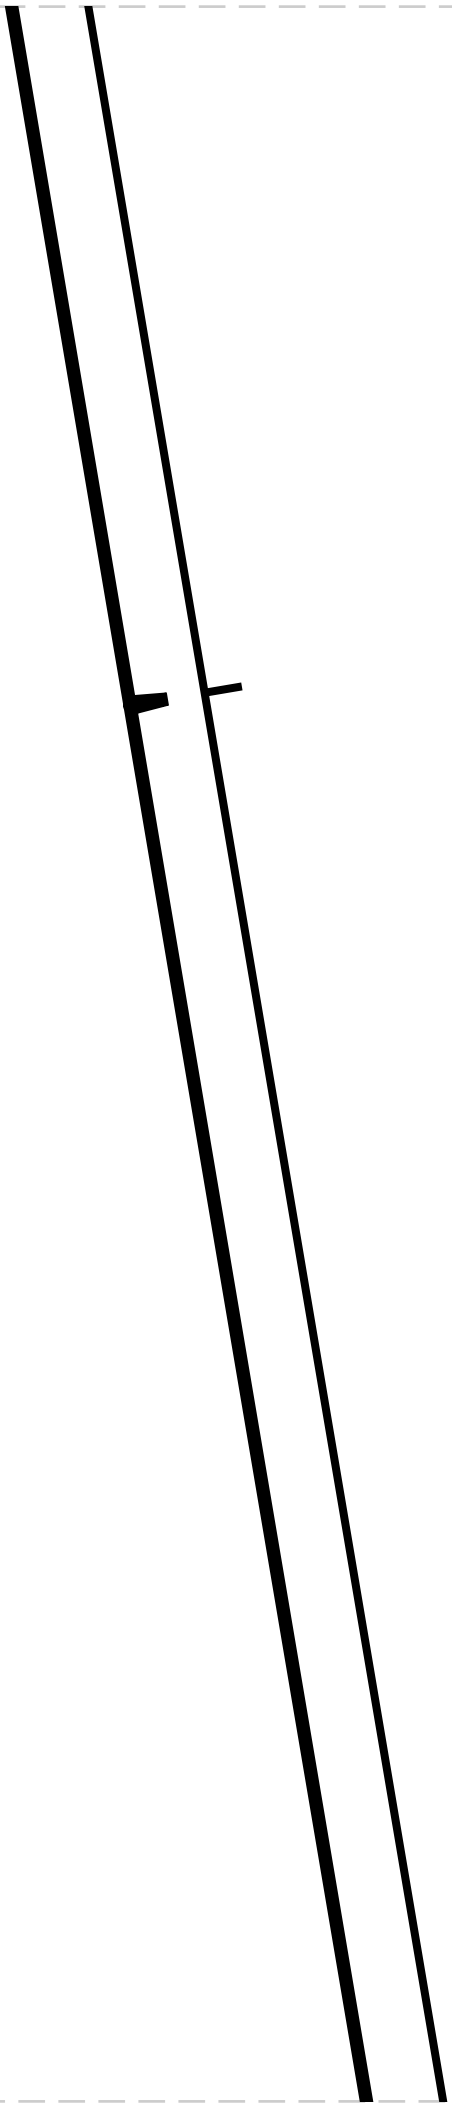


3/2

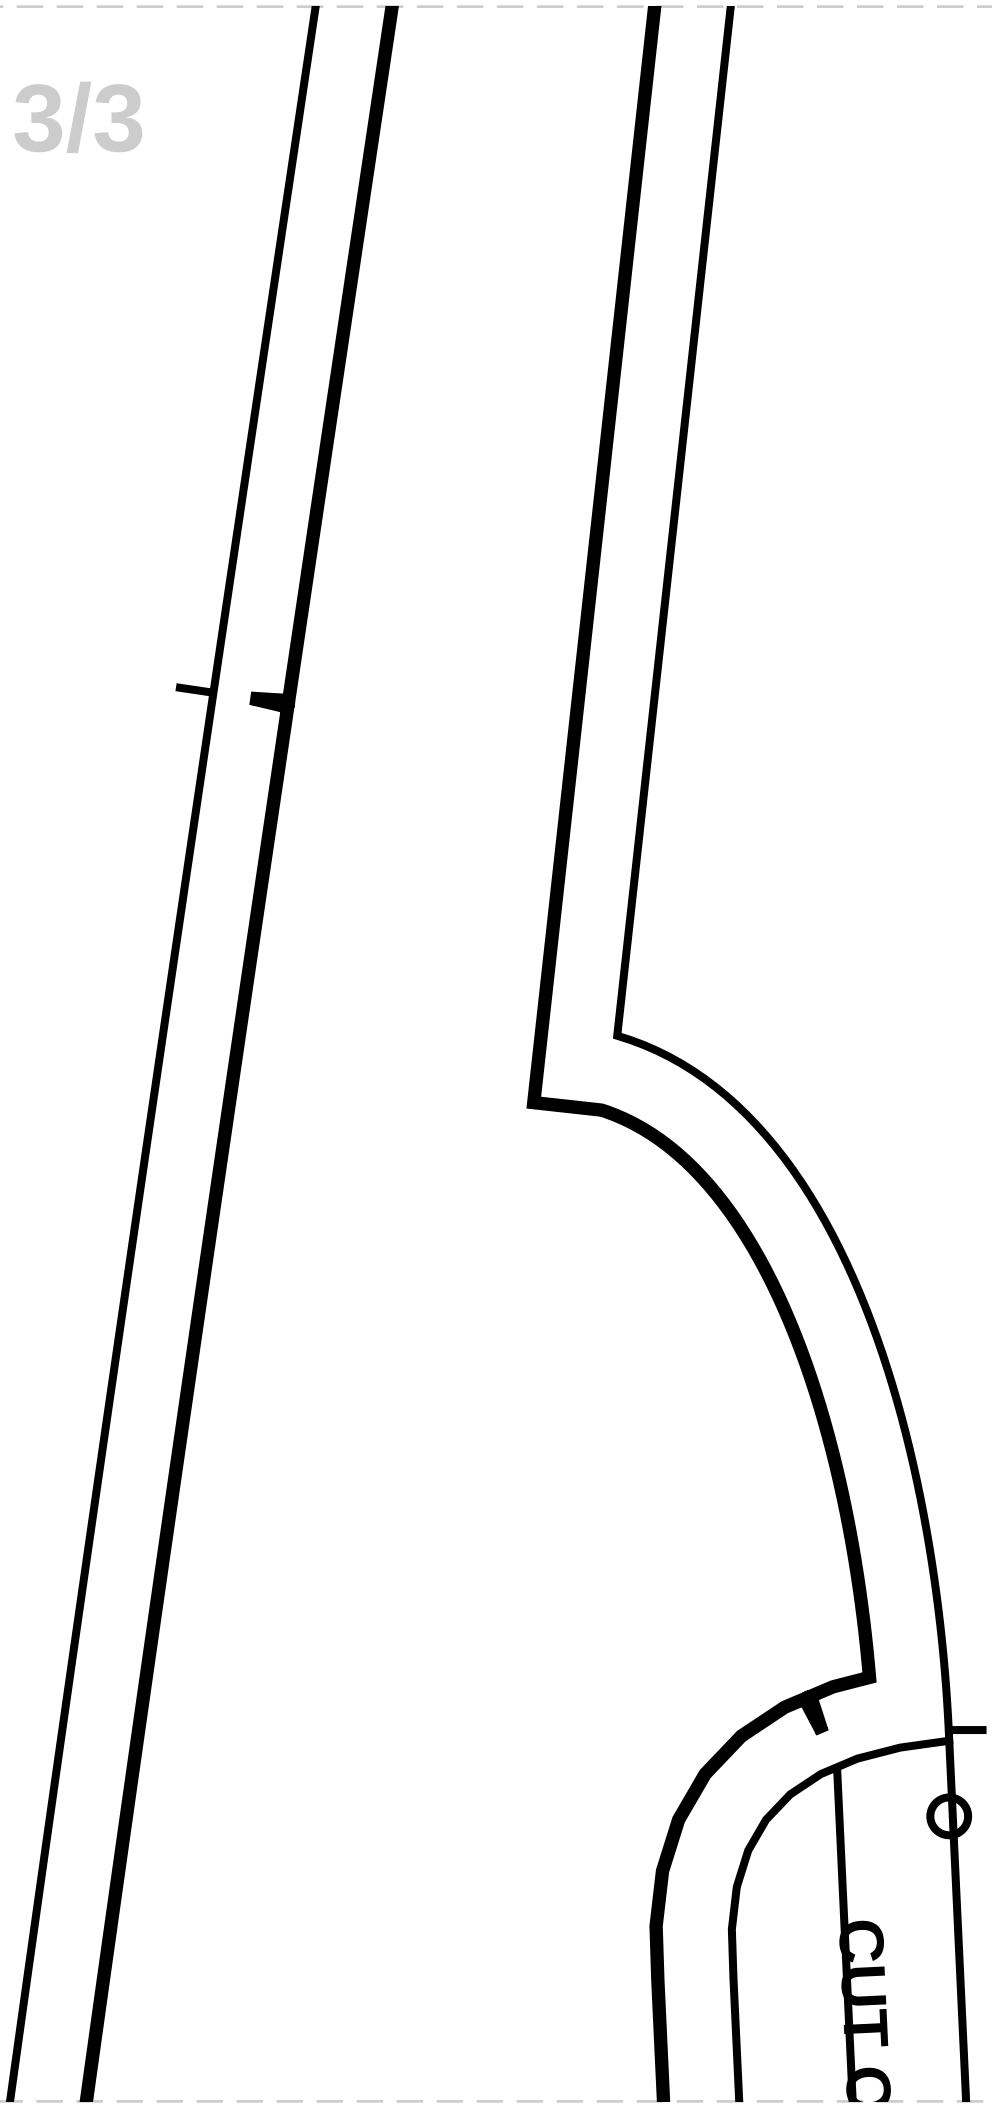
CUT

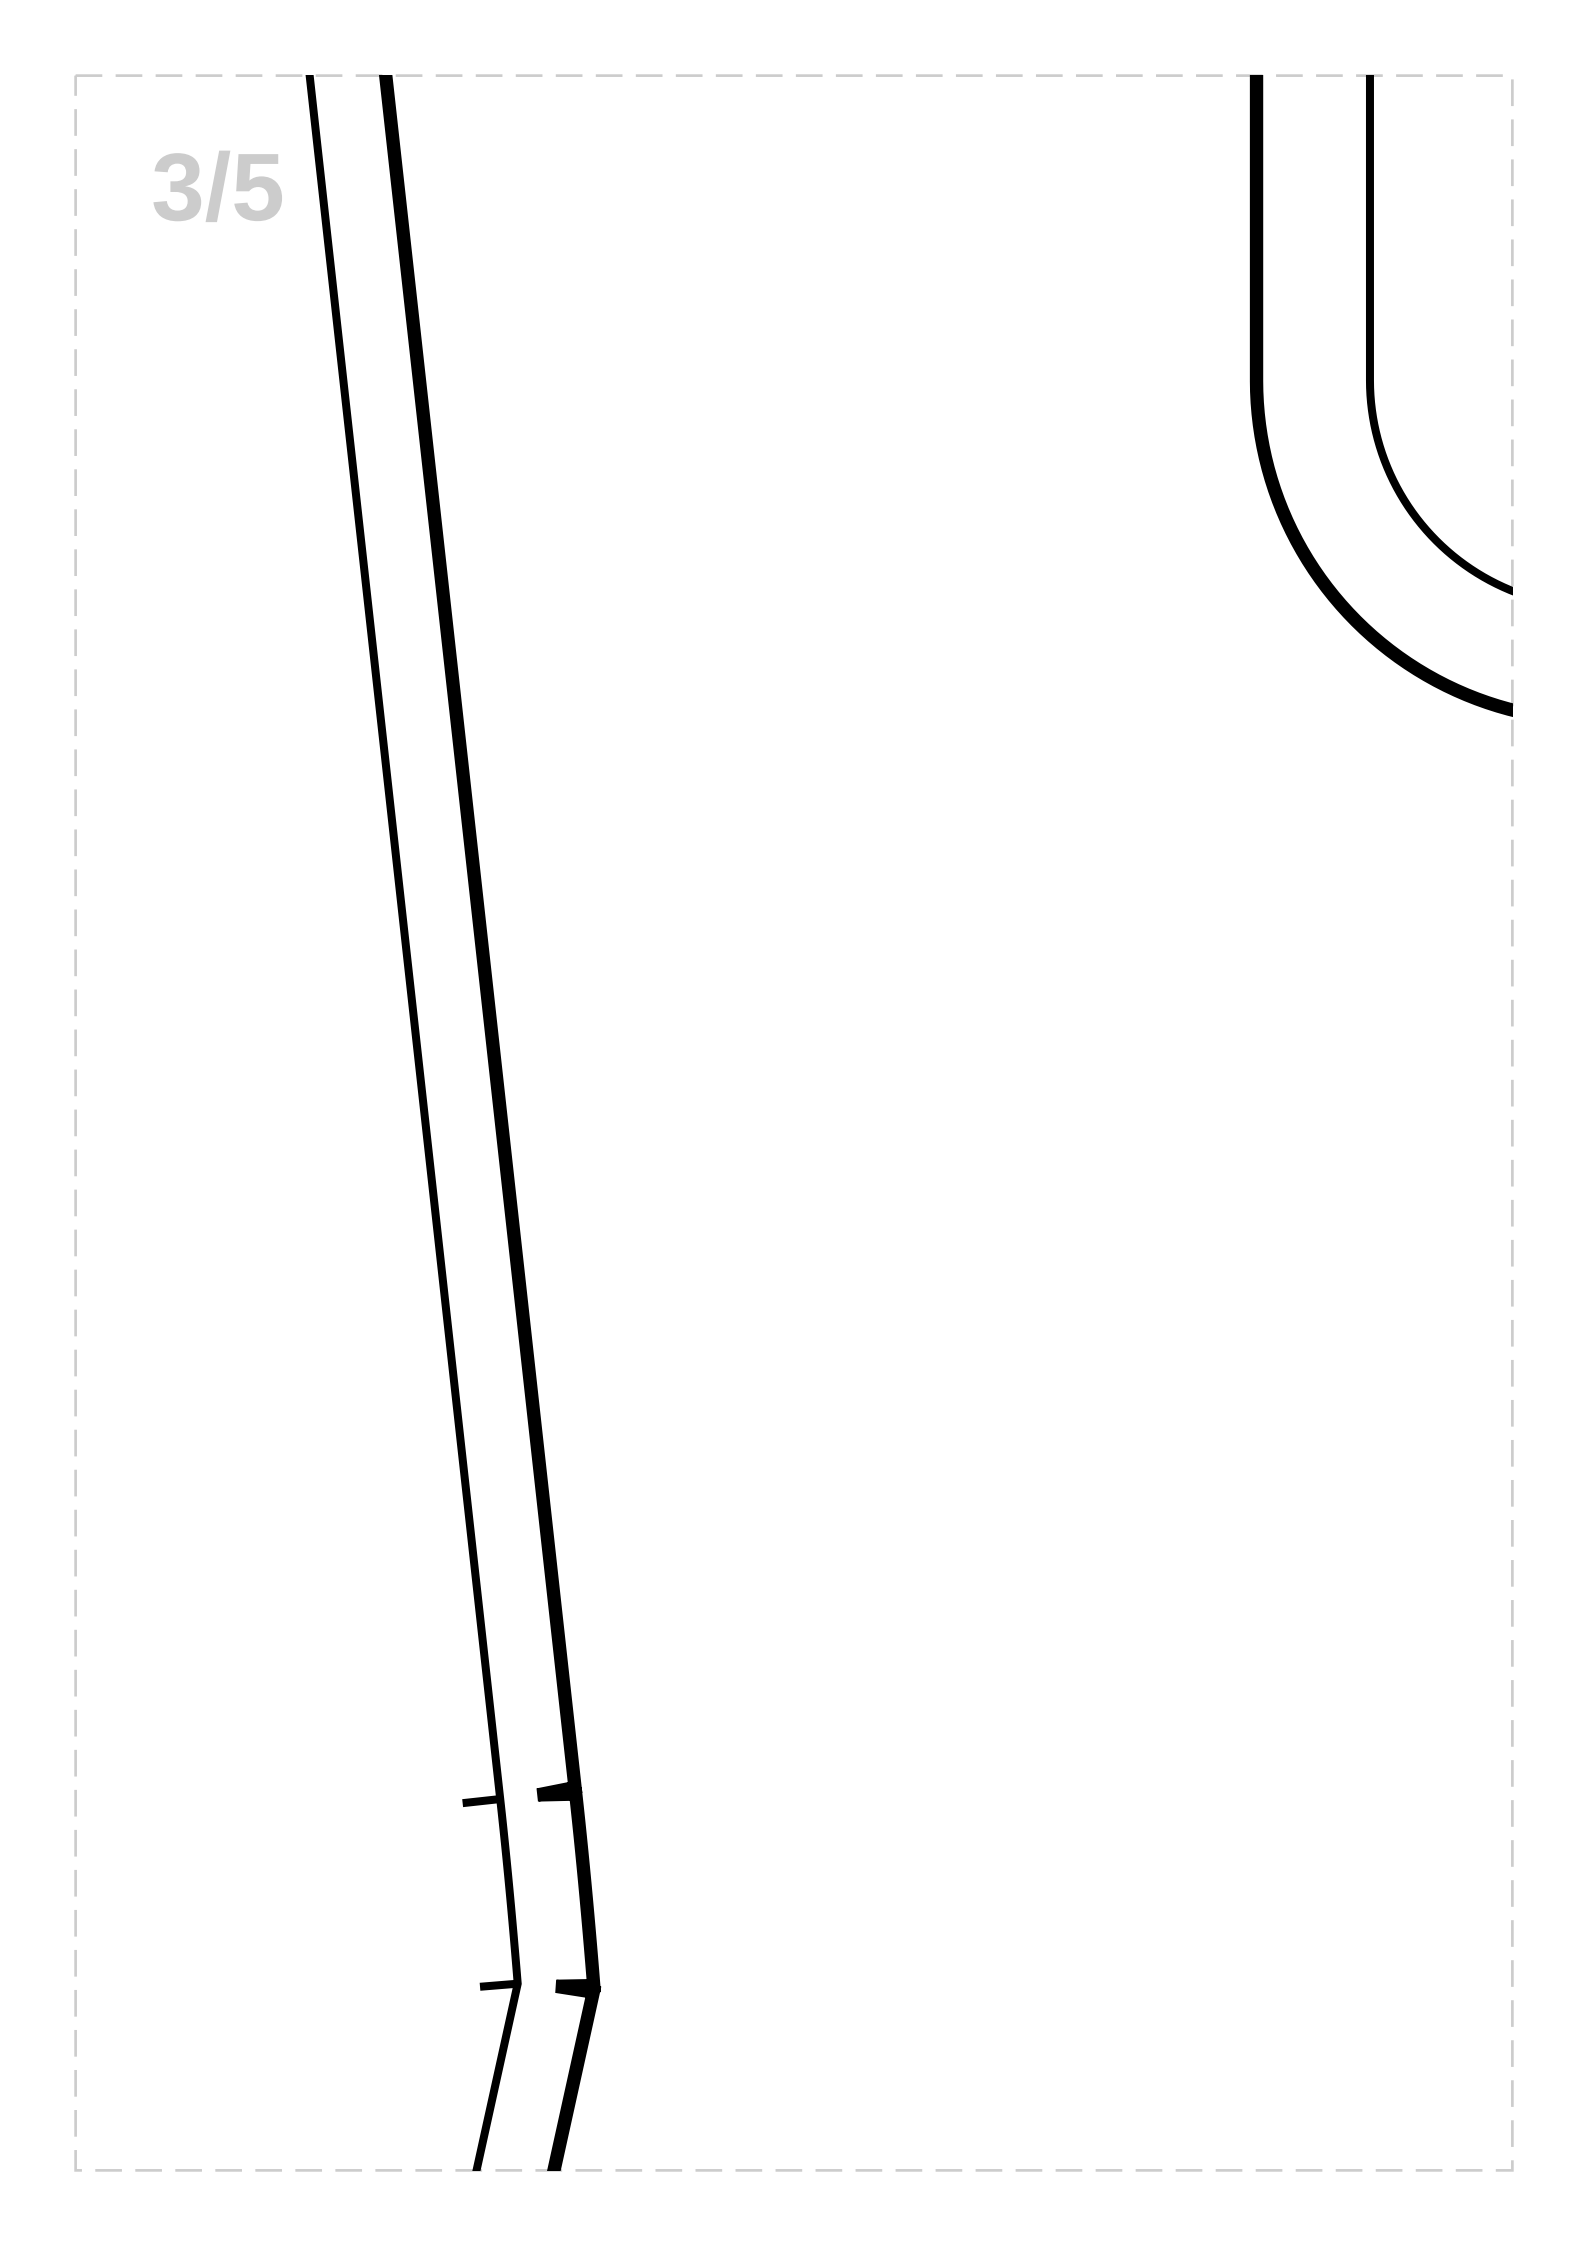


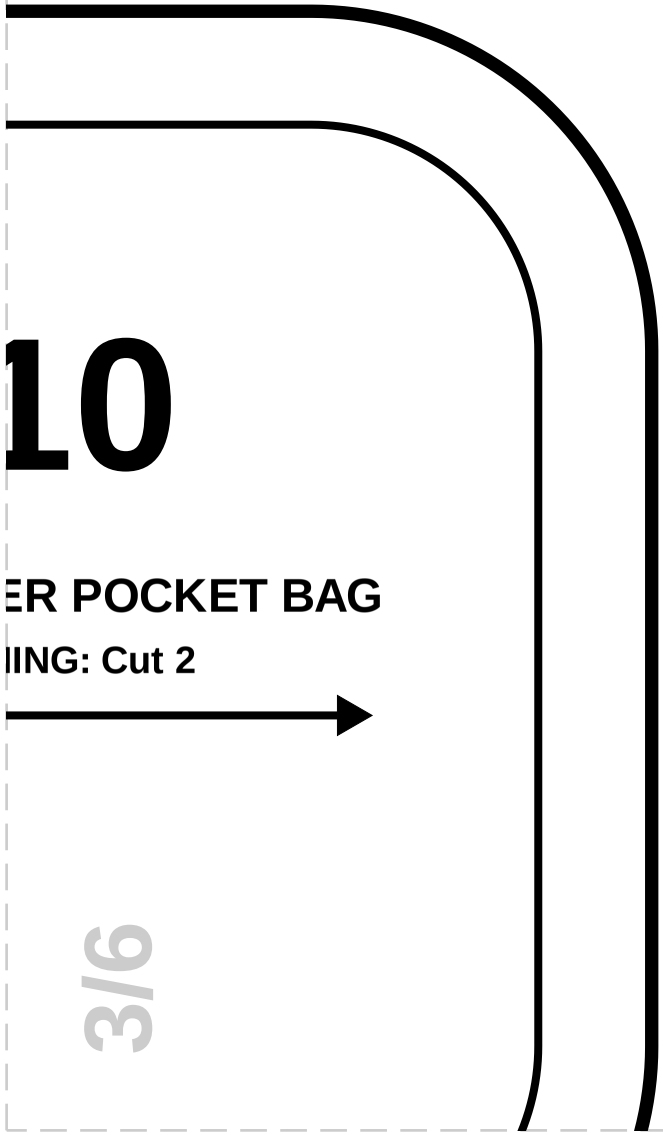

10
ER POCKET BAG
IING: Cut 2

4/1

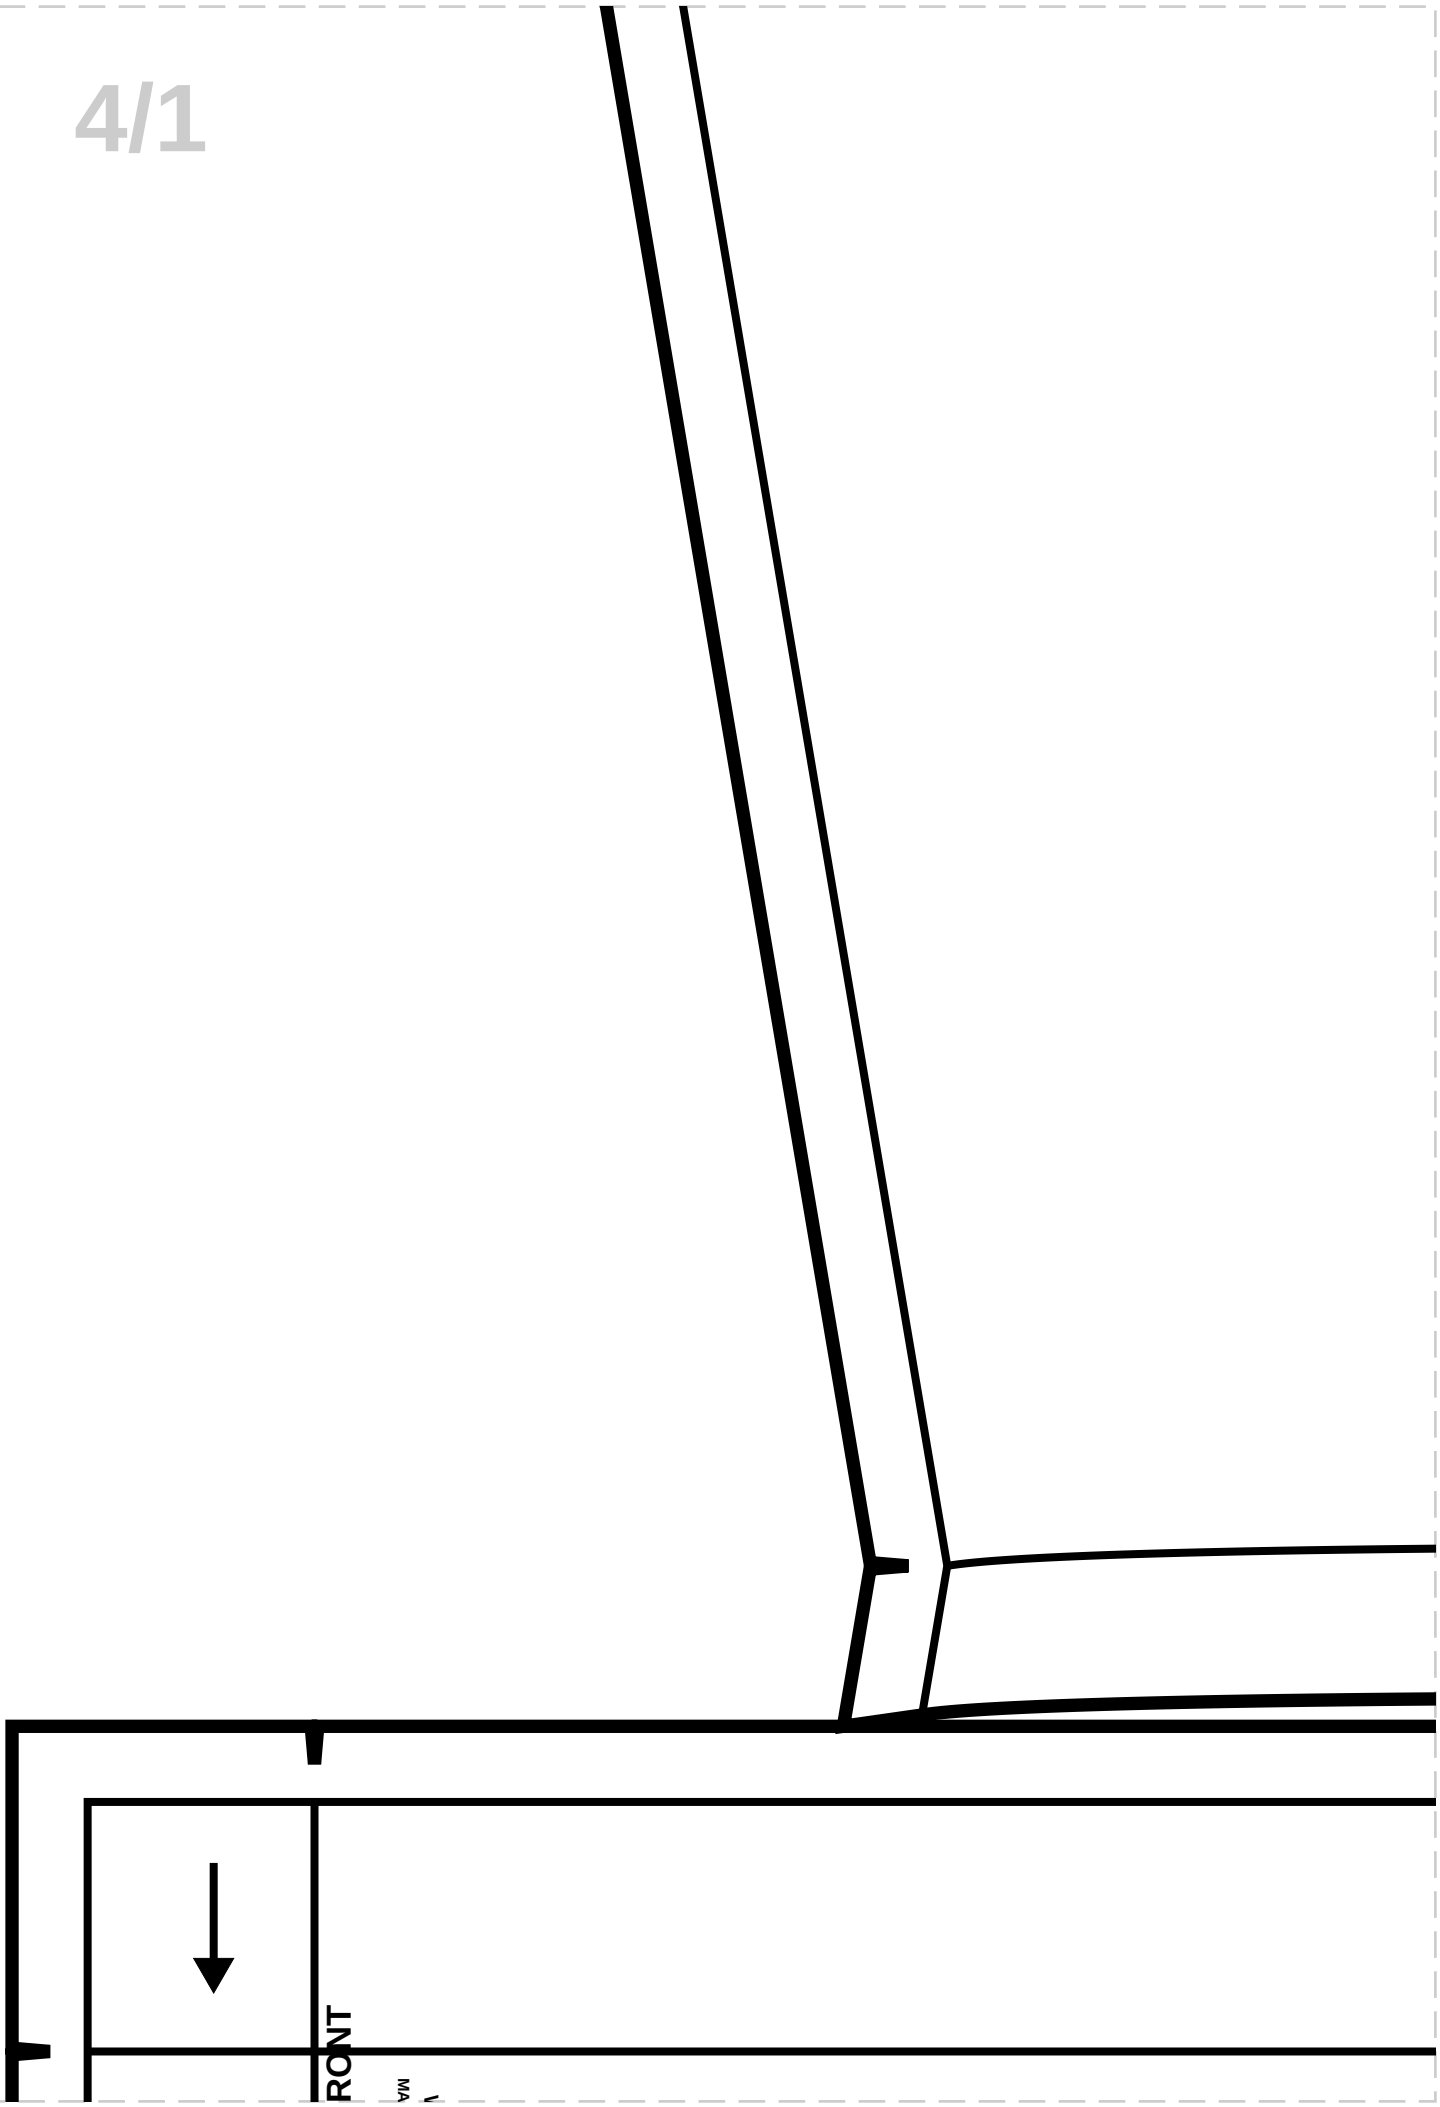



4/2

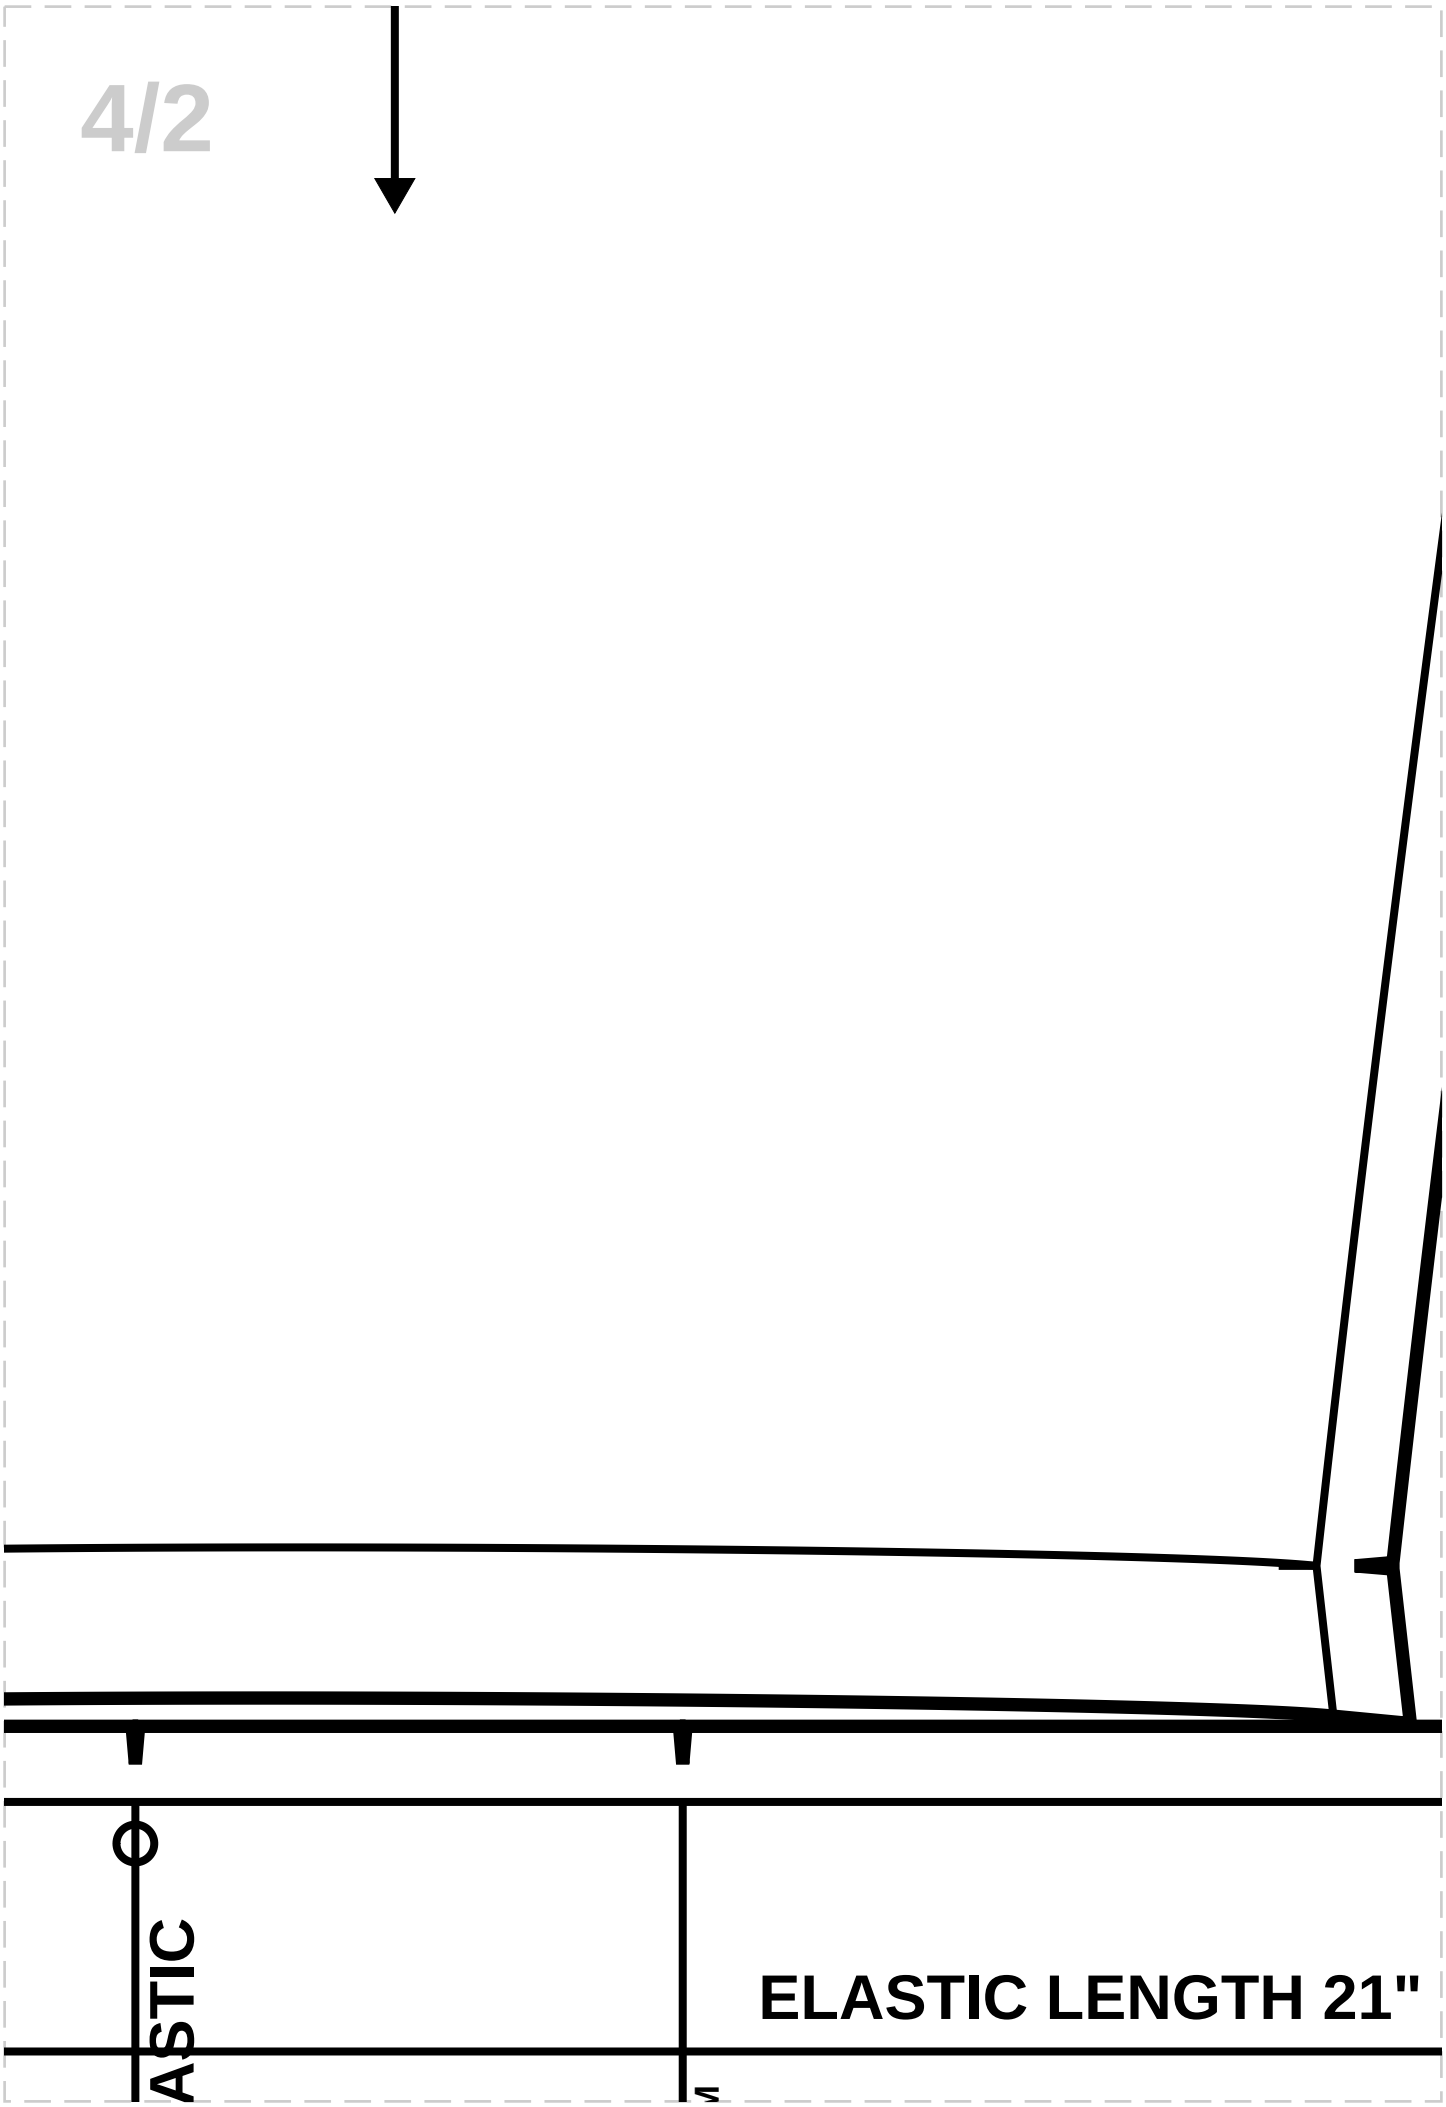


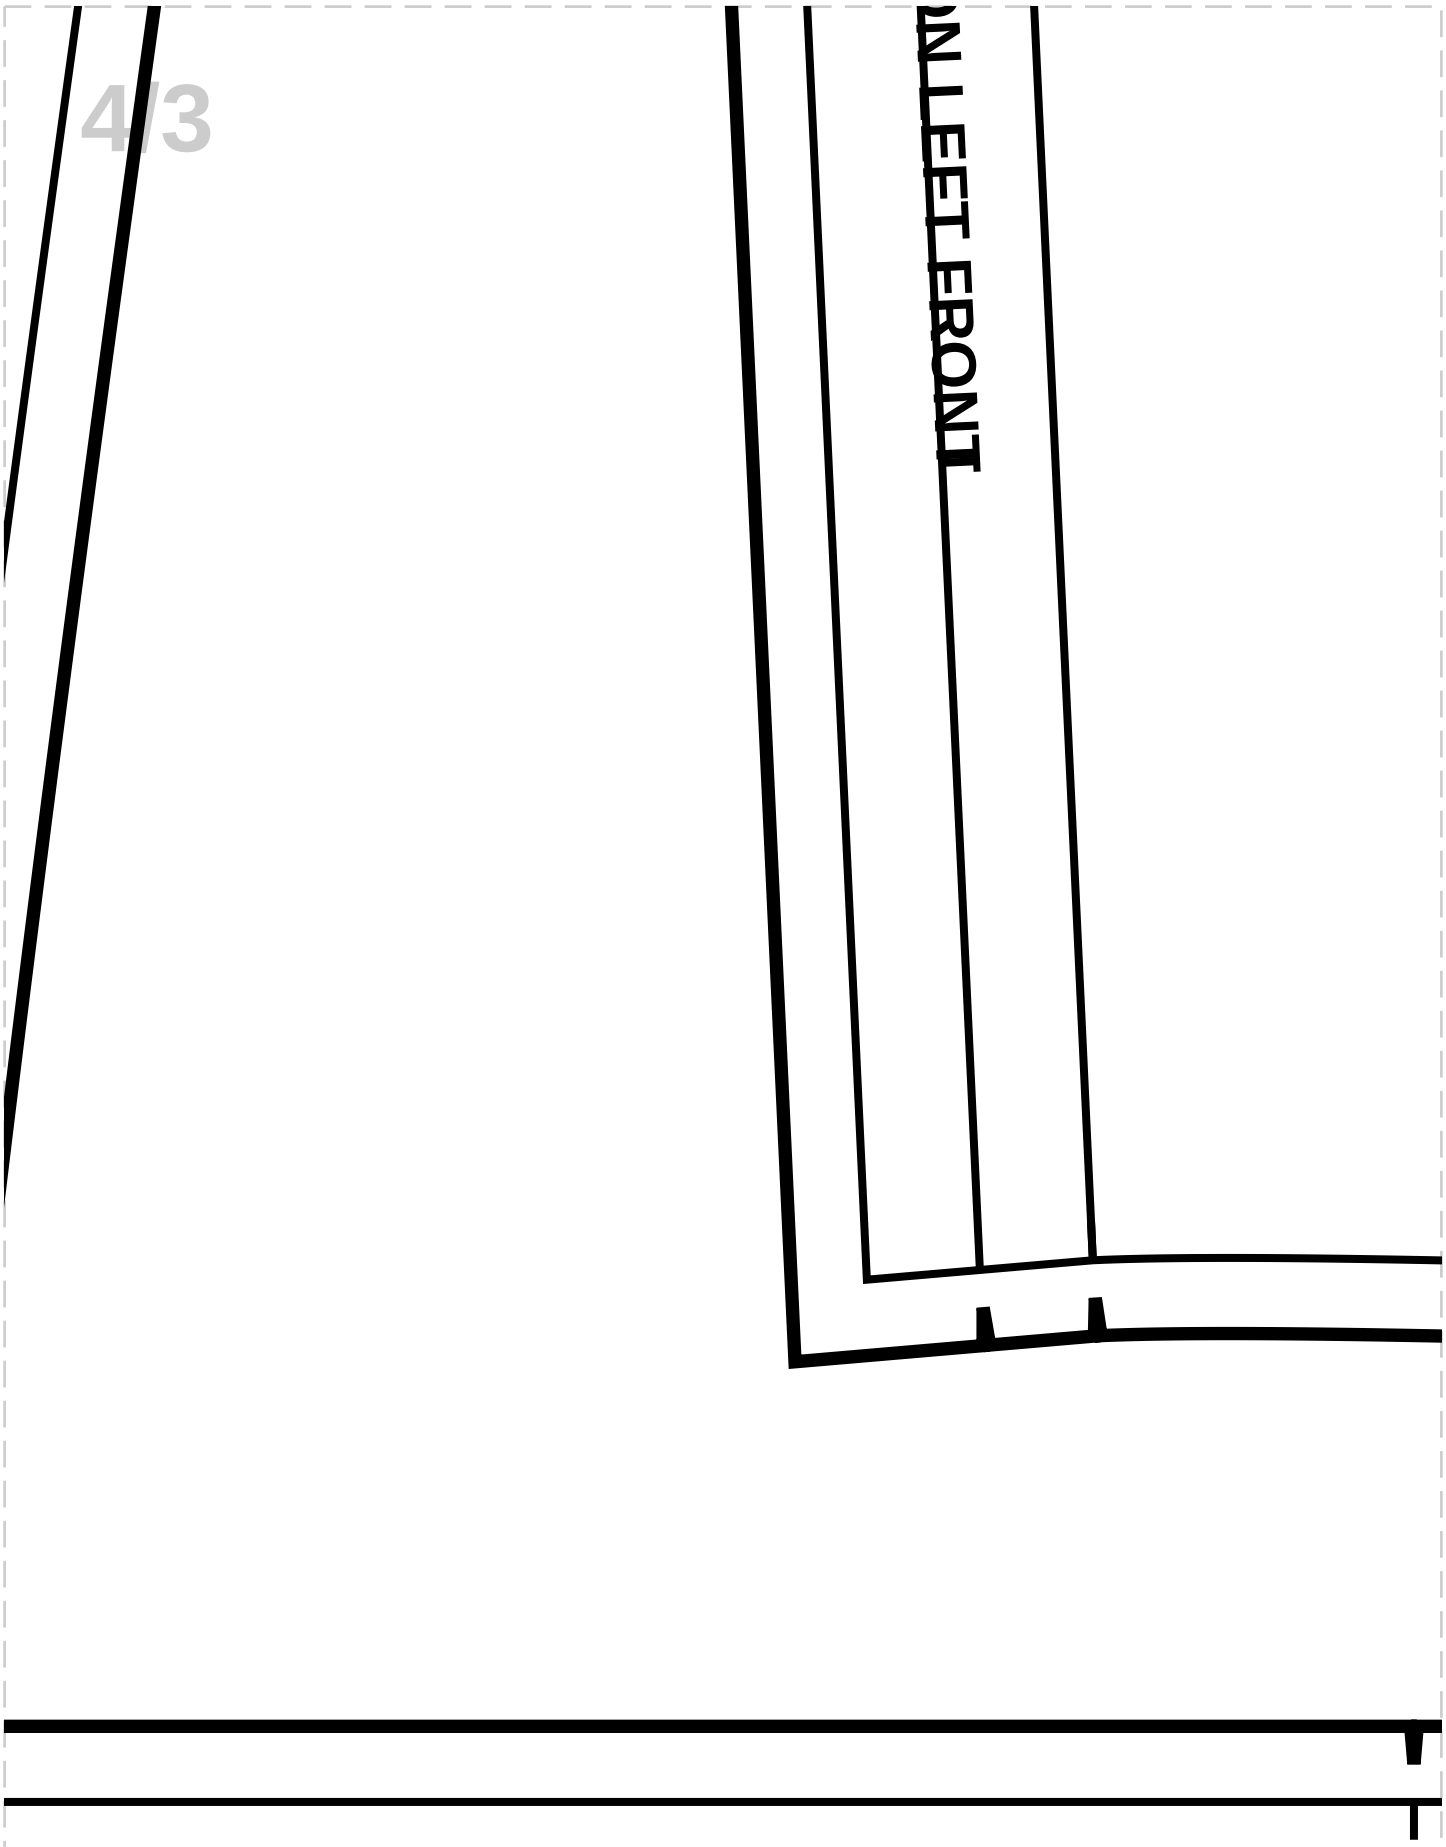



(53.24) cm

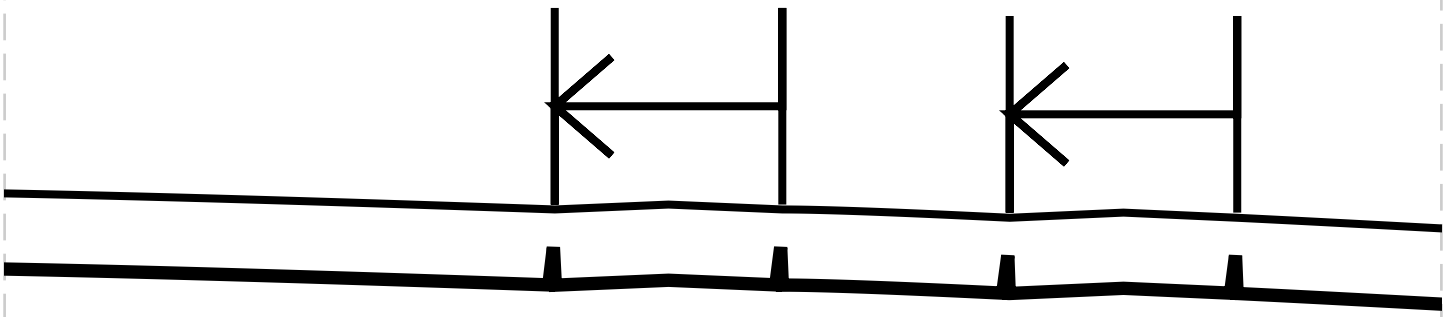

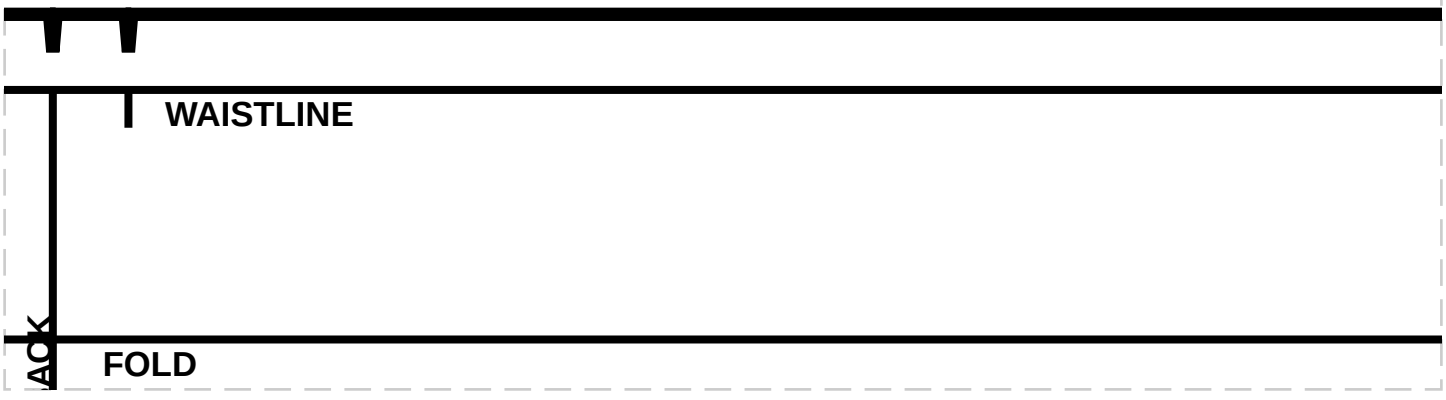
WAISTLINE
BACK
FOLD

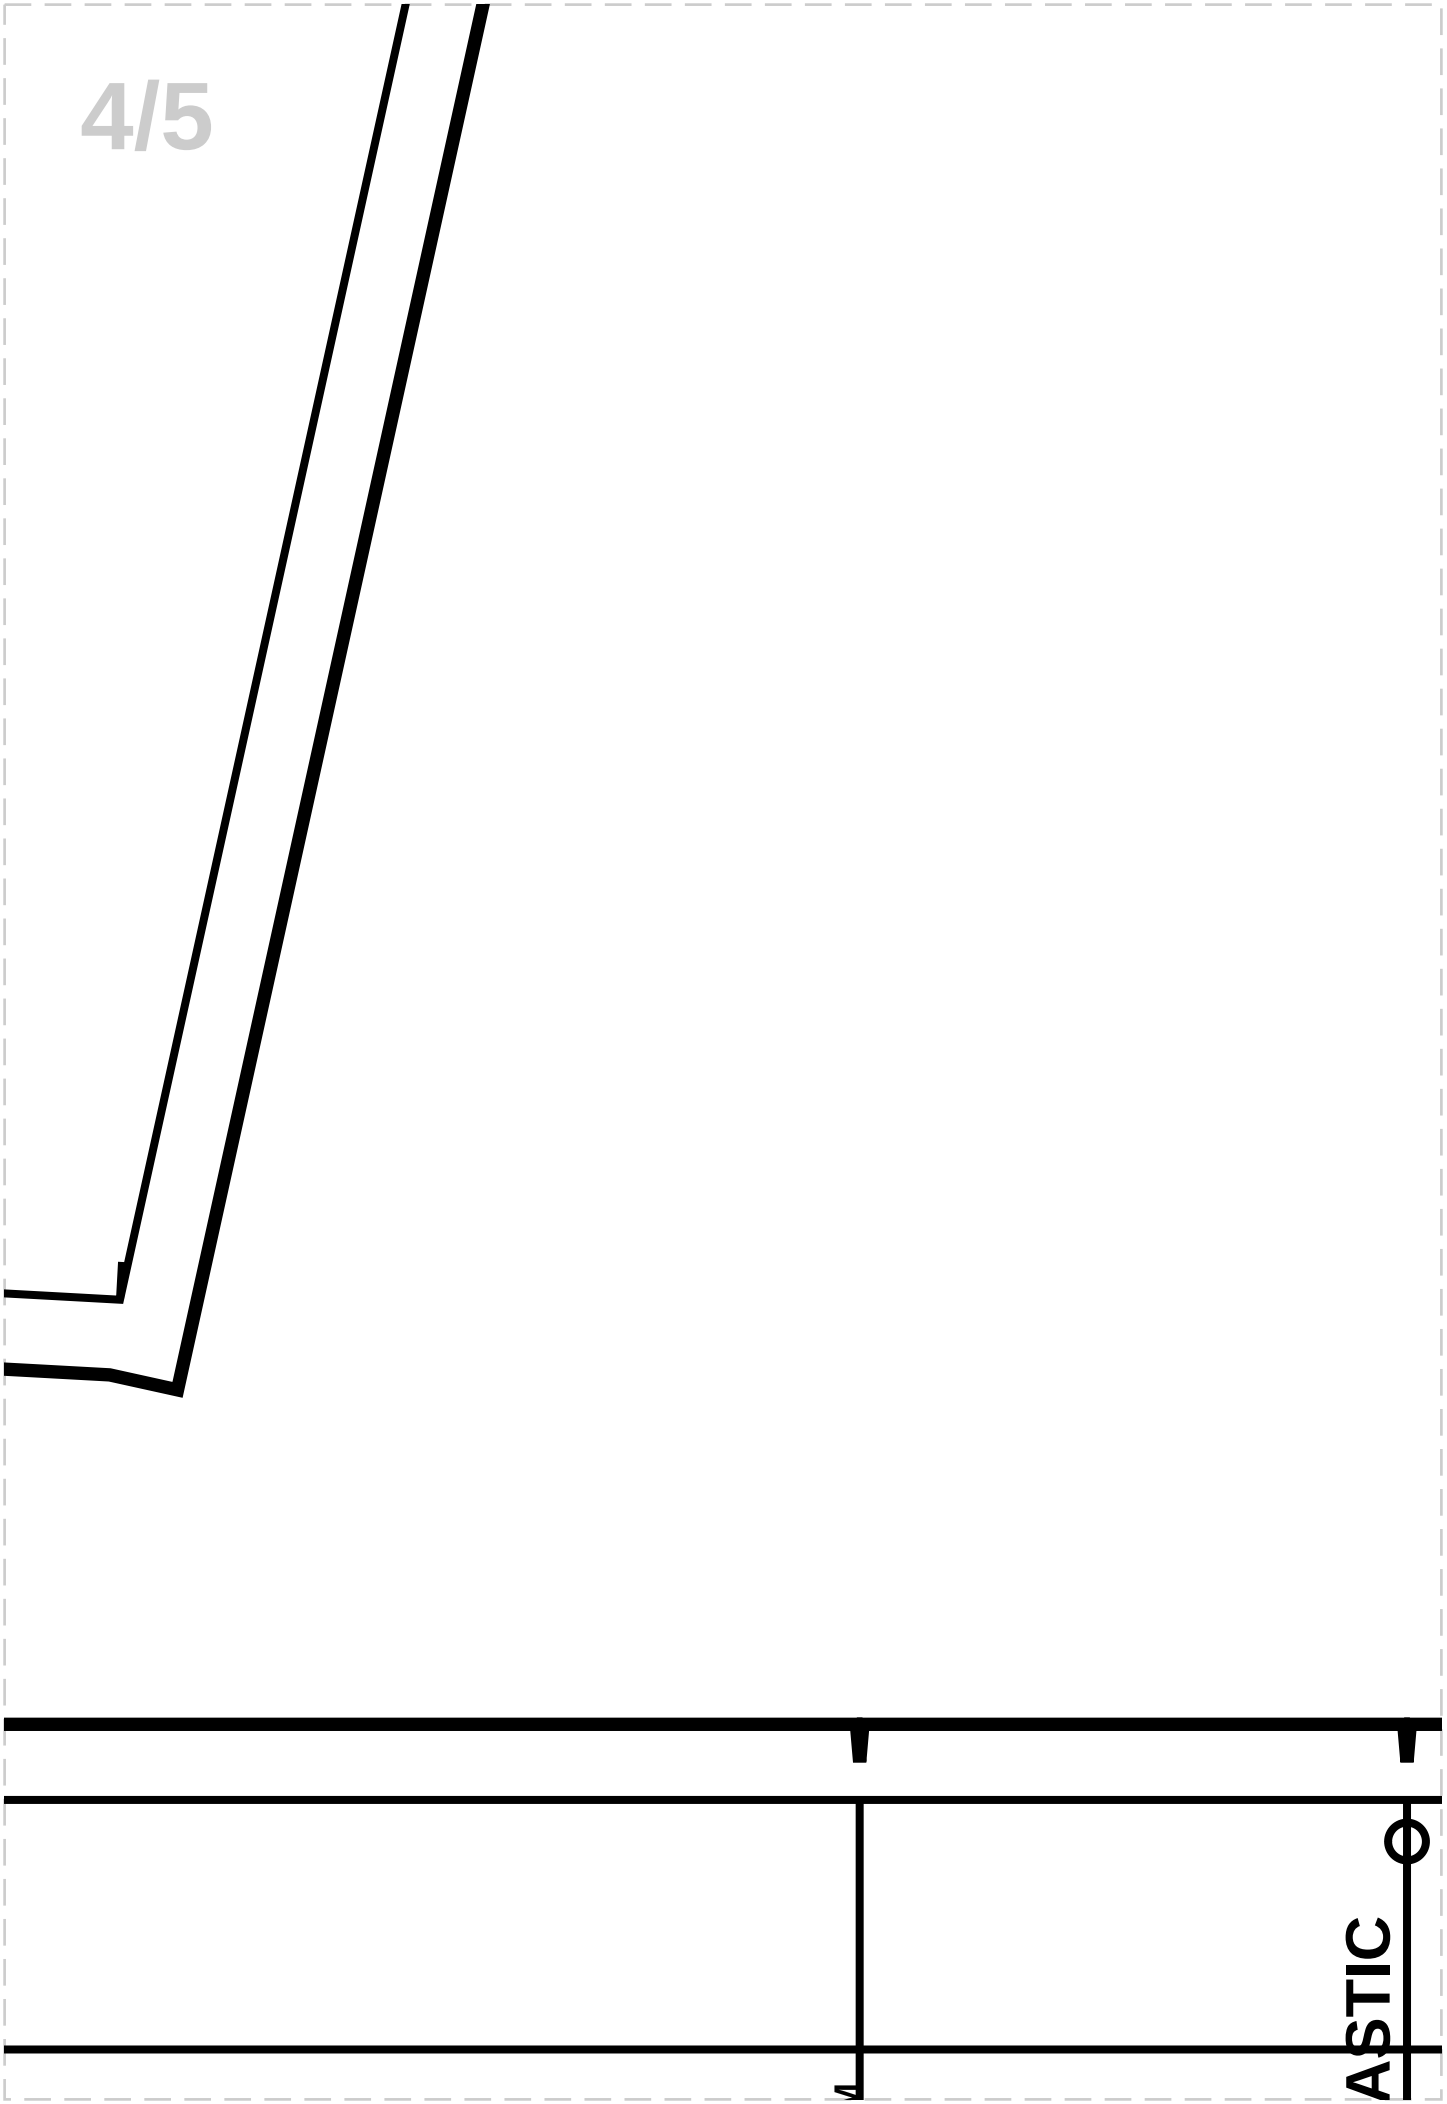
ASTIC

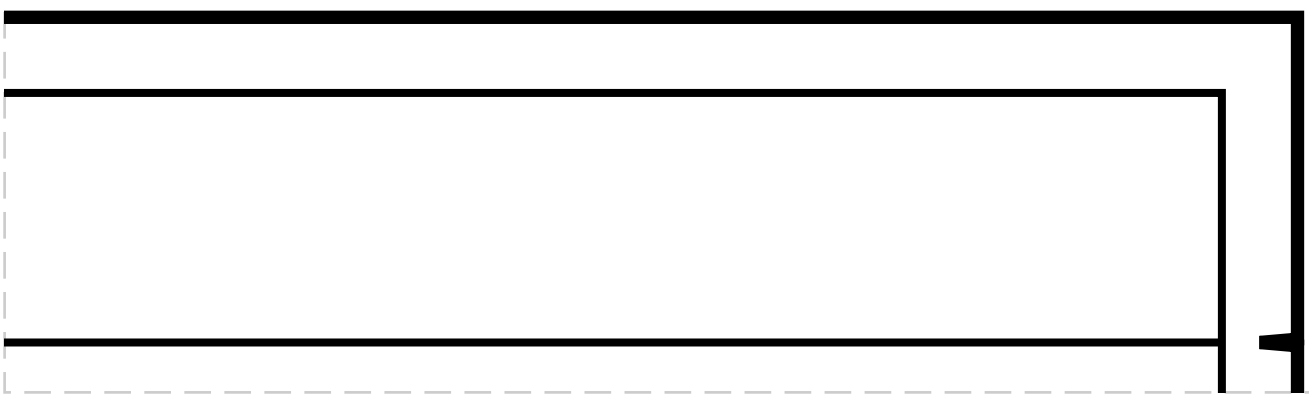


5/1

CENTER F


3

WAISTBAND

IN FABRIC: Cut 1

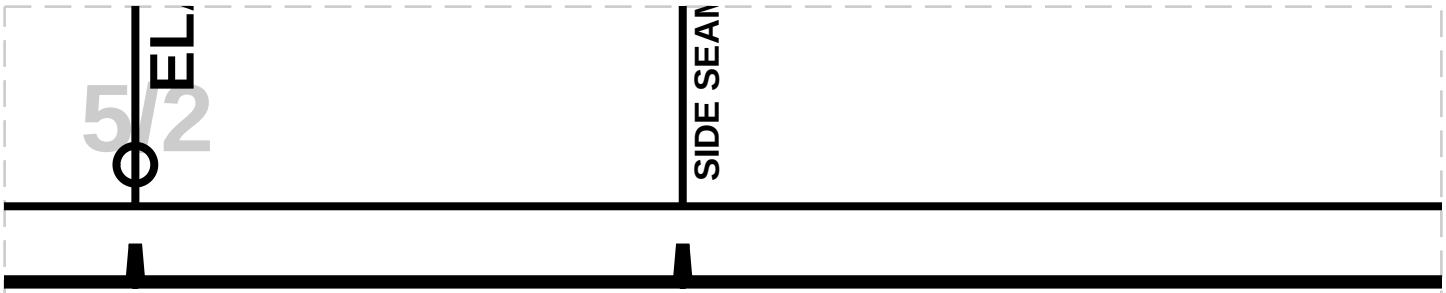
EL
SIDE SEA


CENTER B
5/4
WAISTLINE

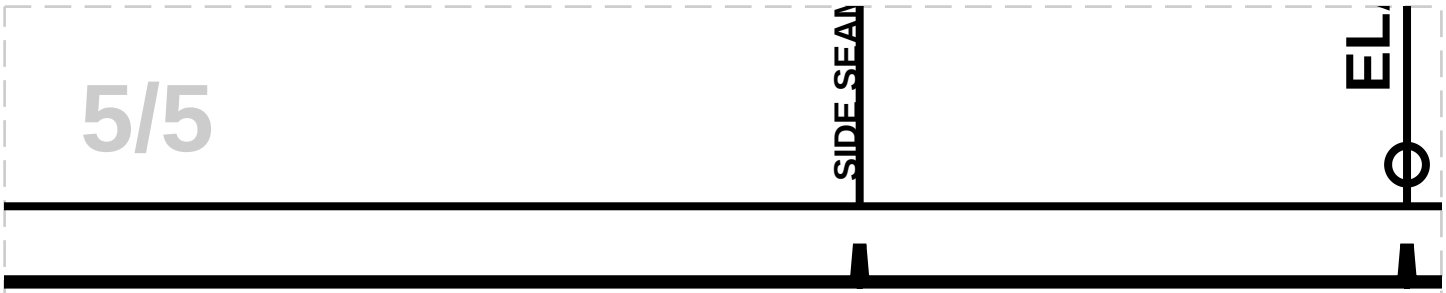
SIDE SEAM
EL

CENTER FRONT