CozySewPatterns

SEWING PATTERNS

Print this Calibration Test page first!

Size: Height: 167.75, Bust: 90.25, Waist: 73.75, Hips: 98
SIZE 6

Notes

How to print

Printing


Once your Calibration Test Page has been printed, measure the 4”x 4” (10cm) scale box with a ruler. If the lengths match, you can confidently print your pattern. If the rulers do not match, set your print settings to 100% or Actual and retry.

Cutting

Your printouts will always have a dashed border to perfectly match your sheets. Cut off the right edge of each page. Be careful not to cut beyond the dashed mark, otherwise your patterns will not align accurately.

Tapping

Group each sheet by the second number marked on each pate i.e. in a group 1, there are: 1/1, 2/1, 3/1, 4/1, etc. In a group 2: 1/2, 2/2 etc. 2. Place page 1/1 on top of the page 2/1, overlapping the right side edge. Match corners and crosses and secure with a pin or tape. Then use a scotch tape to permanently attach the sheets together.

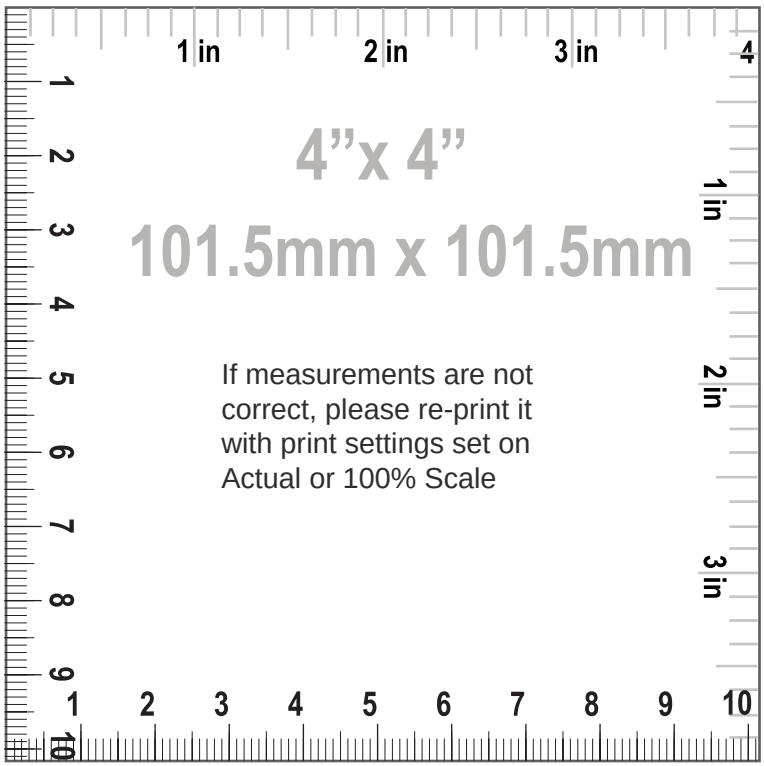

SIZE 6
Seam Allowance: 1 (3/8 in)

Pattern pieces:

1. "PANTS FRONT", MAIN FABRIC: Cut 2
2. "PANTS BACK", MAIN FABRIC: Cut 2
3. "WAISTBAND", MAIN FABRIC: Cut 1
4. "POCKET BAG", MAIN FABRIC: Cut 2
5. "FLY FACING", MAIN FABRIC: Cut 1
6. "POCKET LINING", LINING: Cut 2
7. "FLY INTERFACING", FUSIBLE INTERFACING: Cut 1
8. "FUSIBLE INTERFACING FOR WAISTBAND", FUSIBLE INTERFACING: Cut 2
9. "BACK POCKET WELT", MAIN FABRIC, FUSIBLE INTERFACING: Cut 2
10. "BACK INNER POCKET BAG", LINING: Cut 2
11. "BACK OUTER POCKET BAG", LINING: Cut 2

Pattern Specs (Circumferences are divided by 2):


1. Hem max 3.00 none (1 1/8 in)
2. Seam allowance max 2.00 none (3/4 in)
3. Stretch factor 1.00 none (3/8 in)
4. Stretch factor horizontal 1.00 none (3/8 in)
5. Stretch factor vertical 1.00 none (3/8 in)
6. Pocket bag height 27.73 cm (10 7/8 in)
7. Pocket side seam 18.35 cm (7 1/4 in)
8. Pocket waist seam 18.35 cm (7 1/4 in)
9. Back pocket entry length 12.00 cm (4 3/4 in)
10. Side seam back pocket position 8.28 cm (3 1/4 in)
11. Waist to back pocket length 12.87 cm (5 1/8 in)
12. Back pocket width welt 2.50 cm (1 in)
13. Fly zipper length 23.00 cm (9 in)
14. Waist 40.91 cm (16 1/8 in)
15. Hips 49.45 cm (19 1/2 in)
16. Pleat depth 1.25 cm (1/2 in)
17. Thigh 31.80 cm (12 1/2 in)
18. Knee 25.80 cm (10 1/8 in)
19. Bottom opening 18.64 cm (7 3/8 in)


20. Front rise 29.77 cm (11 3/4 in)
21. Back rise 40.34 cm (15 7/8 in)
22. Crotch height 28.25 cm (11 1/8 in)
23. Inseam length 68.77 cm (27 1/8 in)
24. Pants side seam length 97.73 cm (38 1/2 in)
25. Waistband partly elastic width 3.00 cm (1 1/8 in)
26. Waistband width 3.30 cm (1 1/4 in)
27. Waistband length 91.25 cm (35 7/8 in)
28. Waistband partly elastic length 43.27 cm (17 in)
29. Waistband button diameter 1.00 cm (3/8 in)
30. Waistband buttons quantity 1.00 pc
31. Seam allowance poc max 3.00 none (1 1/8 in)
32. Back pocket bag height 10.20 cm (4 in)


CozySewPatterns


SEWING PATTERNS

Paper Size: A4;
Print Actual Size (100% Scale);

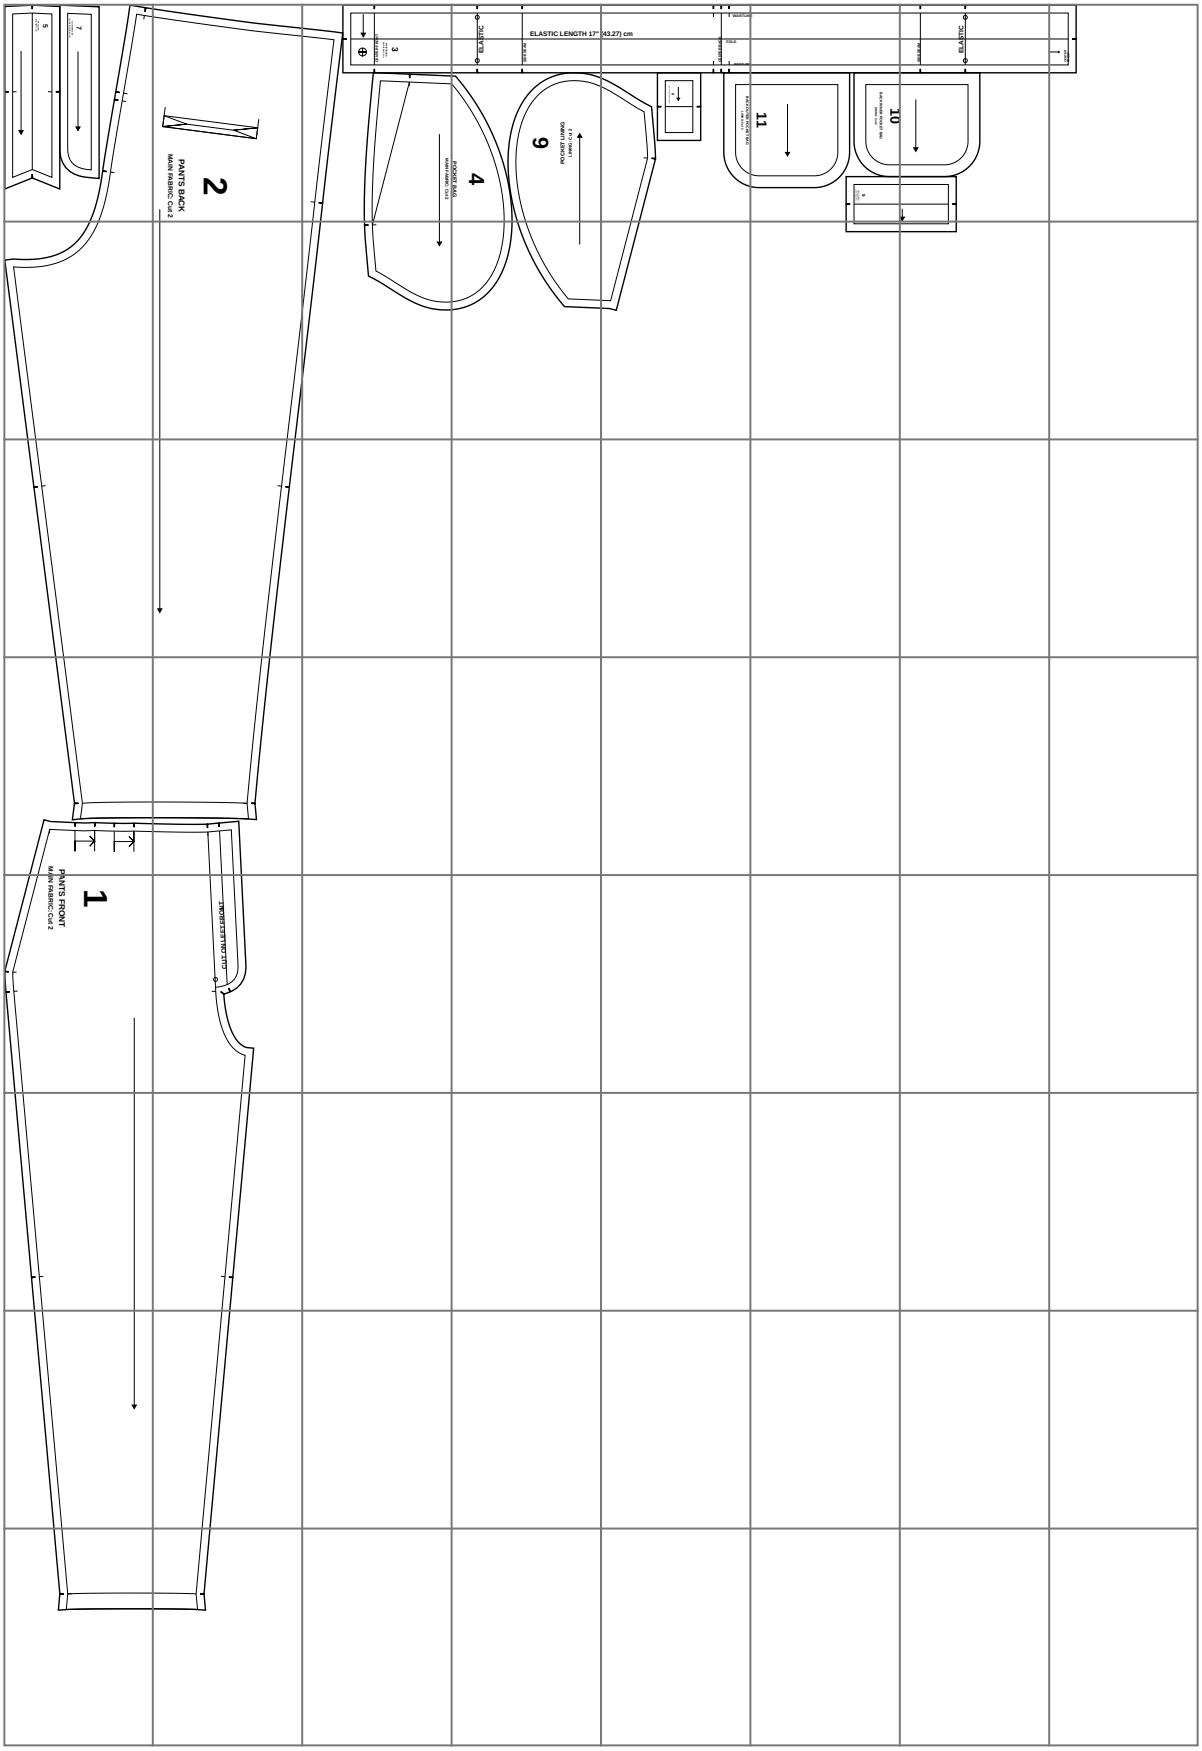

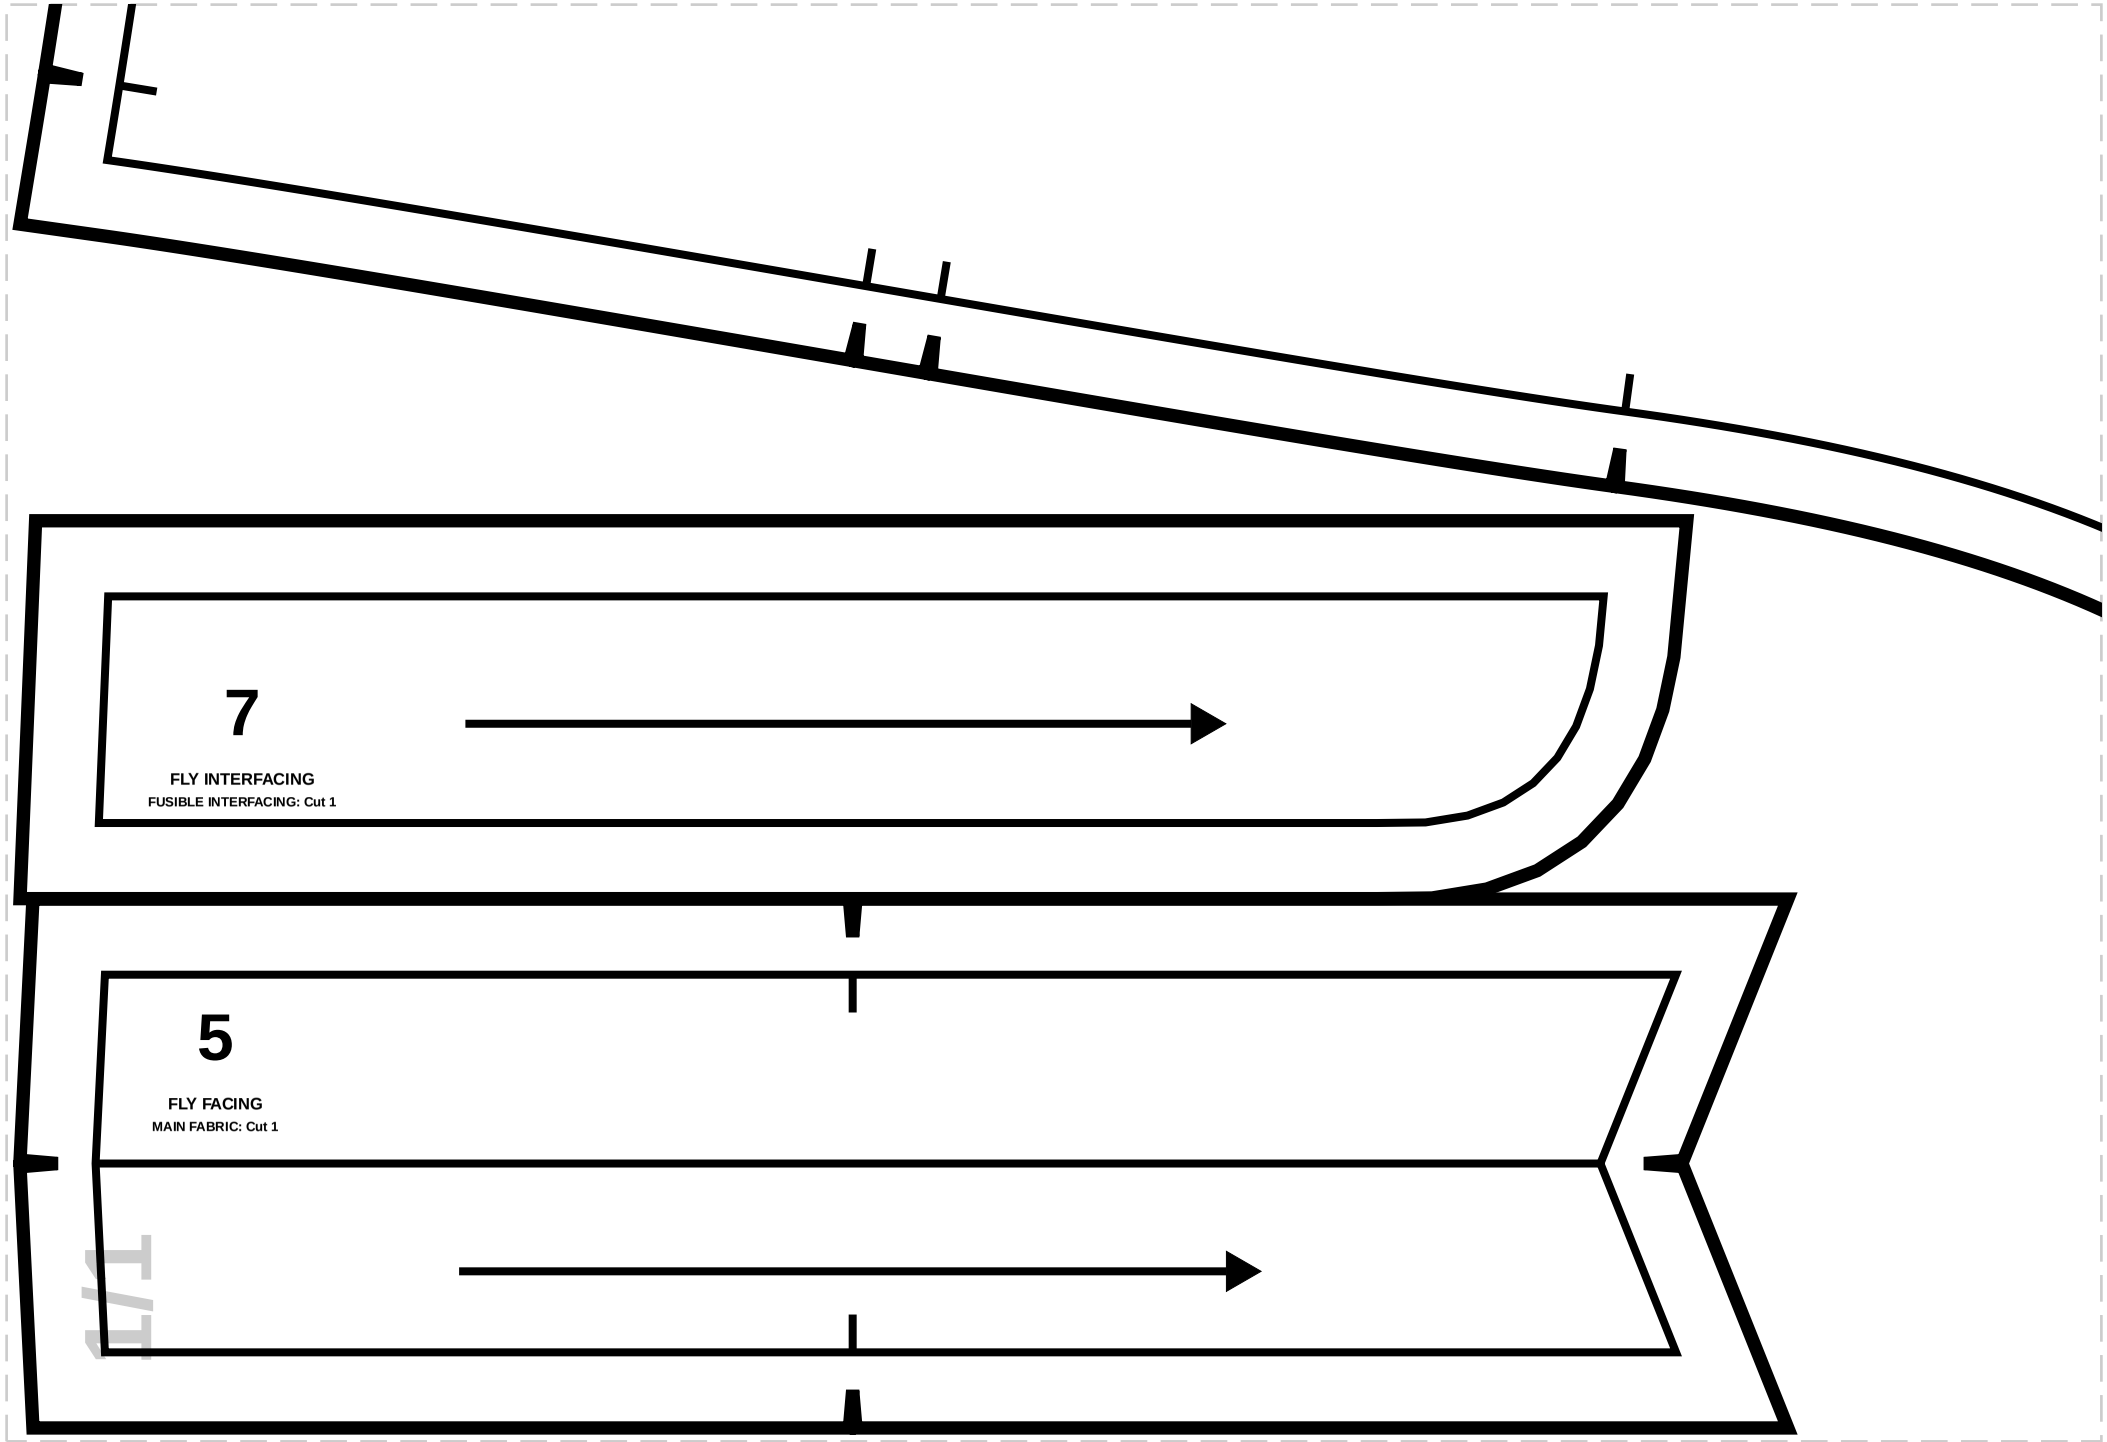
7
FLY INTERFACING
FUSIBLE INTERFACING: Cut 1
5
FLY FACING
MAIN FABRIC: Cut 1
1/1

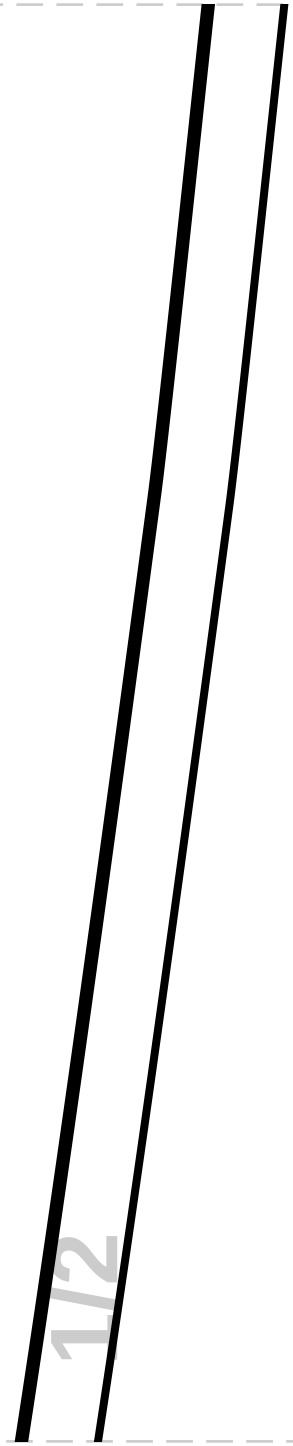


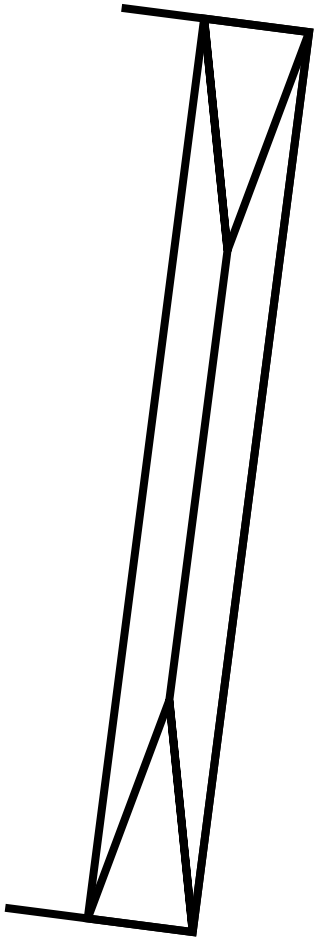

2

PANTS BACK

MAIN FABRIC: Cut 2

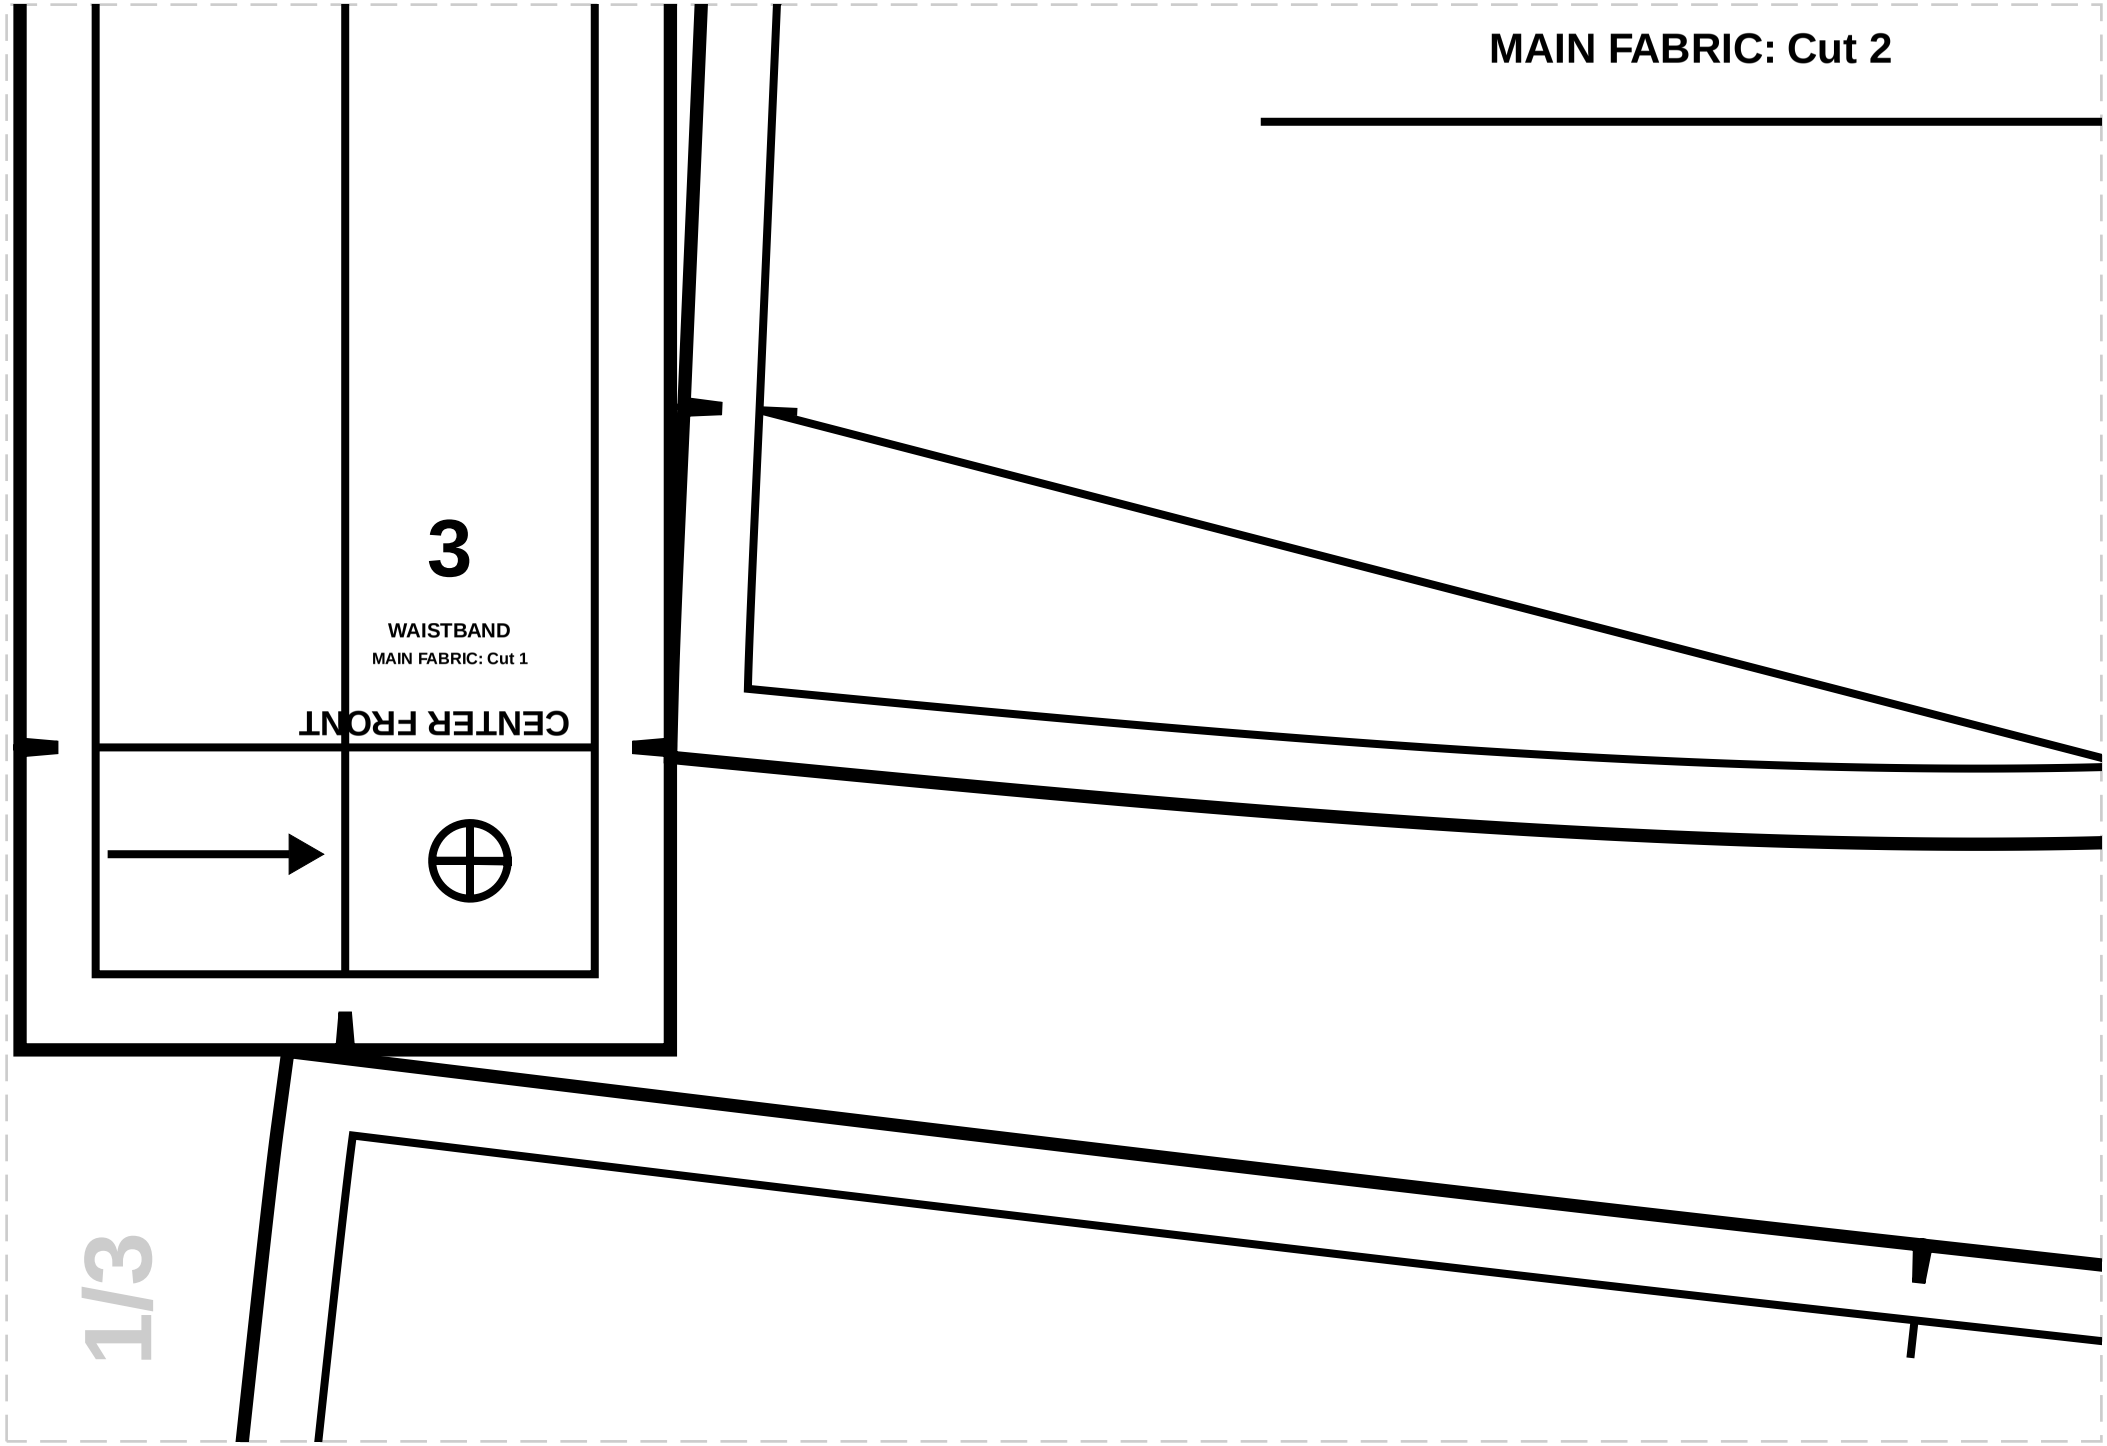
MAIN FABRIC: Cut 2
3
WAISTBAND
MAIN FABRIC: Cut 1
CENTER FRONT

1/4

ELASTIC

ELASTIC LENGTH 17"

SIDE SEAM


POCKET BAG


4


6


POCKET LINING


LINING: Cut 2

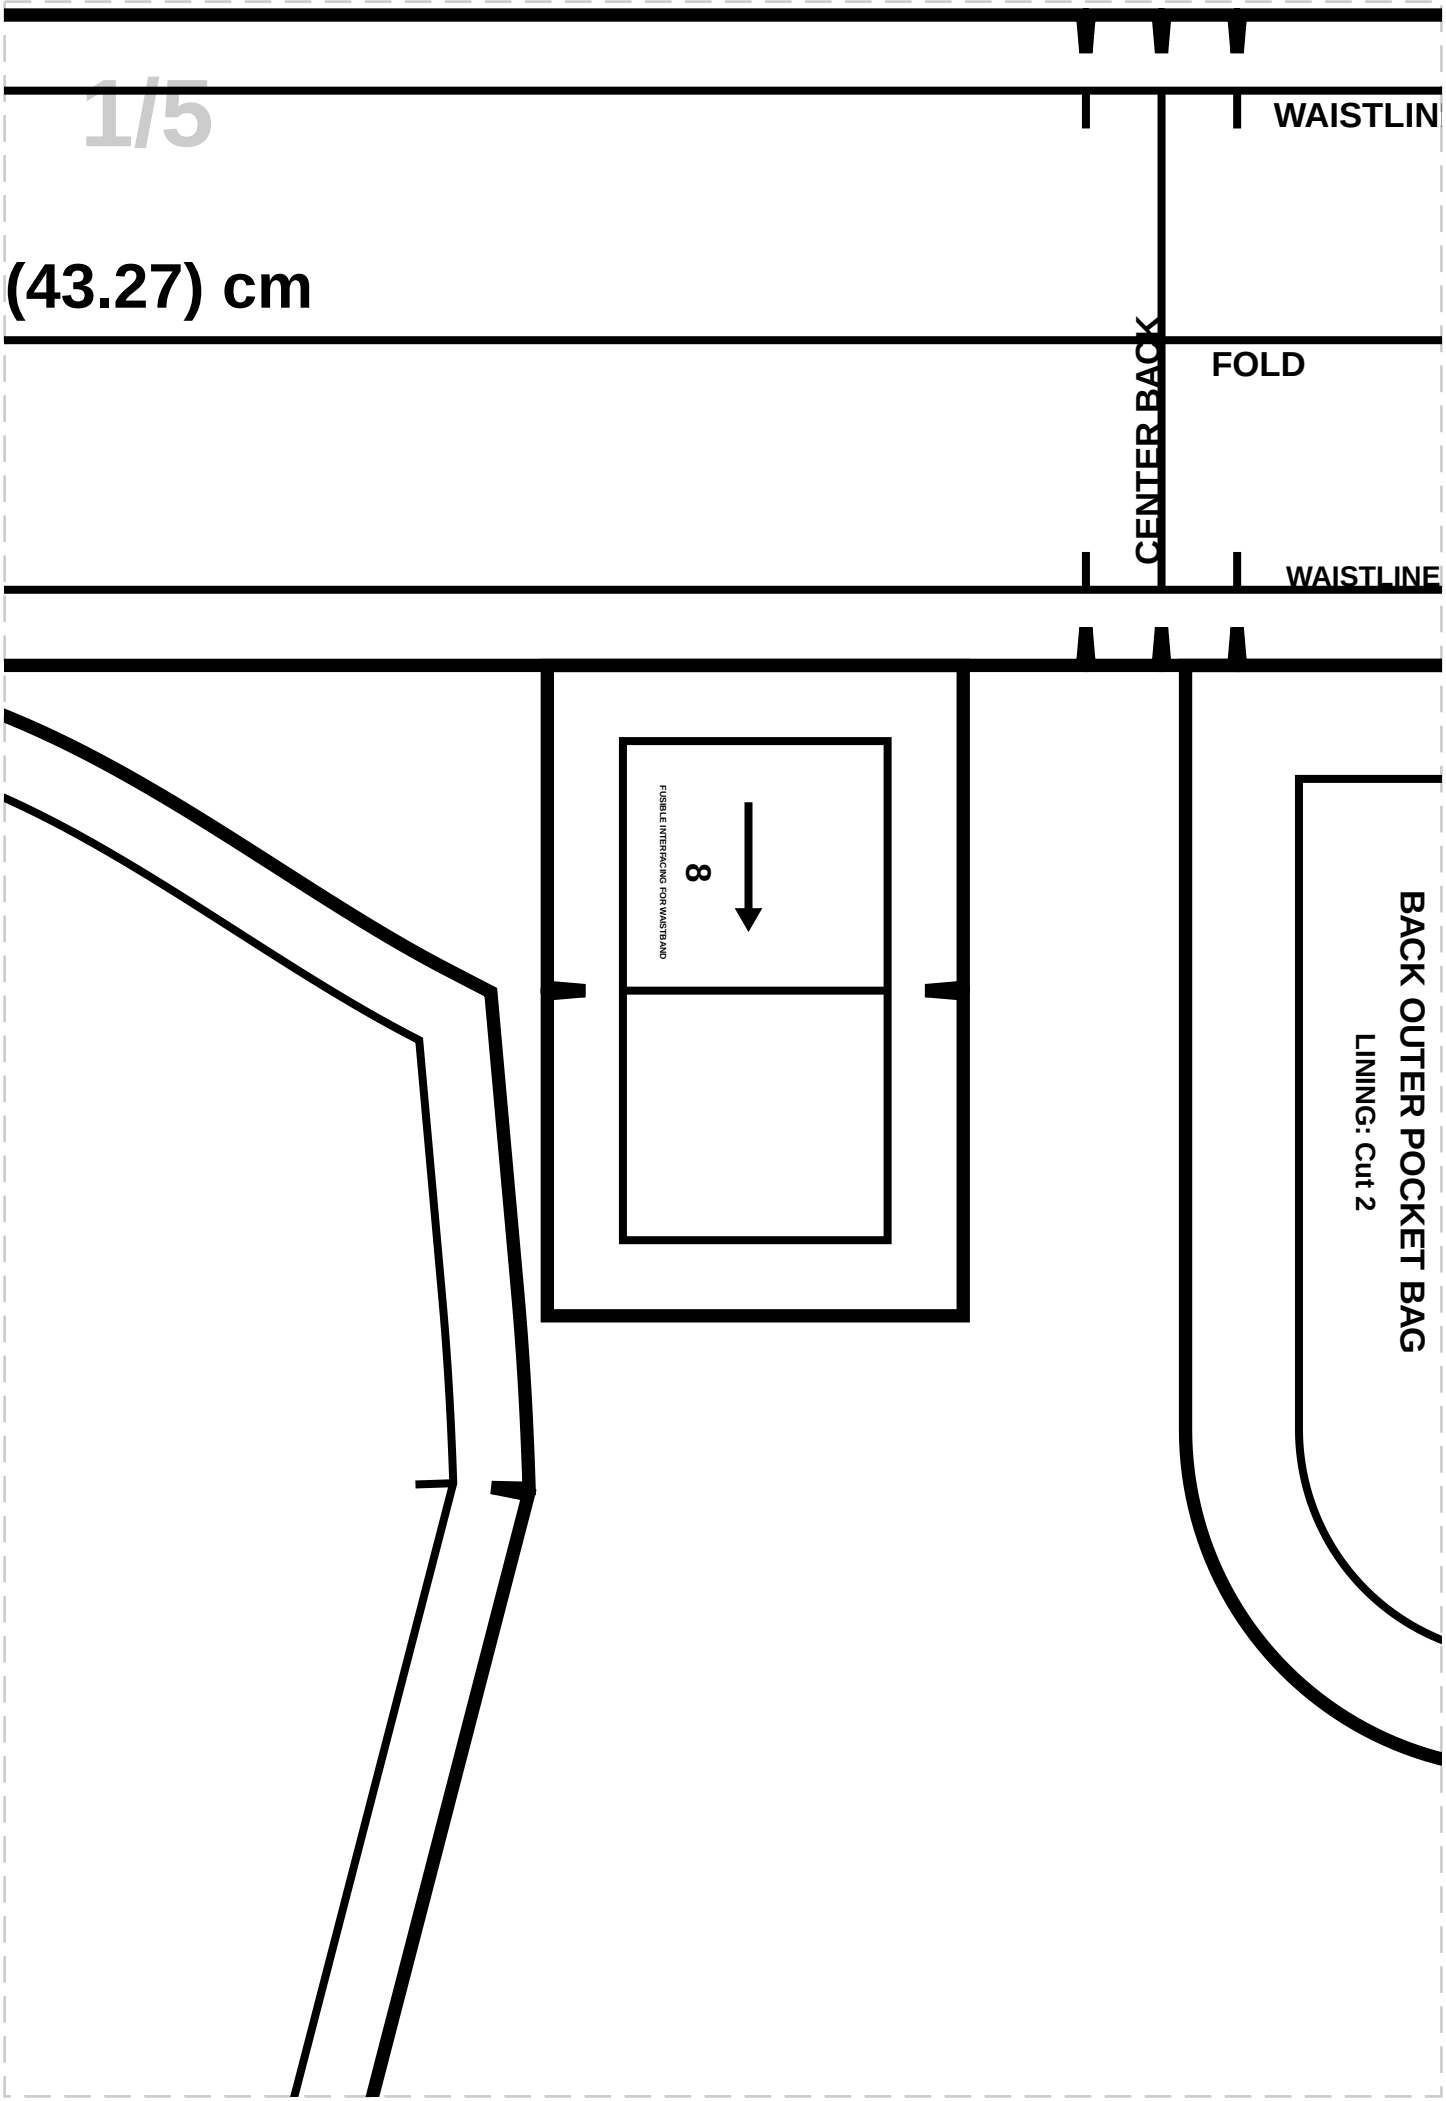

1/5
(43.27) cm
WAISTLIN
FOLD
CENTER BACK
WAISTLINE
8
FUSIBLE INTERFACING FOR WAISTBAND
BACK OUTER POCKET BAG
LINING: Cut 2

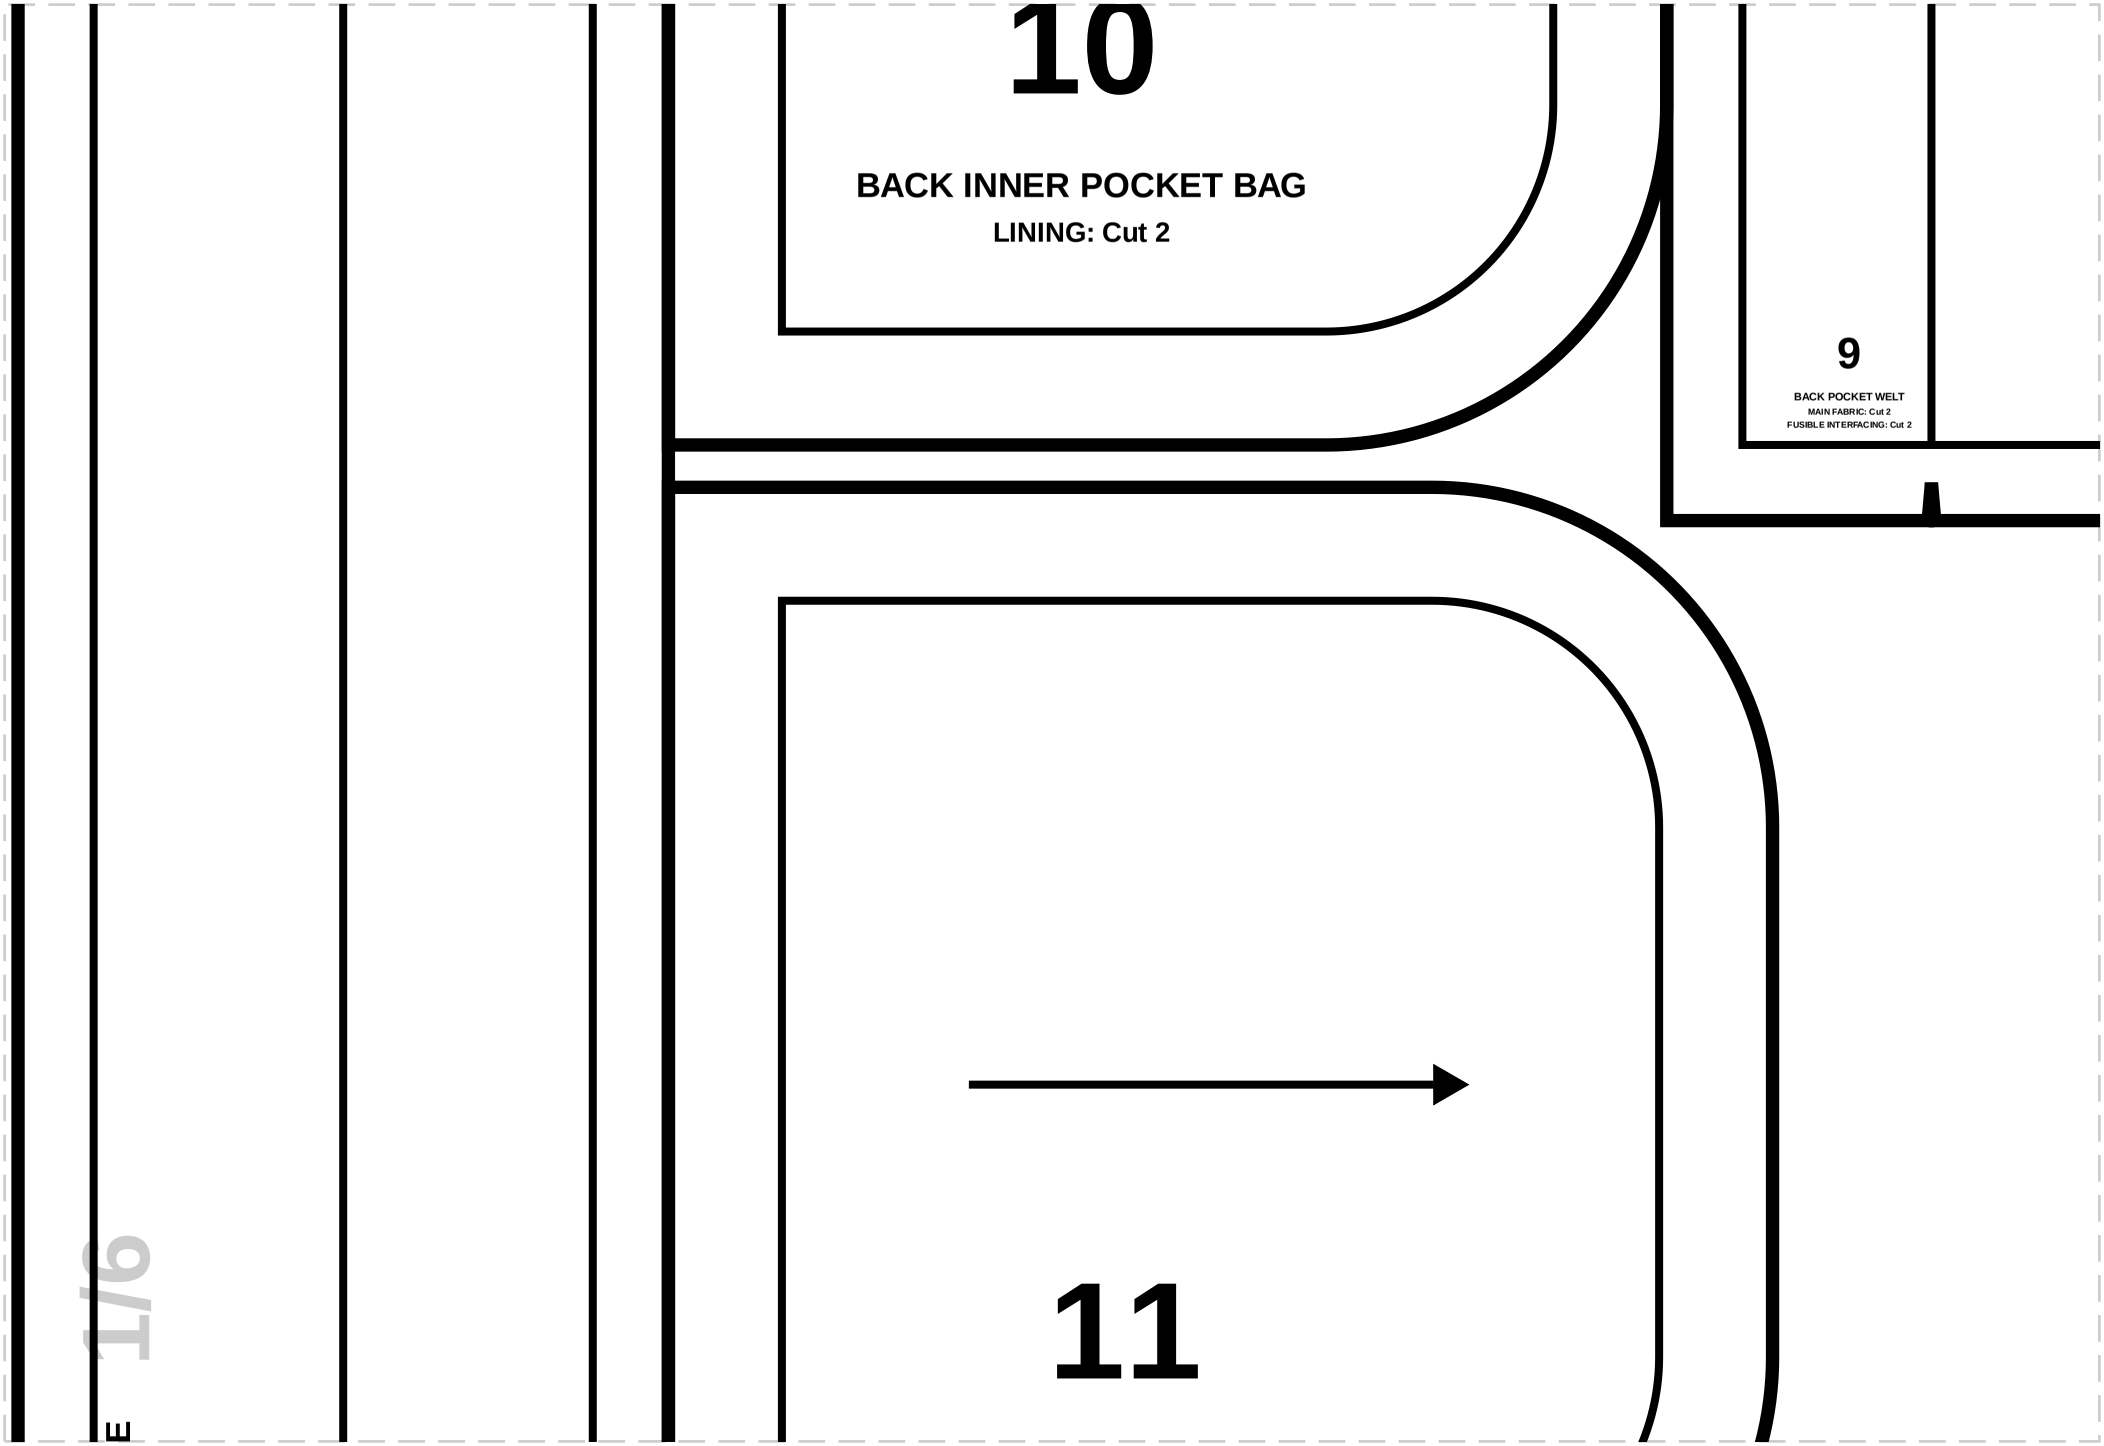

10
BACK INNER POCKET BAG
LINING: Cut 2
9
BACK POCKET WELT
MAIN FABRIC: Cut 2
FUSIBLE INTERFACING: Cut 2
11
E 1/6

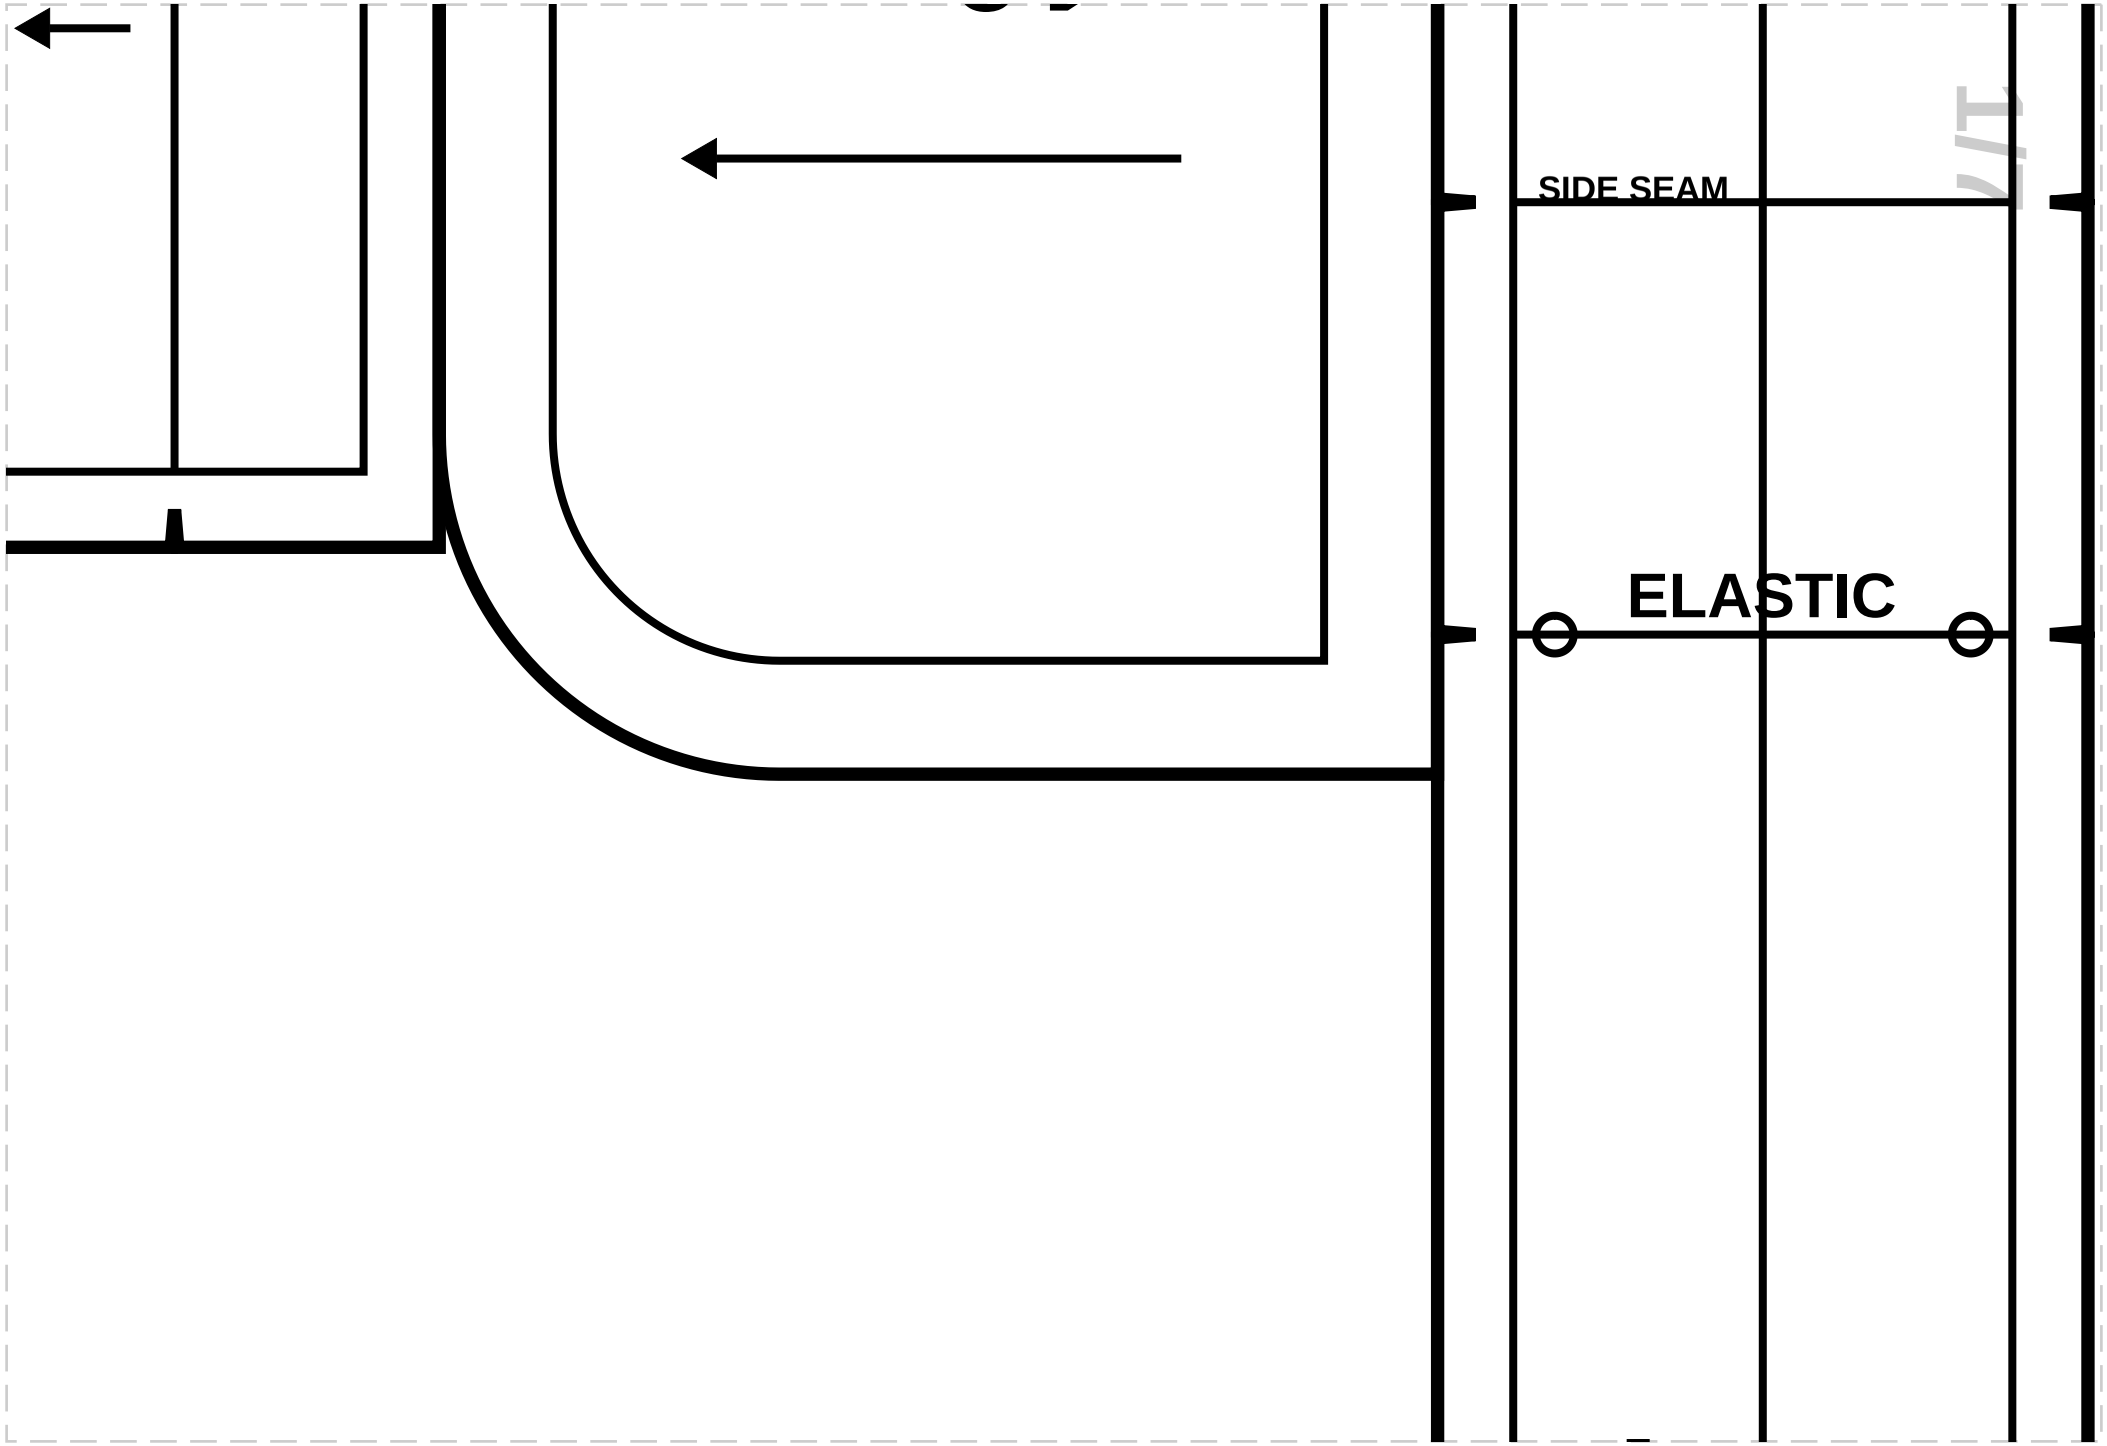

SIDE SEAM
ELASTIC

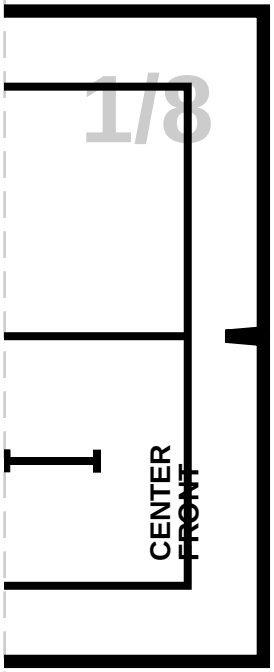

CENTER
FRONT

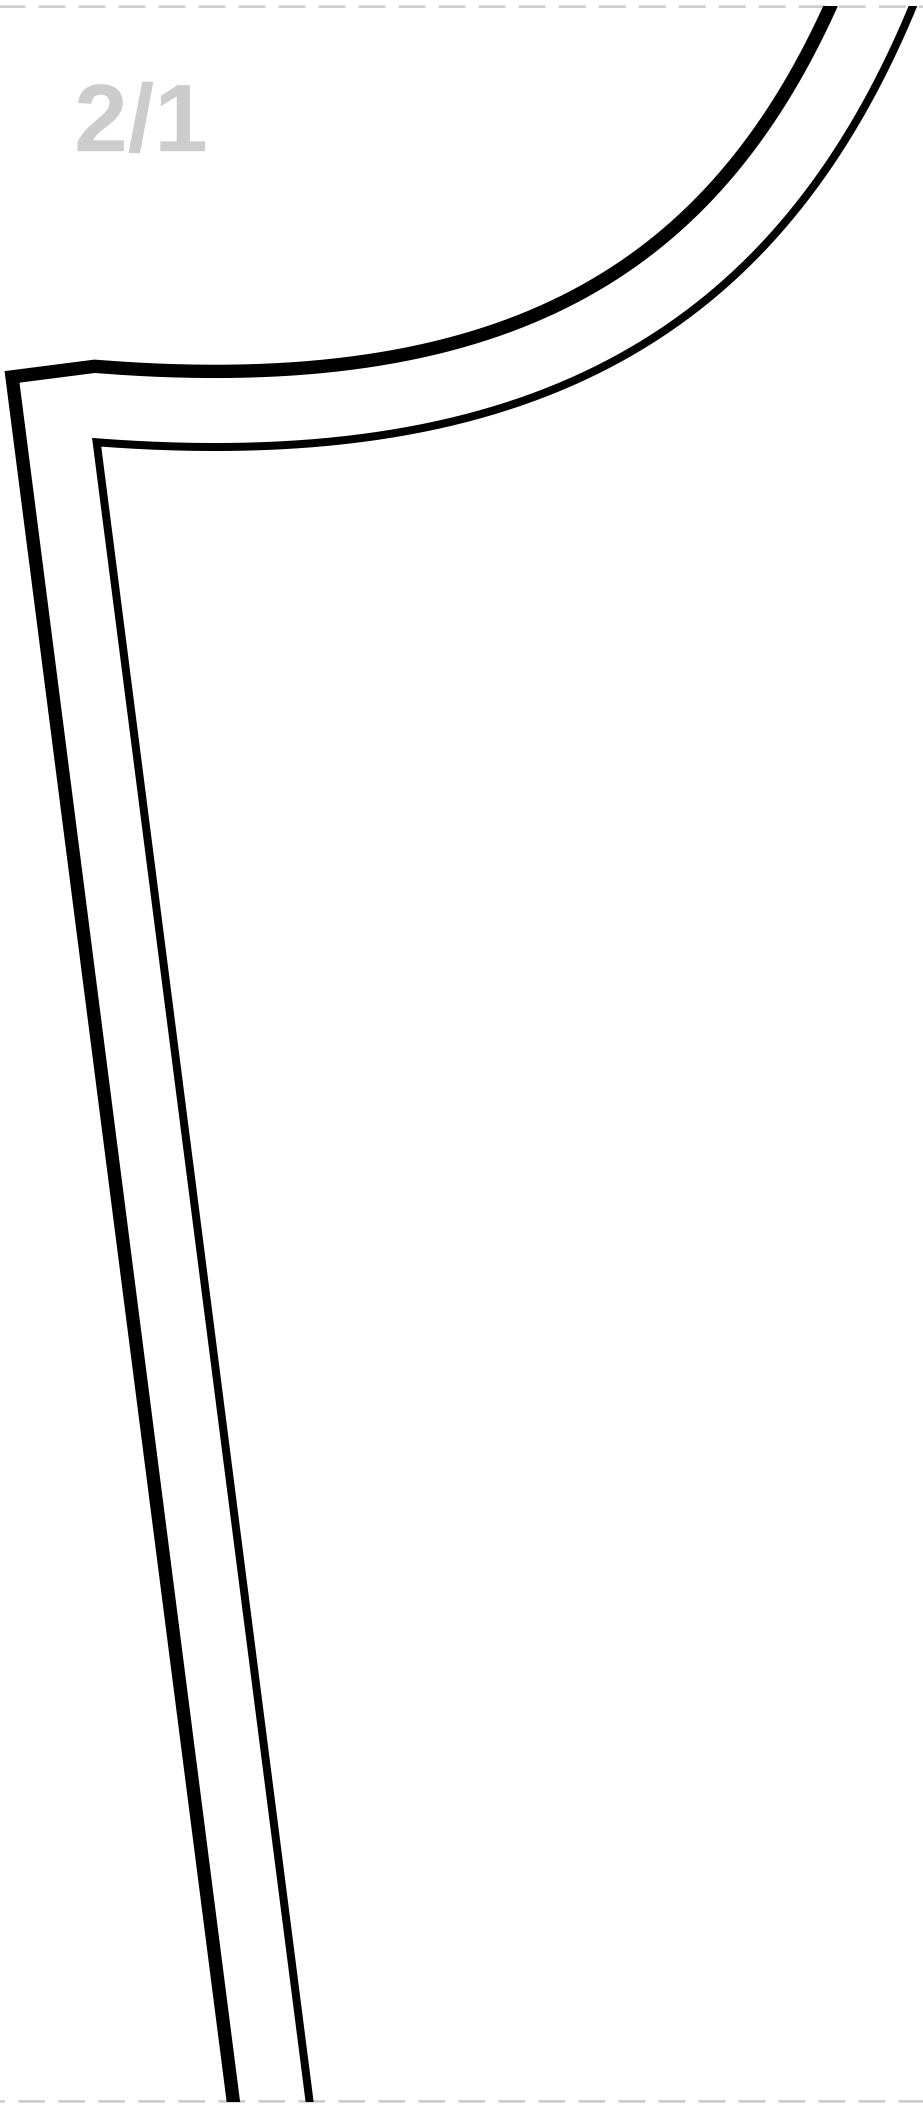


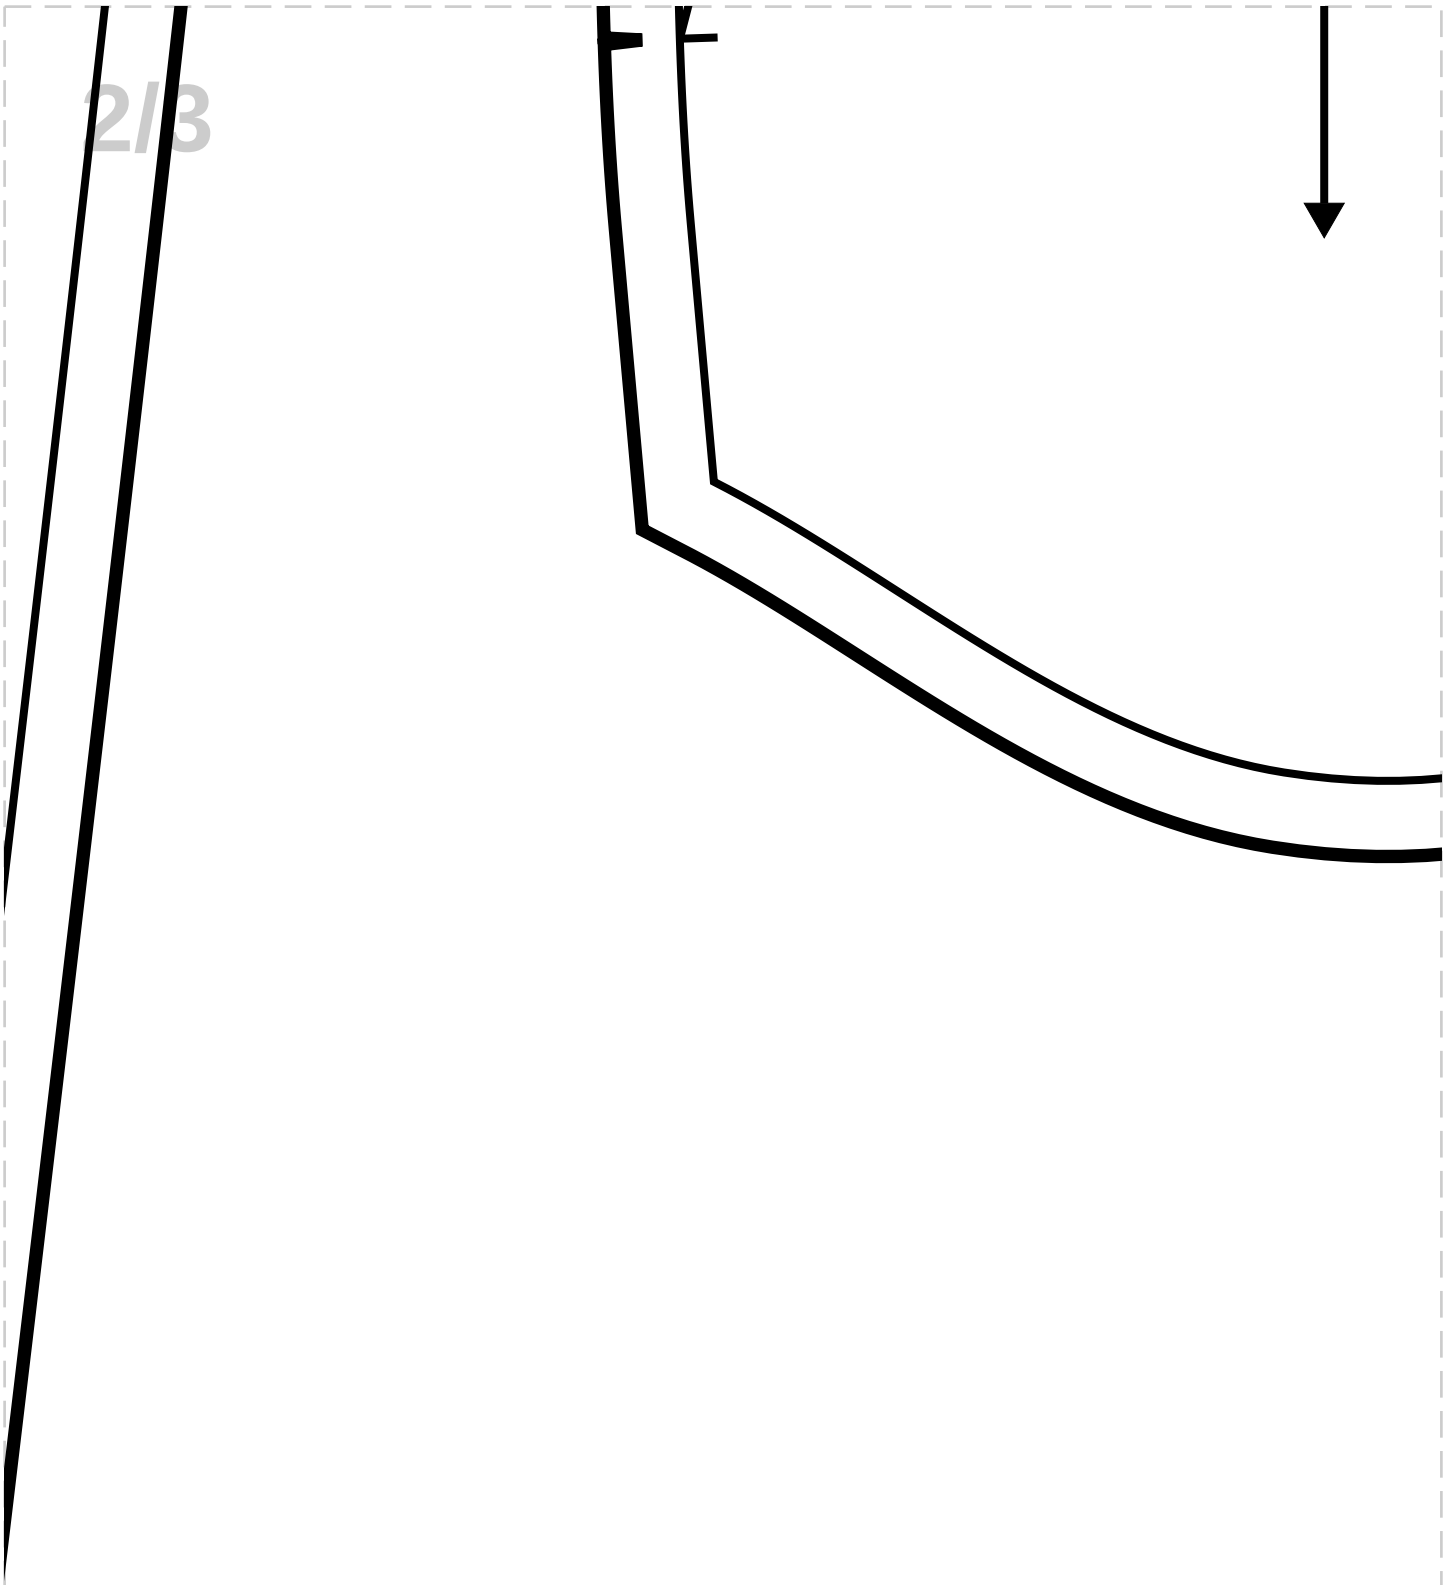


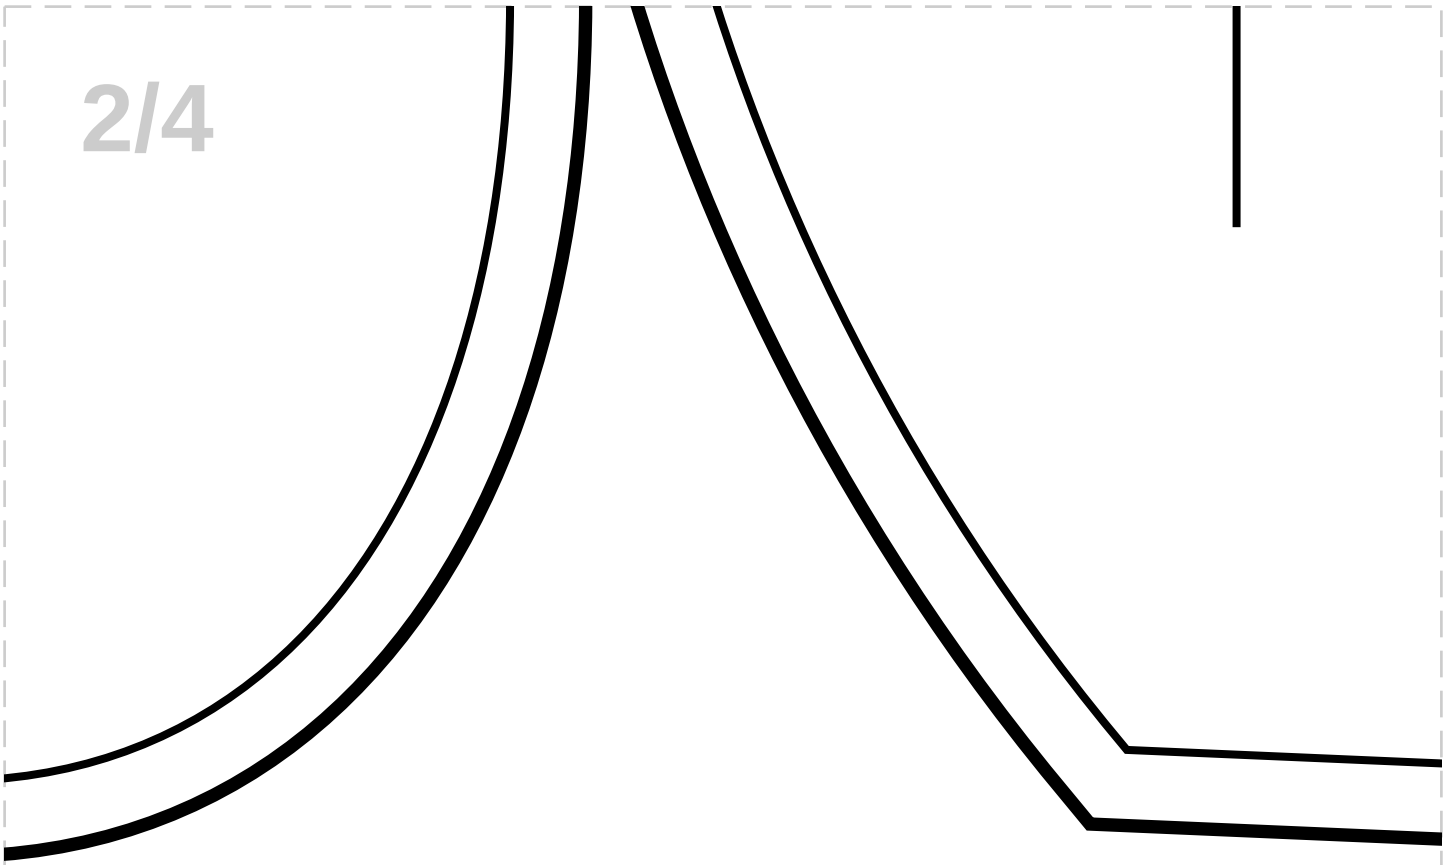


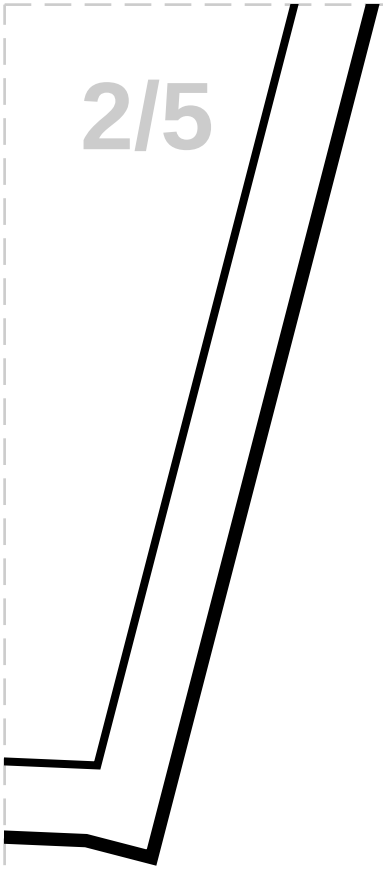

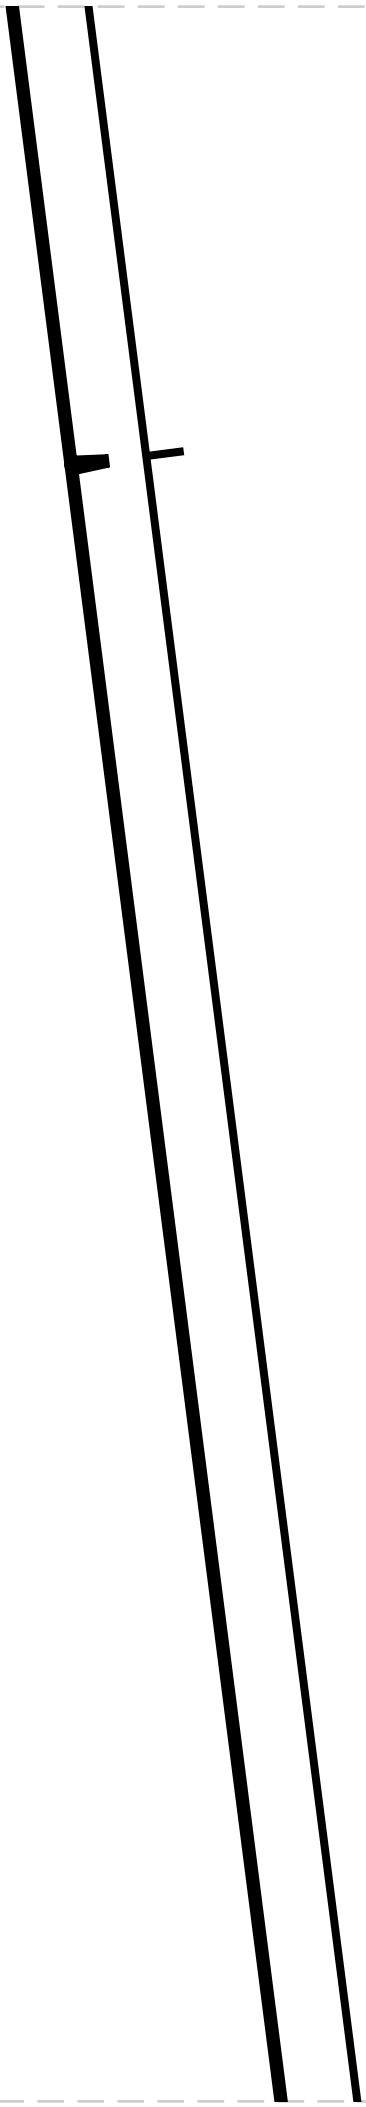

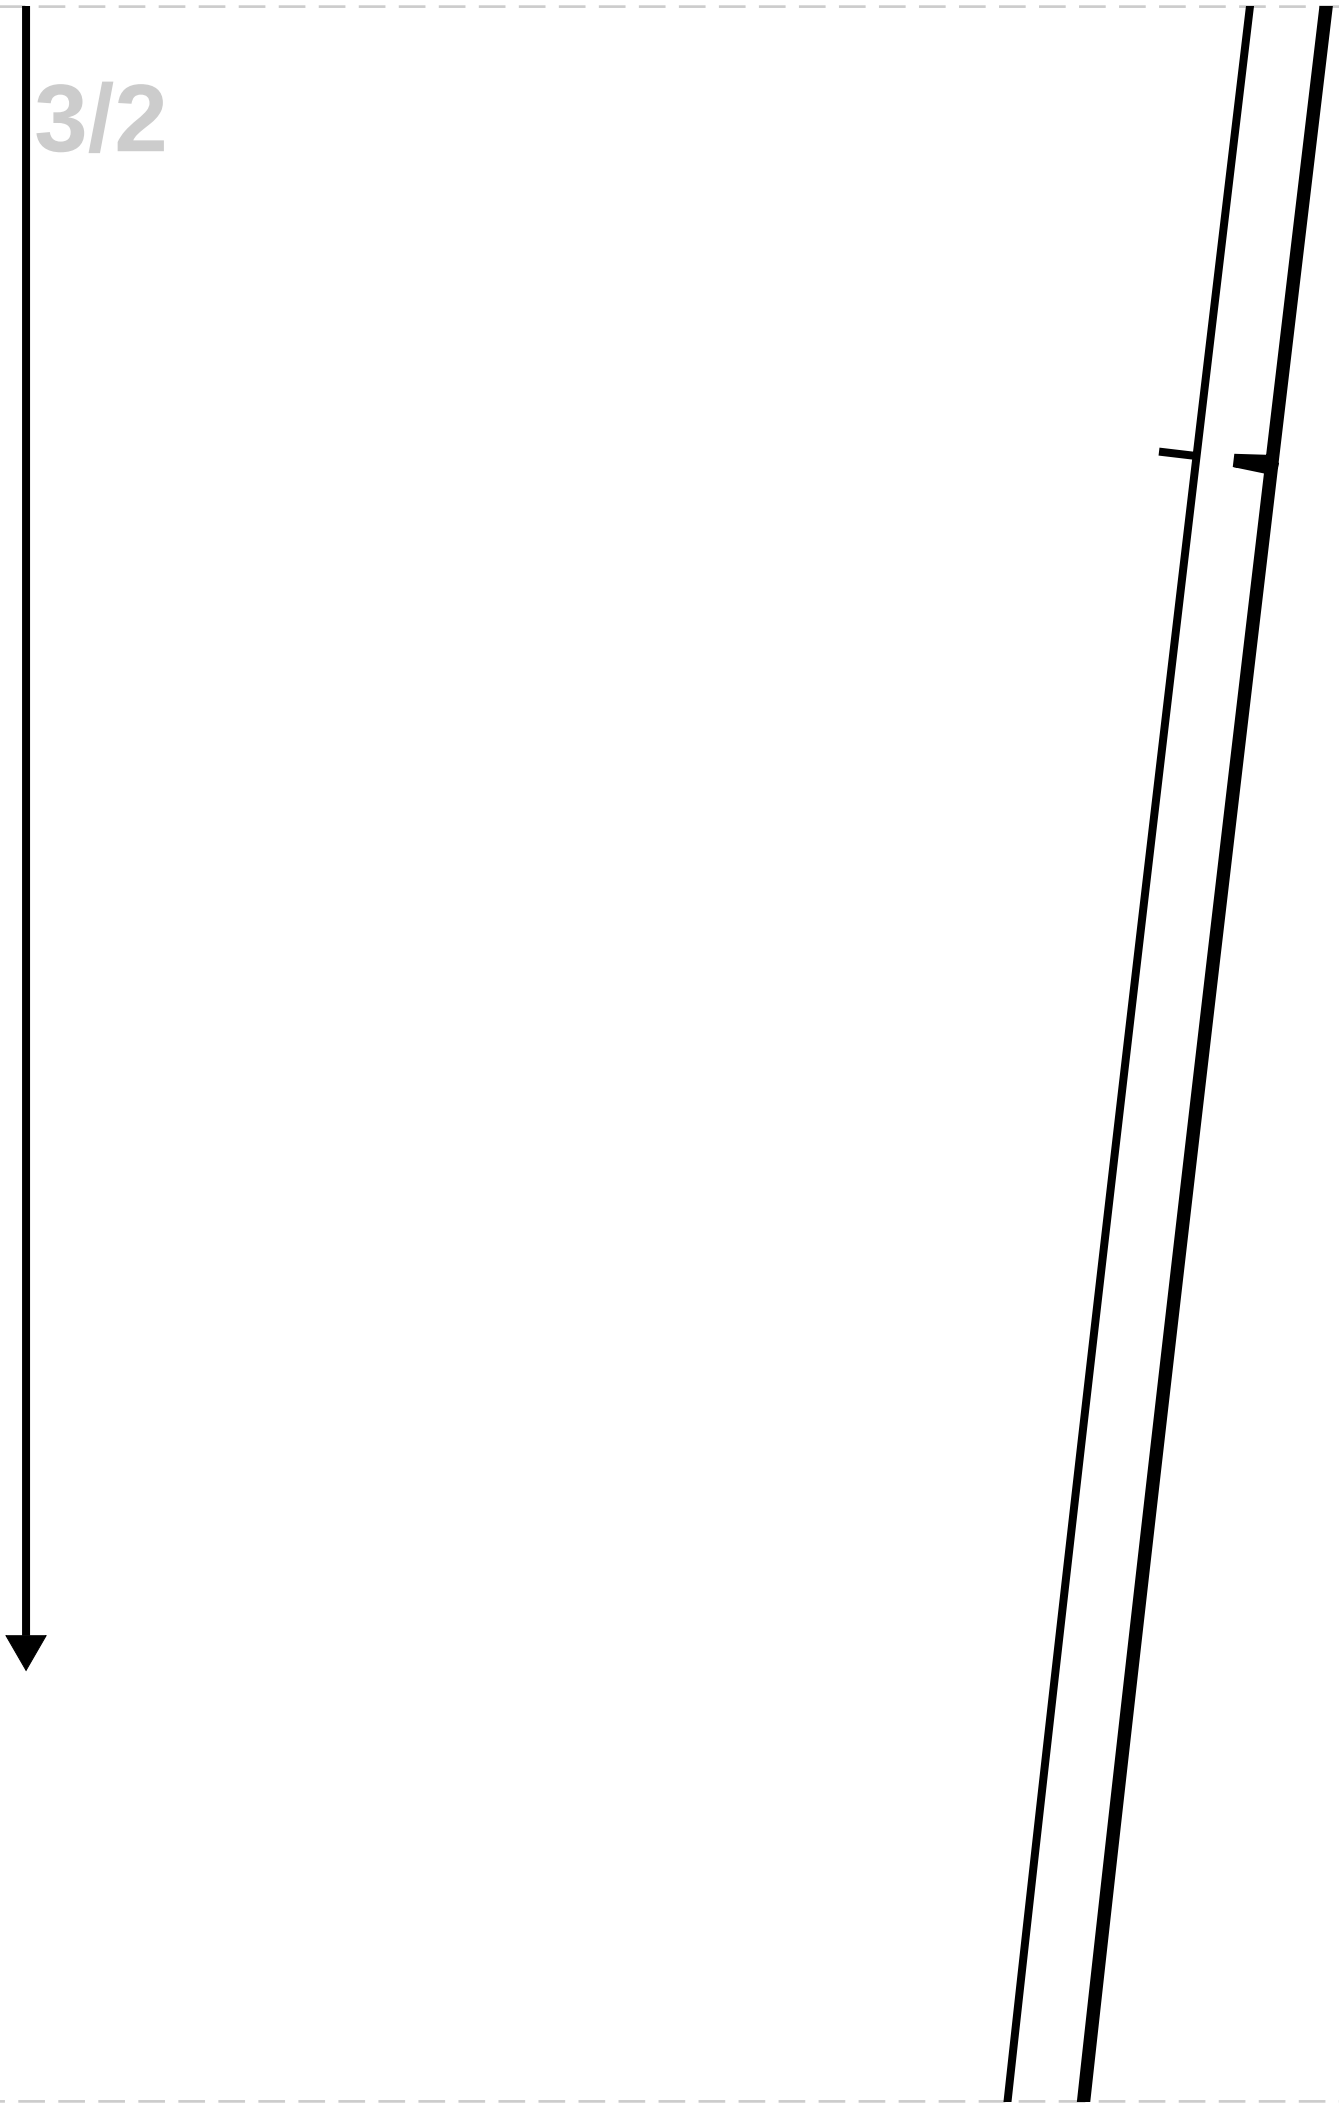

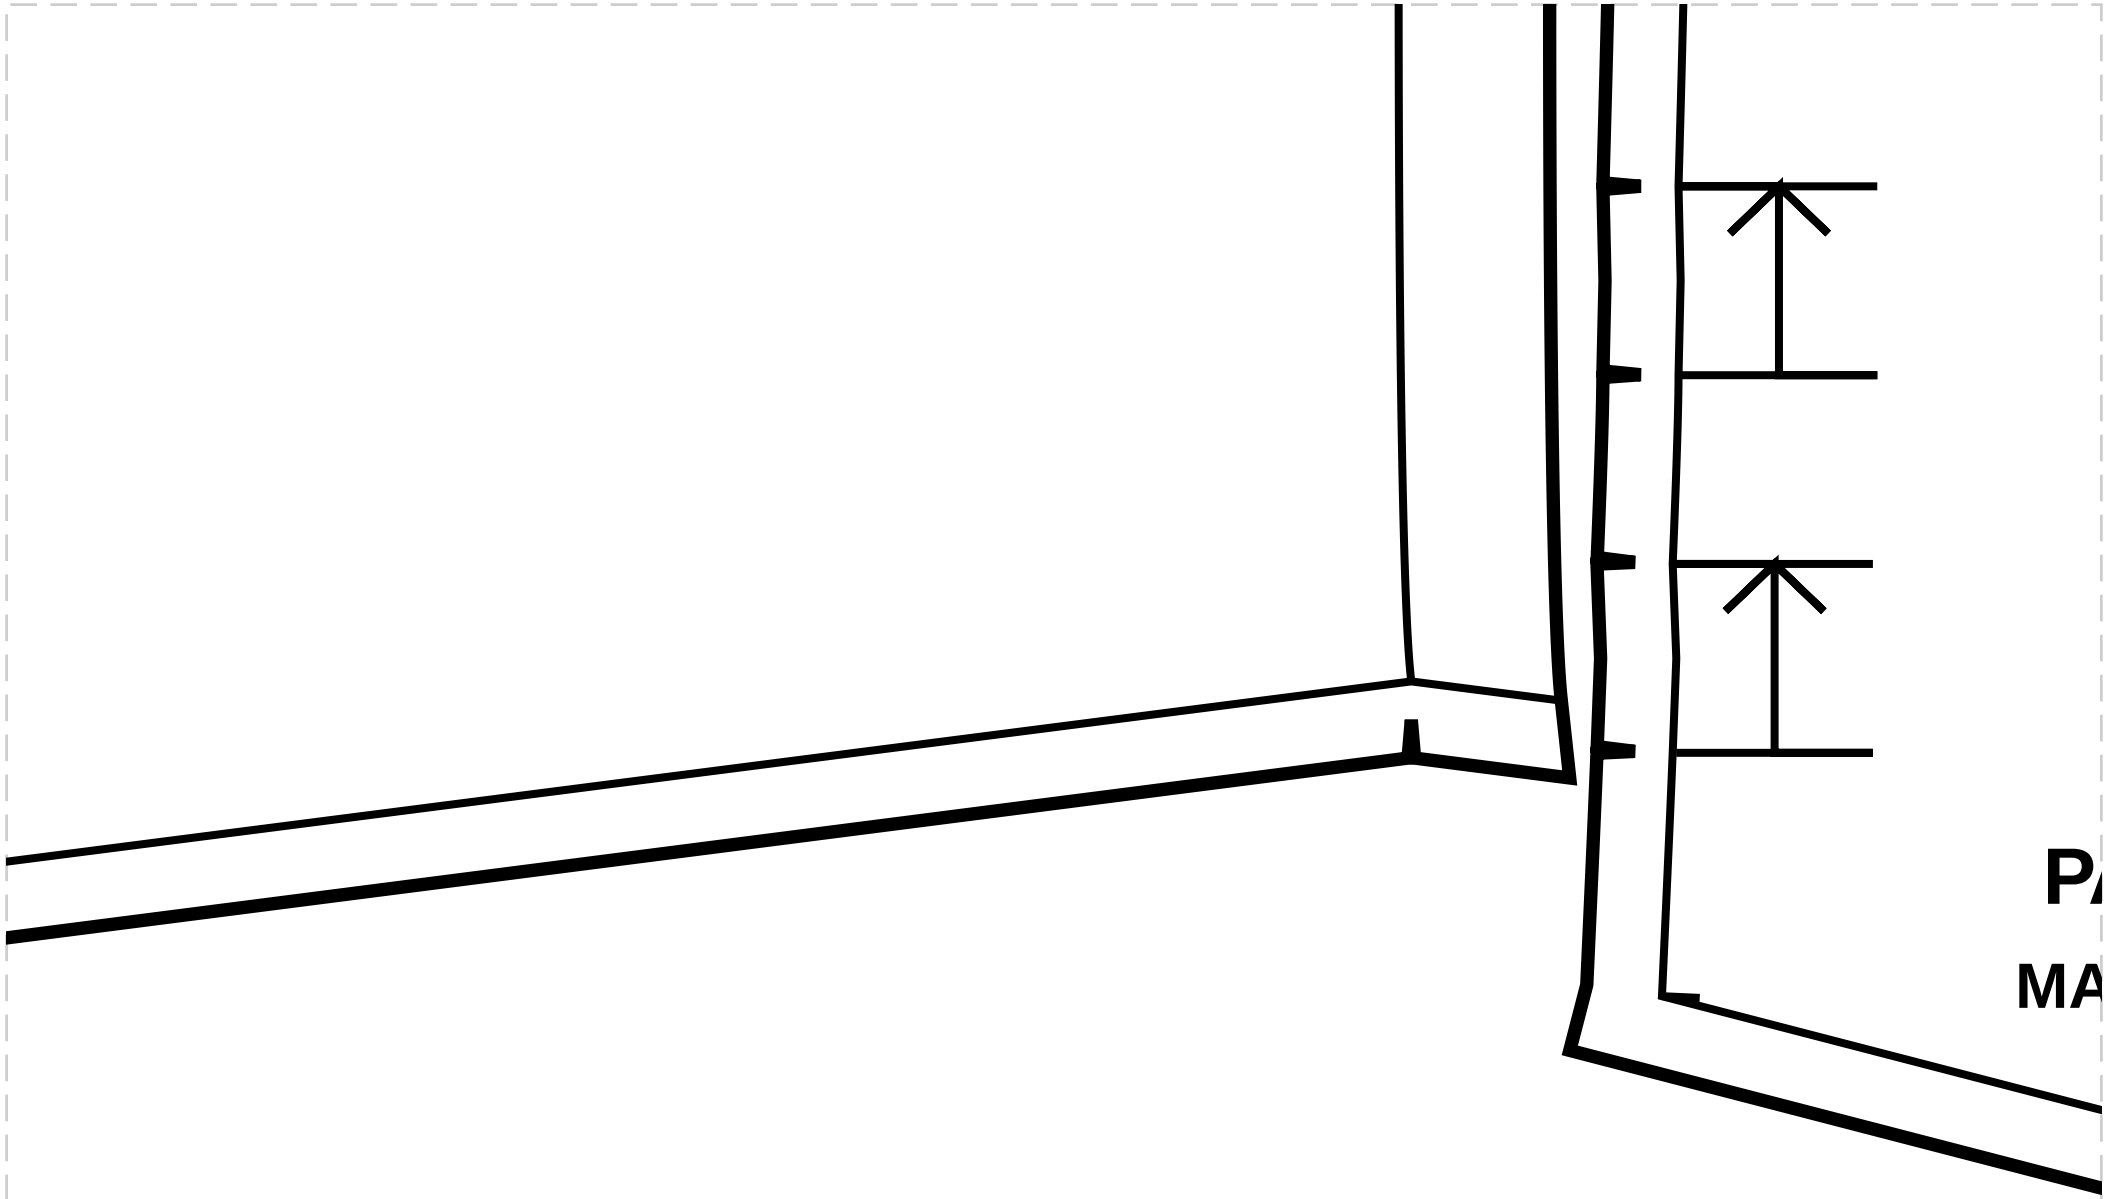
P
MA

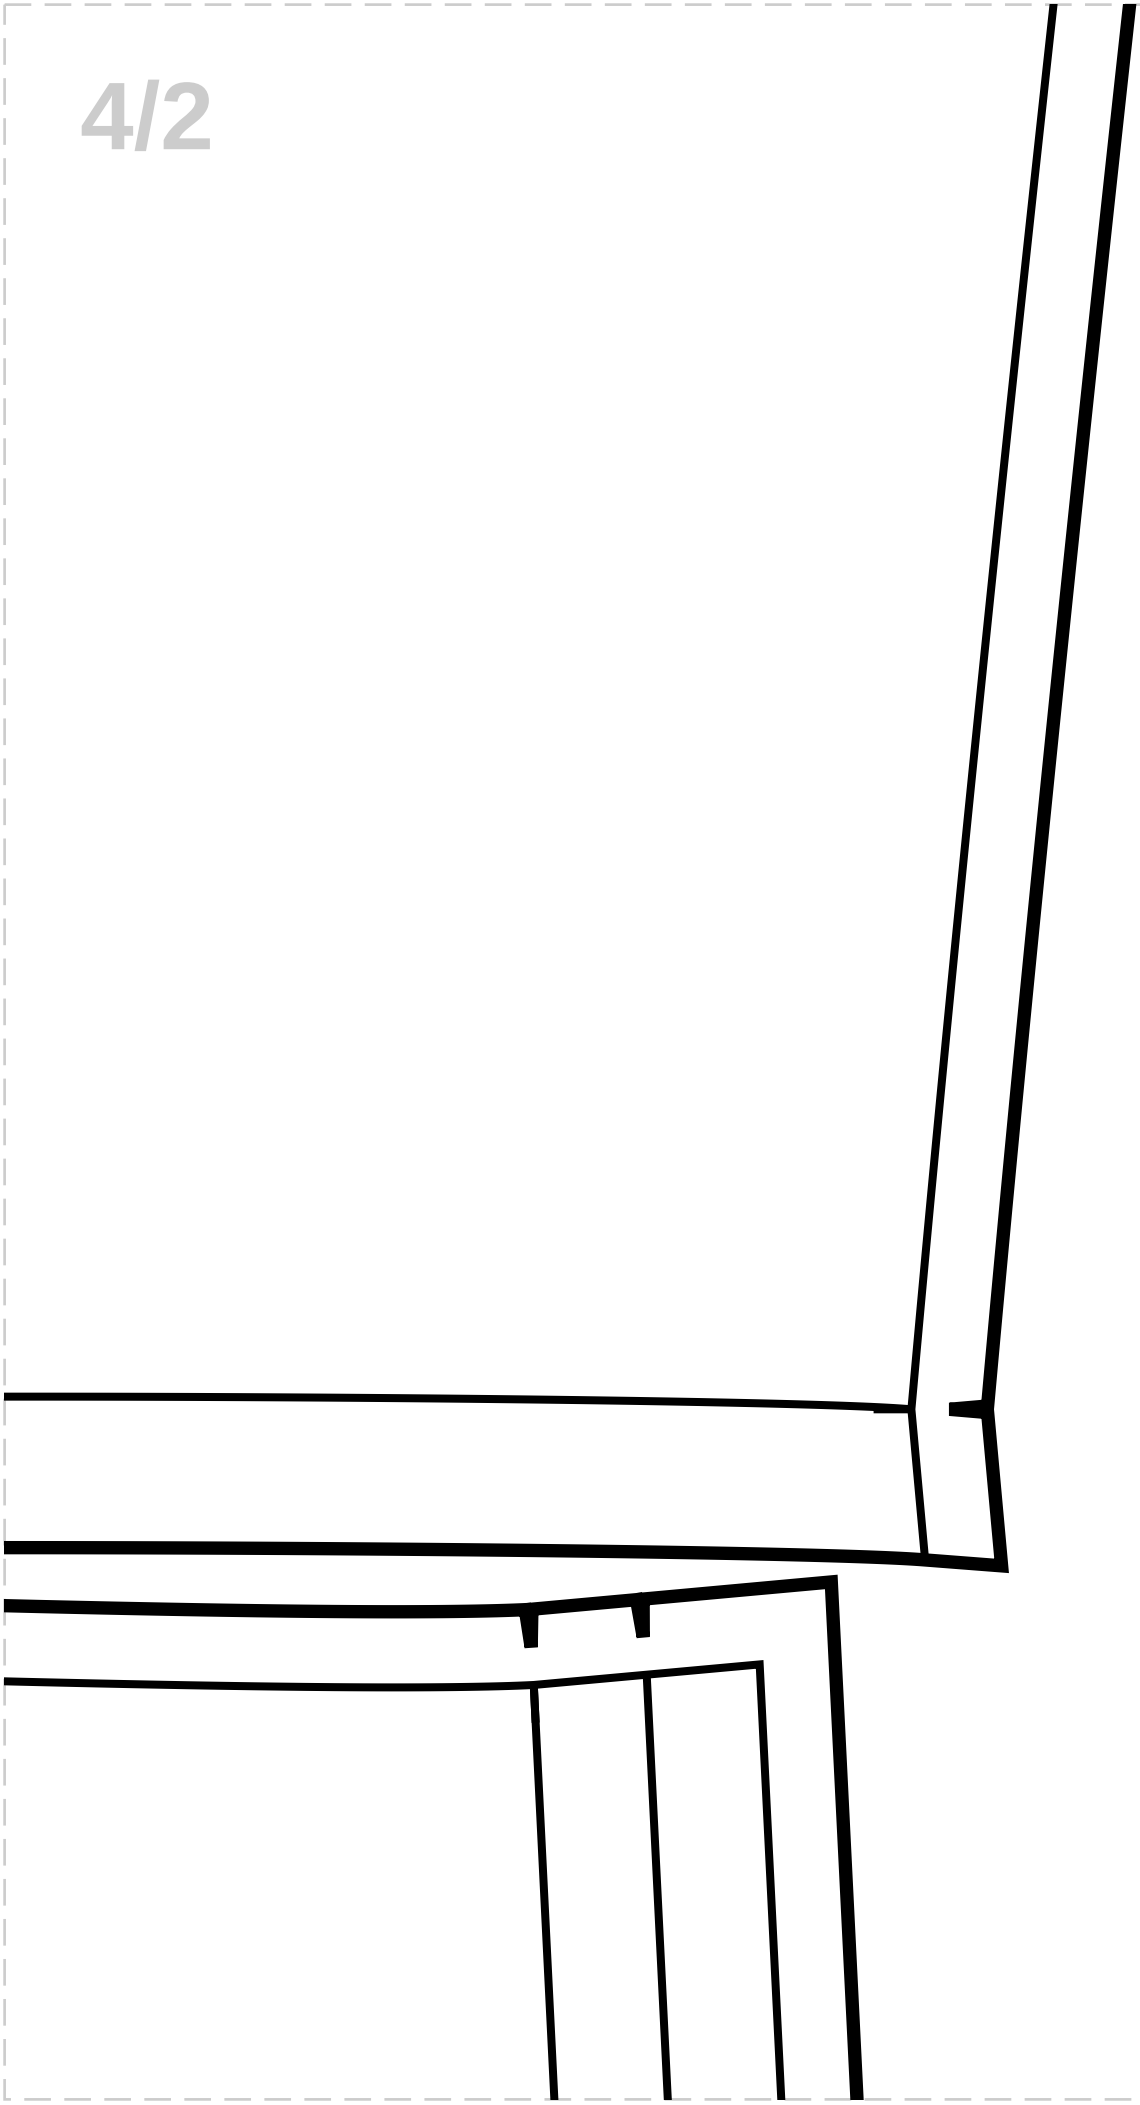


4/3


1

ANTS FRONT

IN FABRIC: Cut 2

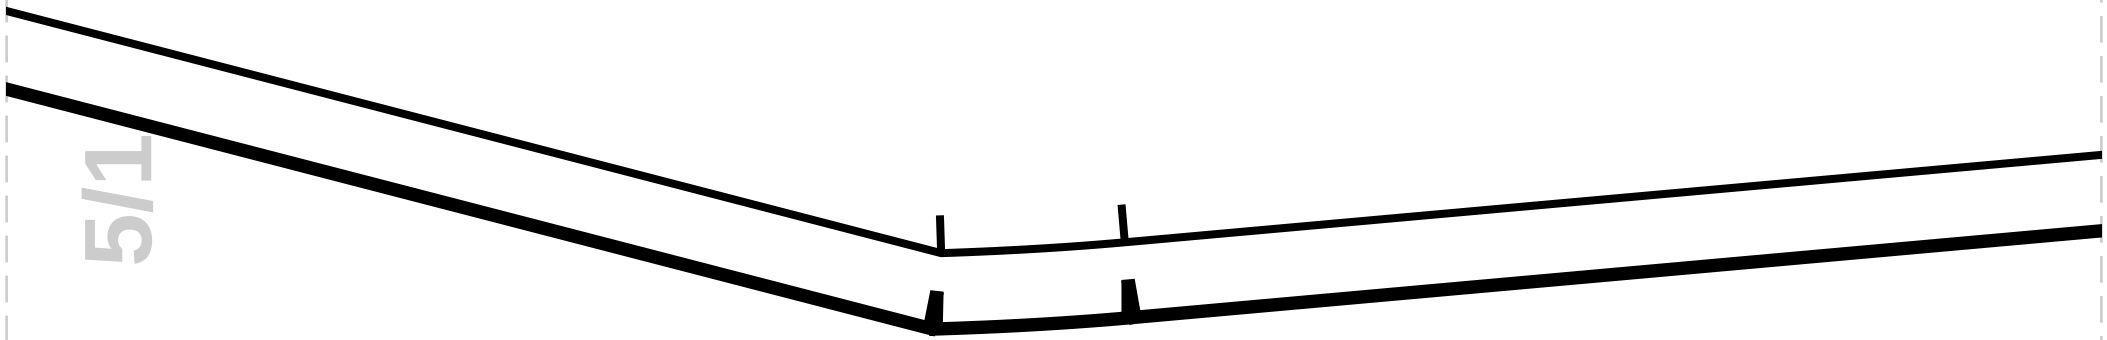



5/1

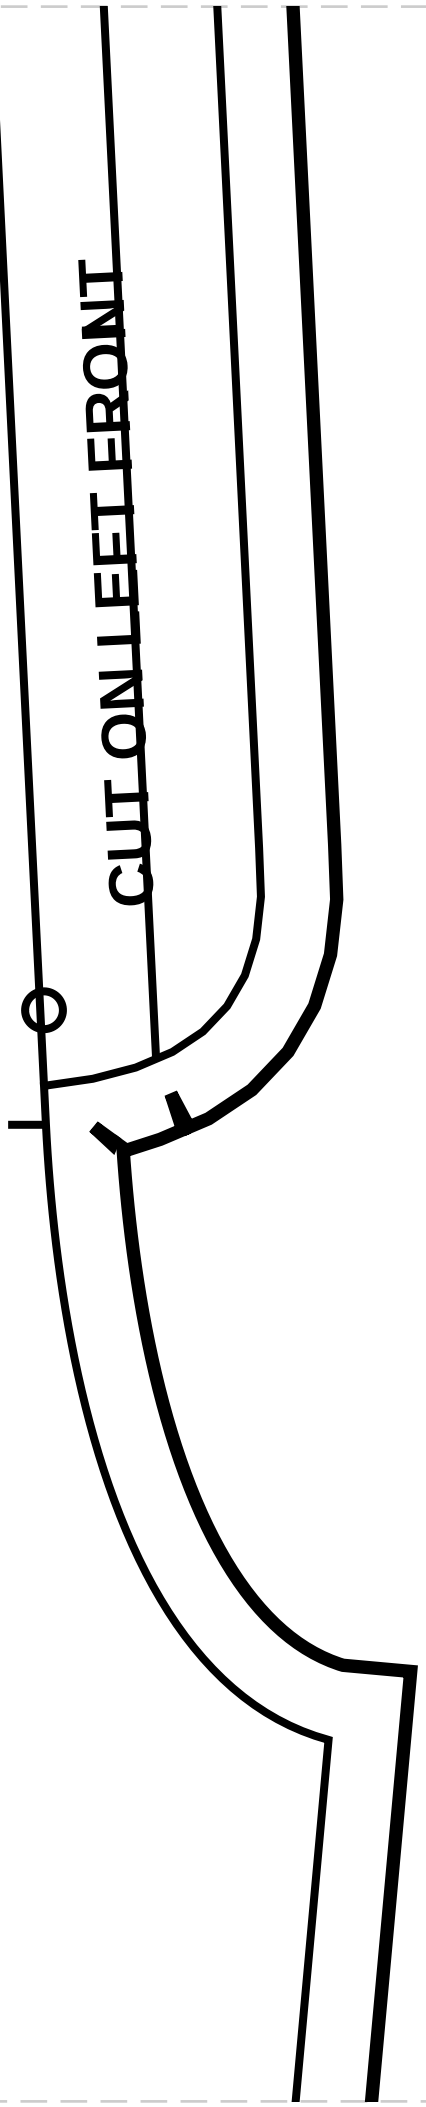
CUT ON LEFT FRONT

5/3

5/4

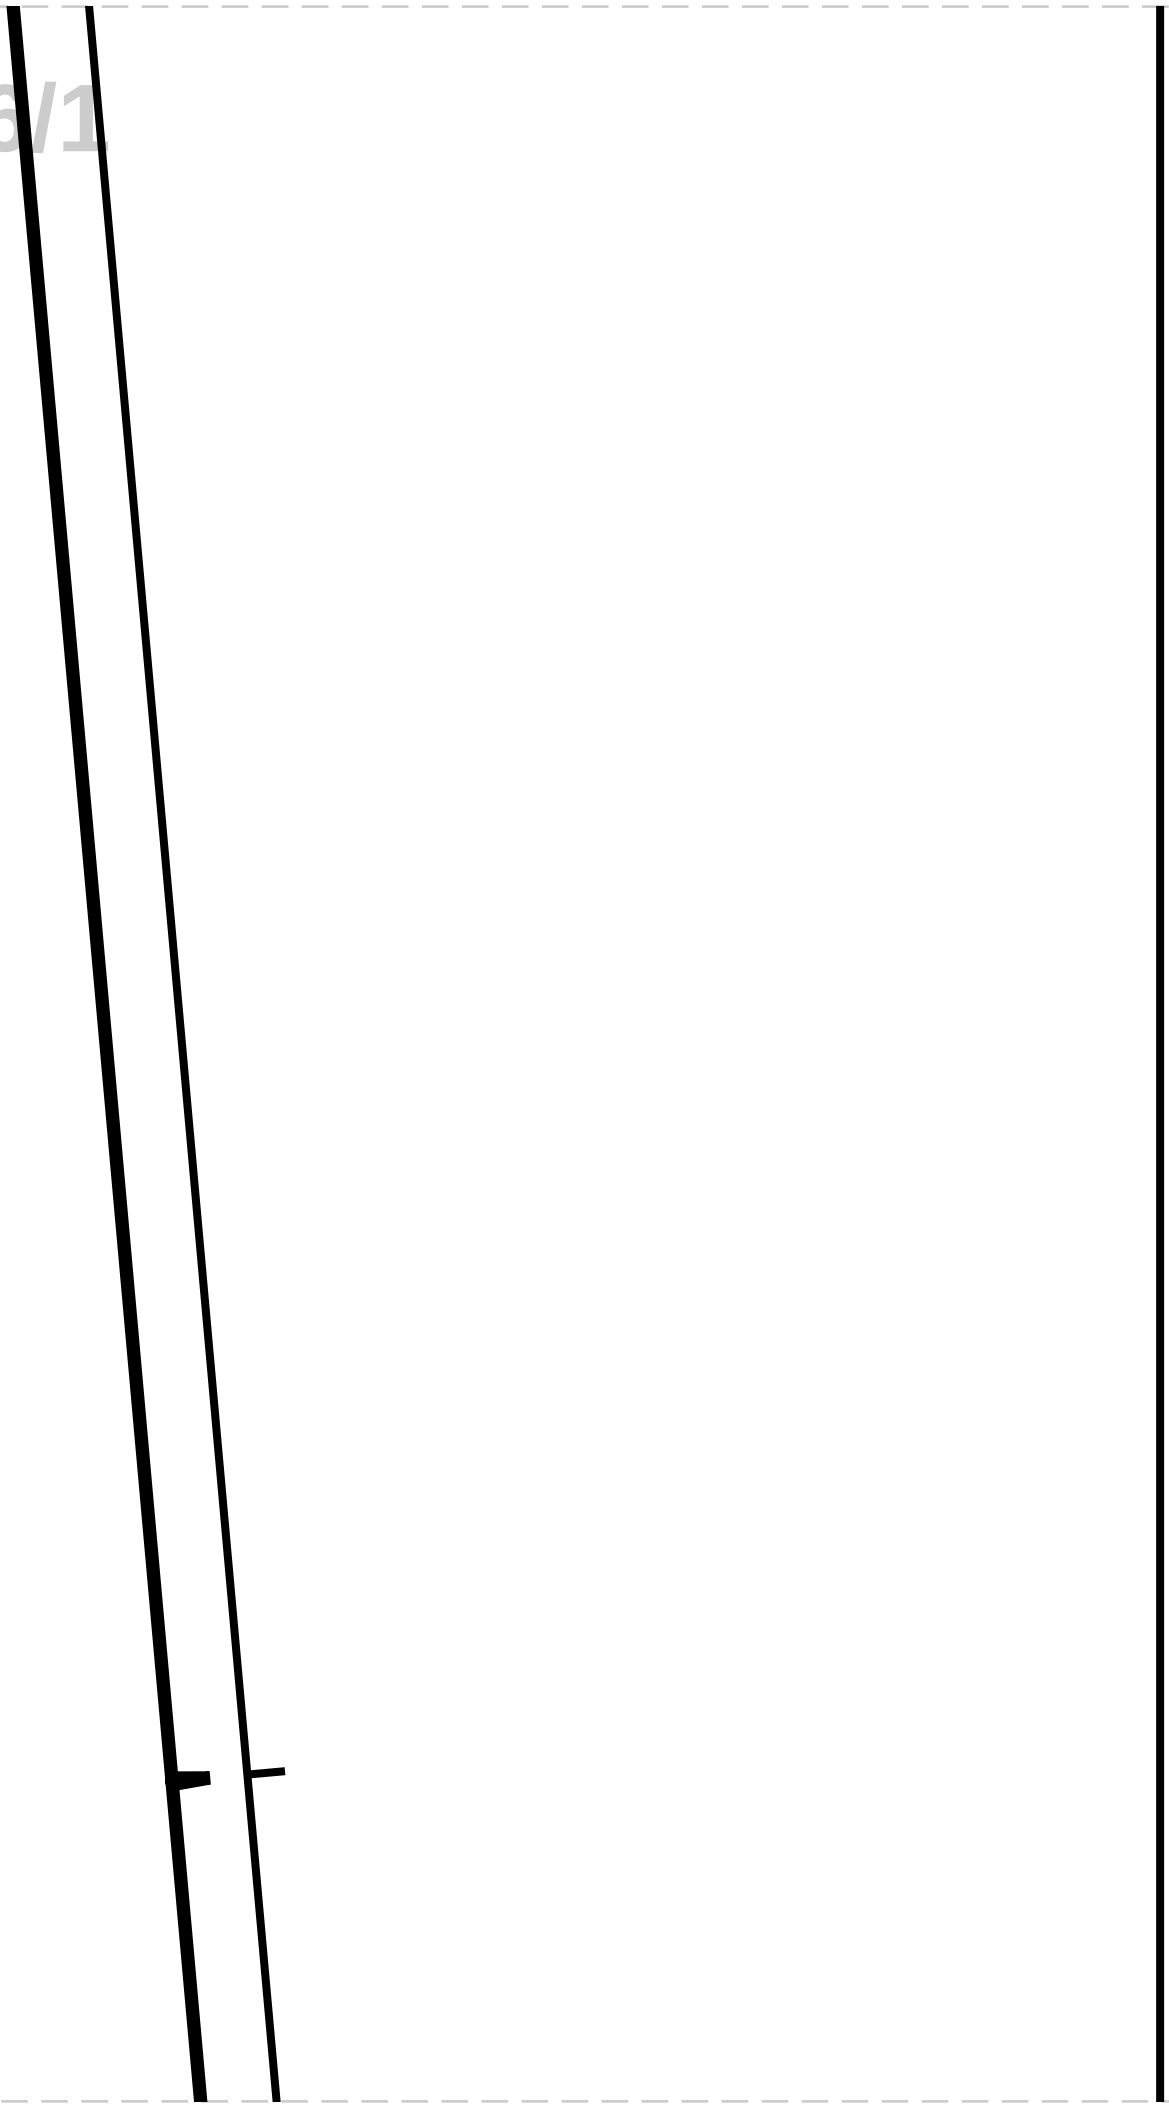


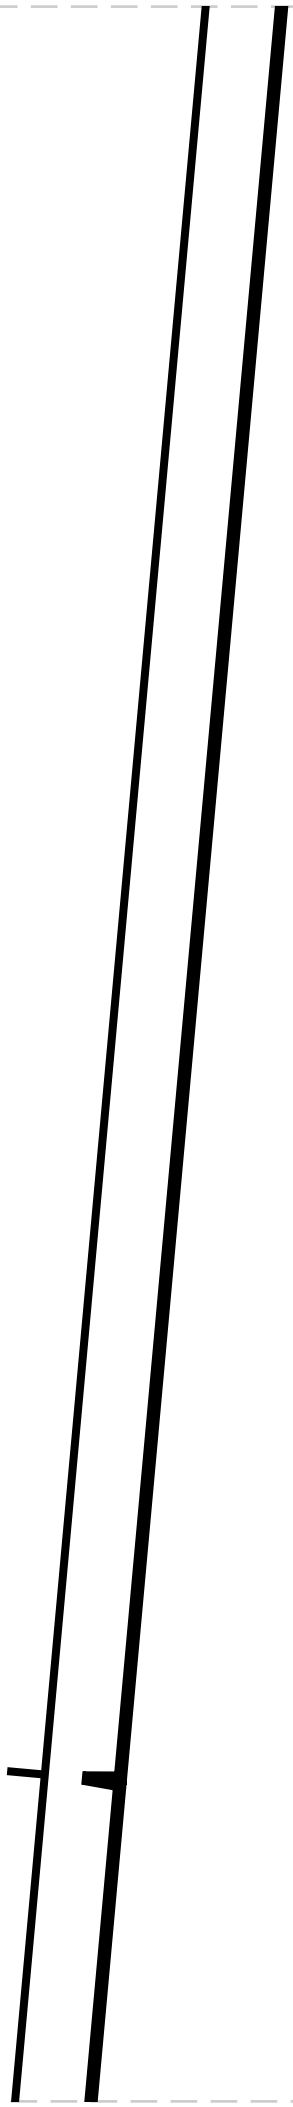


6/3

6/4

6/5

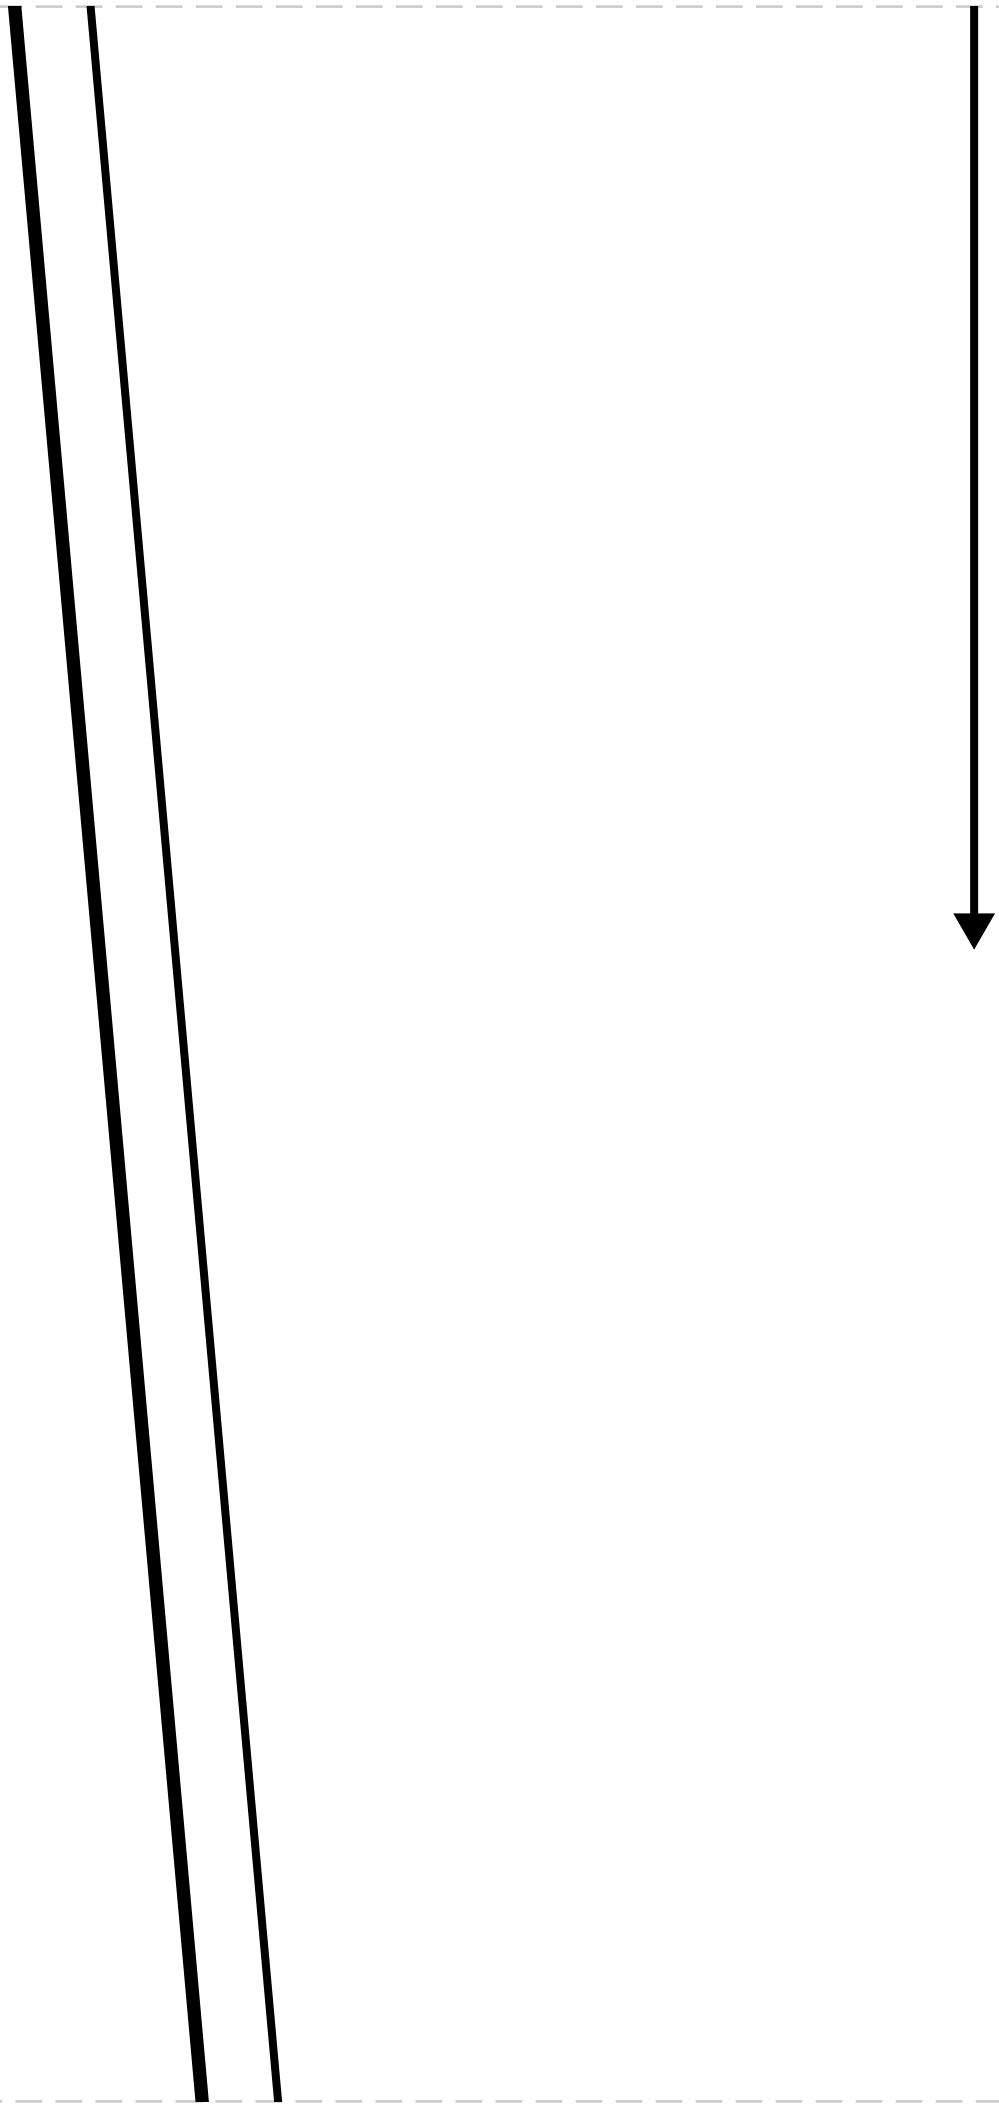

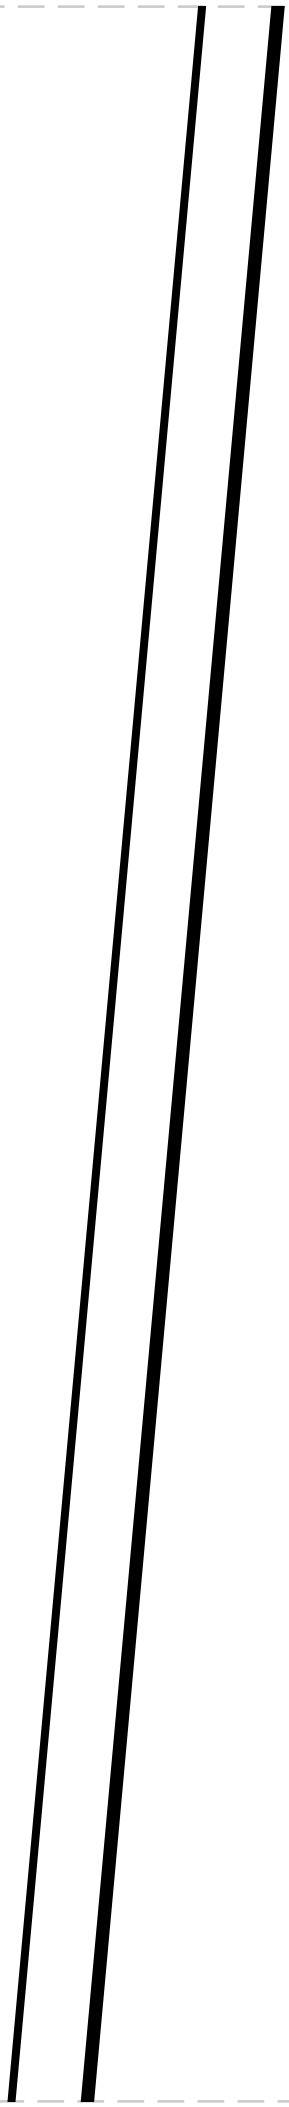


7/3


7/4

7/5

7/6

8/1

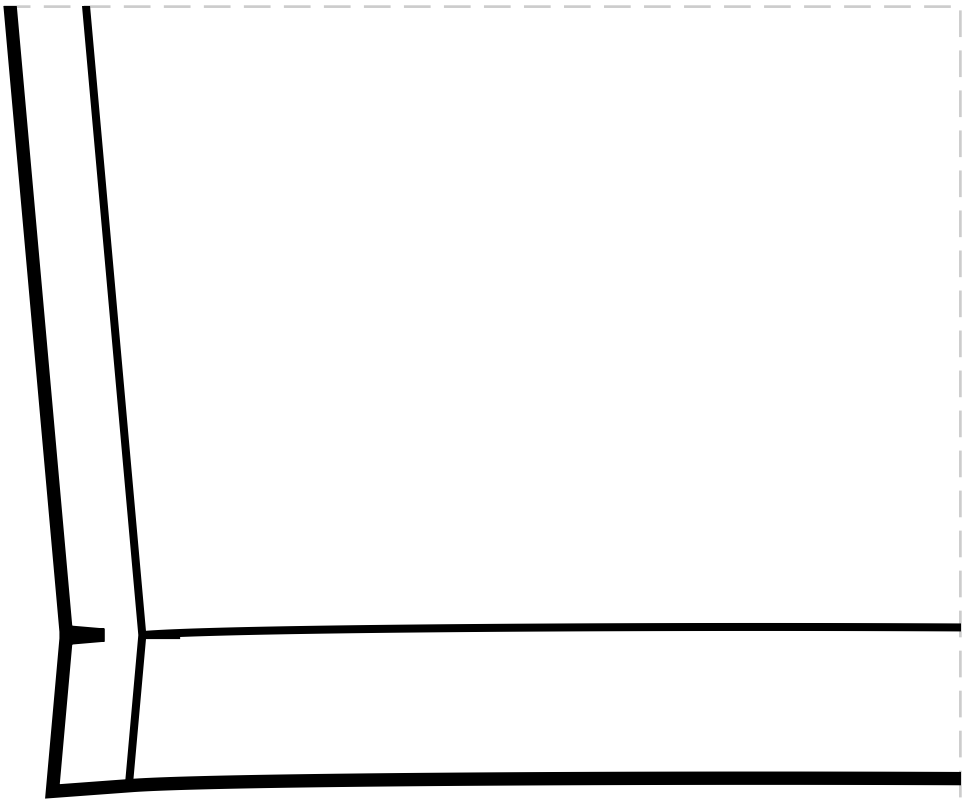

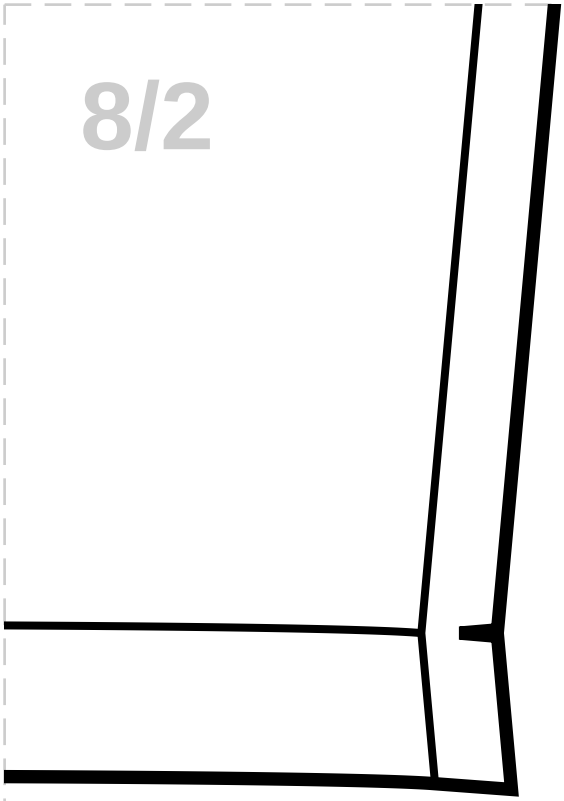

8/3

8/4

8/5

8/6

8/7