CozySewPatterns

SEWING PATTERNS

Print this Calibration Test page first!

Size: Height: 167.75, Bust: 124.25, Waist: 110.5, Hips: 130.75
SIZE 22

Notes

How to print

Printing


Once your Calibration Test Page has been printed, measure the 4”x 4” (10cm) scale box with a ruler. If the lengths match, you can confidently print your pattern. If the rulers do not match, set your print settings to 100% or Actual and retry.

Cutting

Your printouts will always have a dashed border to perfectly match your sheets. Cut off the right edge of each page. Be careful not to cut beyond the dashed mark, otherwise your patterns will not align accurately.

Tapping

Group each sheet by the second number marked on each pate i.e. in a group 1, there are: 1/1, 2/1, 3/1, 4/1, etc. In a group 2: 1/2, 2/2 etc. 2. Place page 1/1 on top of the page 2/1, overlapping the right side edge. Match corners and crosses and secure with a pin or tape. Then use a scotch tape to permanently attach the sheets together.

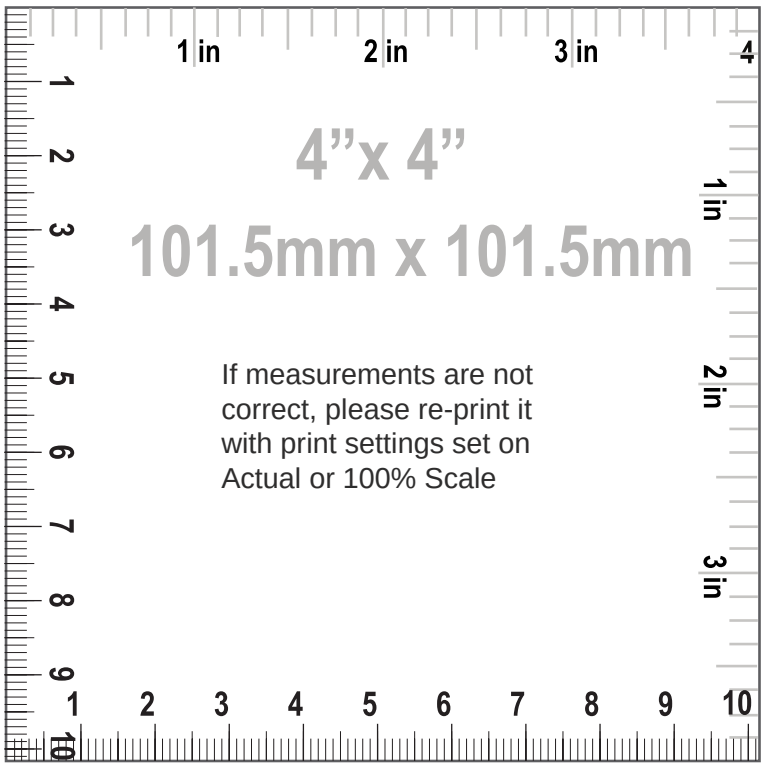

SIZE 22
Seam Allowance: 1 (3/8 in)

Pattern pieces:

1. "PANTS FRONT", MAIN FABRIC: Cut 2
2. "PANTS BACK", MAIN FABRIC: Cut 2
3. "WAISTBAND LEFT", MAIN FABRIC, FUSIBLE INTERFACING: Cut 1
4. "WAISTBAND RIGHT", MAIN FABRIC, FUSIBLE INTERFACING: Cut 1
5. "POCKET BAG", MAIN FABRIC: Cut 2
6. "FLY FACING", MAIN FABRIC: Cut 1
7. "POCKET LINING", LINING: Cut 2
8. "FLY INTERFACING", FUSIBLE INTERFACING: Cut 1
9. "FUSIBLE INTERFACING FOR WAISTBAND", FUSIBLE INTERFACING: Cut 2
10. "BACK POCKET WELT", MAIN FABRIC, FUSIBLE INTERFACING: Cut 2
11. "BACK INNER POCKET BAG", LINING: Cut 2
12. "BACK OUTER POCKET BAG", LINING: Cut 2

Pattern Specs (Circumferences are divided by 2):


1. Hem max 3.00 none (1 1/8 in)
2. Seam allowance max 2.00 none (3/4 in)
3. Stretch factor 1.00 none (3/8 in)
4. Stretch factor horizontal 1.00 none (3/8 in)
5. Stretch factor vertical 1.00 none (3/8 in)
6. Pocket bag height 31.39 cm (12 3/8 in)
7. Pocket side seam 21.13 cm (8 3/8 in)
8. Pocket waist seam 21.13 cm (8 3/8 in)
9. Back pocket entry length 14.88 cm (5 7/8 in)
10. Side seam back pocket position 11.68 cm (4 5/8 in)
11. Waist to back pocket length 14.20 cm (5 5/8 in)
12. Back pocket width welt 2.50 cm (1 in)
13. Fly zipper length 23.00 cm (9 in)
14. Waist 58.63 cm (23 1/8 in)
15. Hips 68.65 cm (27 in)
16. Pleat depth 1.70 cm (5/8 in)
17. Thigh 43.72 cm (17 1/4 in)


18. Knee 34.93 cm (13 3/4 in)
19. Bottom opening 24.01 cm (9 1/2 in)
20. Front rise 34.42 cm (13 1/2 in)
21. Back rise 51.20 cm (20 1/8 in)
22. Crotch height 32.53 cm (12 3/4 in)
23. Inseam length 64.98 cm (25 5/8 in)
24. Pants side seam length 99.28 cm (39 1/8 in)
25. Waistband partly elastic width 3.00 cm (1 1/8 in)
26. Waistband width 3.30 cm (1 1/4 in)
27. Waistband length 126.31 cm (49 3/4 in)
28. Waistband partly elastic length 62.04 cm (24 3/8 in)
29. Waistband button diameter 1.00 cm (3/8 in)
30. Waistband buttons quantity 1.00 pc
31. Seam allowance poc max 3.00 none (1 1/8 in)
32. Back pocket bag height 12.64 cm (5 in)


CozySewPatterns

SEWING PATTERNS

Paper Size: LETTER;
Print Actual Size (100% Scale);

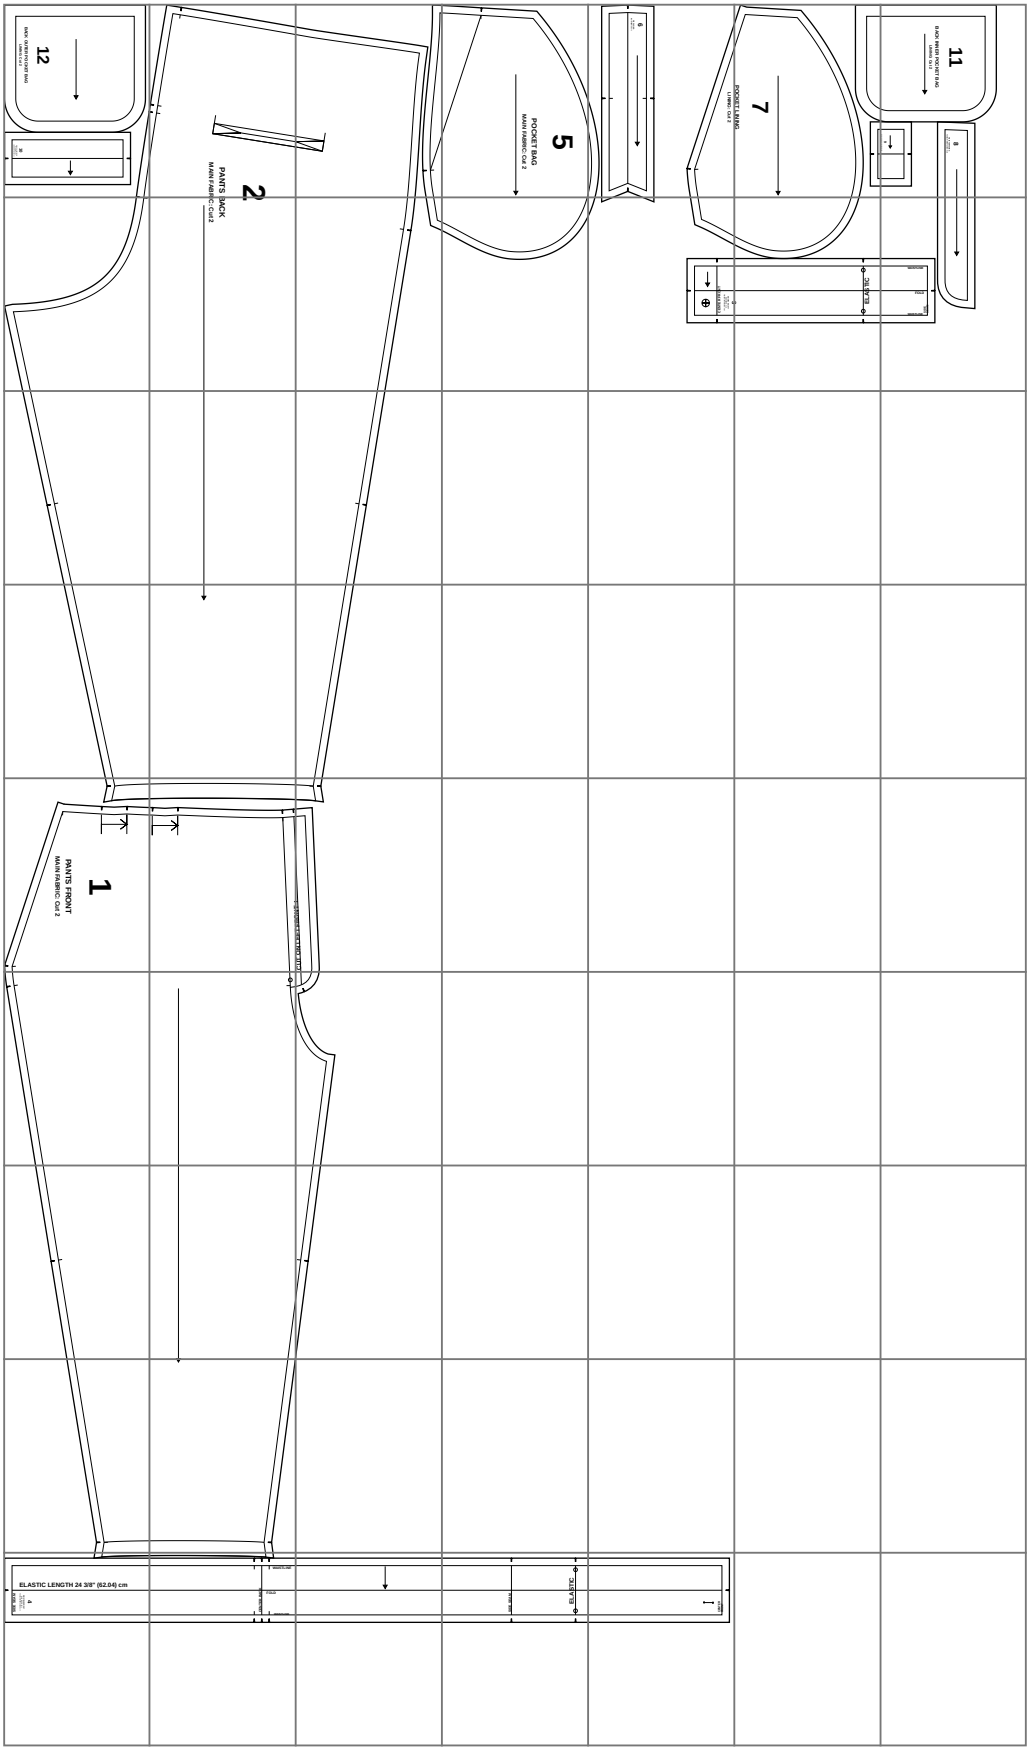

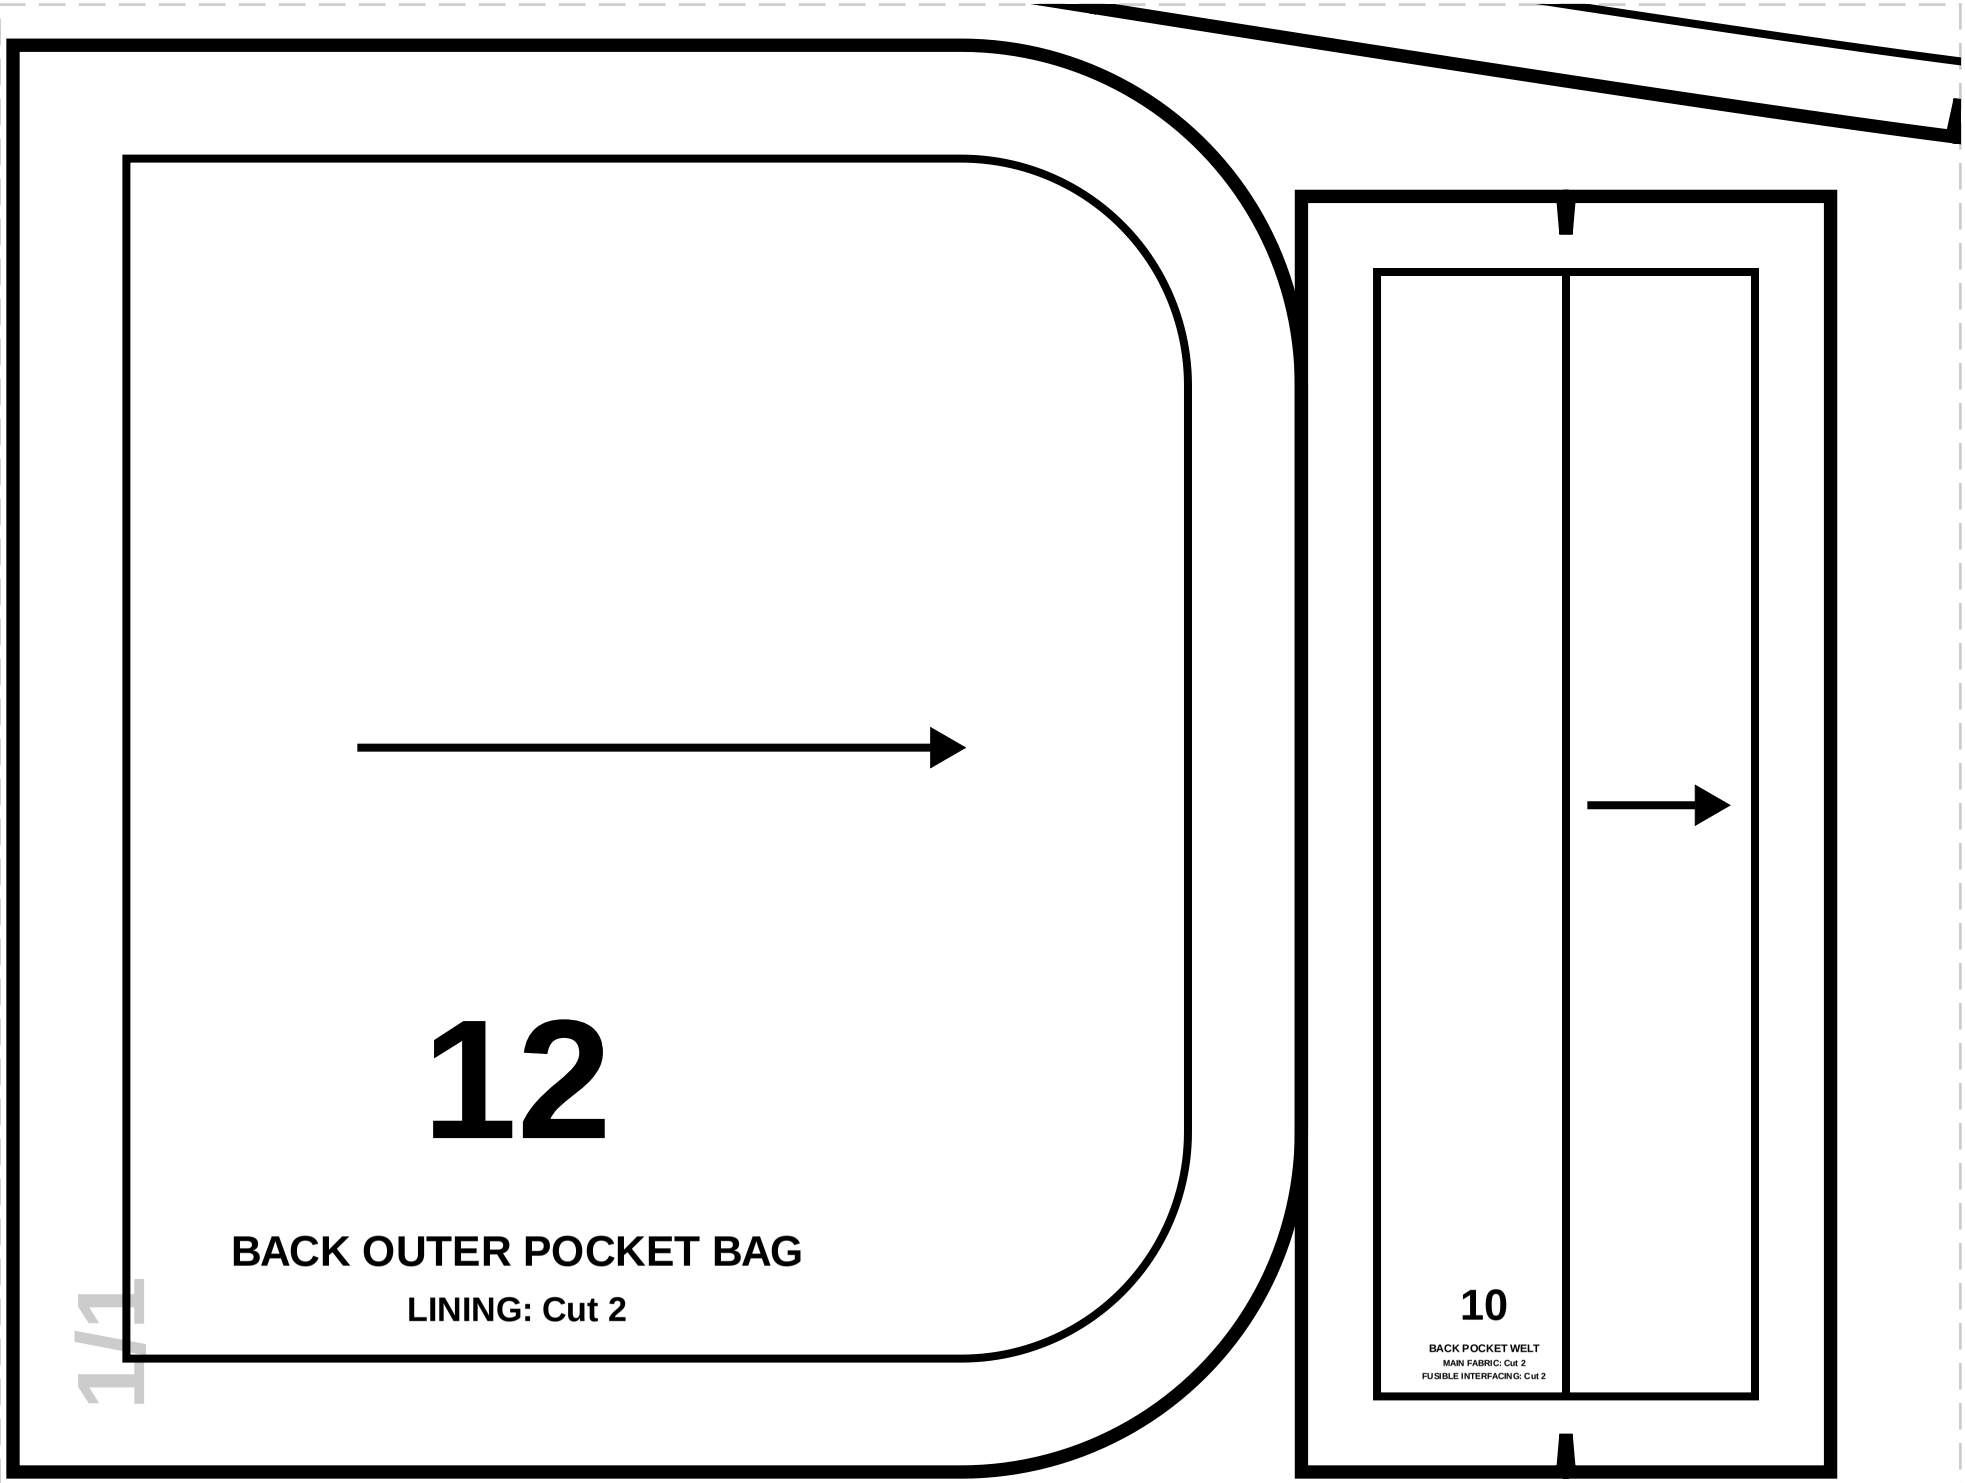
12
BACK OUTER POCKET BAG
LINING: Cut 2
1/1
10
BACK POCKET WELT
MAIN FABRIC: Cut 2
FUSIBLE INTERFACING: Cut 2

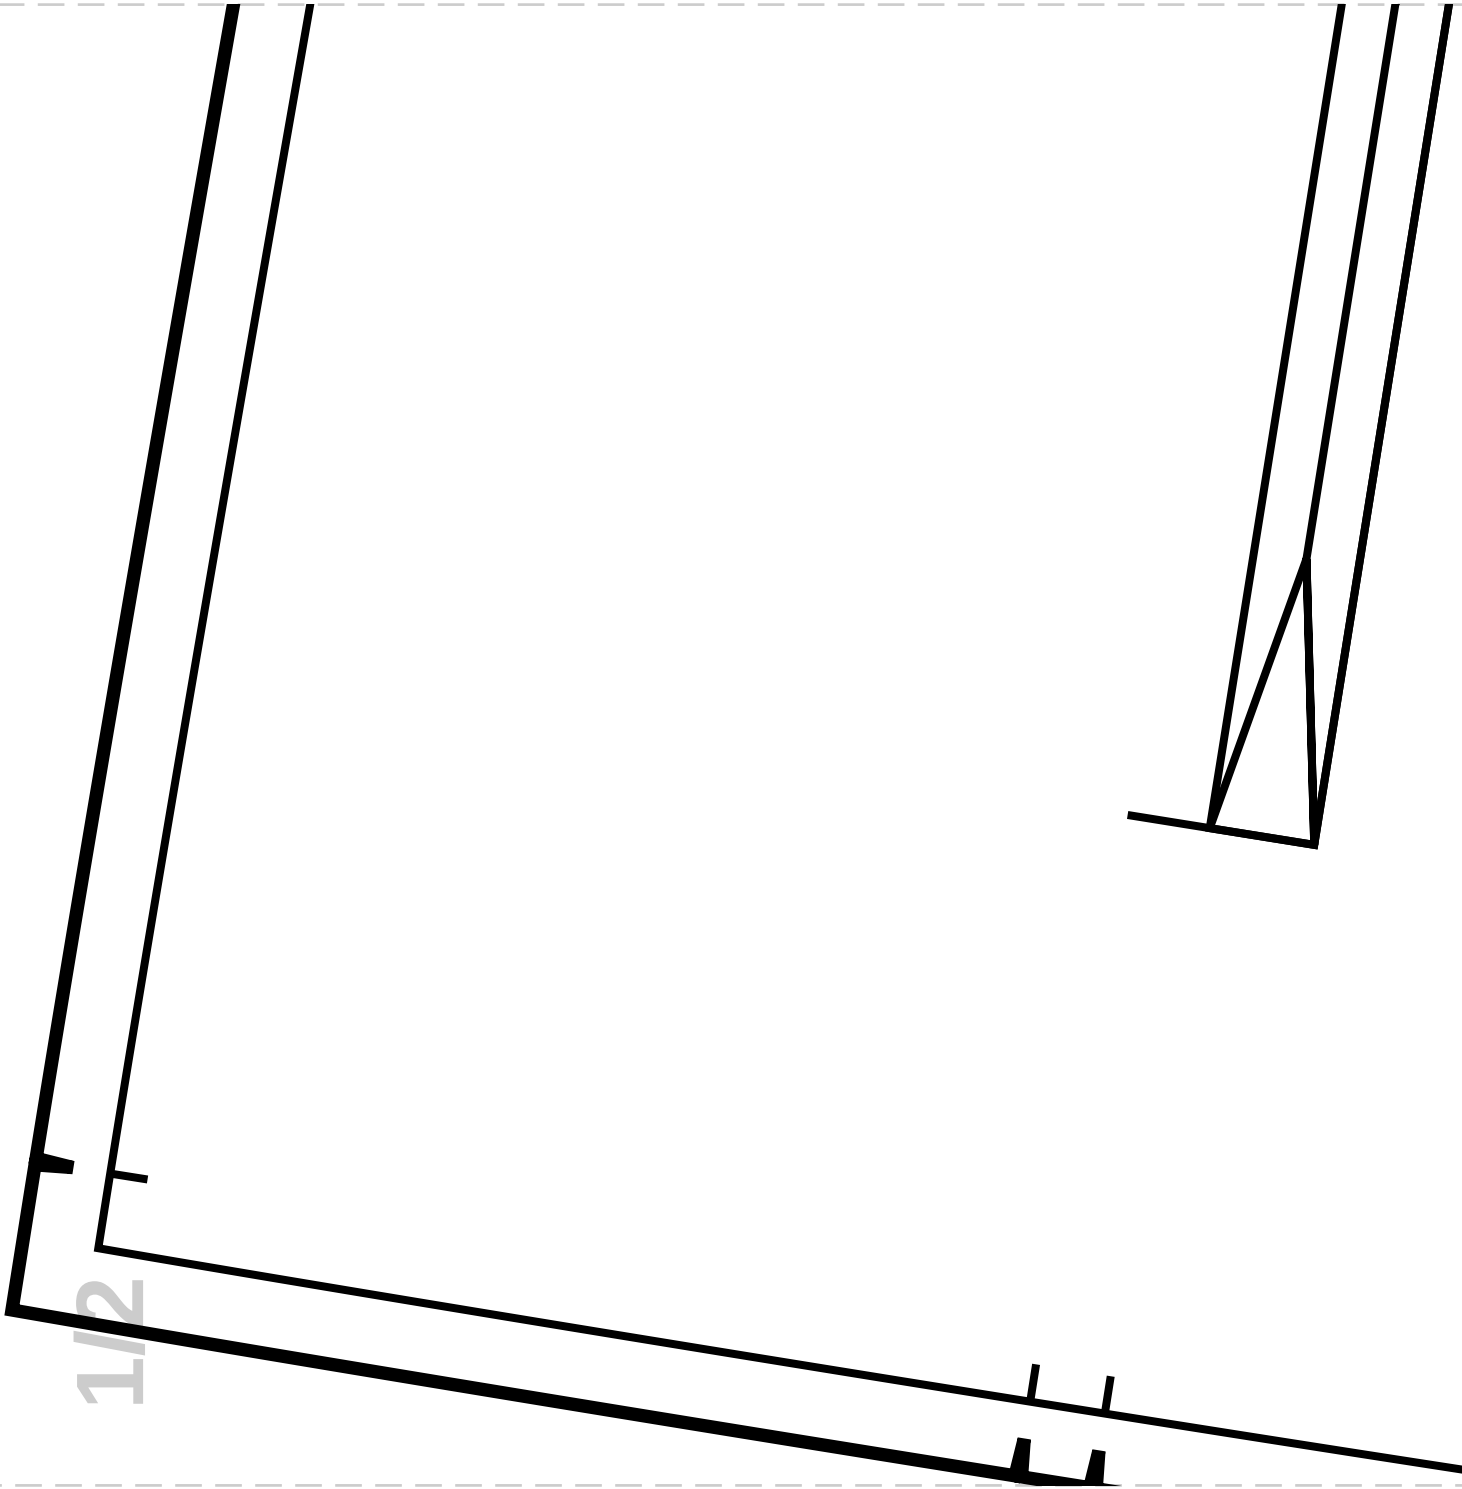



2

PANTS F


MAIN FABR


1/2

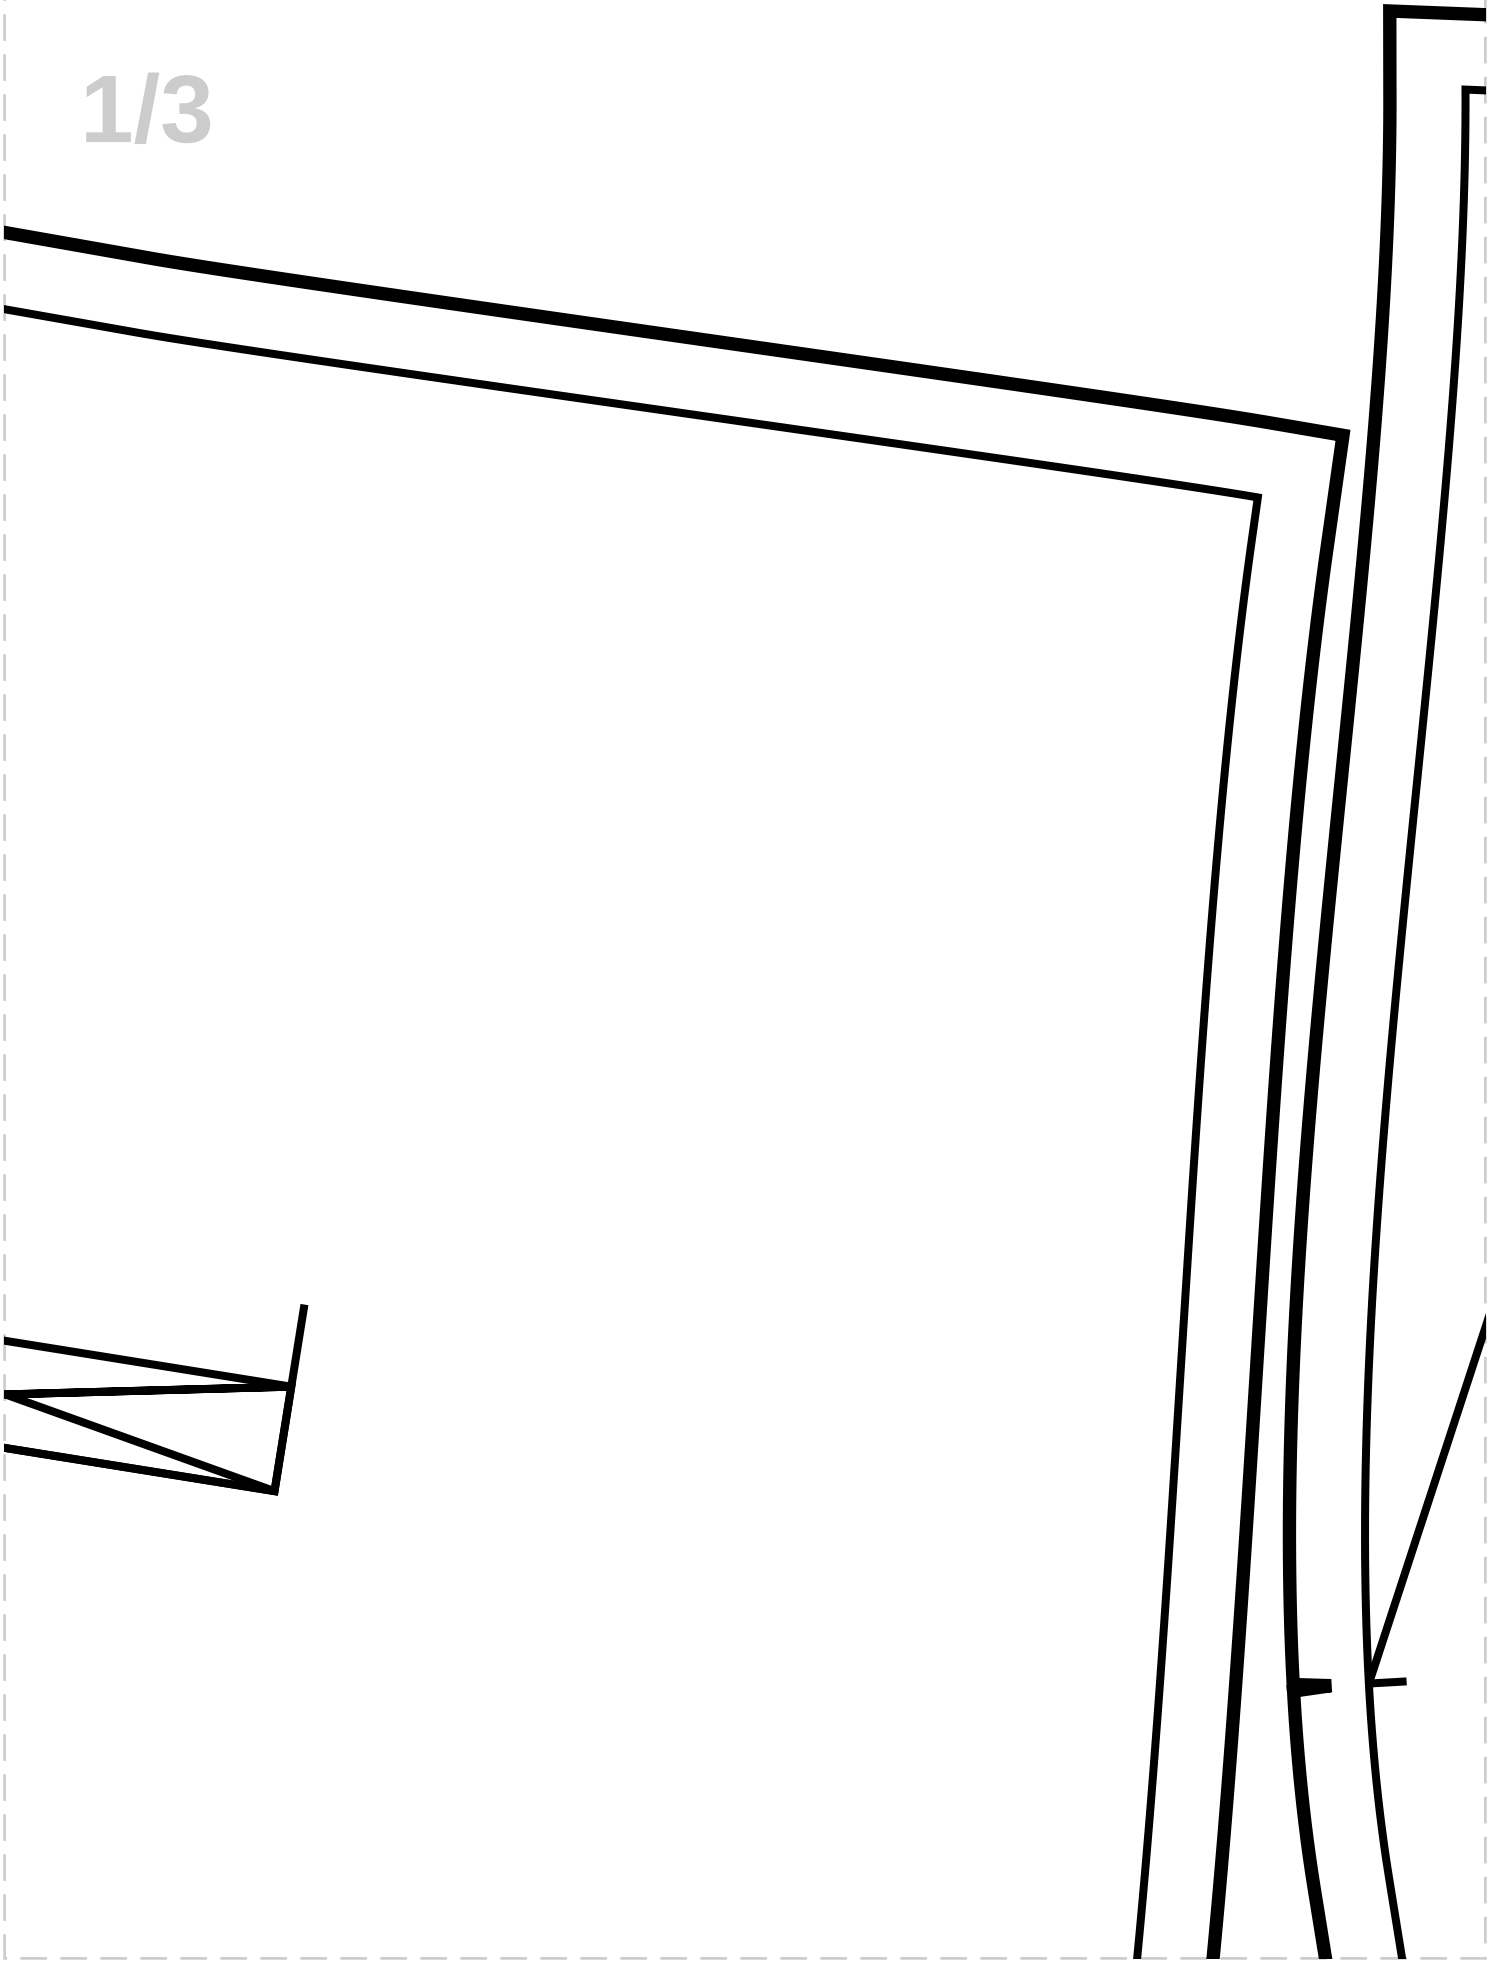

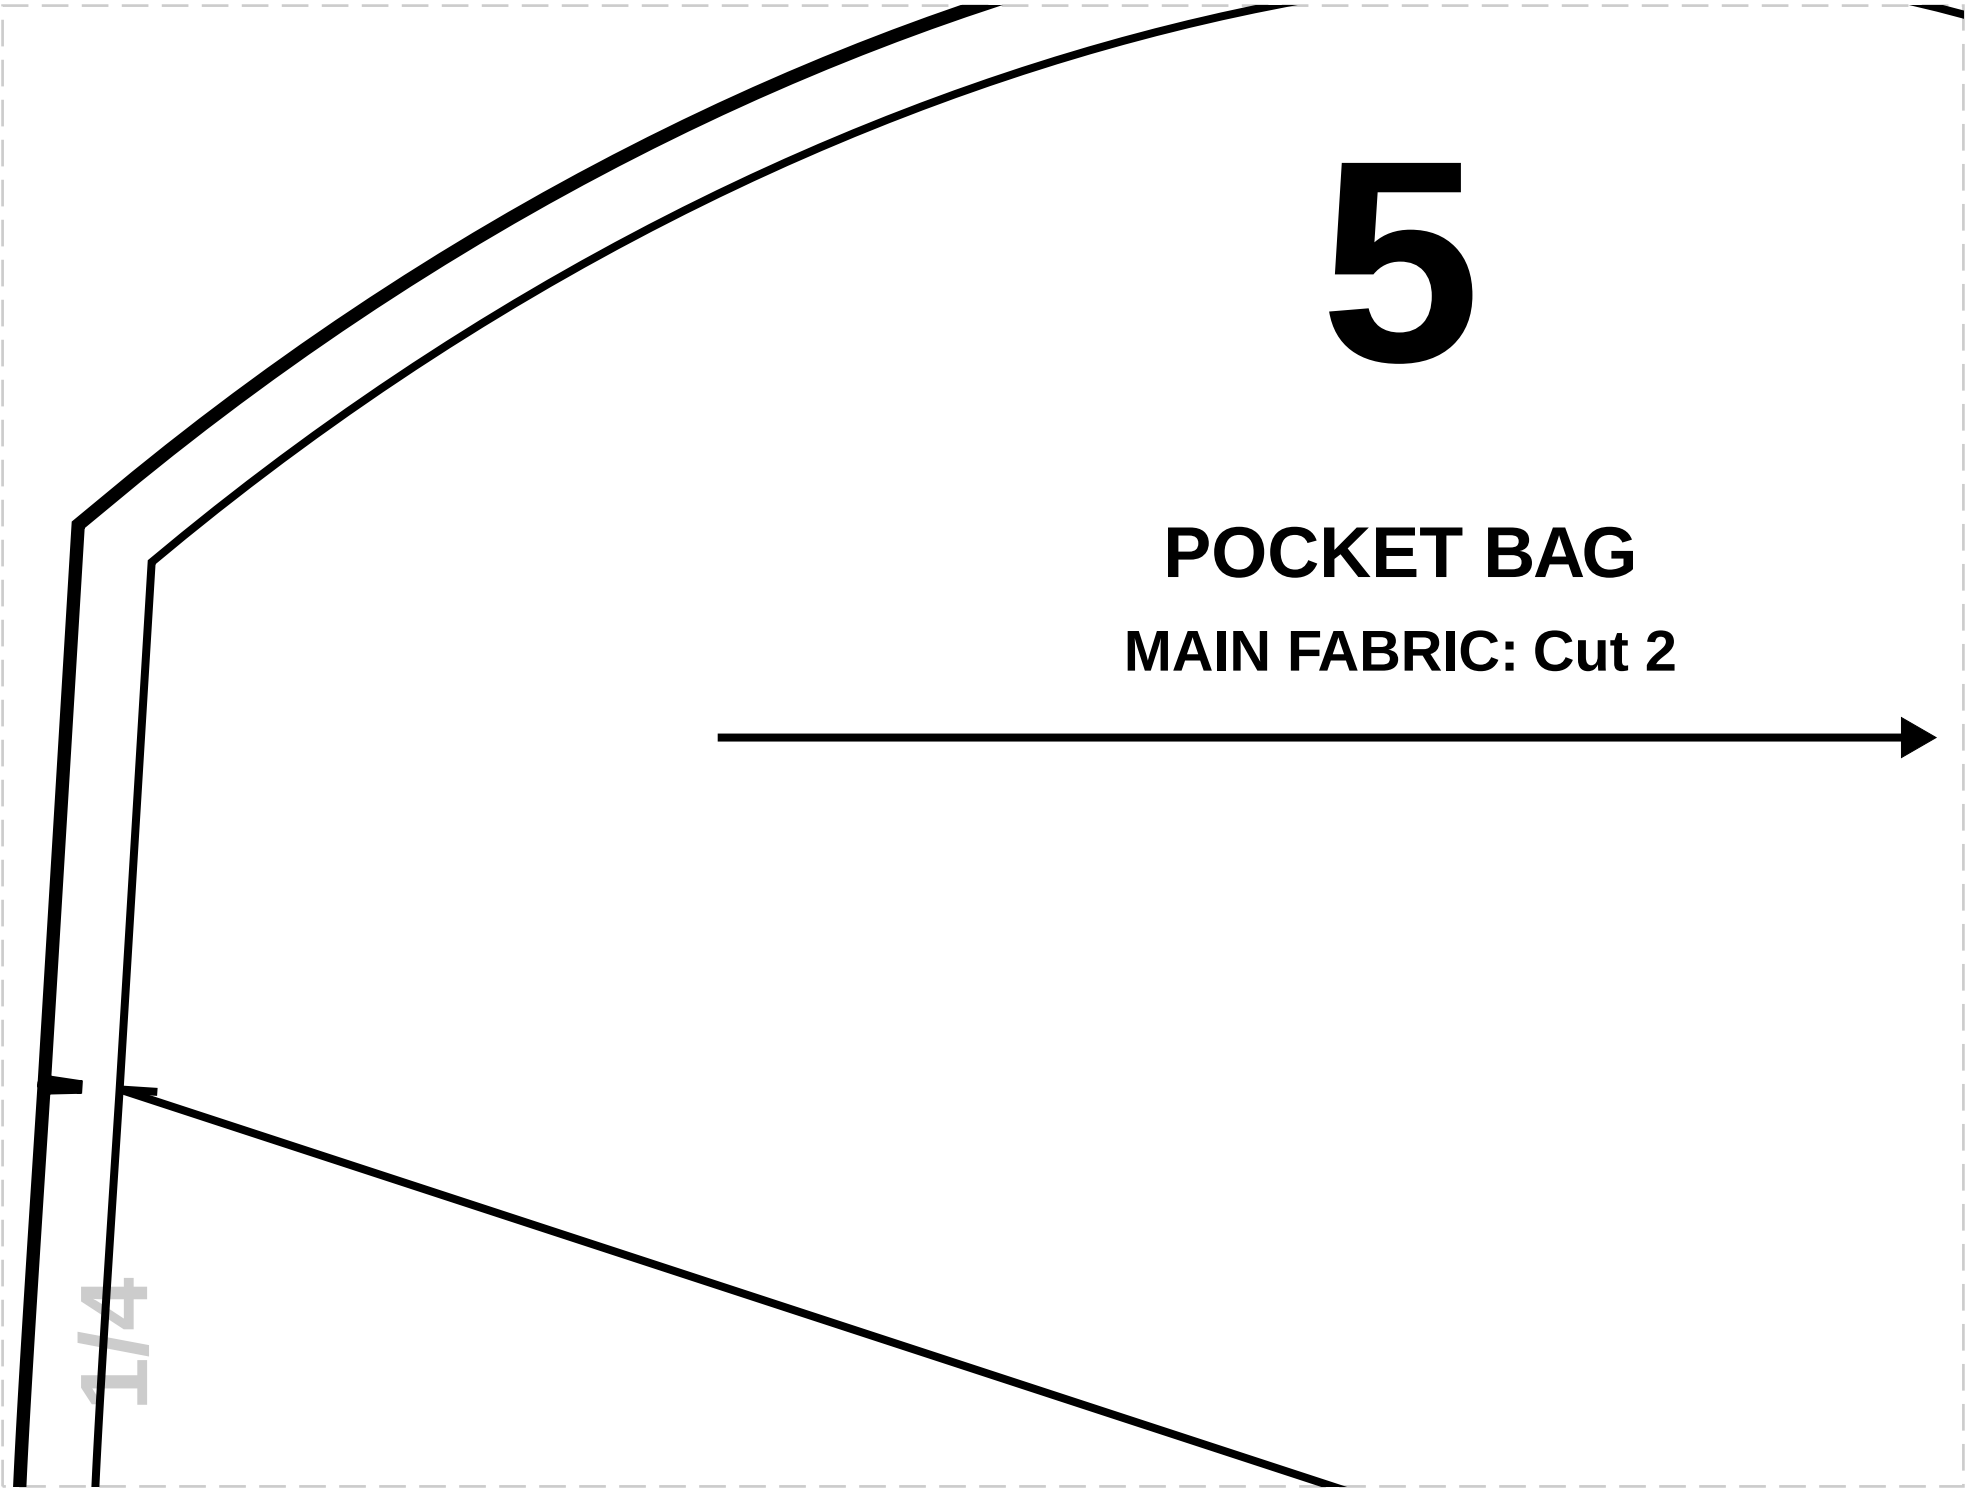

5
POCKET BAG
MAIN FABRIC: Cut 2
1/4


LINING: Cut 2

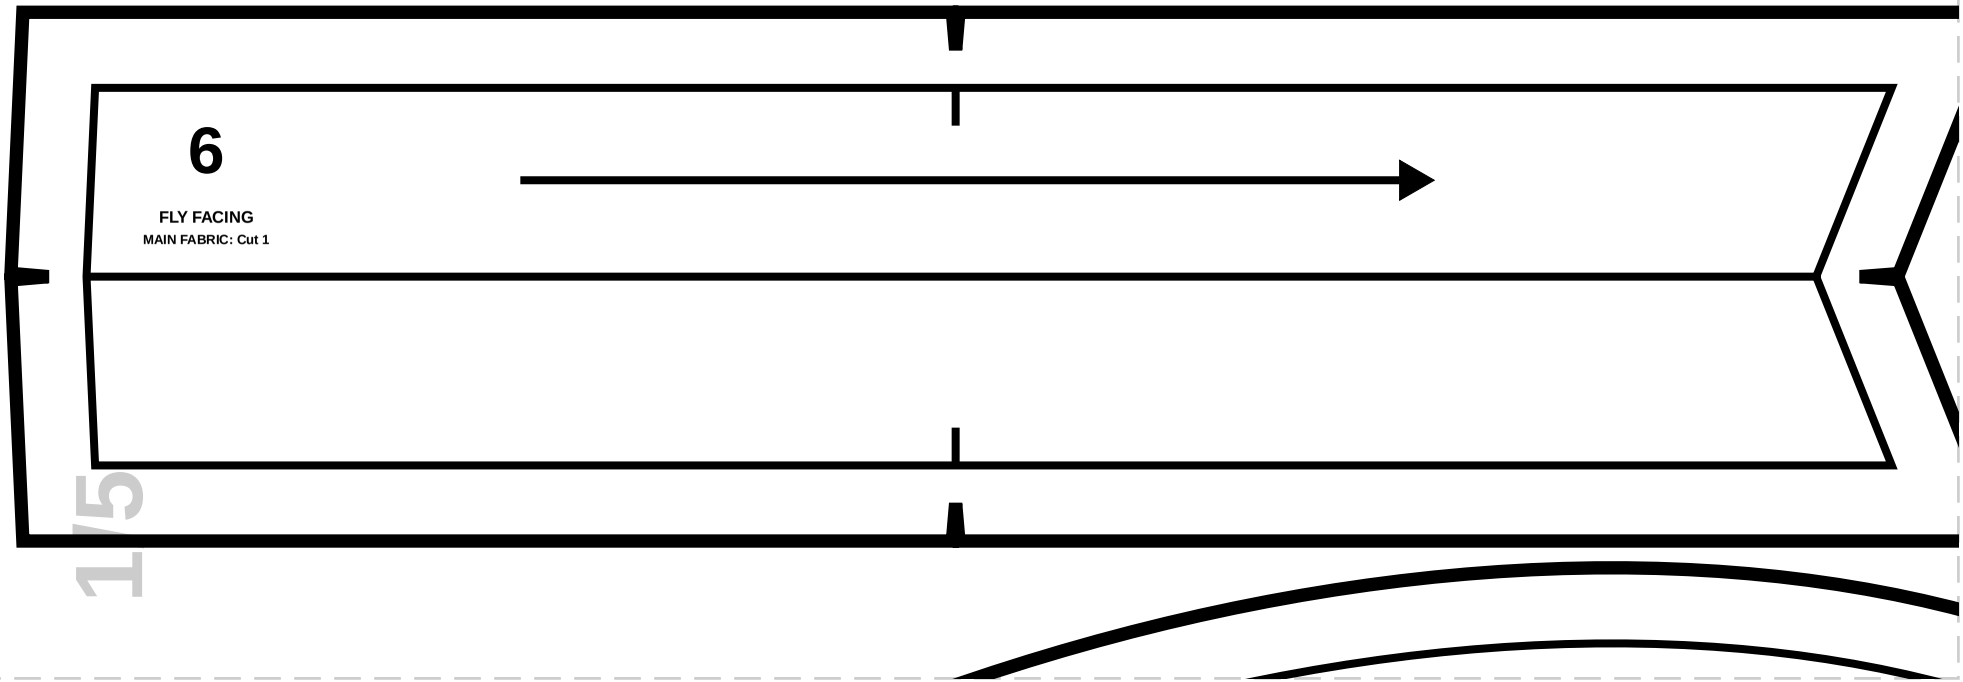

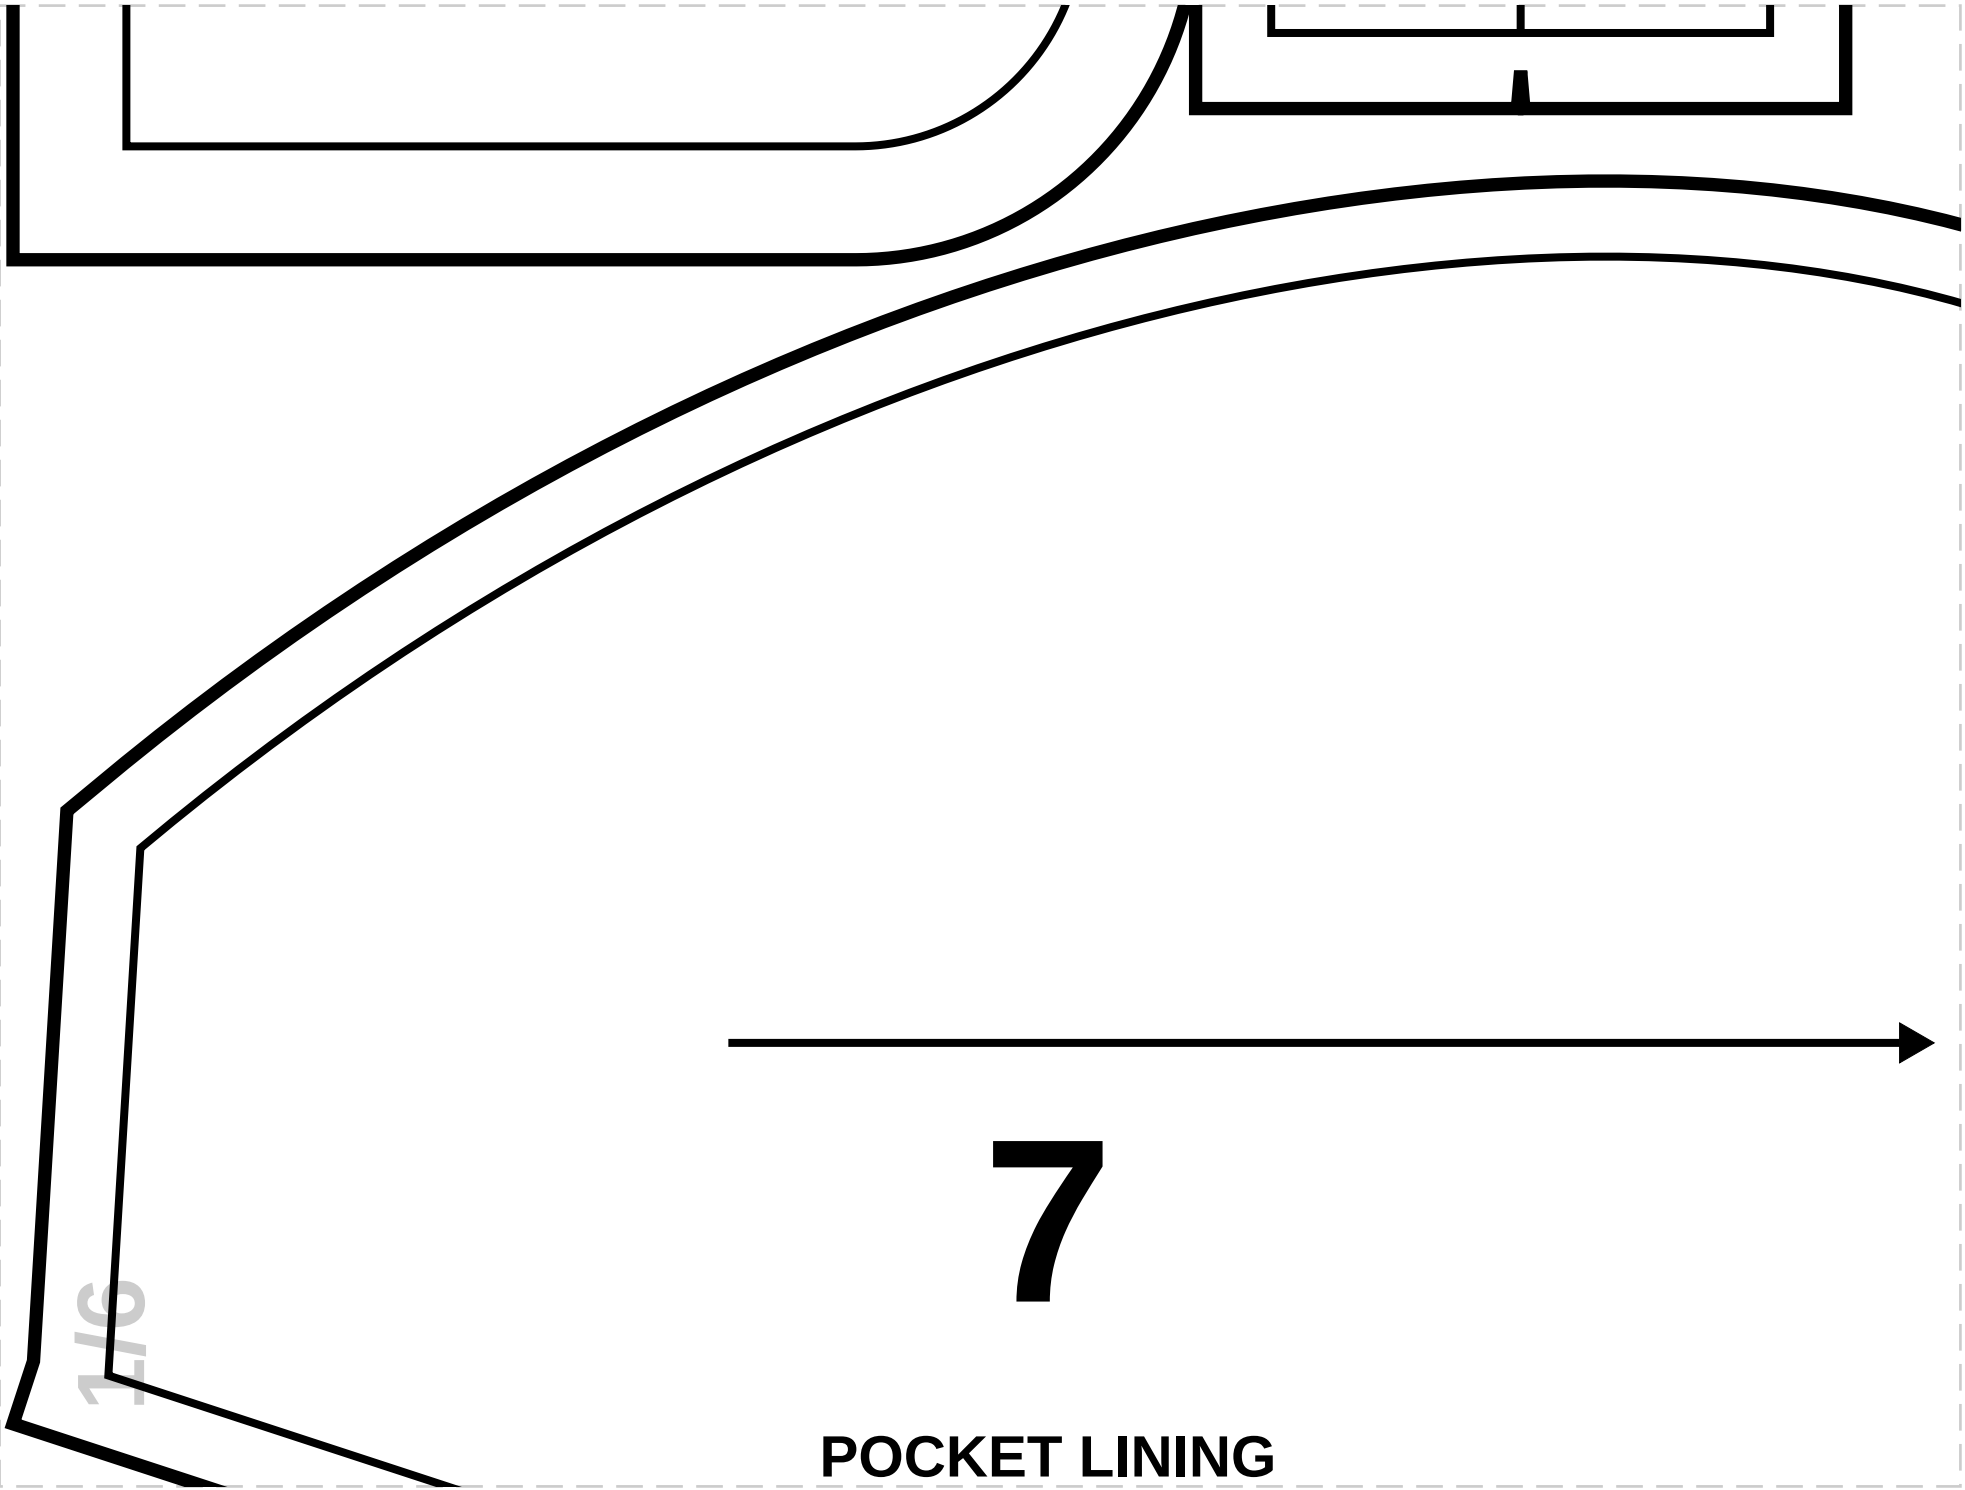


POCKET LINING

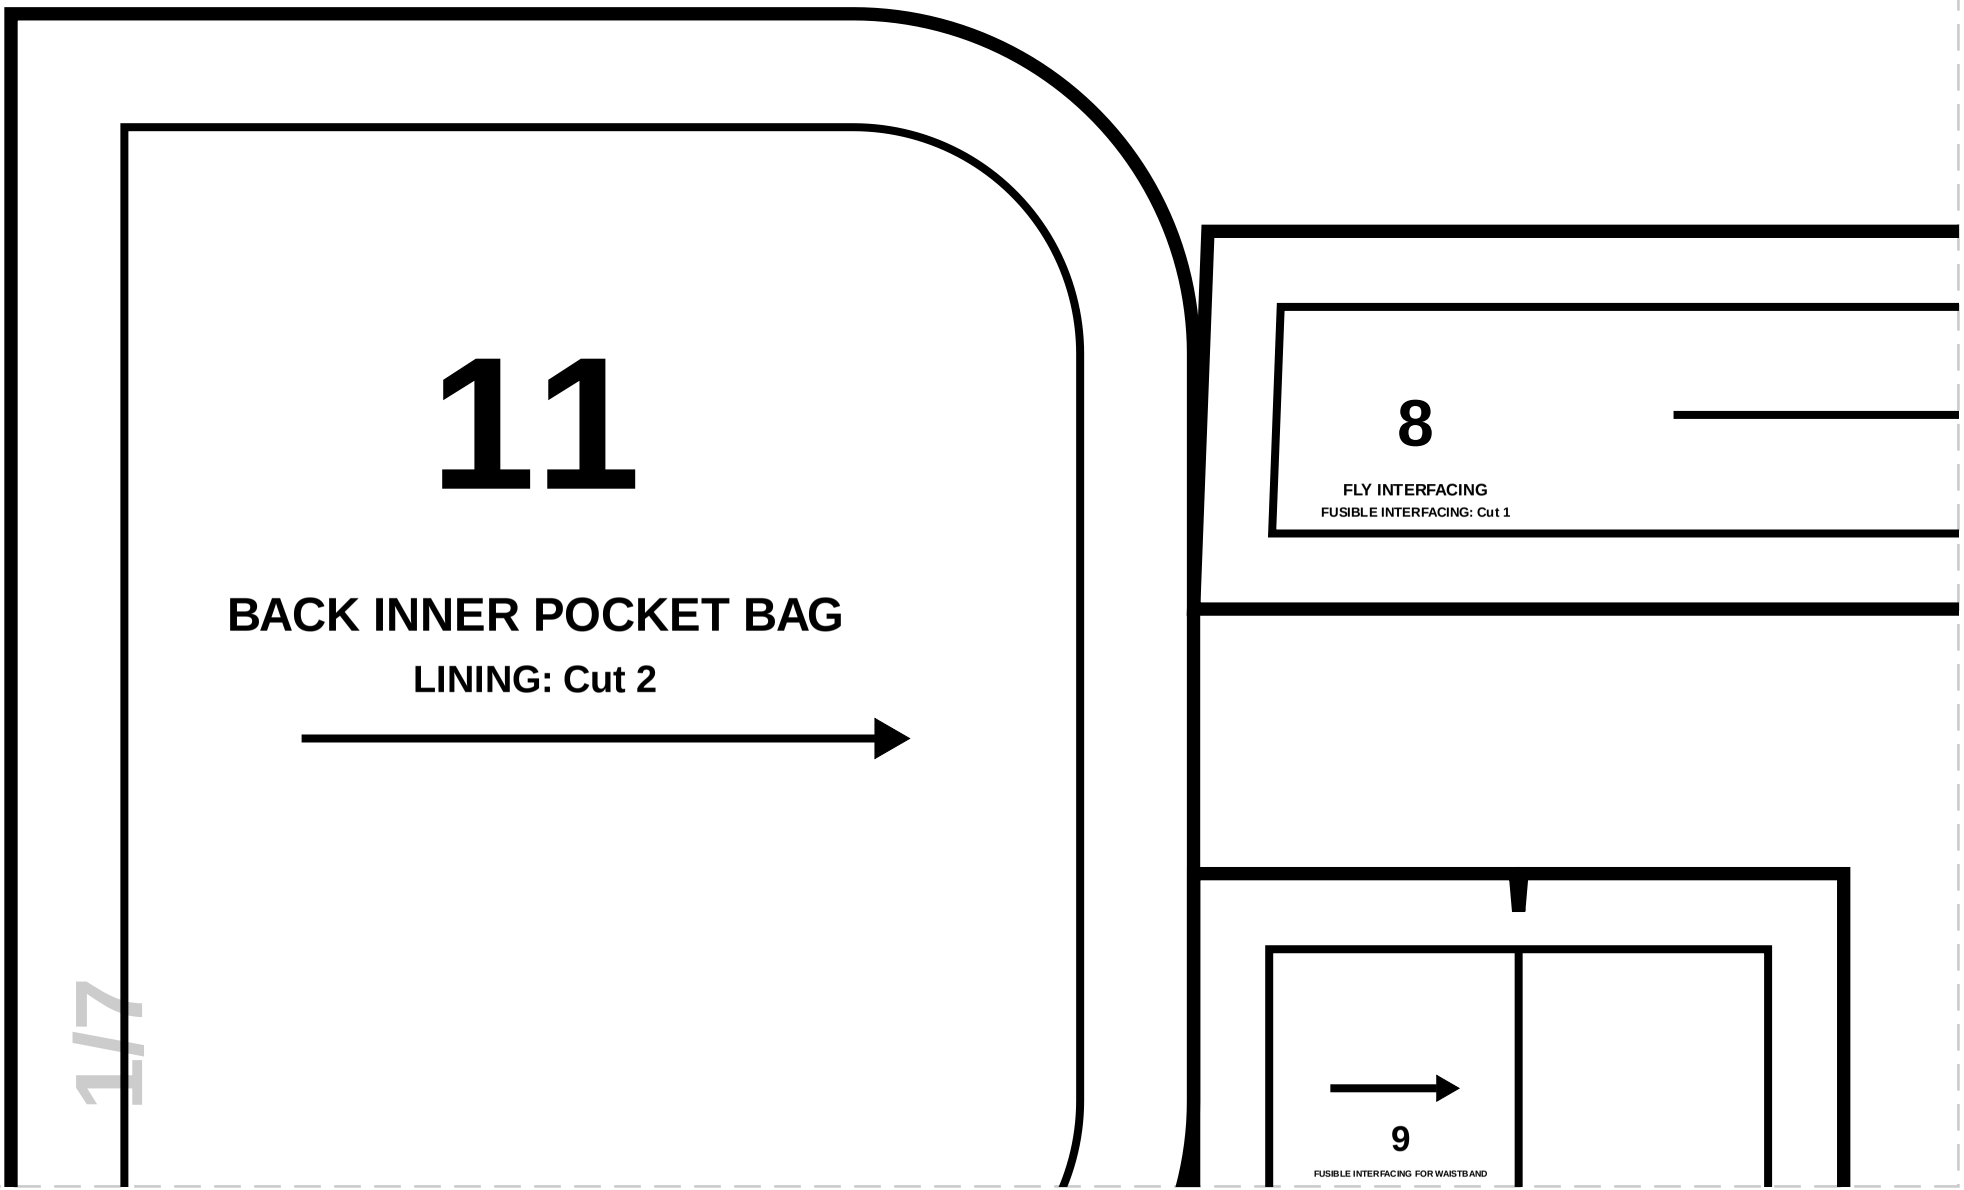
11
BACK INNER POCKET BAG
LINING: Cut 2
8
FLY INTERFACING
FUSIBLE INTERFACING: Cut 1
9
FUSIBLE INTERFACING FOR WAISTBAND

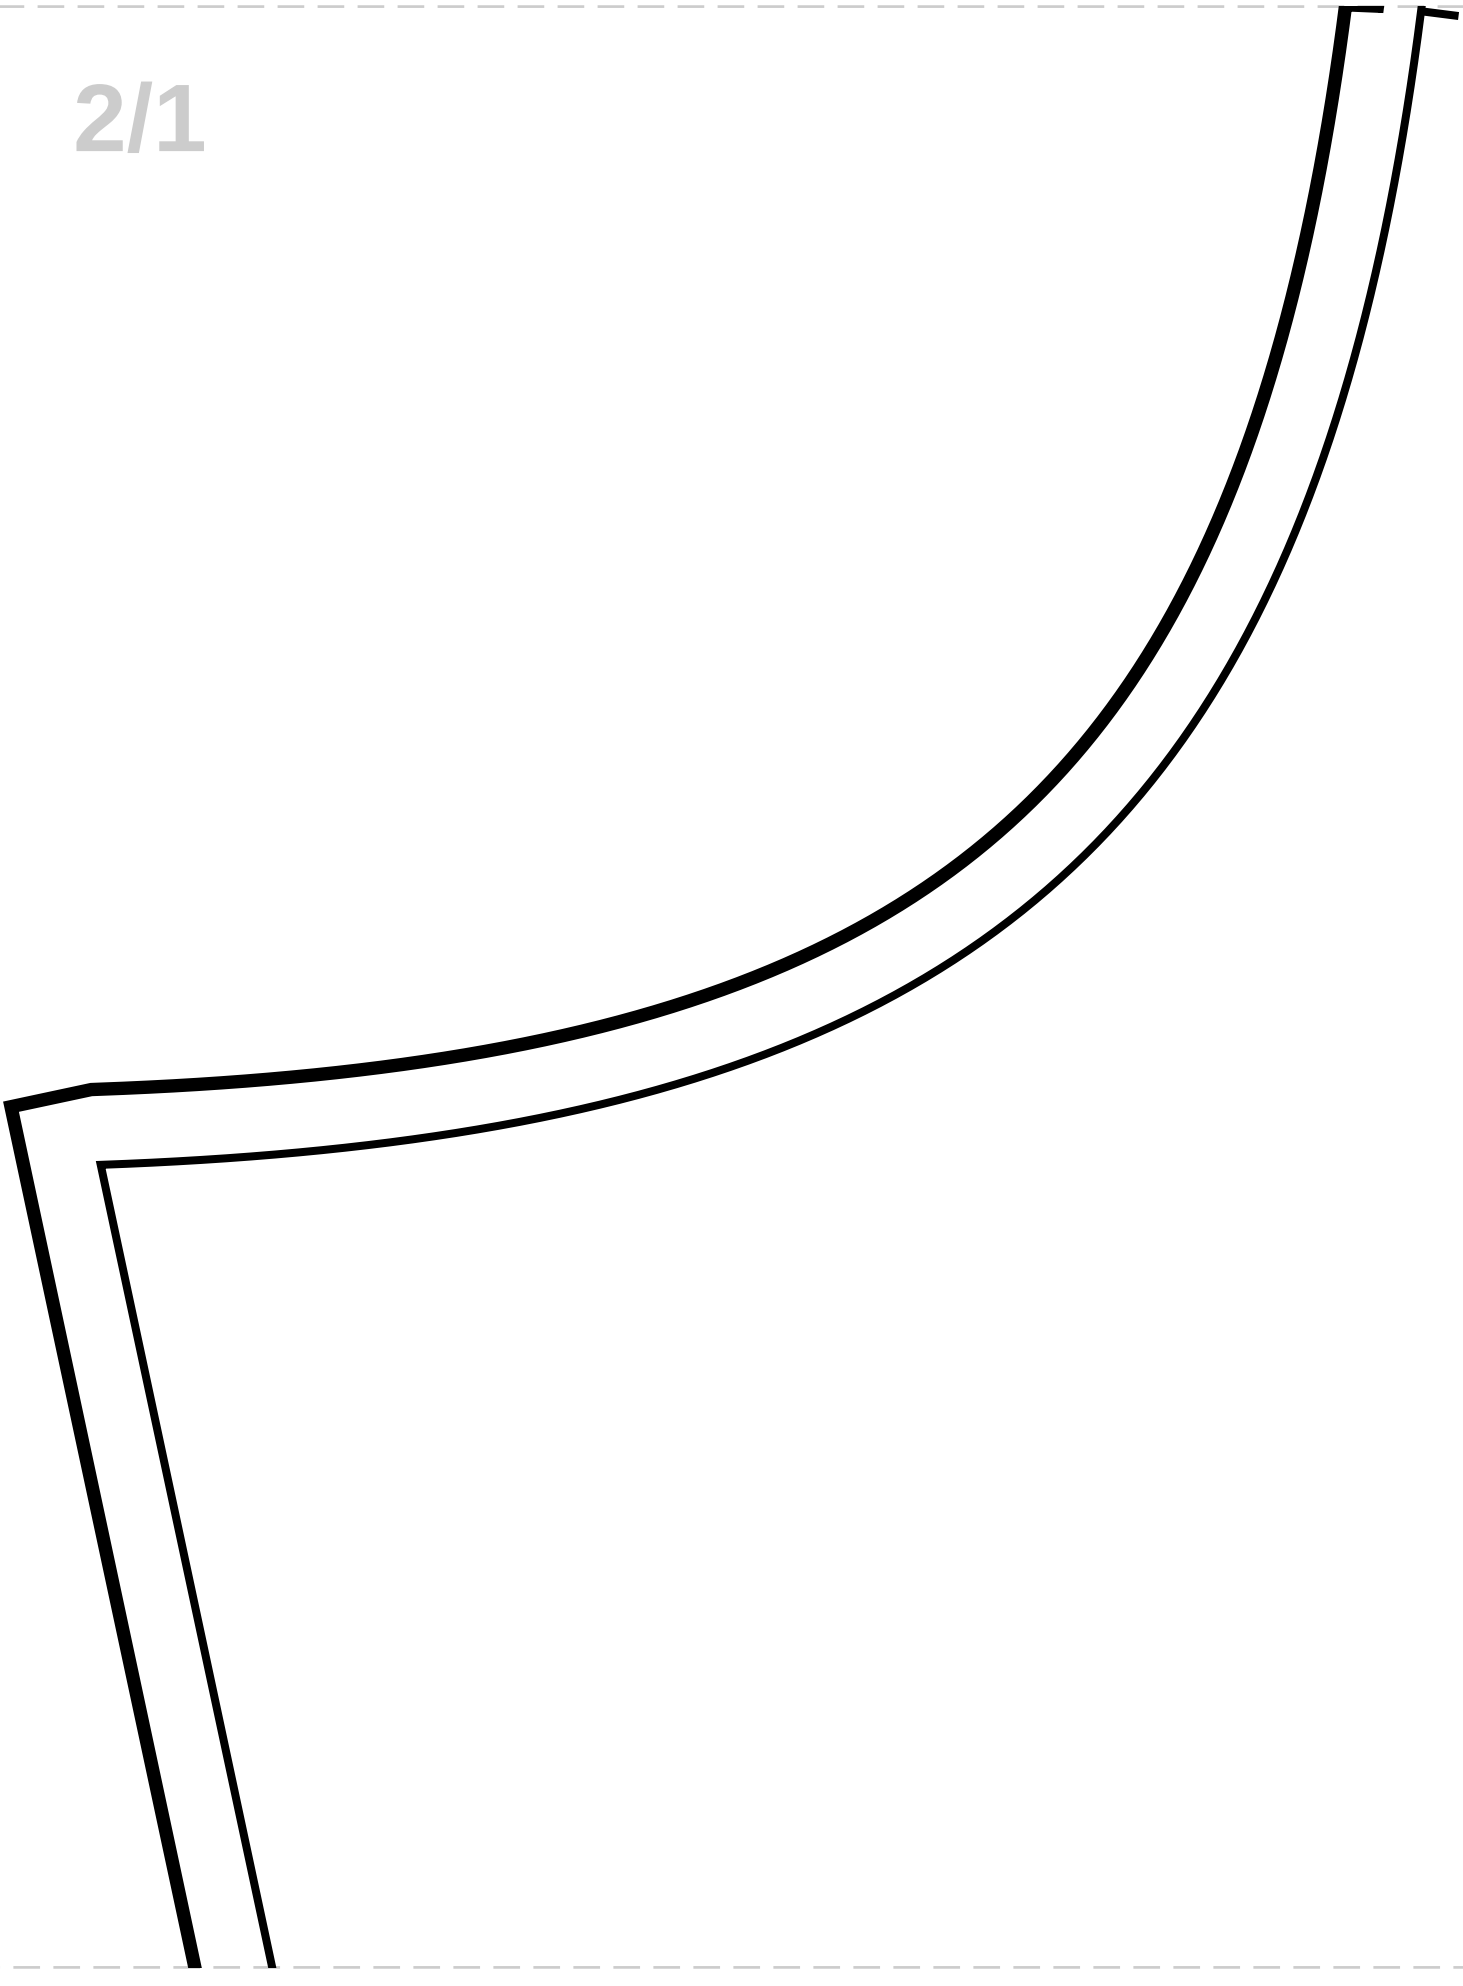



BACK


IC: Cut 2

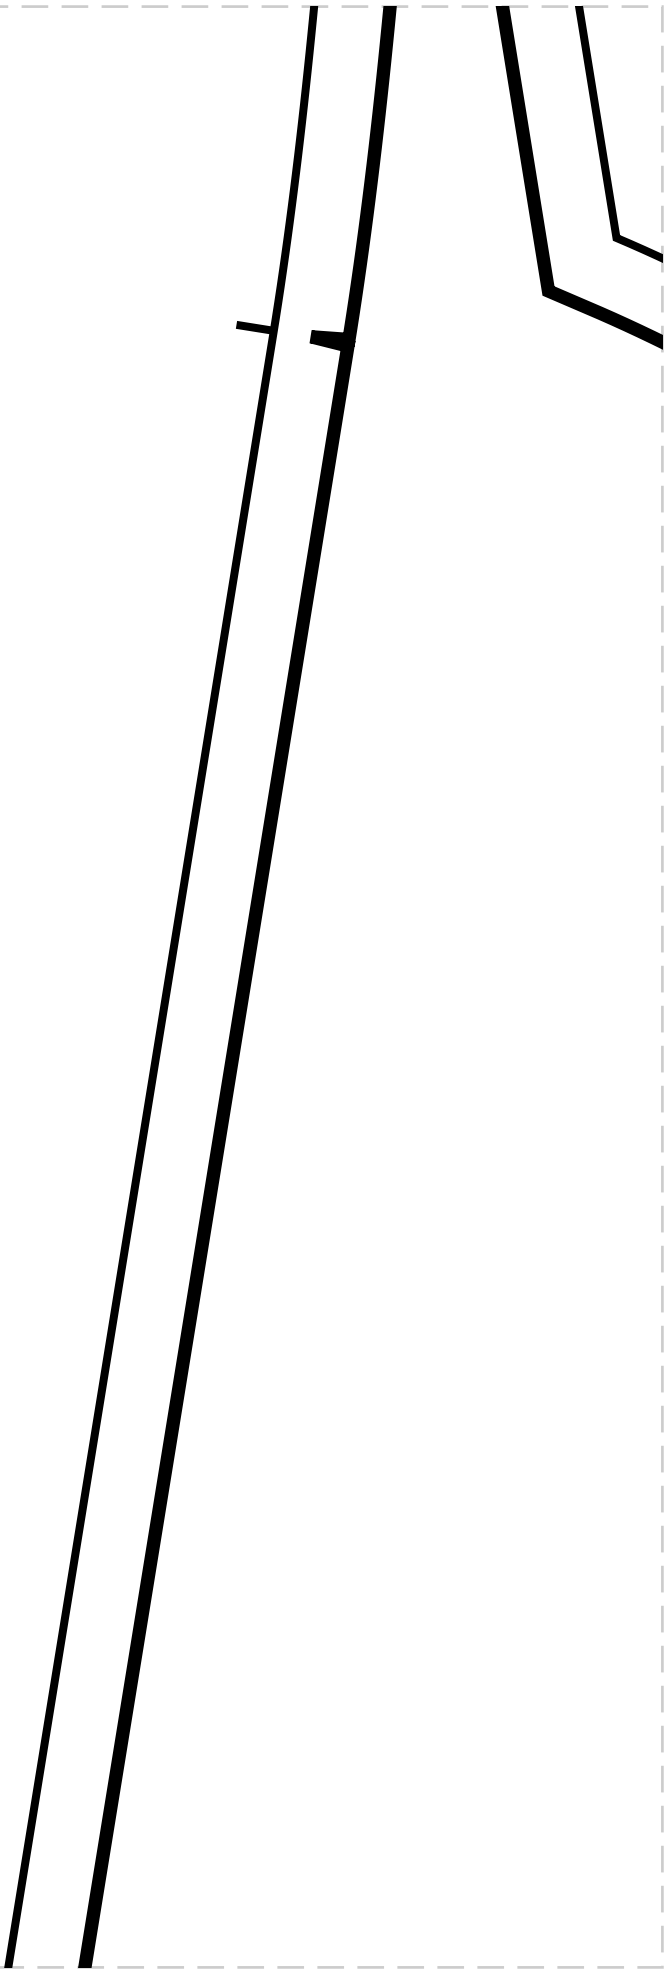


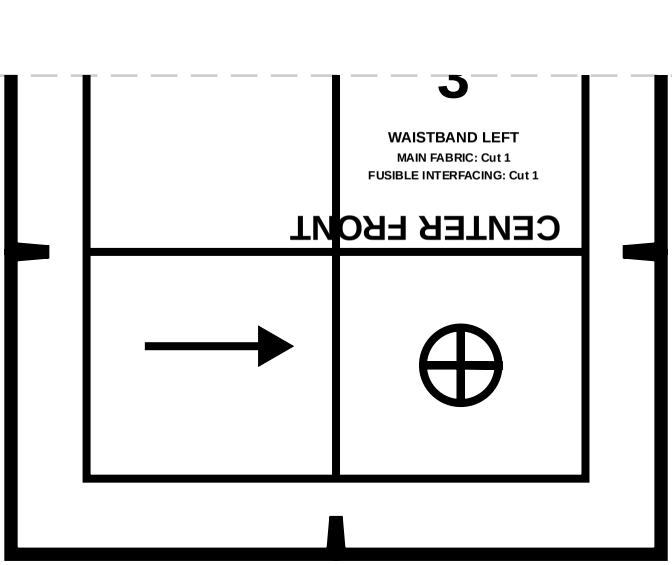



3
WAISTBAND LEFT
MAIN FABRIC: Cut 1
FUSIBLE INTERFACING: Cut 1
CENTER FRONT

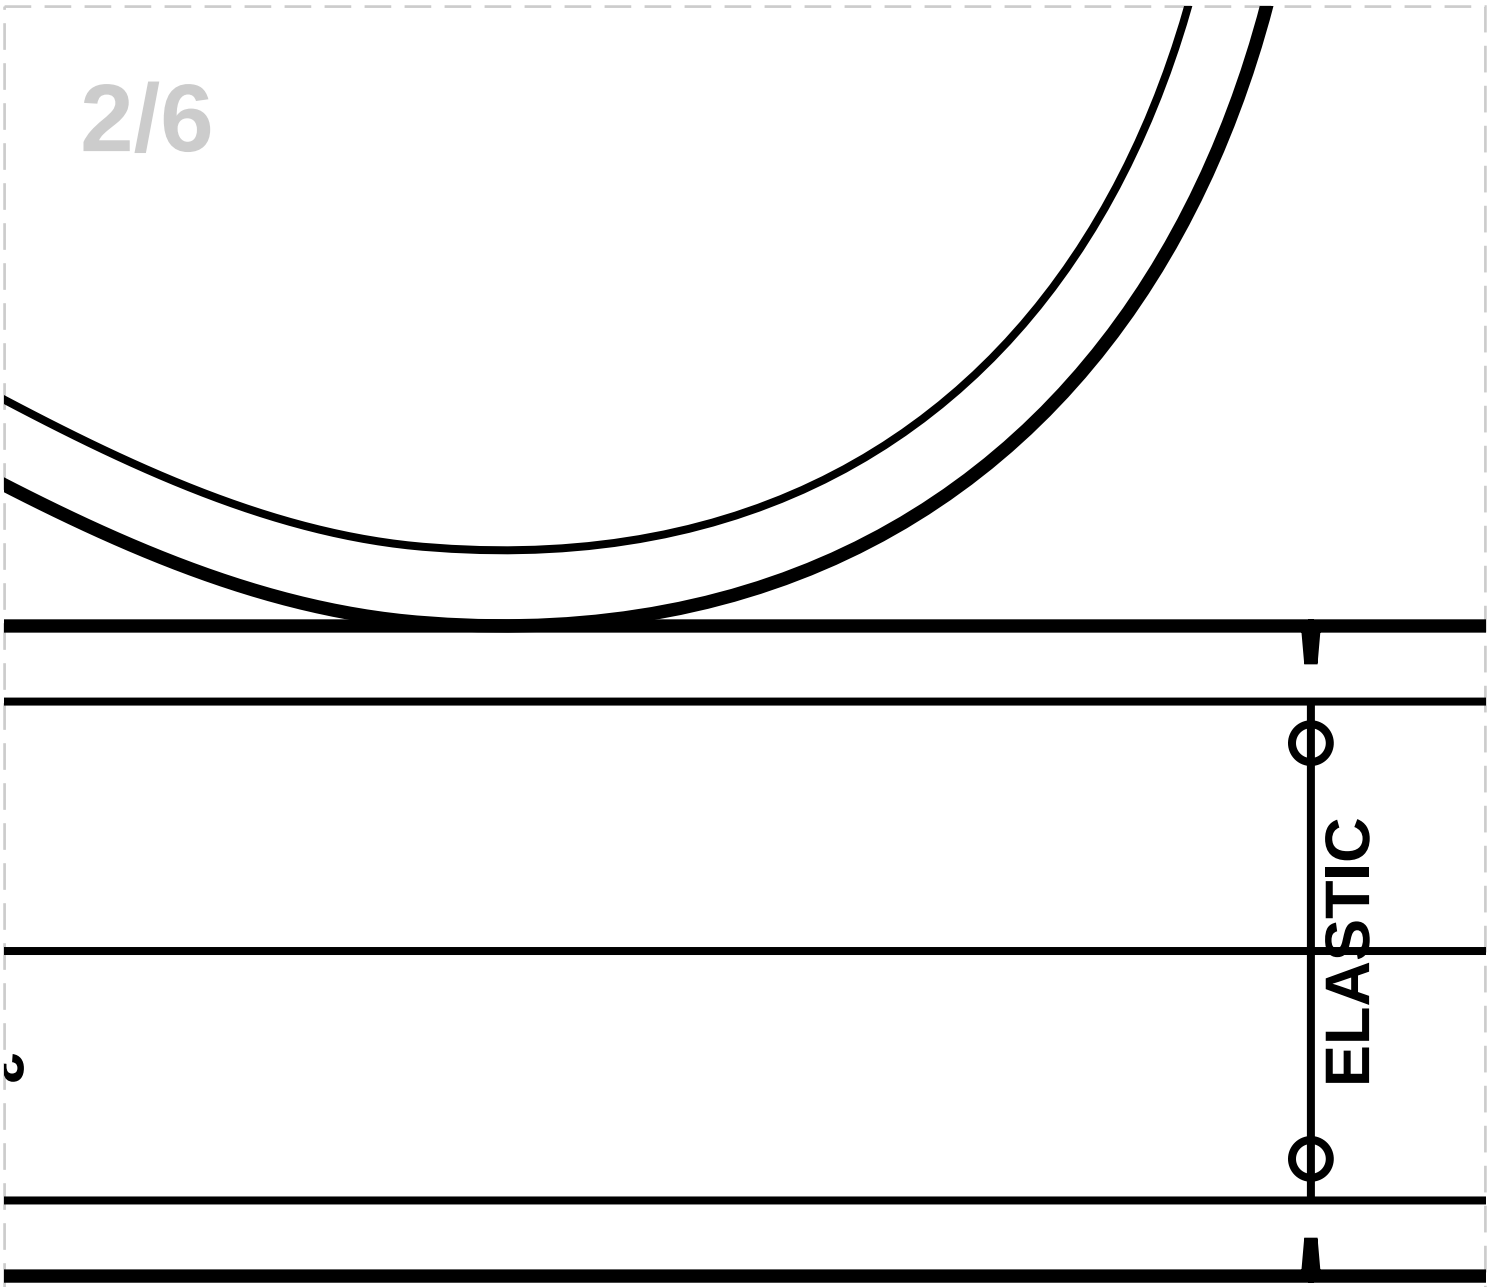

ELASTIC

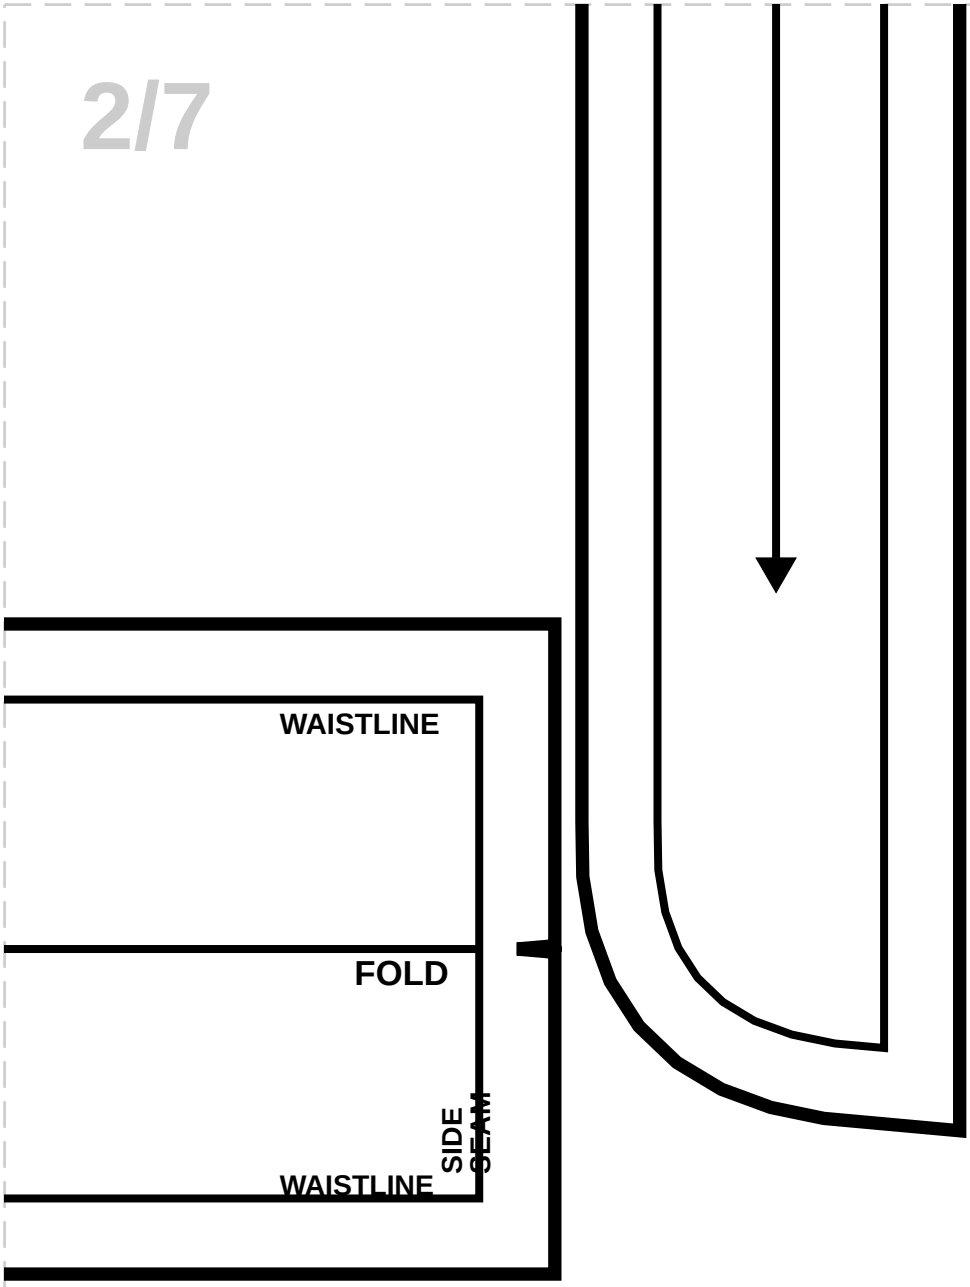
WAISTLINE
FOLD
SIDE SEAM
WAISTLINE

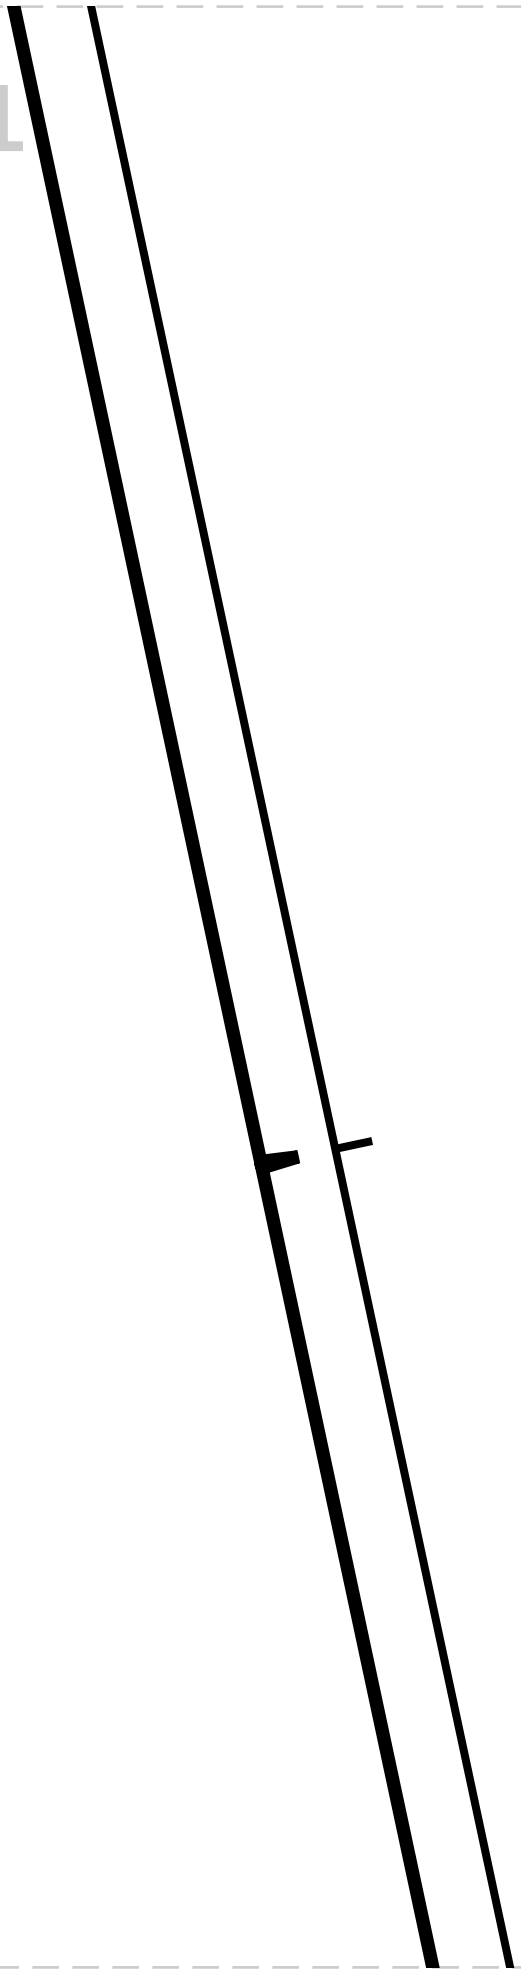



3/2

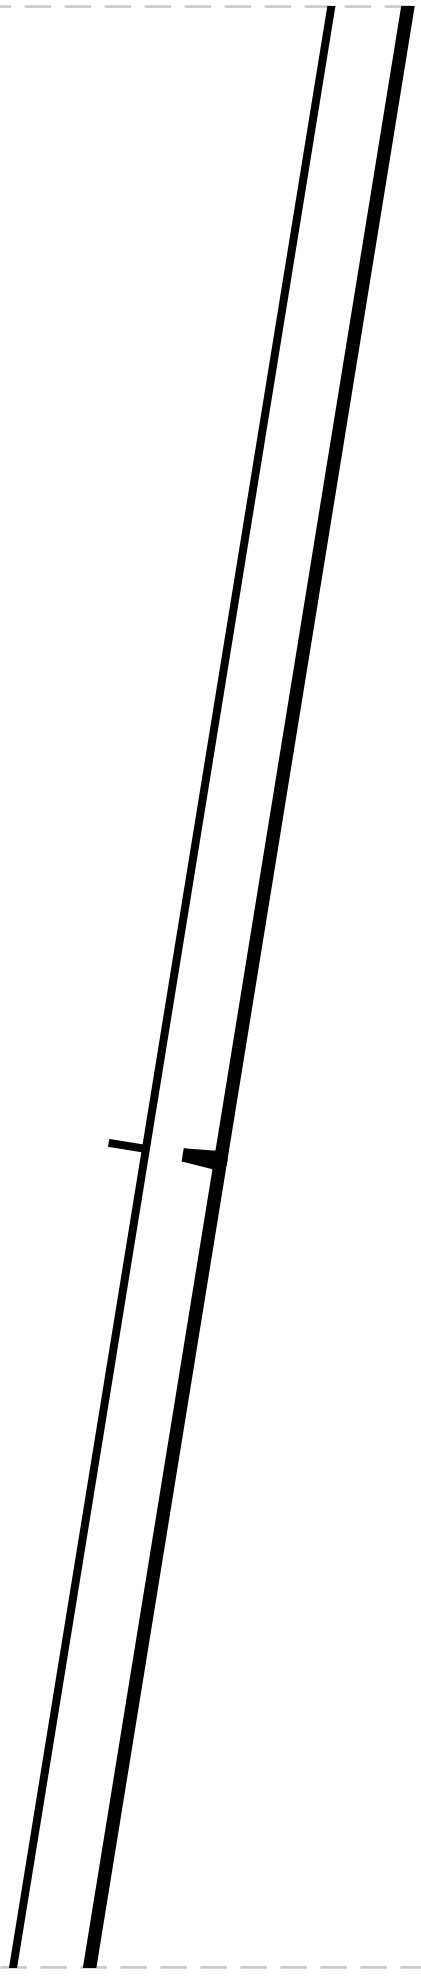

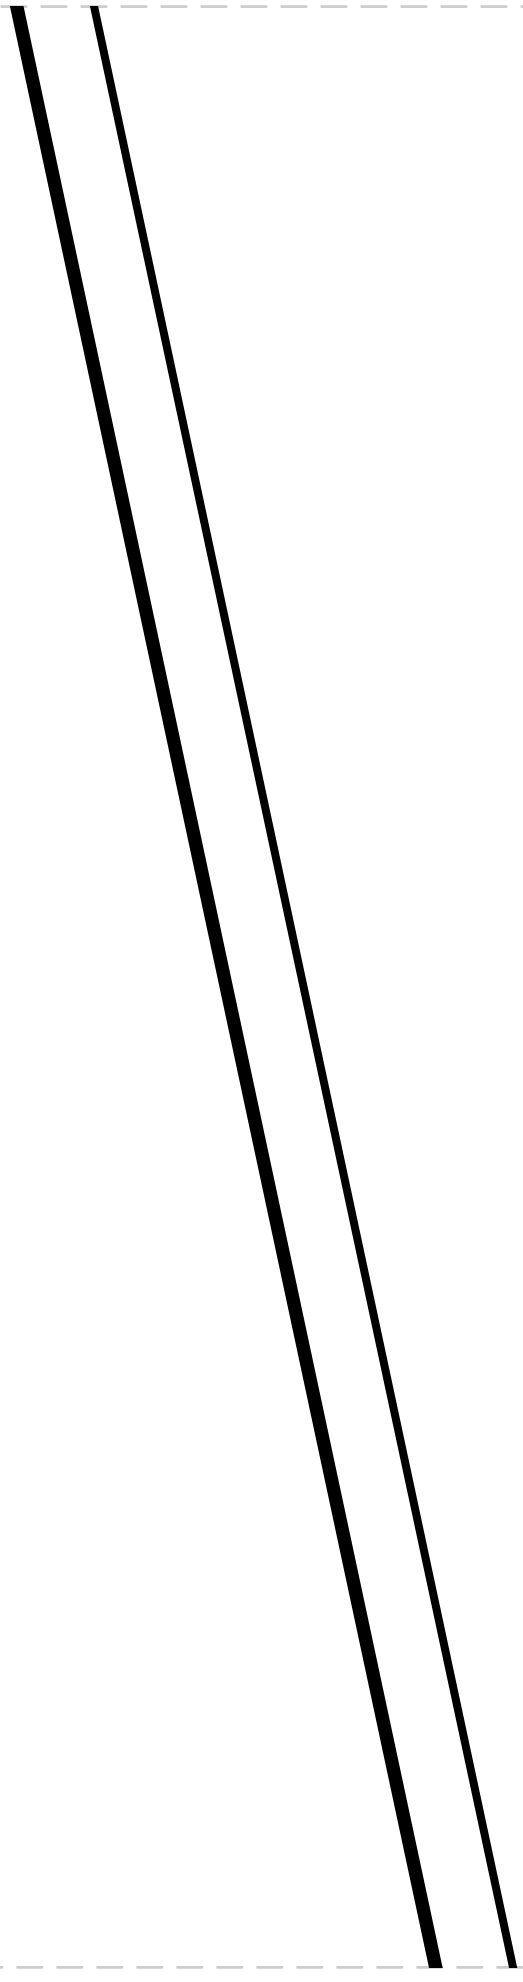



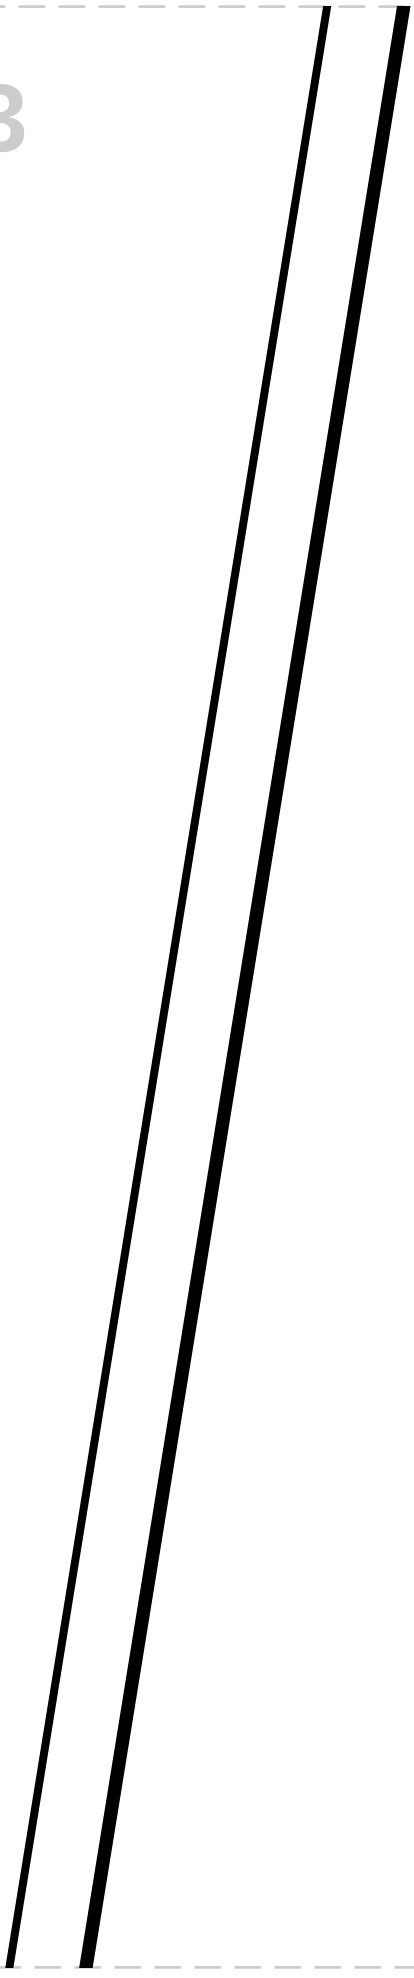

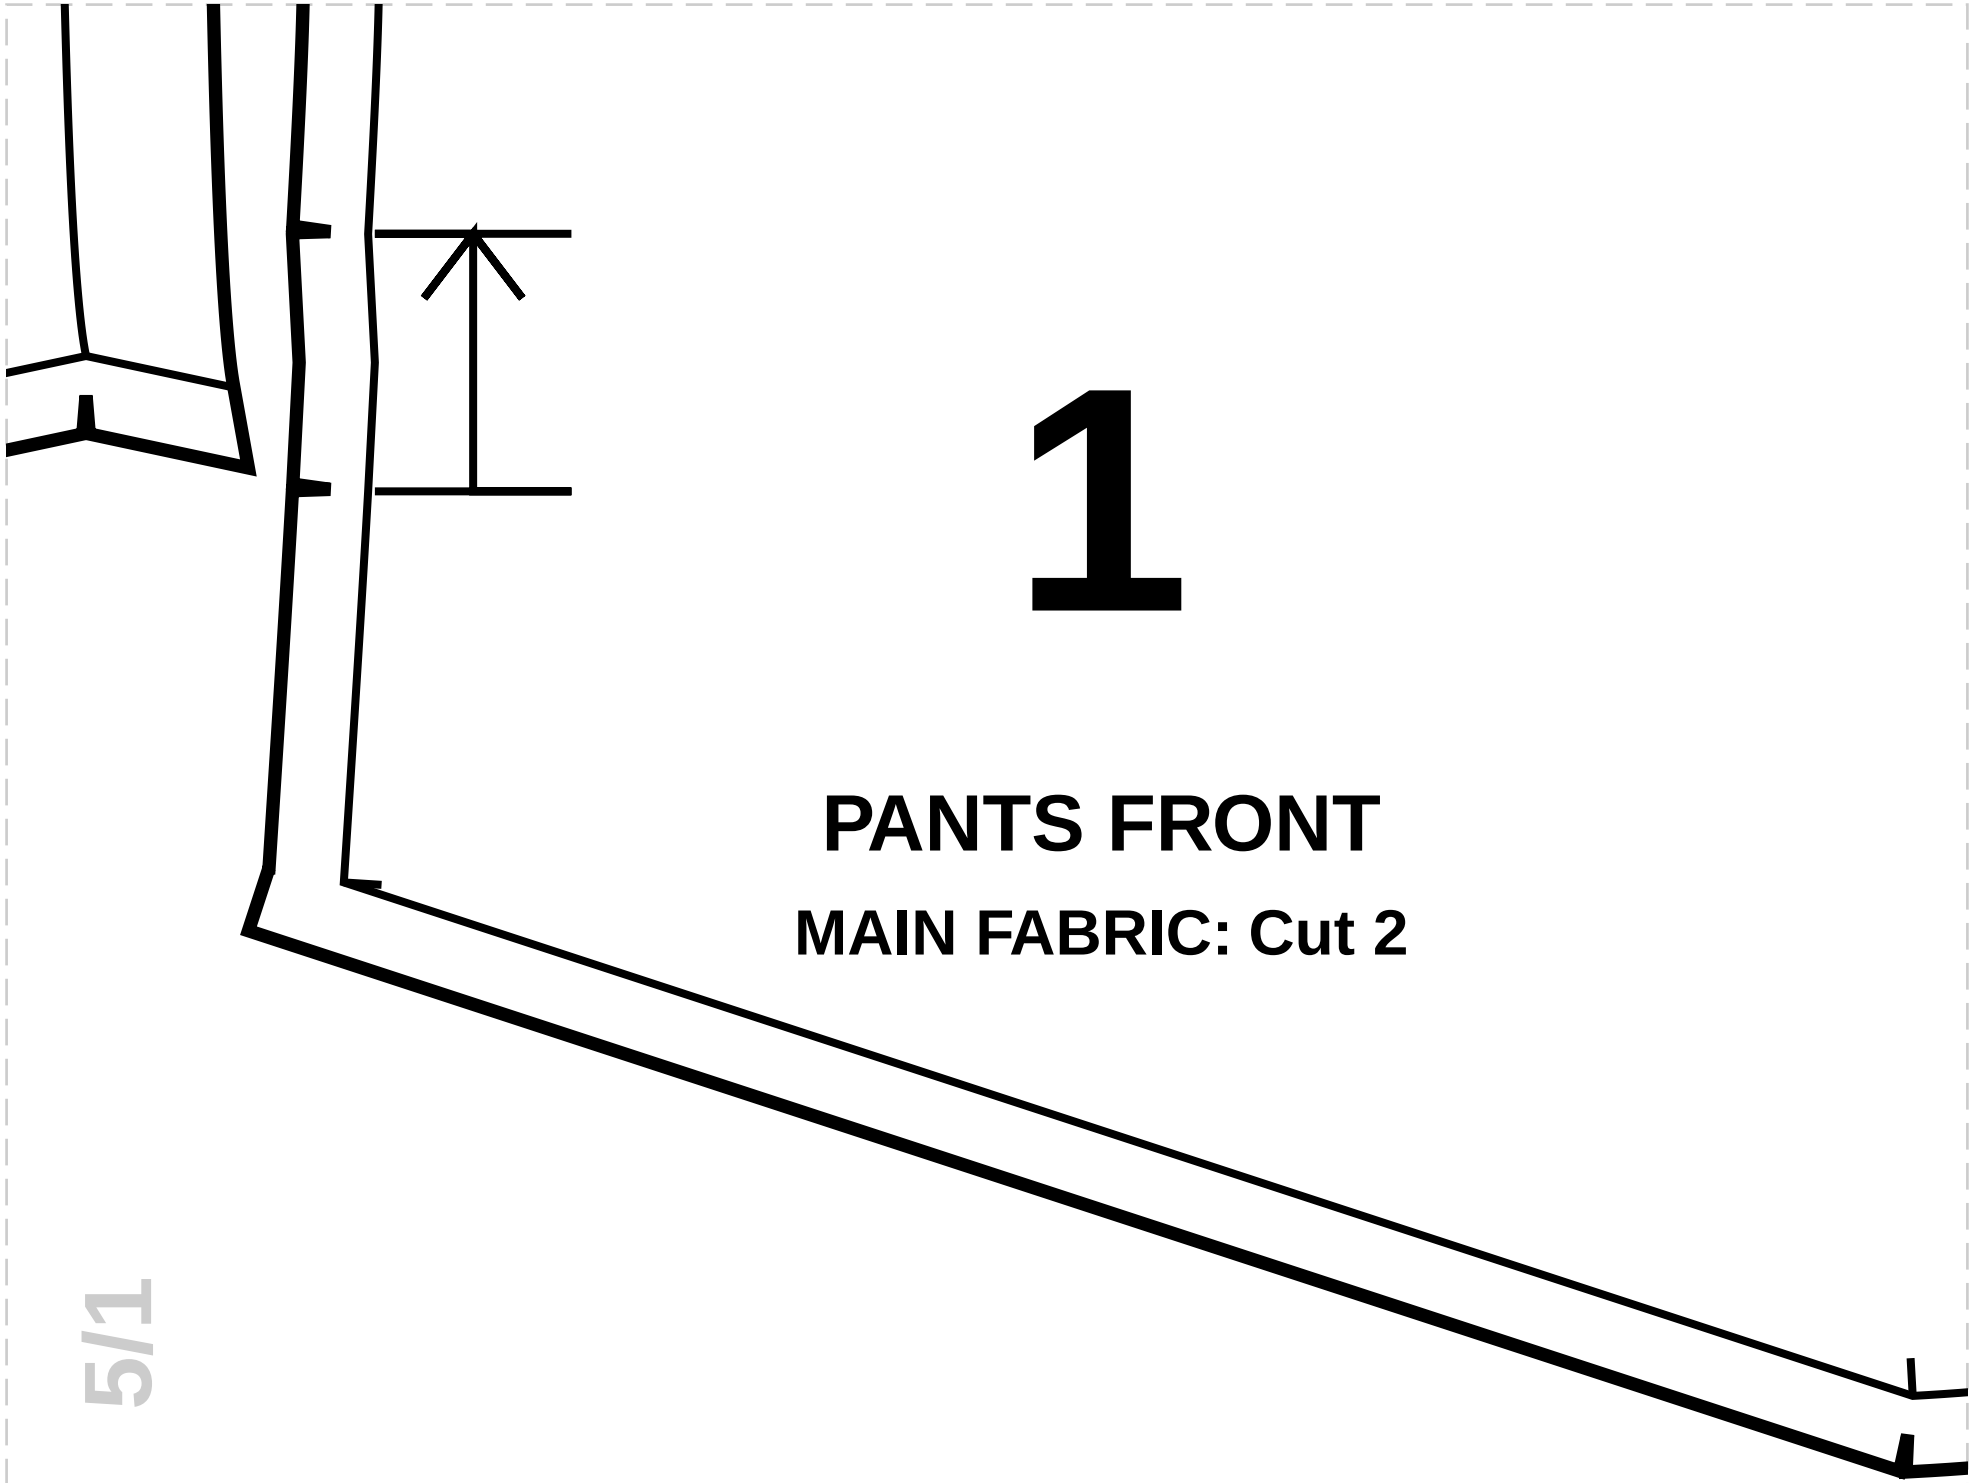

1

PANTS FRONT

MAIN FABRIC: Cut 2

5/2




FRONT


5/3

CUT ON LEFT FRONT

5/4

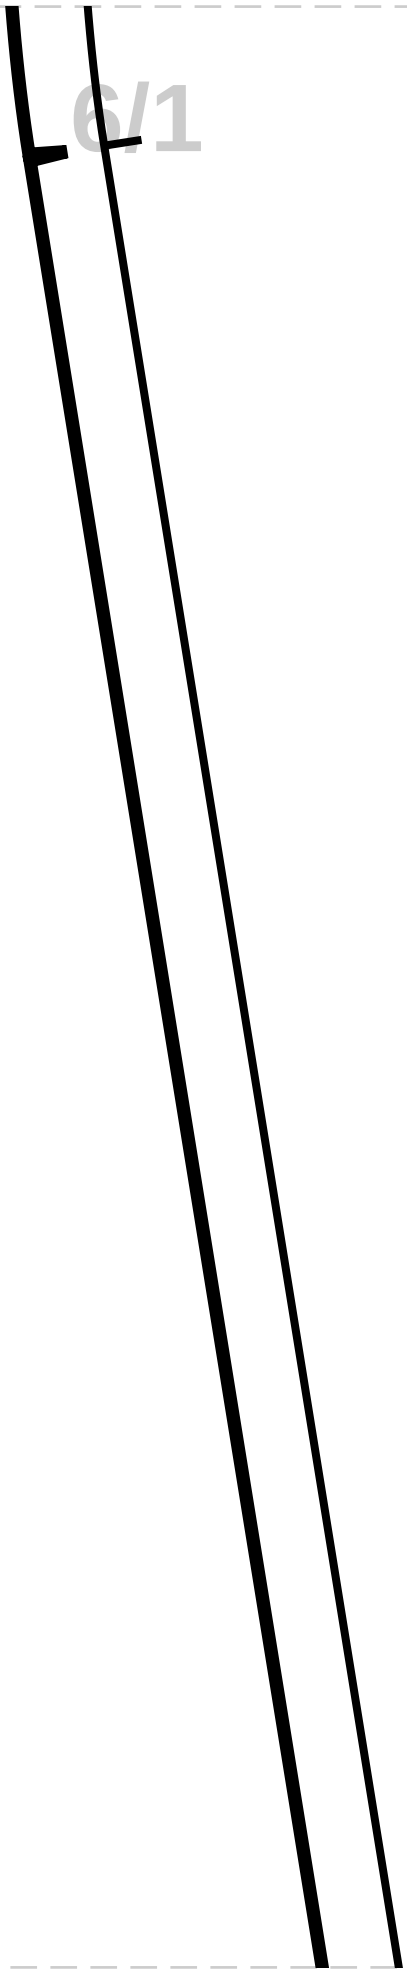




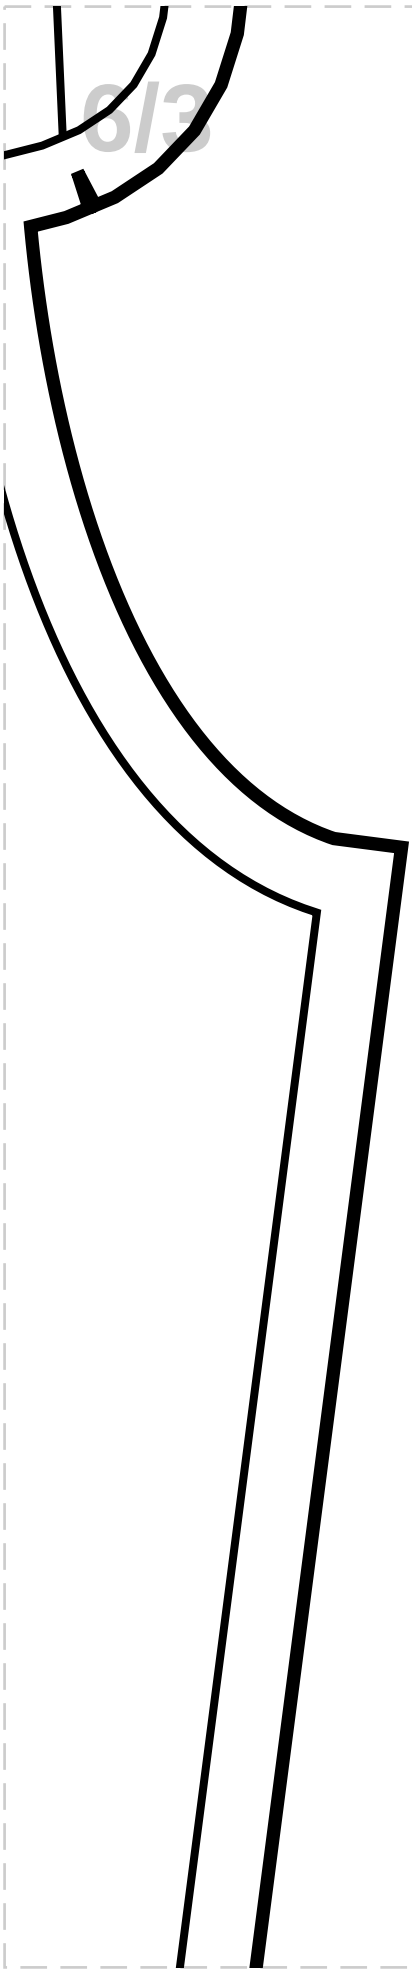



6/4

6/5

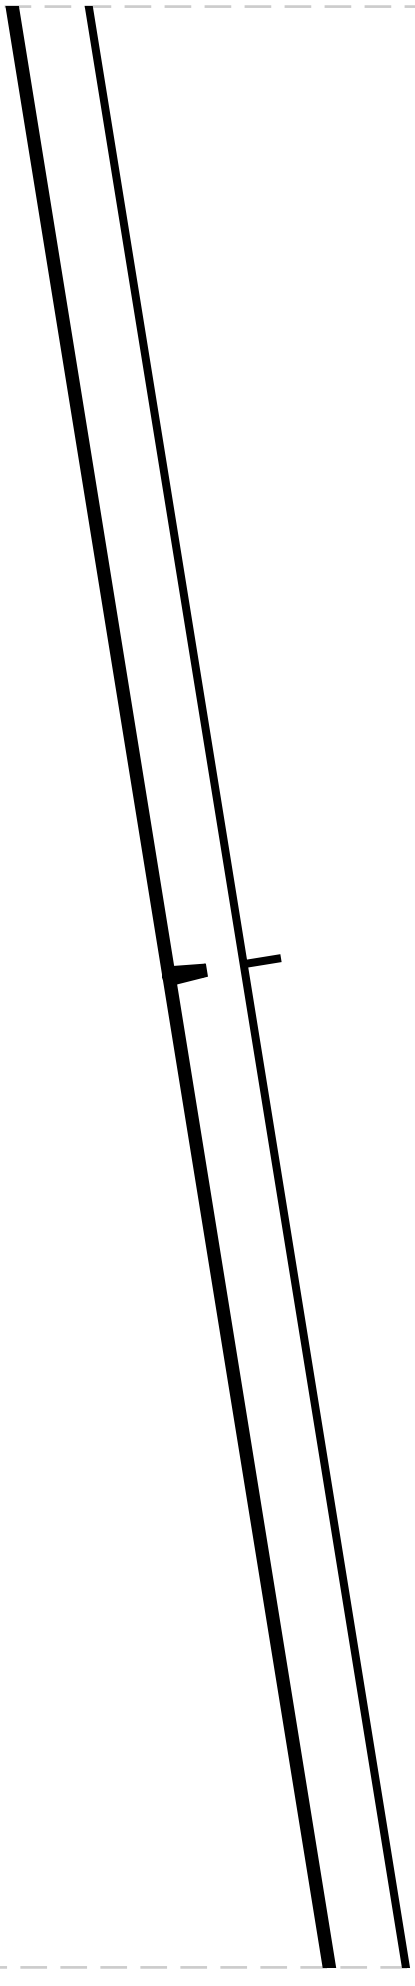


7/2



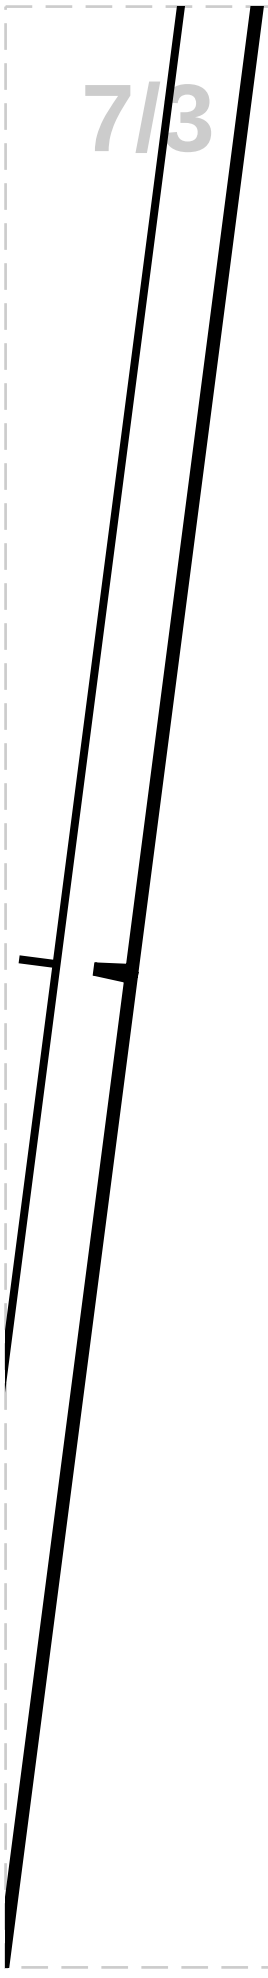


7/5

7/6

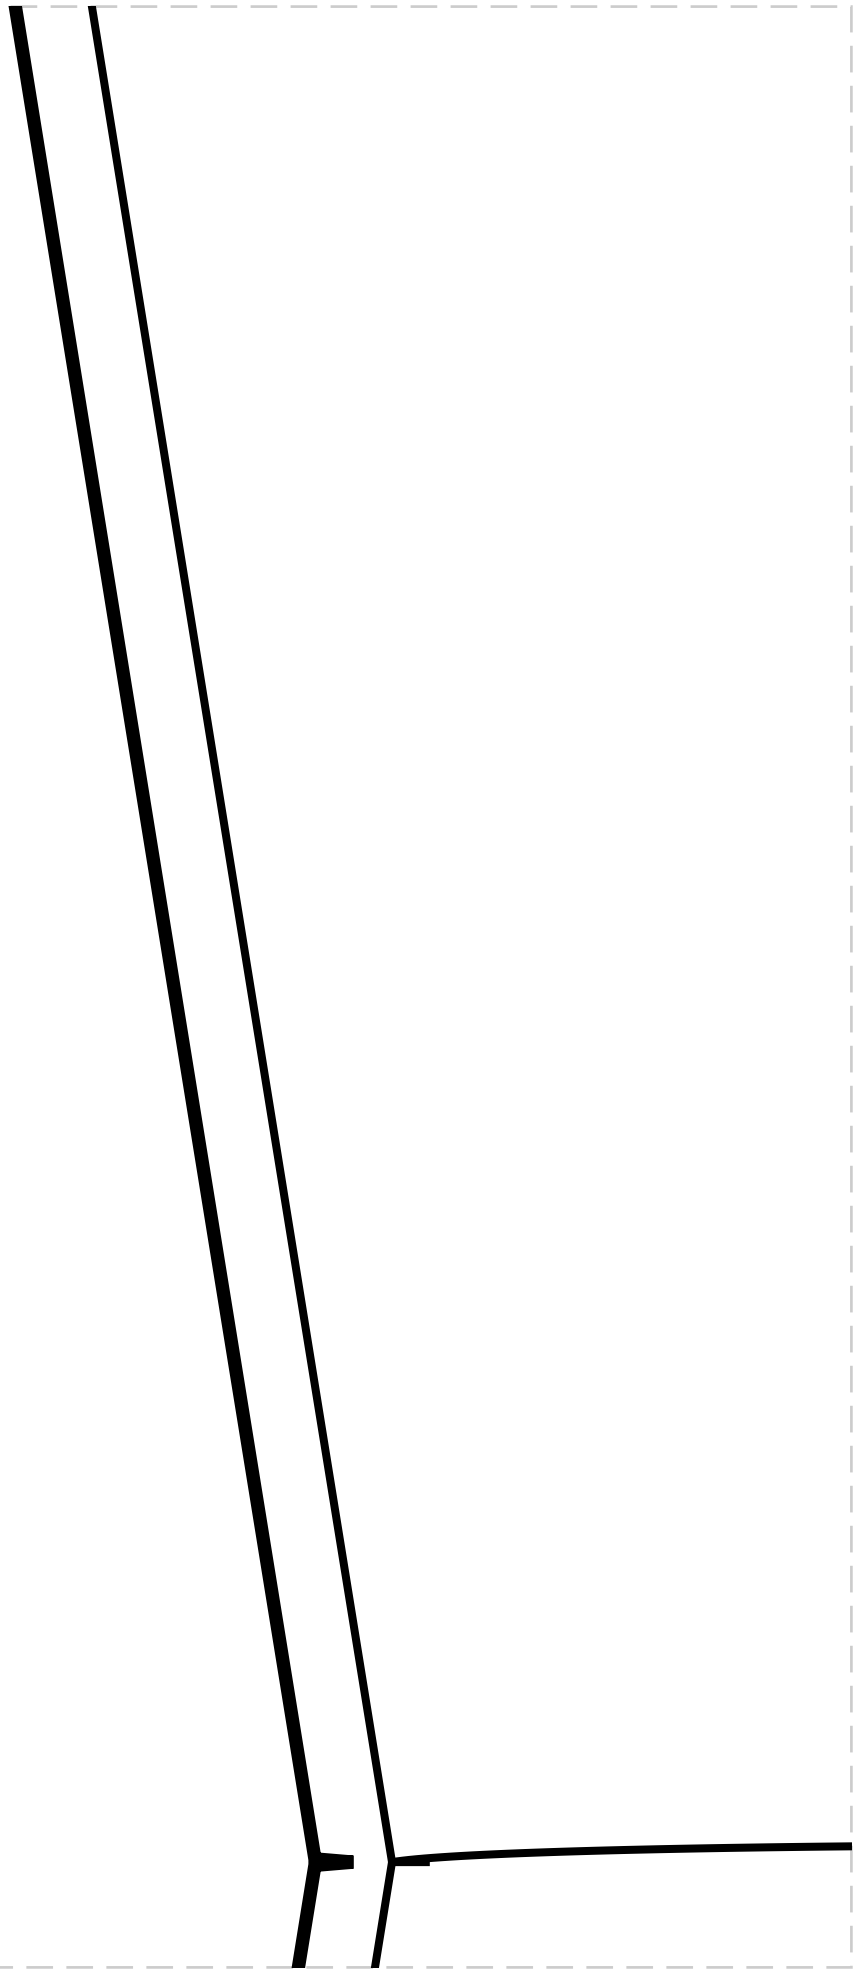

8/2

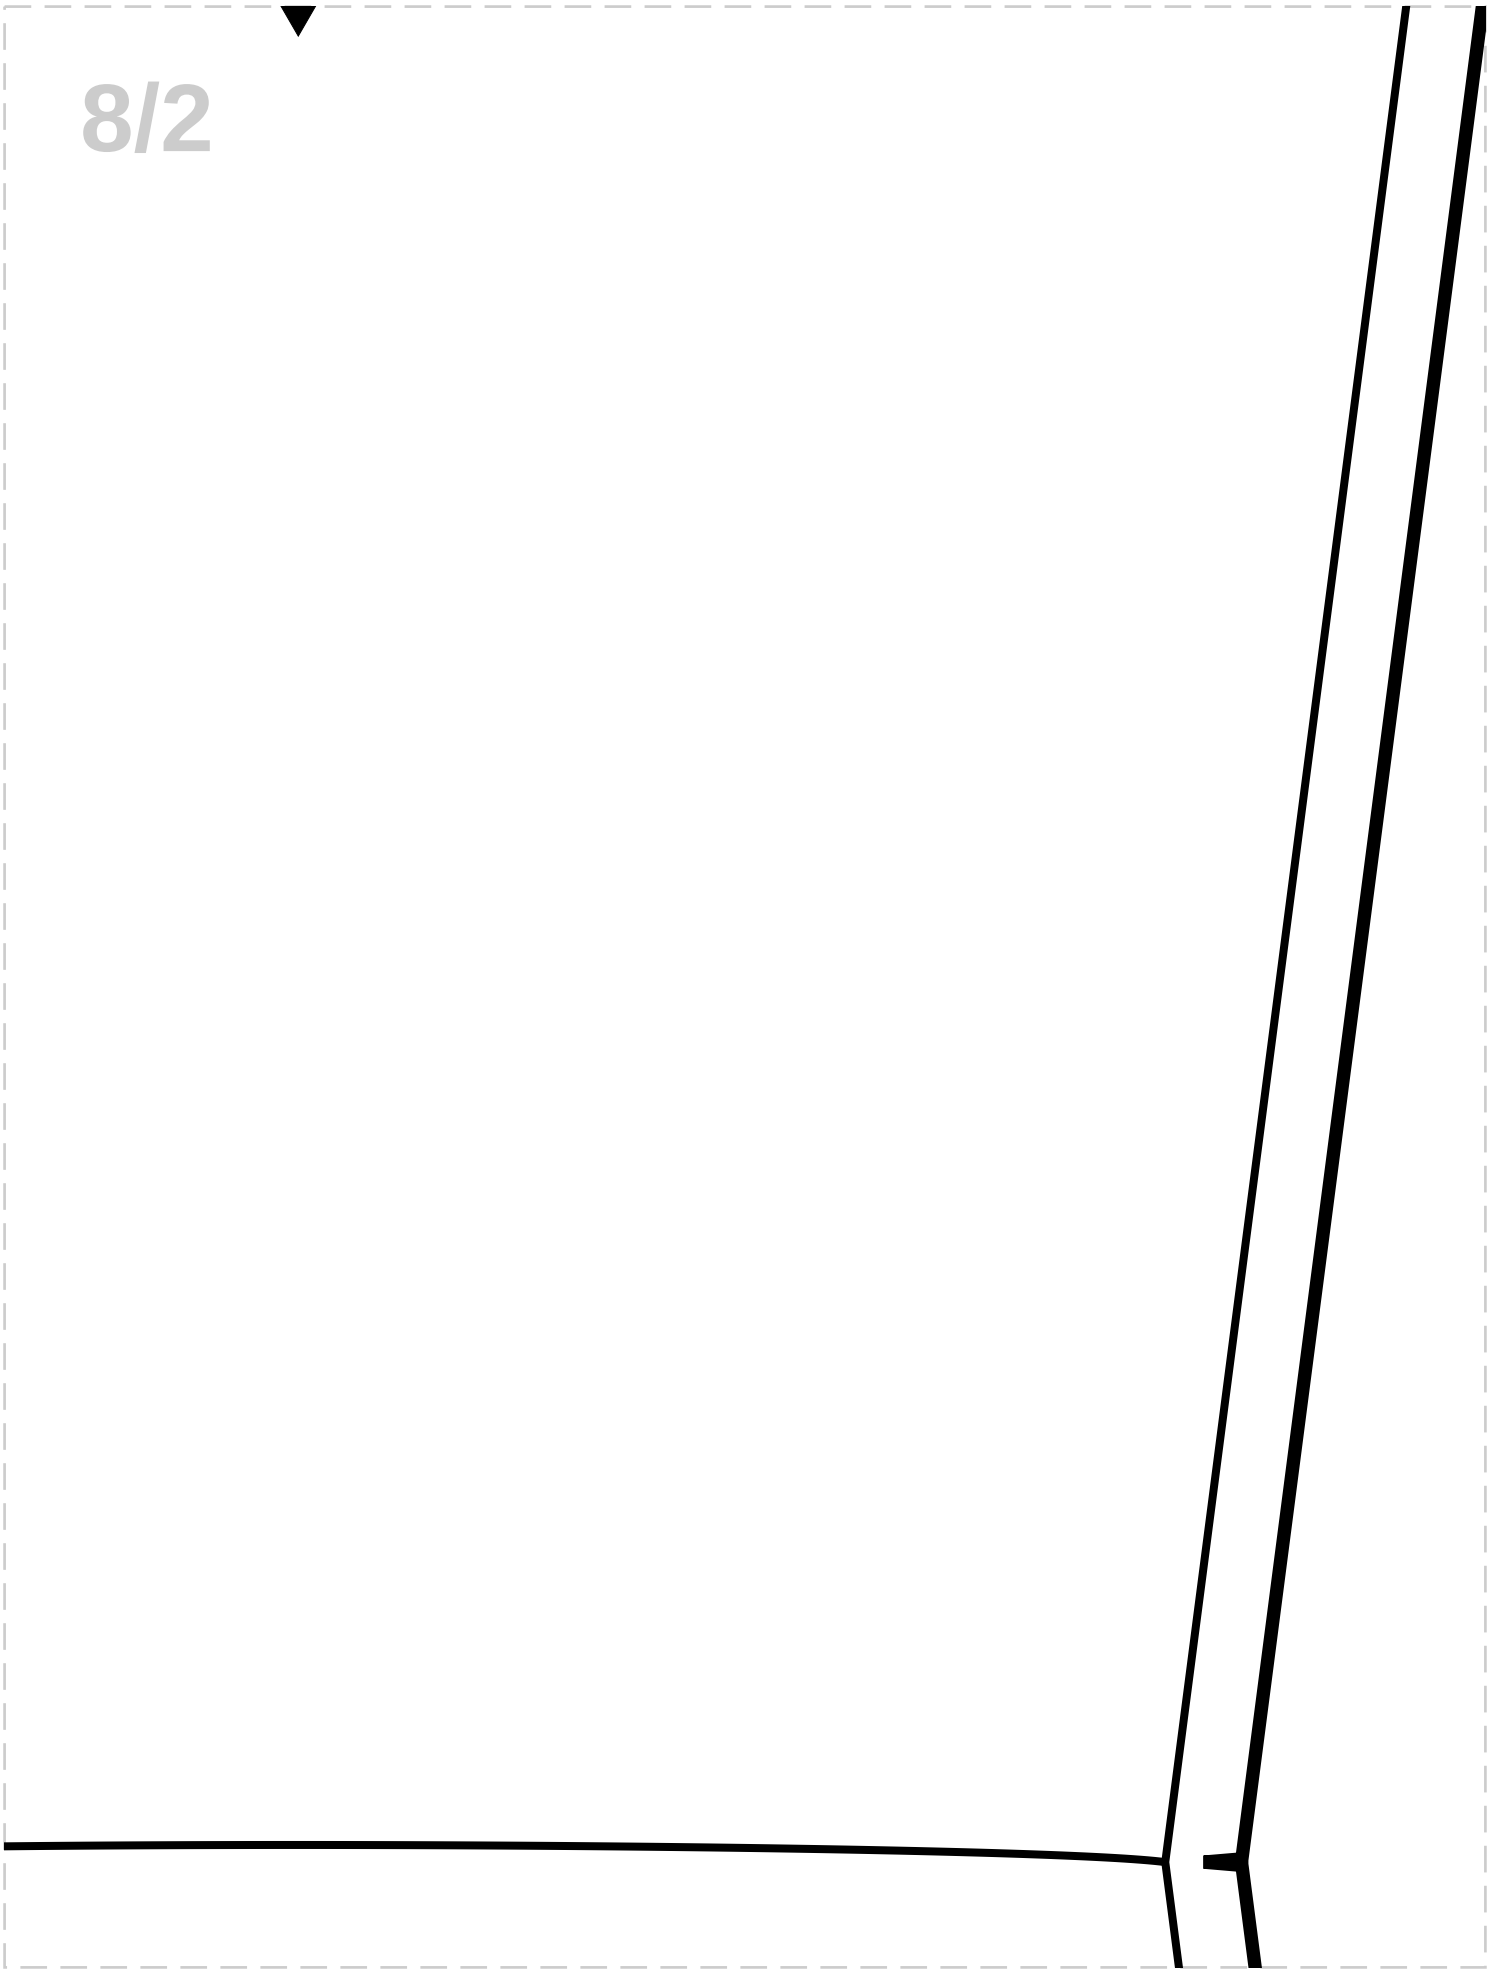

8/3

8/4

8/5

8/6

8/7


9/1


ELASTIC LENGTH 24 3/8" (62.04) cm


SIDE SEAM


4

WAISTBAND RIGHT
MAIN FABRIC: Cut 1
FUSIBLE INTERFACING: Cut 1

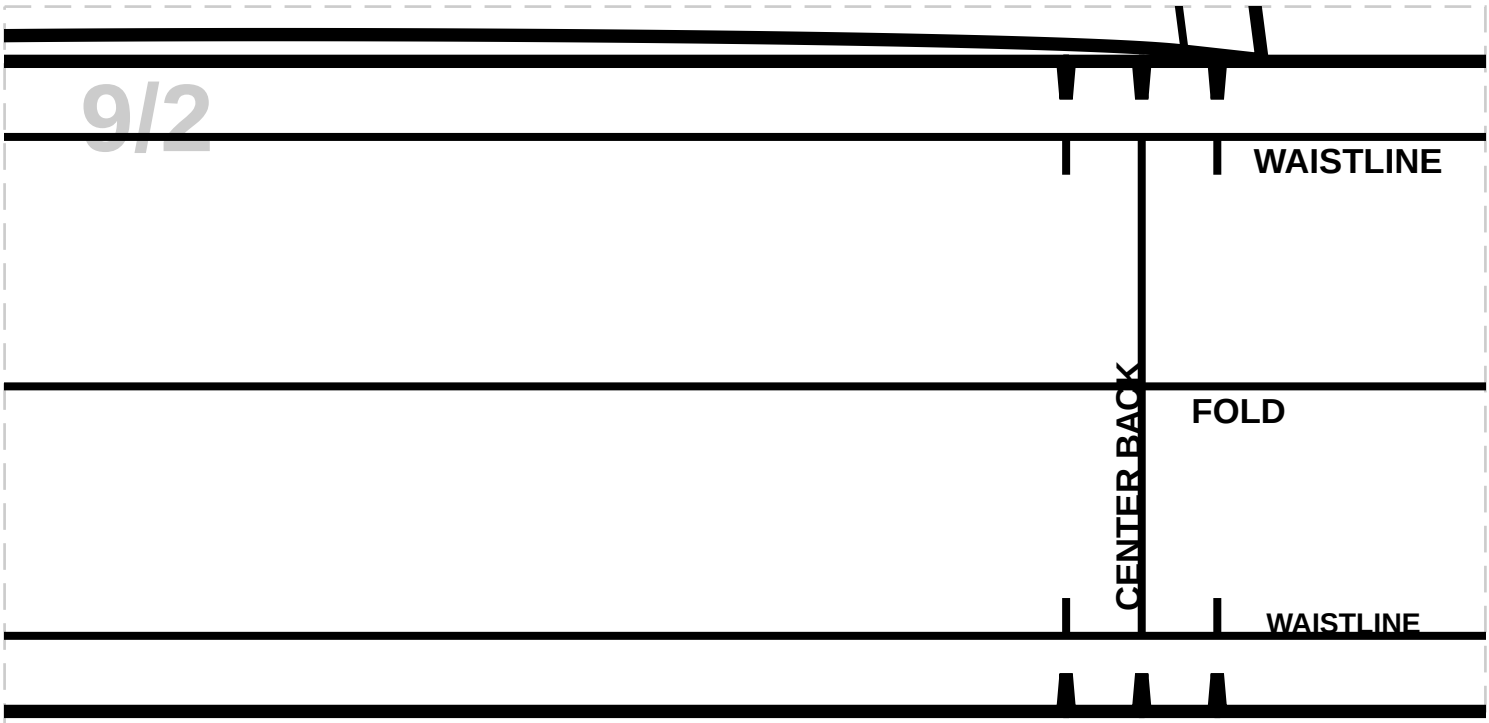
9/2
WAISTLINE
FOLD
CENTER BACK
WAISTLINE

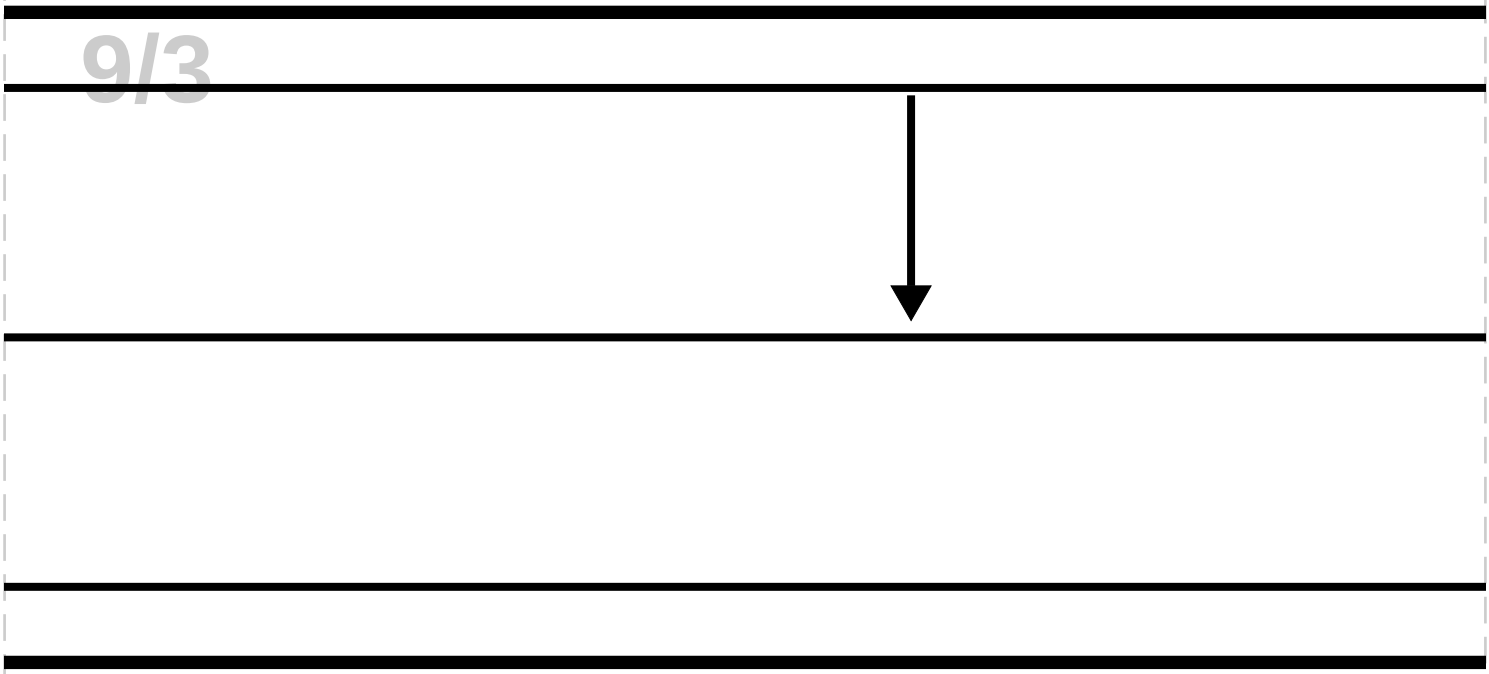

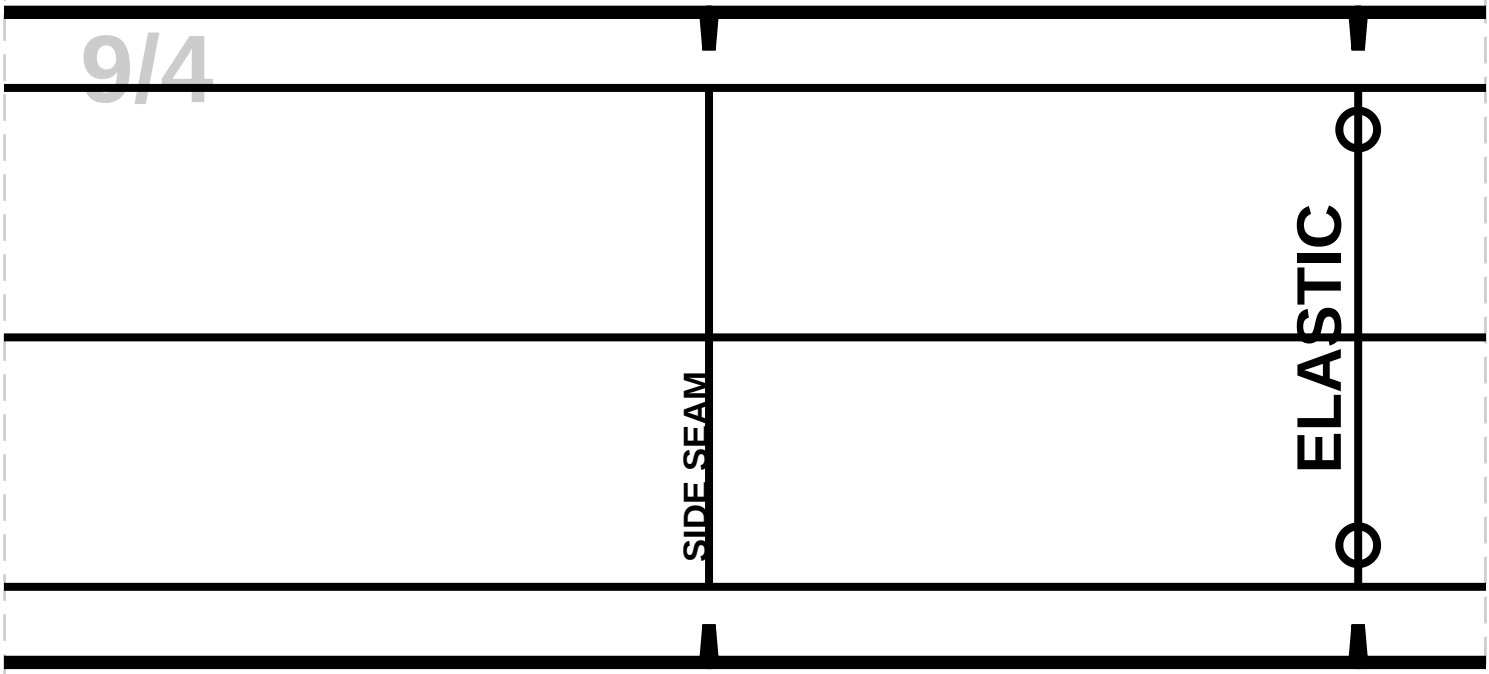
9/4
SIDE SEAM
ELASTIC

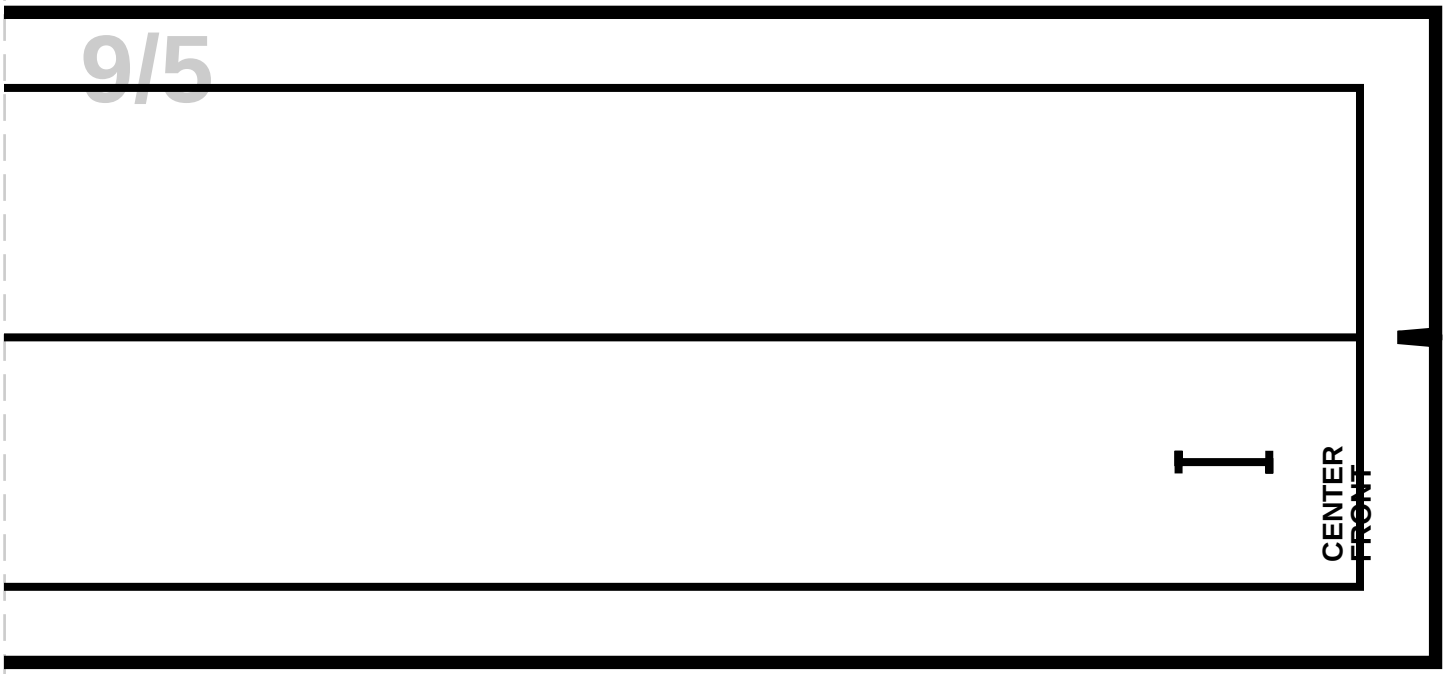
CENTER
FRONT

9/6

9/7