cozysewpatterns

Print this Calibration Test page first!

Size: Height: 167.75, Bust: 99.25, Waist: 82.75, Hips: 106.5
SIZE 12

Notes

How to print

Printing


Once your Calibration Test Page has been printed, measure the 4”x 4” (10cm) scale box with a ruler. If the lengths match, you can confidently print your pattern. If the rulers do not match, set your print settings to 100% or Actual and retry.

Cutting

Your printouts will always have a dashed border to perfectly match your sheets. Cut off the right edge of each page. Be careful not to cut beyond the dashed mark, otherwise your patterns will not align accurately.

Tapping

Group each sheet by the second number marked on each pate i.e. in a group 1, there are: 1/1, 2/1, 3/1, 4/1, etc. In a group 2: 1/2, 2/2 etc. 2. Place page 1/1 on top of the page 2/1, overlapping the right side edge. Match corners and crosses and secure with a pin or tape. Then use a scotch tape to permanently attach the sheets together.

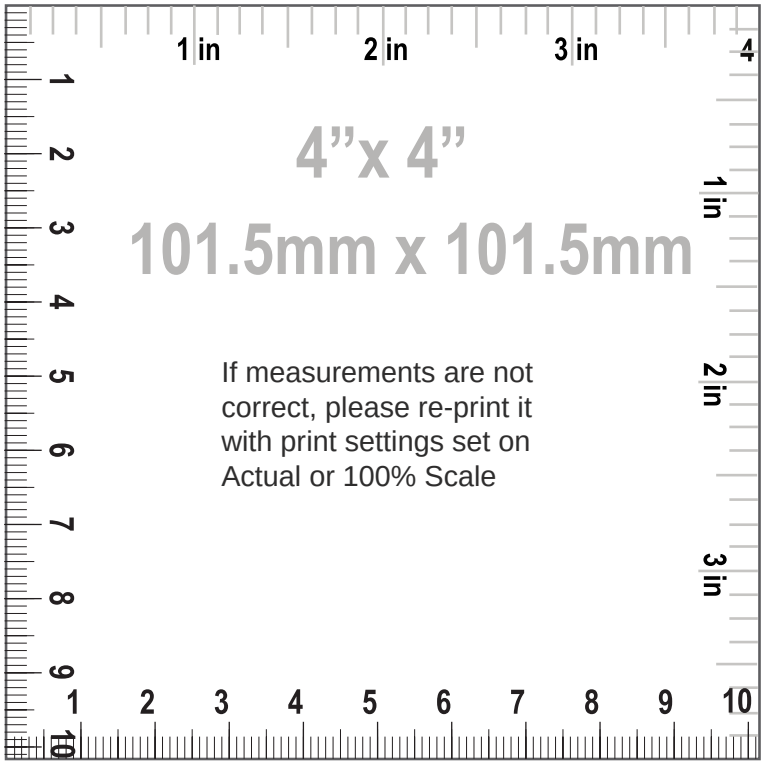

cozysewpatterns

SIZE 12
Seam Allowance: 1 (3/8 in)

Pattern pieces:

1. "PANTS FRONT", MAIN FABRIC: Cut 2
2. "PANTS BACK", MAIN FABRIC: Cut 2
3. "WAISTBAND", MAIN FABRIC, FUSIBLE INTERFACING: Cut 1
4. "POCKET BAG", MAIN FABRIC: Cut 2
5. "FLY FACING", MAIN FABRIC: Cut 1
6. "POCKET LINING", LINING: Cut 2
7. "FLY INTERFACING", FUSIBLE INTERFACING: Cut 1
8. "BACK POCKET WELT", MAIN FABRIC, FUSIBLE INTERFACING: Cut 2
9. "BACK INNER POCKET BAG", LINING: Cut 2
10. "BACK OUTER POCKET BAG", LINING: Cut 2


Pattern Specs (Circumferences are divided by 2):

1. Hem max 3.00 none (1 1/8 in)
2. Seam allowance max 2.00 none (3/4 in)
3. Stretch factor 1.00 none (3/8 in)
4. Stretch factor horizontal 1.00 none (3/8 in)
5. Stretch factor vertical 1.00 none (3/8 in)
6. Pocket bag height 28.65 cm (11 1/4 in)
7. Pocket side seam 19.05 cm (7 1/2 in)
8. Pocket waist seam 19.05 cm (7 1/2 in)
9. Back pocket entry length 13.30 cm (5 1/4 in)
10. Side seam back pocket position 6.87 cm (2 3/4 in)
11. Waist to back pocket length 10.80 cm (4 1/4 in)
12. Back pocket width welt 2.50 cm (1 in)
13. Fly zipper length 23.00 cm (9 in)
14. Waist 42.20 cm (16 5/8 in)
15. Hips 53.73 cm (21 1/8 in)
16. Pleat depth 1.38 cm (1/2 in)
17. Thigh 34.43 cm (13 1/2 in)
18. Knee 27.88 cm (11 in)
19. Bottom opening 20.03 cm (7 7/8 in)
20. Front rise 30.98 cm (12 1/4 in)
21. Back rise 42.69 cm (16 3/4 in)

22. Crotch height 29.33 cm (11 1/2 in)
23. Inseam length 68.66 cm (27 in)
24. Pants side seam length 98.83 cm (38 7/8 in)
25. Waistband width 3.00 cm (1 1/8 in)
26. Waistband length 87.45 cm (34 3/8 in)
27. Waistband button diameter 1.00 cm (3/8 in)
28. Waistband buttons quantity 1.00 pc
29. Seam allowance poc max 3.00 none (1 1/8 in)
30. Back pocket bag height 11.30 cm (4 1/2 in)


cozysewpatterns

Paper Size: A4;
Print Actual Size (100% Scale);

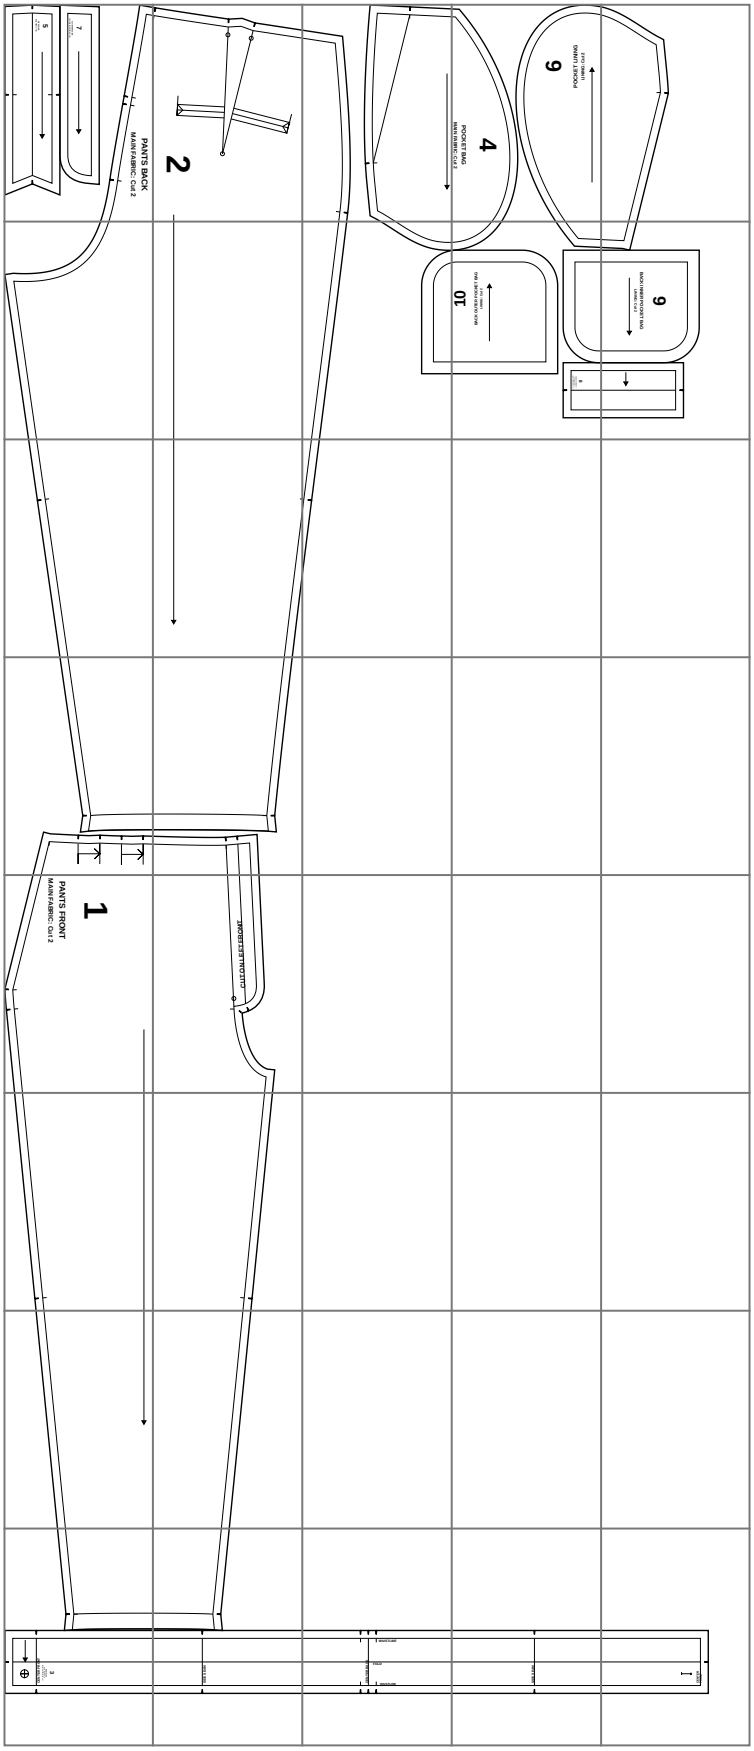


PANTS BACK


MAIN FABRIC: Cut 2

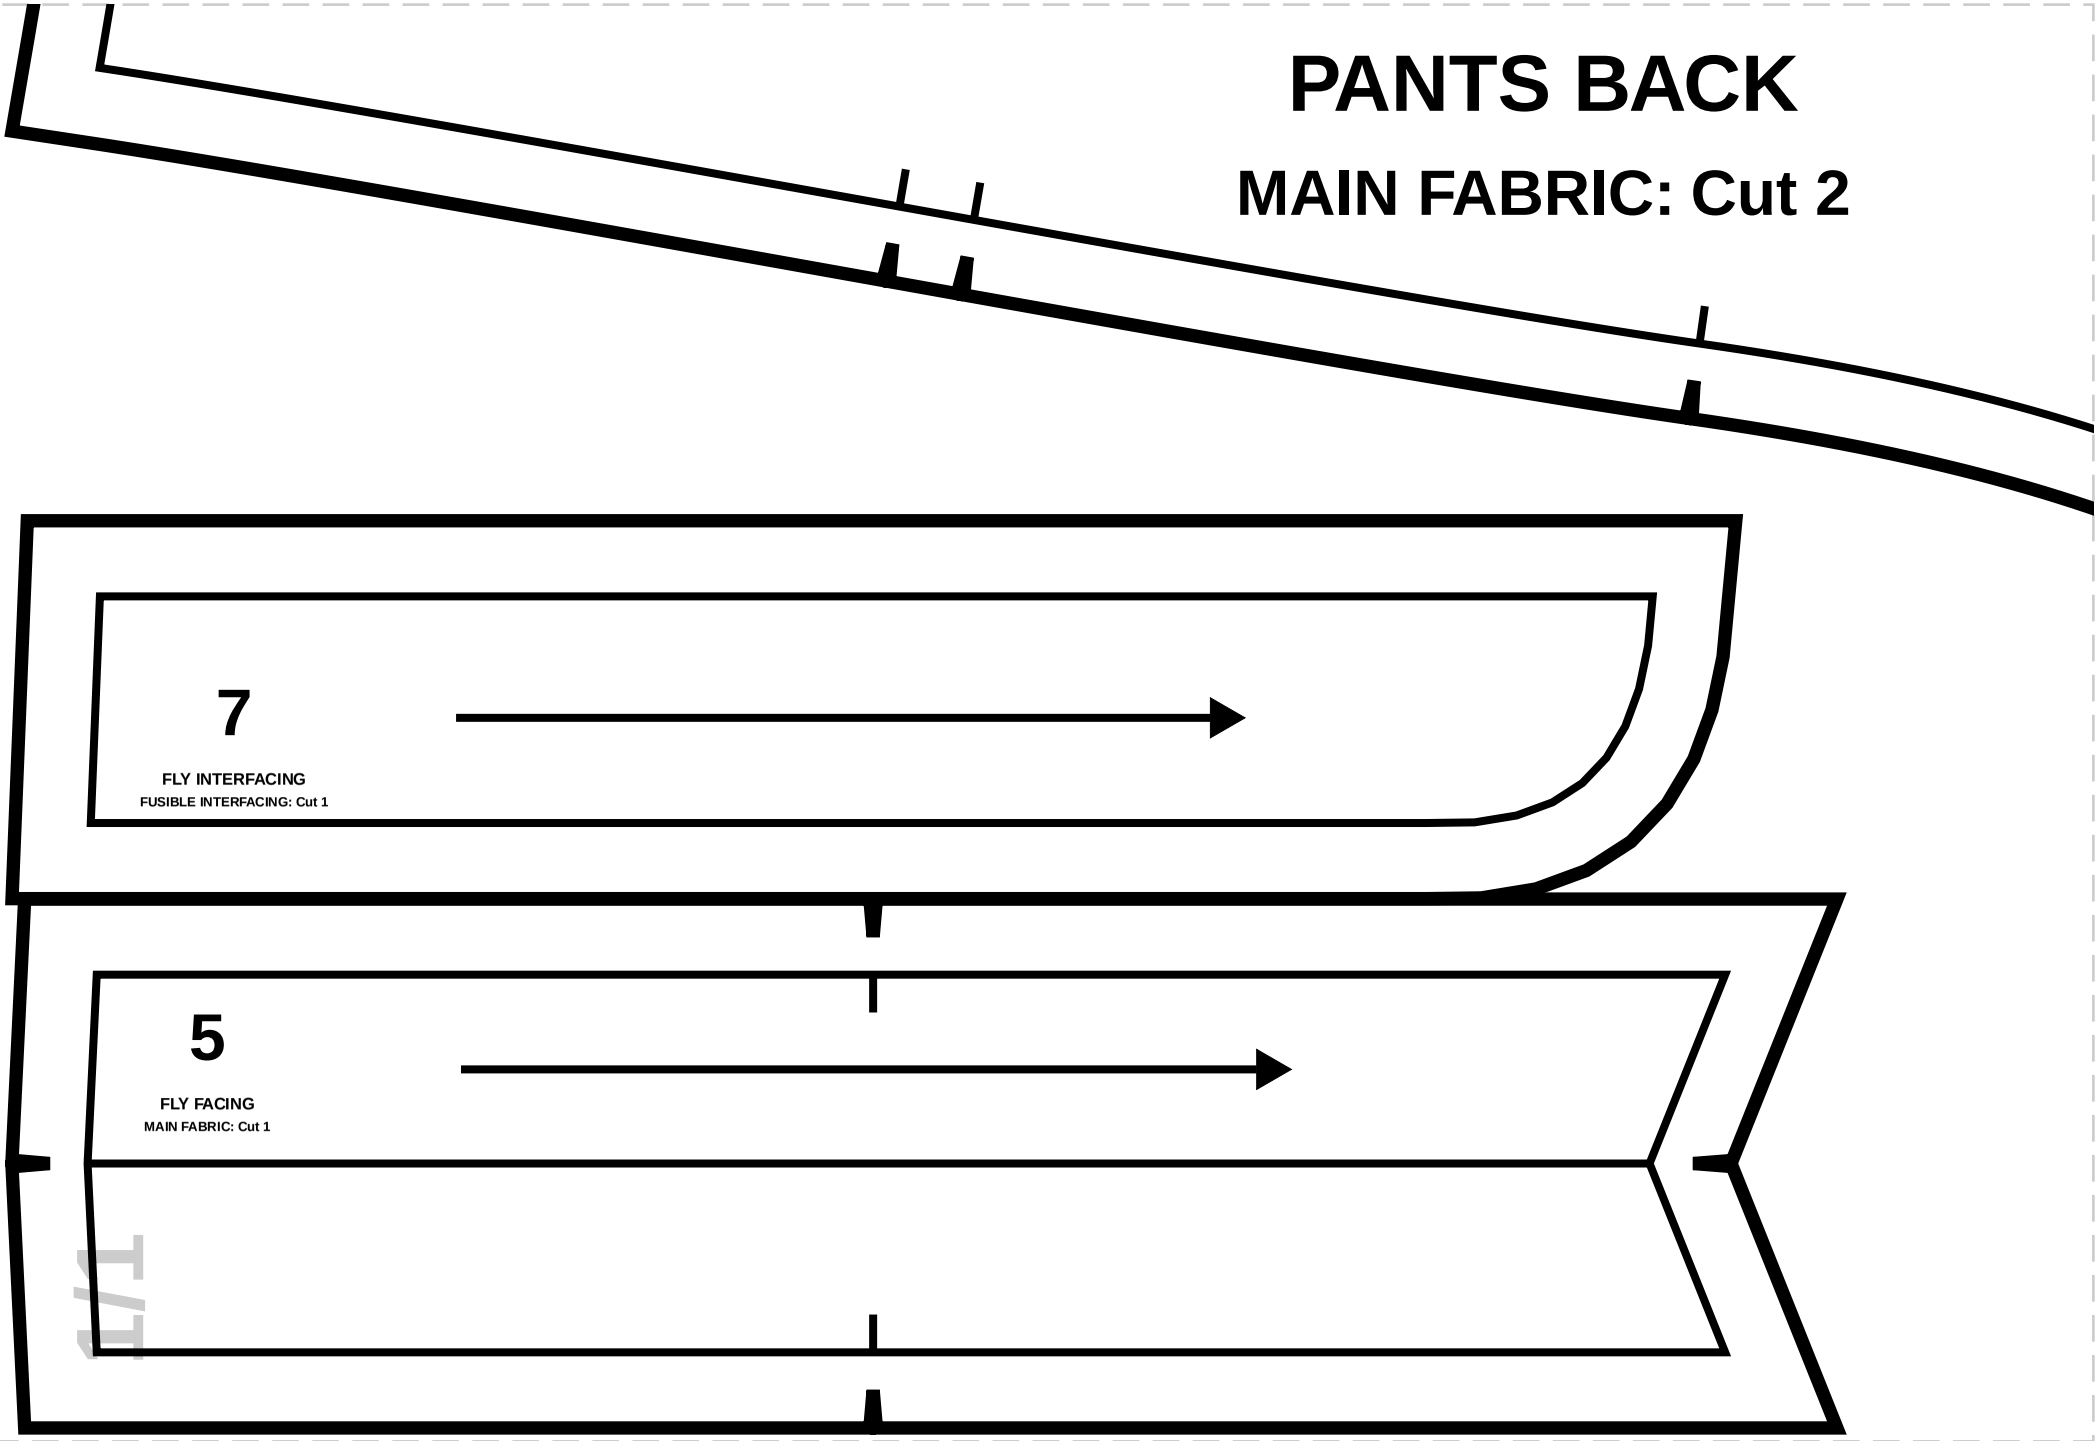


1/1

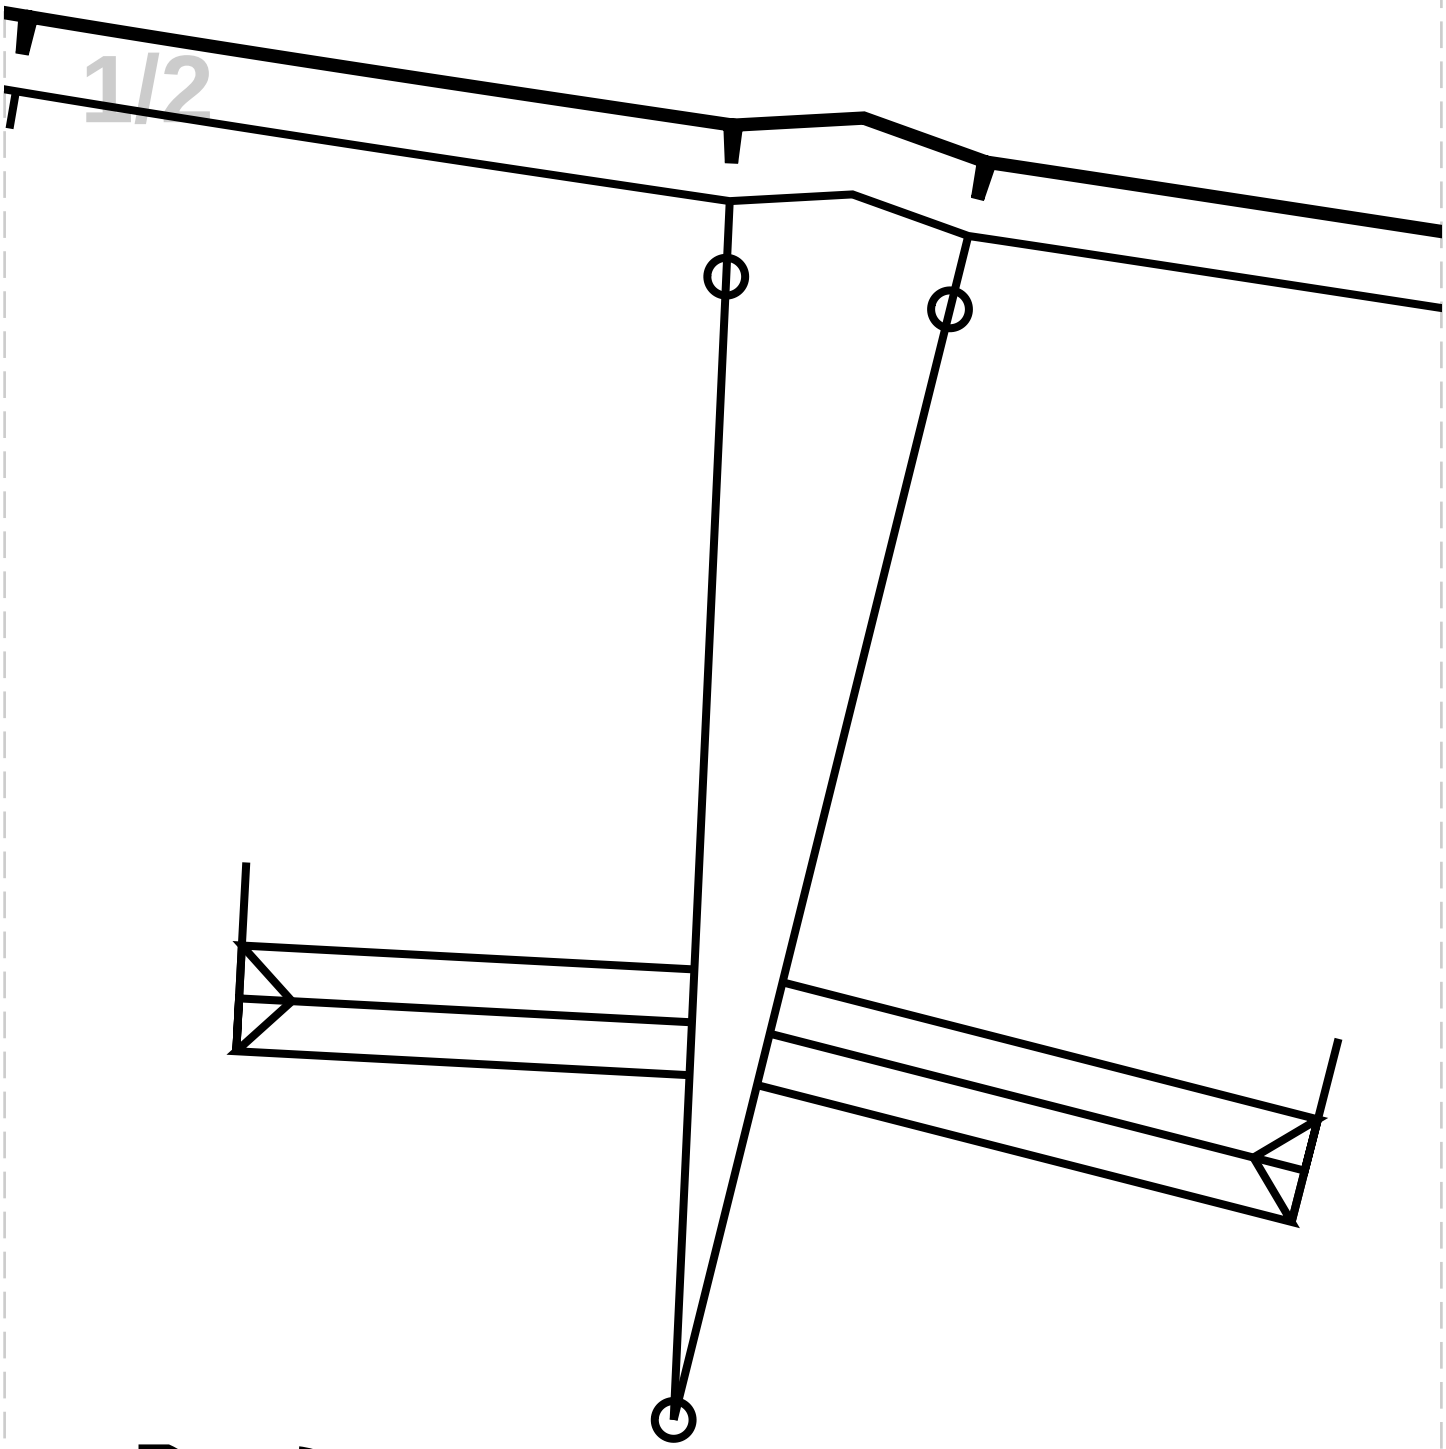



2

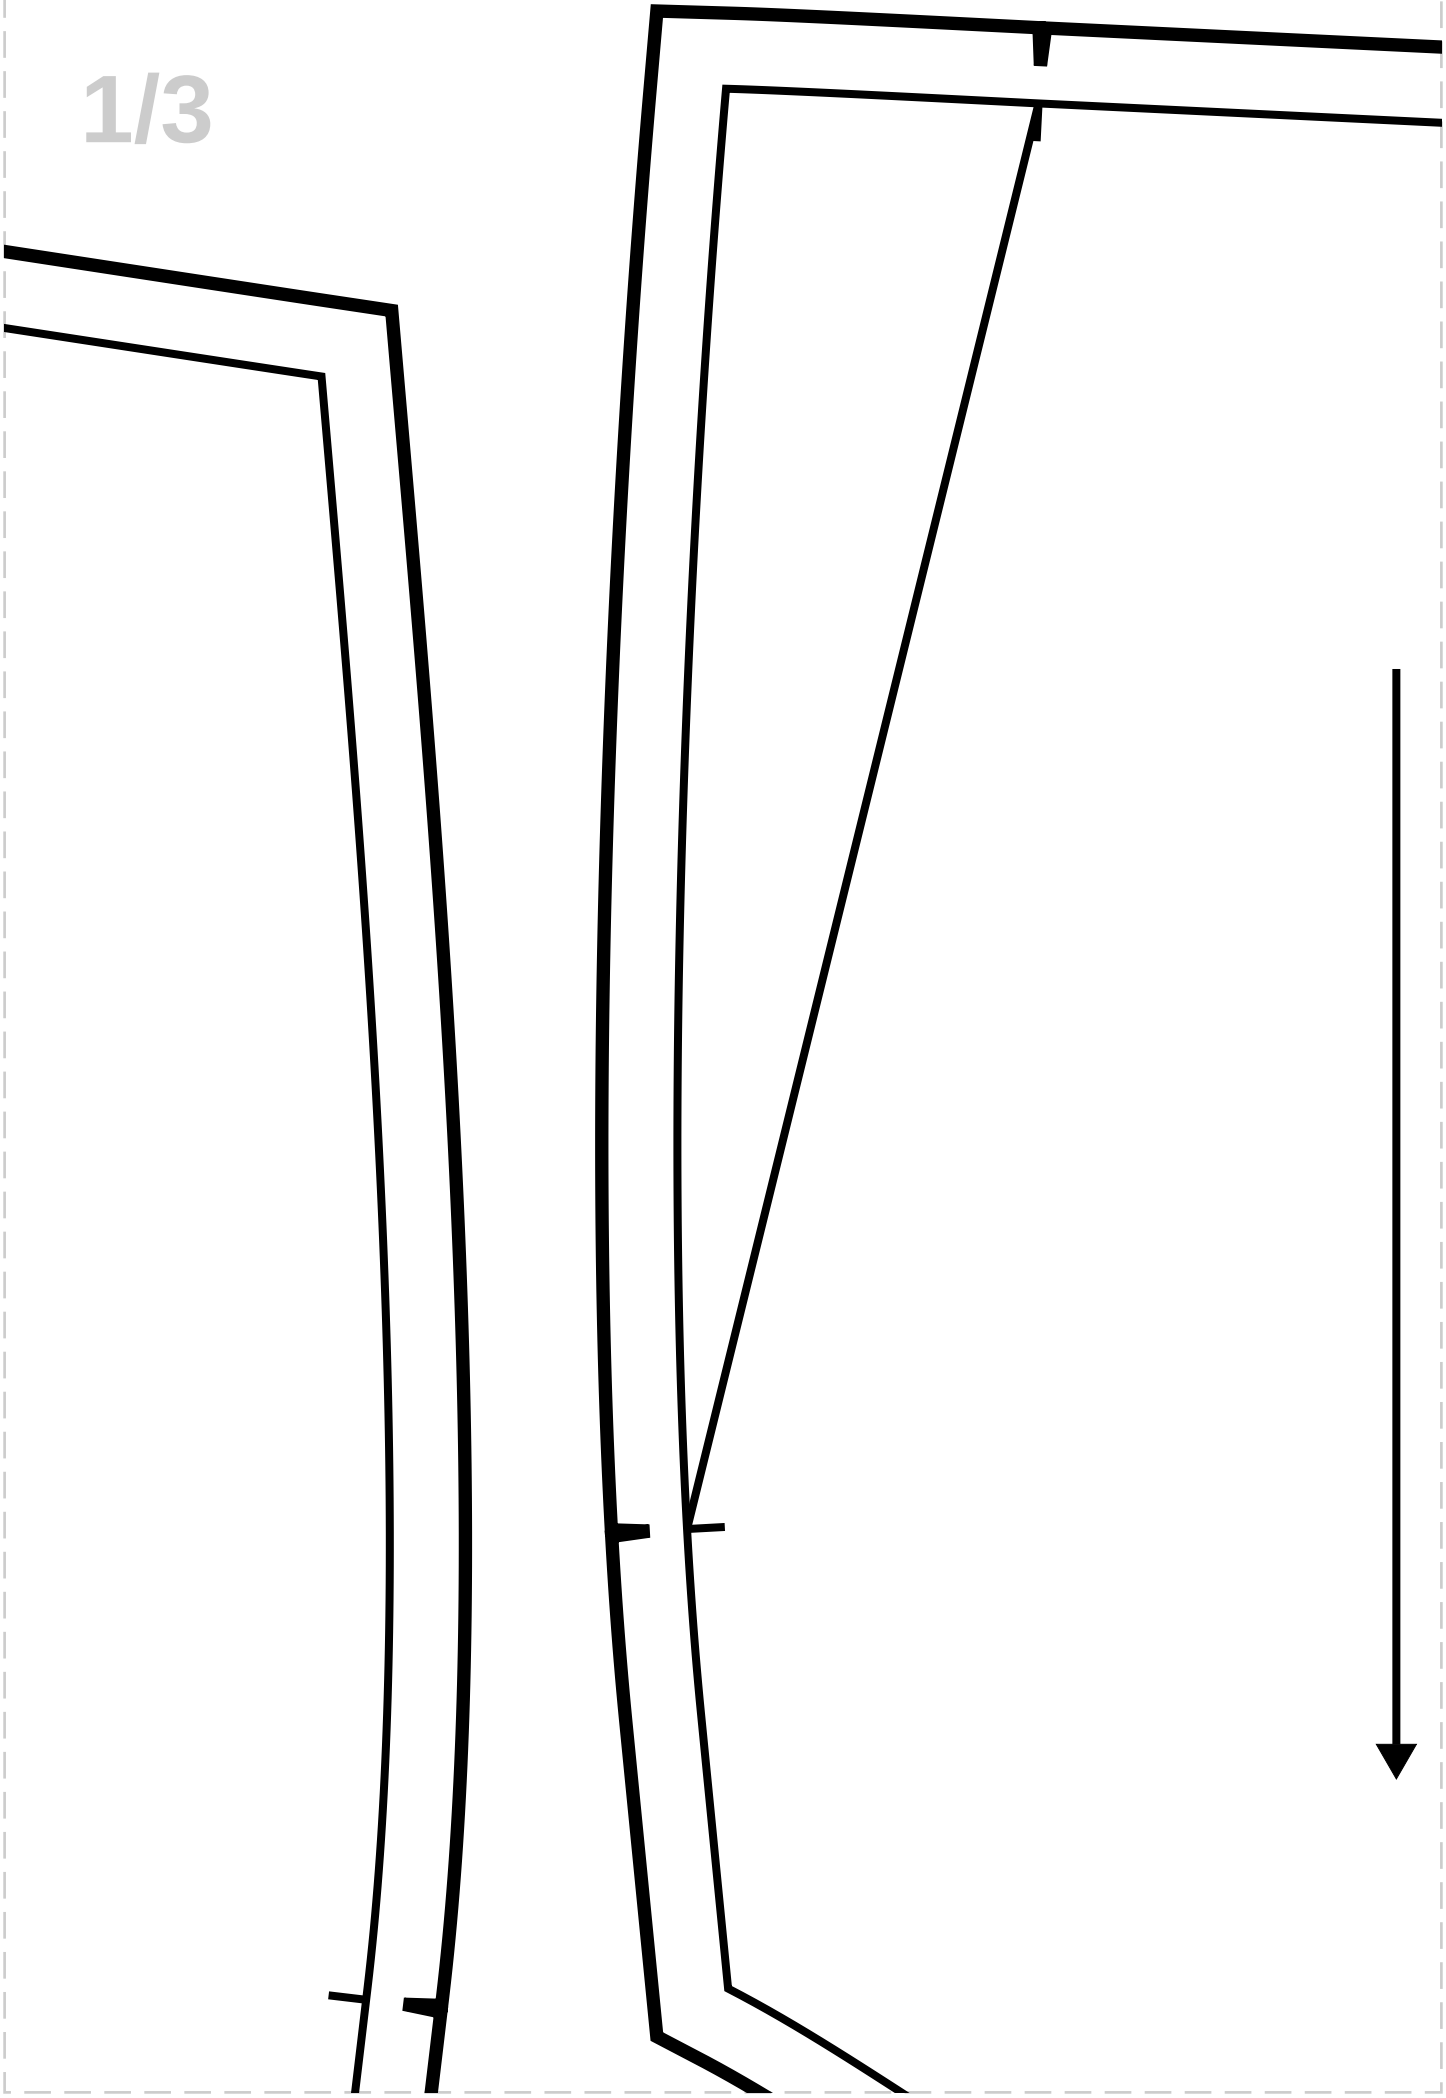

6
POCKET LINING
LINING: Cut 2
4
POCKET BAG
MAIN FABRIC: Cut 2

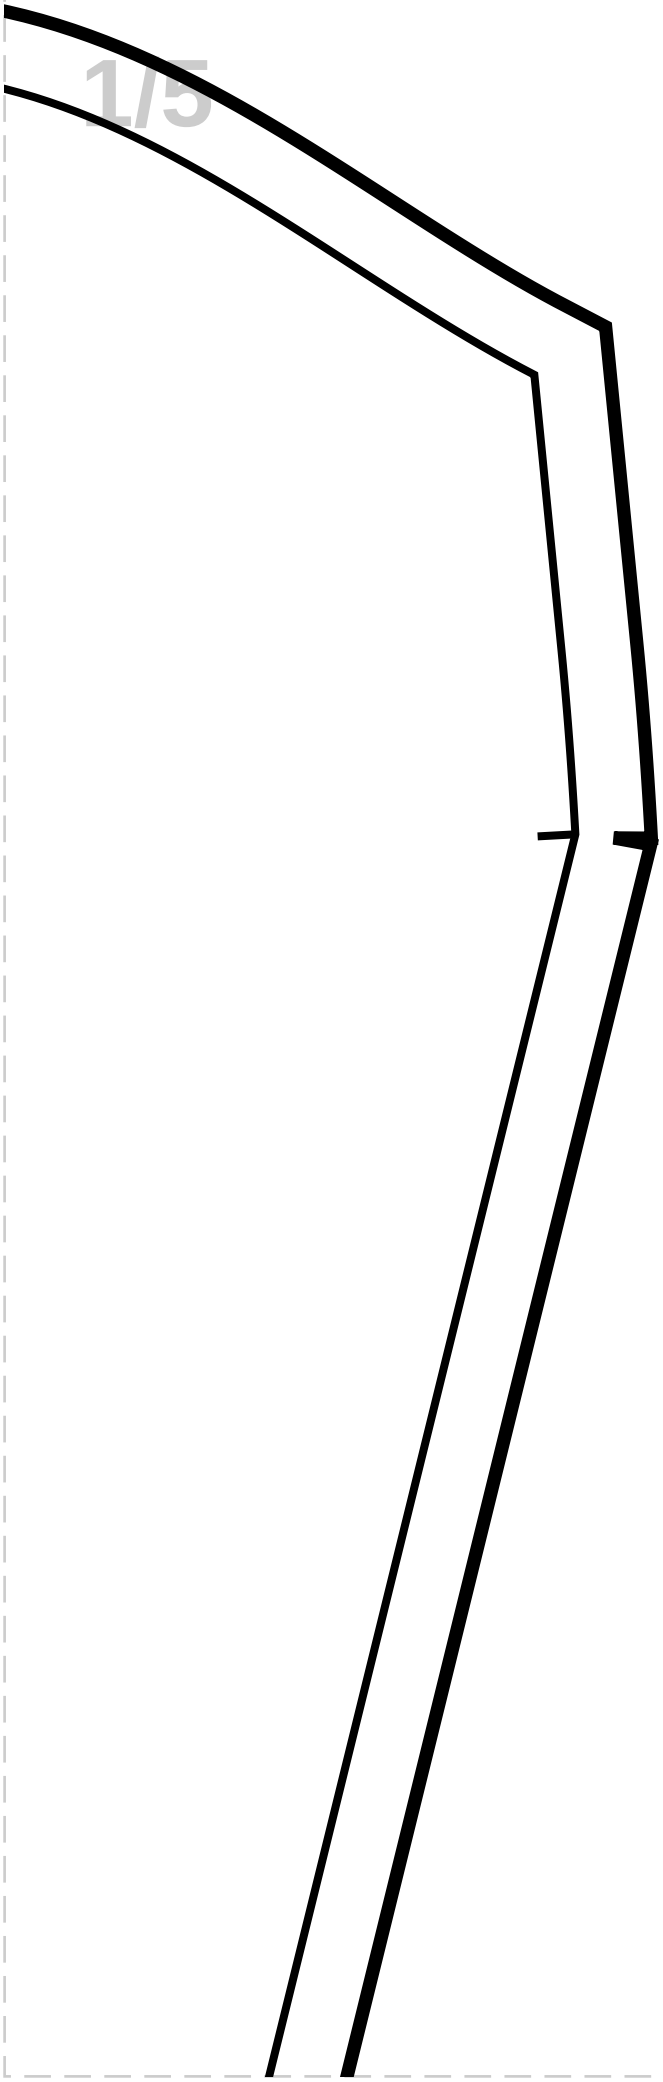

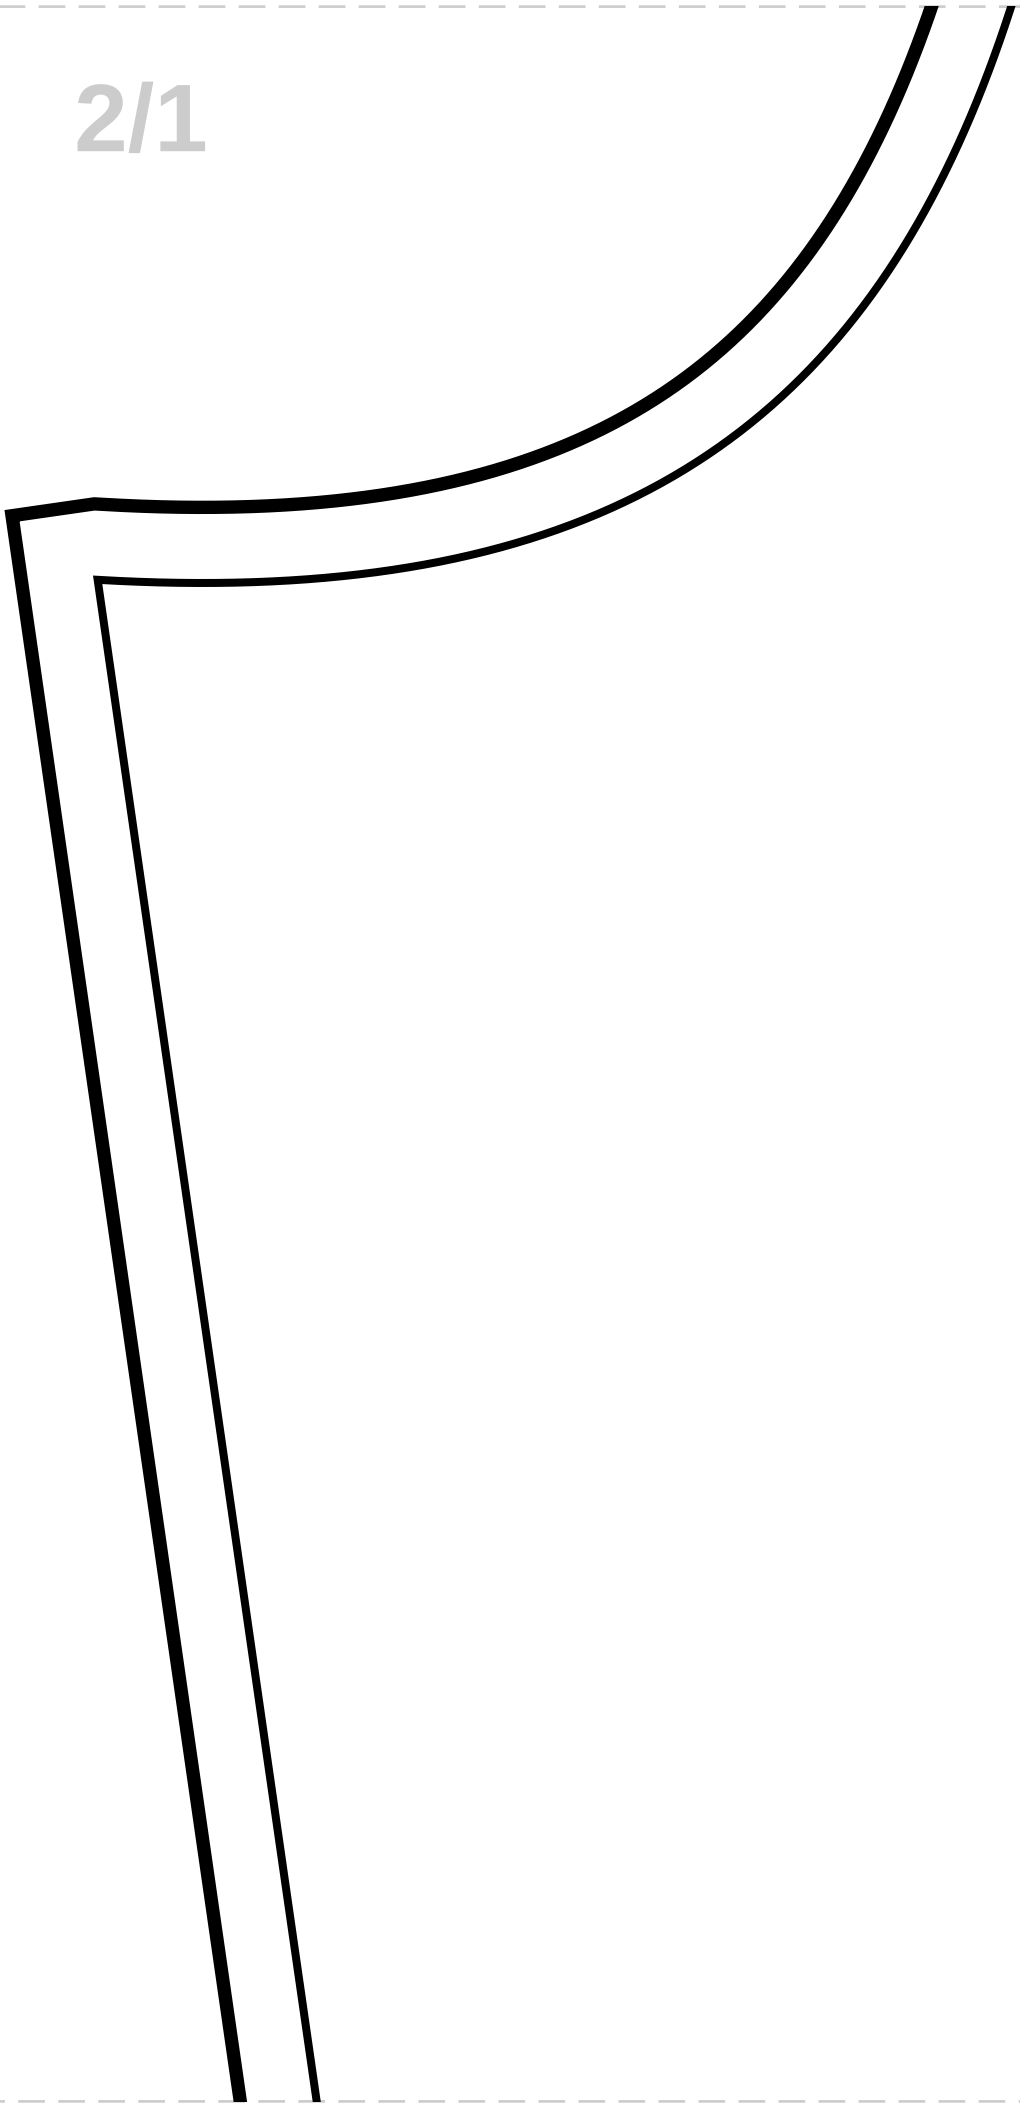

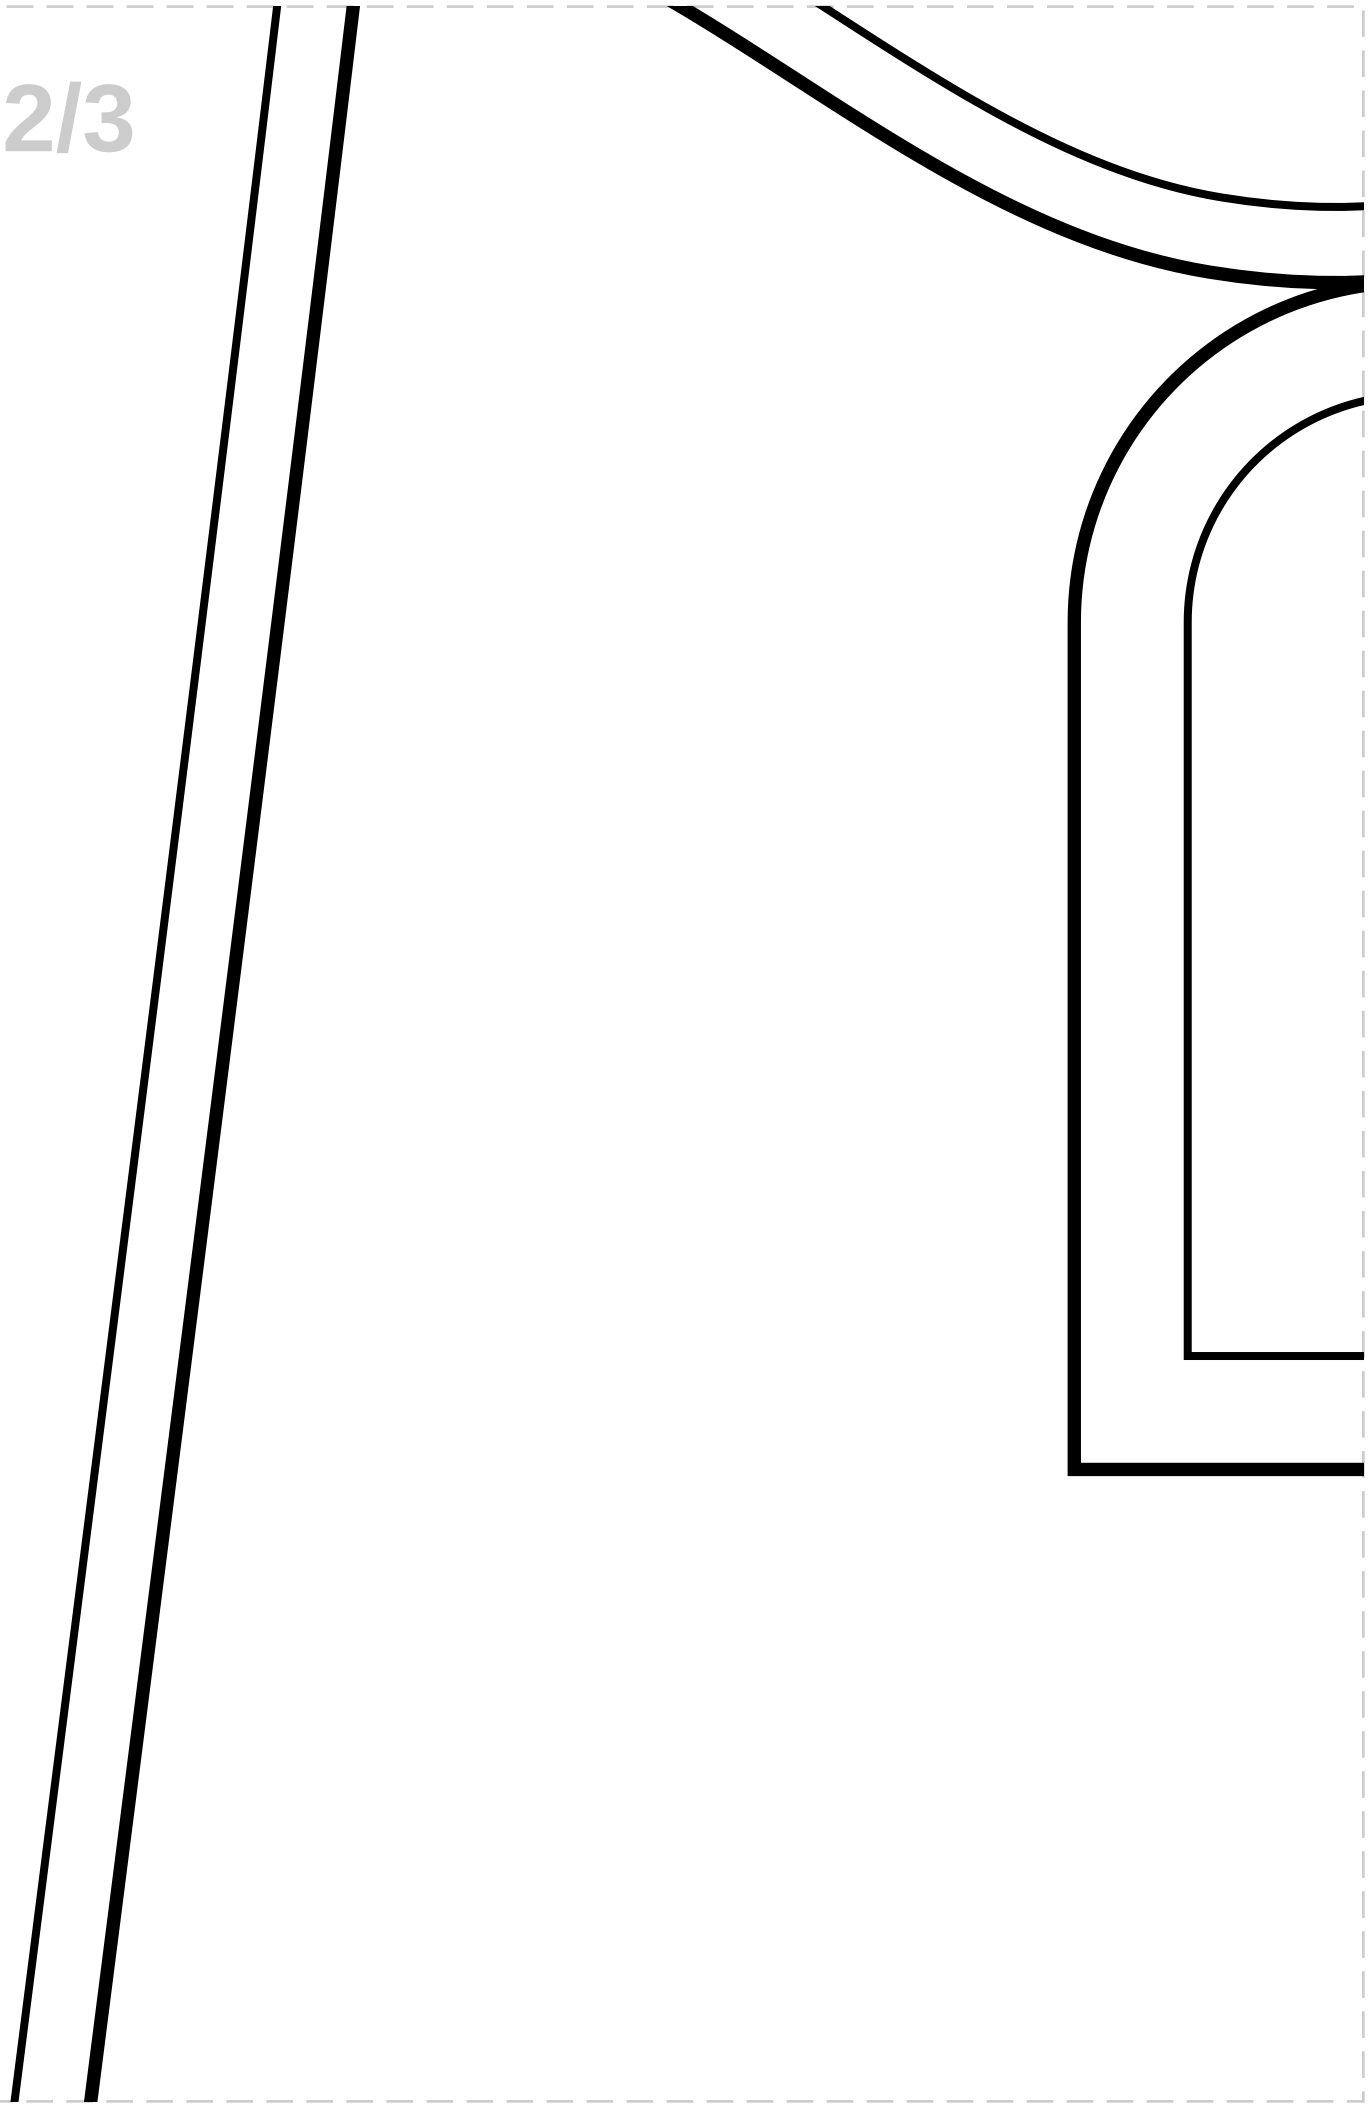

10

BACK OUTER POCKET BAG


LINING: Cut 2


8


BACK POCKET WELT

MAIN FABRIC: Cut 2

FUSIBLE INTERFACING: Cut 2

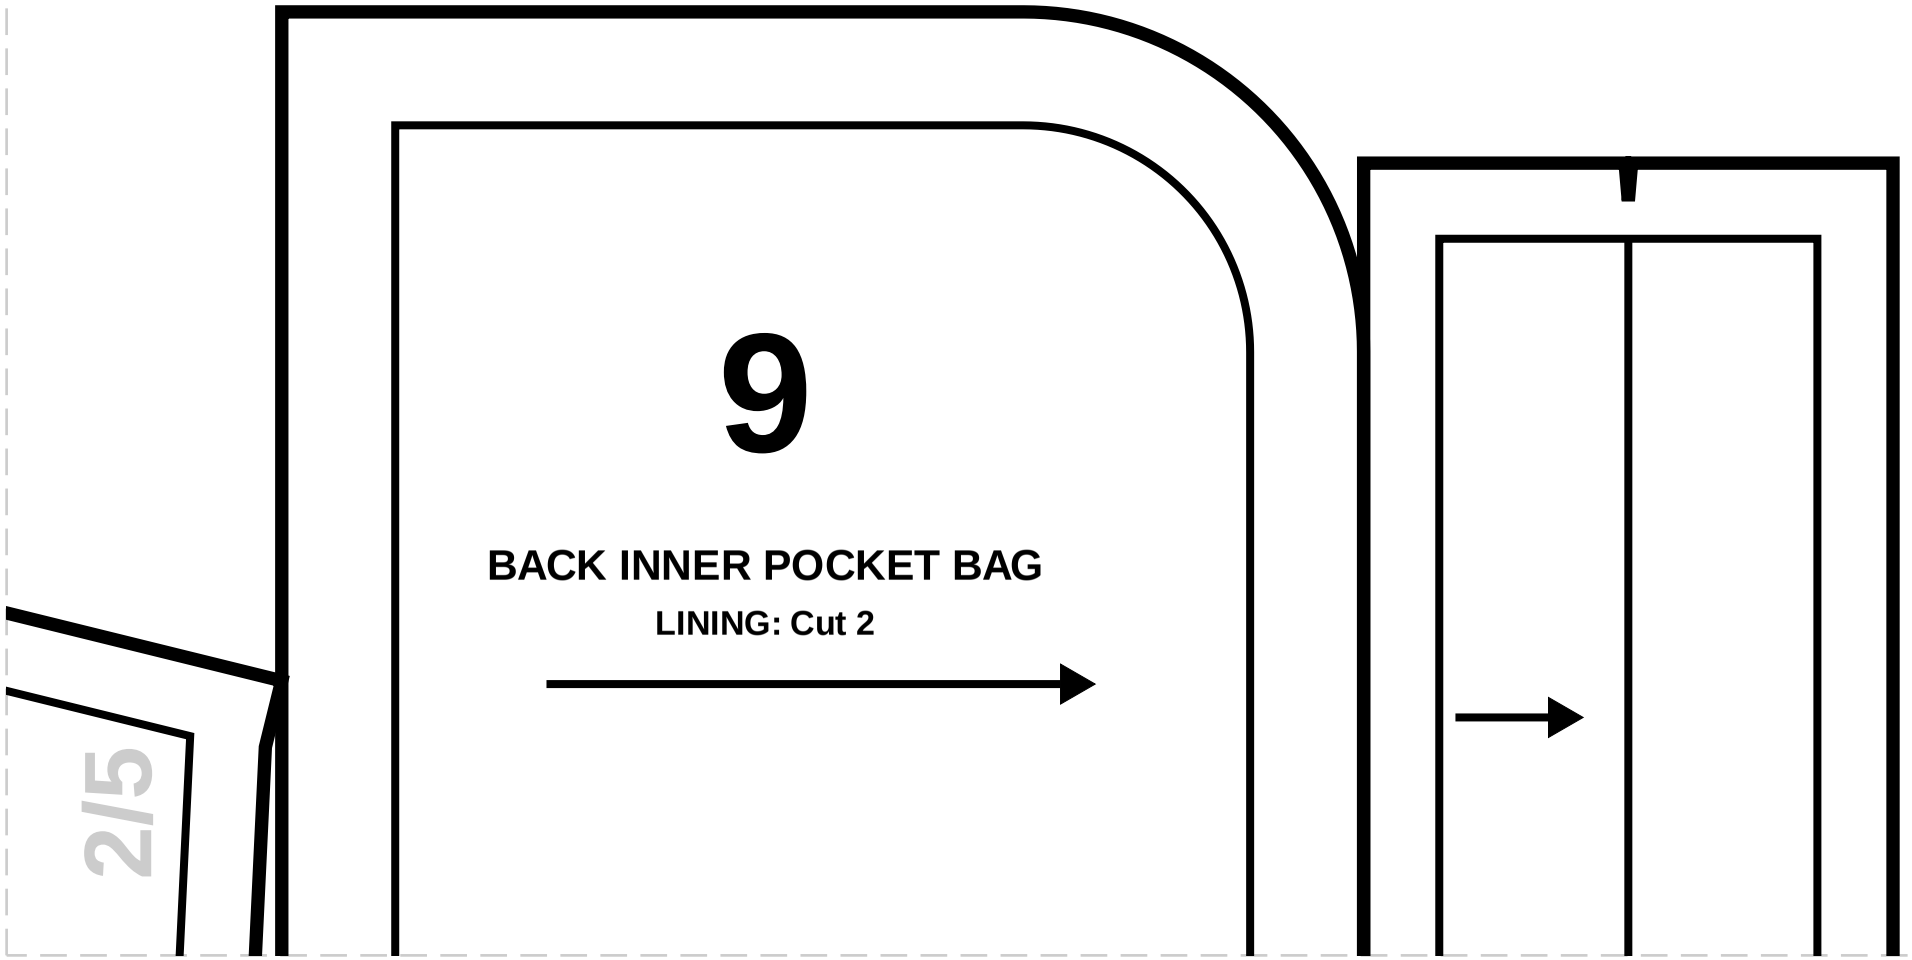

9
BACK INNER POCKET BAG
LINING: Cut 2
2/5

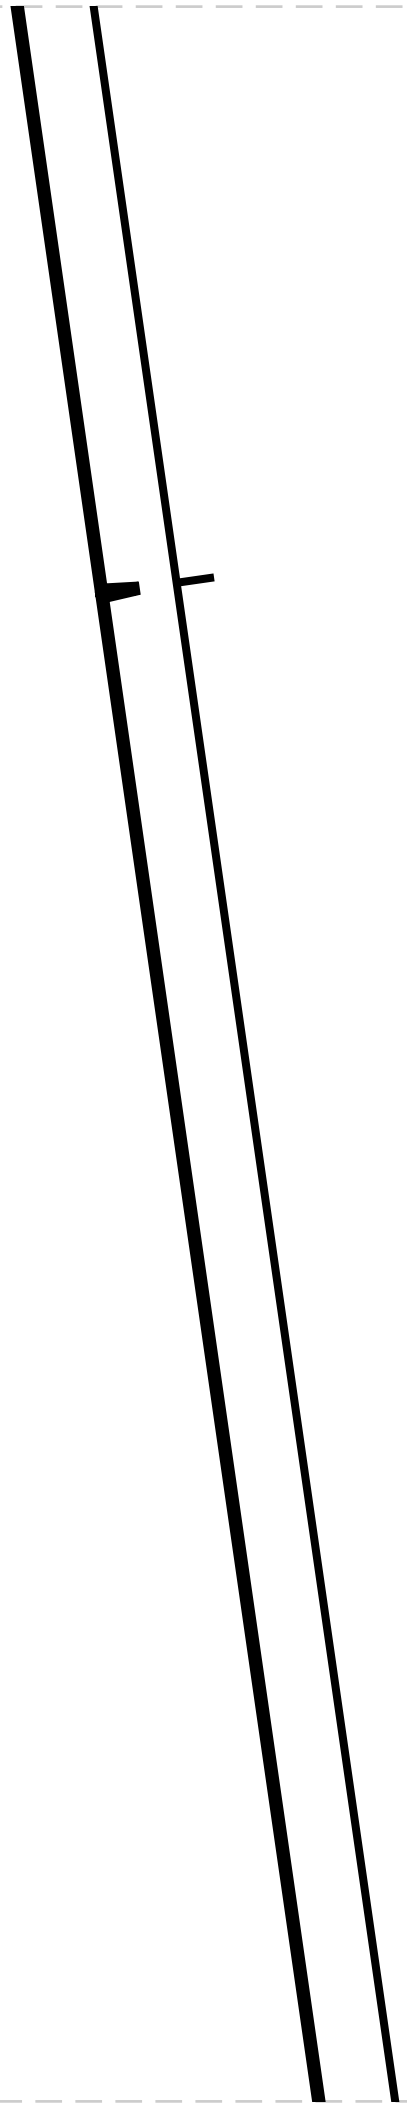


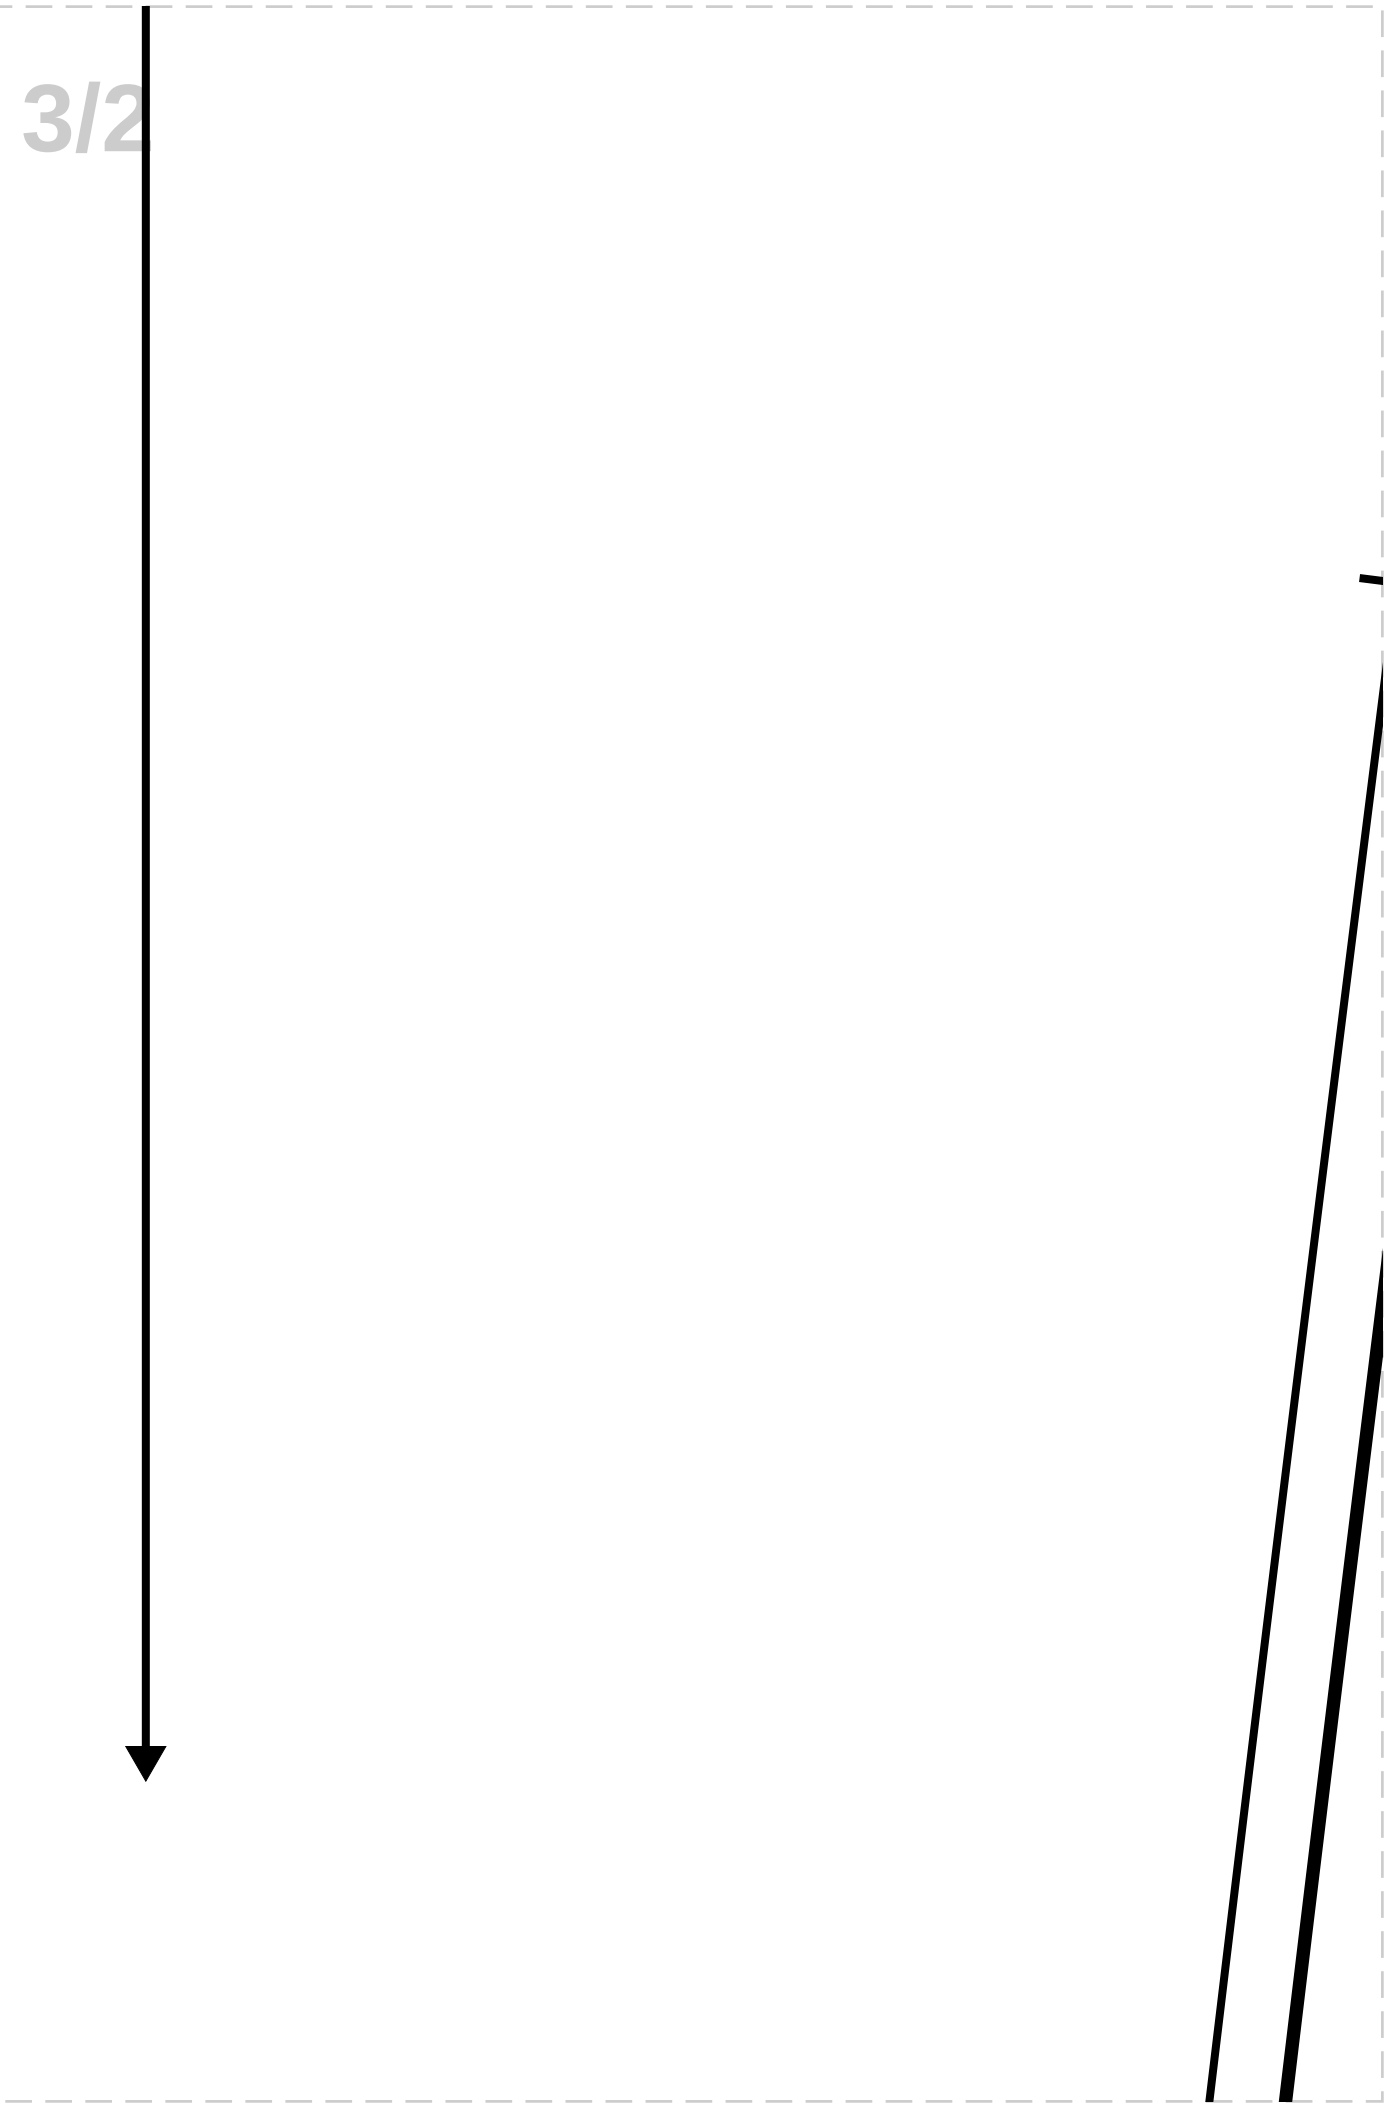



4/1

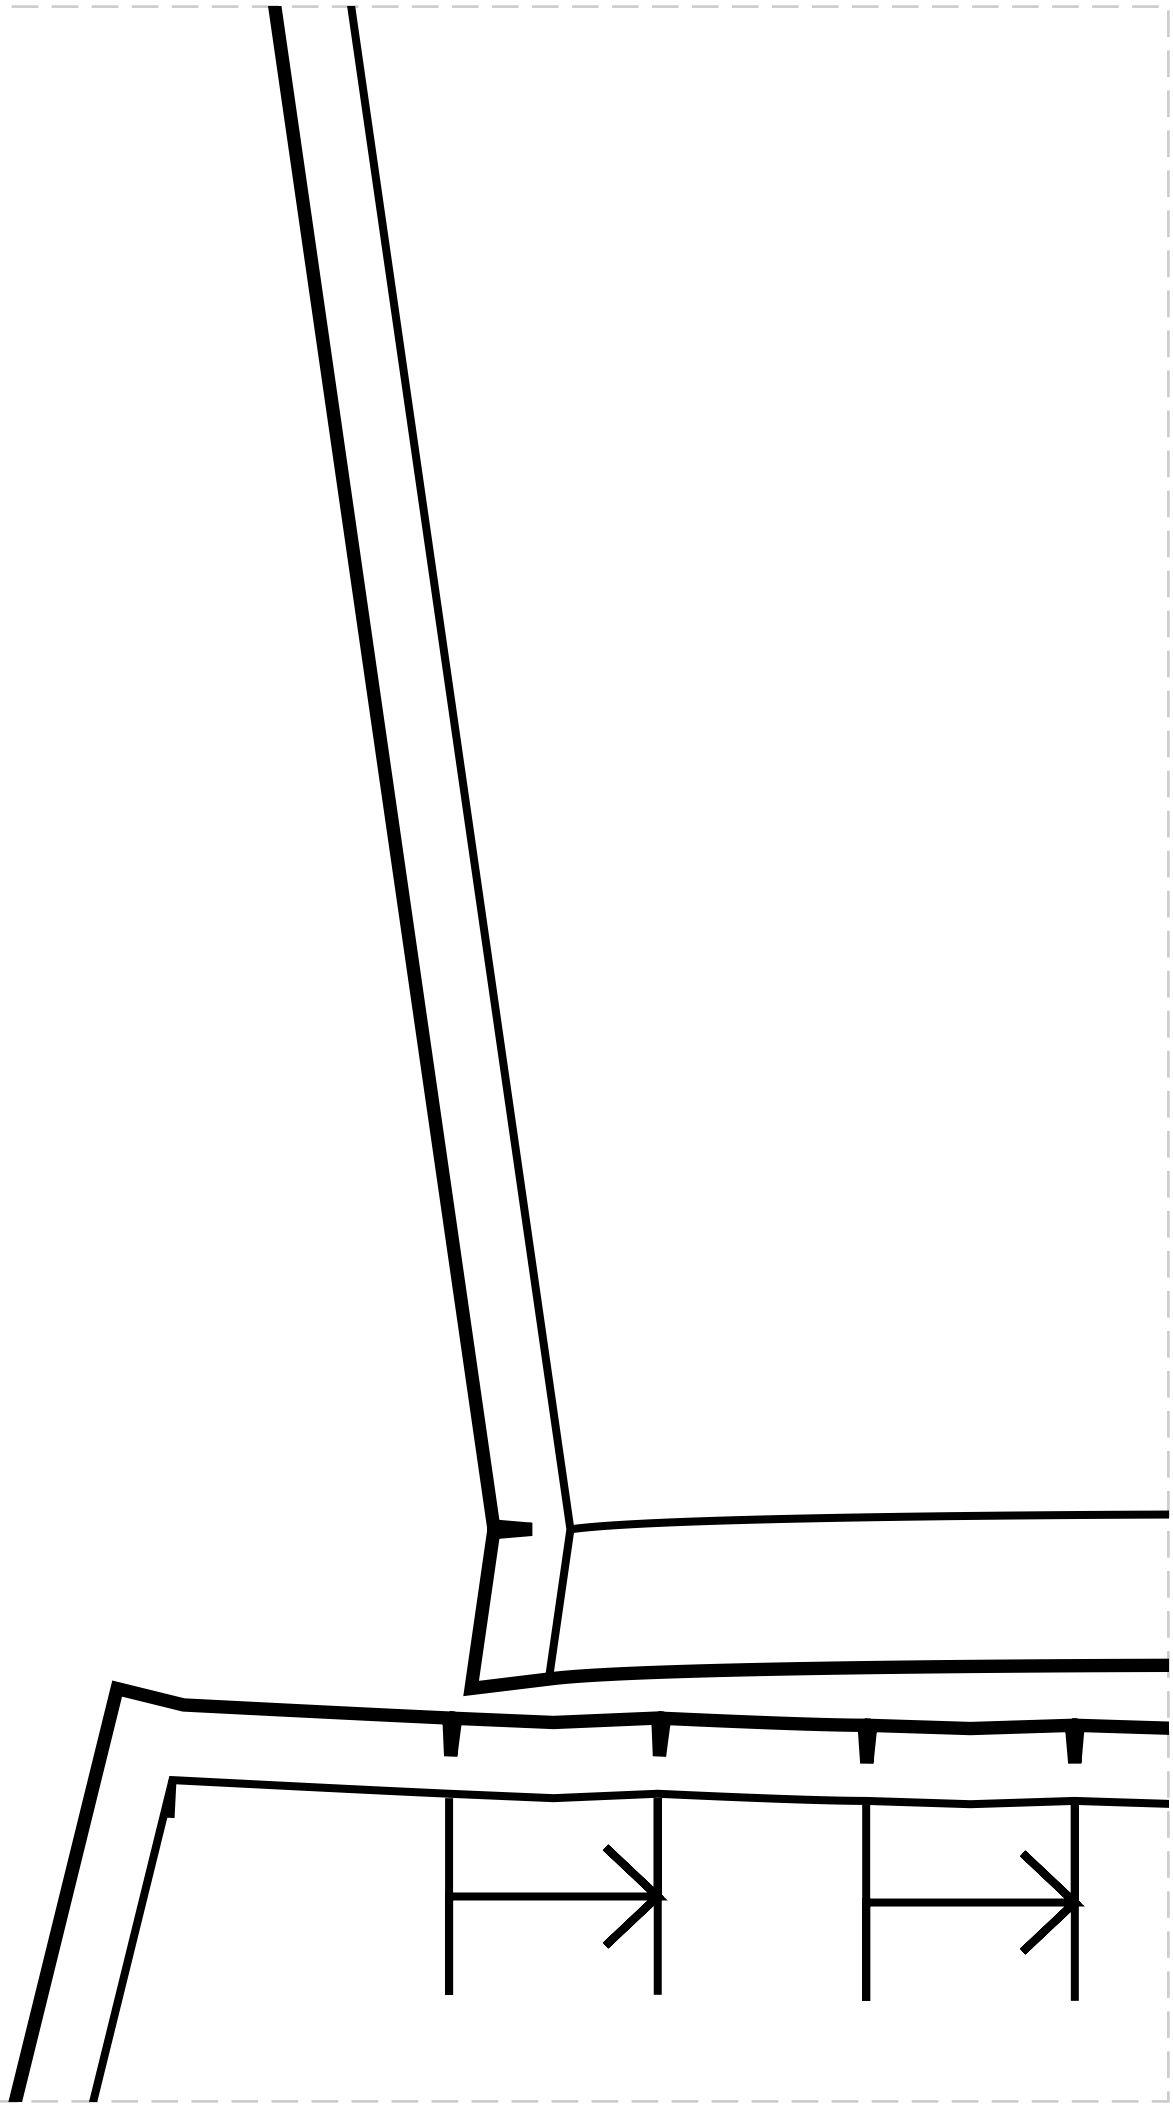

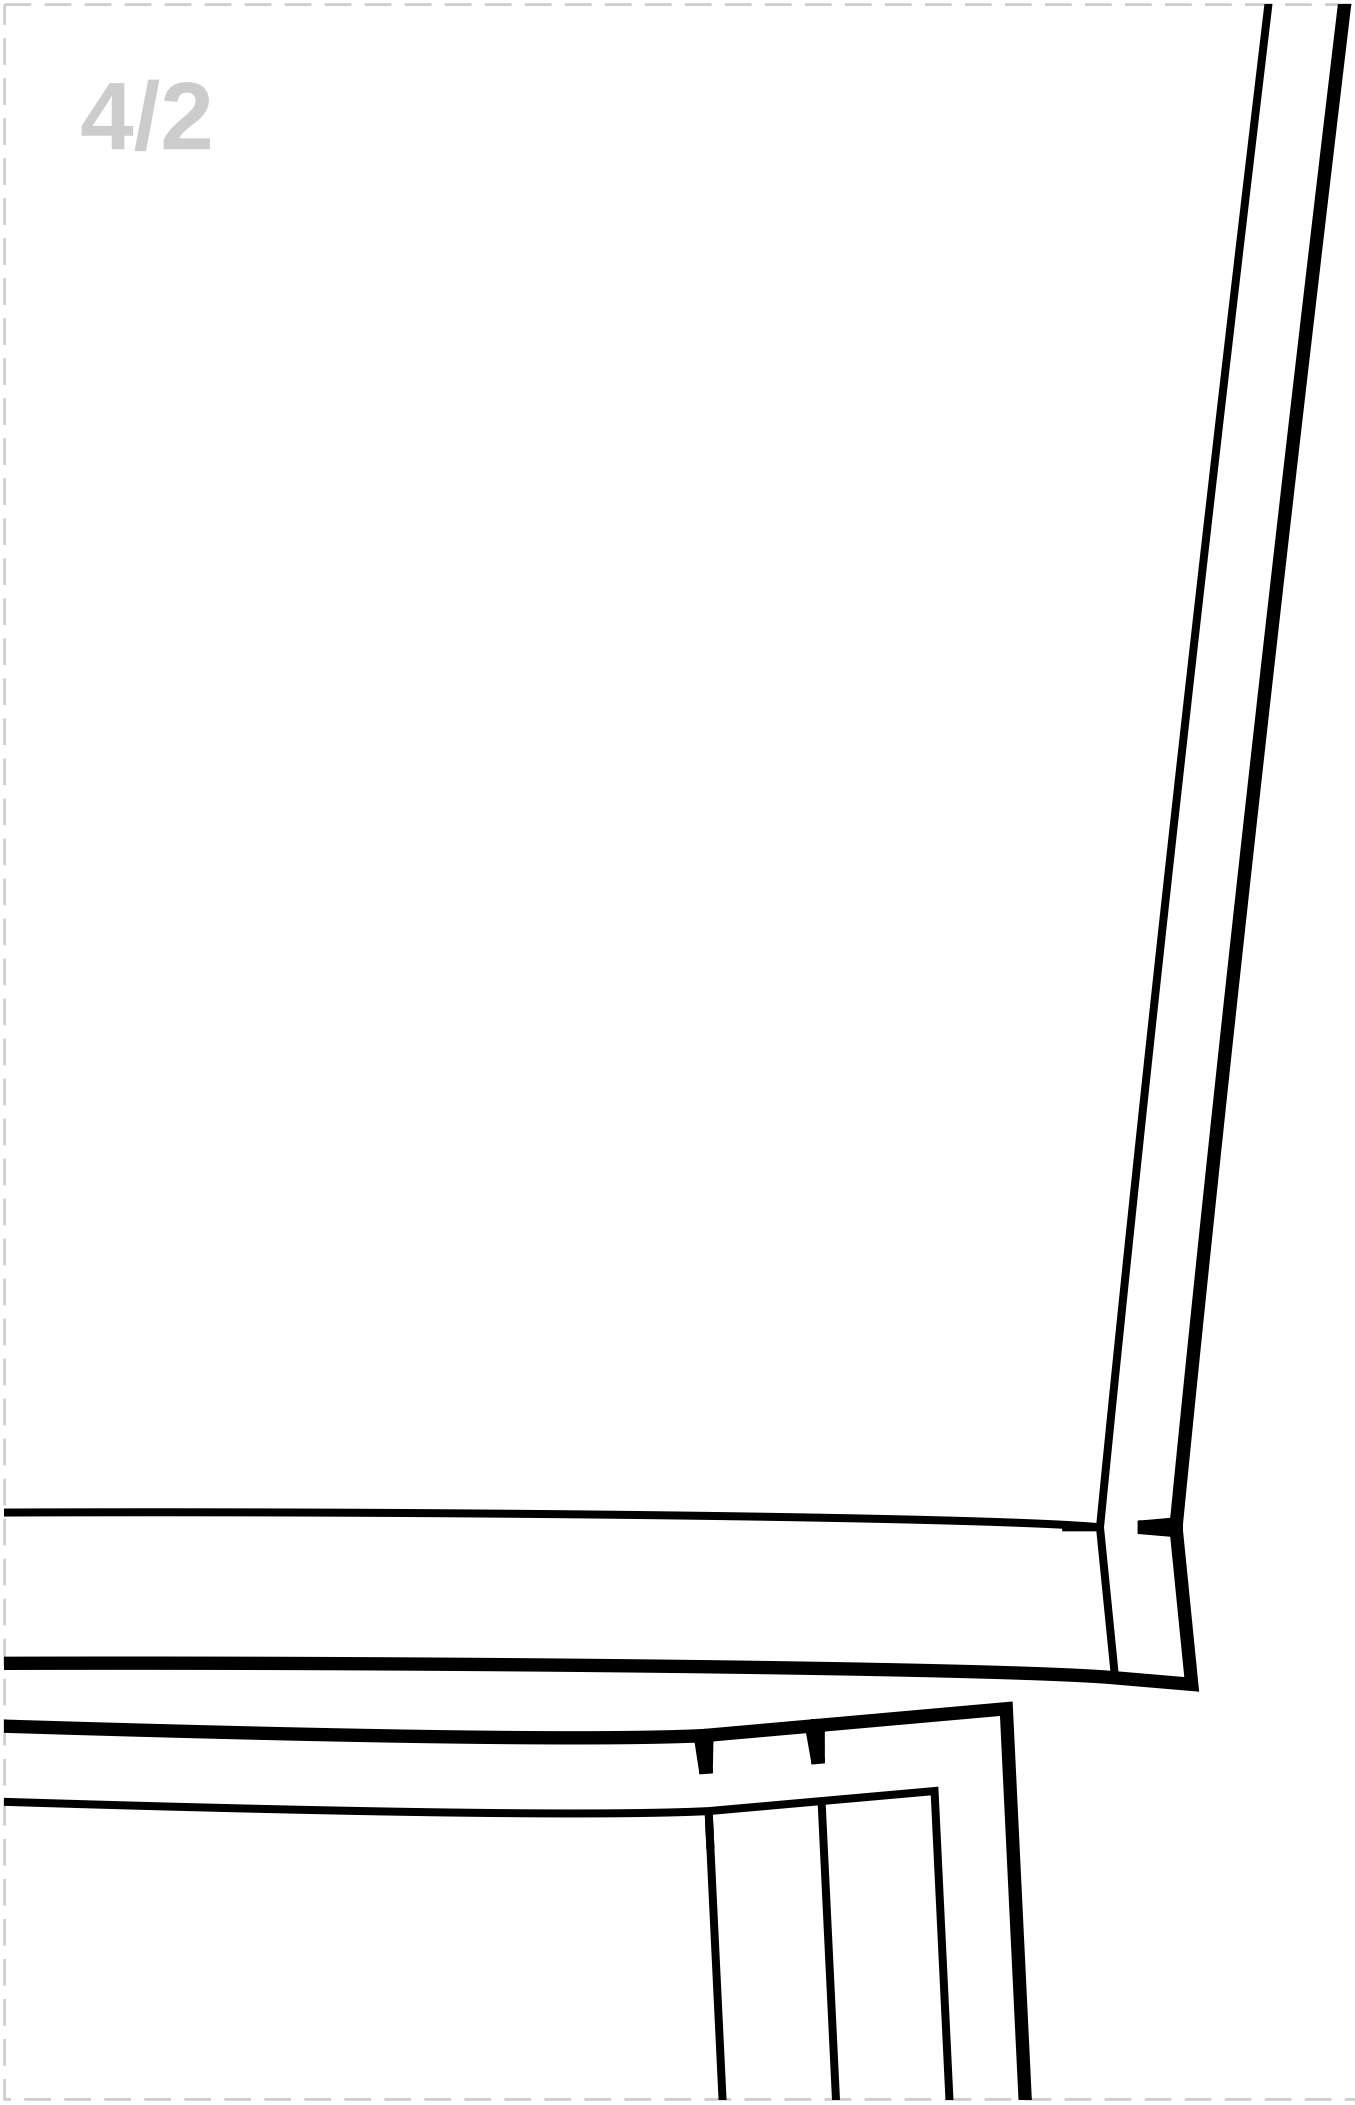


4/3


1

PANTS FRONT

MAIN FABRIC: Cut 2

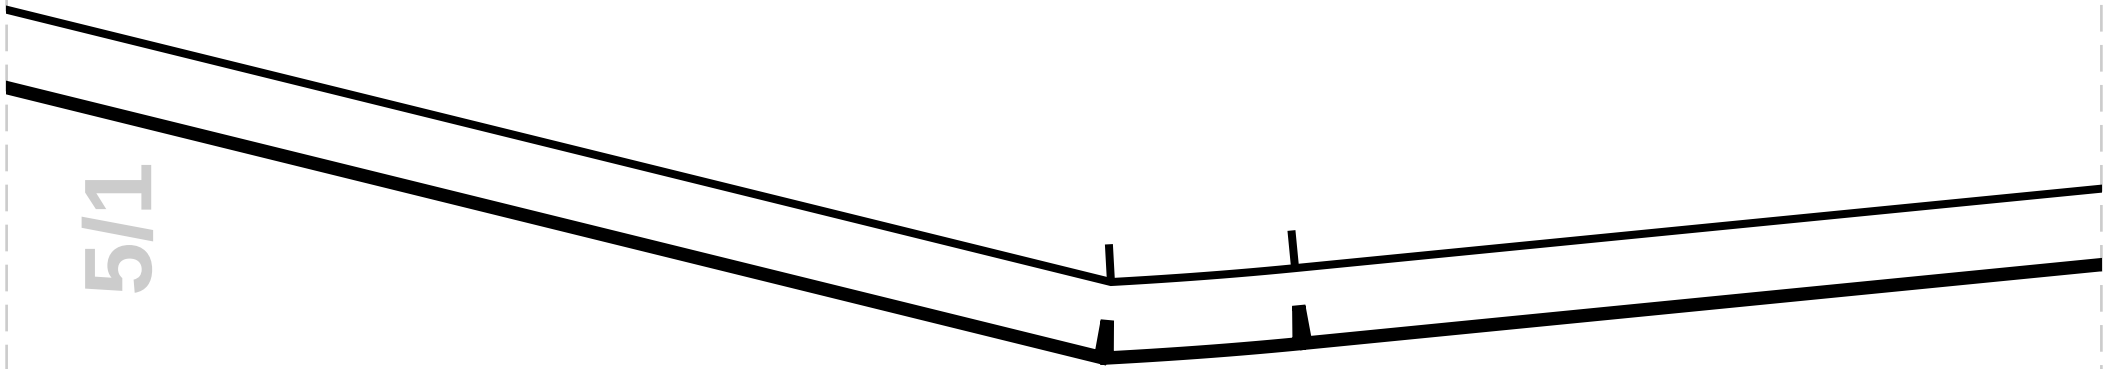



5/1

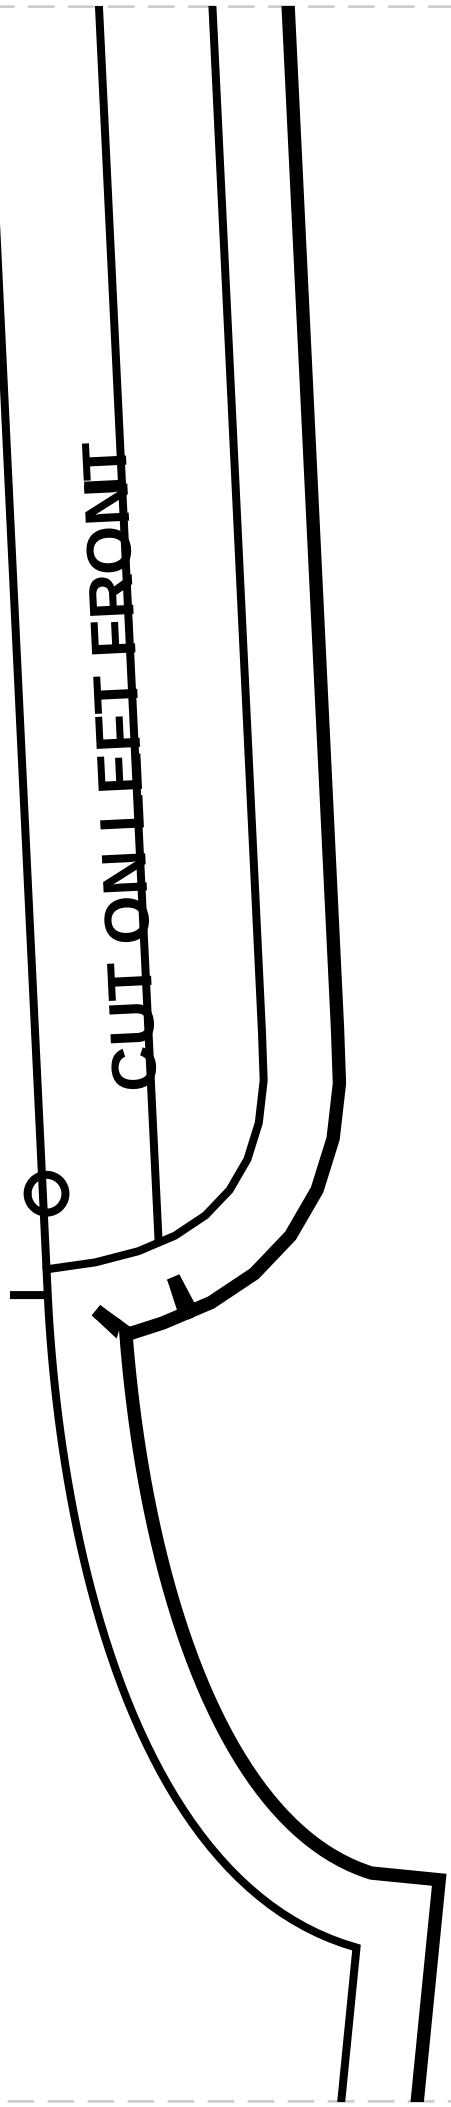
CUT ON LEEFRONT

5/3

5/4

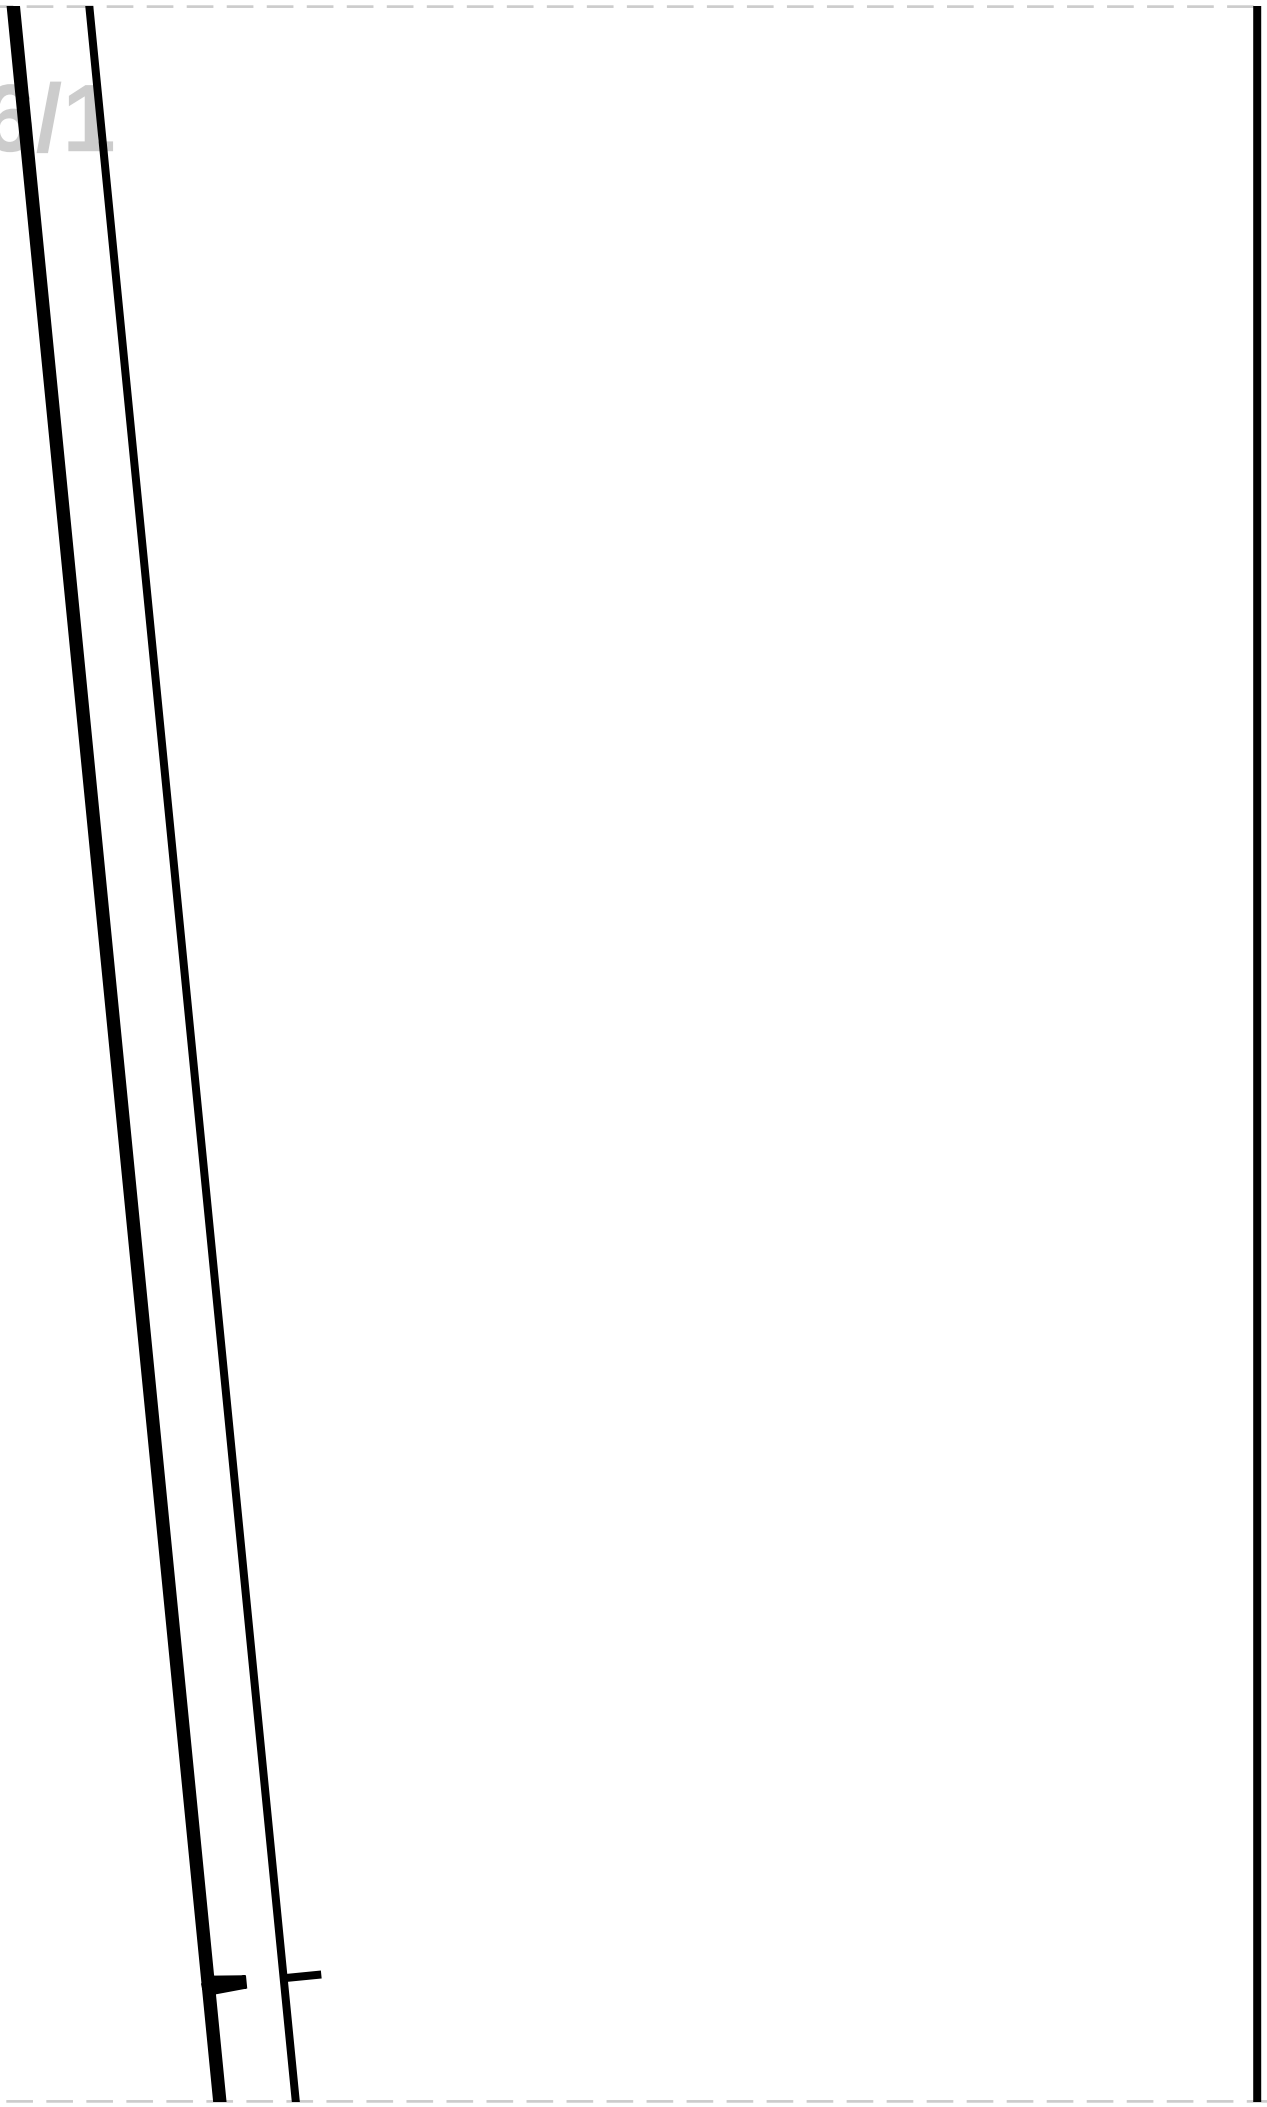


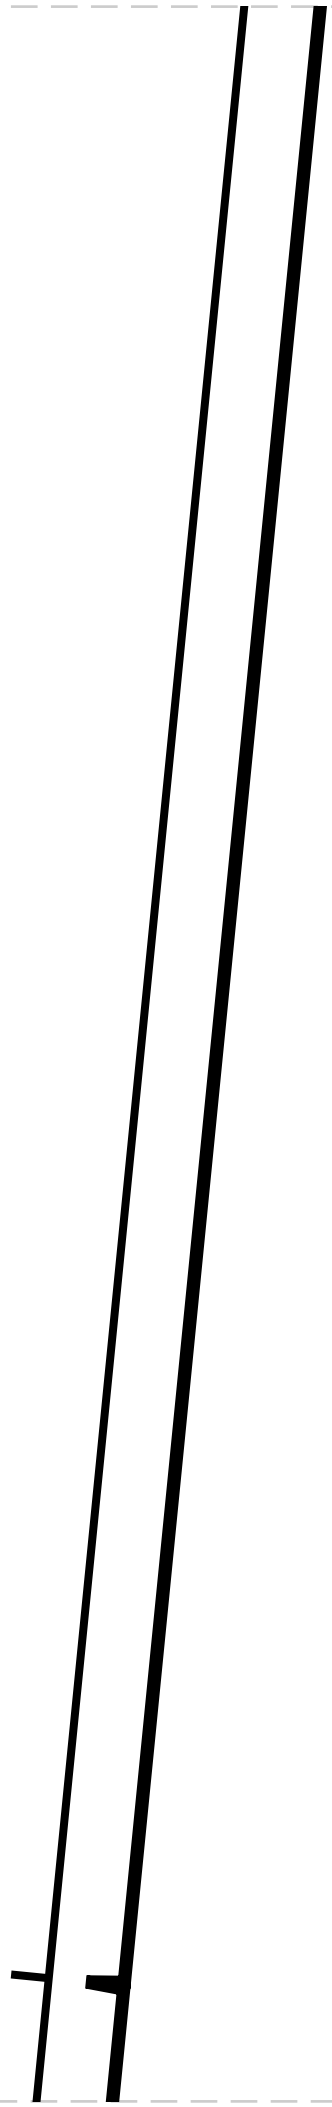


6/3

6/4

6/5

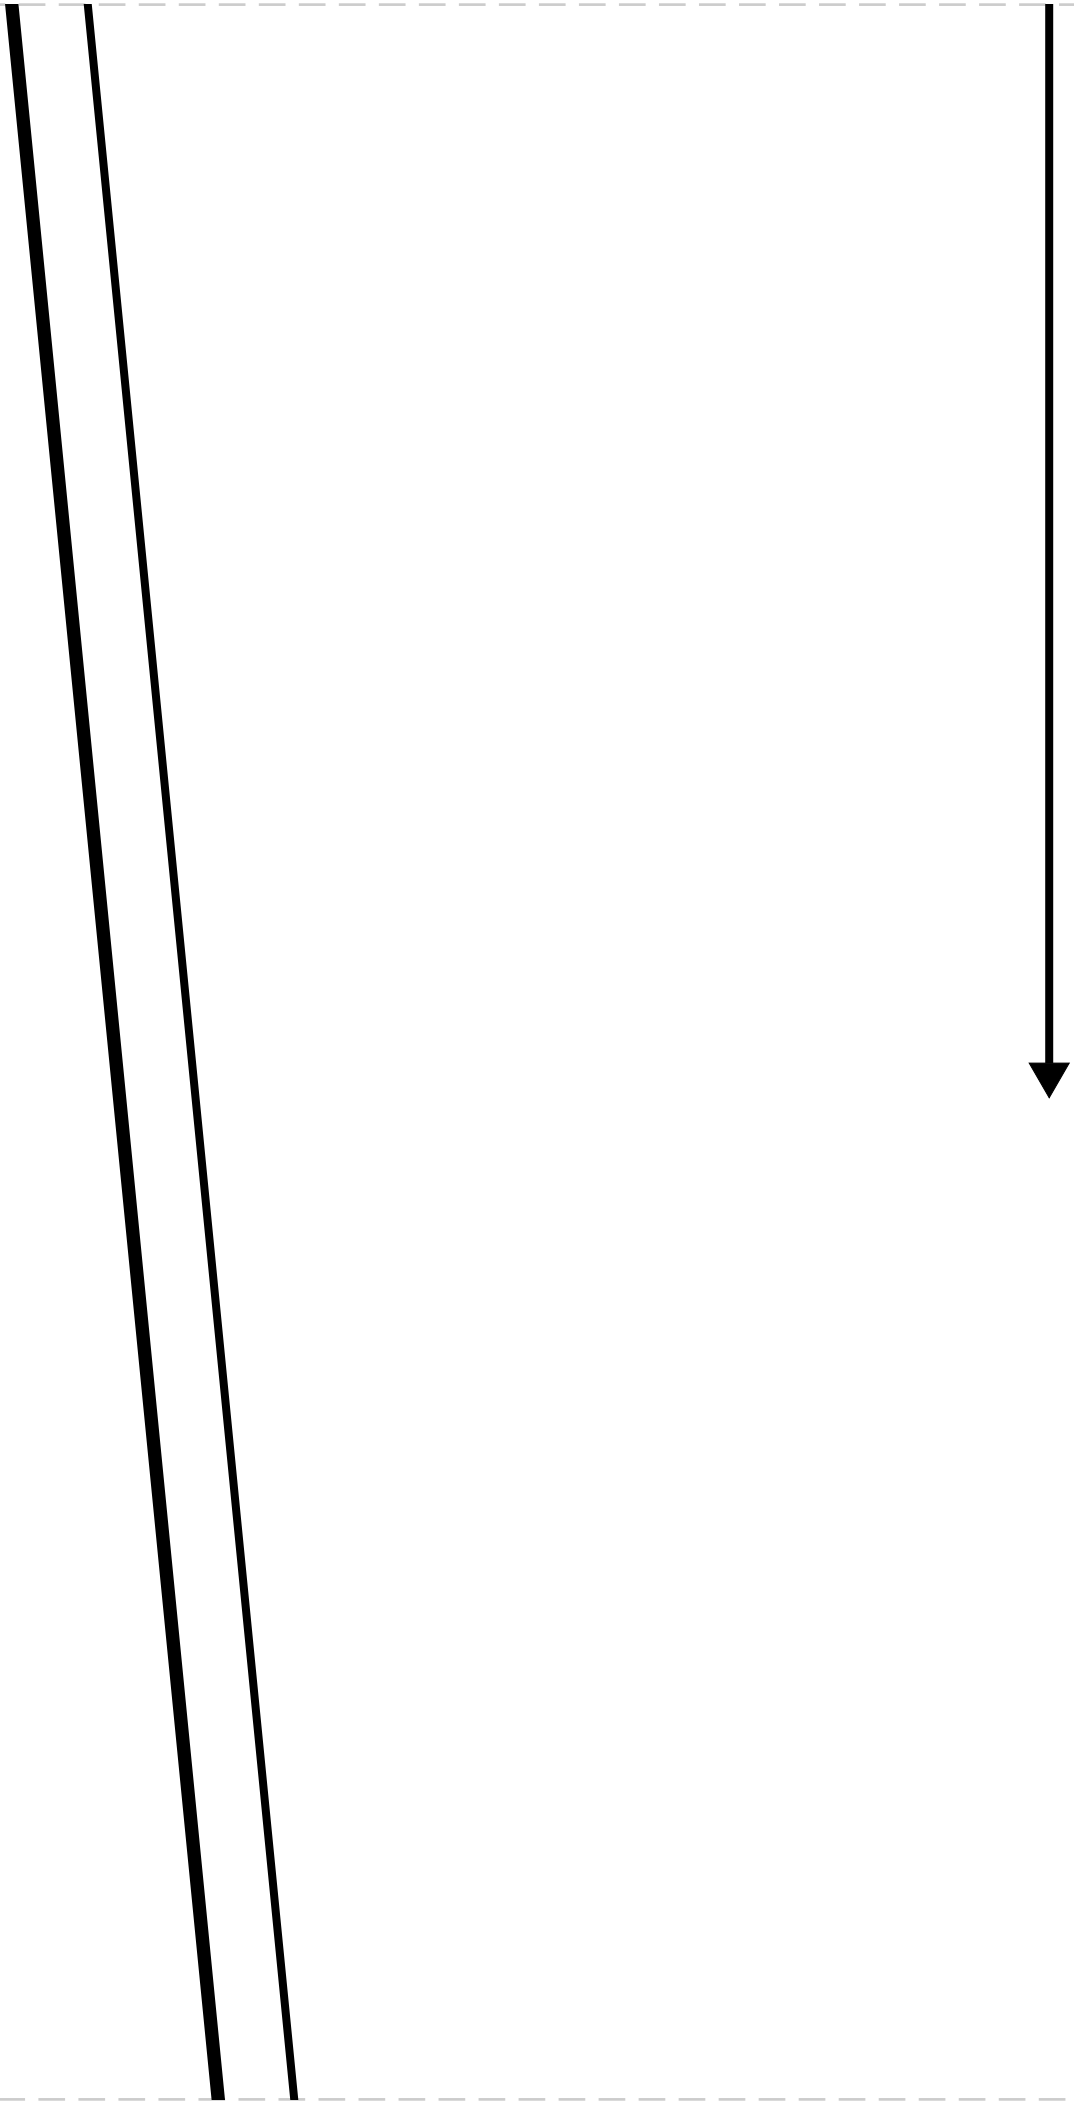

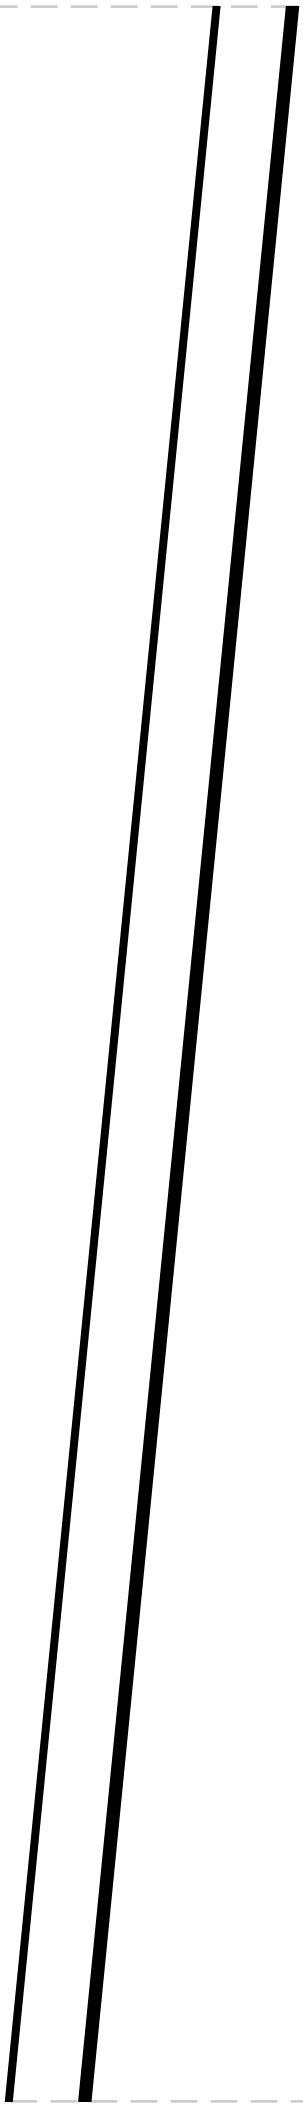


7/3

7/4


7/5

CENTER FRONT
3
WAISTBAND
MAIN FABRIC: Cut 1
FUSIBLE INTERFACING: Cut 1


8/2

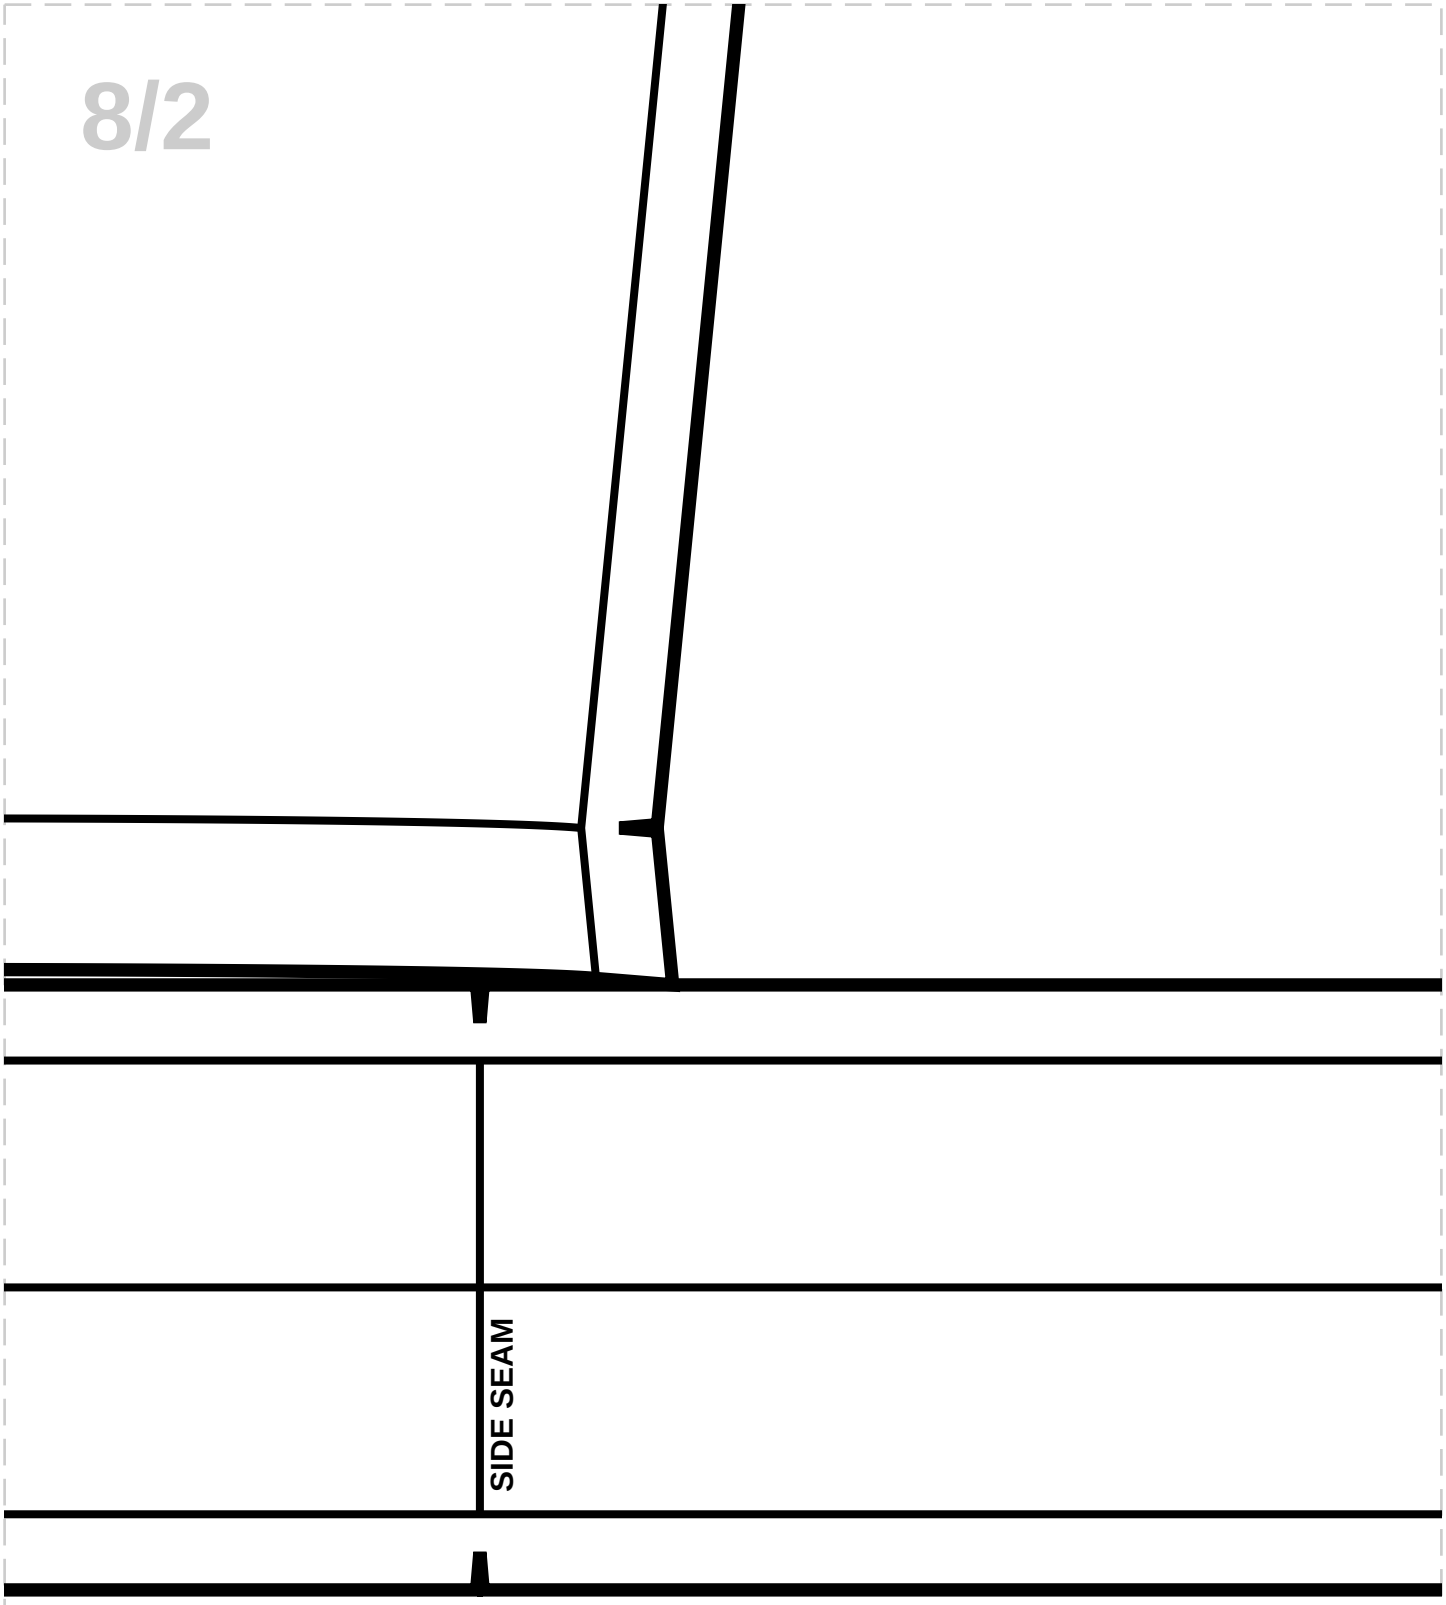


8/3

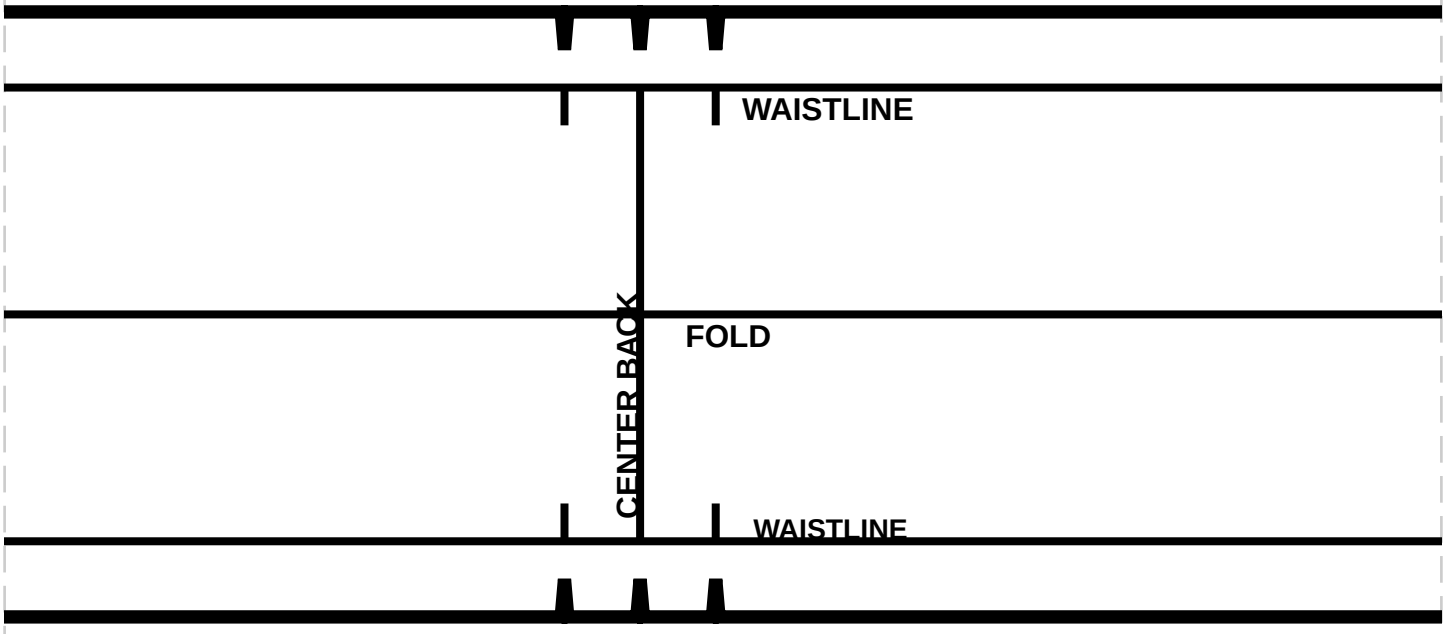

8/4

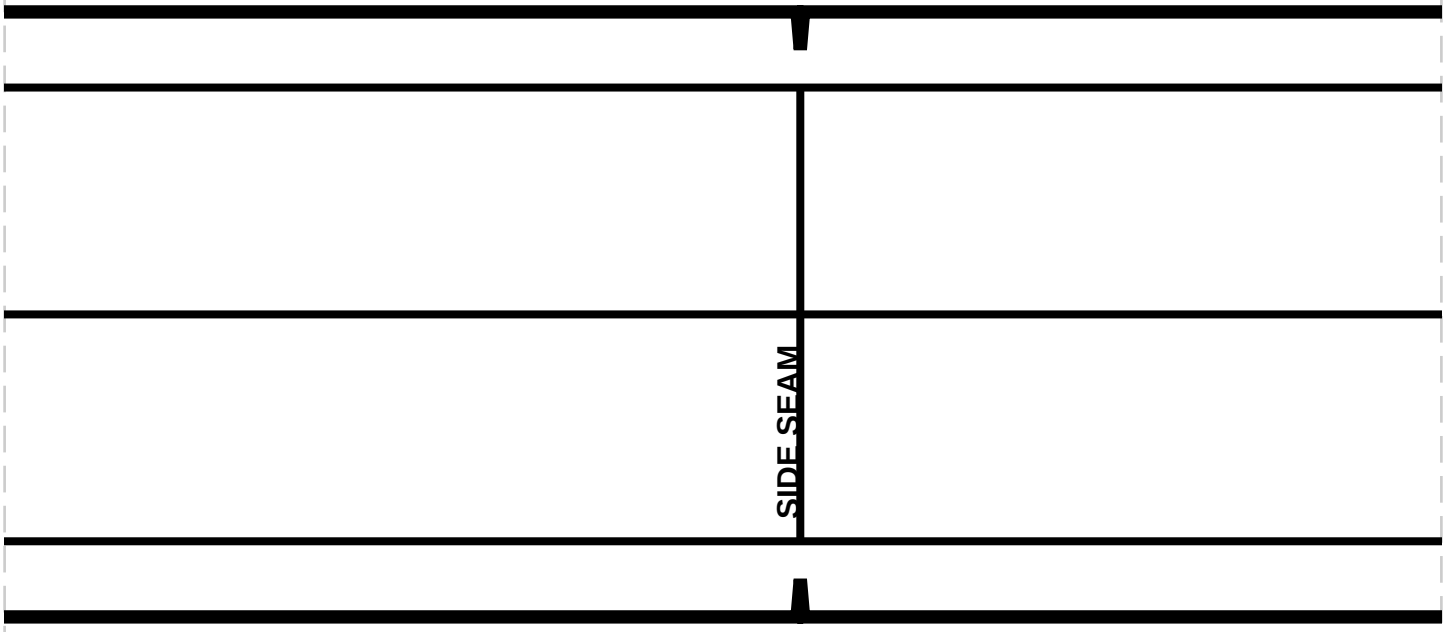

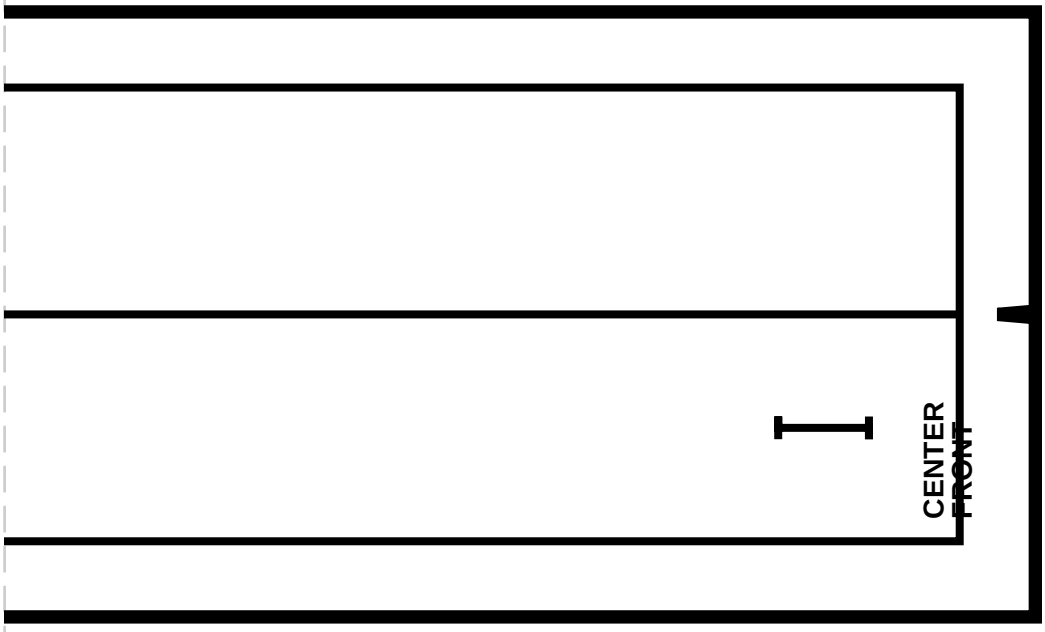
CENTER
FRONT