
cozysewpatterns

Print this Calibration Test page first!

Size: Height: 167.75, Bust: 119.25, Waist: 104.75, Hips: 125.75
SIZE 20

Notes

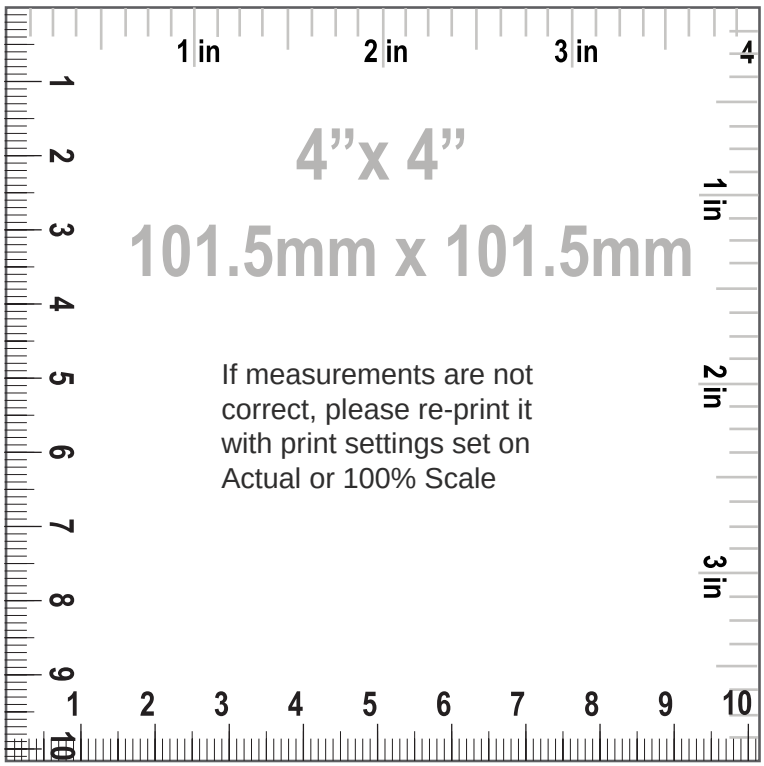

How to print

Printing

Once your Calibration Test Page has been printed, measure the 4”x 4” (10cm) scale box with a ruler. If the lengths match, you can confidently print your pattern. If the rulers do not match, set your print settings to 100% or Actual and retry.

Cutting

Your printouts will always have a dashed border to perfectly match your sheets. Cut off the right edge of each page. Be careful not to cut beyond the dashed mark, otherwise your patterns will not align accurately.

Tapping

Group each sheet by the second number marked on each pate i.e. in a group 1, there are: 1/1, 2/1, 3/1, 4/1, etc. In a group 2: 1/2, 2/2 etc. 2. Place page 1/1 on top of the page 2/1, overlapping the right side edge. Match corners and crosses and secure with a pin or tape. Then use a scotch tape to permanently attach the sheets together.

SIZE 20
Seam Allowance: 1 (3/8 in)

Pattern pieces:

1. "PANTS FRONT", MAIN FABRIC: Cut 2
2. "PANTS BACK", MAIN FABRIC: Cut 2
3. "WAISTBAND", MAIN FABRIC, FUSIBLE INTERFACING: Cut 1
4. "POCKET BAG", MAIN FABRIC: Cut 2
5. "FLY FACING", MAIN FABRIC: Cut 1
6. "POCKET LINING", LINING: Cut 2
7. "FLY INTERFACING", FUSIBLE INTERFACING: Cut 1
8. "BACK POCKET WELT", MAIN FABRIC, FUSIBLE INTERFACING: Cut 2
9. "BACK INNER POCKET BAG", LINING: Cut 2
10. "BACK OUTER POCKET BAG", LINING: Cut 2


Pattern Specs (Circumferences are divided by 2):


1. Hem max 3.00 none (1 1/8 in)
2. Seam allowance max 2.00 none (3/4 in)
3. Stretch factor 1.00 none (3/8 in)
4. Stretch factor horizontal 1.00 none (3/8 in)
5. Stretch factor vertical 1.00 none (3/8 in)
6. Pocket bag height 30.82 cm (12 1/8 in)
7. Pocket side seam 20.69 cm (8 1/8 in)
8. Pocket waist seam 20.69 cm (8 1/8 in)
9. Back pocket entry length 14.55 cm (5 3/4 in)
10. Side seam back pocket position 9.15 cm (3 5/8 in)
11. Waist to back pocket length 11.53 cm (4 1/2 in)
12. Back pocket width welt 2.50 cm (1 in)
13. Fly zipper length 23.00 cm (9 in)
14. Waist 53.42 cm (21 in)
15. Hips 65.61 cm (25 7/8 in)
16. Pleat depth 1.64 cm (5/8 in)
17. Thigh 41.87 cm (16 1/2 in)
18. Knee 33.50 cm (13 1/4 in)
19. Bottom opening 23.16 cm (9 1/8 in)
20. Front rise 33.71 cm (13 1/4 in)
21. Back rise 49.47 cm (19 1/2 in)


22. Crotch height 31.87 cm (12 1/2 in)
23. Inseam length 65.66 cm (25 7/8 in)
24. Pants side seam length 99.10 cm (39 in)
25. Waistband width 3.00 cm (1 1/8 in)
26. Waistband length 109.83 cm (43 1/4 in)
27. Waistband button diameter 1.00 cm (3/8 in)
28. Waistband buttons quantity 1.00 pc
29. Seam allowance poc max 3.00 none (1 1/8 in)
30. Back pocket bag height 12.37 cm (4 7/8 in)

cozysewpatterns

Paper Size: A4;
Print Actual Size (100% Scale);

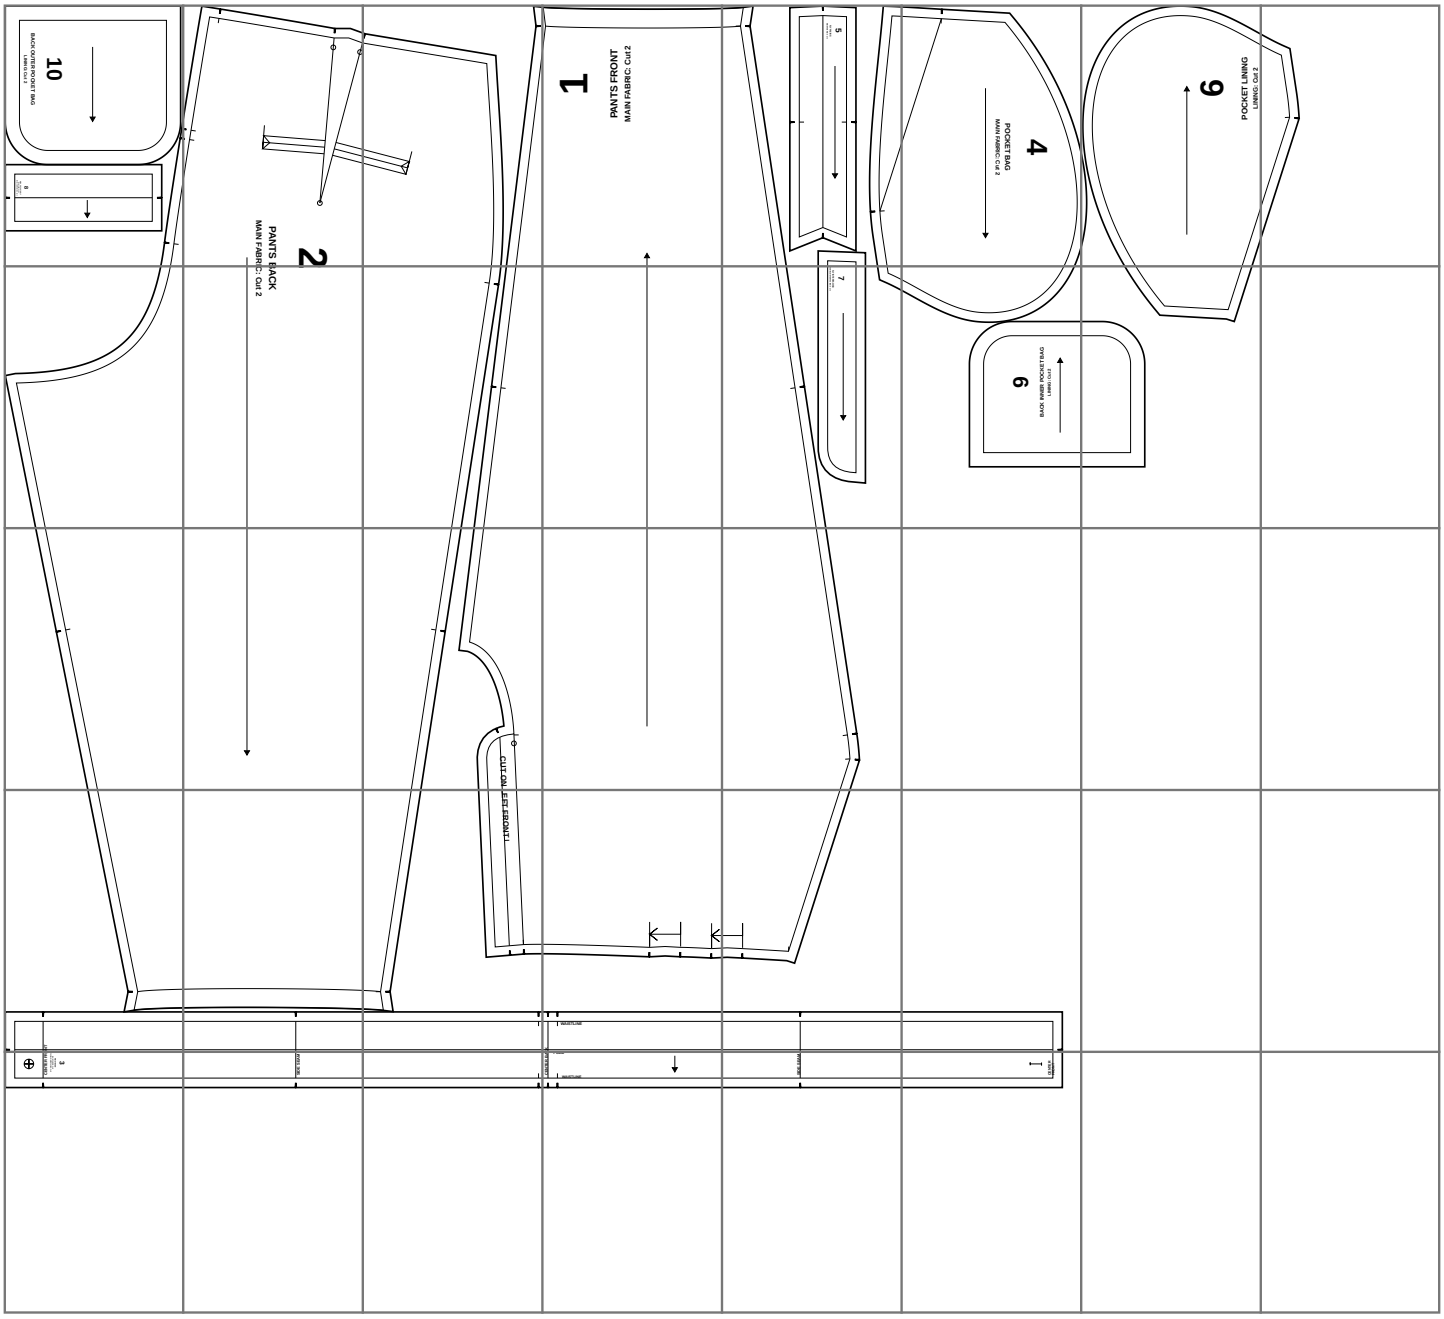

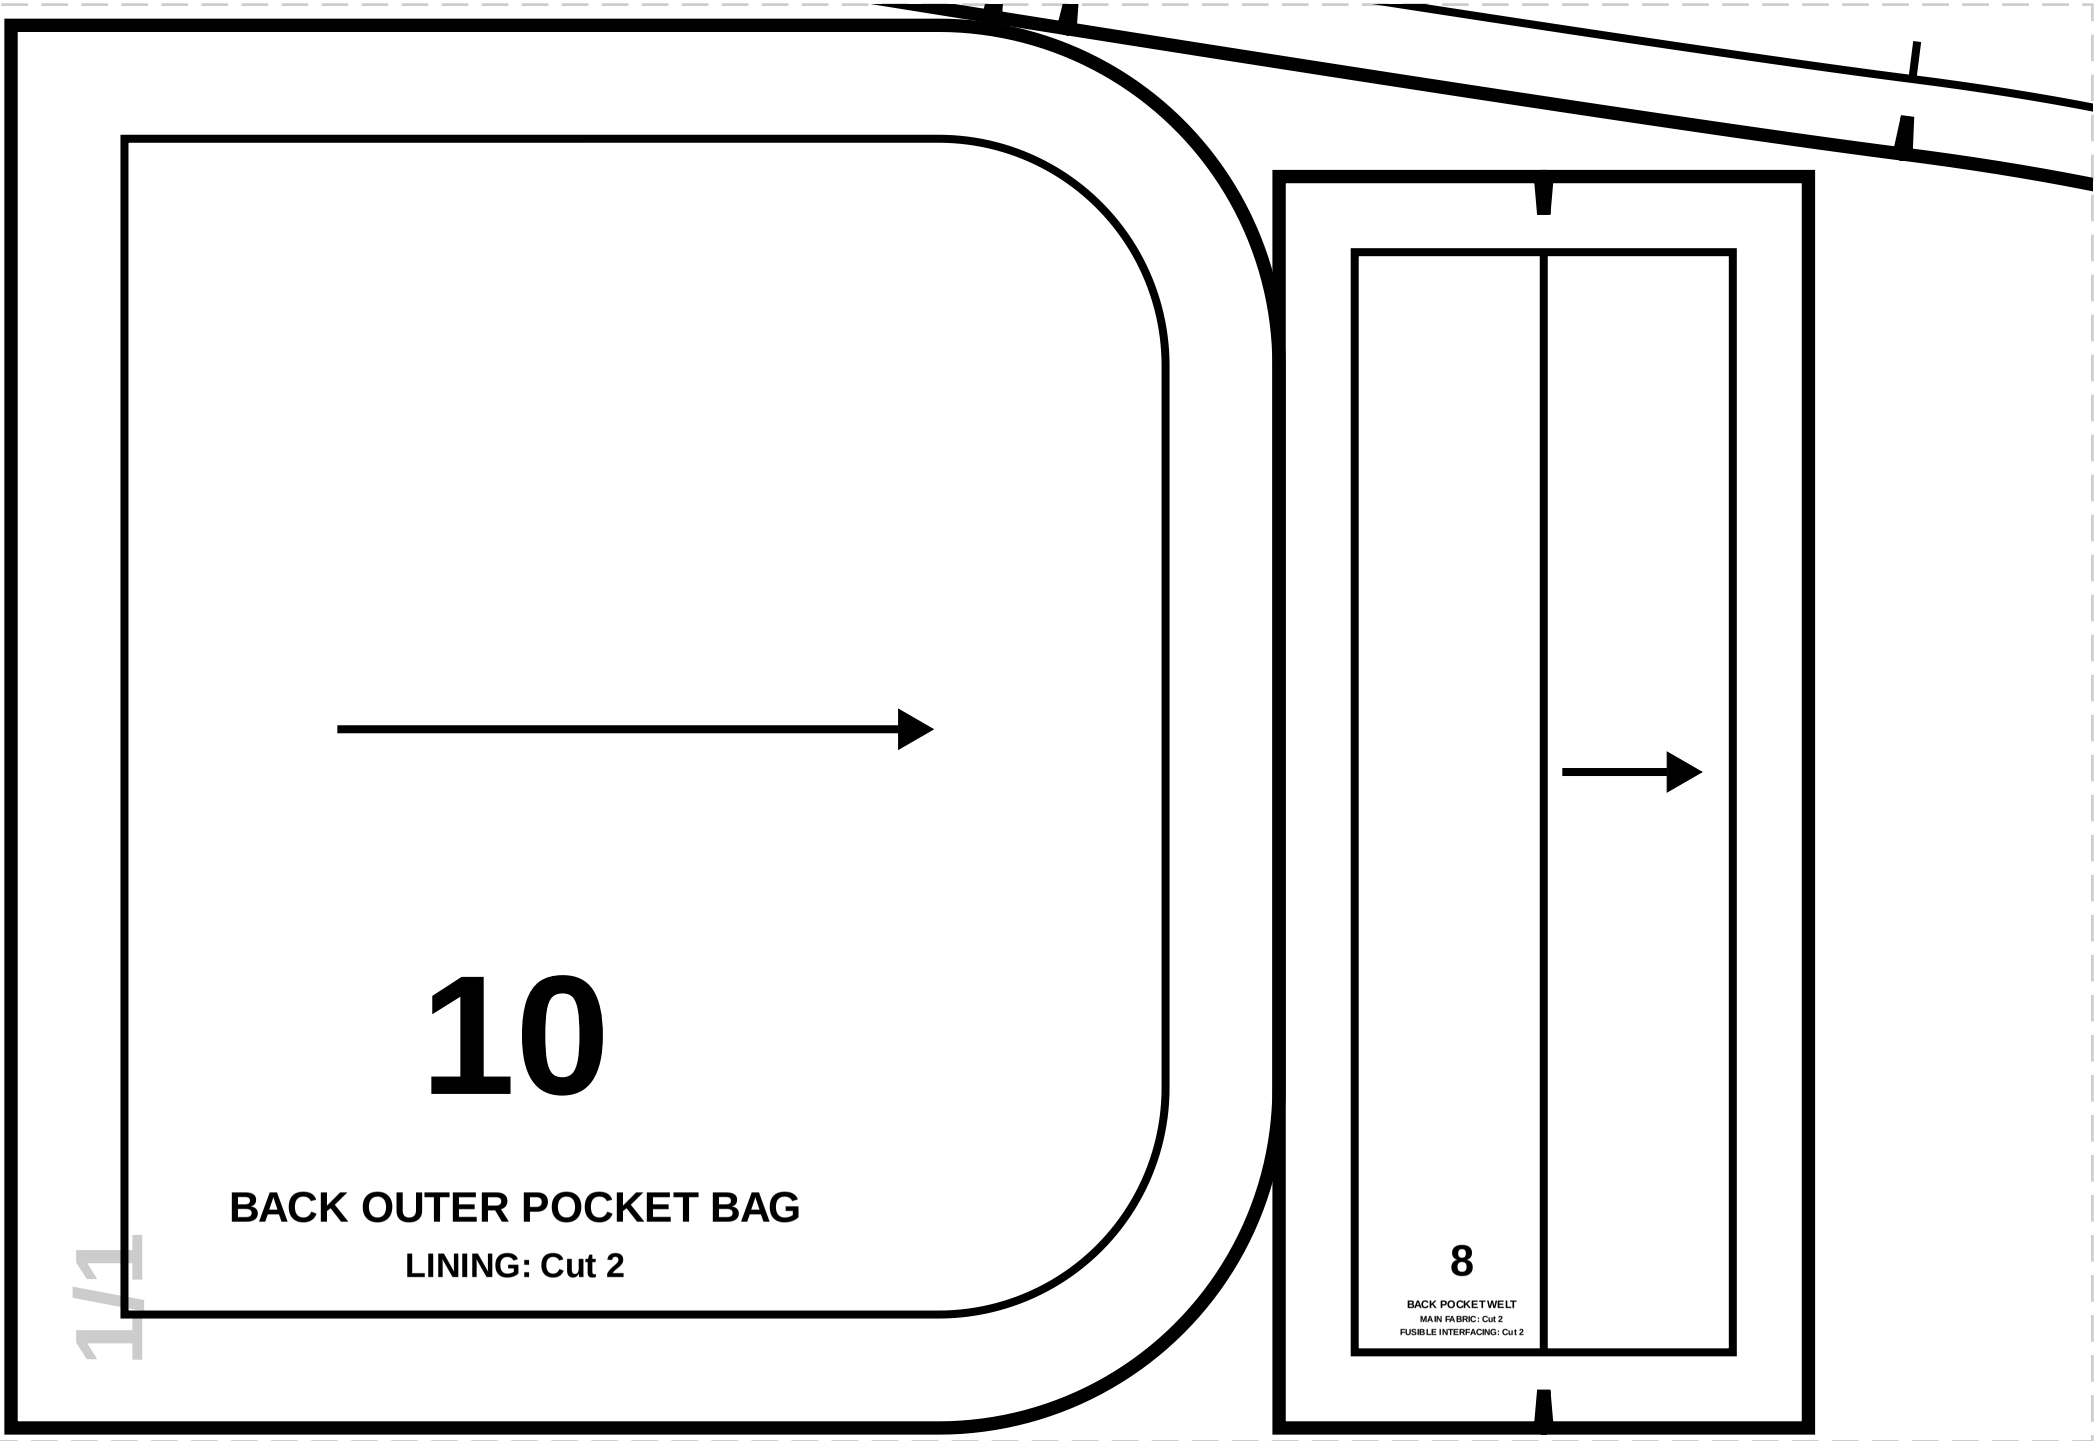
10
BACK OUTER POCKET BAG
LINING: Cut 2
1/1
8
BACK POCKET WELT
MAIN FABRIC: Cut 2
FUSIBLE INTERFACING: Cut 2

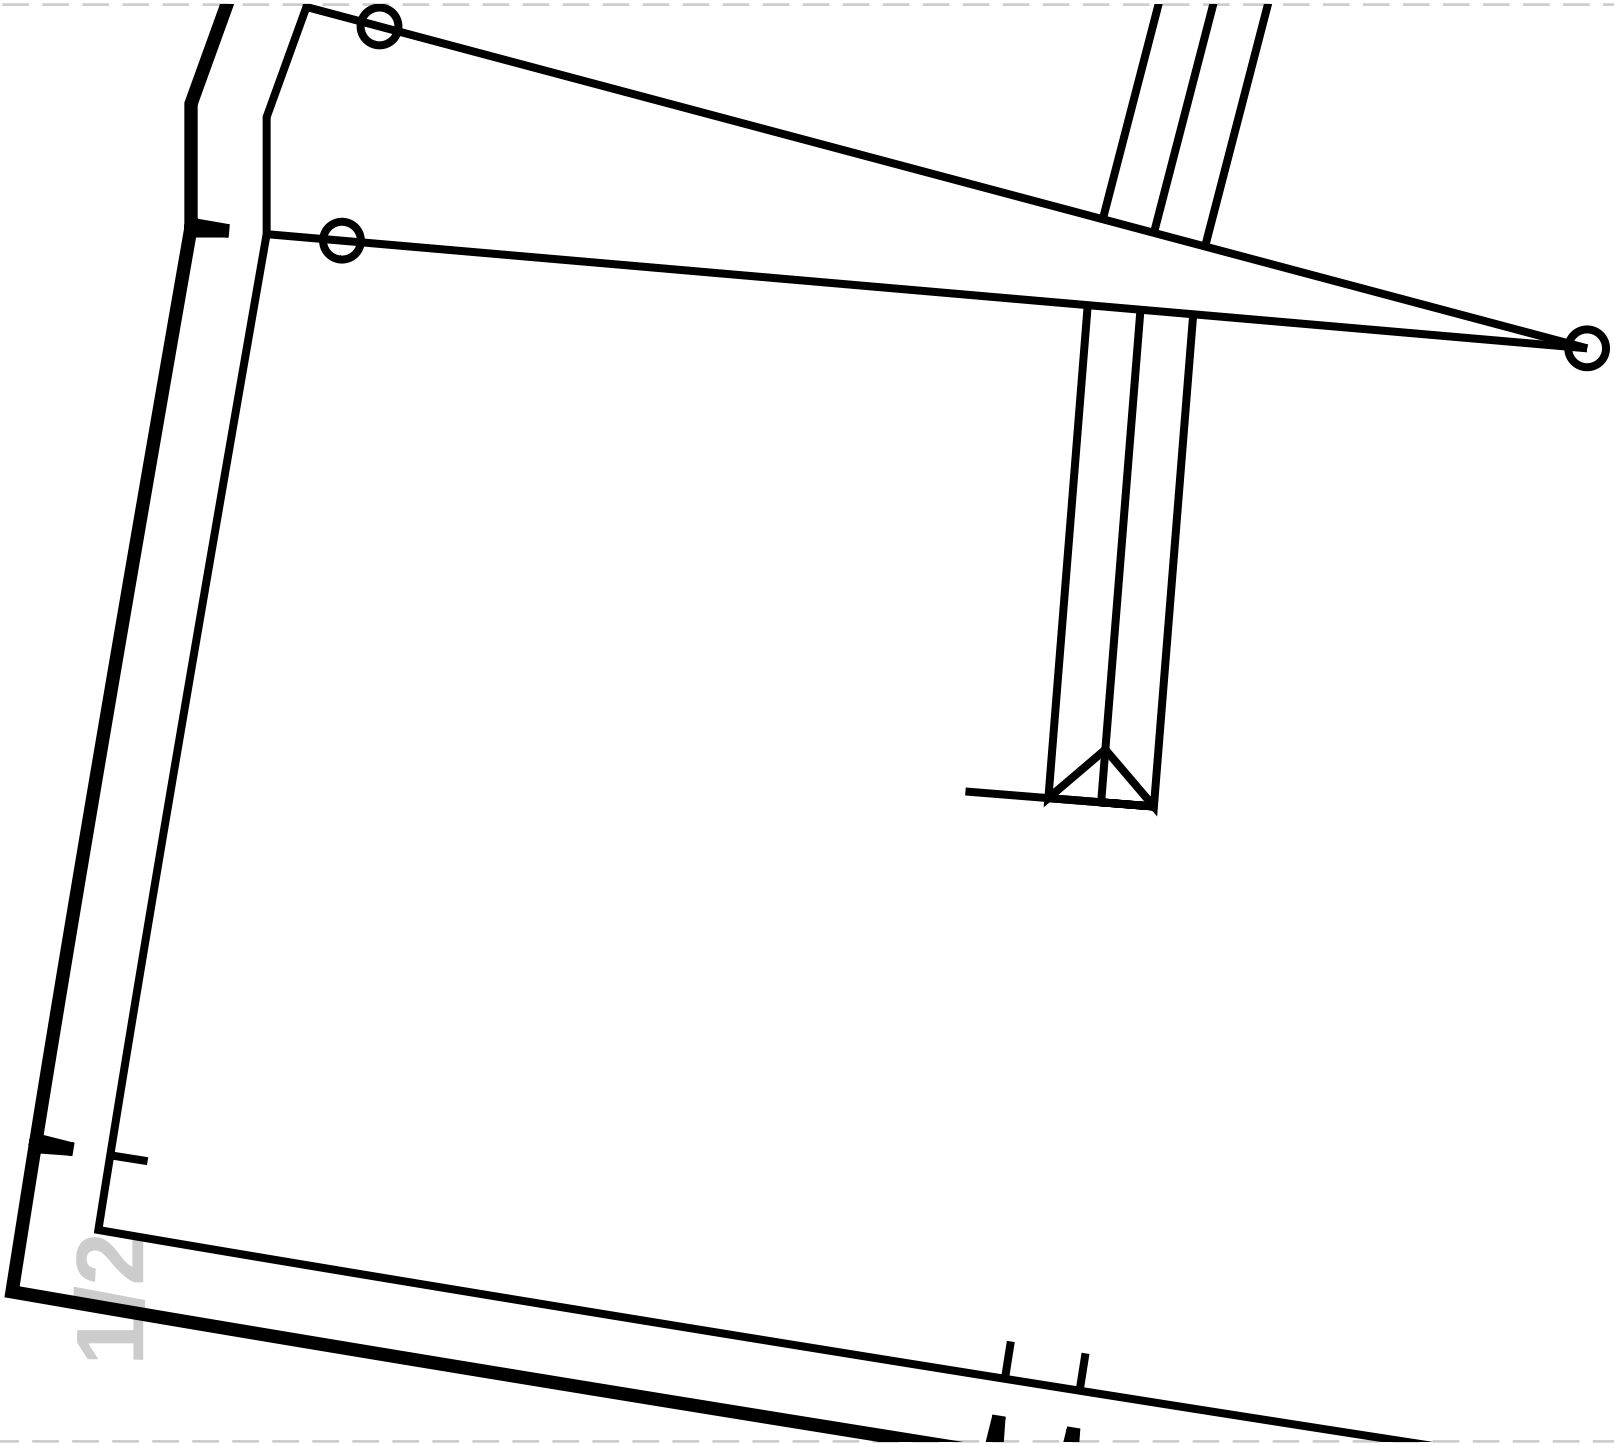


2


PANTS B

MAIN FABRI

—

1/2

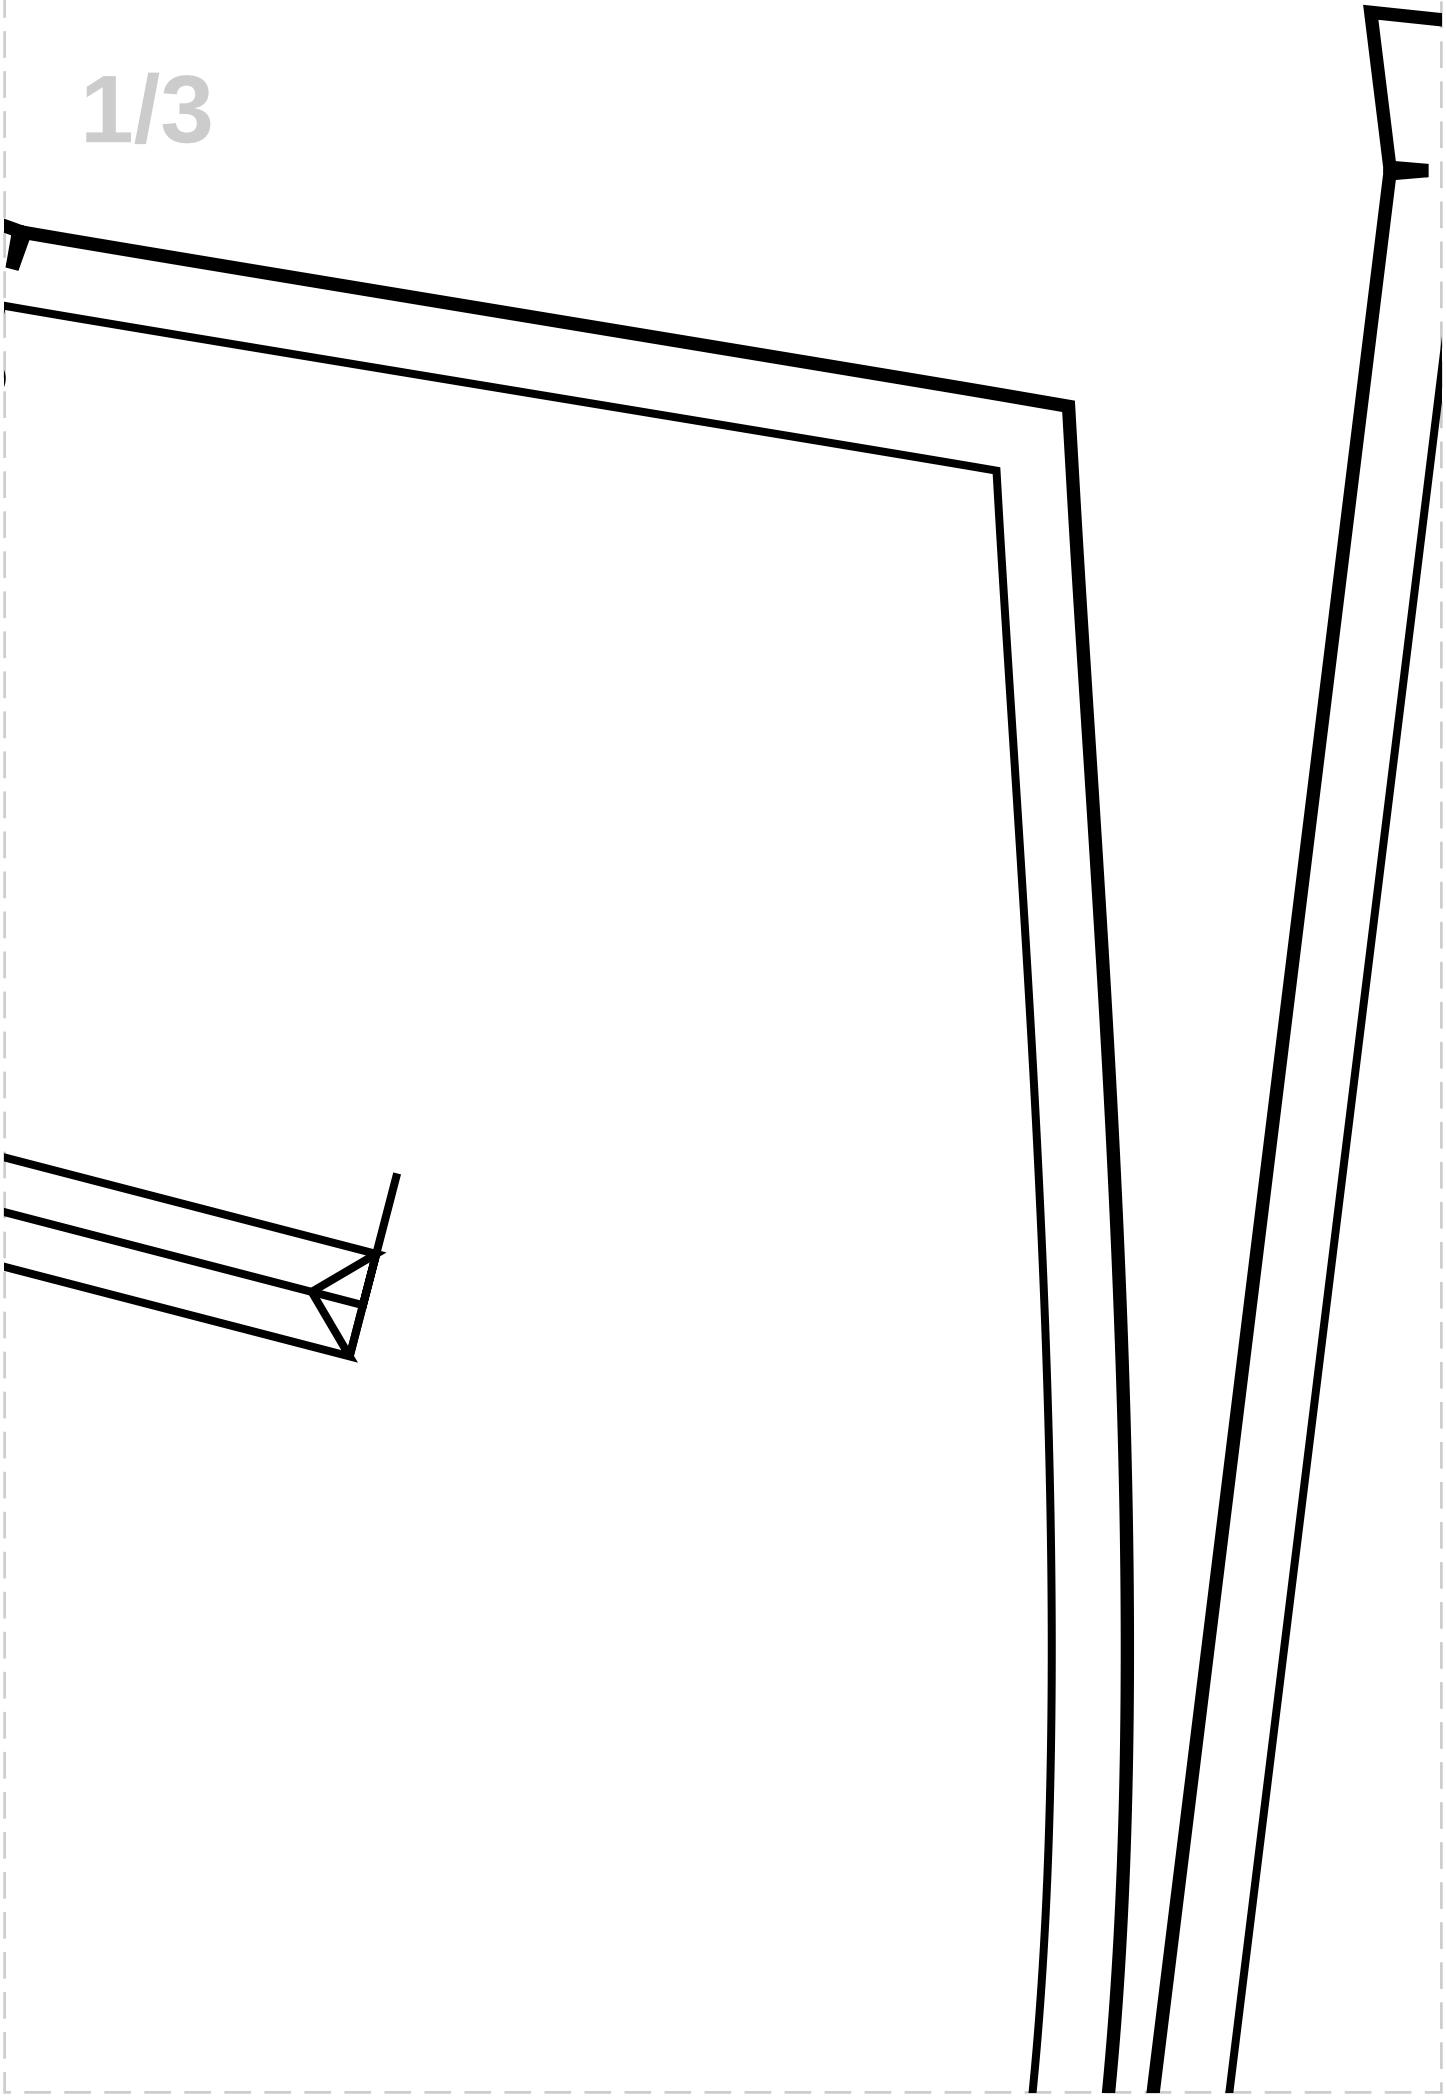


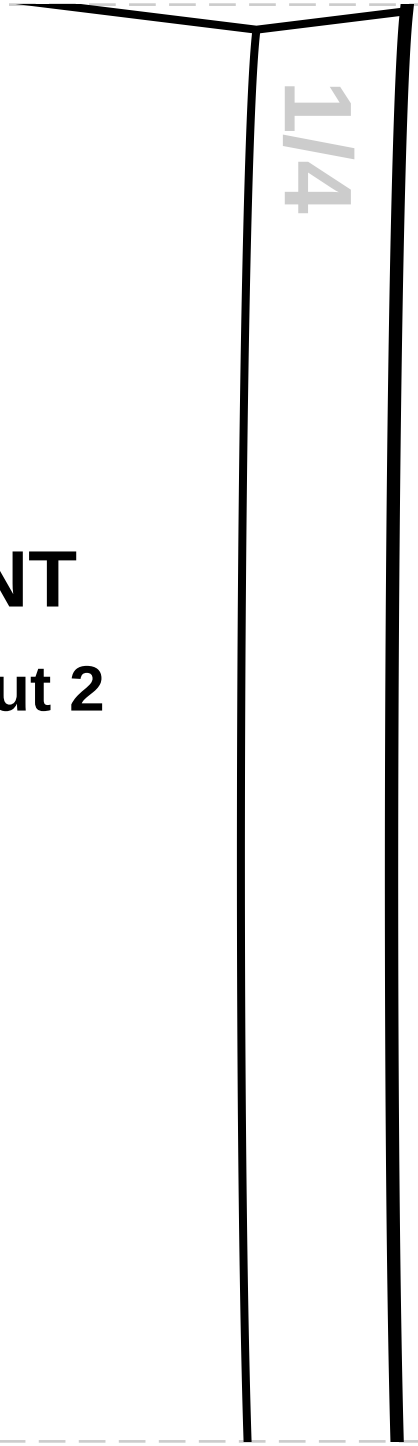


1

PANTS FRONT

MAIN FABRIC: Cut 2

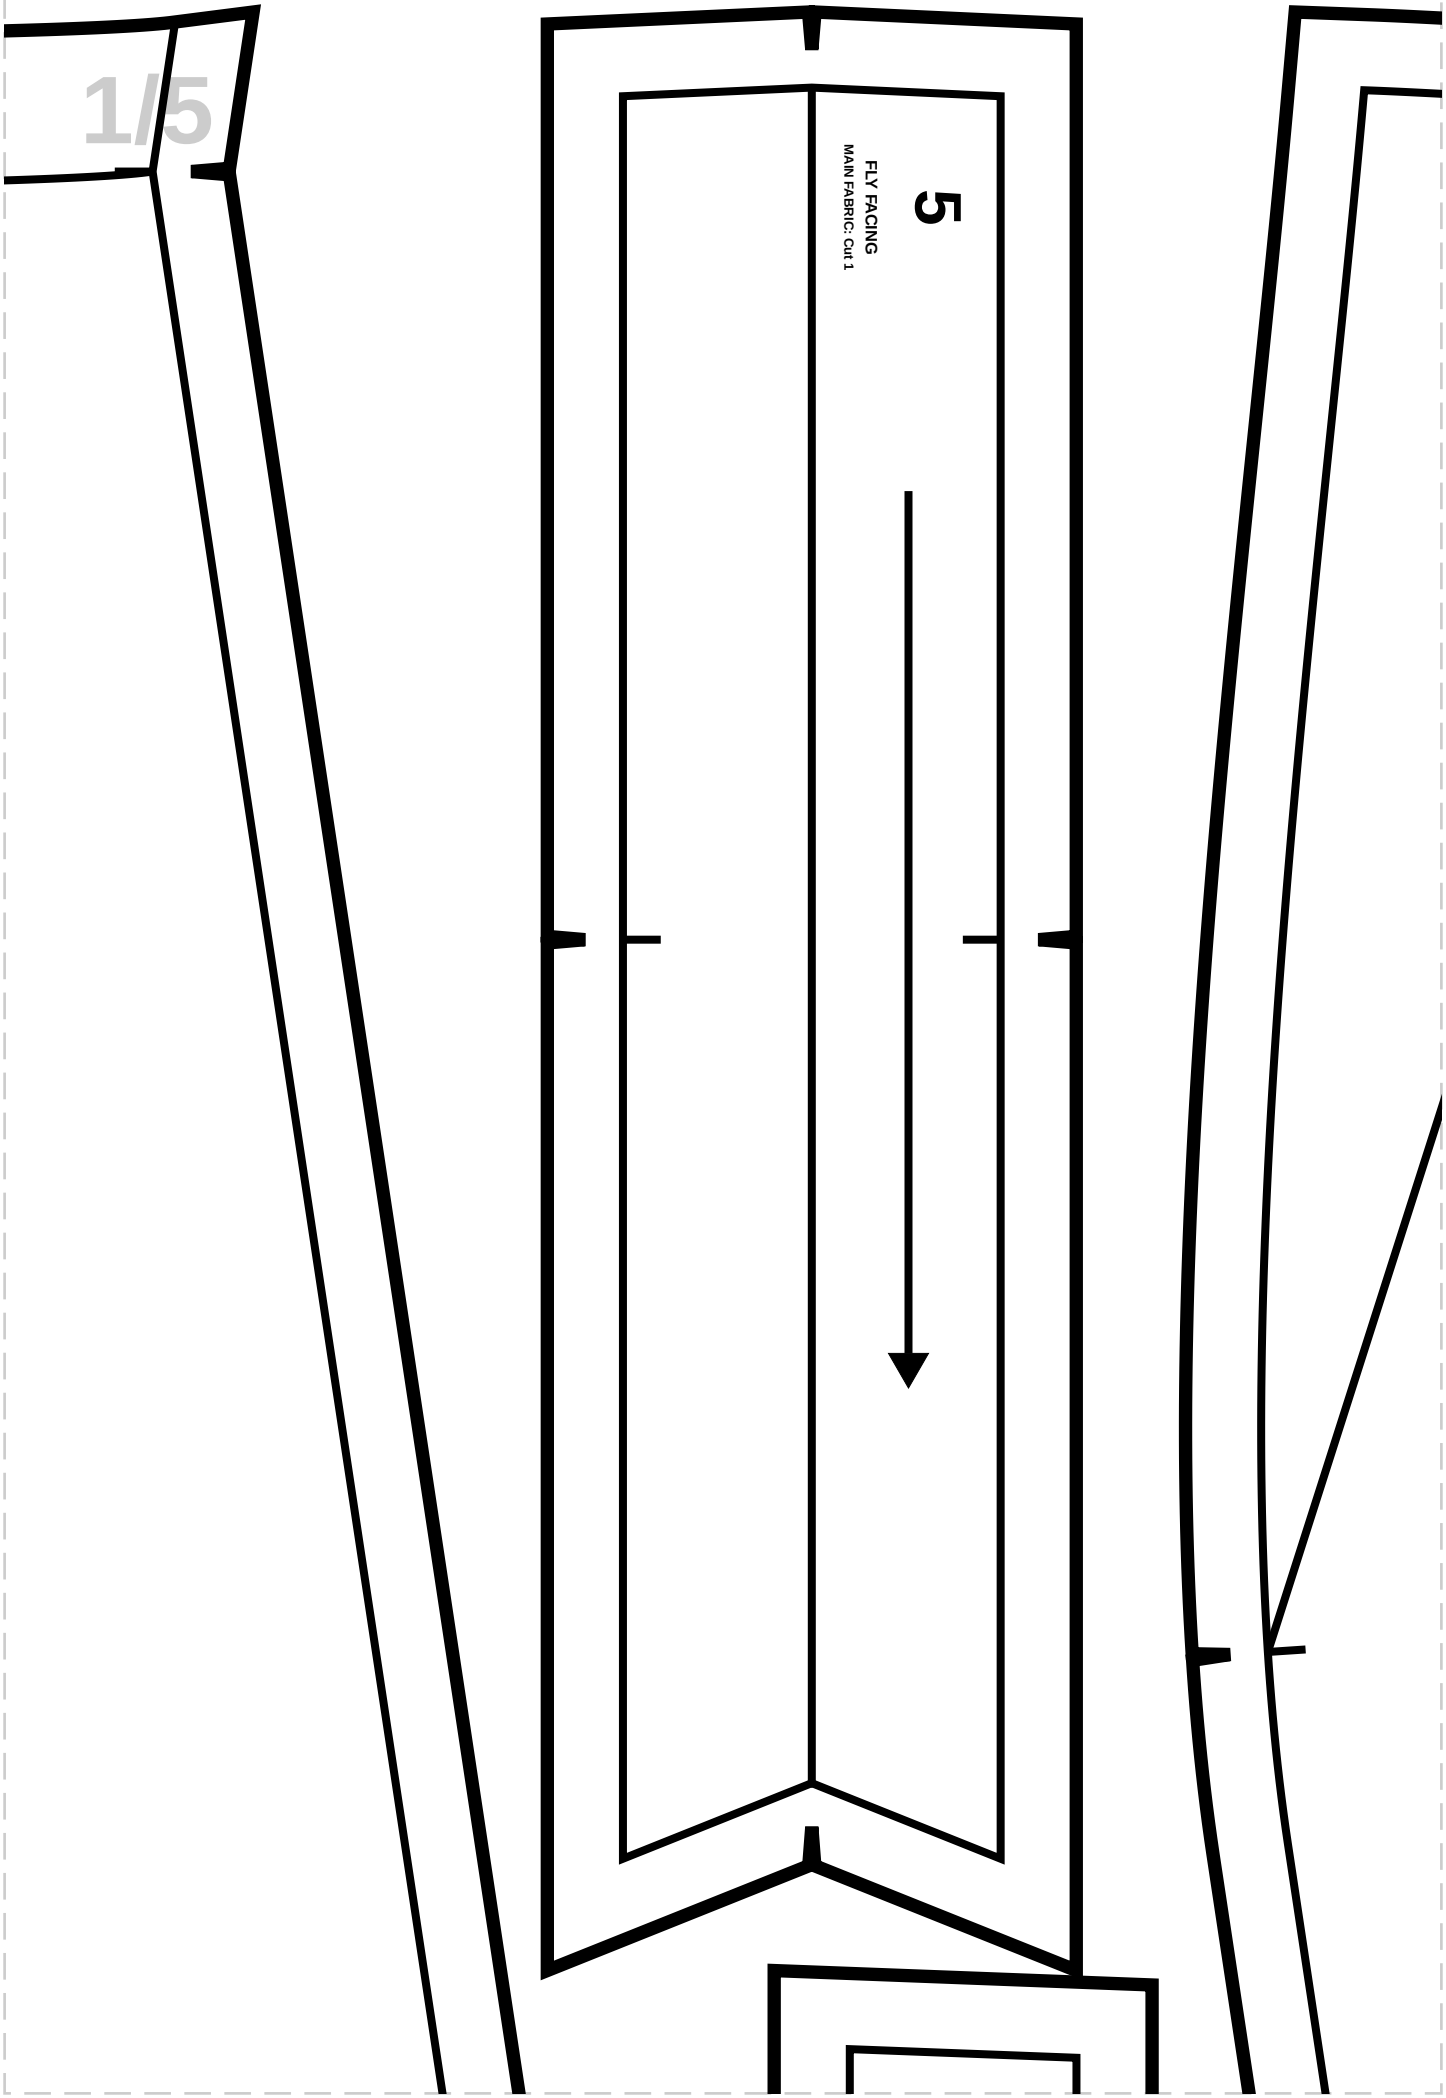
5
FLY FACING
MAIN FABRIC: Cut 1

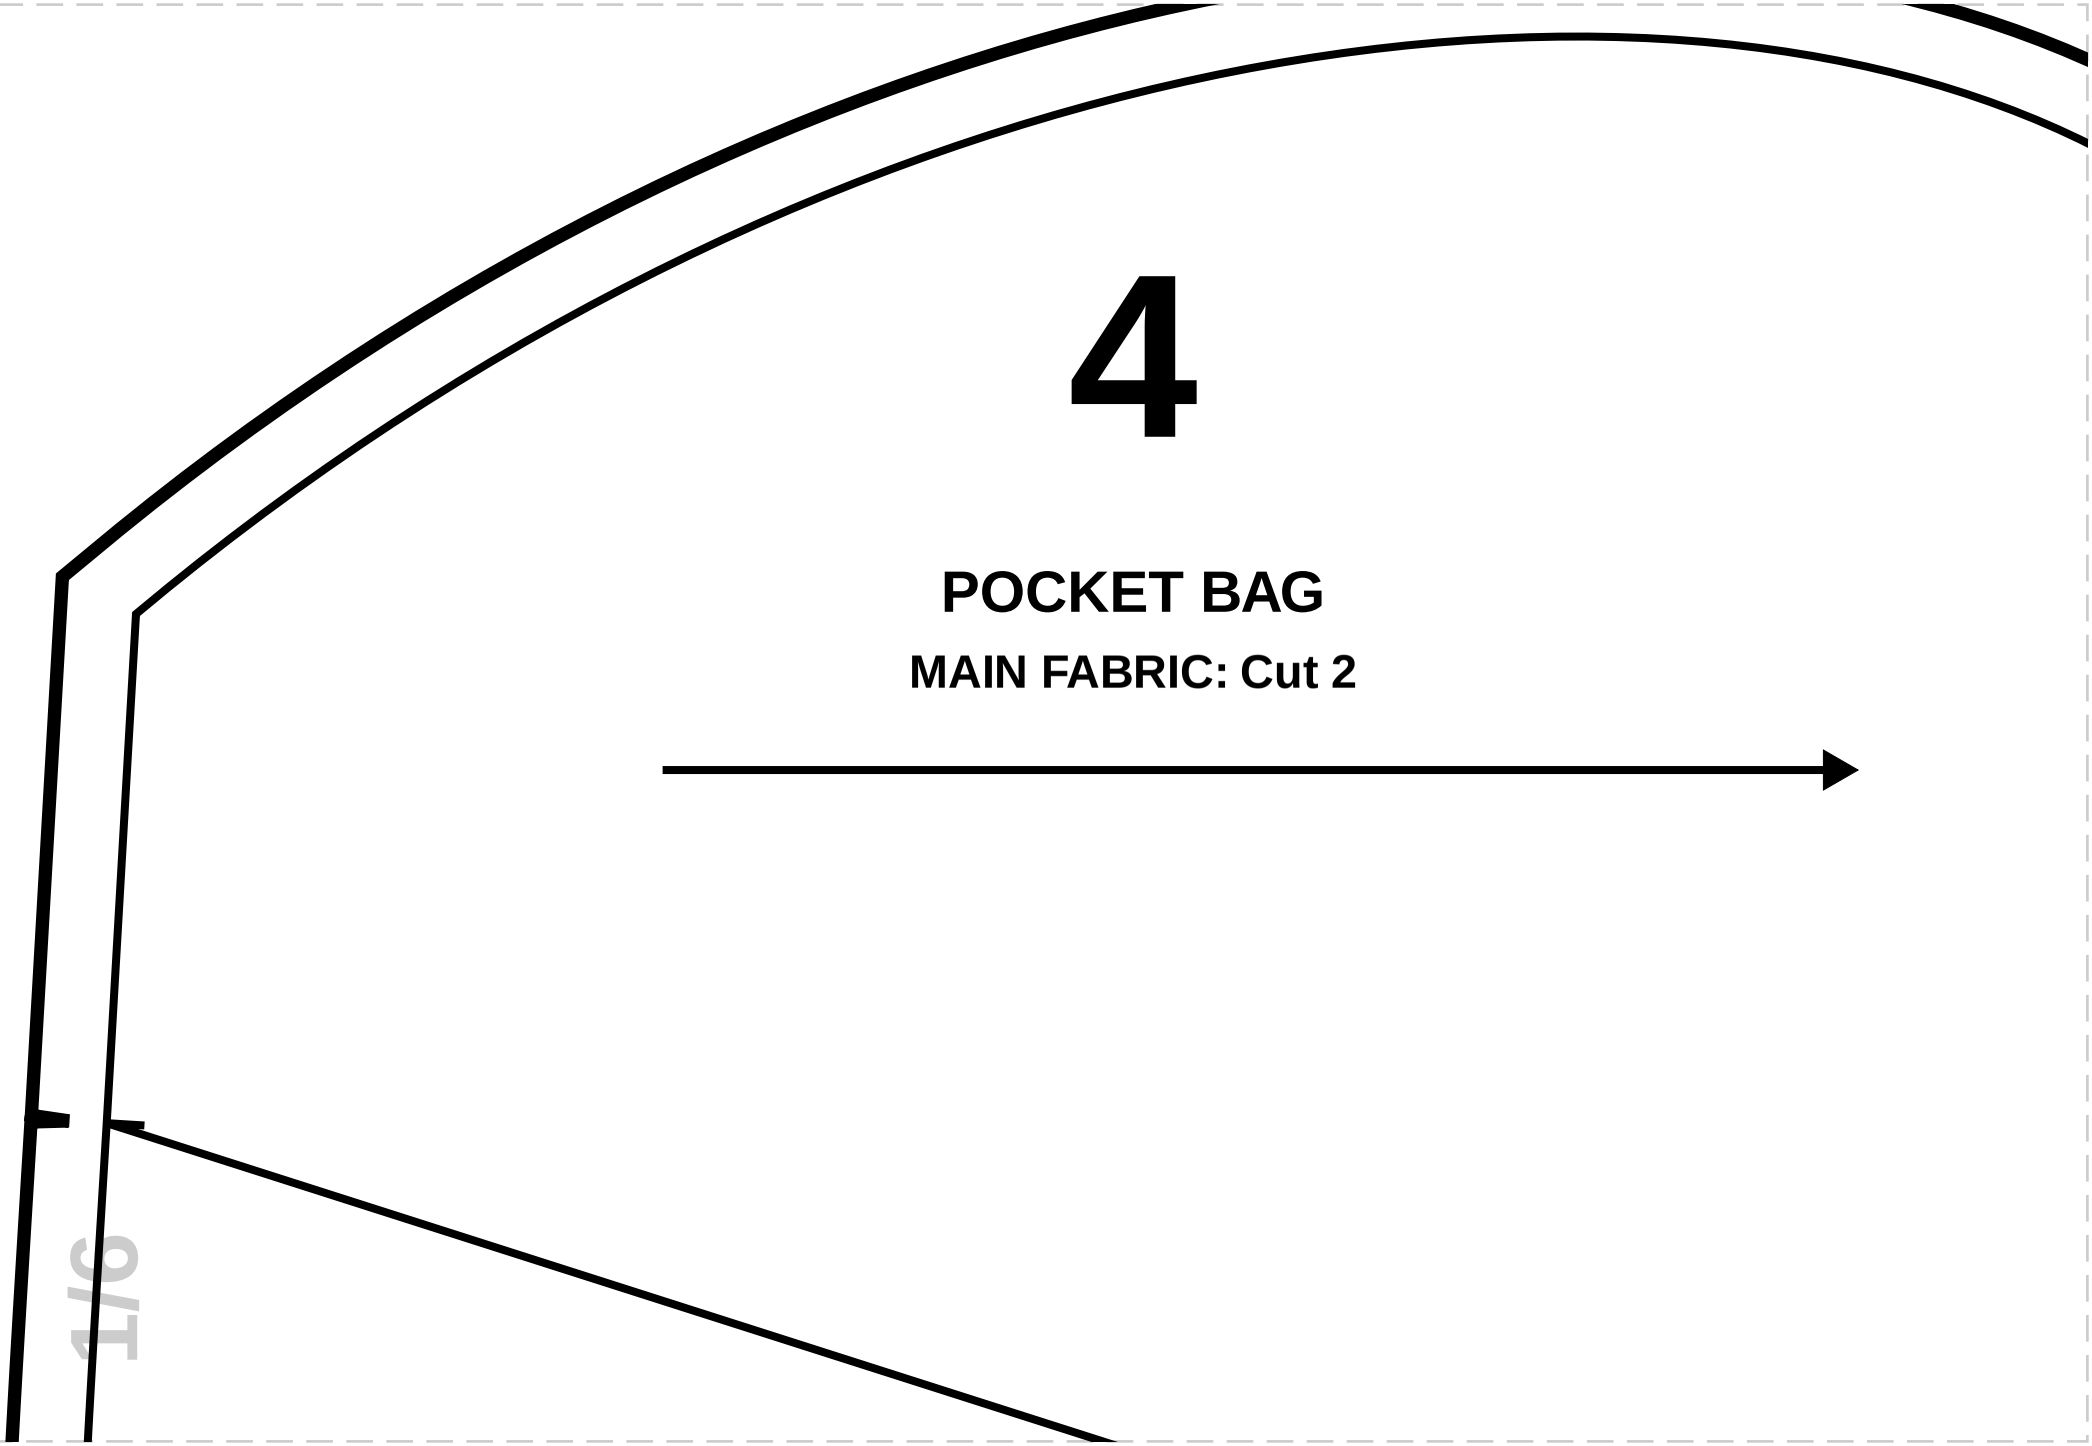

4
POCKET BAG
MAIN FABRIC: Cut 2
1/9




6

POCKET LINING


LINING: Cut 2

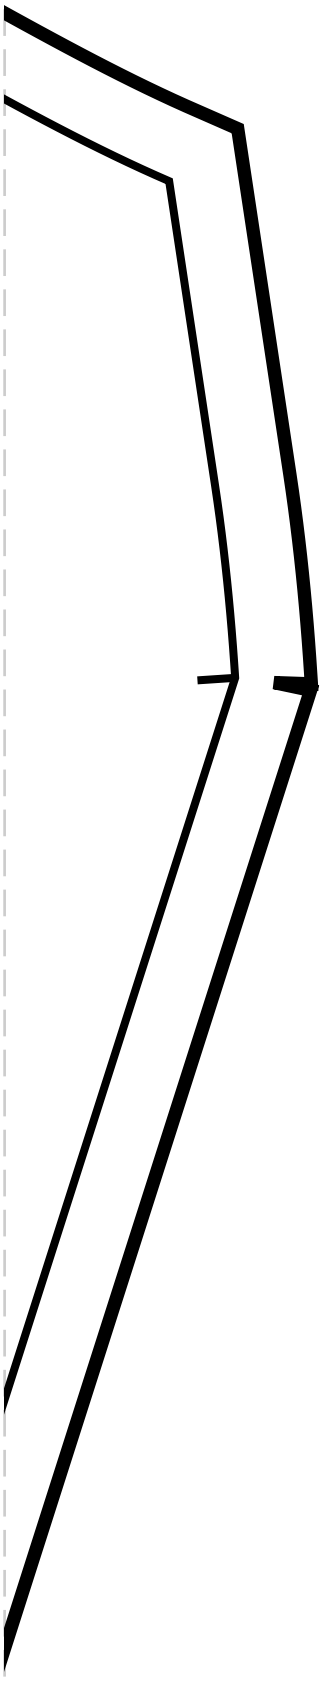


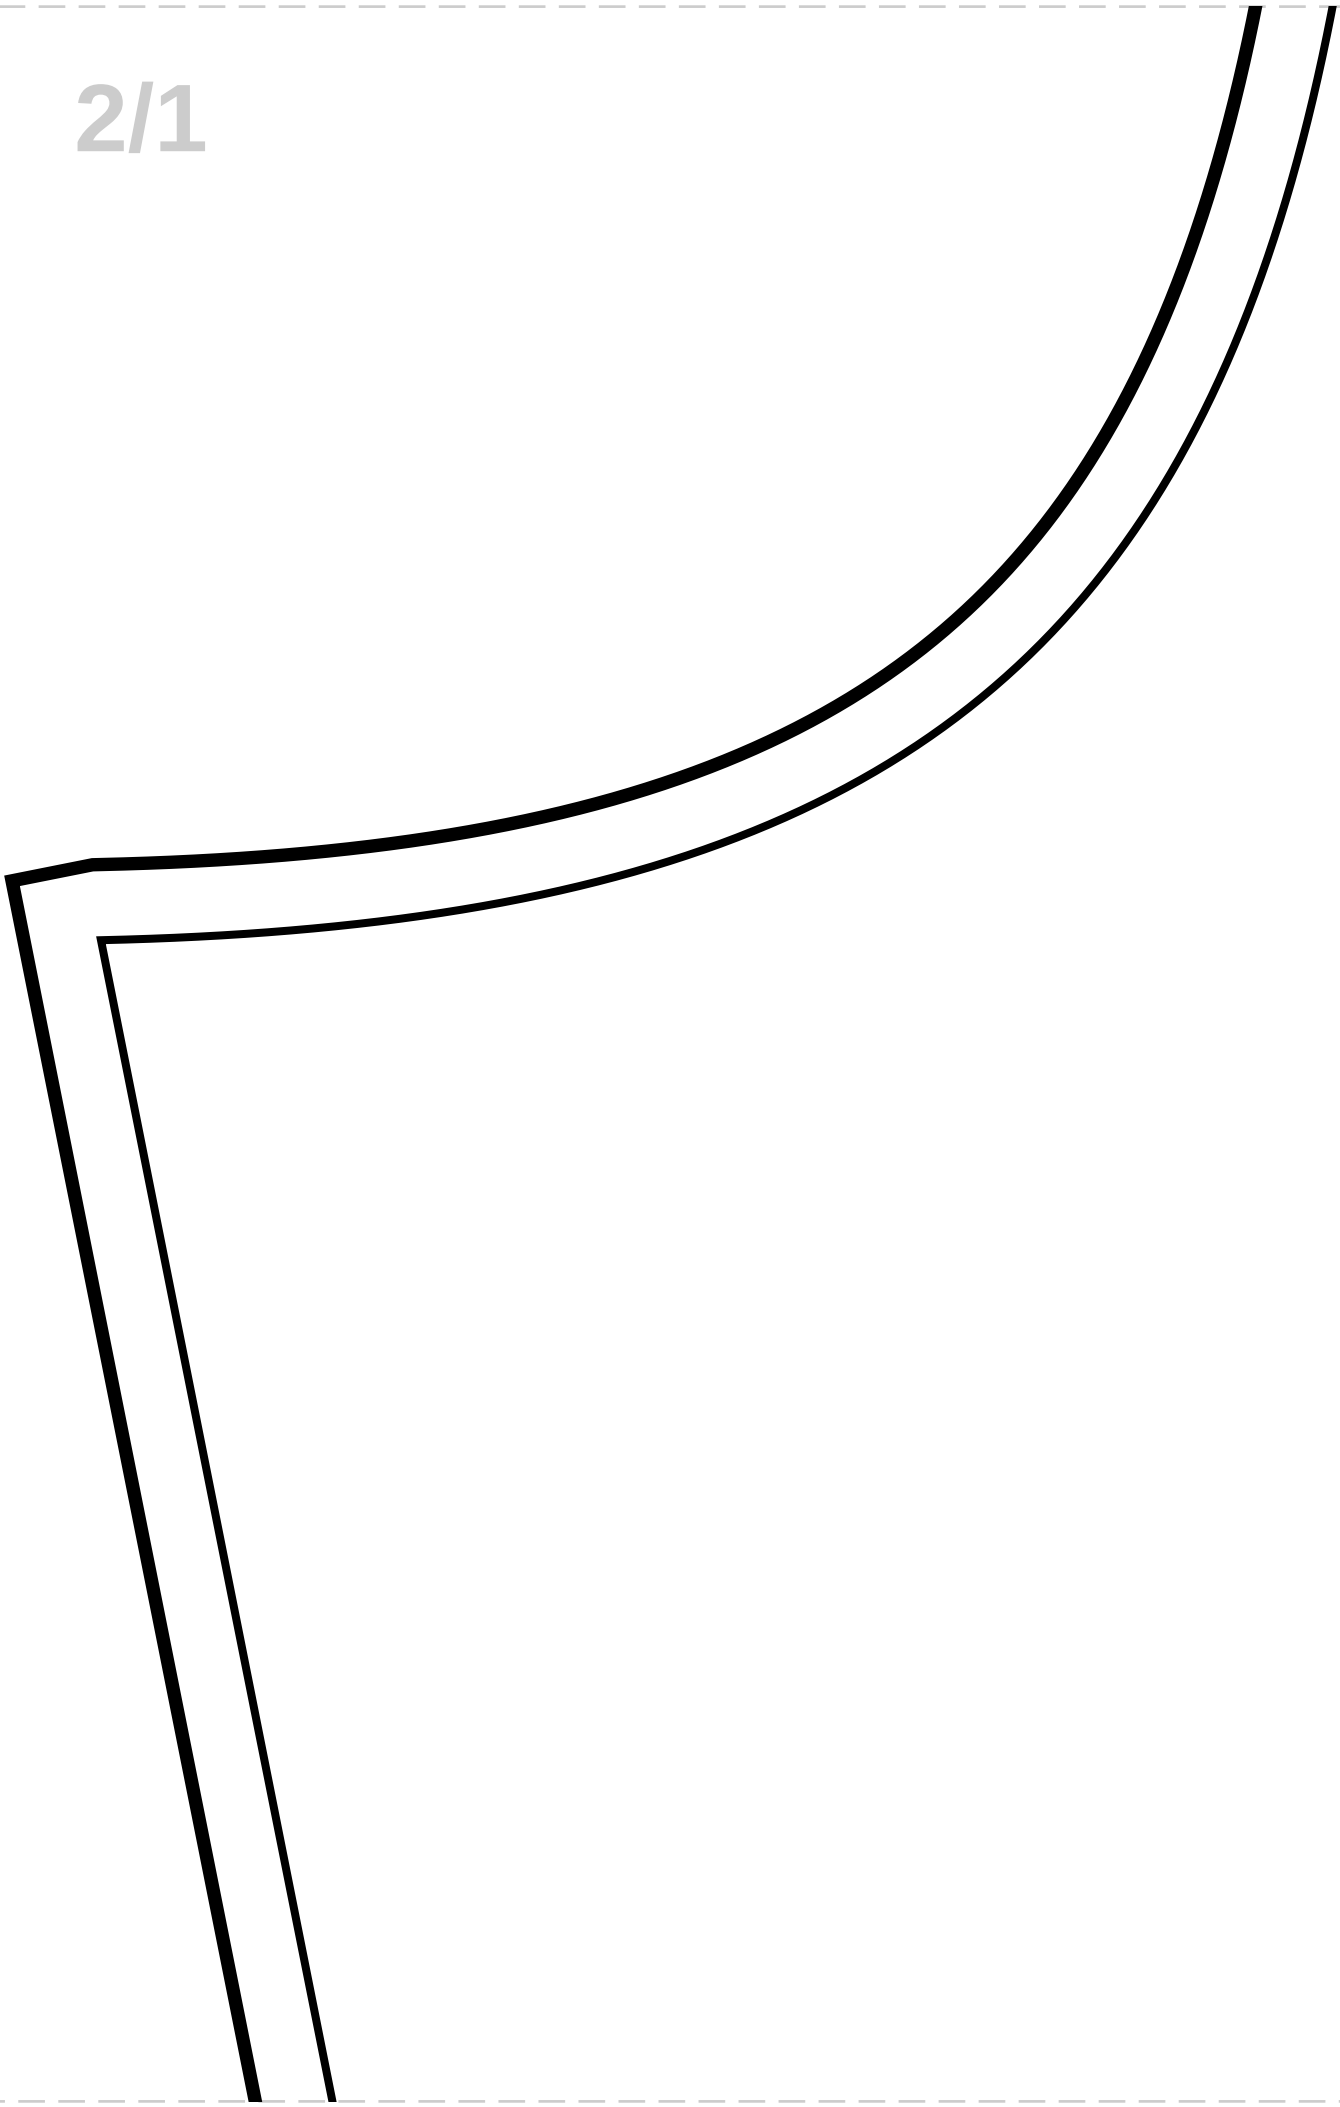

BACK


C: Cut 2

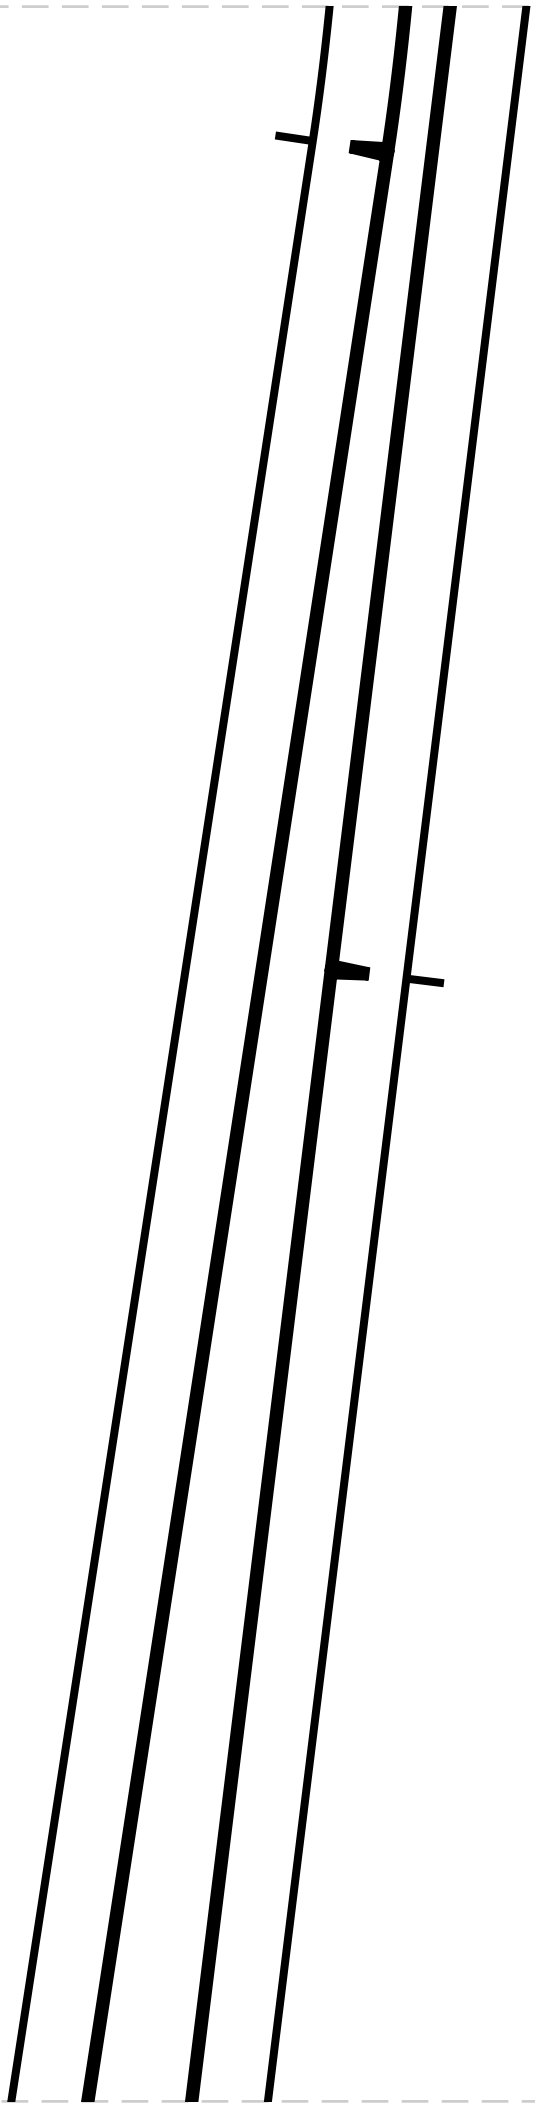


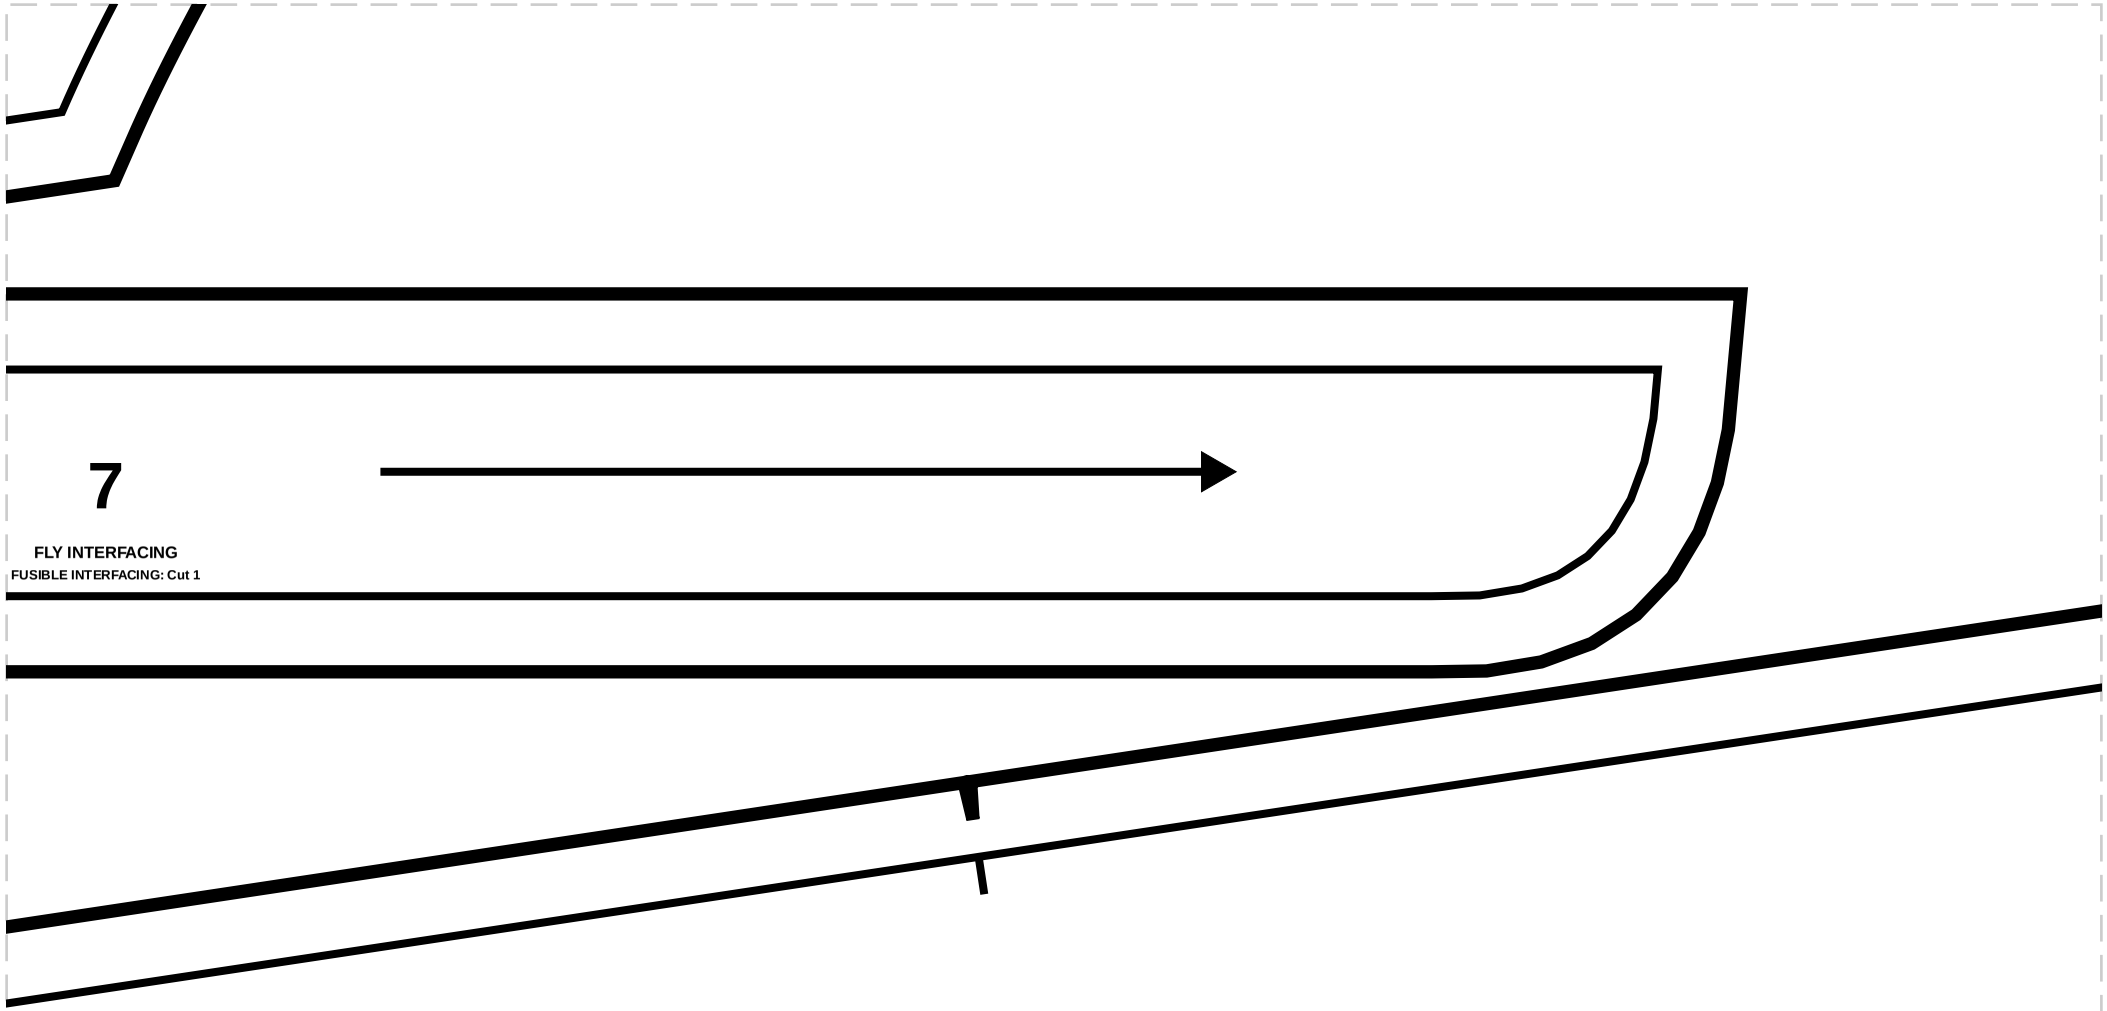


FLY INTERFACING

FUSIBLE INTERFACING: Cut 1

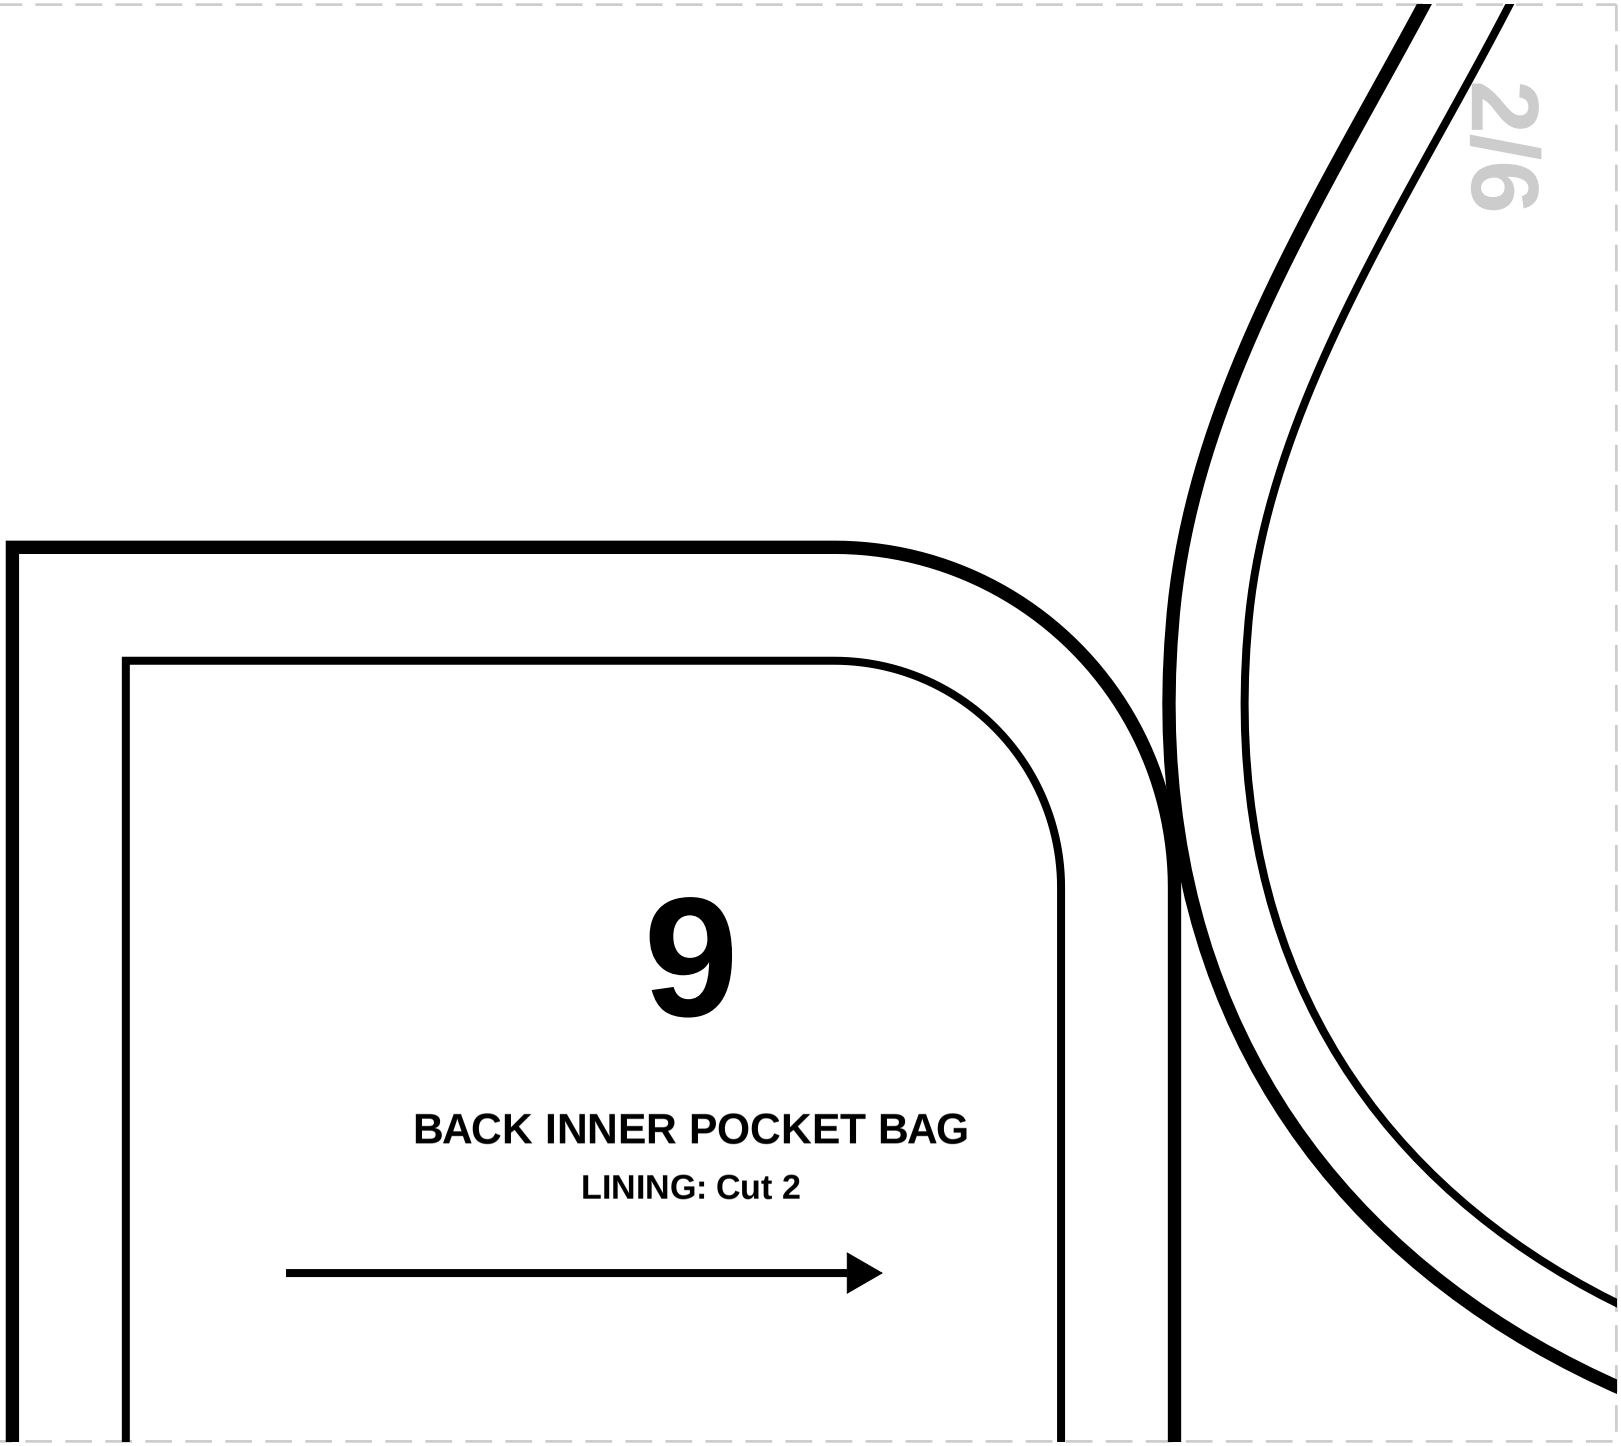
9
BACK INNER POCKET BAG
LINING: Cut 2

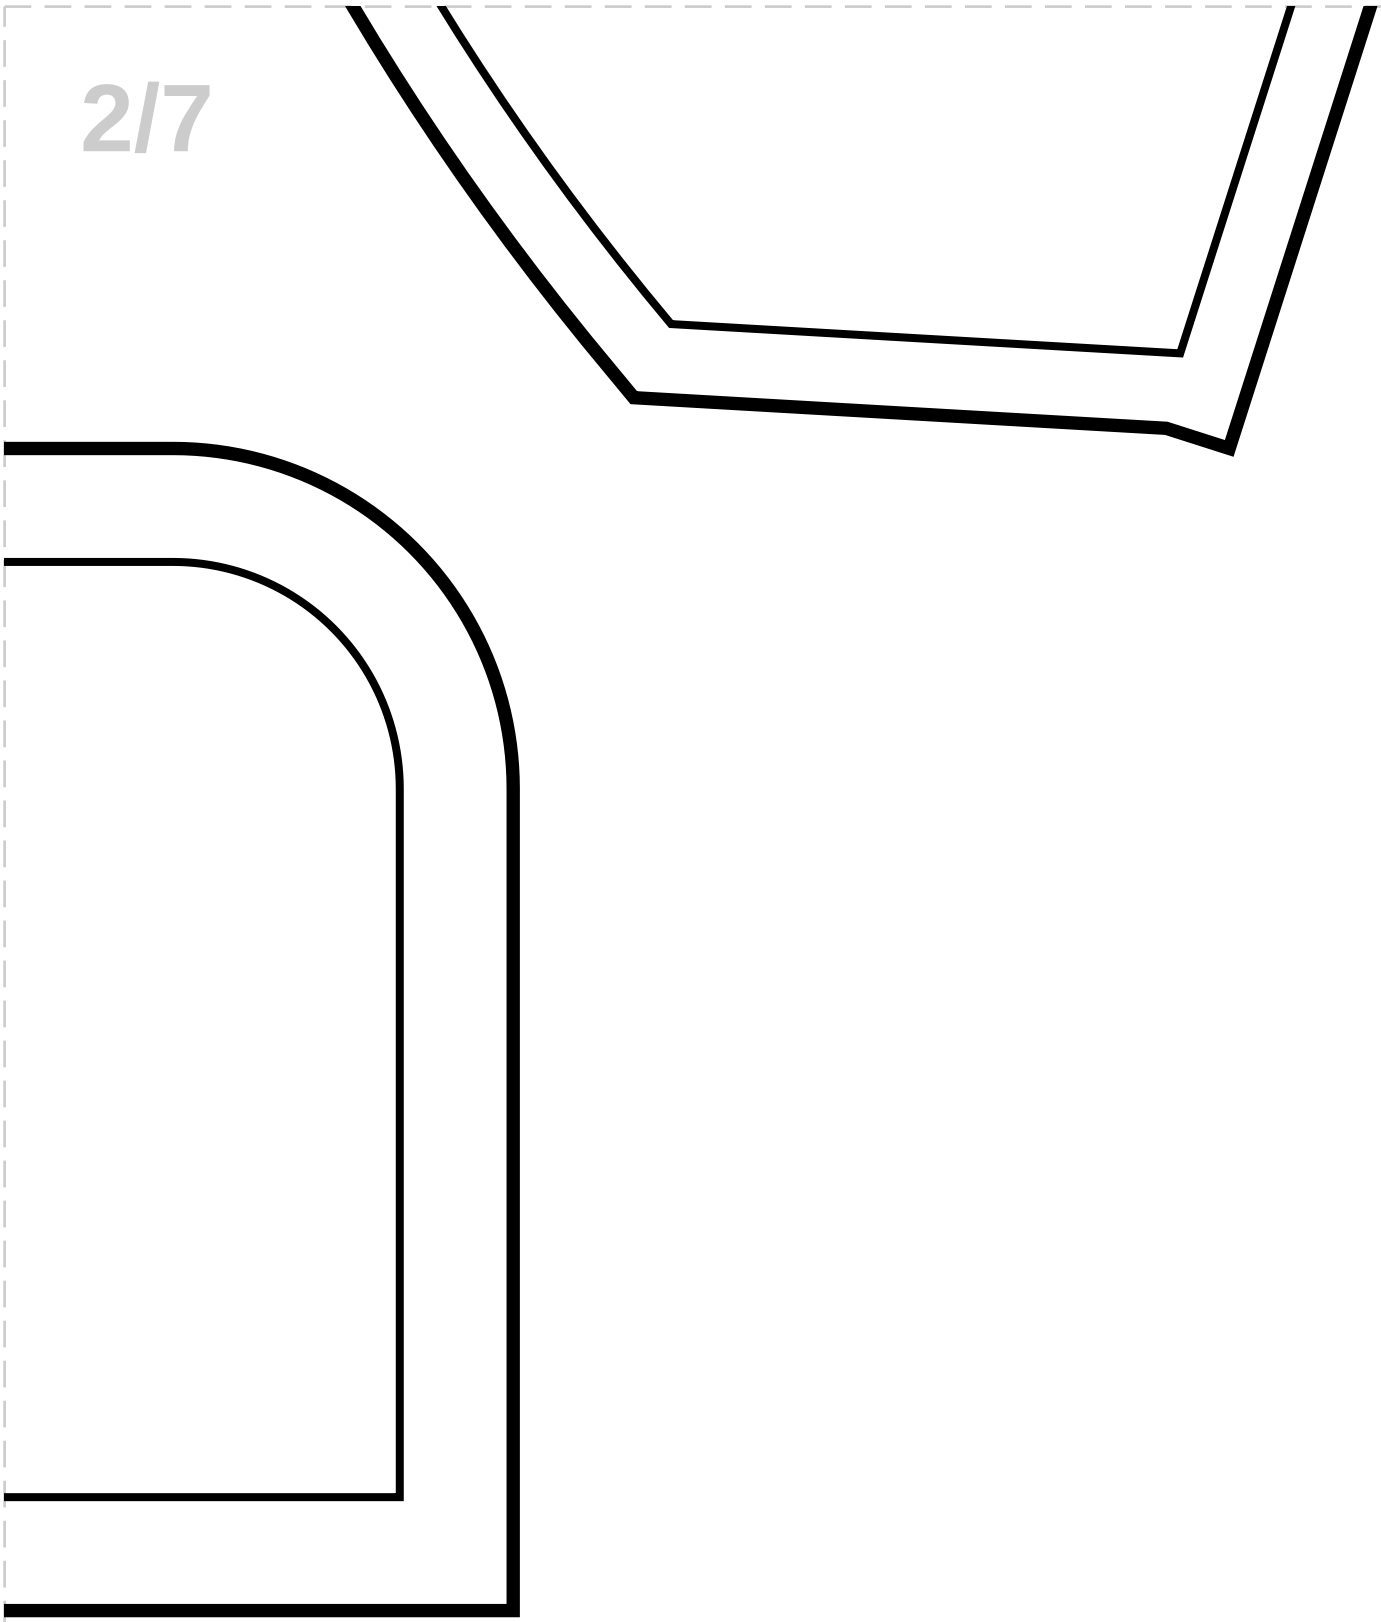



3/1

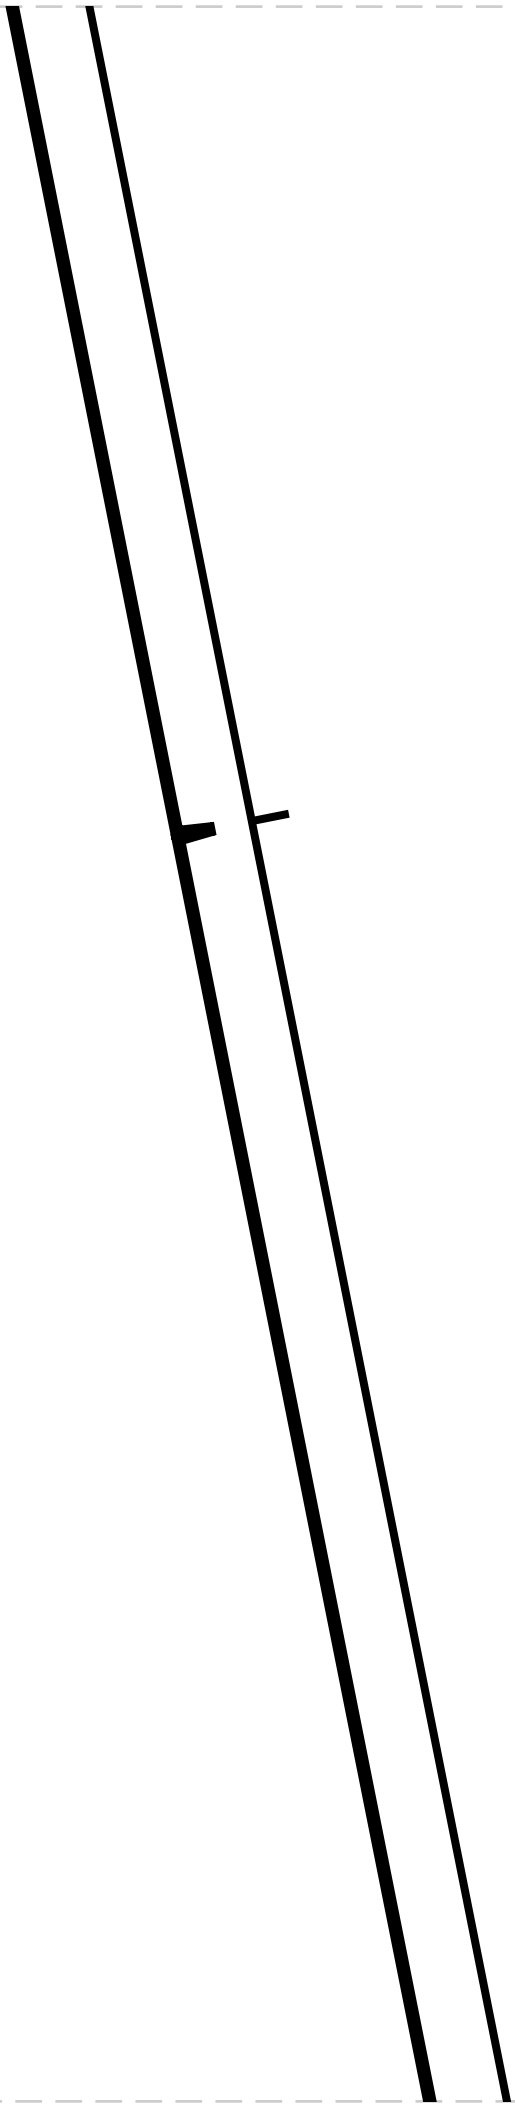



3/2

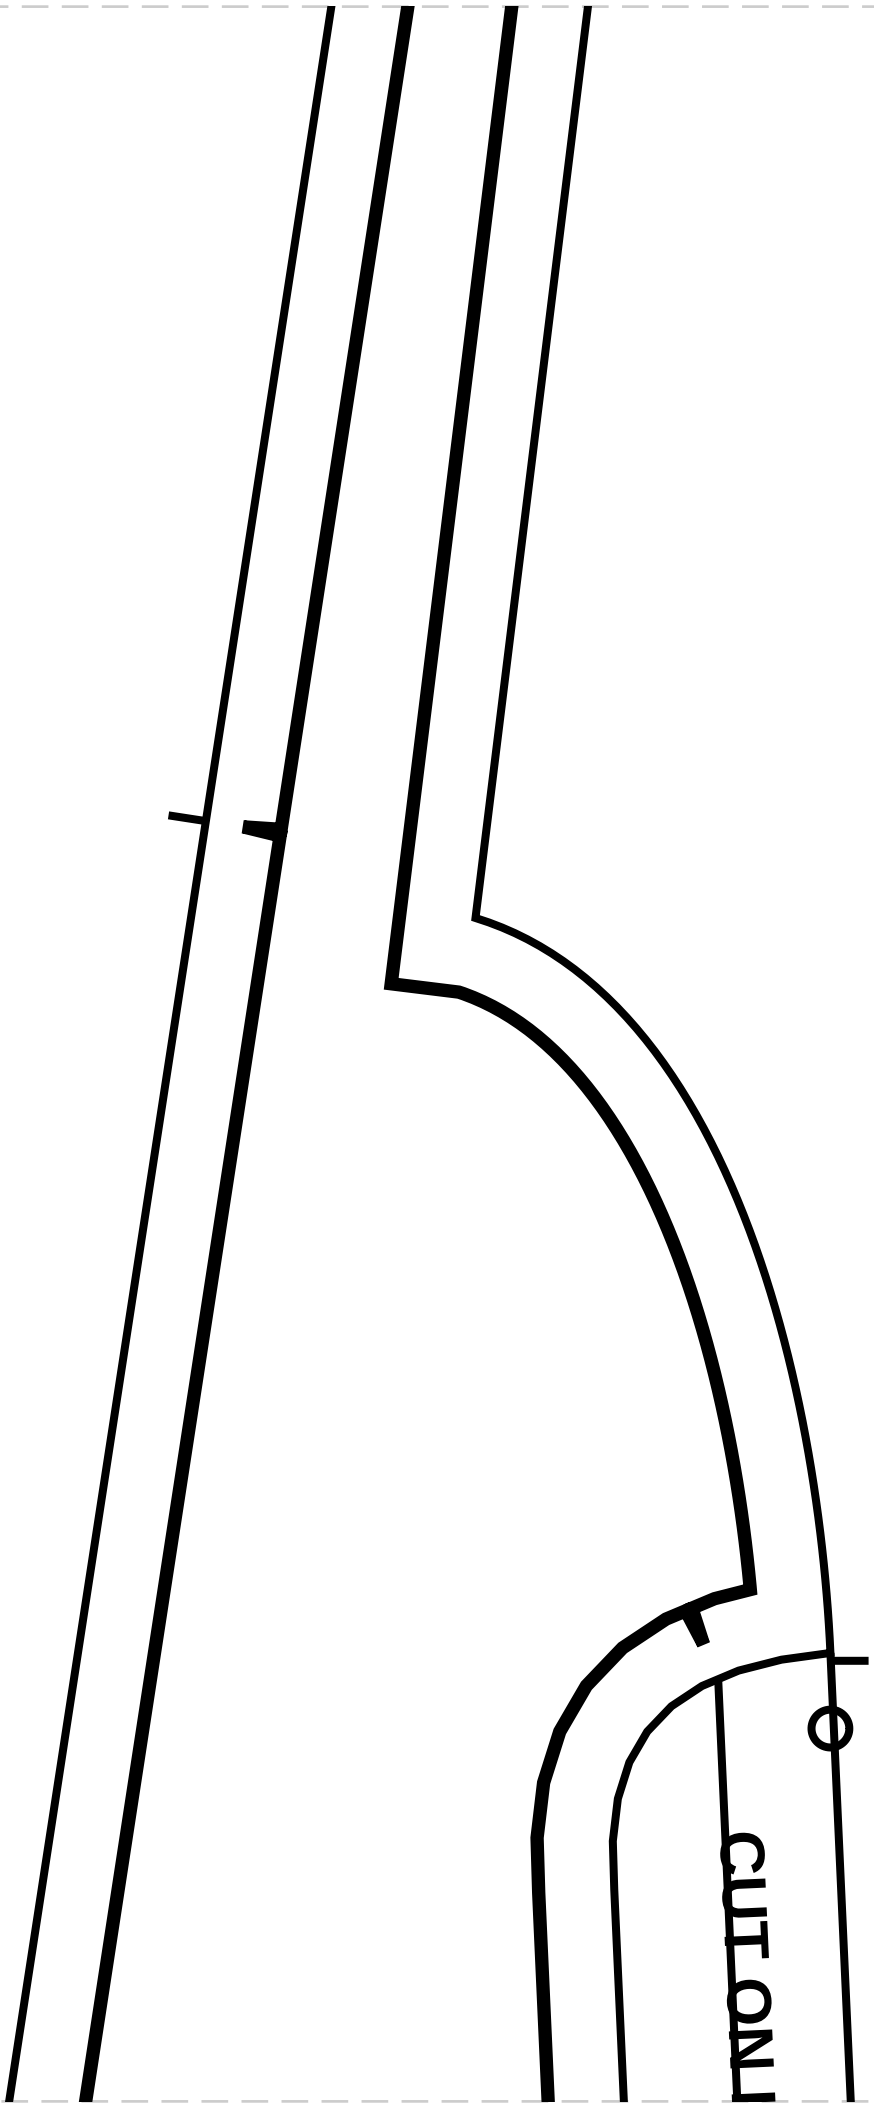




CLIENT

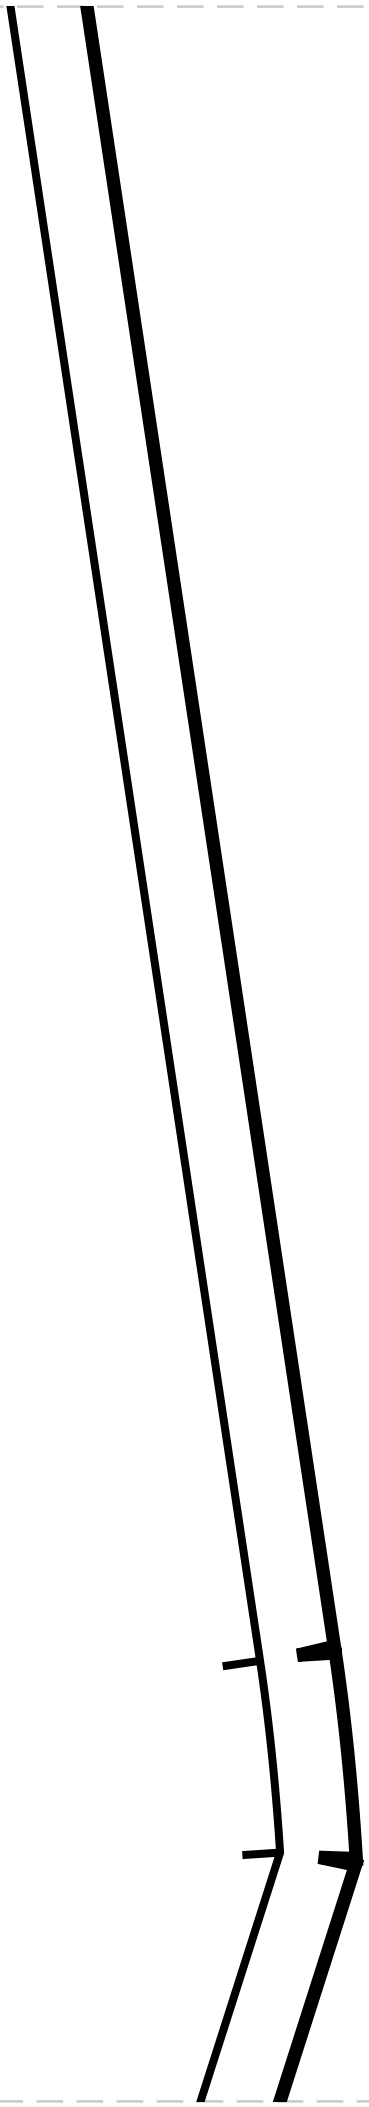


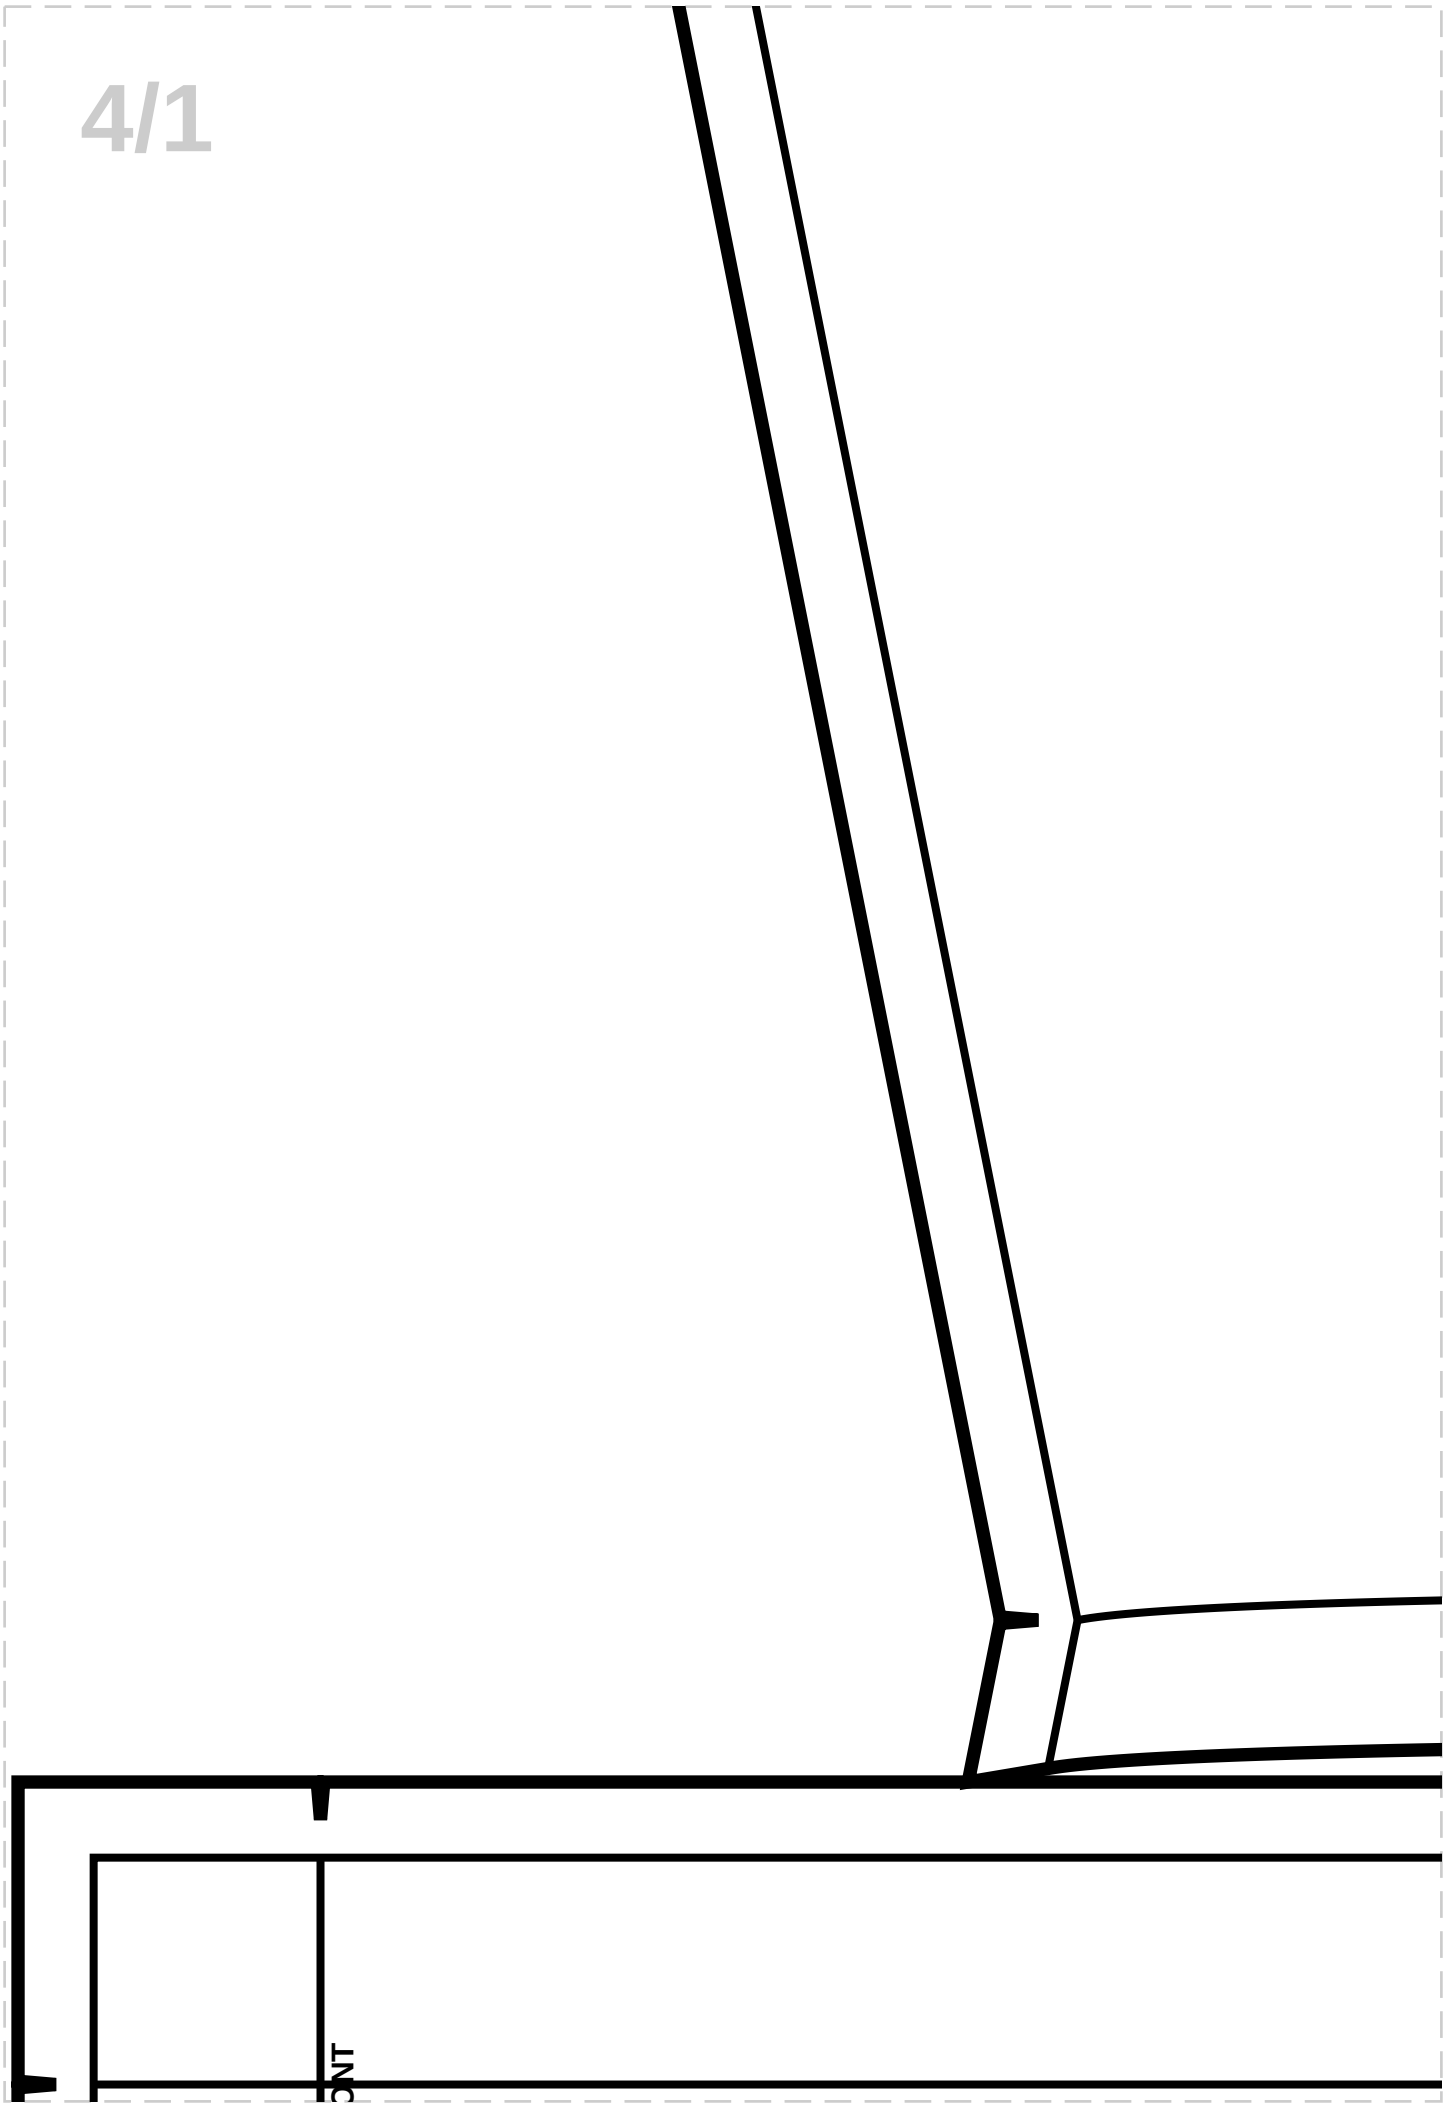

CNT

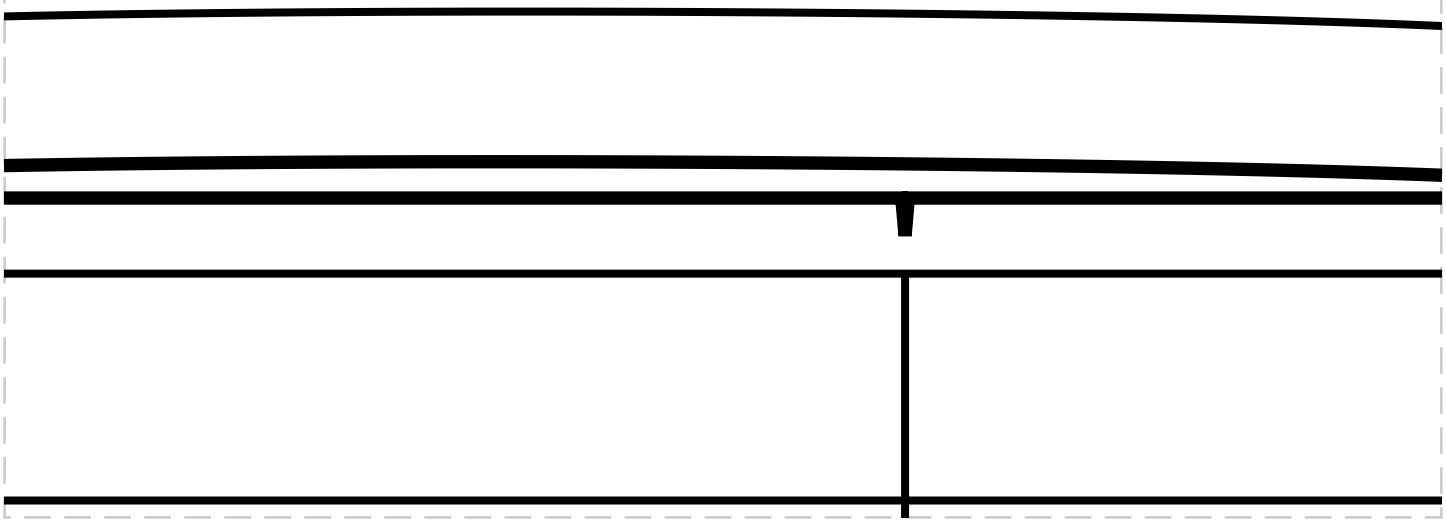


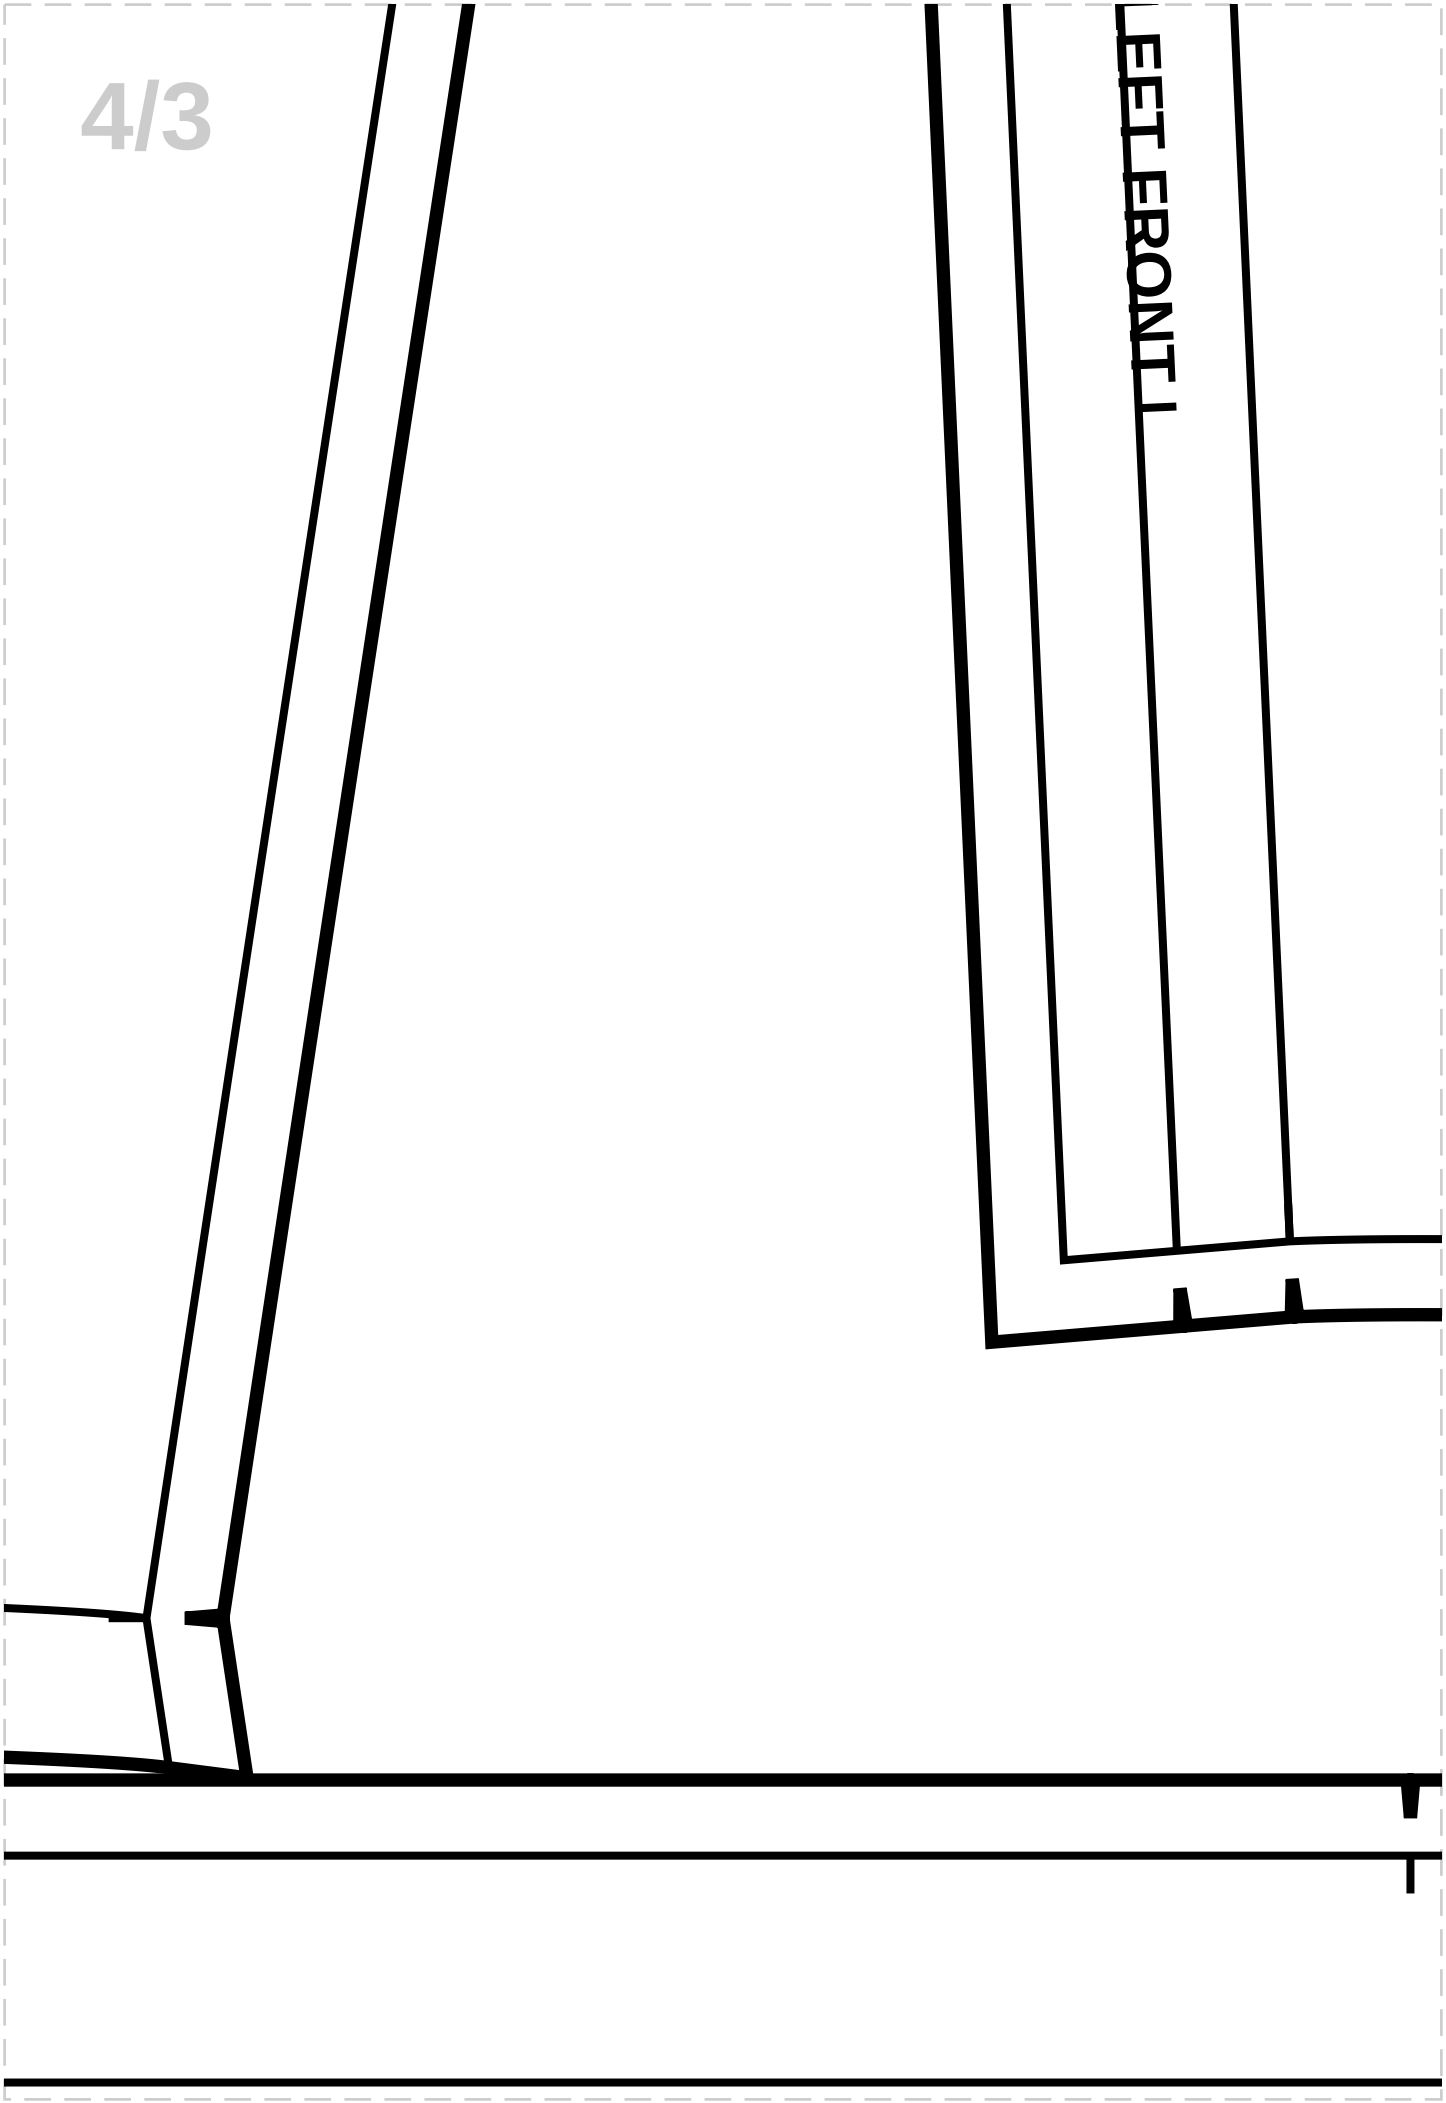
FEET FRONT

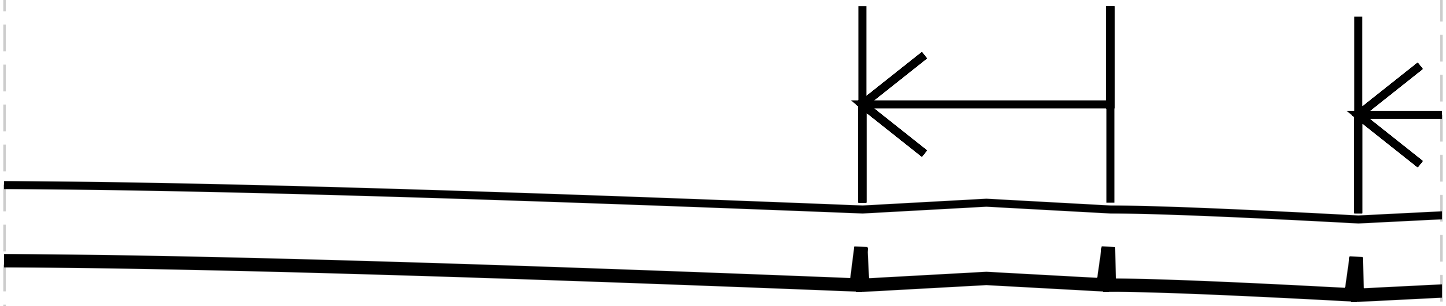

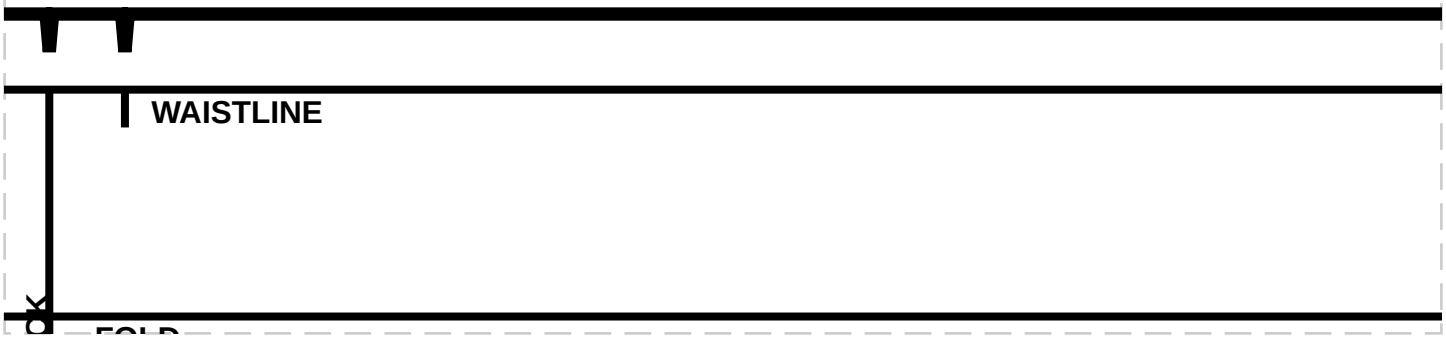
WAISTLINE
FOLD

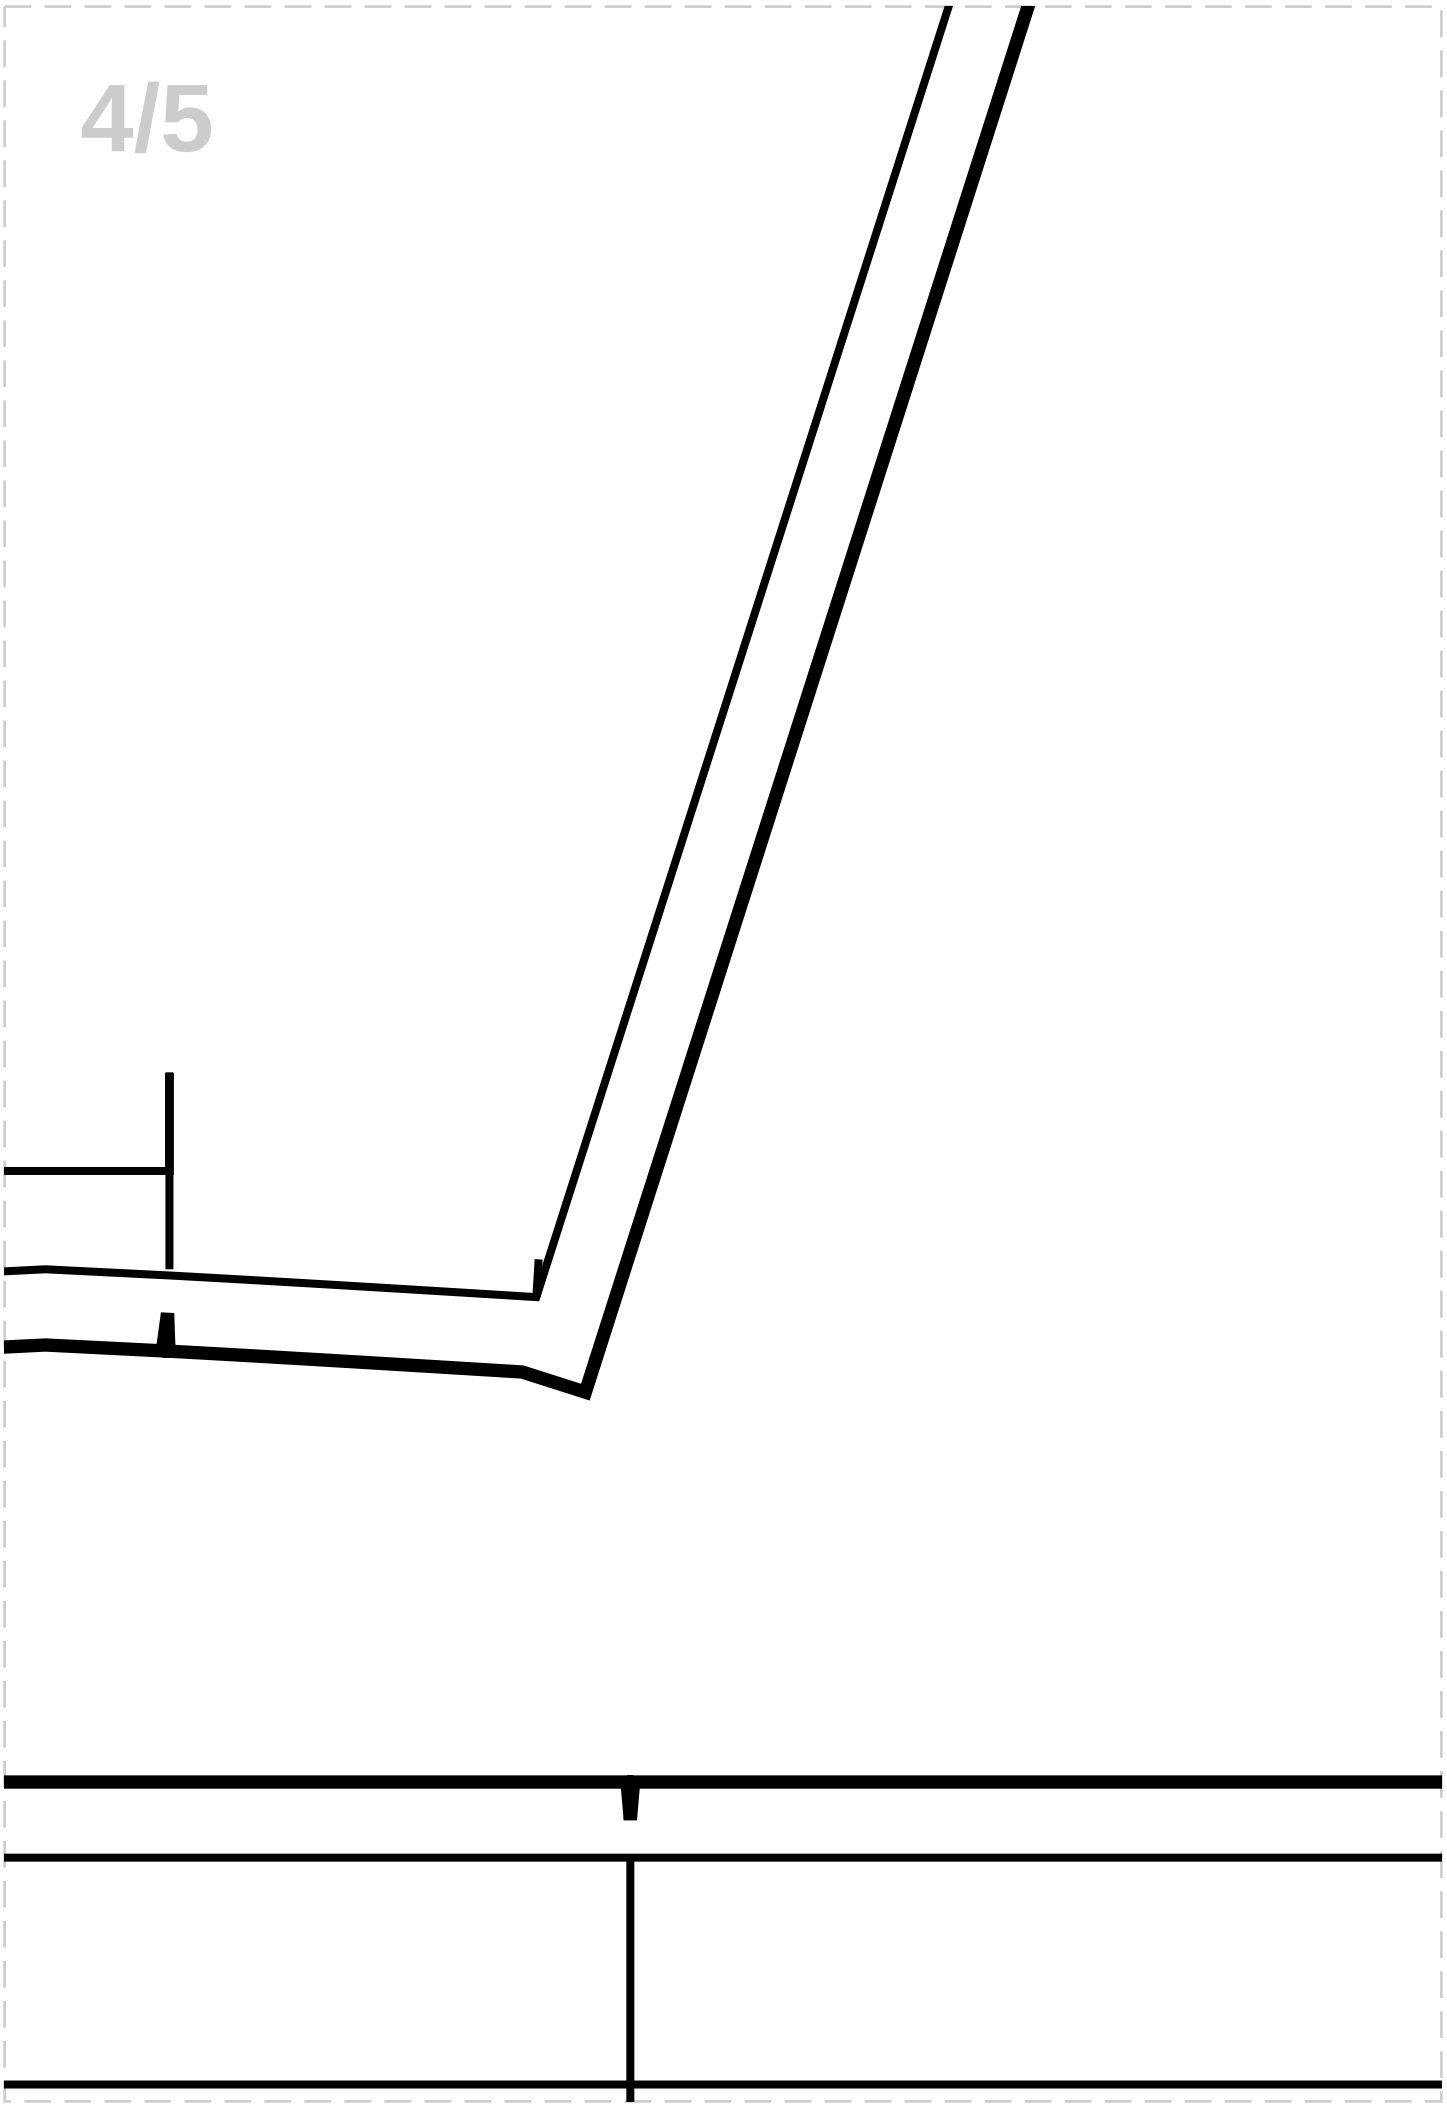

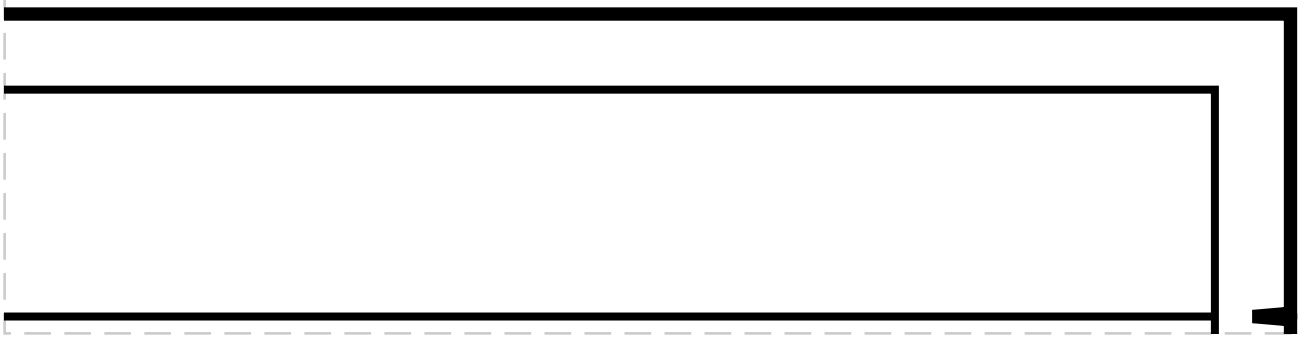

5/1

CENTER FR

3

WAISTBAND


MAIN FABRIC: Cut 1

FUSIBLE INTERFACING: Cut 1

5/2




FOLD
CENTER BA
5/4
WAISTLINE

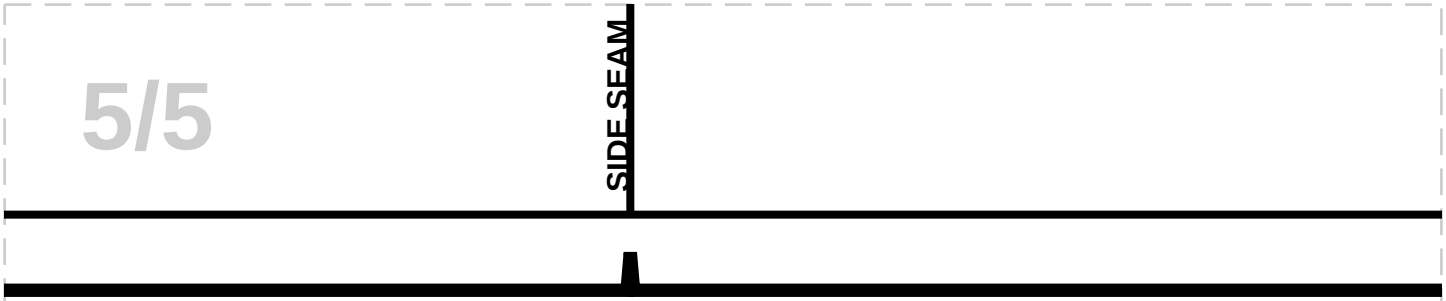
SIDE SEAM


CENTER
FRONT