cozysewpatterns

Print this Calibration Test page first!

Size: Height: 167.75, Bust: 80, Waist: 63.5, Hips: 87.75
SIZE 00

Notes

How to print

Printing


Once your Calibration Test Page has been printed, measure the 4”x 4” (10cm) scale box with a ruler. If the lengths match, you can confidently print your pattern. If the rulers do not match, set your print settings to 100% or Actual and retry.

Cutting

Your printouts will always have a dashed border to perfectly match your sheets. Cut off the right edge of each page. Be careful not to cut beyond the dashed mark, otherwise your patterns will not align accurately.

Tapping

Group each sheet by the second number marked on each pate i.e. in a group 1, there are: 1/1, 2/1, 3/1, 4/1, etc. In a group 2: 1/2, 2/2 etc. 2. Place page 1/1 on top of the page 2/1, overlapping the right side edge. Match corners and crosses and secure with a pin or tape. Then use a scotch tape to permanently attach the sheets together.

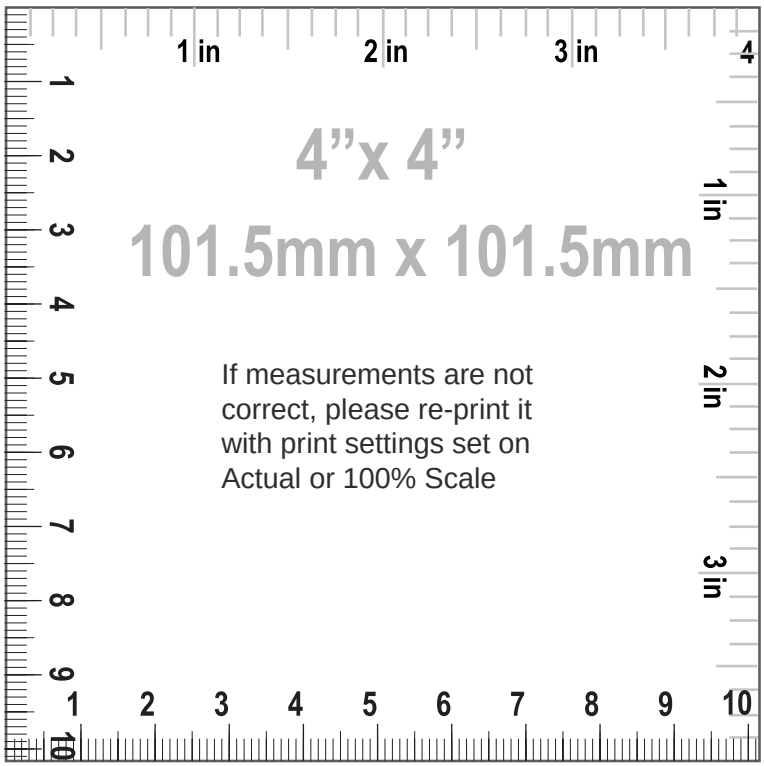

SIZE 00
Seam Allowance: 1 (3/8 in)

Pattern pieces:

1. "PANTS FRONT", MAIN FABRIC: Cut 2
2. "PANTS BACK", MAIN FABRIC: Cut 2
3. "WAISTBAND", MAIN FABRIC, FUSIBLE INTERFACING: Cut 1
4. "POCKET BAG", MAIN FABRIC: Cut 2
5. "FLY FACING", MAIN FABRIC: Cut 1
6. "POCKET LINING", LINING: Cut 2
7. "FLY INTERFACING", FUSIBLE INTERFACING: Cut 1
8. "BACK POCKET WELT", MAIN FABRIC, FUSIBLE INTERFACING: Cut 2
9. "BACK INNER POCKET BAG", LINING: Cut 2
10. "BACK OUTER POCKET BAG", LINING: Cut 2


Pattern Specs (Circumferences are divided by 2):


1. Hem max 3.00 none (1 1/8 in)
2. Seam allowance max 2.00 none (3/4 in)
3. Stretch factor 1.00 none (3/8 in)
4. Stretch factor horizontal 1.00 none (3/8 in)
5. Stretch factor vertical 1.00 none (3/8 in)
6. Pocket bag height 27.31 cm (10 3/4 in)
7. Pocket side seam 18.04 cm (7 1/8 in)
8. Pocket waist seam 18.04 cm (7 1/8 in)
9. Back pocket entry length 12.00 cm (4 3/4 in)
10. Side seam back pocket position 4.79 cm (1 7/8 in)
11. Waist to back pocket length 10.20 cm (4 in)
12. Back pocket width welt 2.50 cm (1 in)
13. Fly zipper length 23.00 cm (9 in)
14. Waist 32.70 cm (12 7/8 in)
15. Hips 44.45 cm (17 1/2 in)
16. Pleat depth 1.10 cm (3/8 in)
17. Thigh 28.63 cm (11 1/4 in)
18. Knee 23.32 cm (9 1/8 in)
19. Bottom opening 16.94 cm (6 5/8 in)
20. Front rise 29.18 cm (11 1/2 in)
21. Back rise 38.17 cm (15 in)

22. Crotch height 27.76 cm (10 7/8 in)
23. Inseam length 69.93 cm (27 1/2 in)
24. Pants side seam length 98.22 cm (38 5/8 in)
25. Waistband width 3.00 cm (1 1/8 in)
26. Waistband length 68.39 cm (26 7/8 in)
27. Waistband button diameter 1.00 cm (3/8 in)
28. Waistband buttons quantity 1.00 pc
29. Seam allowance poc max 3.00 none (1 1/8 in)
30. Back pocket bag height 10.20 cm (4 in)


cozysewpatterns


Paper Size: LETTER;
Print Actual Size (100% Scale);

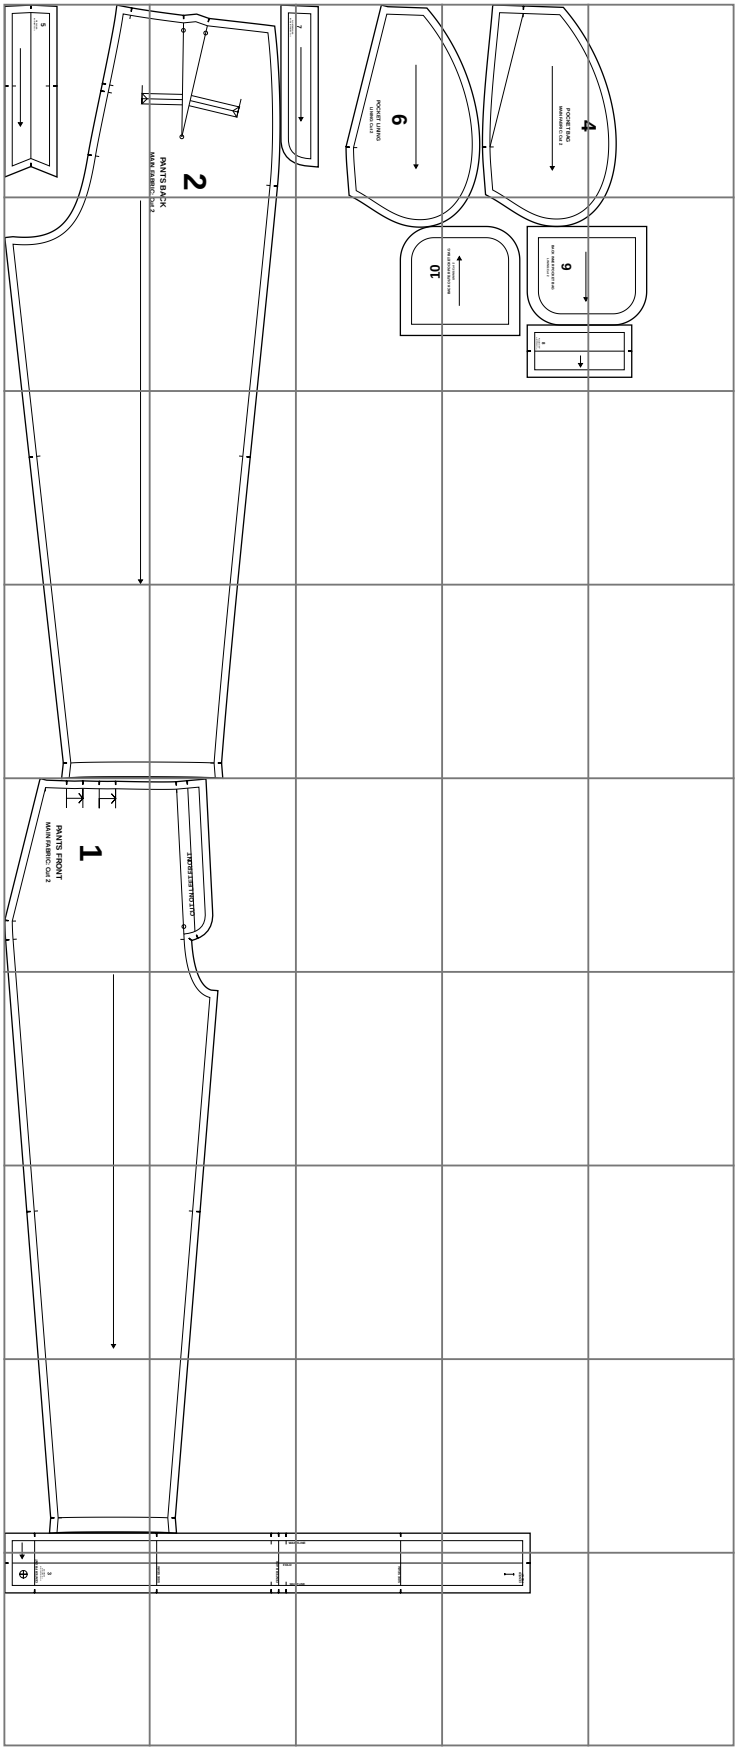

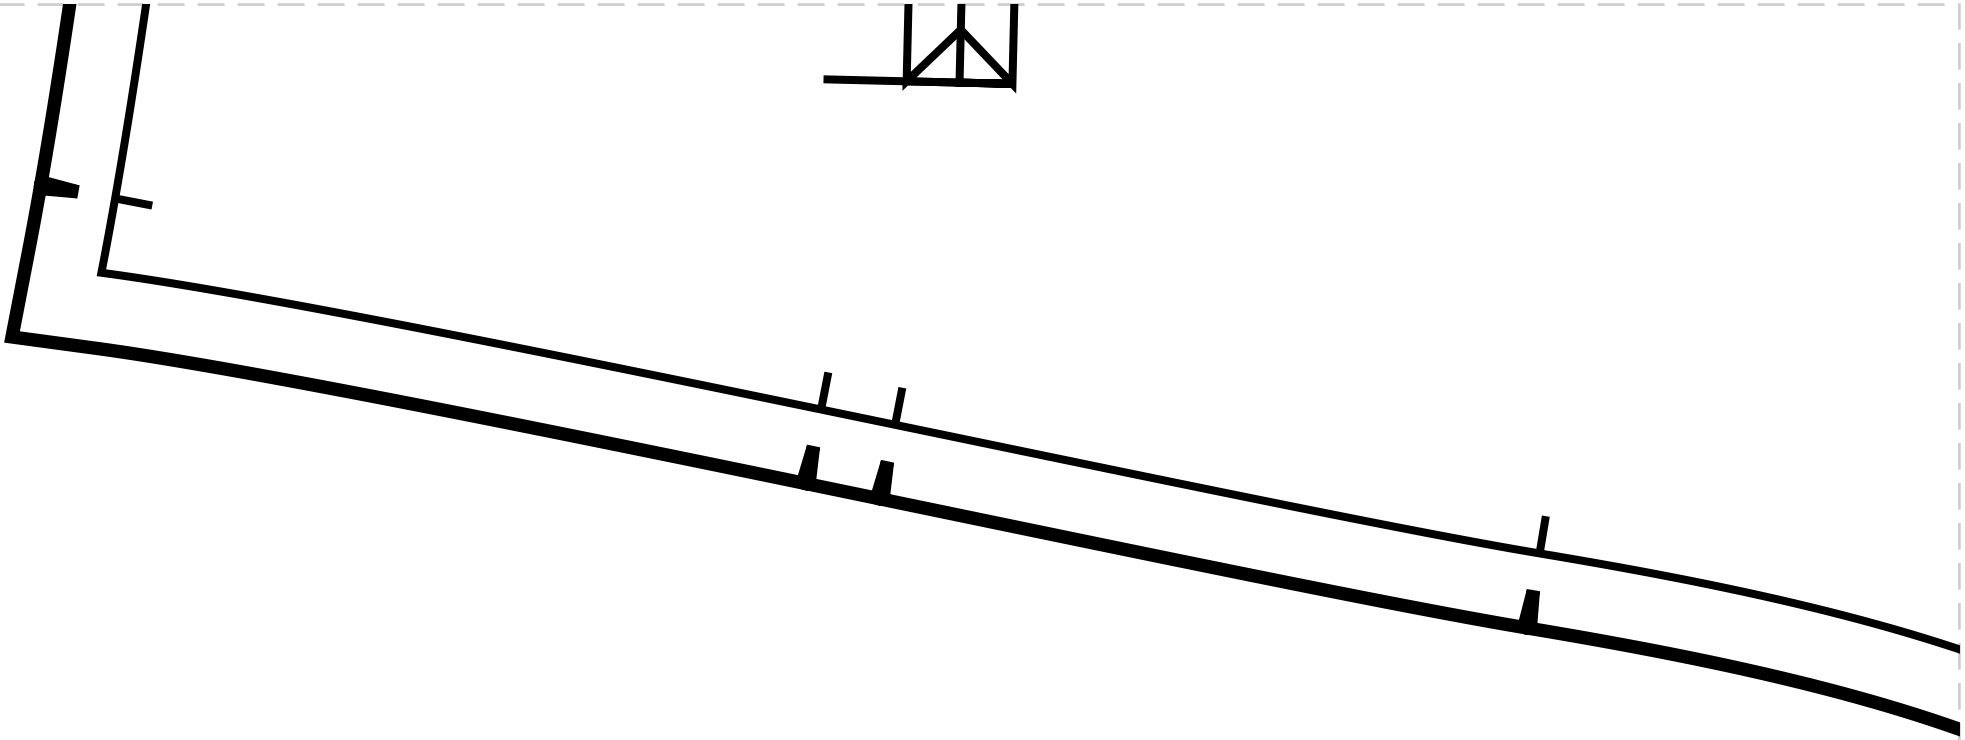


5
FLY FACING
MAIN FABRIC: Cut 1
T/T

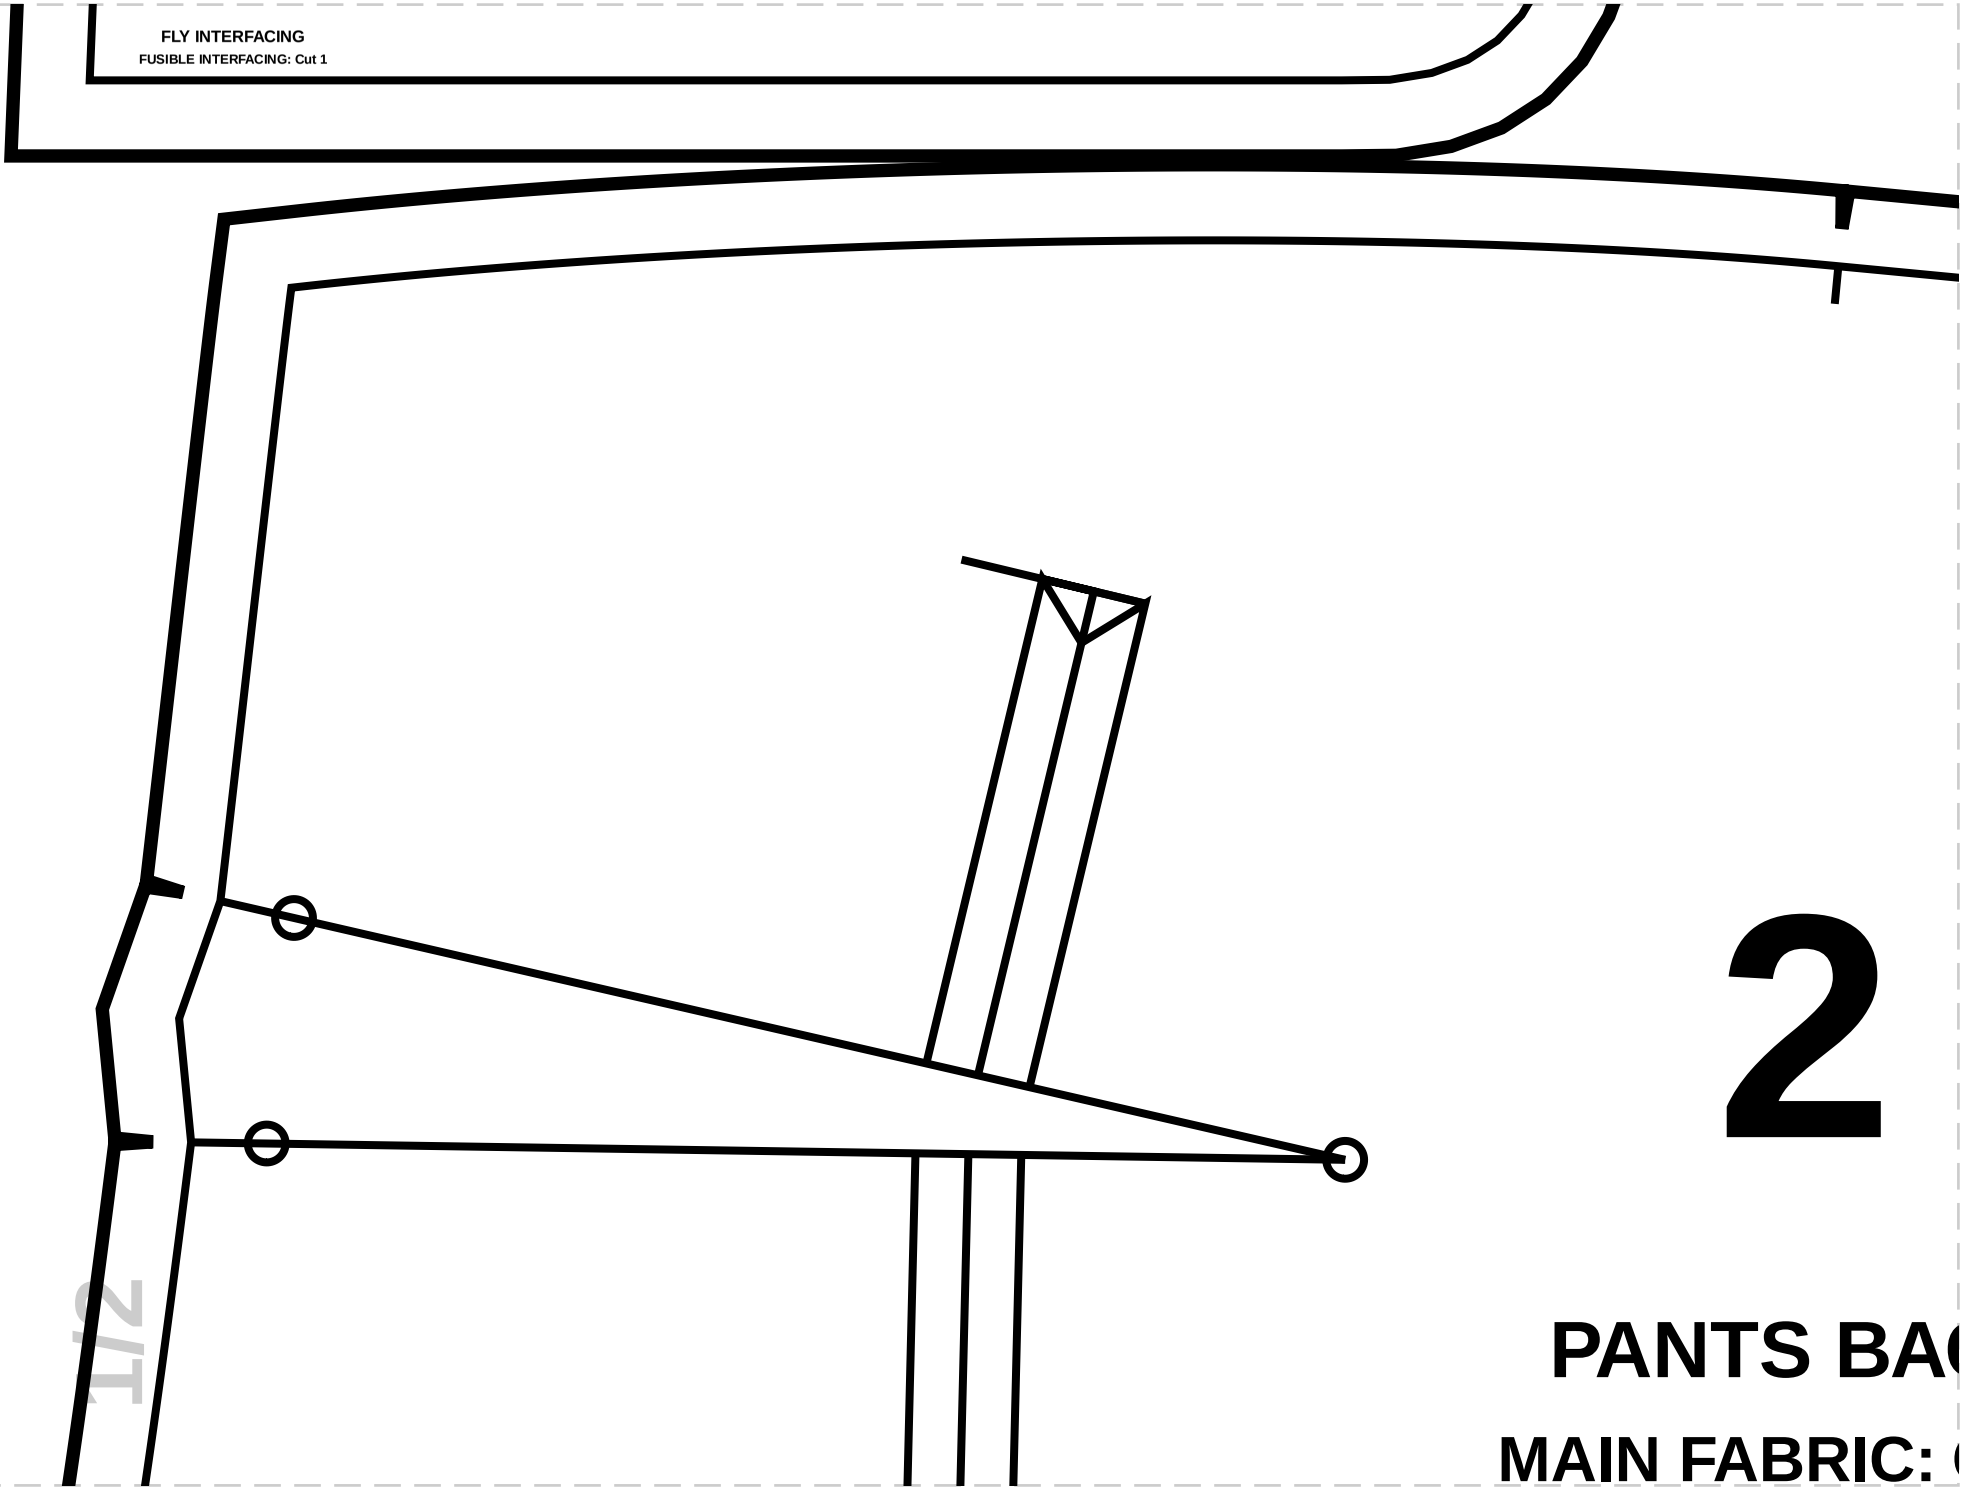
FLY INTERFACING
FUSIBLE INTERFACING: Cut 1
2
1/2
PANTS BA
MAIN FABRIC:

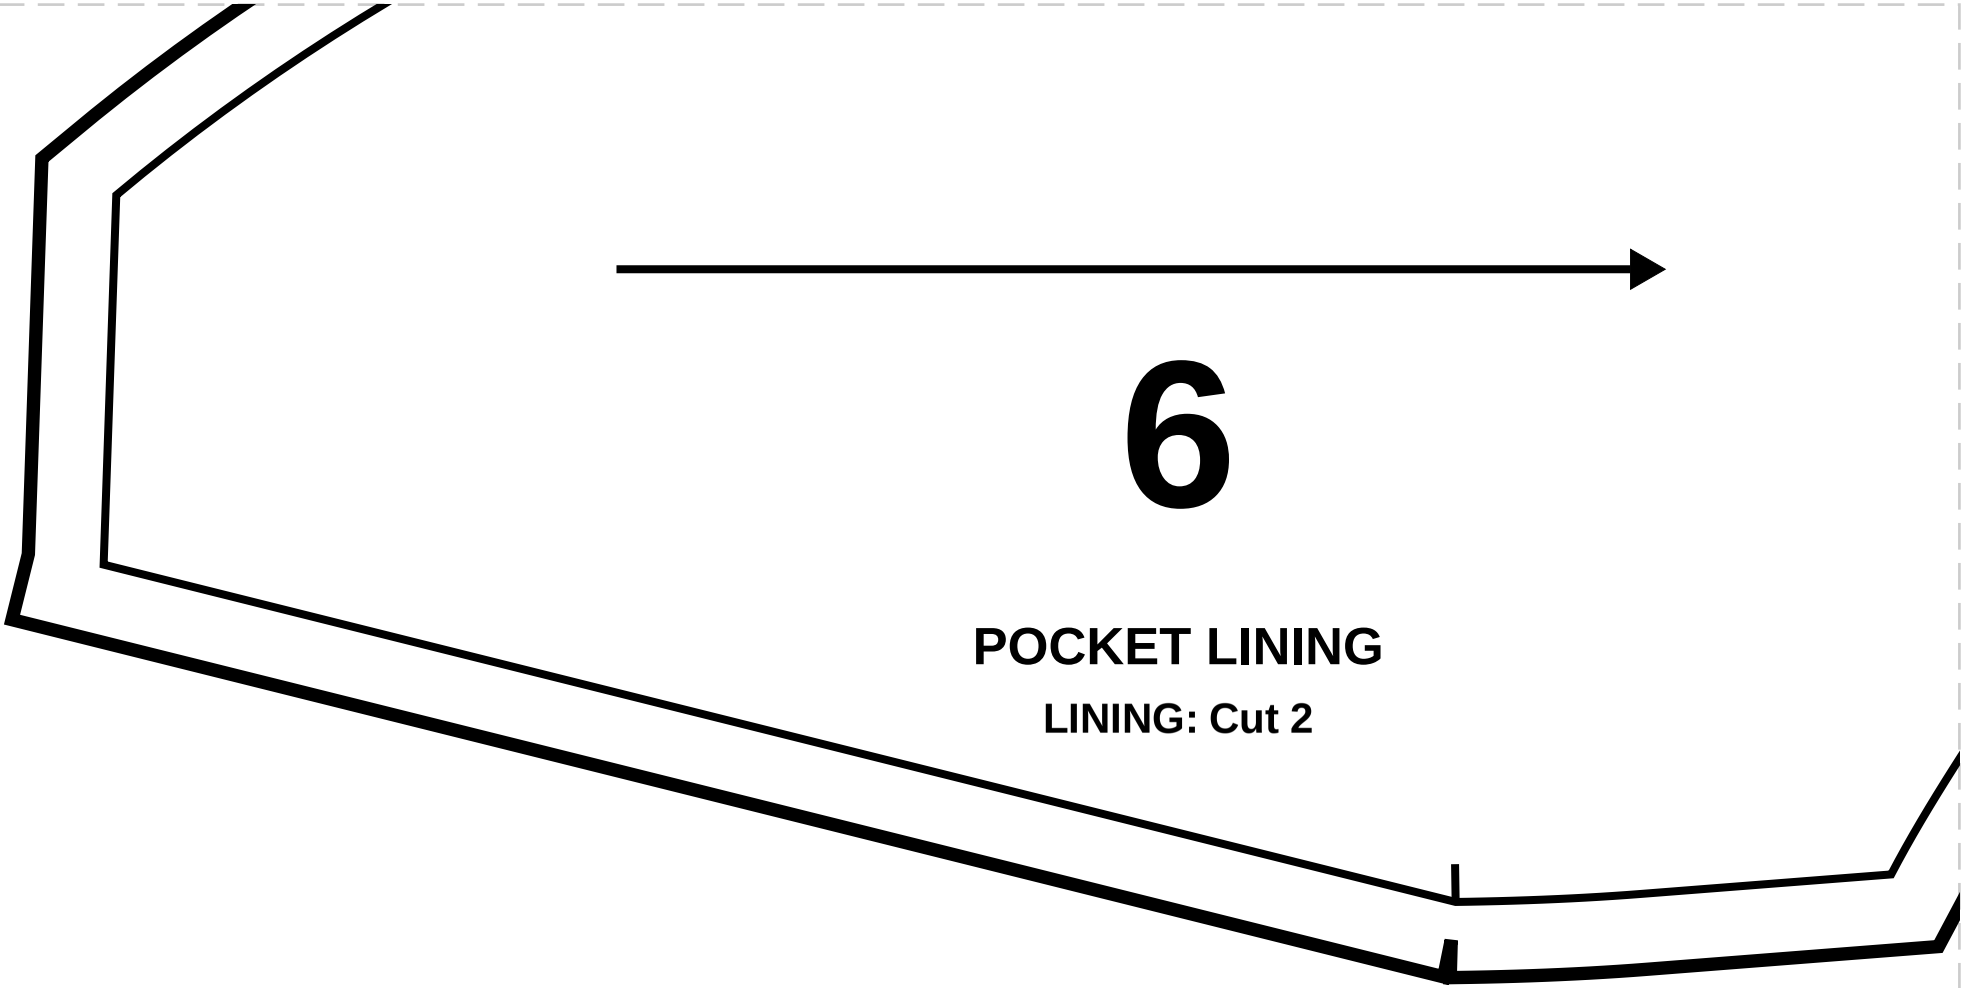

6
POCKET LINING
LINING: Cut 2



1/3
7


4


POCKET BAG

MAIN FABRIC: Cut 2

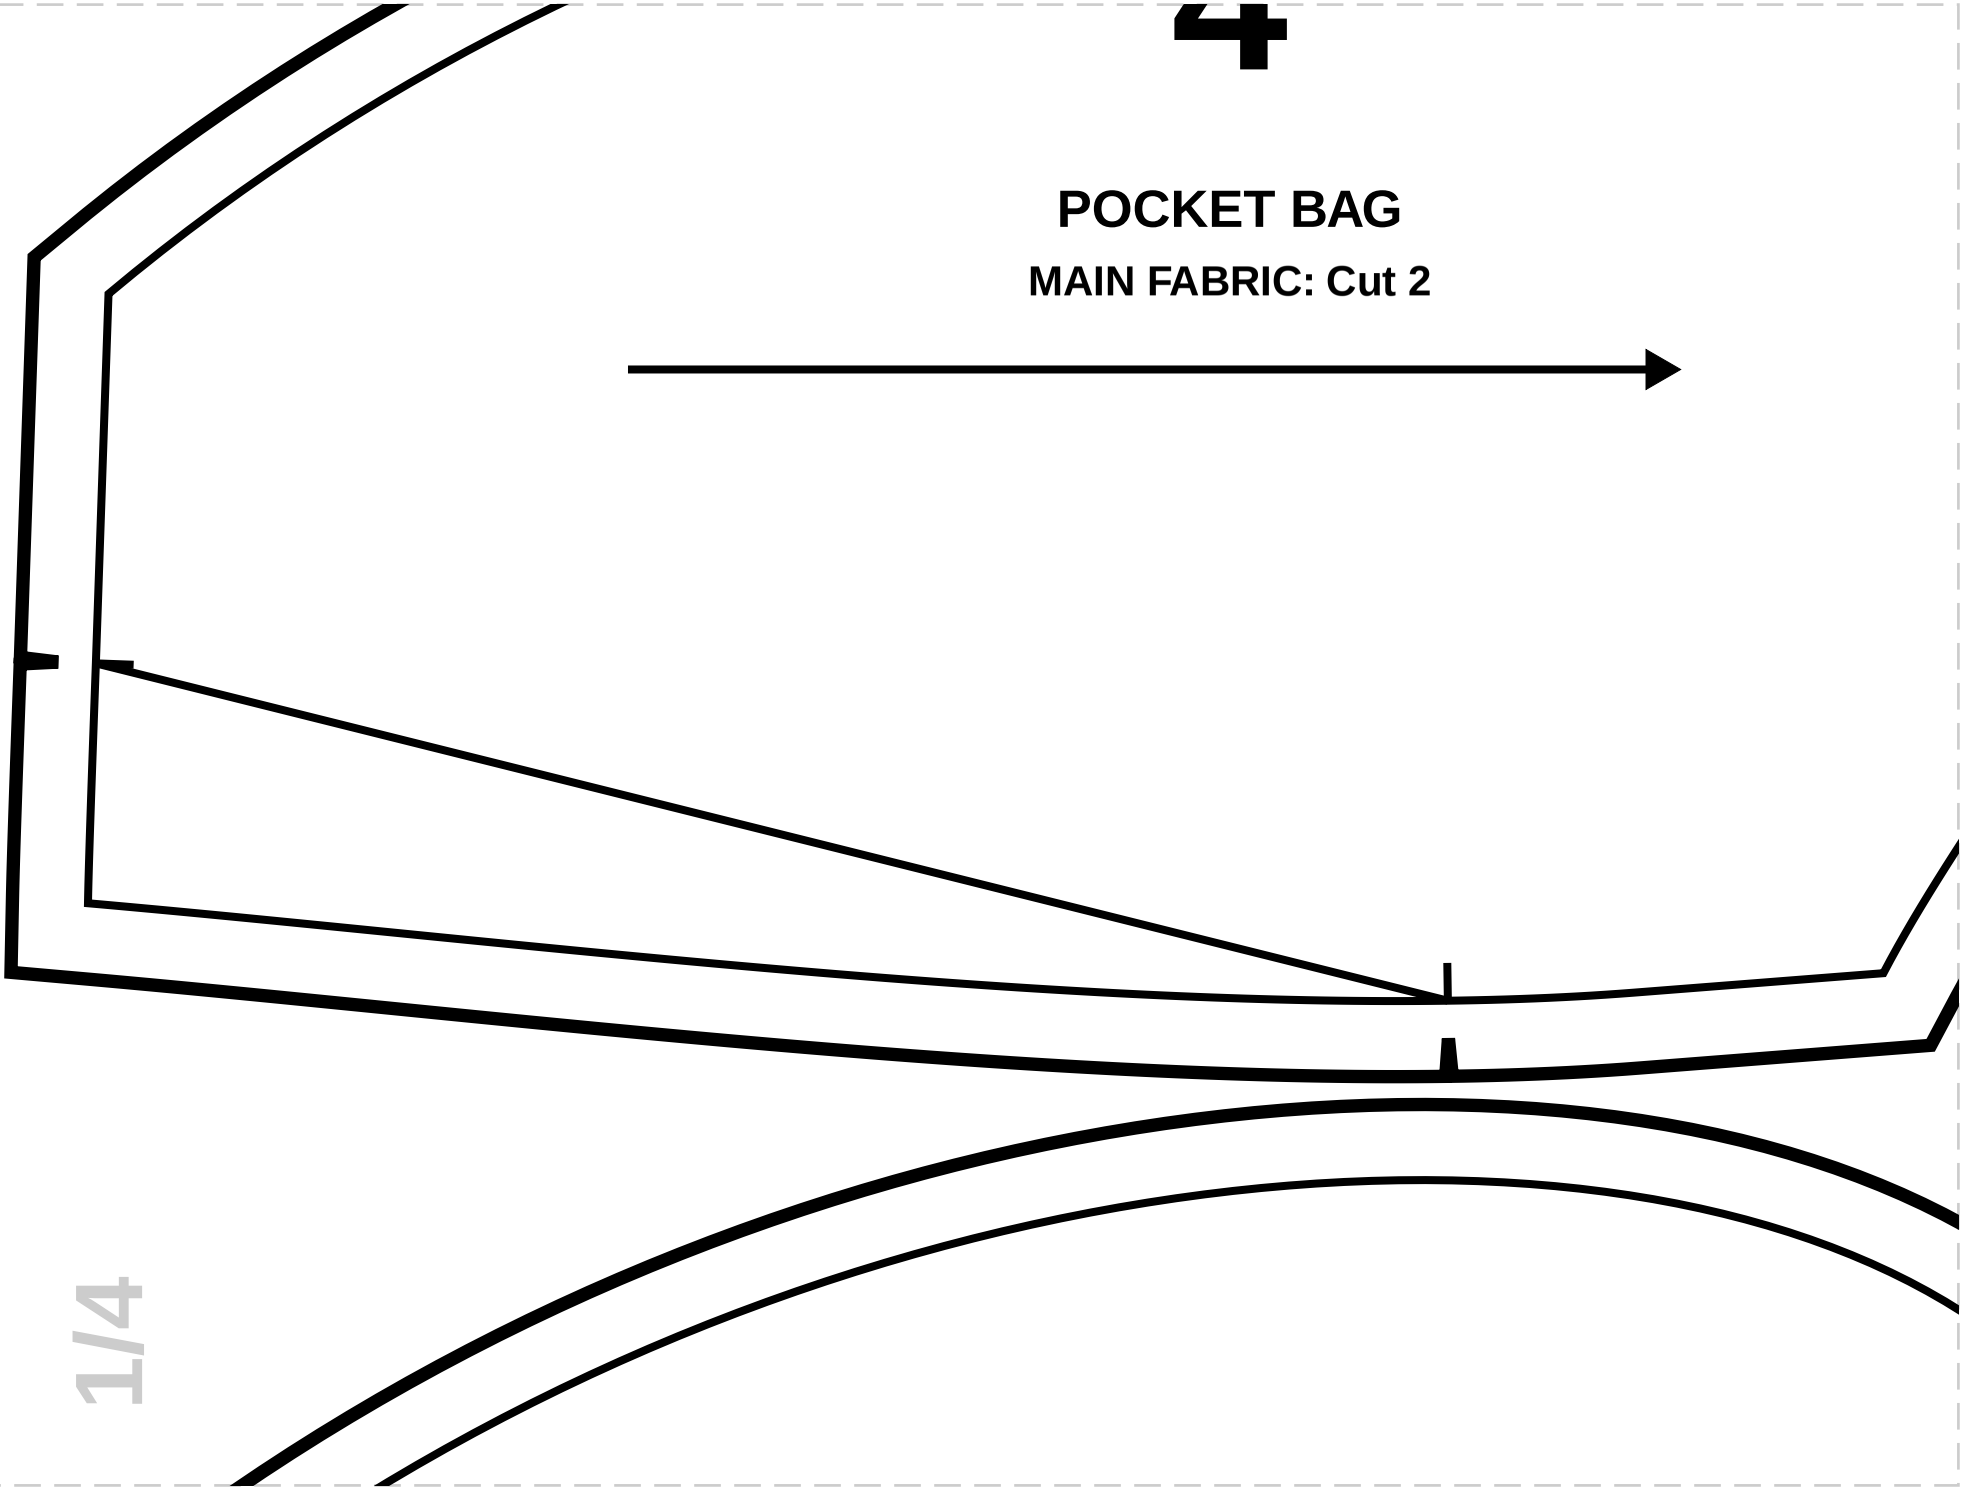

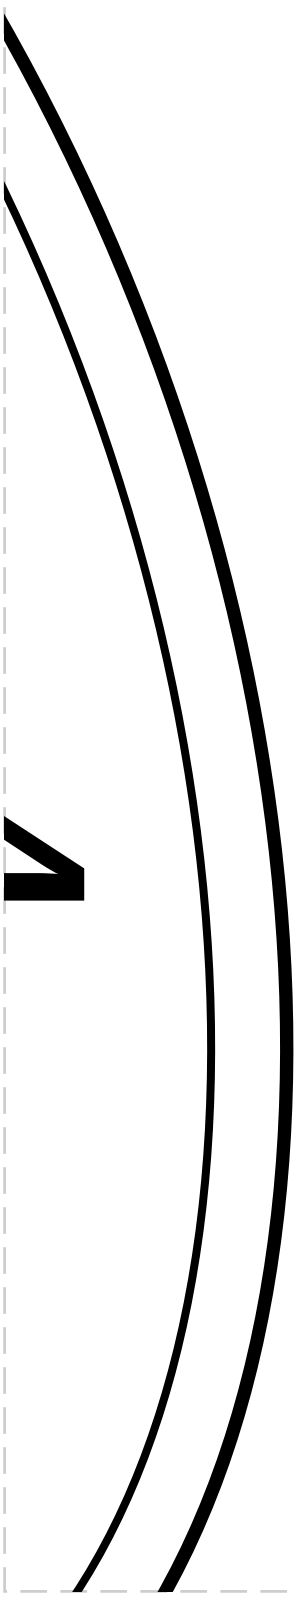

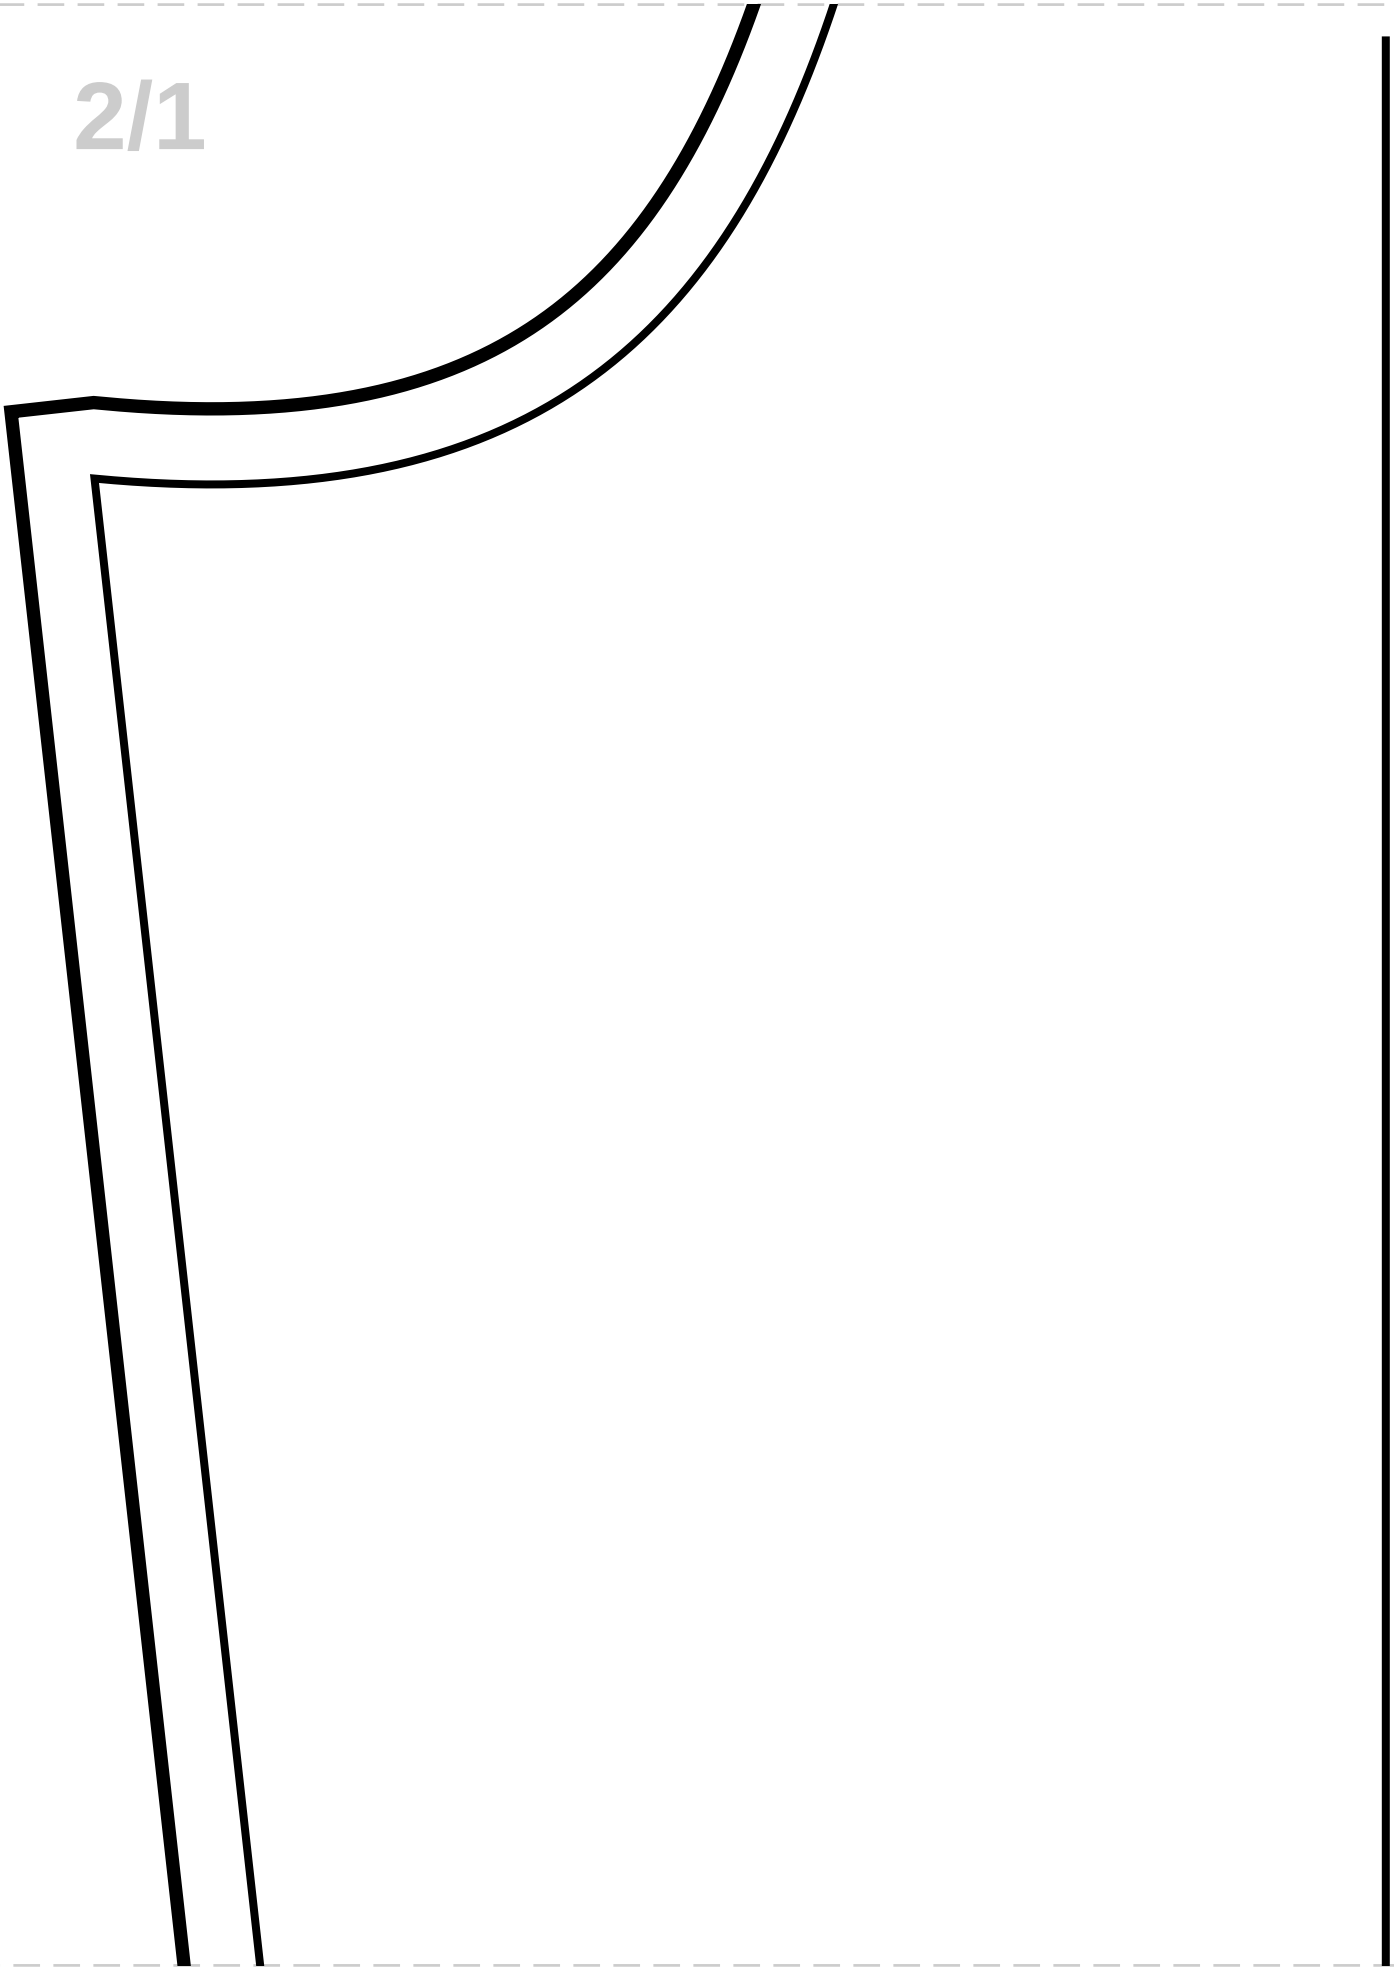


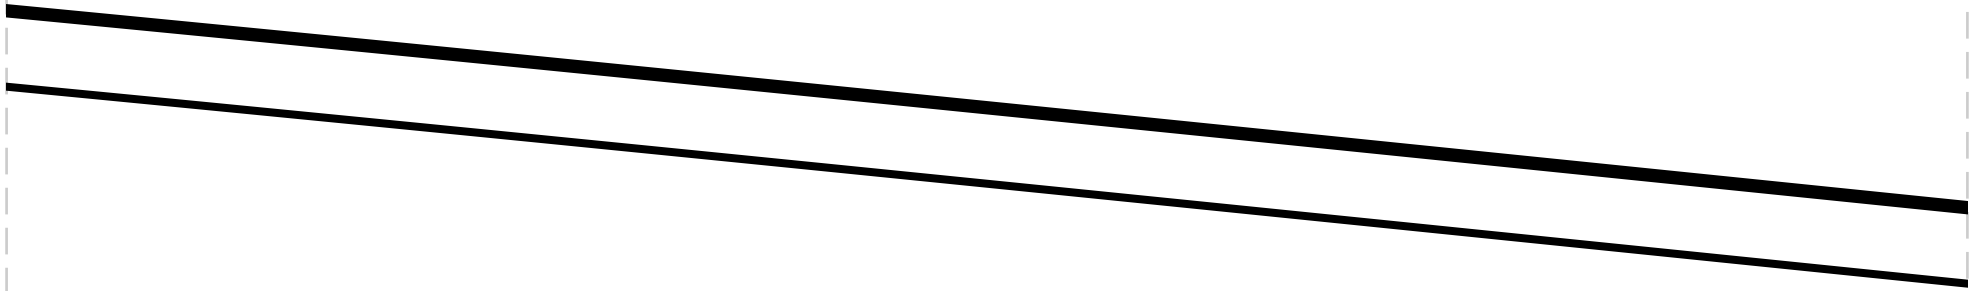



CK 2/2

Cut 2


10

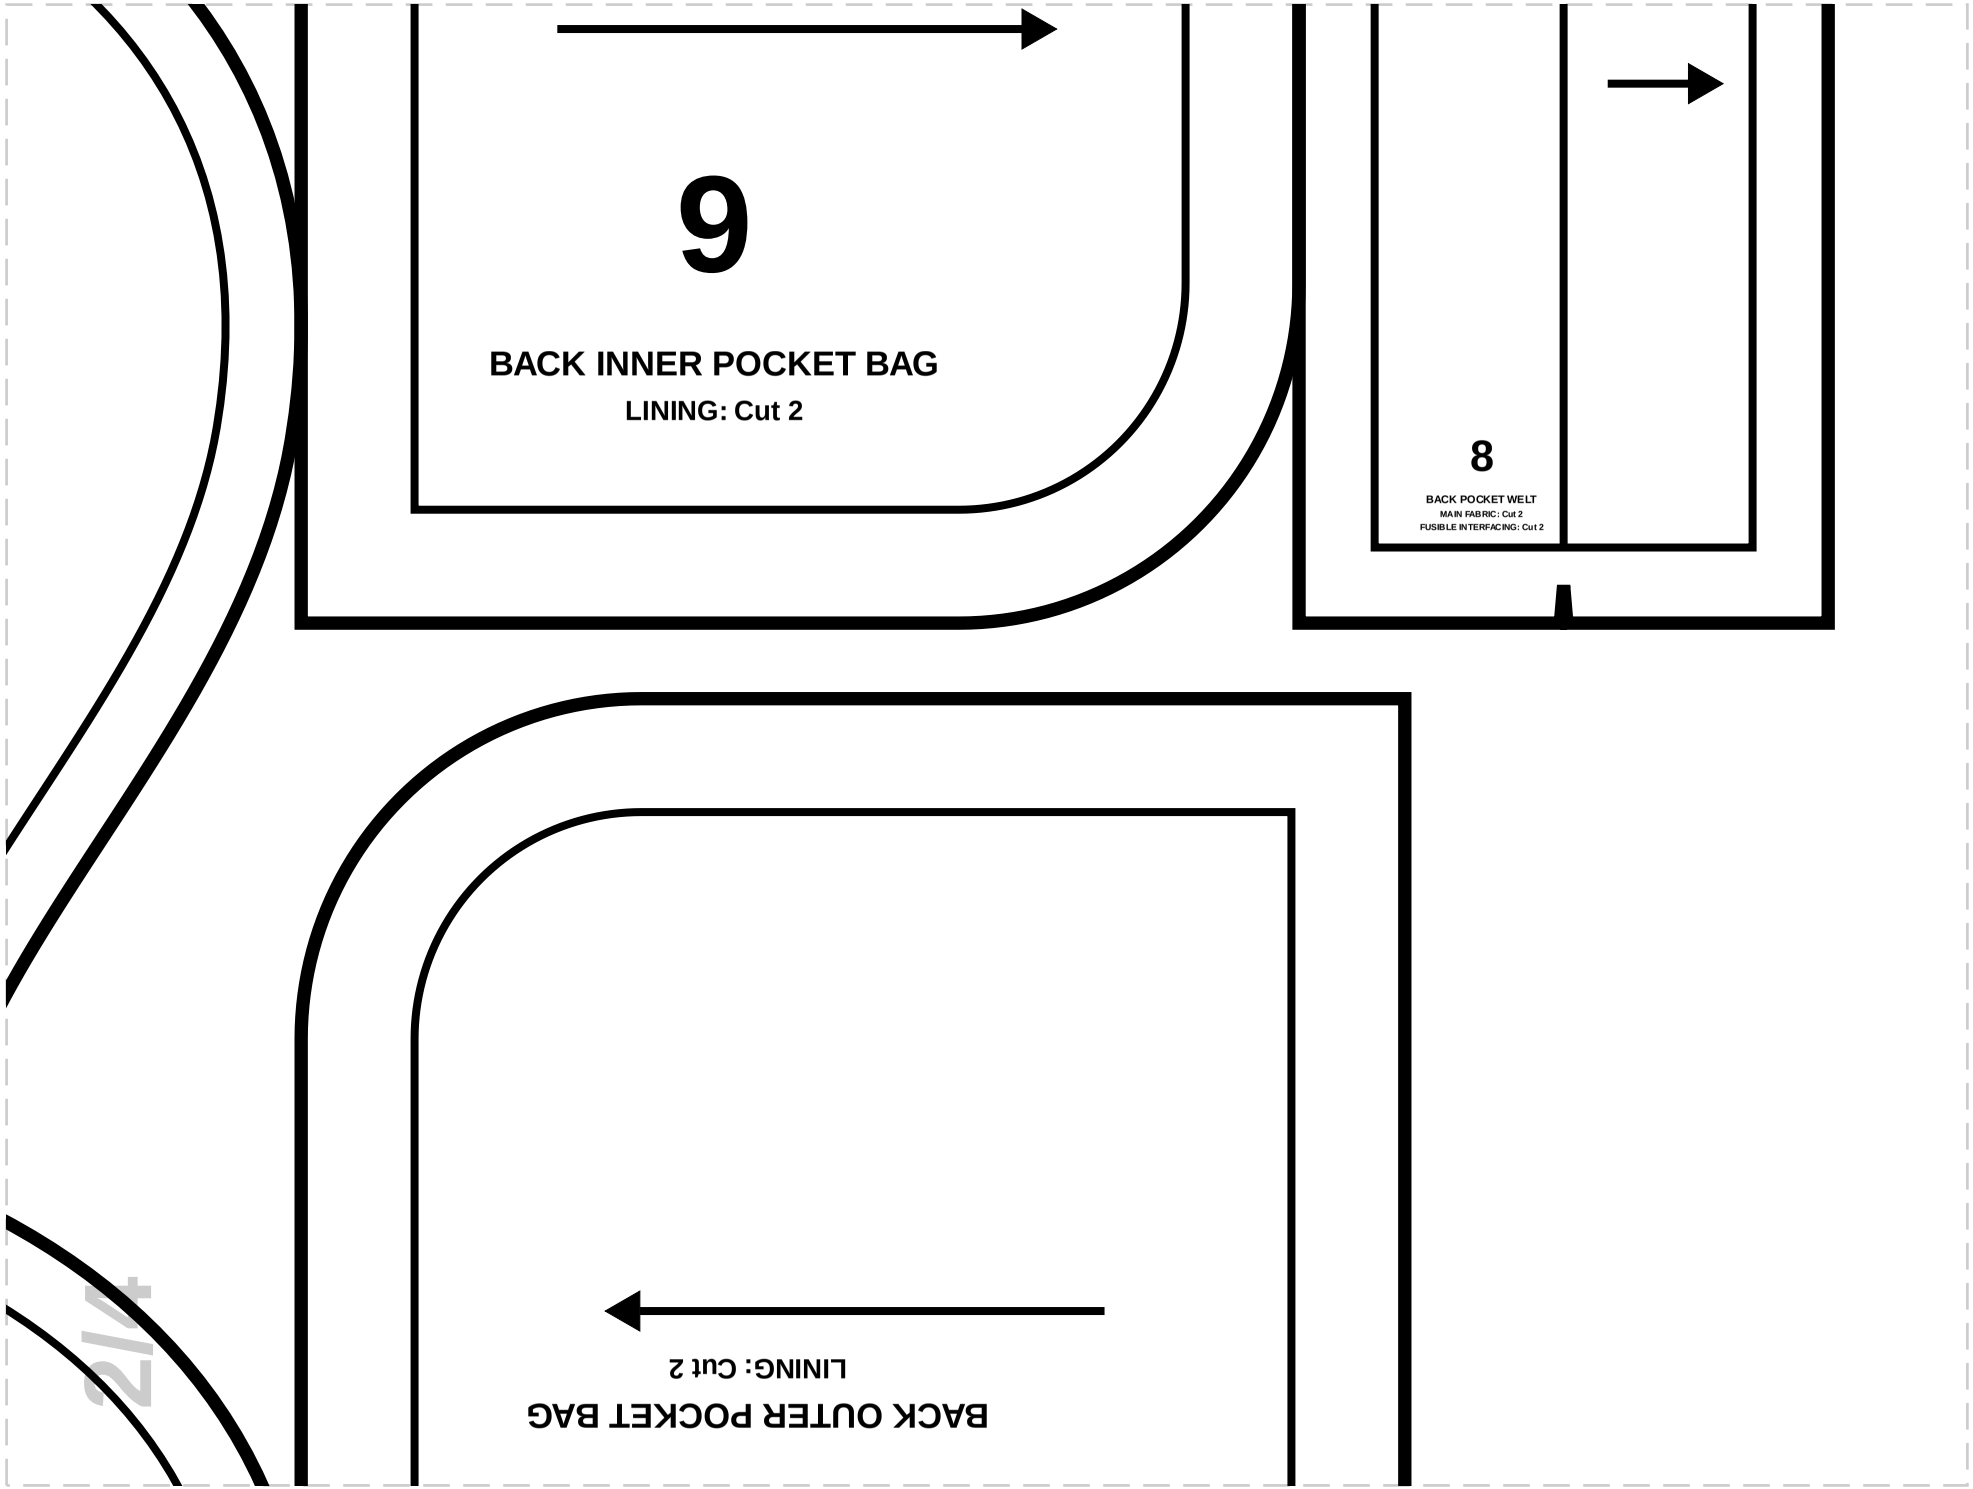
9
BACK INNER POCKET BAG
LINING: Cut 2
8
BACK POCKET WELT
MAIN FABRIC: Cut 2
FUSIBLE INTERFACING: Cut 2
BACK OUTER POCKET BAG
LINING: Cut 2

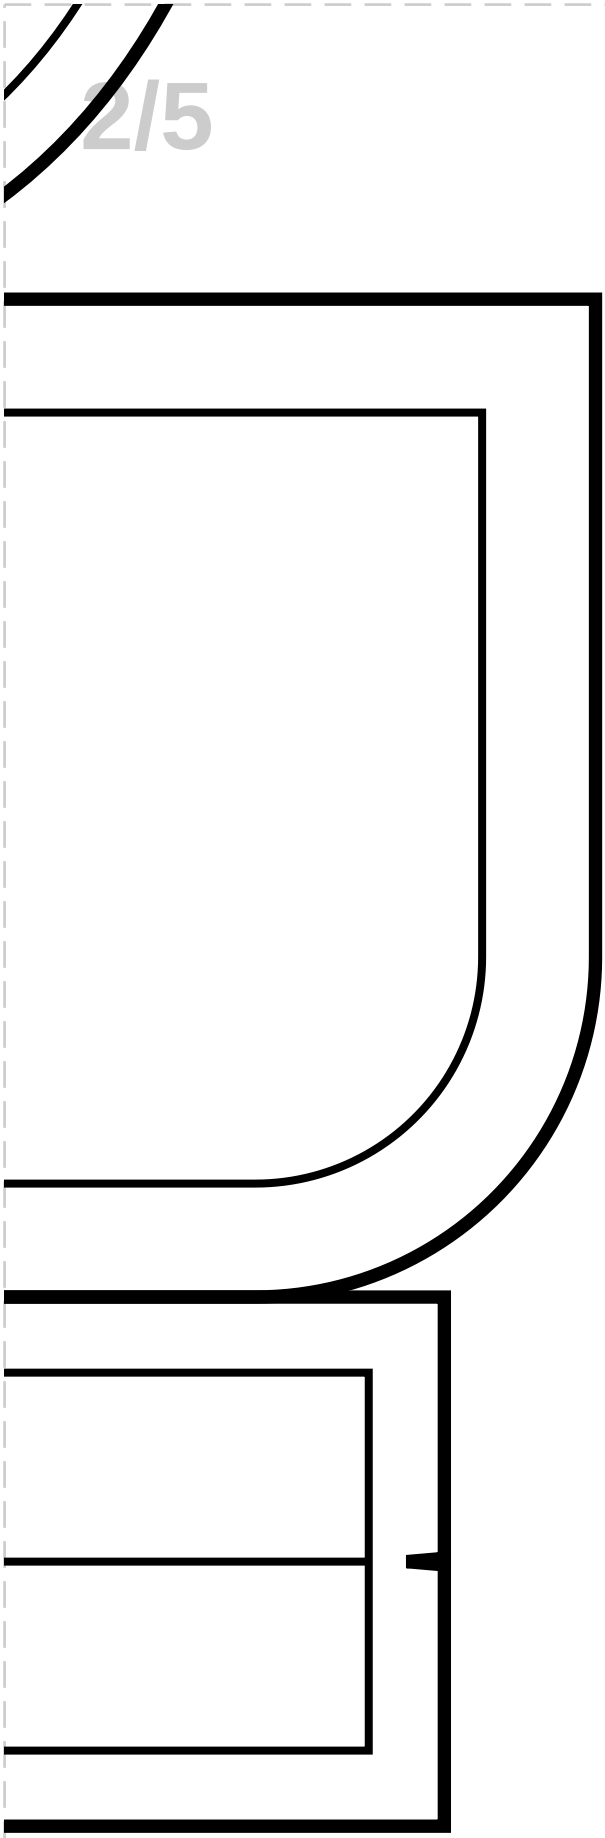


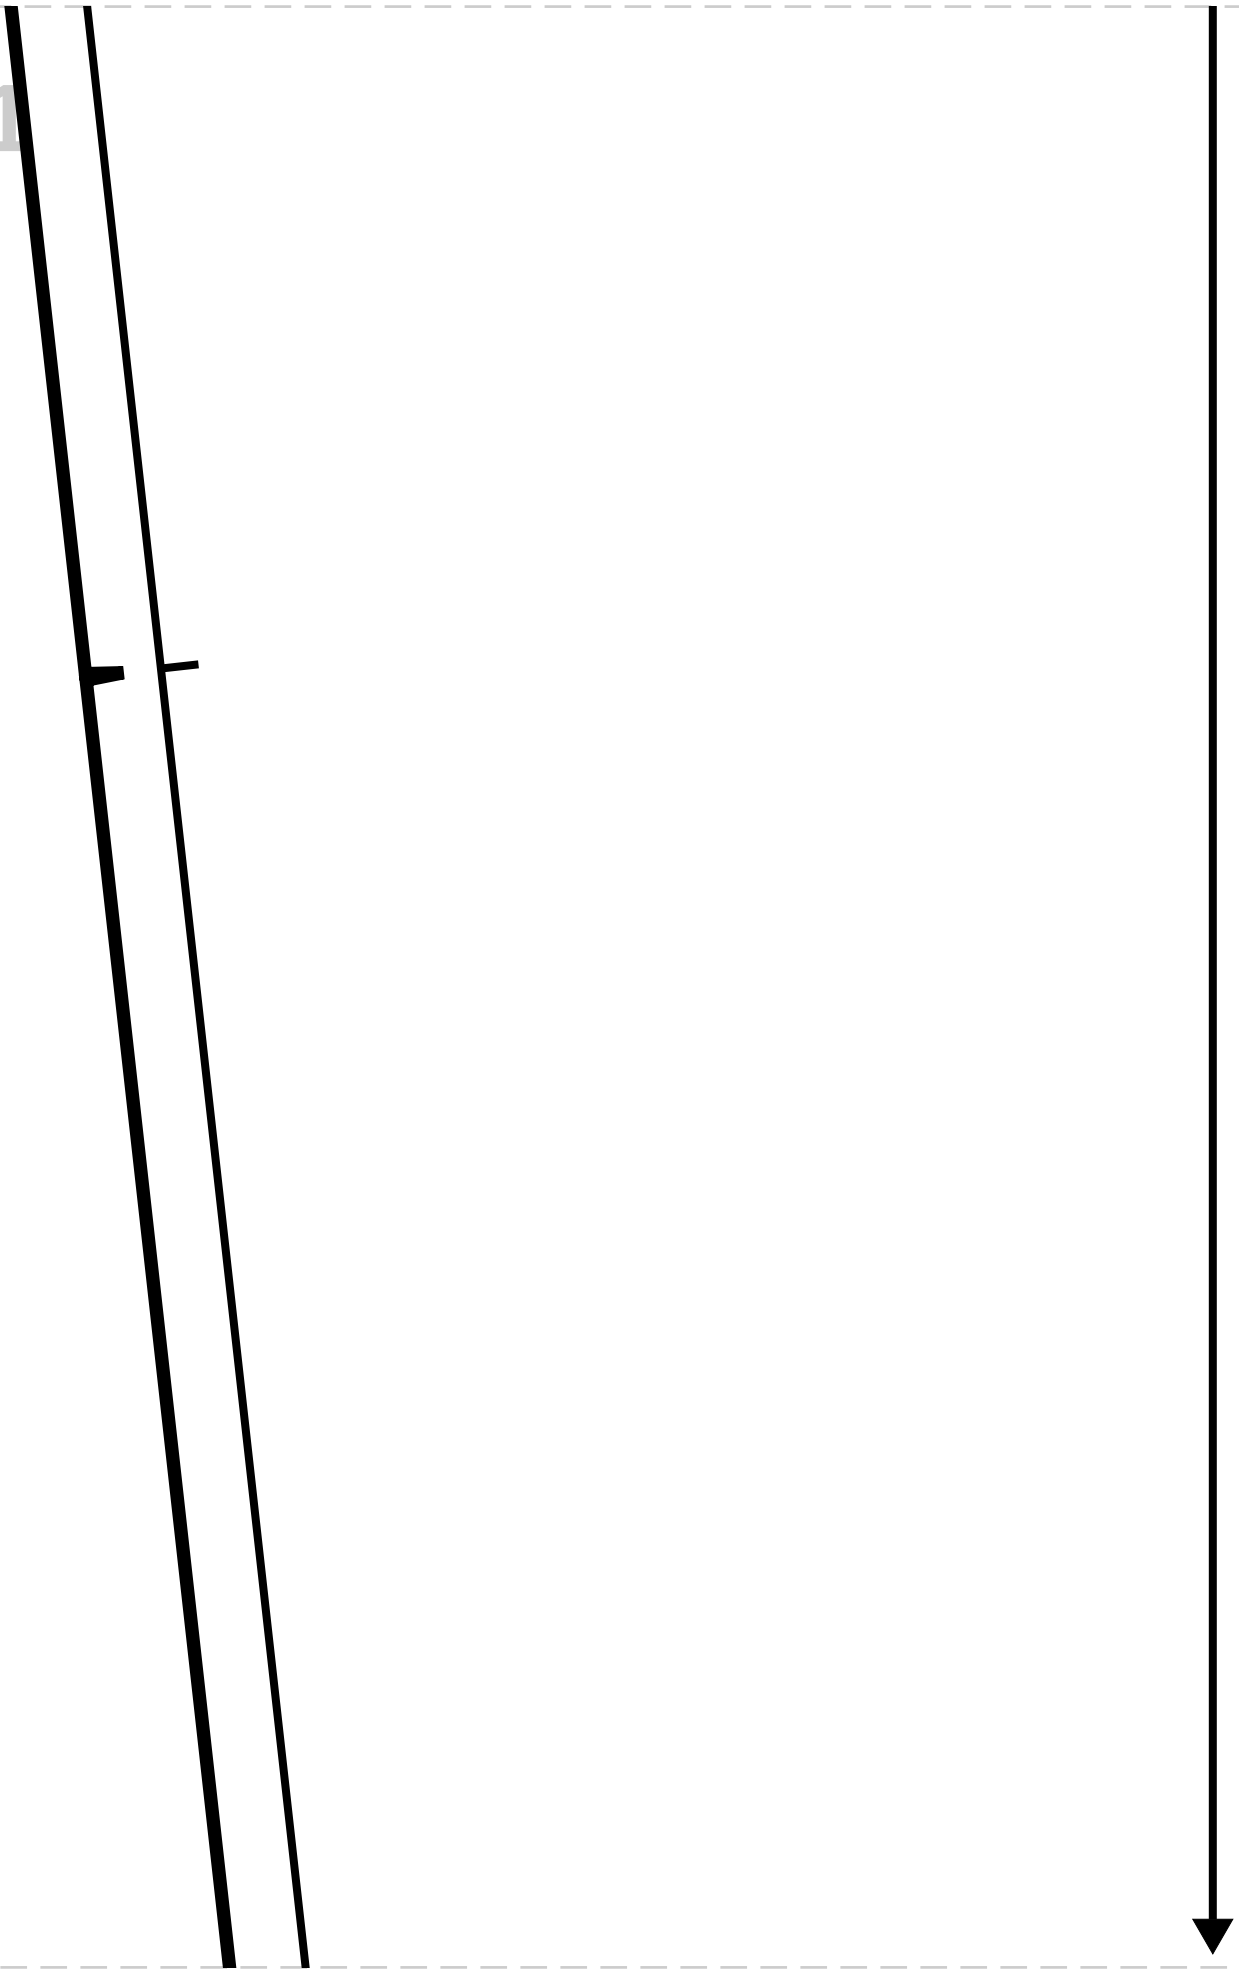


3/2

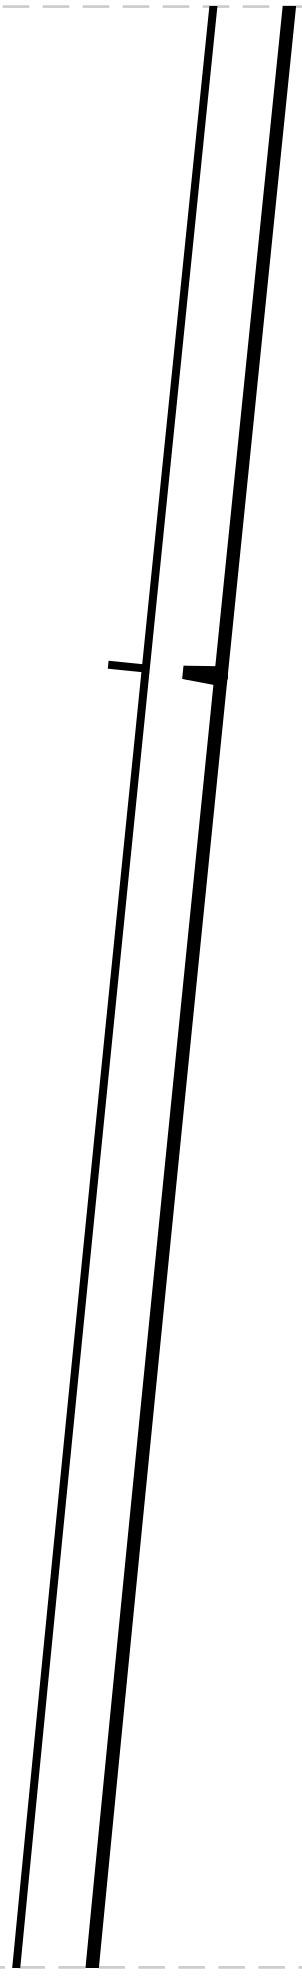



4/1

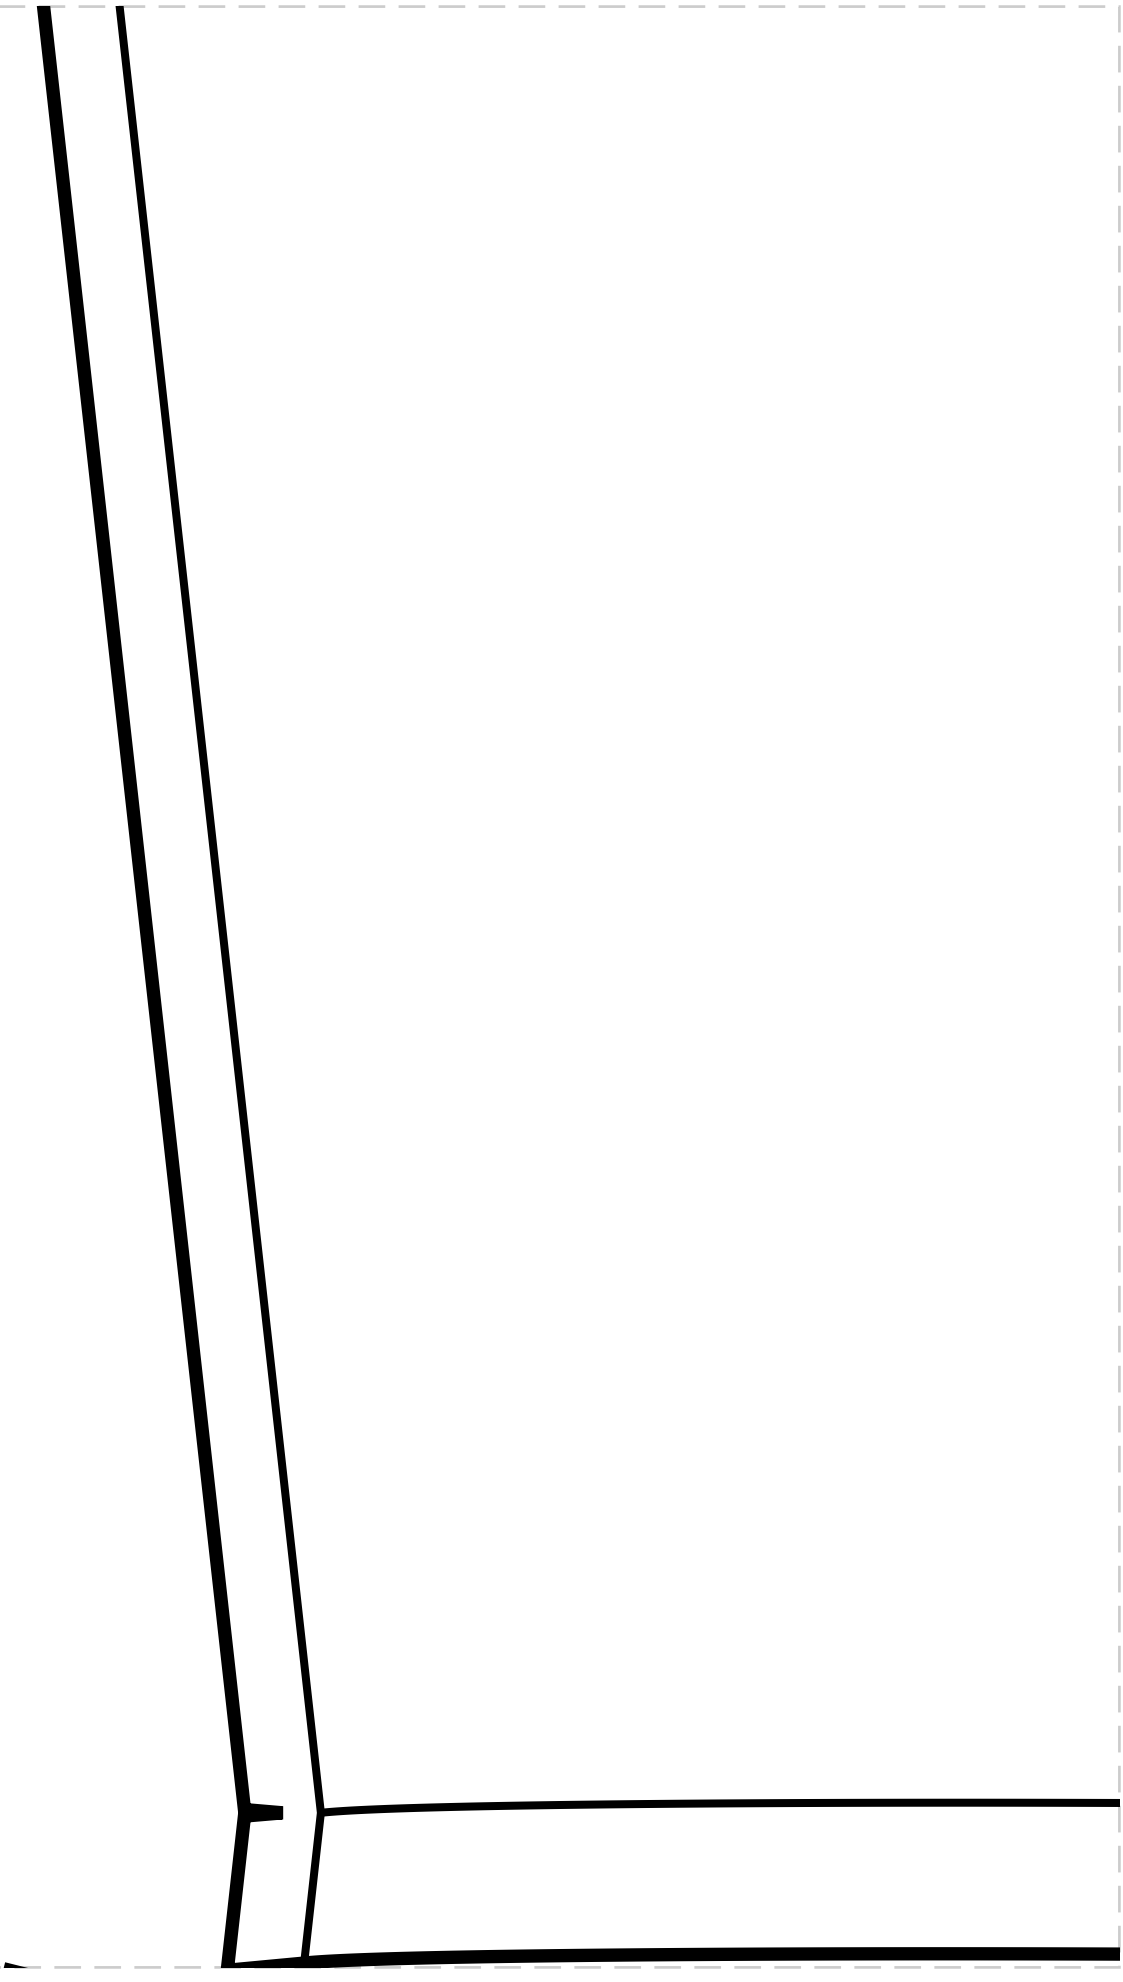

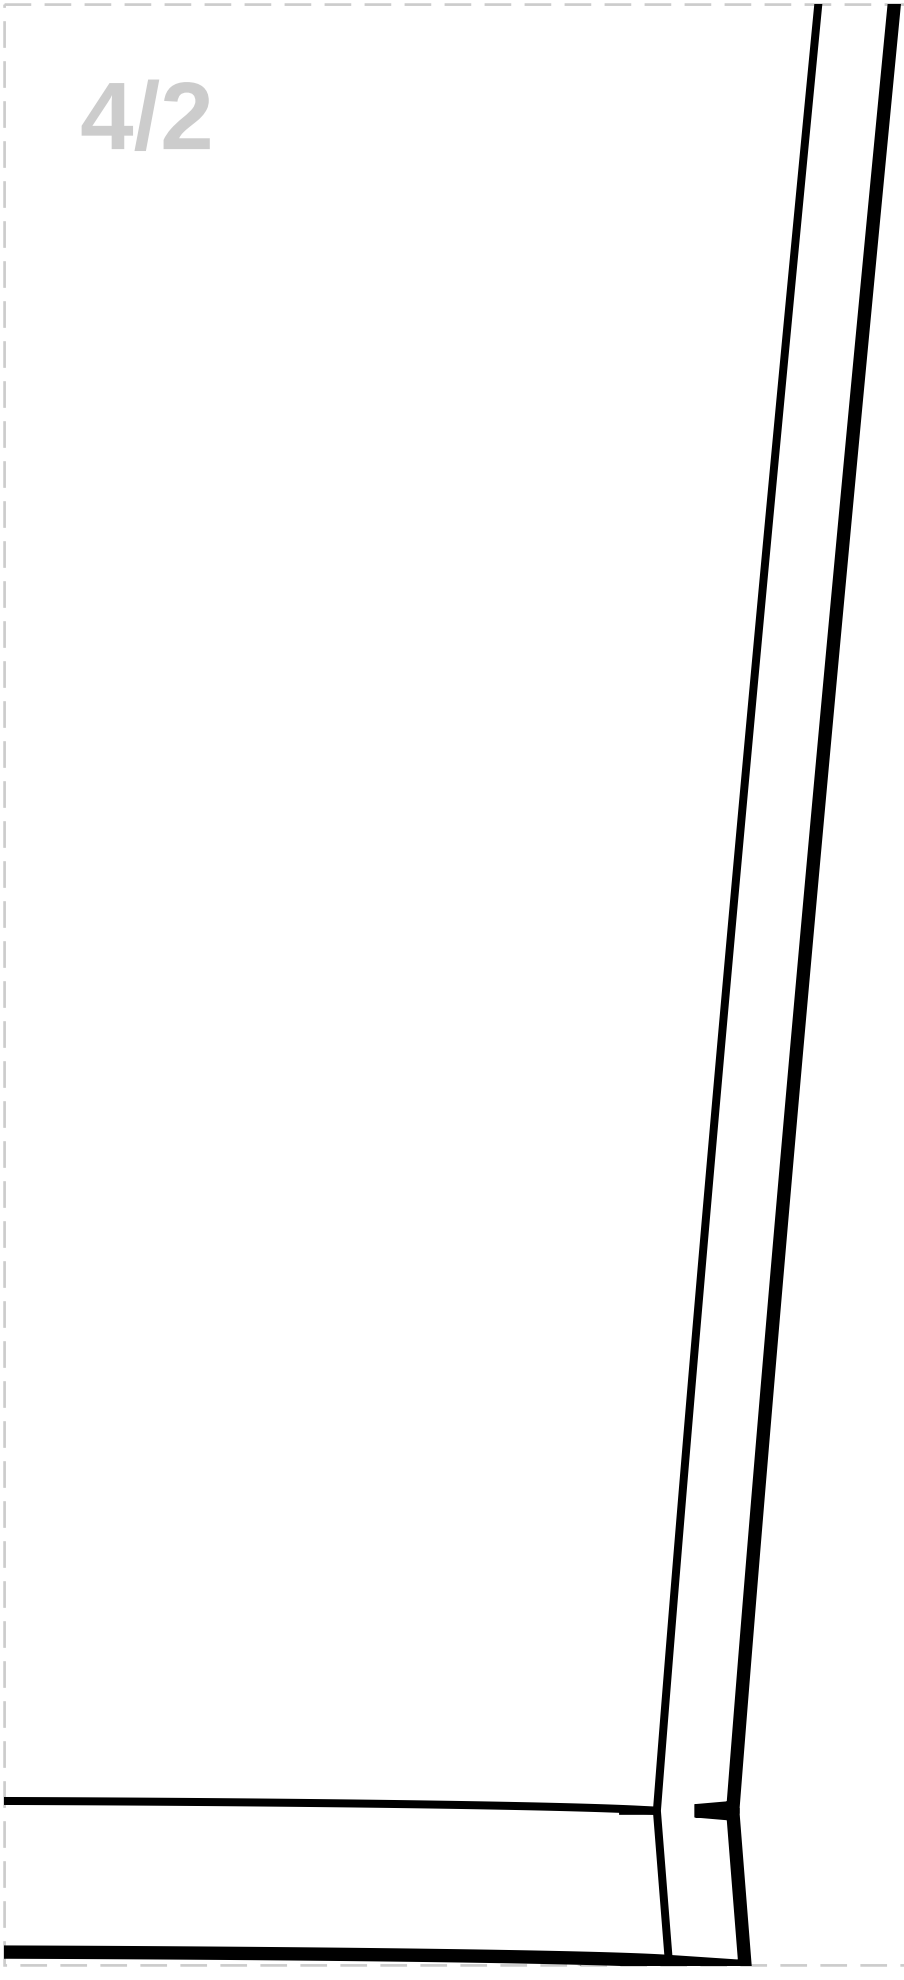


4/3

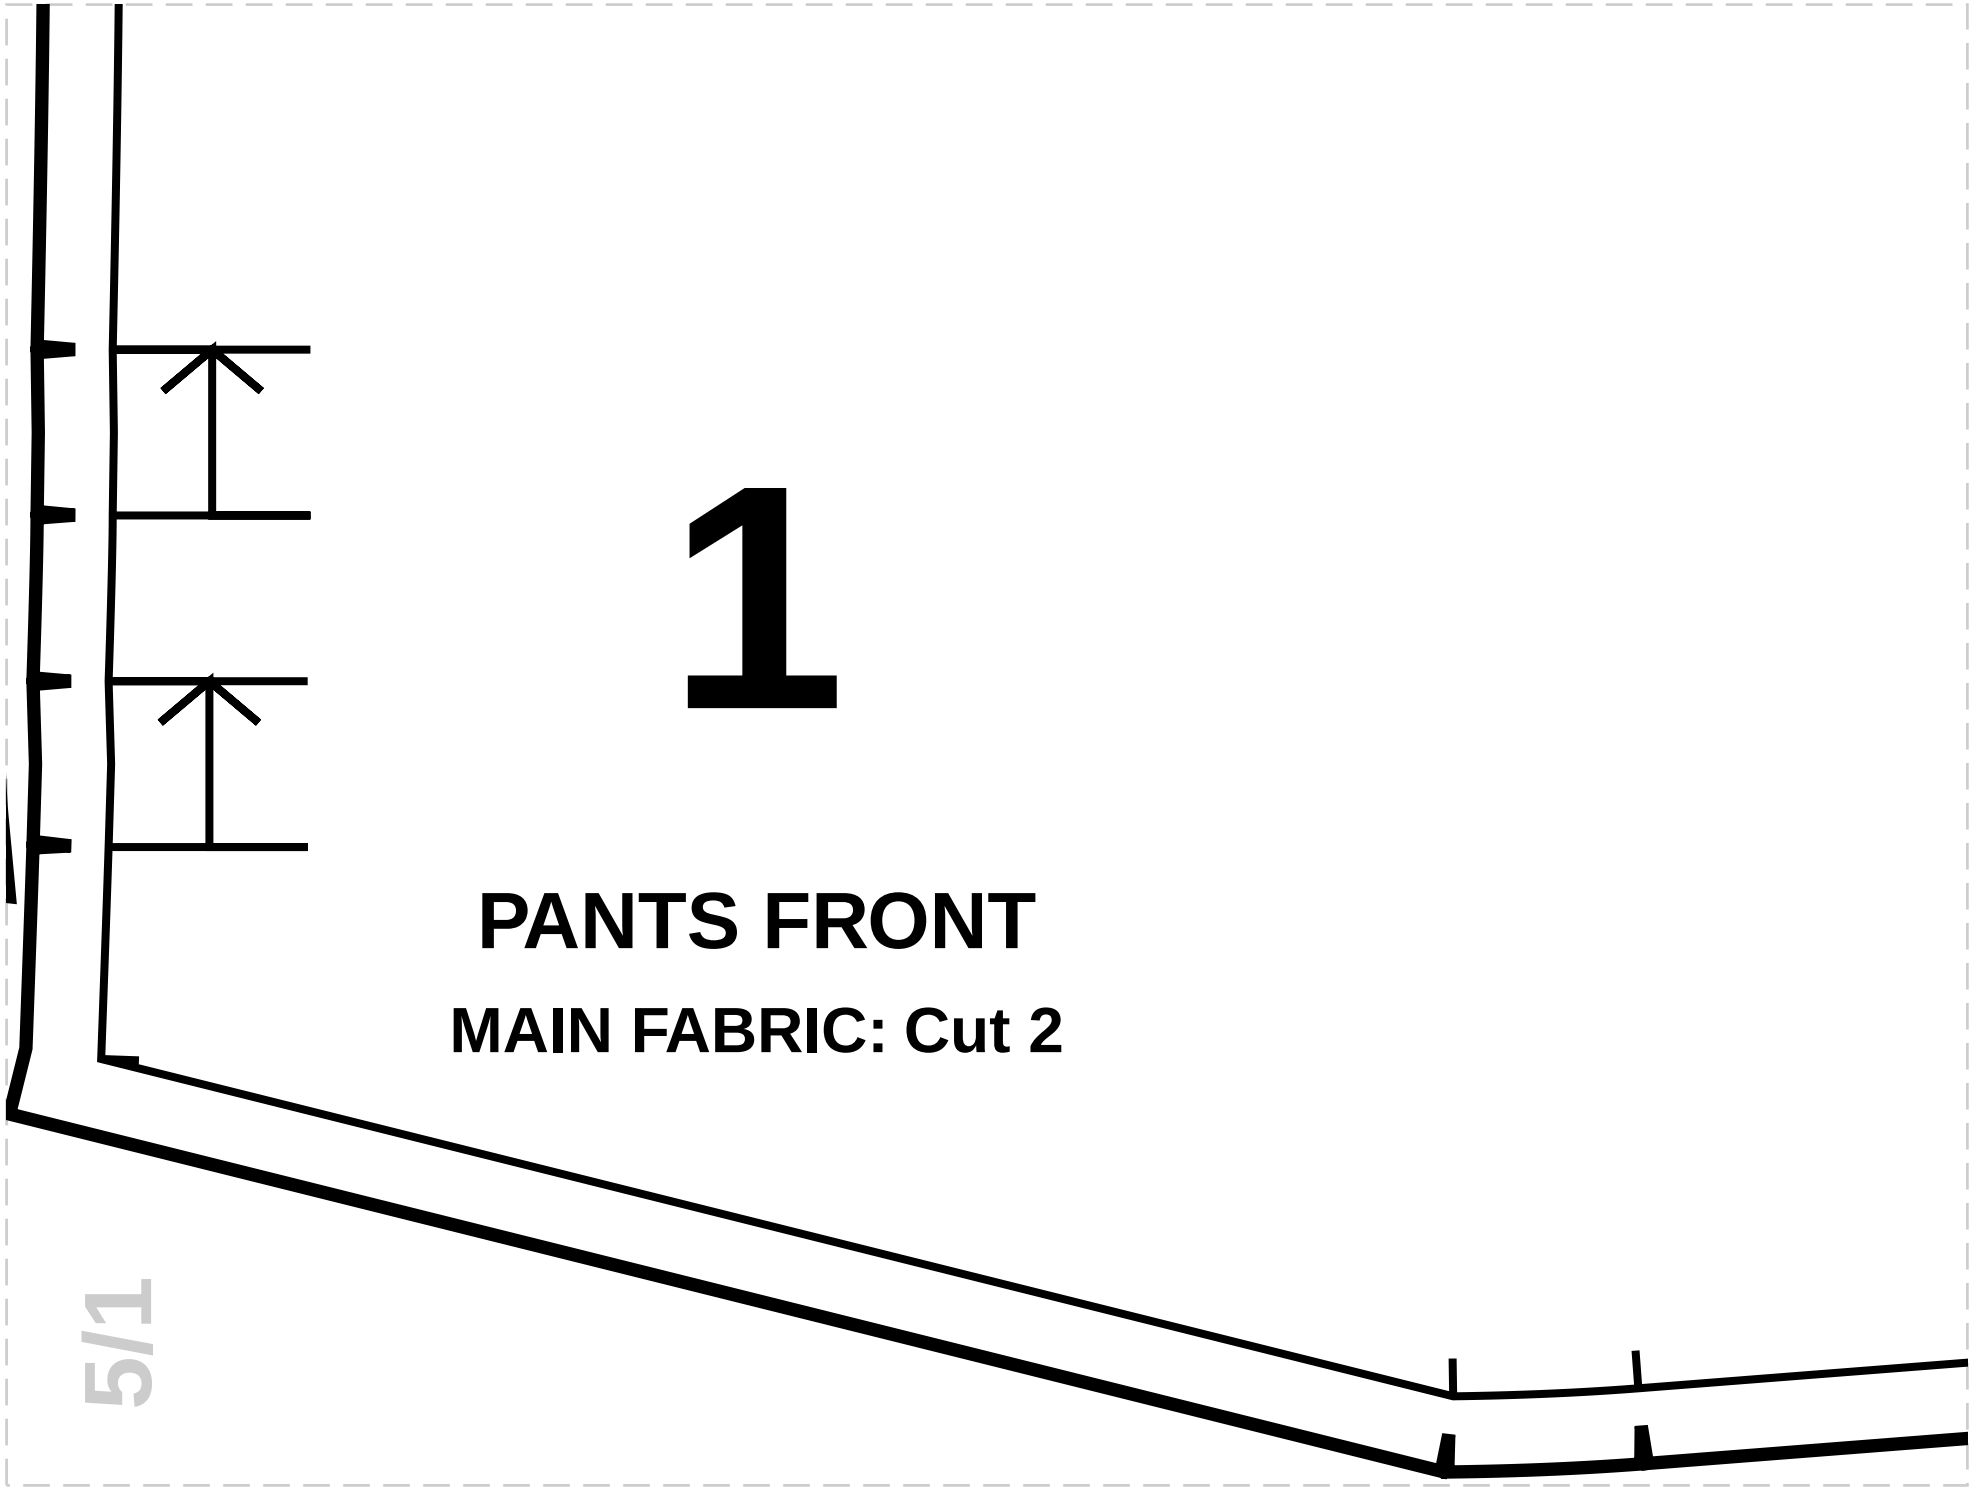
1
PANTS FRONT
MAIN FABRIC: Cut 2
5/1

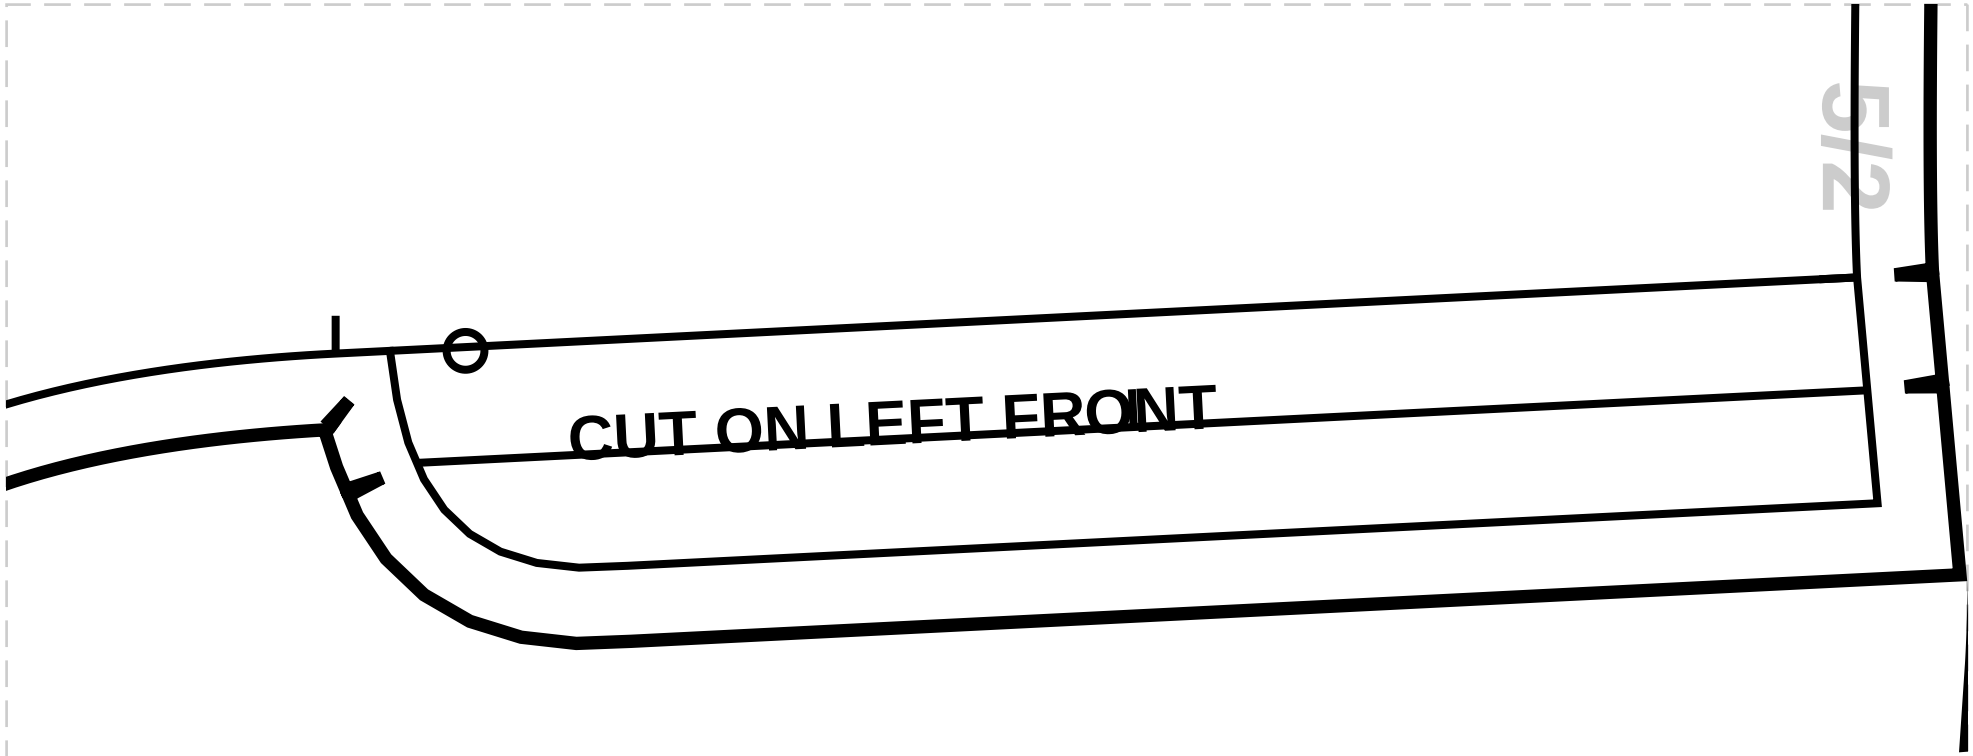

5/2
CUT ON LEFT FRONT

5/3

5/4

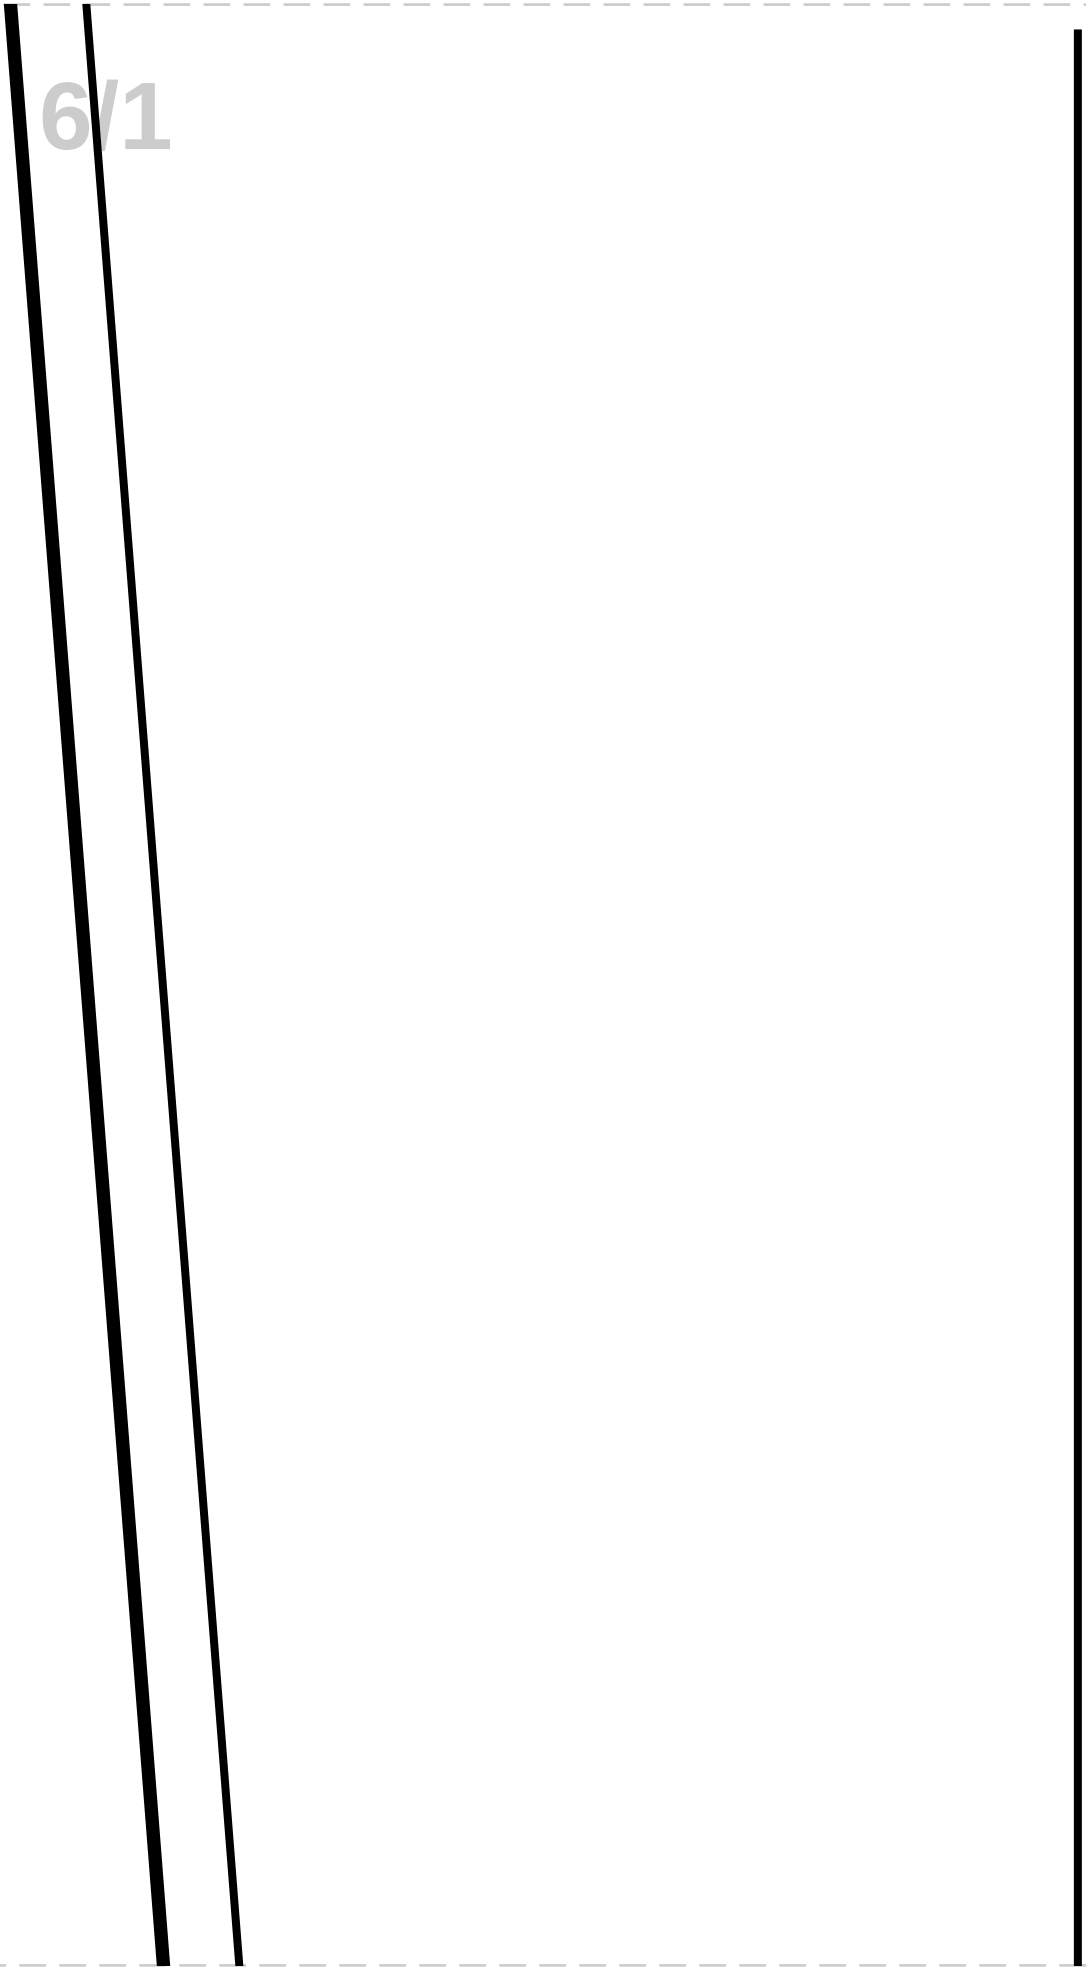


6/2

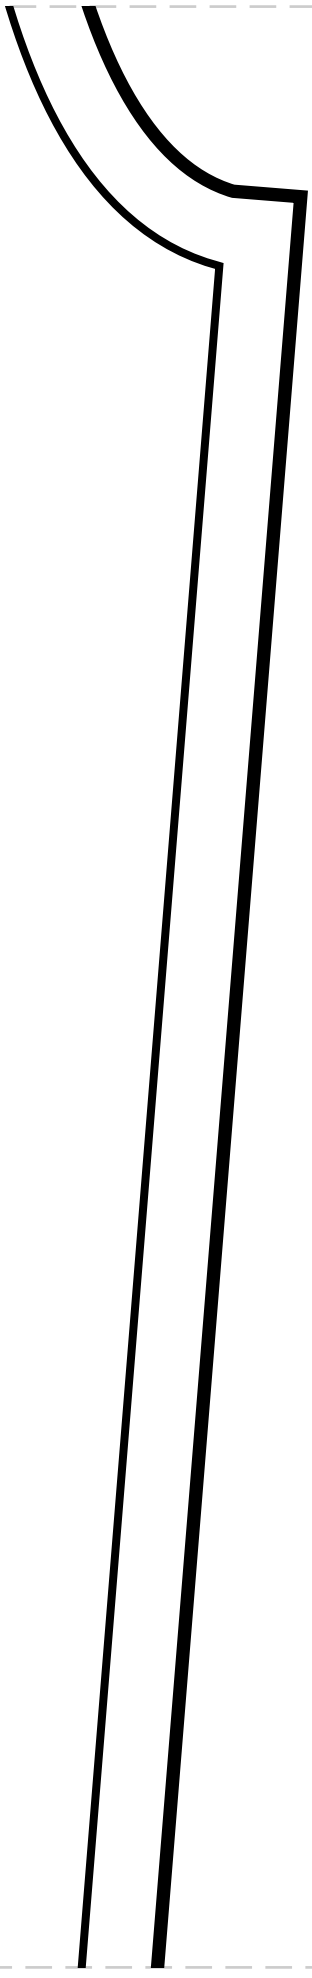


6/3

6/4

6/5

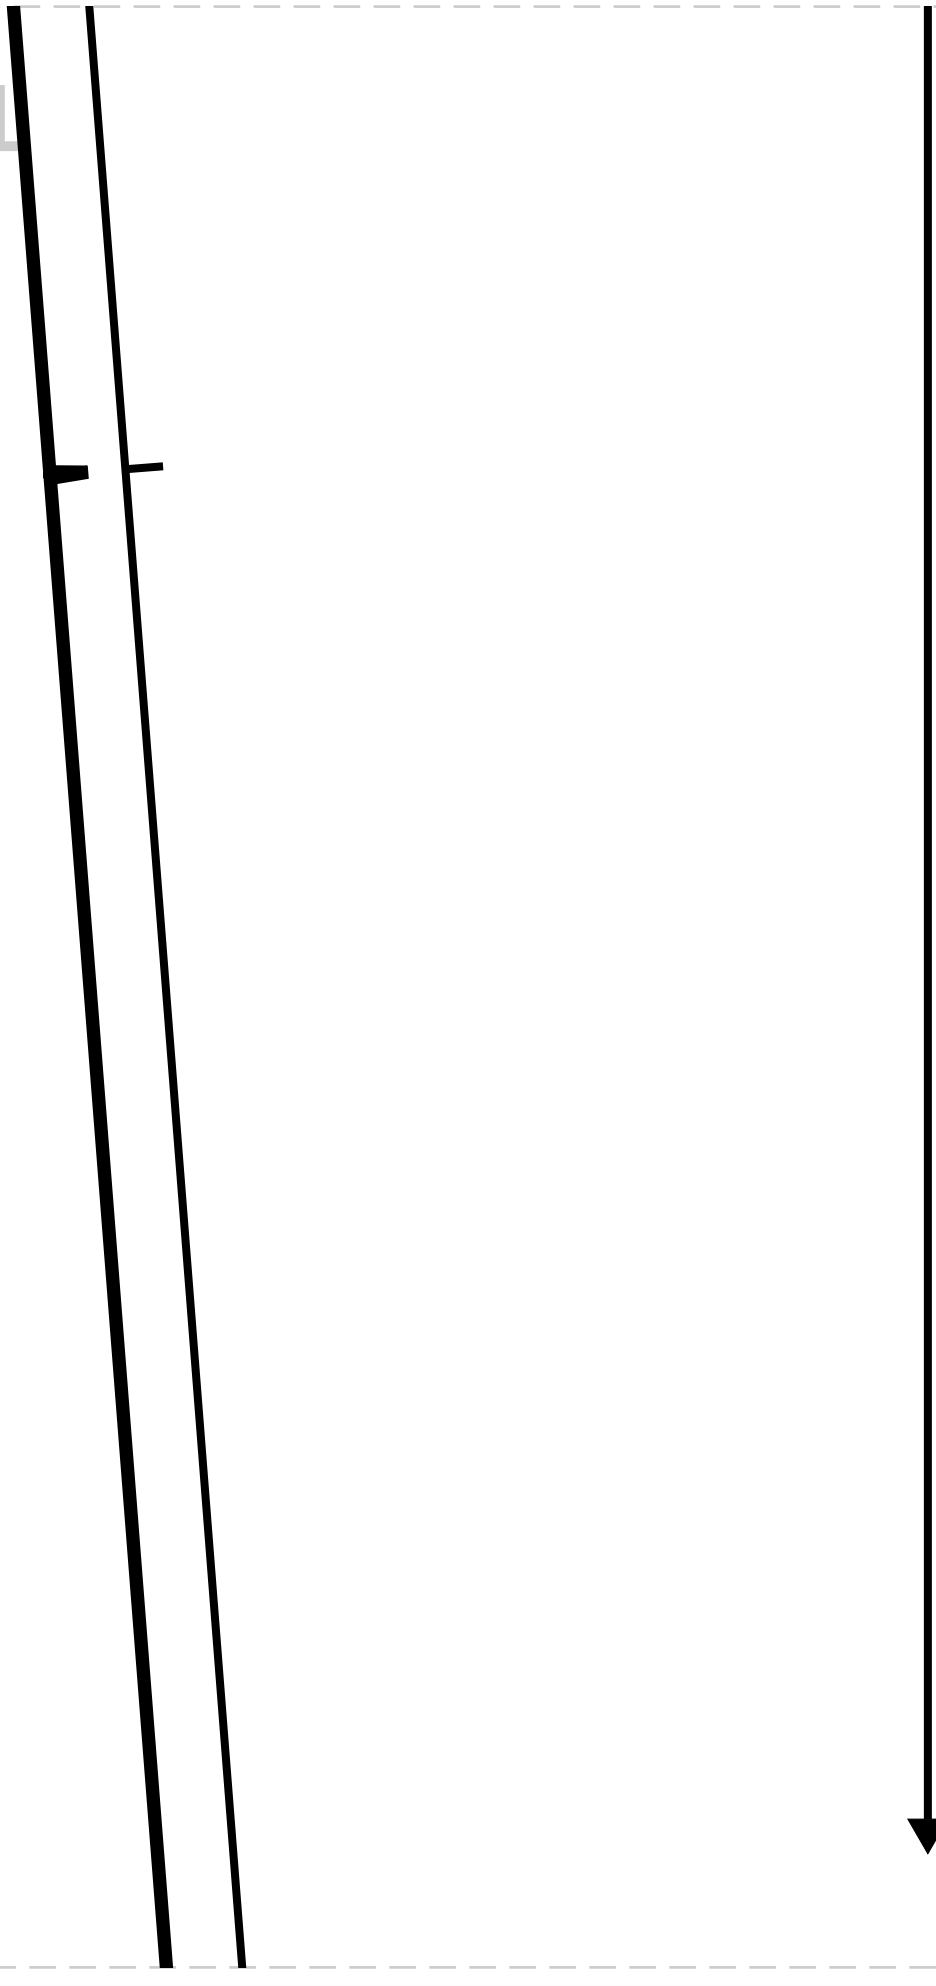


7/2

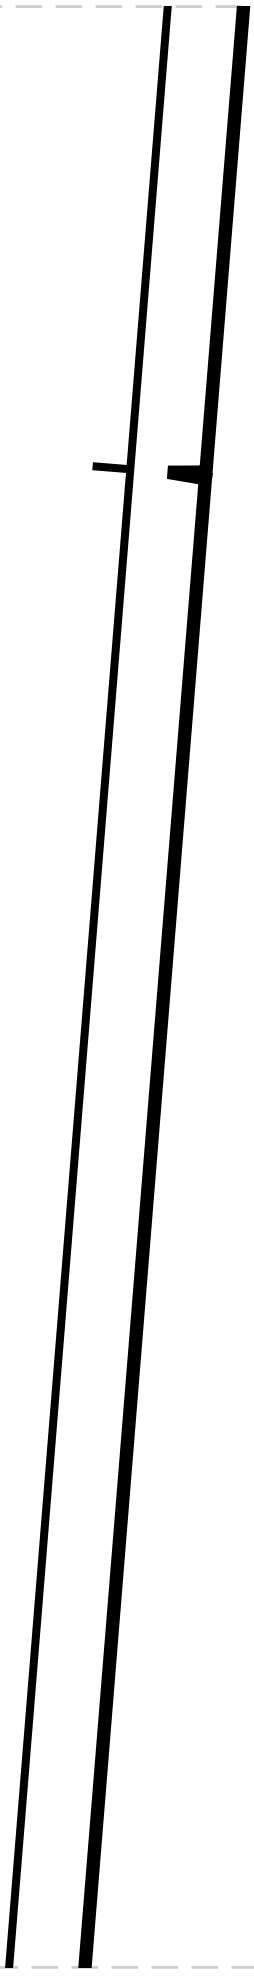


7/3

7/5

8/1

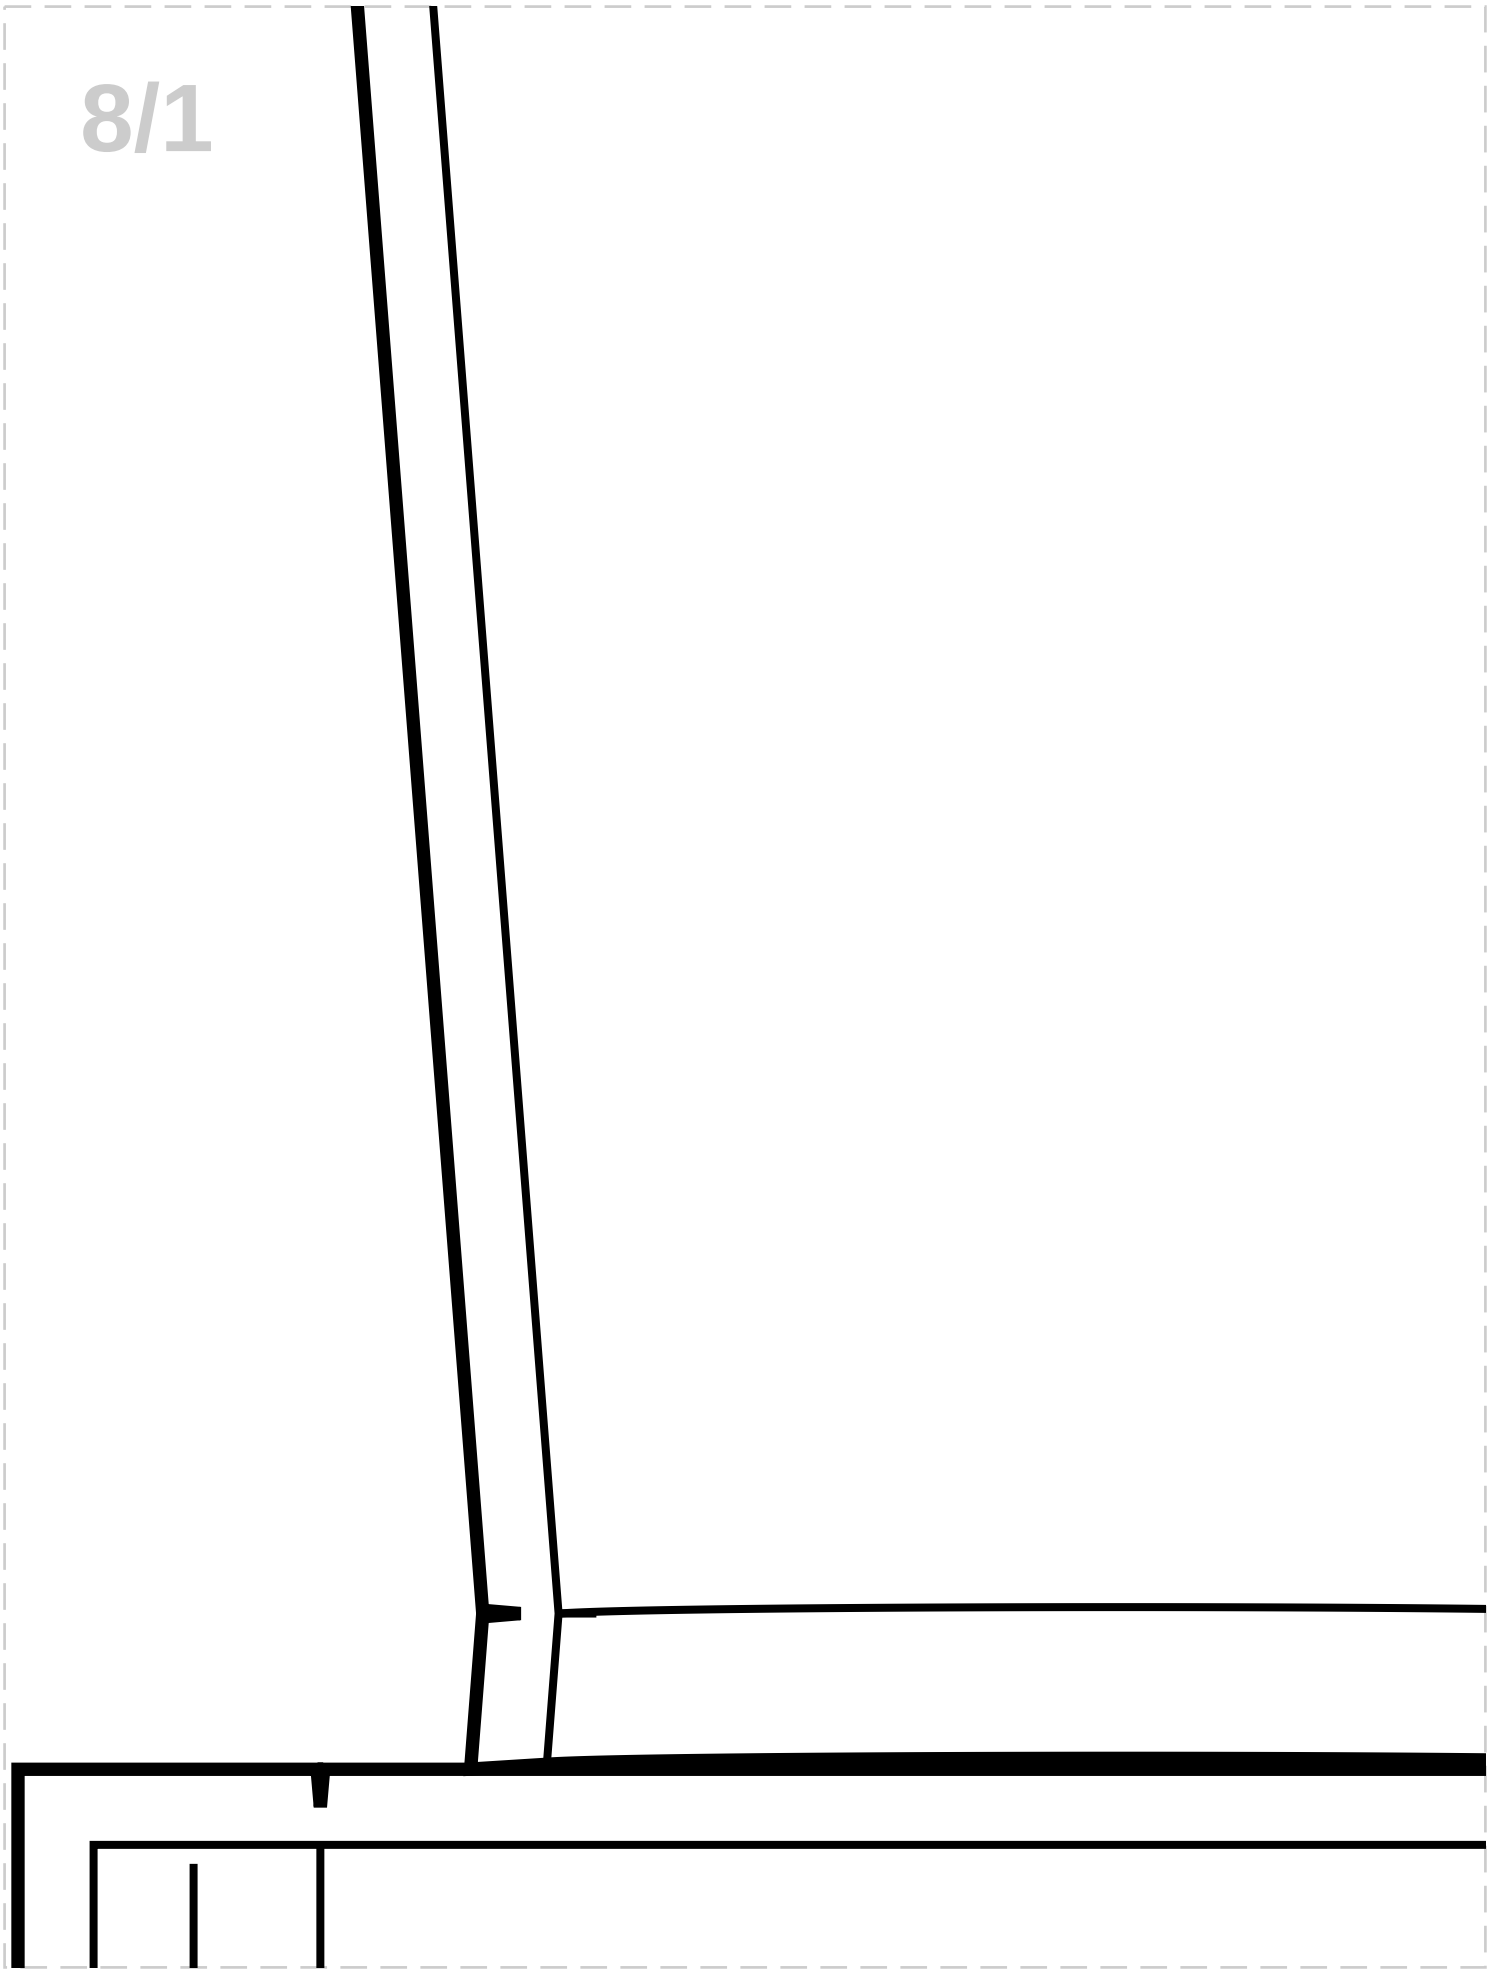

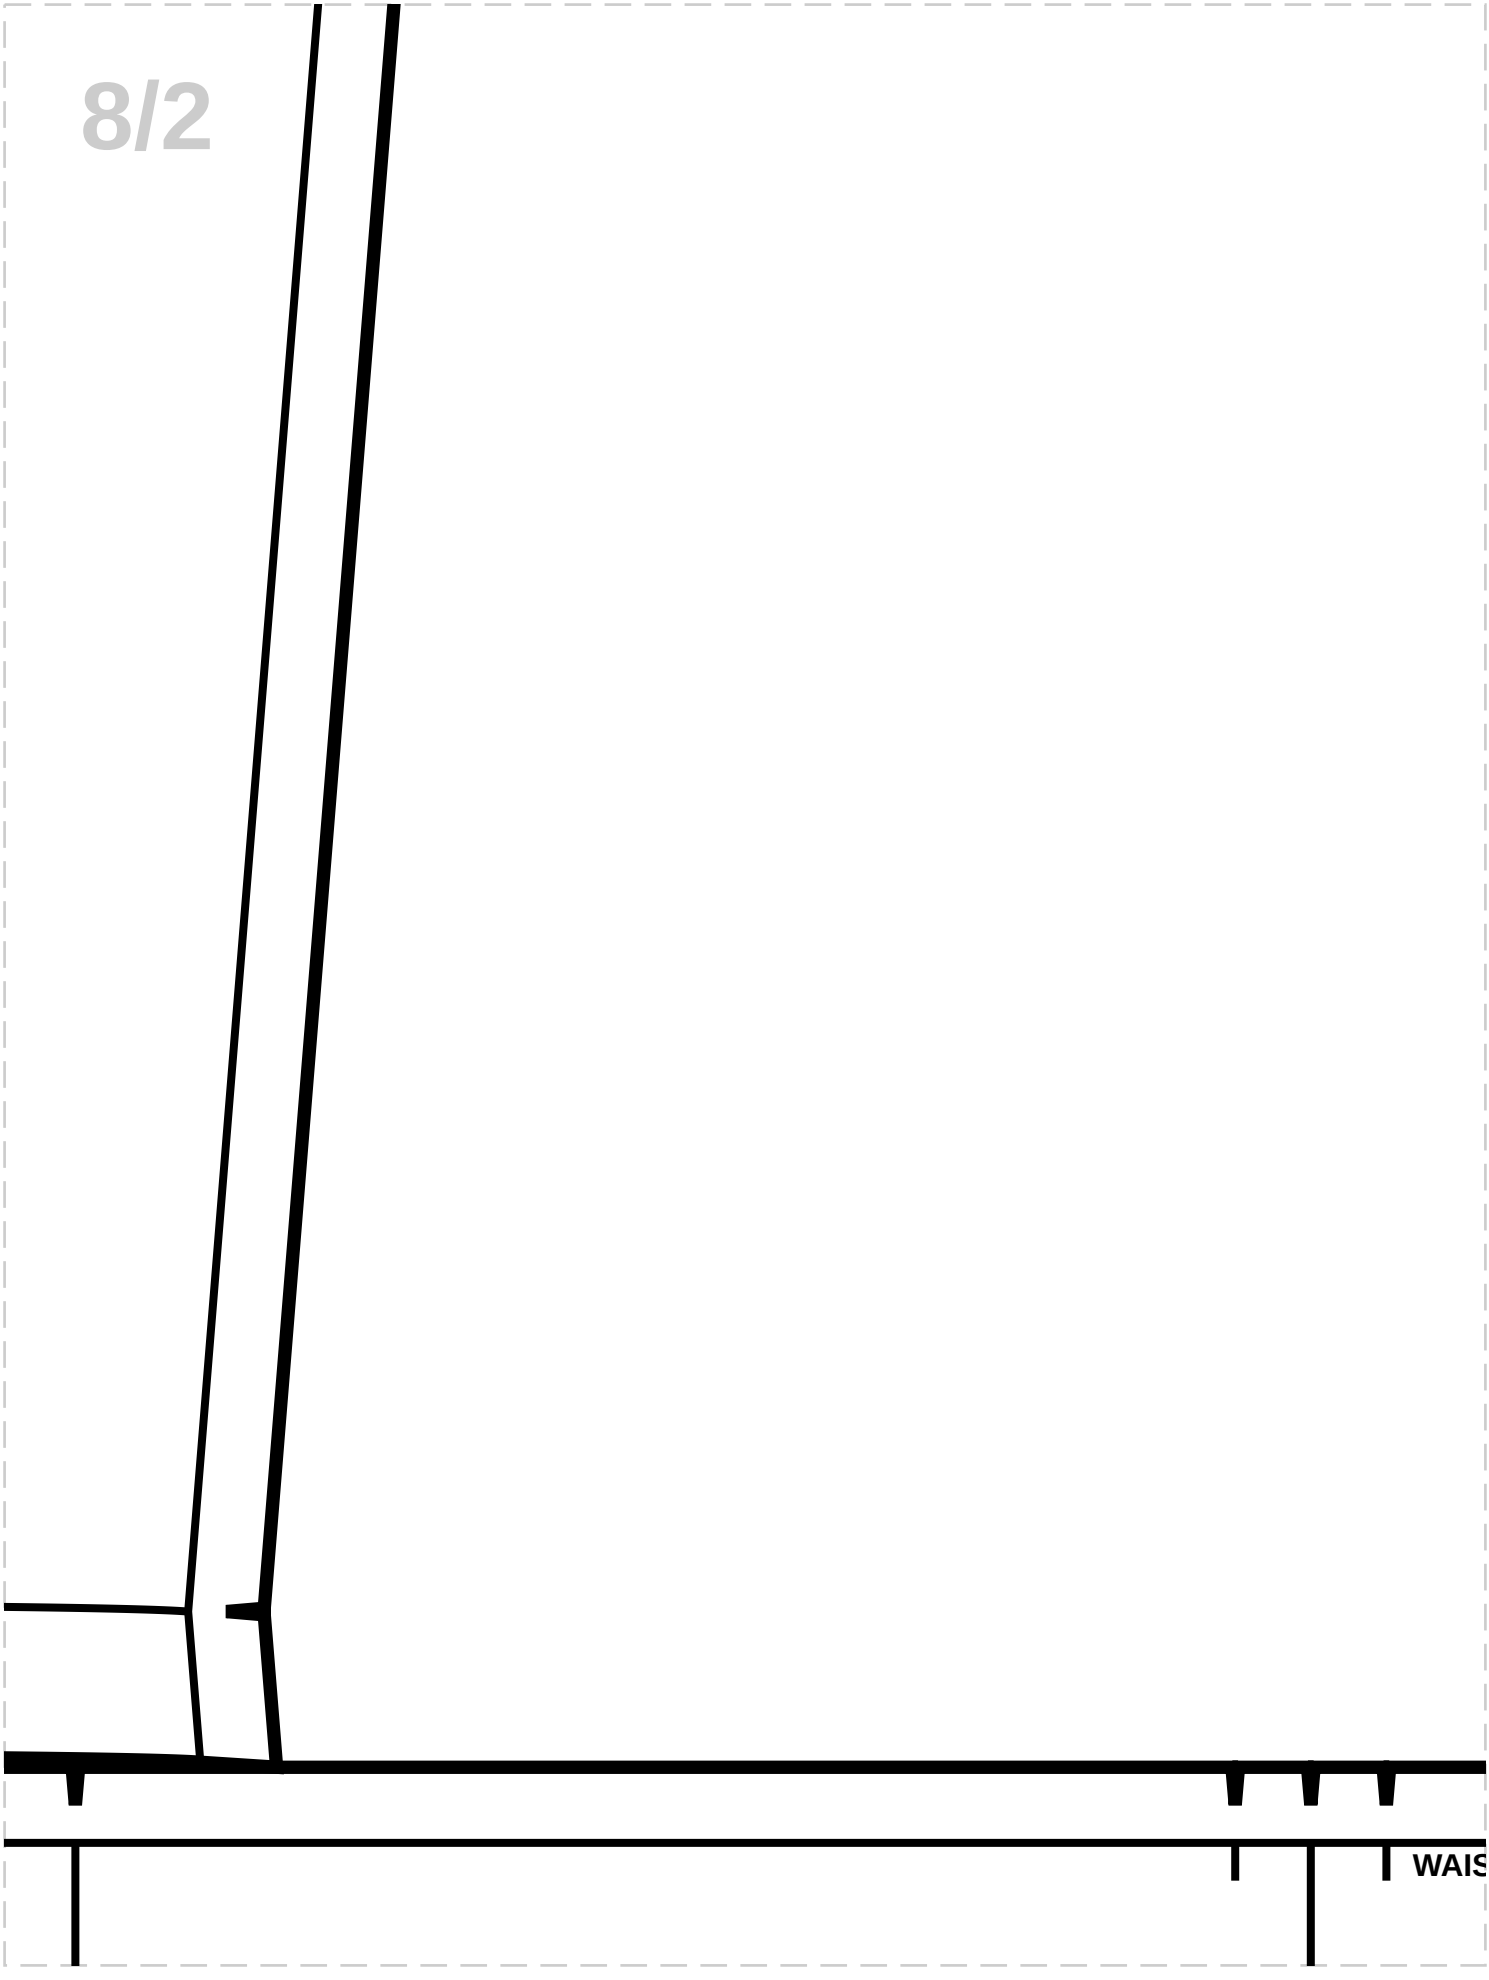
WAIS


8/3


STLINE


8/4




8/5

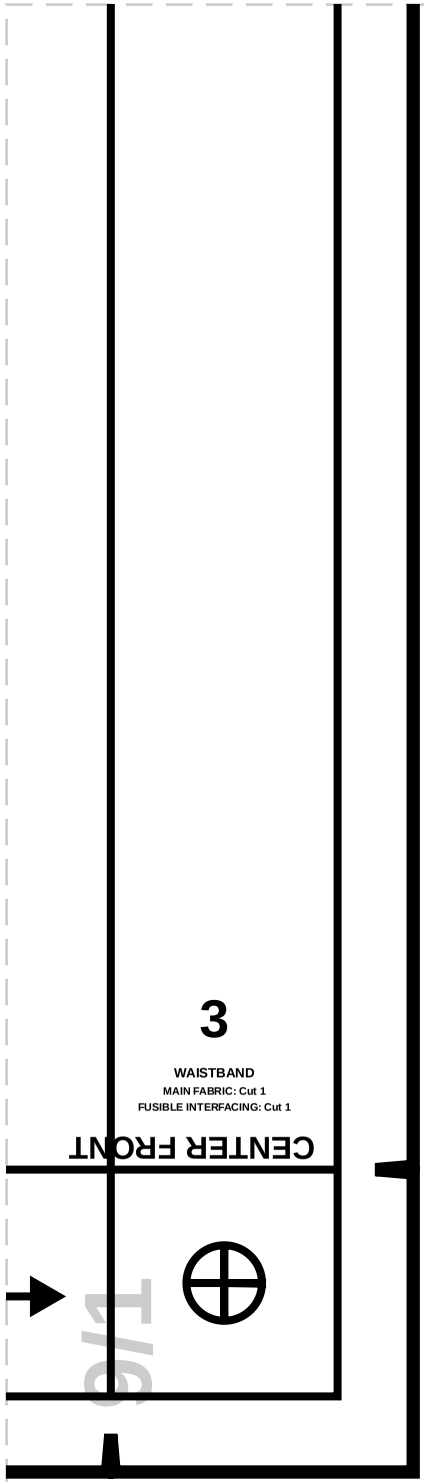
3
WAISTBAND
MAIN FABRIC: Cut 1
FUSIBLE INTERFACING: Cut 1
CENTER FRONT
T/6

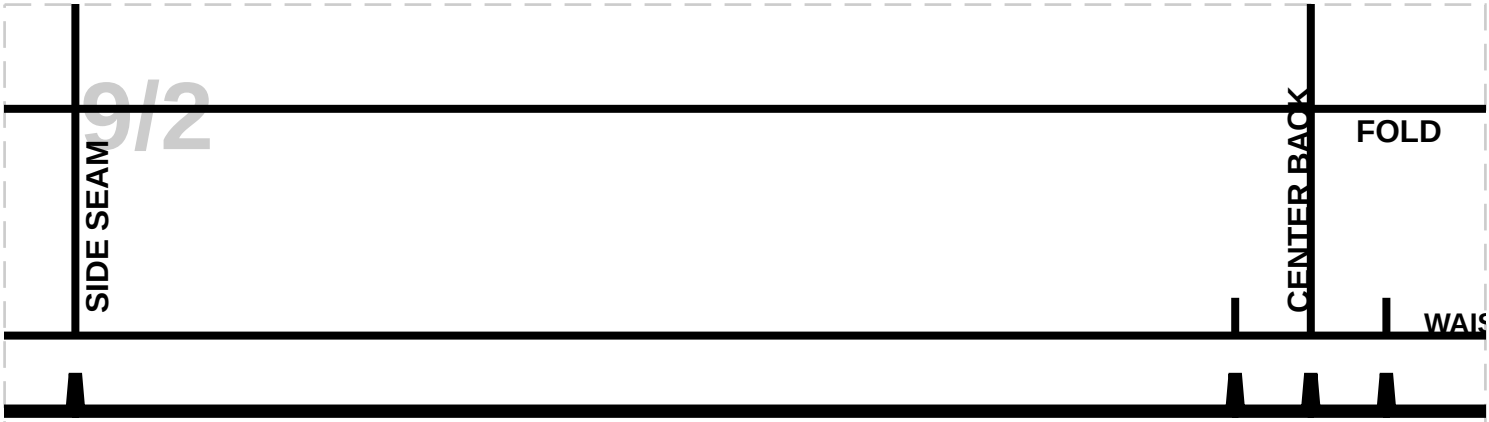
9/2
SIDE SEAM
CENTER BACK
FOLD
WAIS

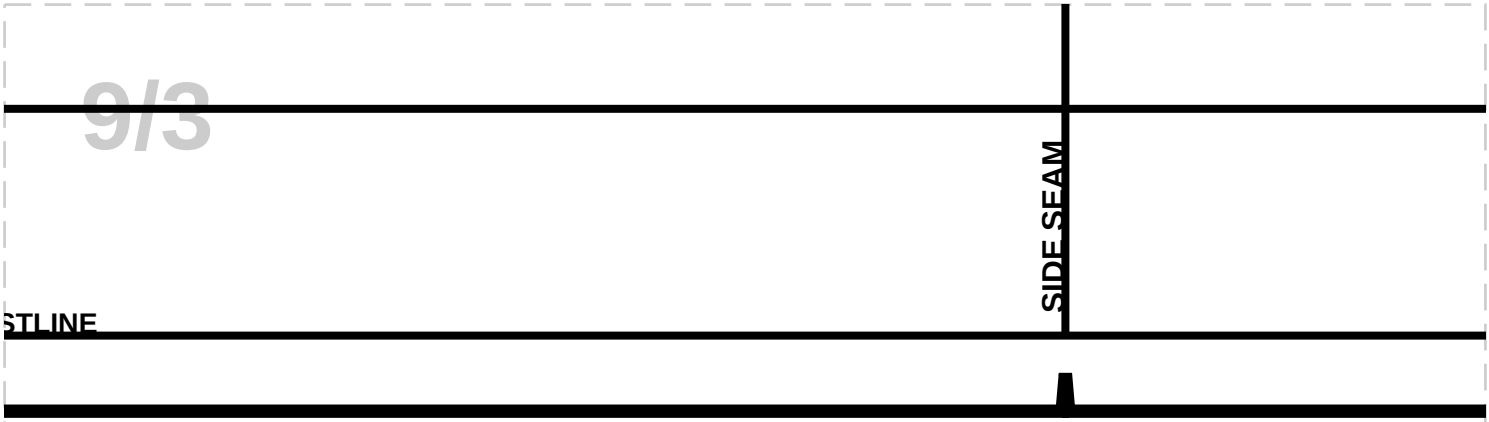
SIDE SEAM
STLINE

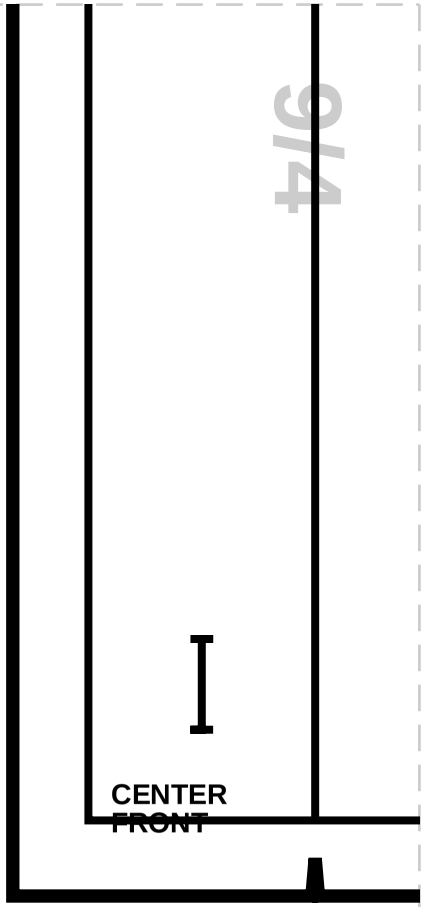
9/4
CENTER
FRONT

9/5