
cozysewpatterns

Print this Calibration Test page first!

Size: Height: 167.75, Bust: 87.75, Waist: 71.25, Hips: 95.25
SIZE 4

Notes

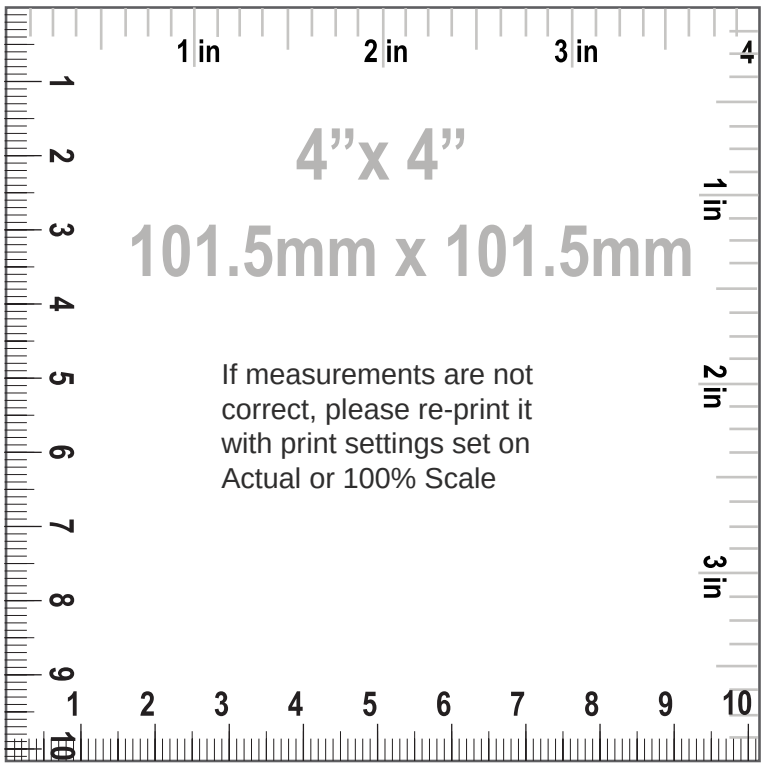

How to print

Printing

Once your Calibration Test Page has been printed, measure the 4”x 4” (10cm) scale box with a ruler. If the lengths match, you can confidently print your pattern. If the rulers do not match, set your print settings to 100% or Actual and retry.

Cutting

Your printouts will always have a dashed border to perfectly match your sheets. Cut off the right edge of each page. Be careful not to cut beyond the dashed mark, otherwise your patterns will not align accurately.

Tapping

Group each sheet by the second number marked on each pate i.e. in a group 1, there are: 1/1, 2/1, 3/1, 4/1, etc. In a group 2: 1/2, 2/2 etc. 2. Place page 1/1 on top of the page 2/1, overlapping the right side edge. Match corners and crosses and secure with a pin or tape. Then use a scotch tape to permanently attach the sheets together.

SIZE 4
Seam Allowance: 1 (3/8 in)

Pattern pieces:

1. "RIGHT CENTER FRONT", MAIN FABRIC: Cut 1
2. "LEFT CENTER FRONT", MAIN FABRIC: Cut 1
3. "SIDE FRONT", MAIN FABRIC: Cut 2
4. "CENTER BACK", MAIN FABRIC: Cut 2
5. "SIDE BACK", MAIN FABRIC: Cut 2
6. "LEFT FRONT BUTTON FACING", MAIN FABRIC, FUSIBLE INTERFACING: Cut 1
7. "FRONT NECK FACING", MAIN FABRIC, FUSIBLE INTERFACING: Cut 2
8. "FRONT ARMHOLE FACING", MAIN FABRIC, FUSIBLE INTERFACING: Cut 2
9. "BACK NECK FACING", MAIN FABRIC, FUSIBLE INTERFACING: Cut 2
10. "BACK ARMHOLE FACING", MAIN FABRIC, FUSIBLE INTERFACING: Cut 2
11. "RIGHT FRONT PLACKET", MAIN FABRIC, FUSIBLE INTERFACING: Cut 1


Pattern Specs (Circumferences are divided by 2):


1. Hem max 3.00 none (1 1/8 in)
2. Seam allowance max 2.00 none (3/4 in)
3. Seam allowance p max 1.50 none (5/8 in)
4. Stretch factor 1.00 none (3/8 in)
5. Stretch factor horizontal 1.00 none (3/8 in)
6. Stretch factor vertical 1.00 none (3/8 in)
7. Front neck drop 16.59 cm (6 1/2 in)
8. Back invisible zipper length 18.00 cm (7 1/8 in)
9. Button diameter 1.00 cm (3/8 in)
10. Front buttons quantity 12.00 pc
11. Front length from HPS to hem 100.73 cm (39 5/8 in)
12. Across chest 46.62 cm (18 3/8 in)
13. Center front length to hem 86.68 cm (34 1/8 in)
14. Center back length to hem 98.74 cm (38 7/8 in)
15. Across front 32.29 cm (12 3/4 in)
16. Across back 34.16 cm (13 1/2 in)

17. Across shoulders 38.09 cm (15 in)
18. Side seam 77.50 cm (30 1/2 in)
19. Waist 39.12 cm (15 3/8 in)
20. Low hips 50.96 cm (20 1/8 in)
21. Hemline sweep 67.03 cm (26 3/8 in)
22. Armhole length front 20.04 cm (7 7/8 in)
23. Armhole length back 23.71 cm (9 3/8 in)
24. Neck opening 19.50 cm (7 5/8 in)
25. Back neck drop 5.52 cm (2 1/8 in)
26. Shoulder width 9.64 cm (3 3/4 in)
27. Neckline length 60.00 cm (23 5/8 in)
28. Placket length 86.68 cm (34 1/8 in)
29. Placket width 3.00 cm (1 1/8 in)

cozysewpatterns

Paper Size: A4;
Print Actual Size (100% Scale);

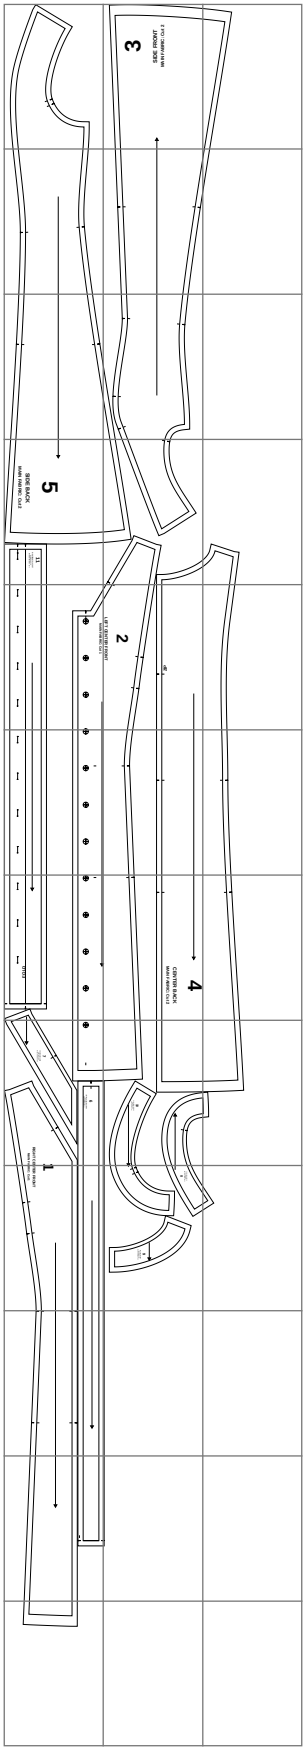


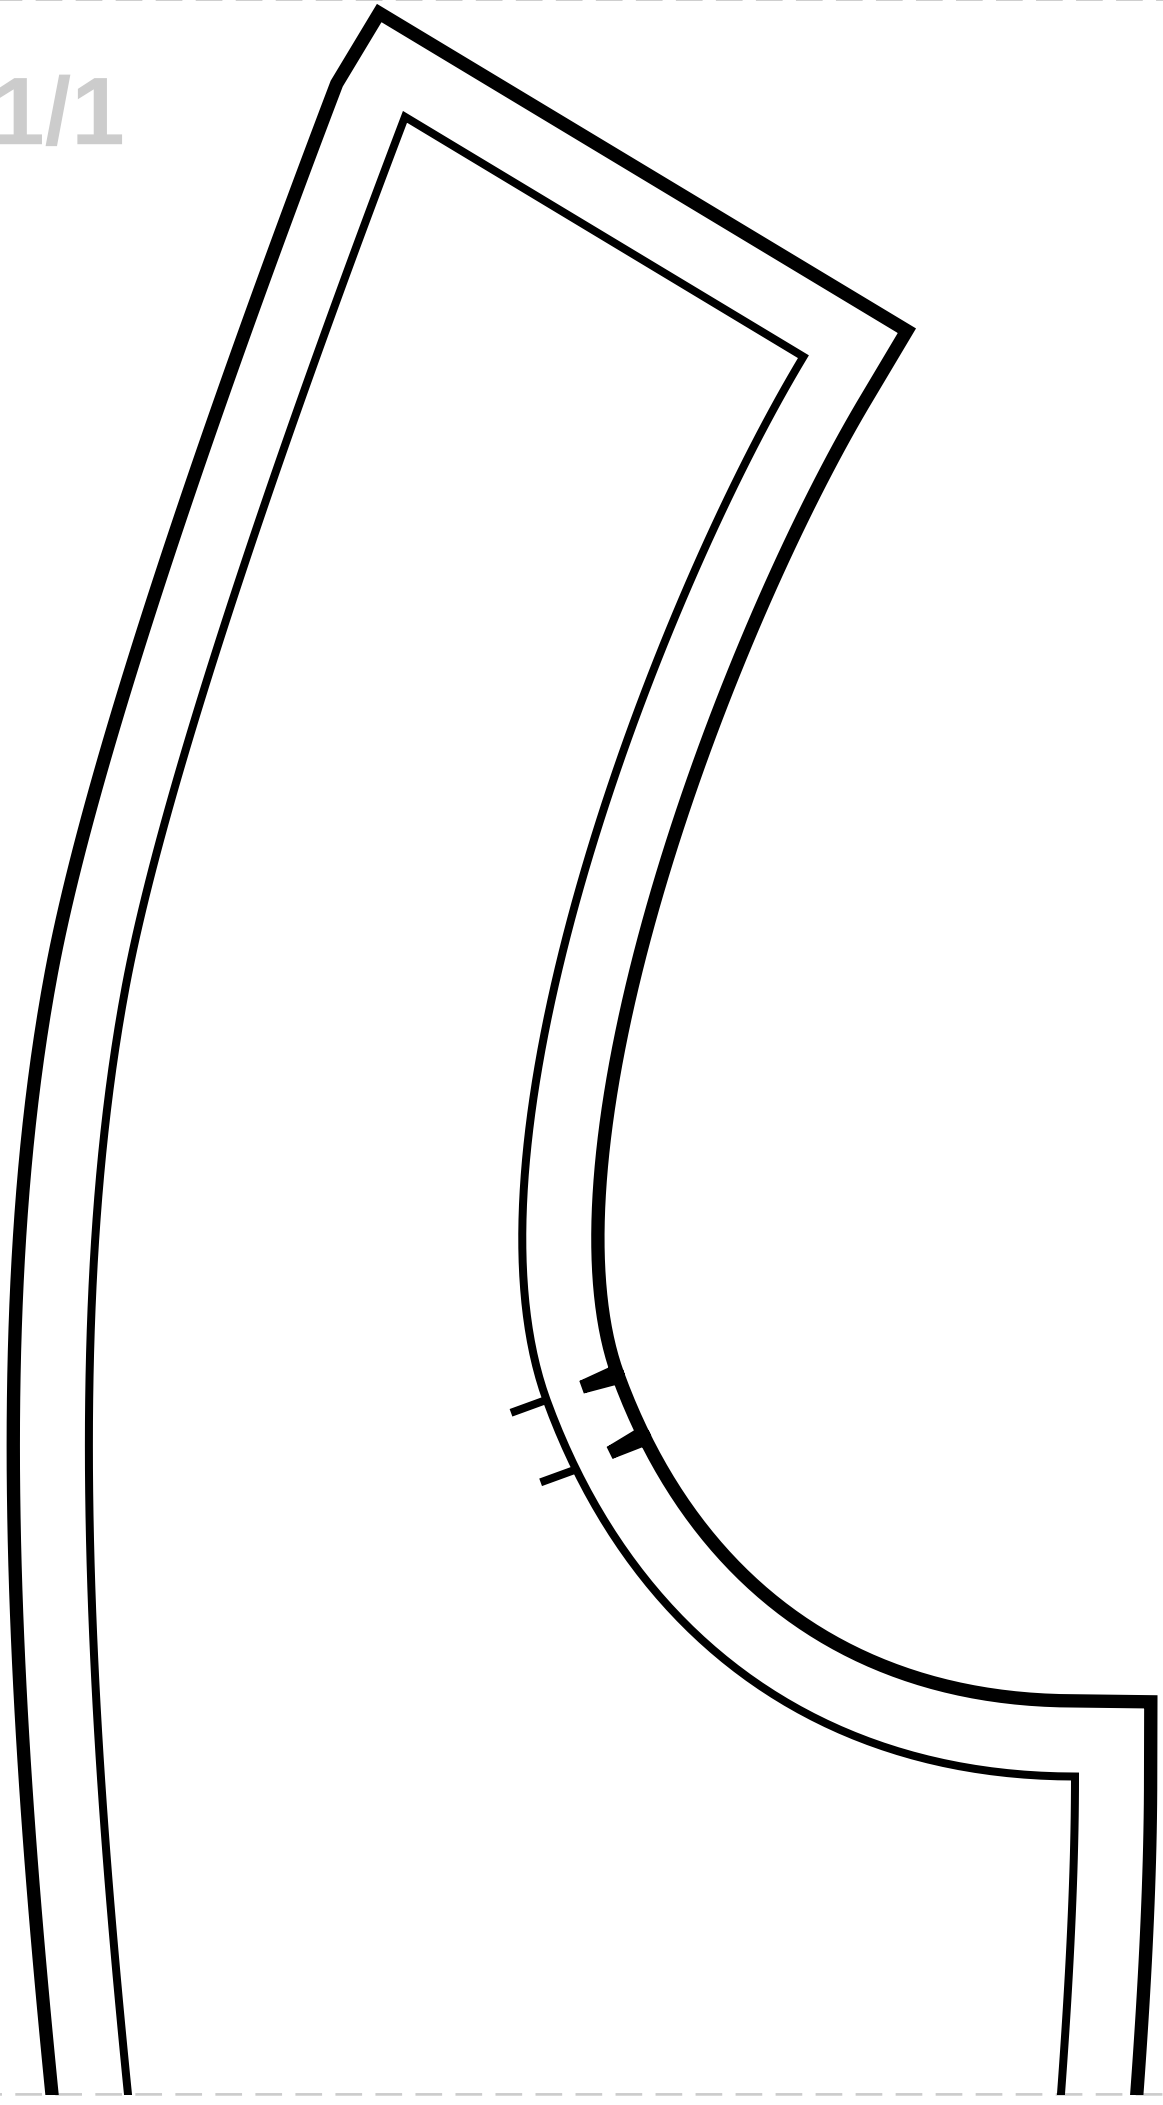



3


SIDE FRONT


MAIN FABRIC: Cut 2

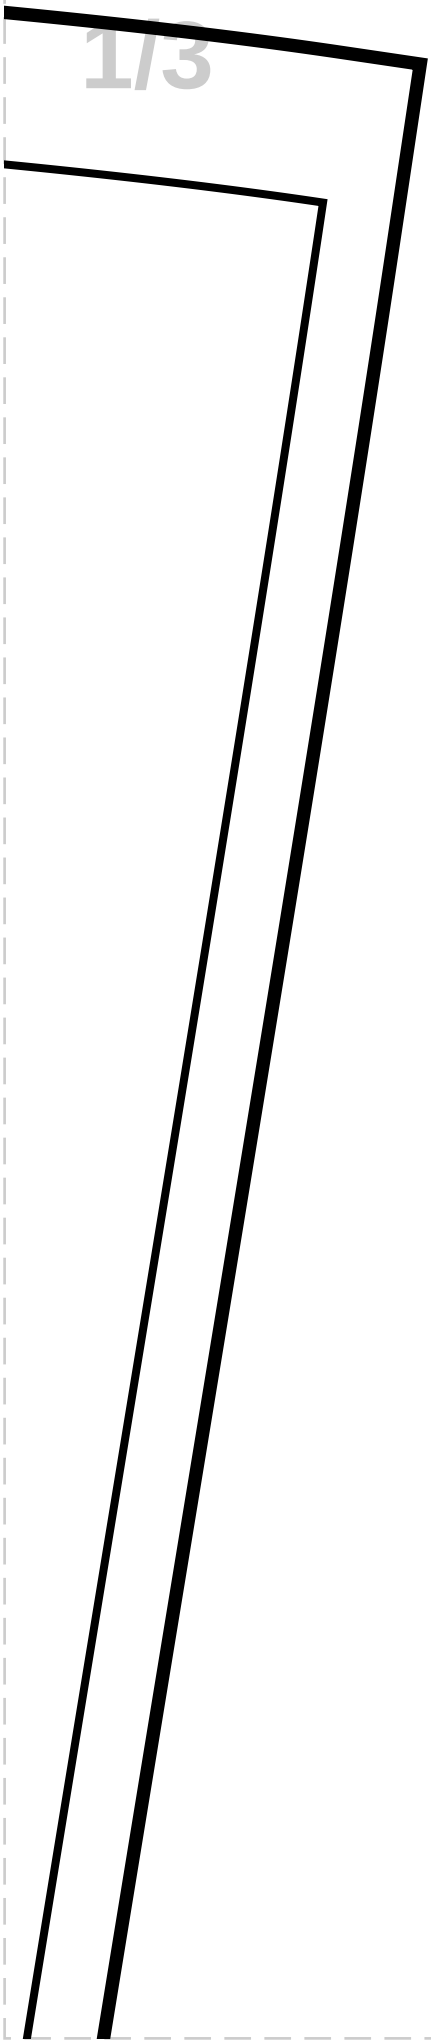


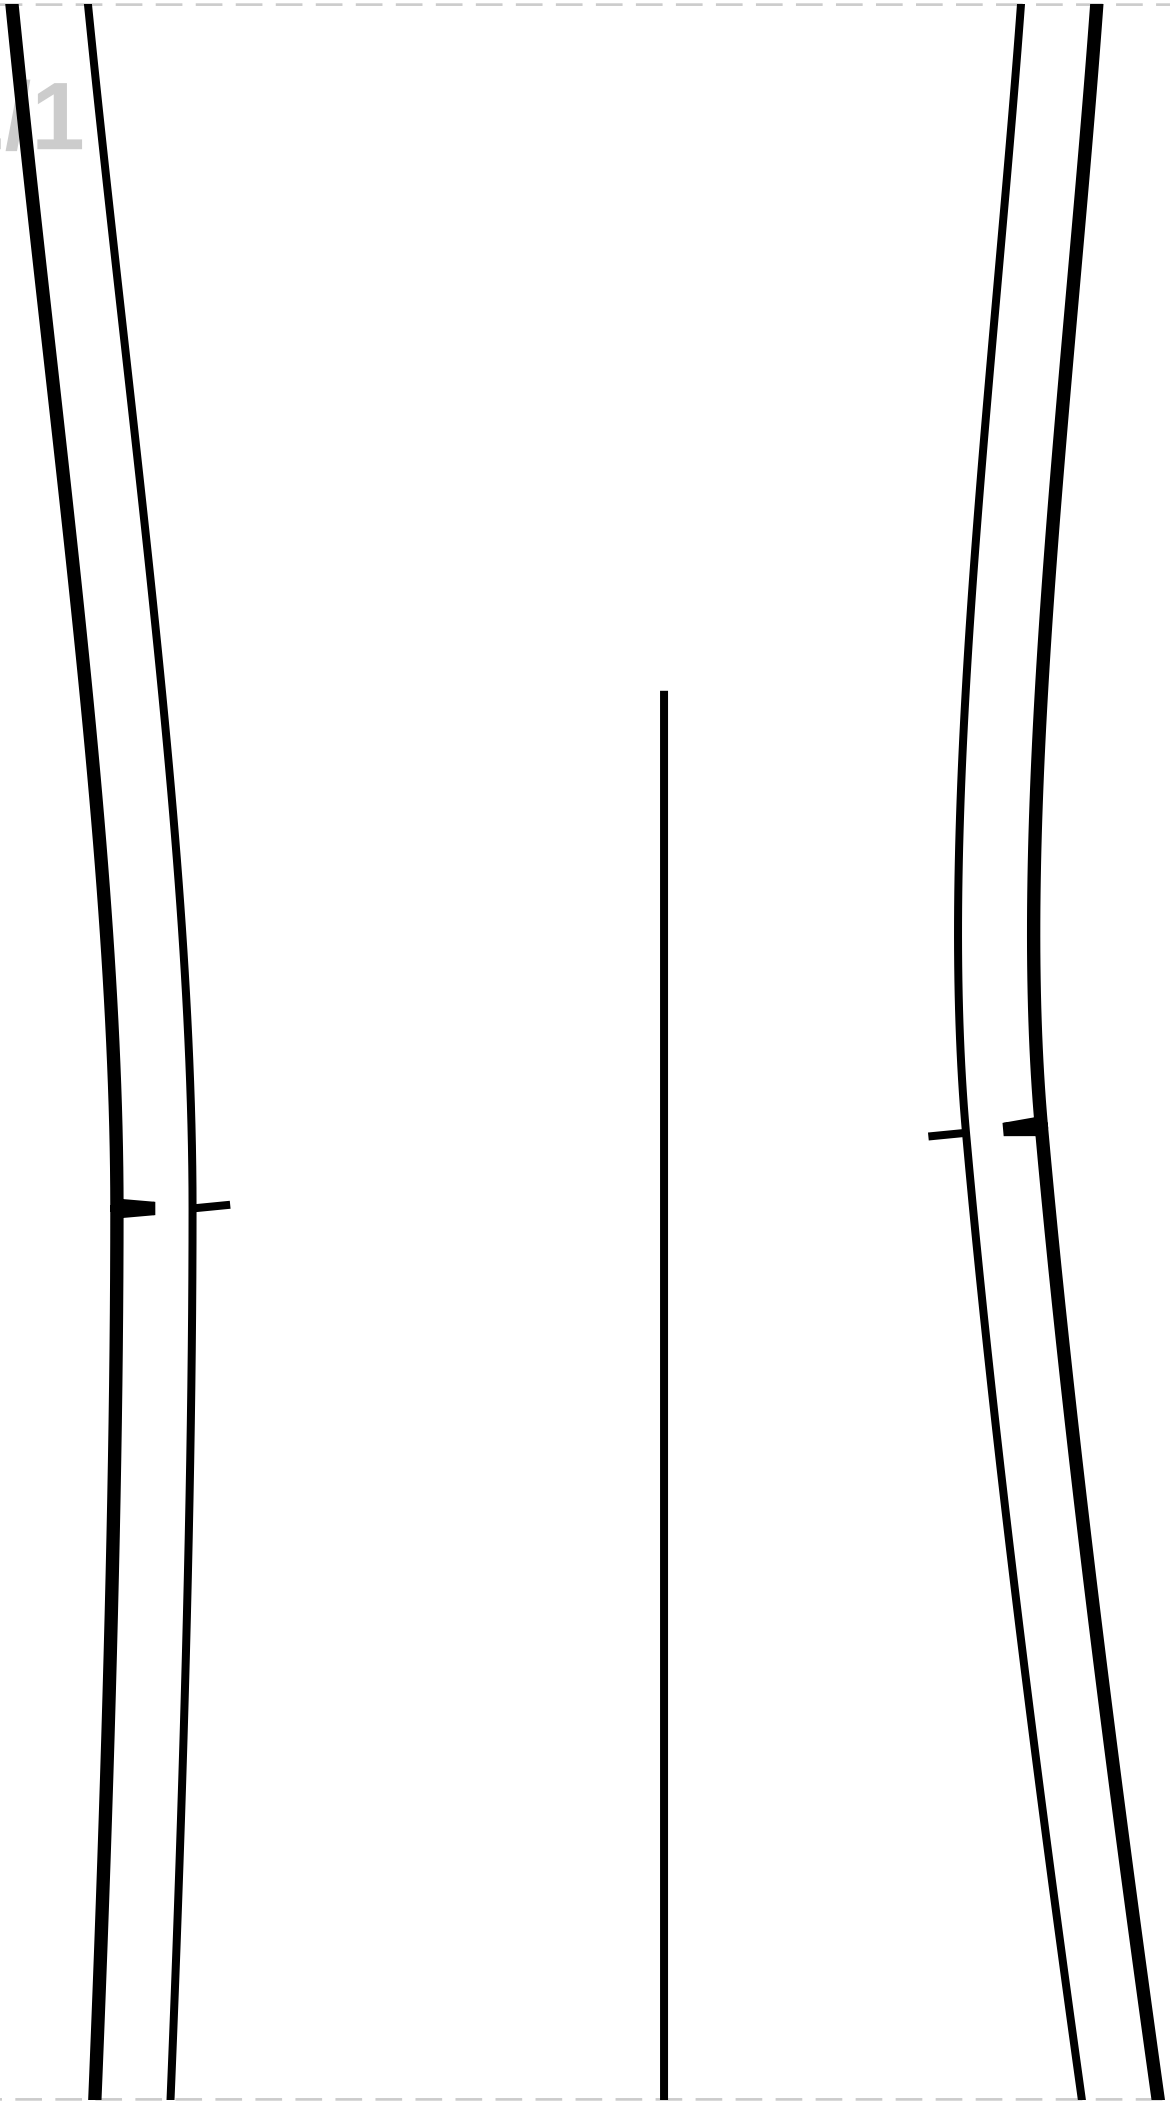


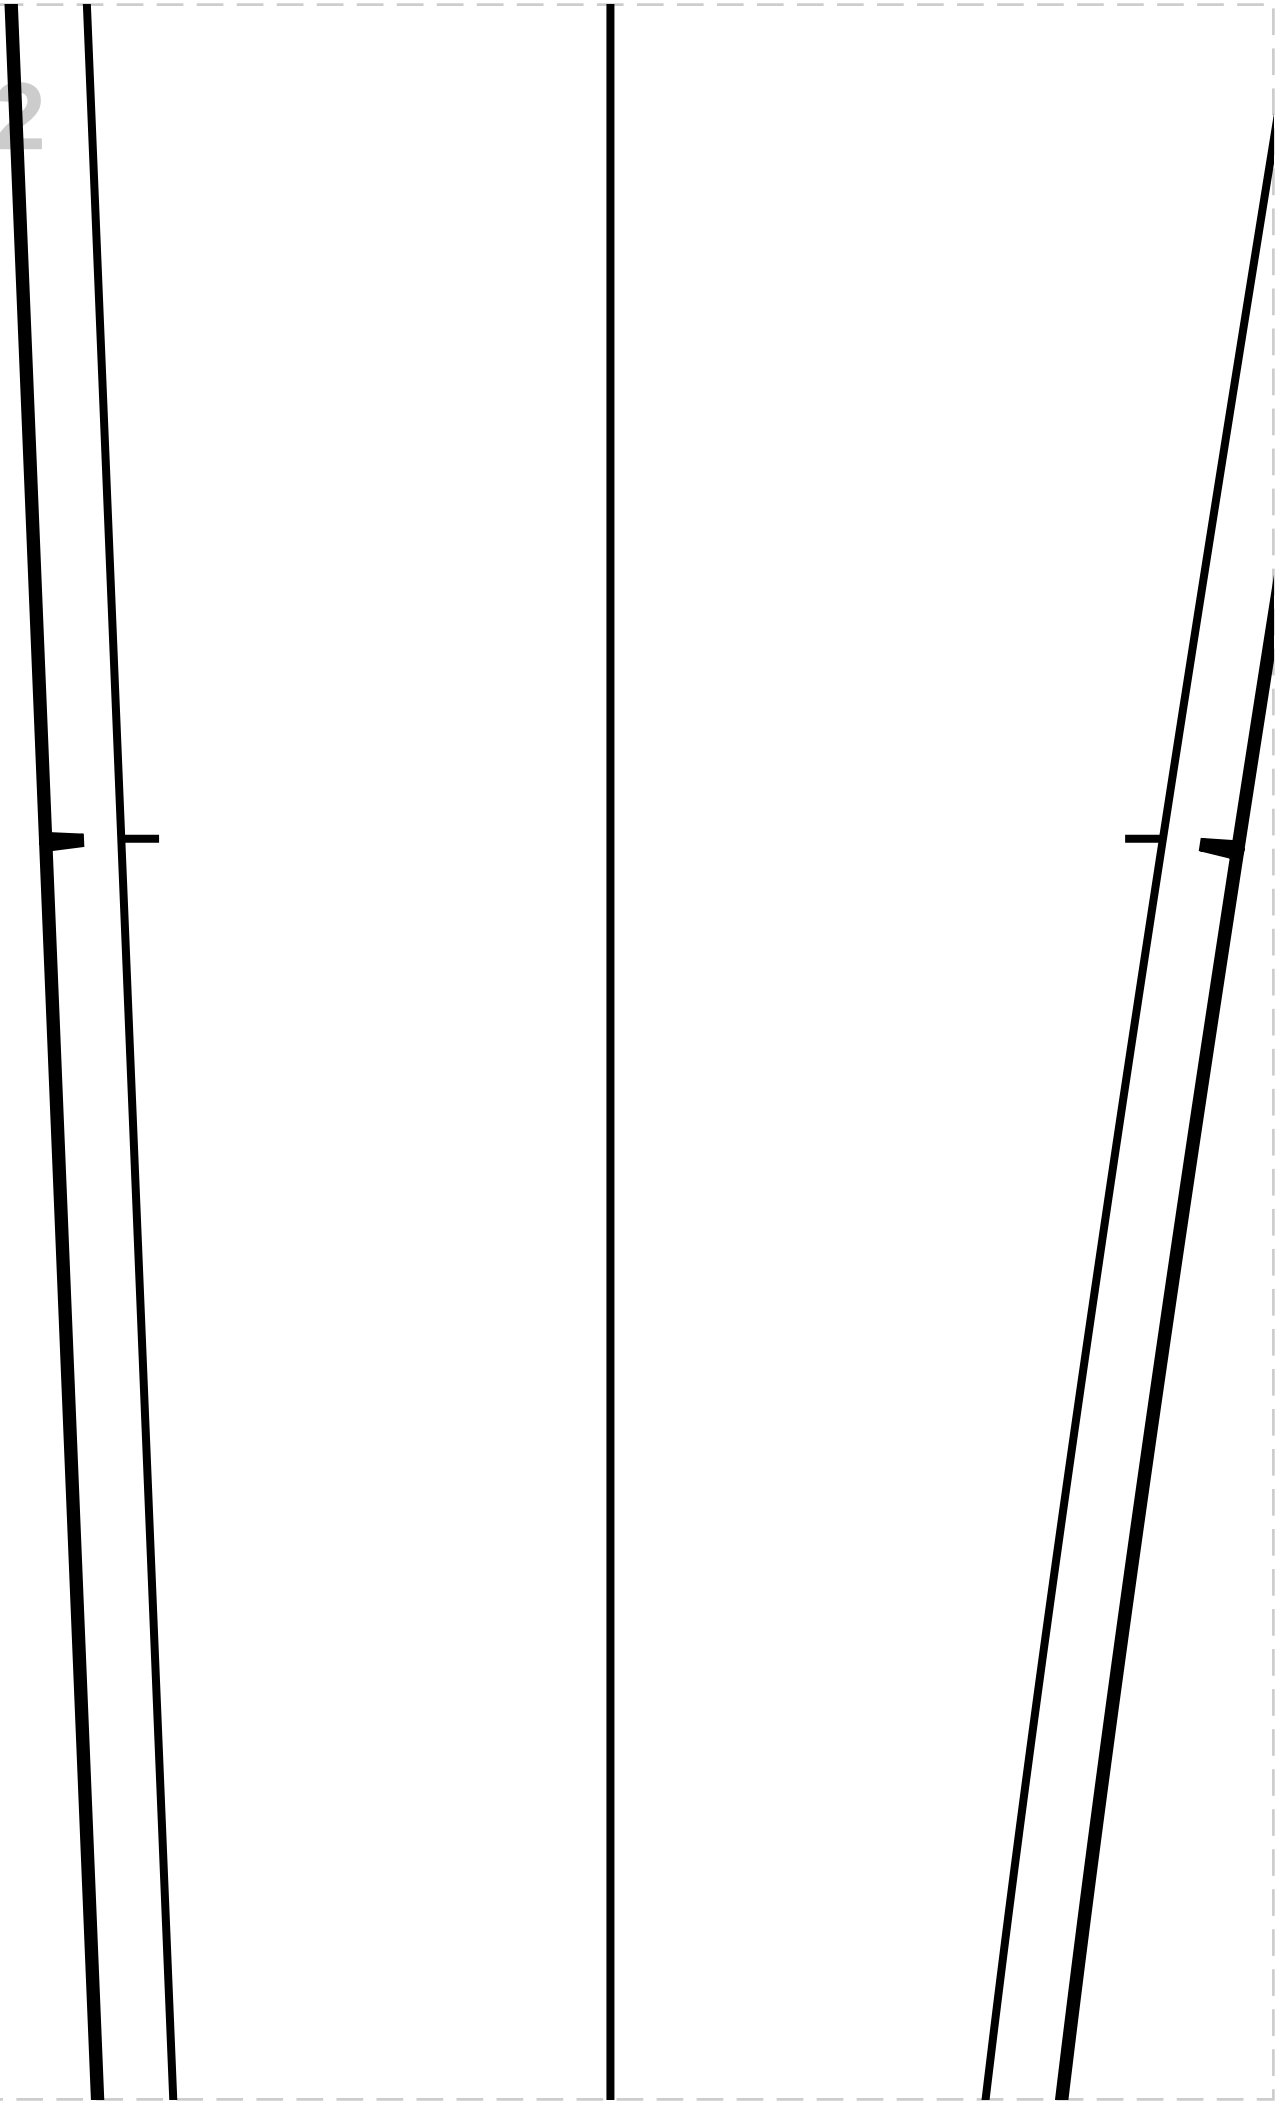


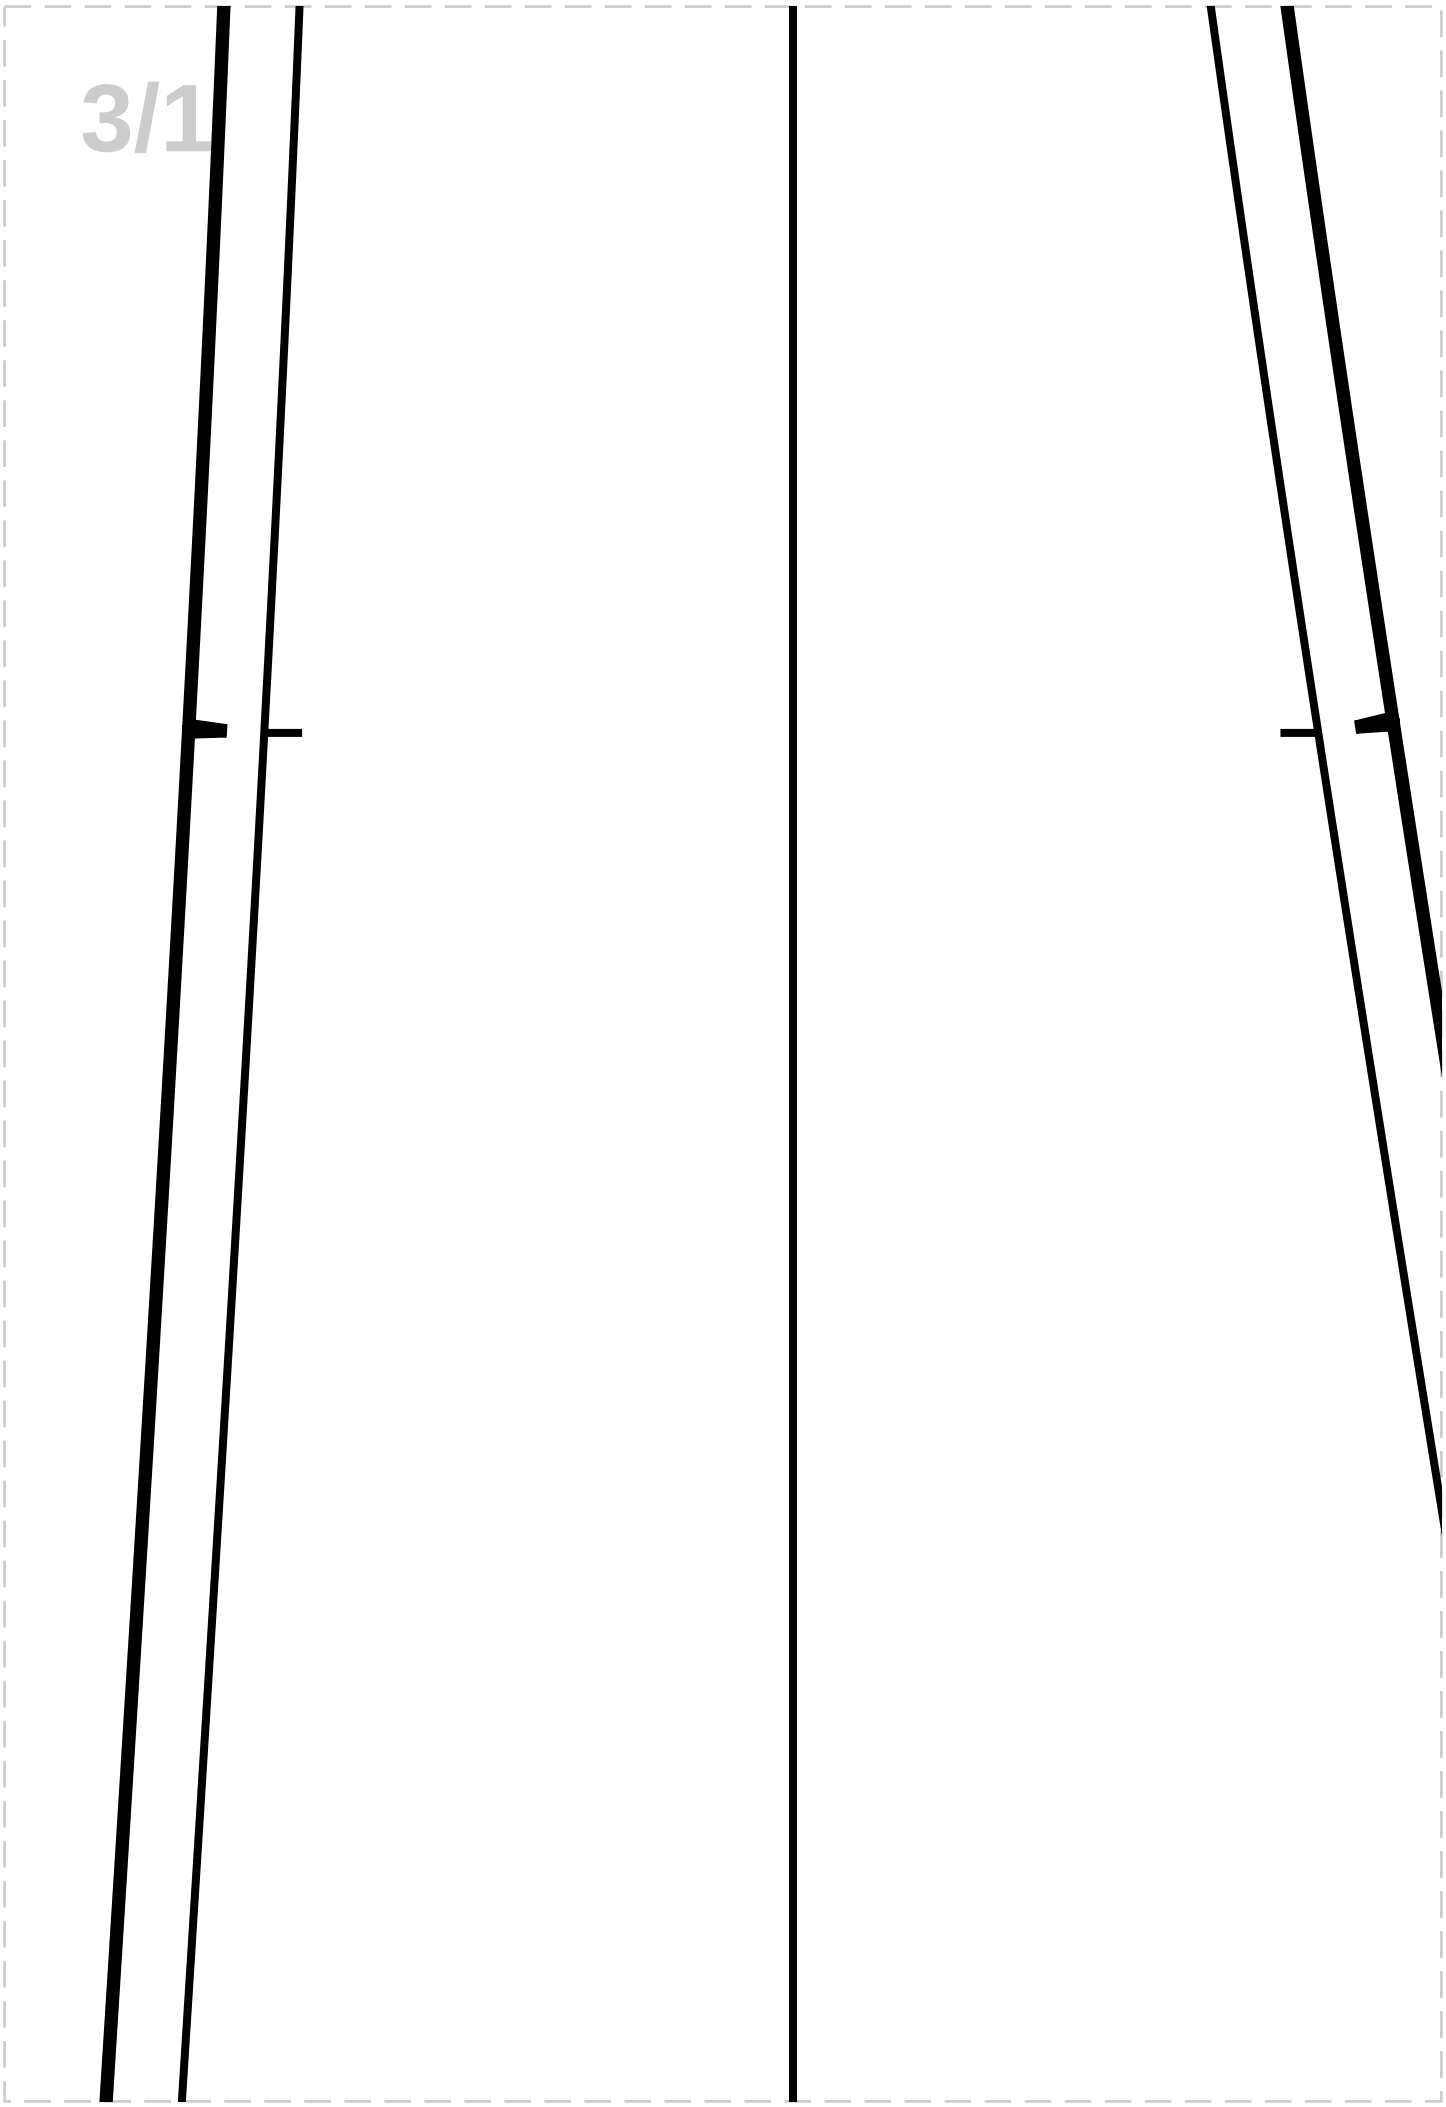


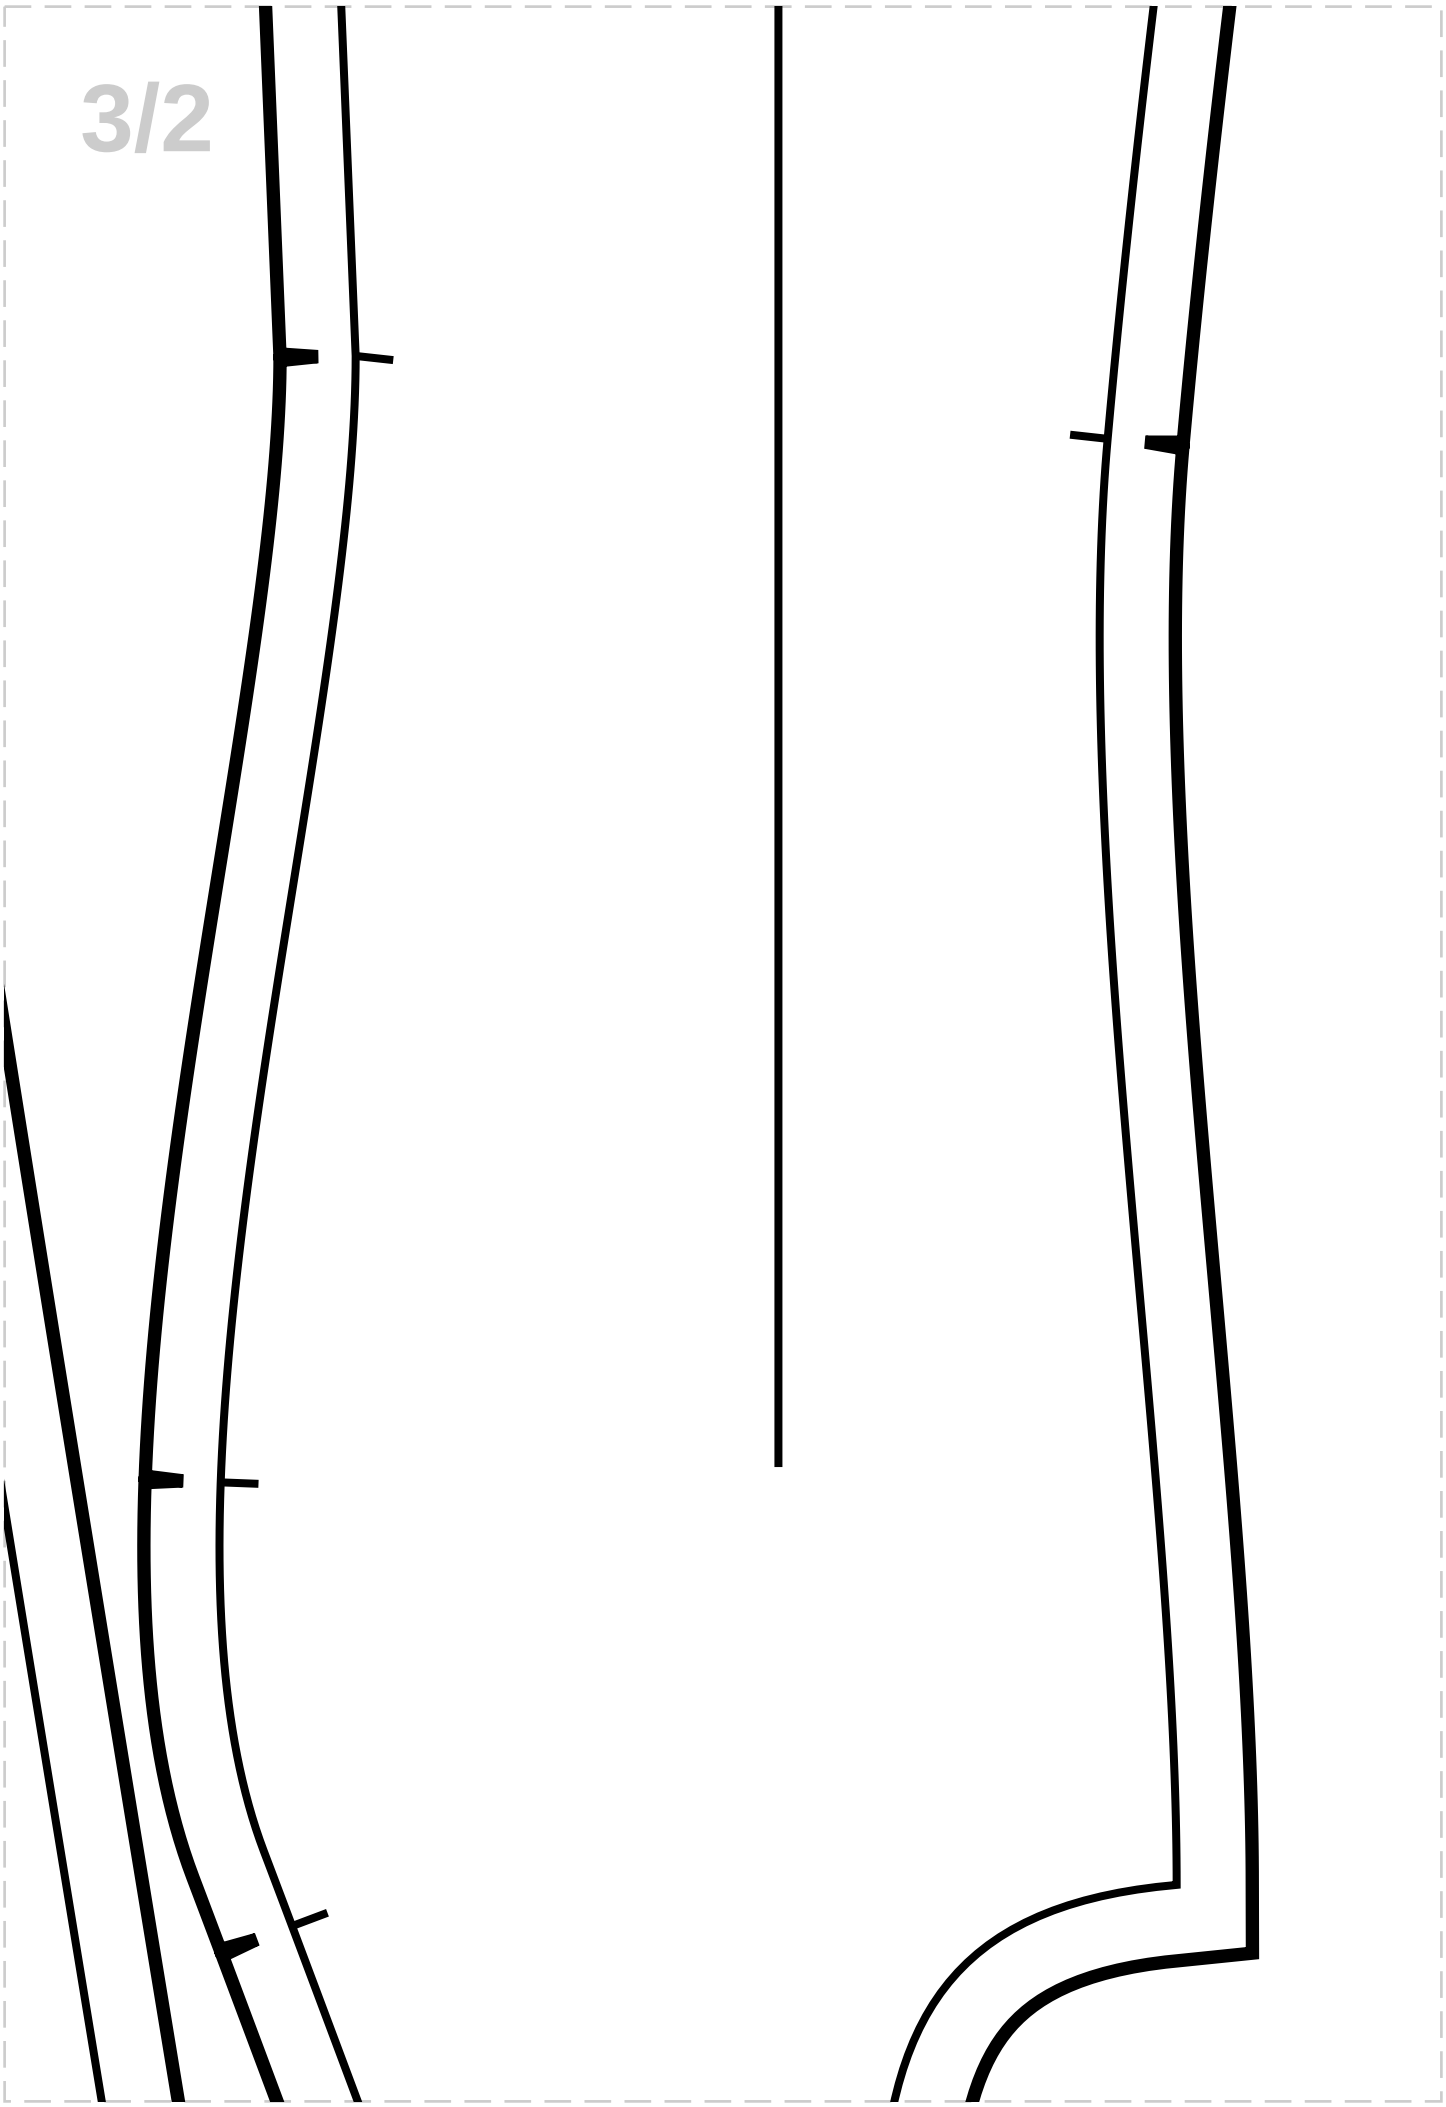
3/2

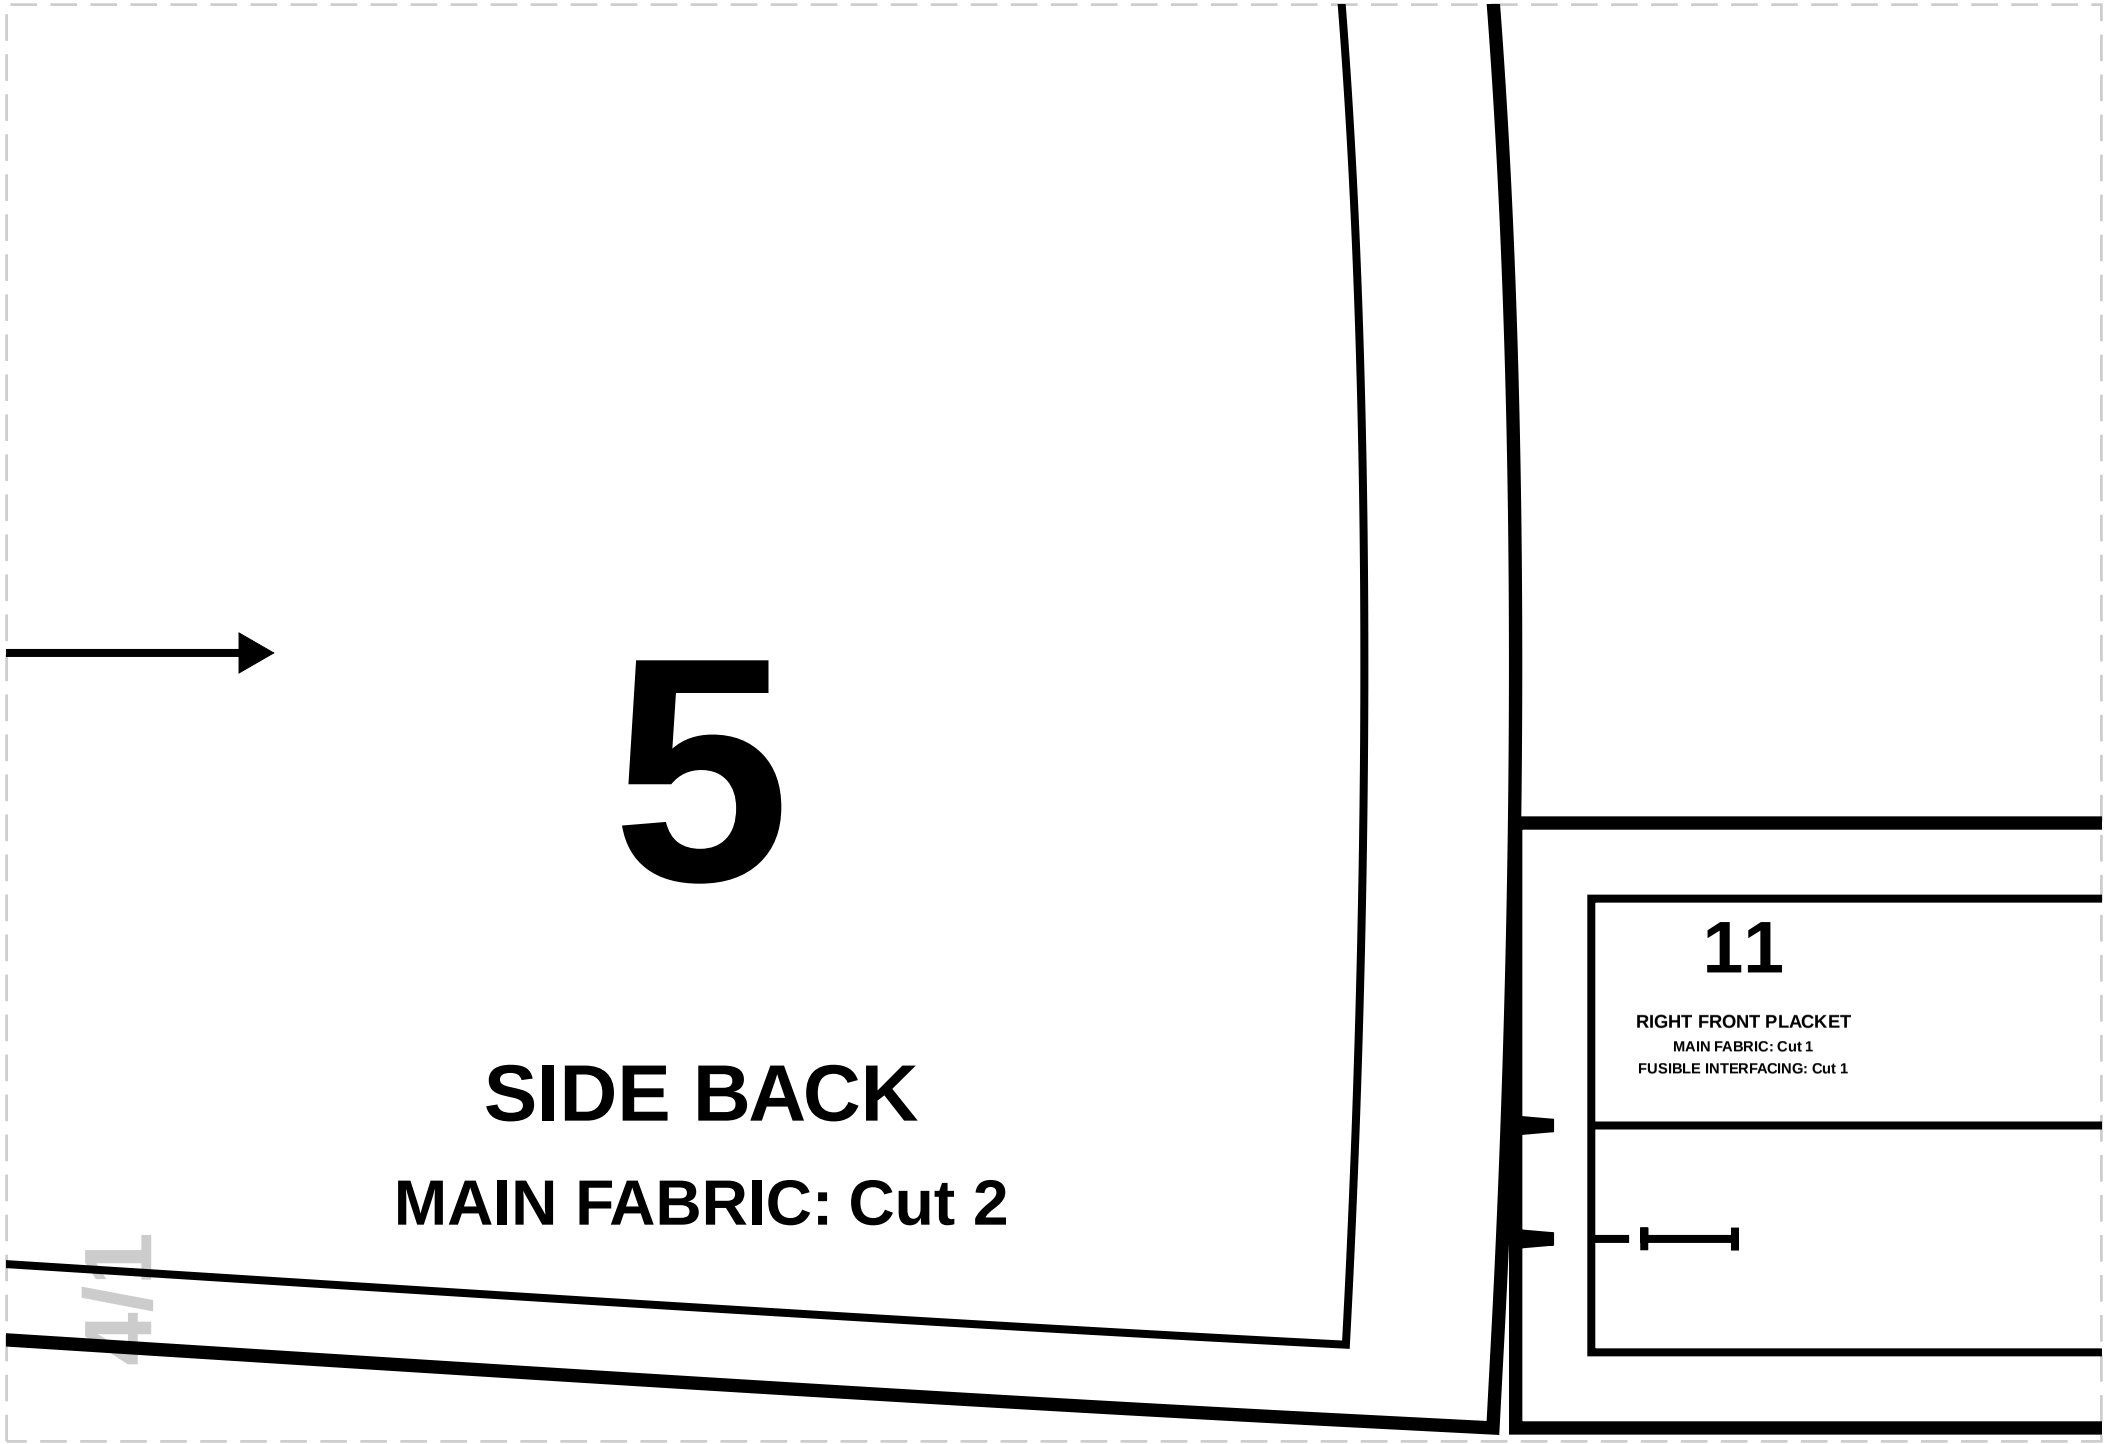
5
SIDE BACK
MAIN FABRIC: Cut 2
11
RIGHT FRONT PLACKET
MAIN FABRIC: Cut 1
FUSIBLE INTERFACING: Cut 1
4/1

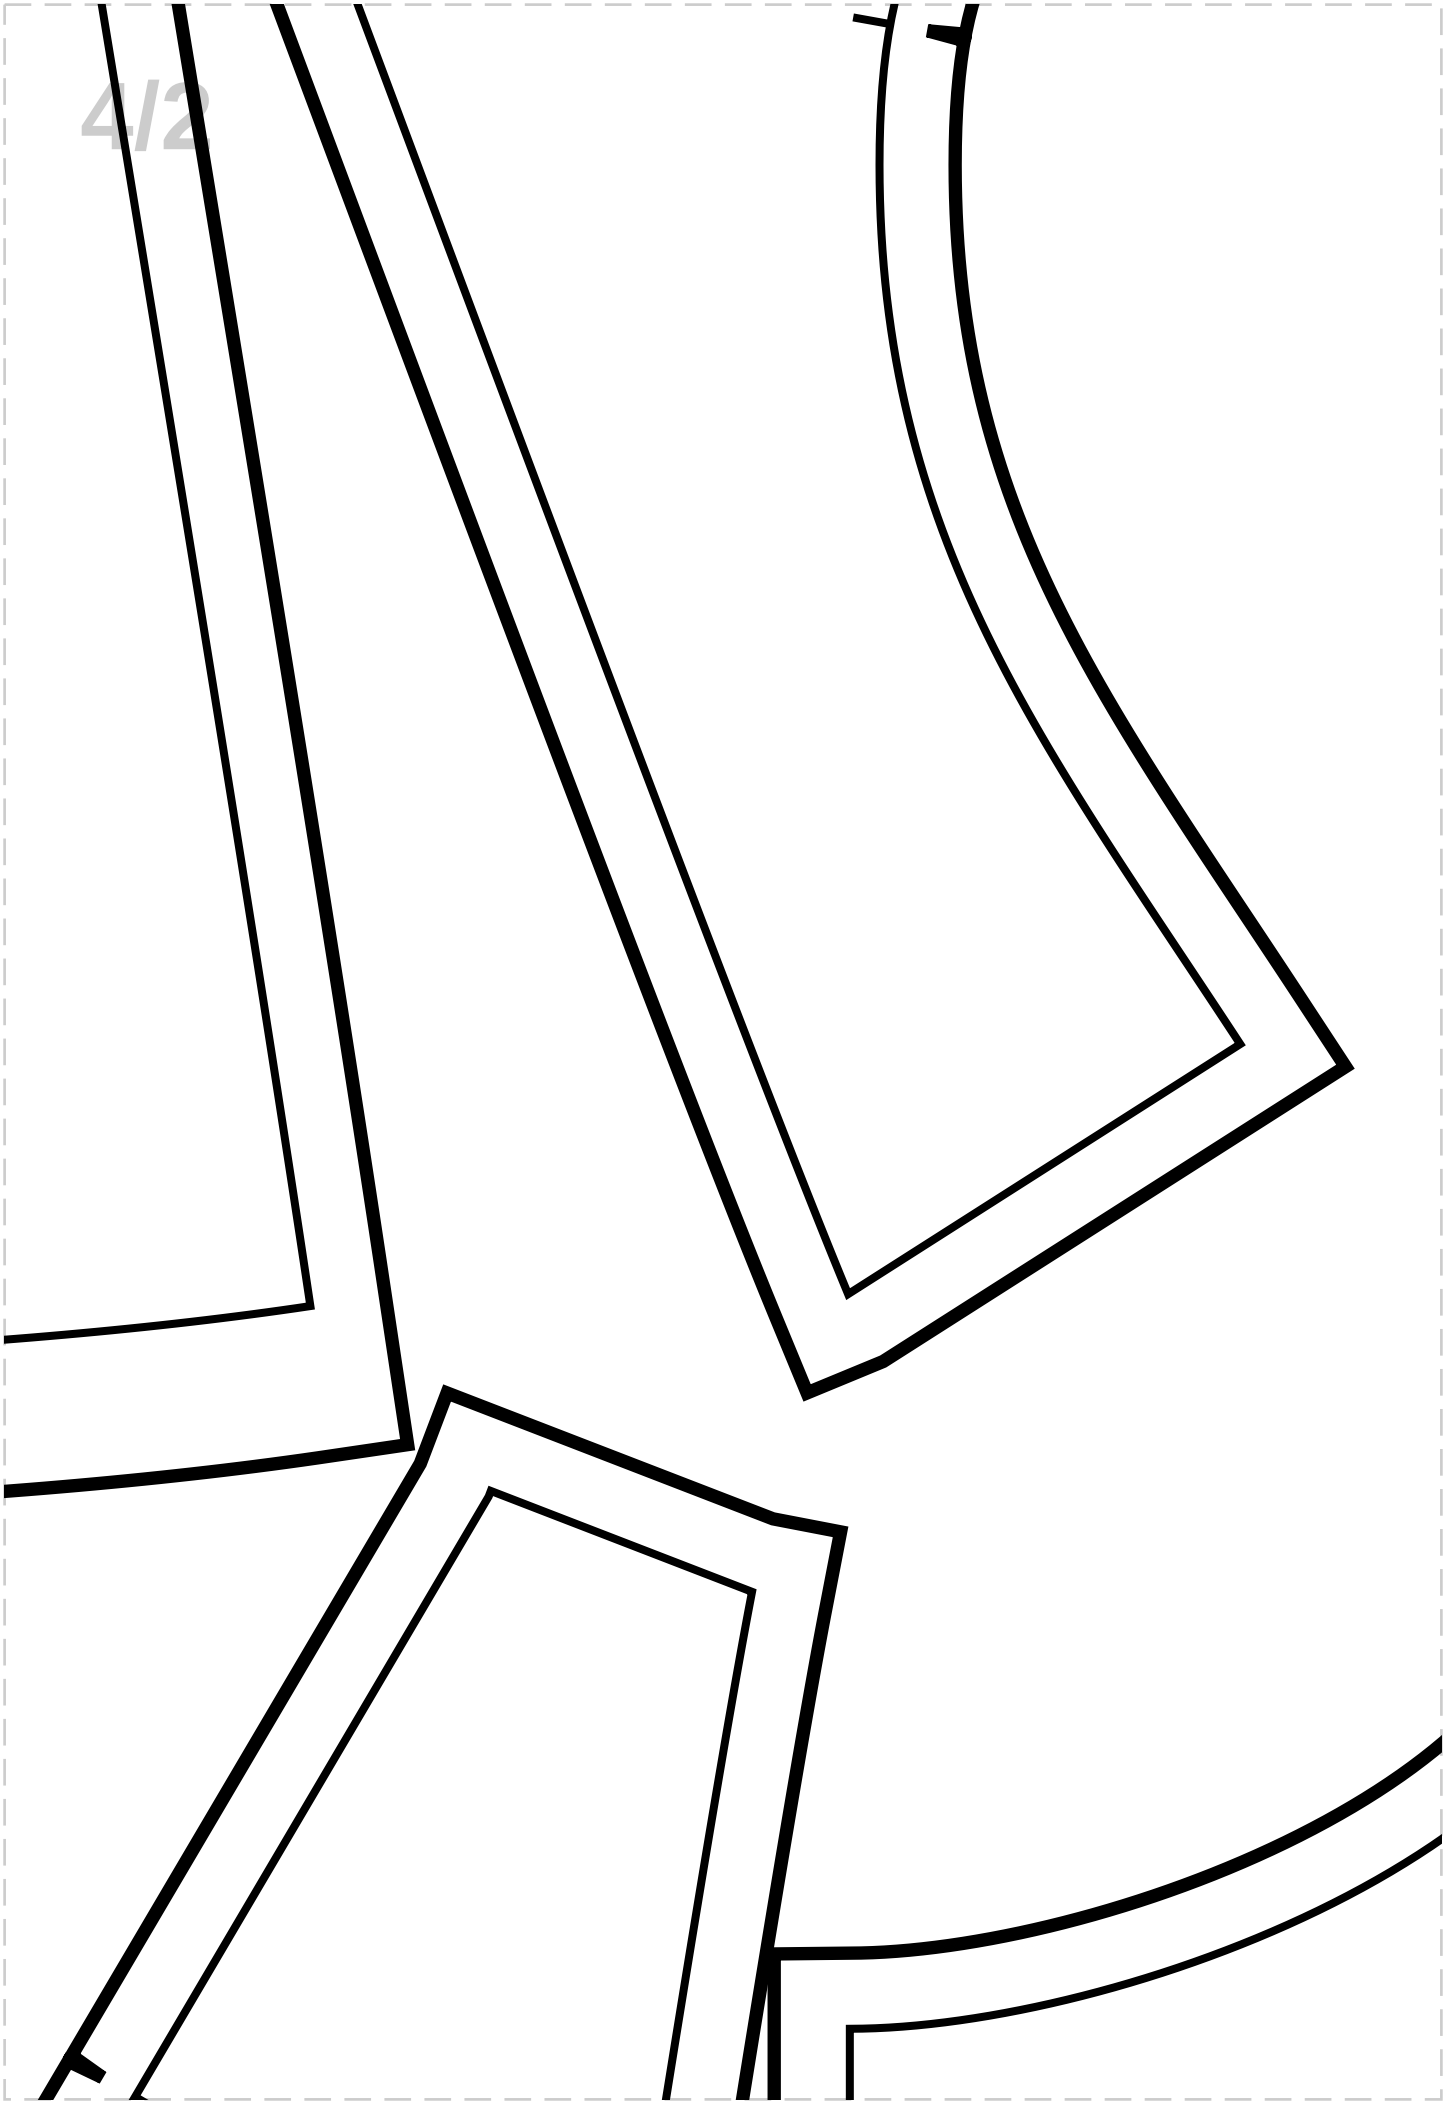

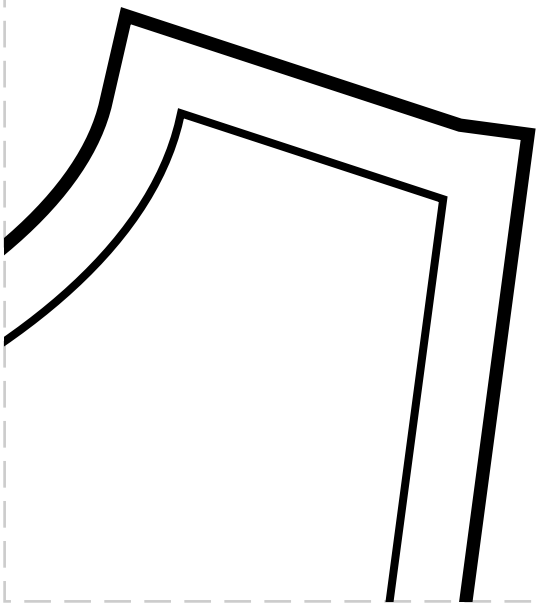

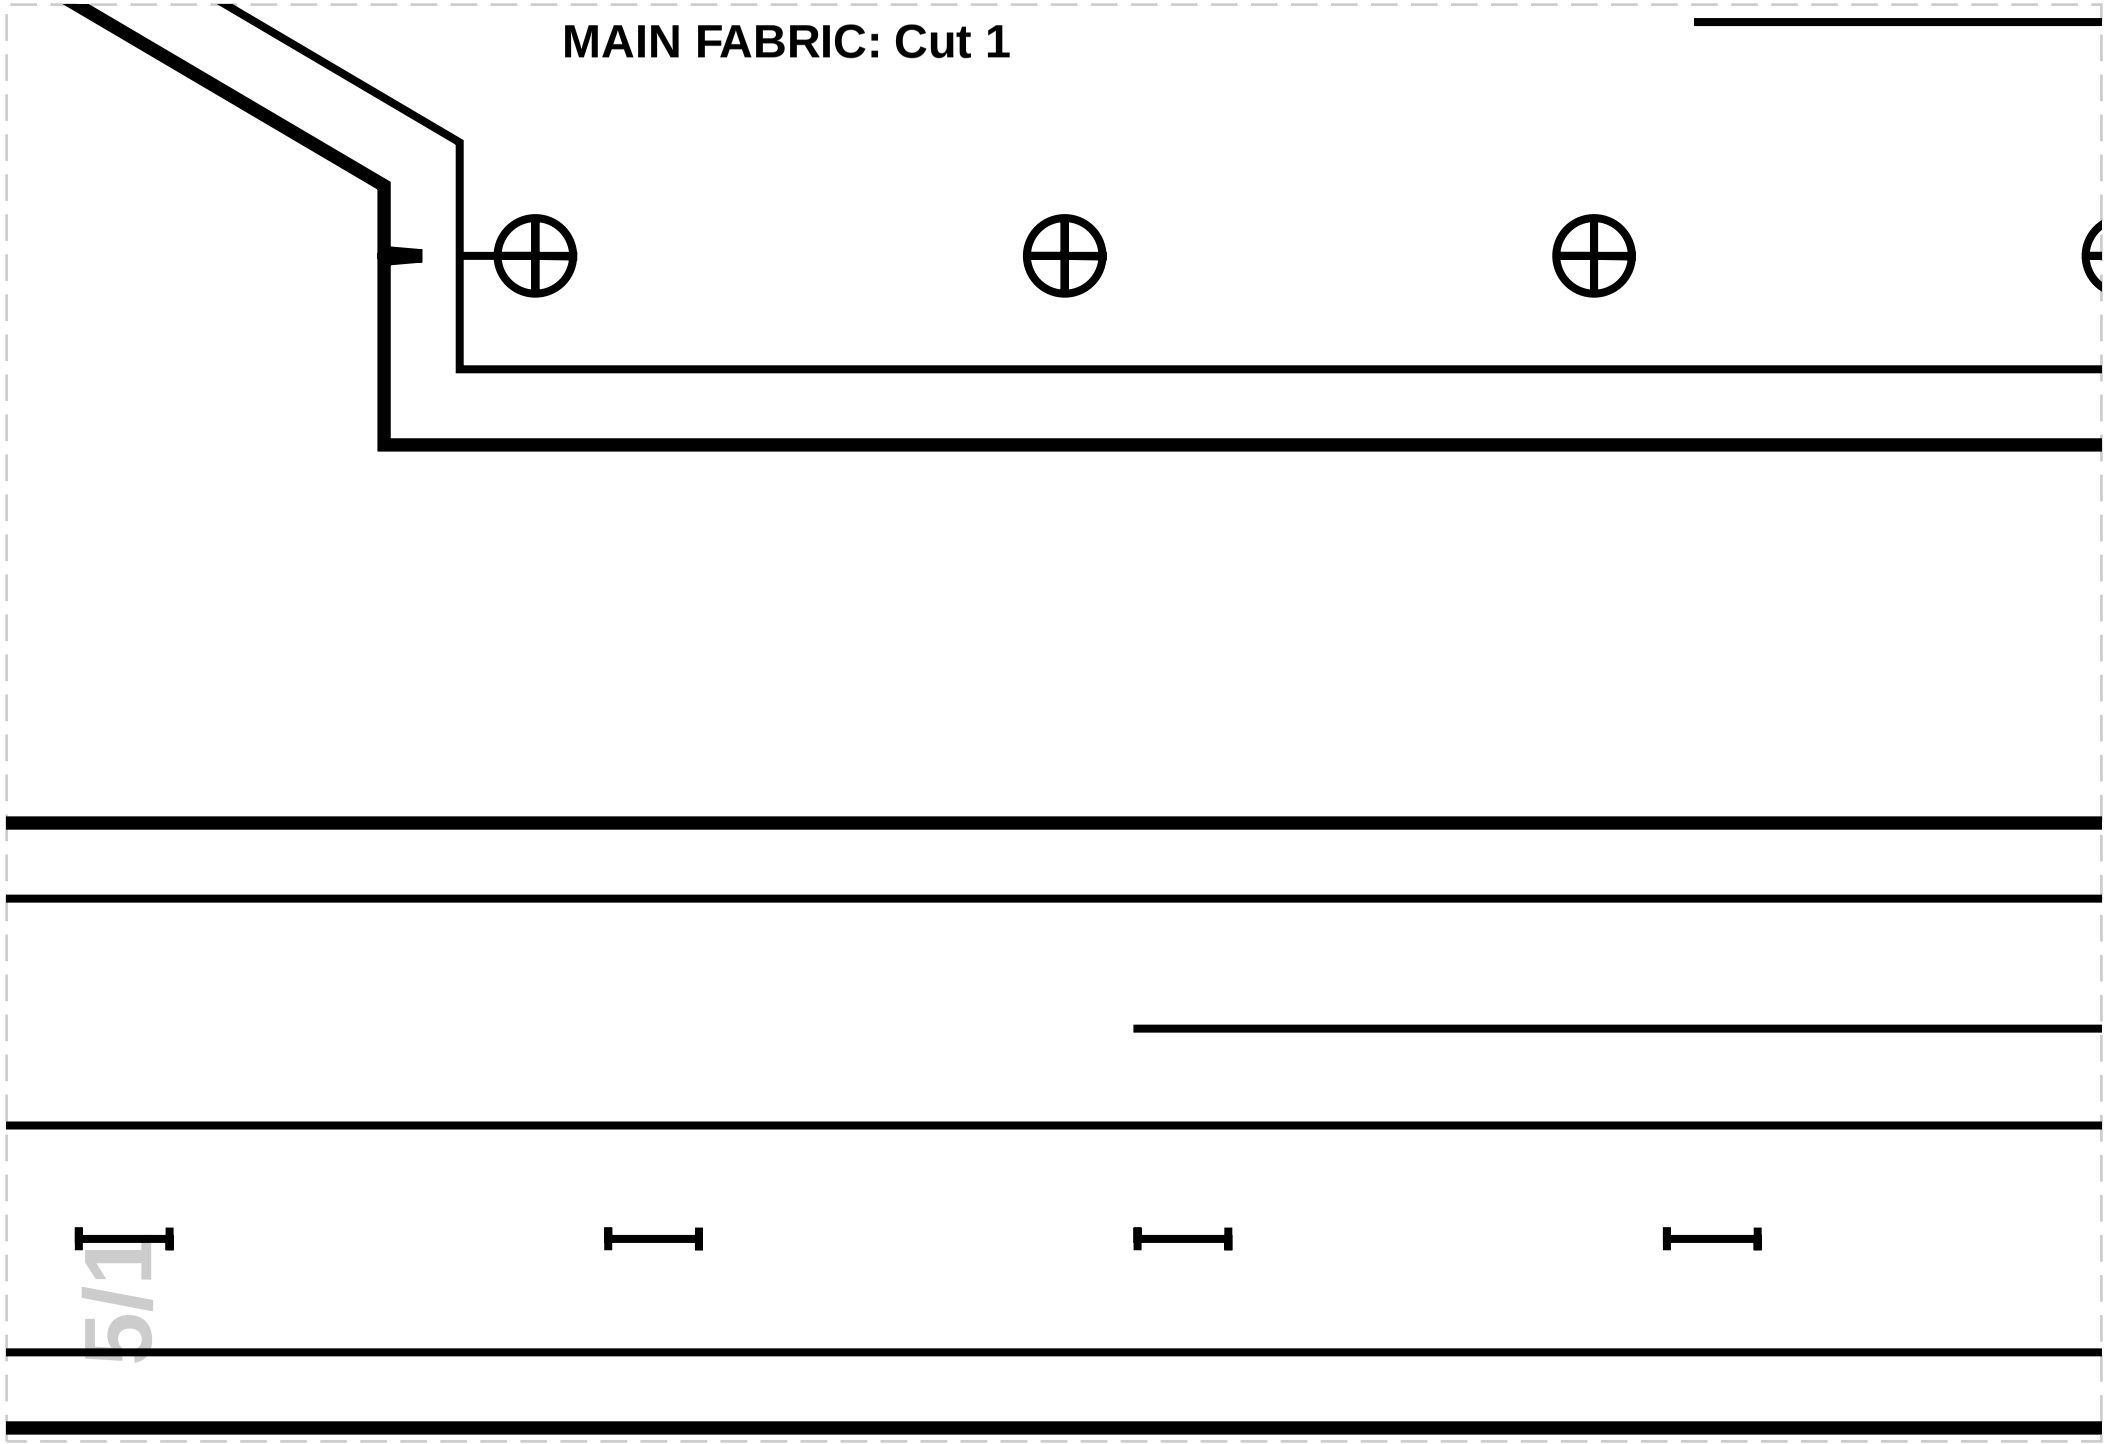

MAIN FABRIC: Cut 1
5/1


5/2


LEFT CENTER FRONT

2

ZIP

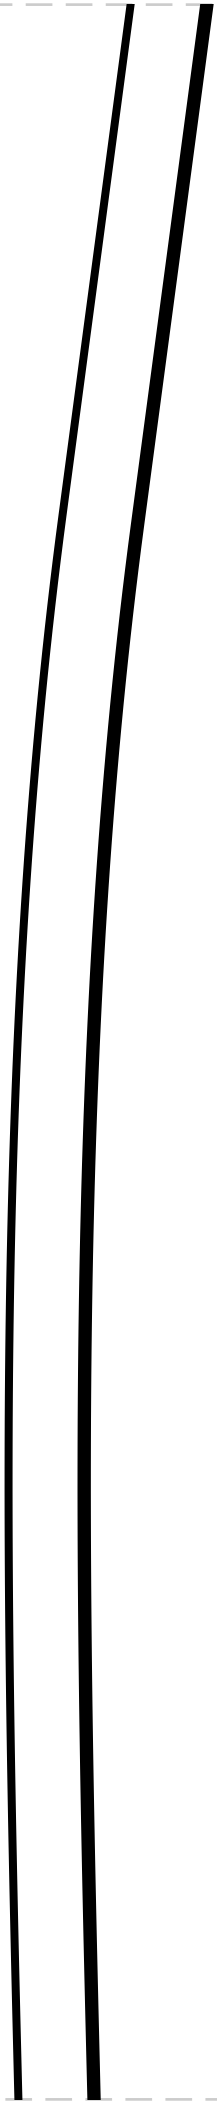

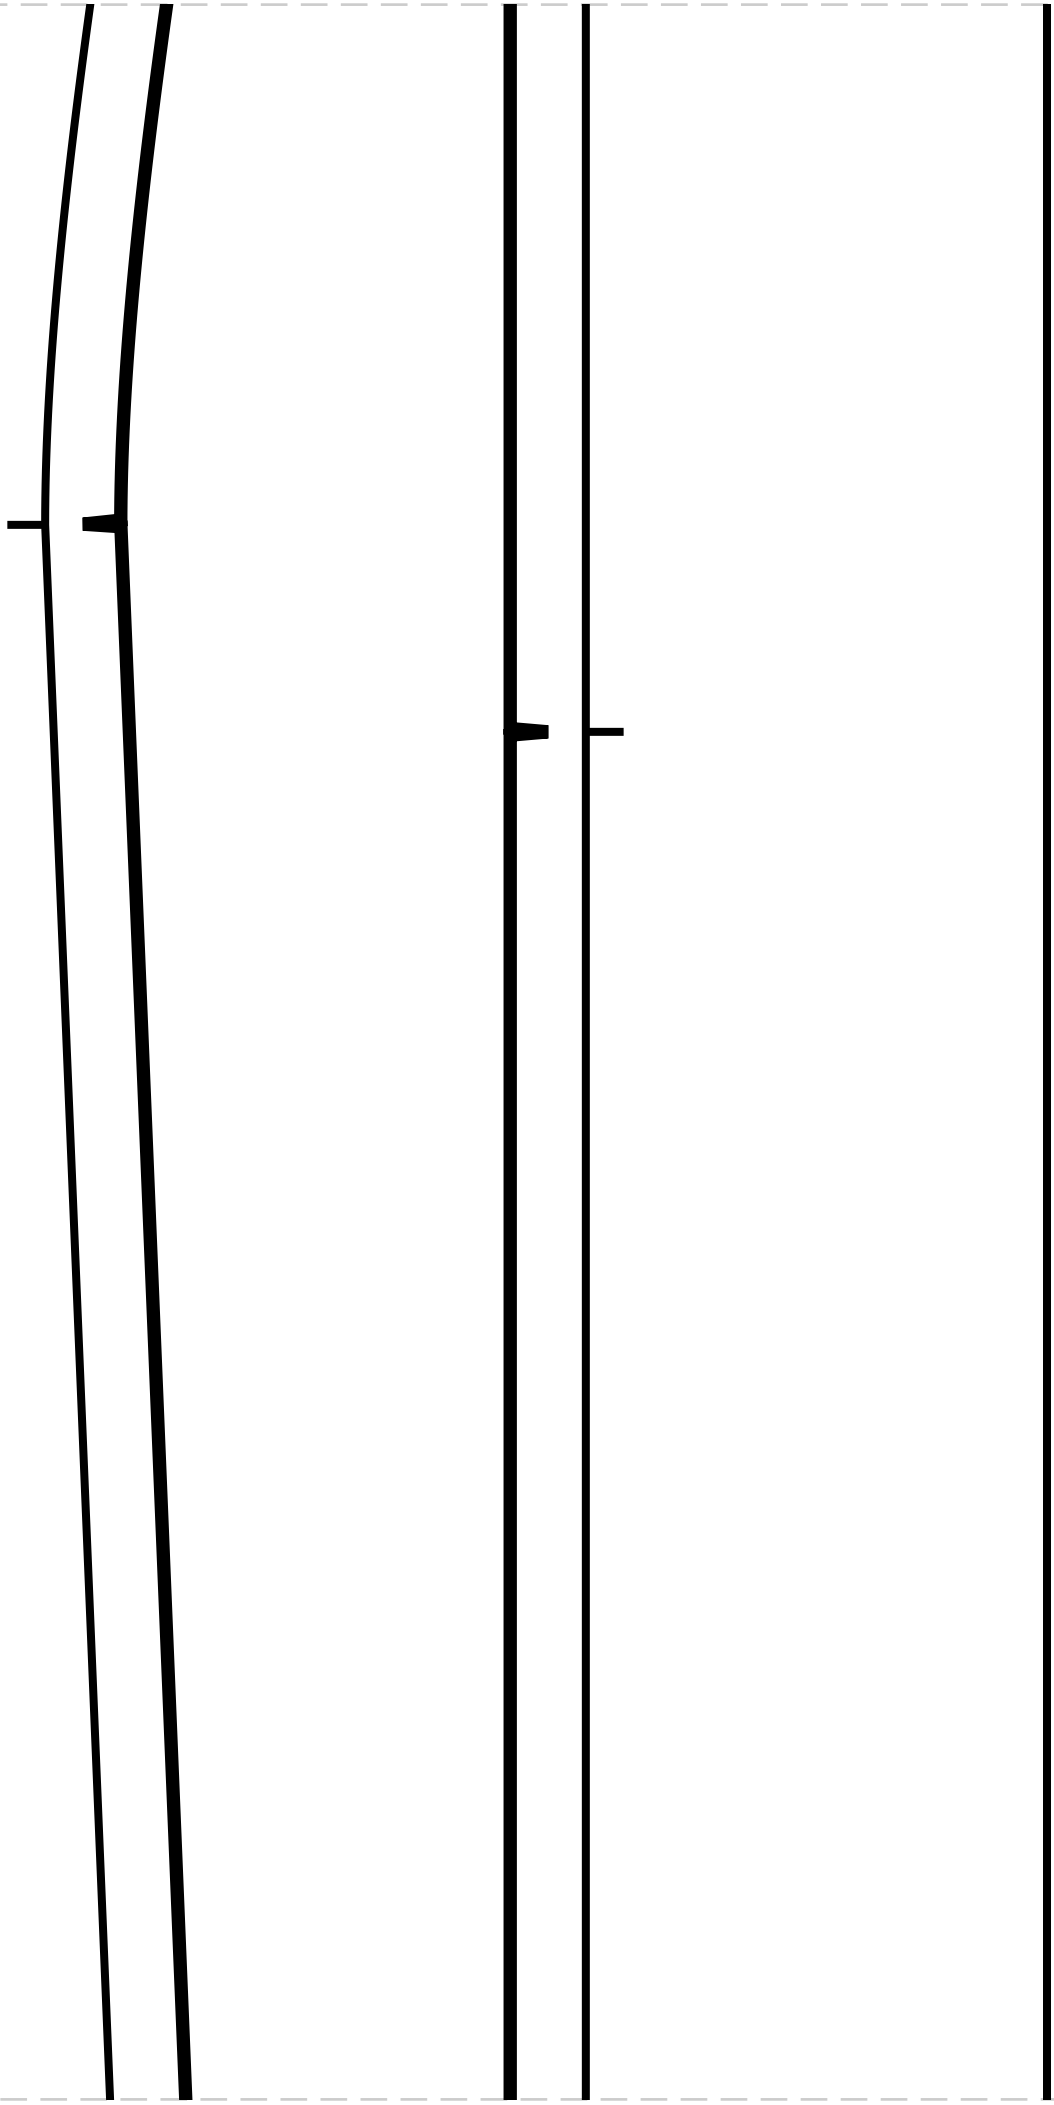

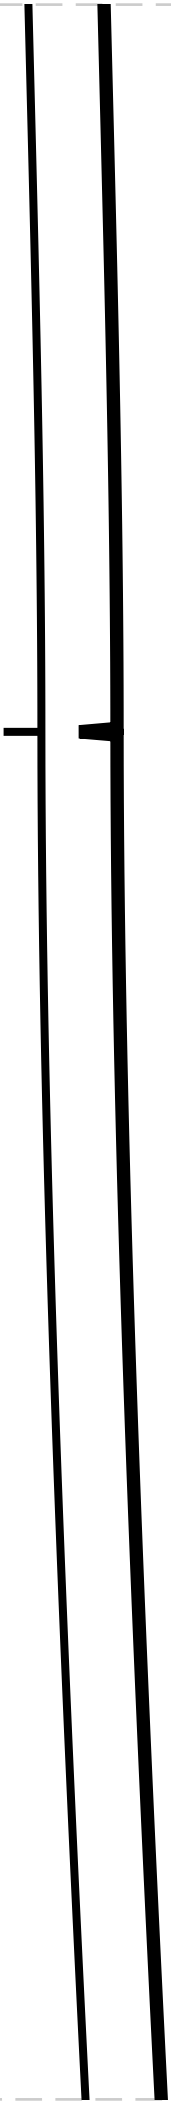

7/1

FOLD

⊕ −

⊕


⊕


⊕


4

CENTER BACK


MAIN FABRIC: Cut 2

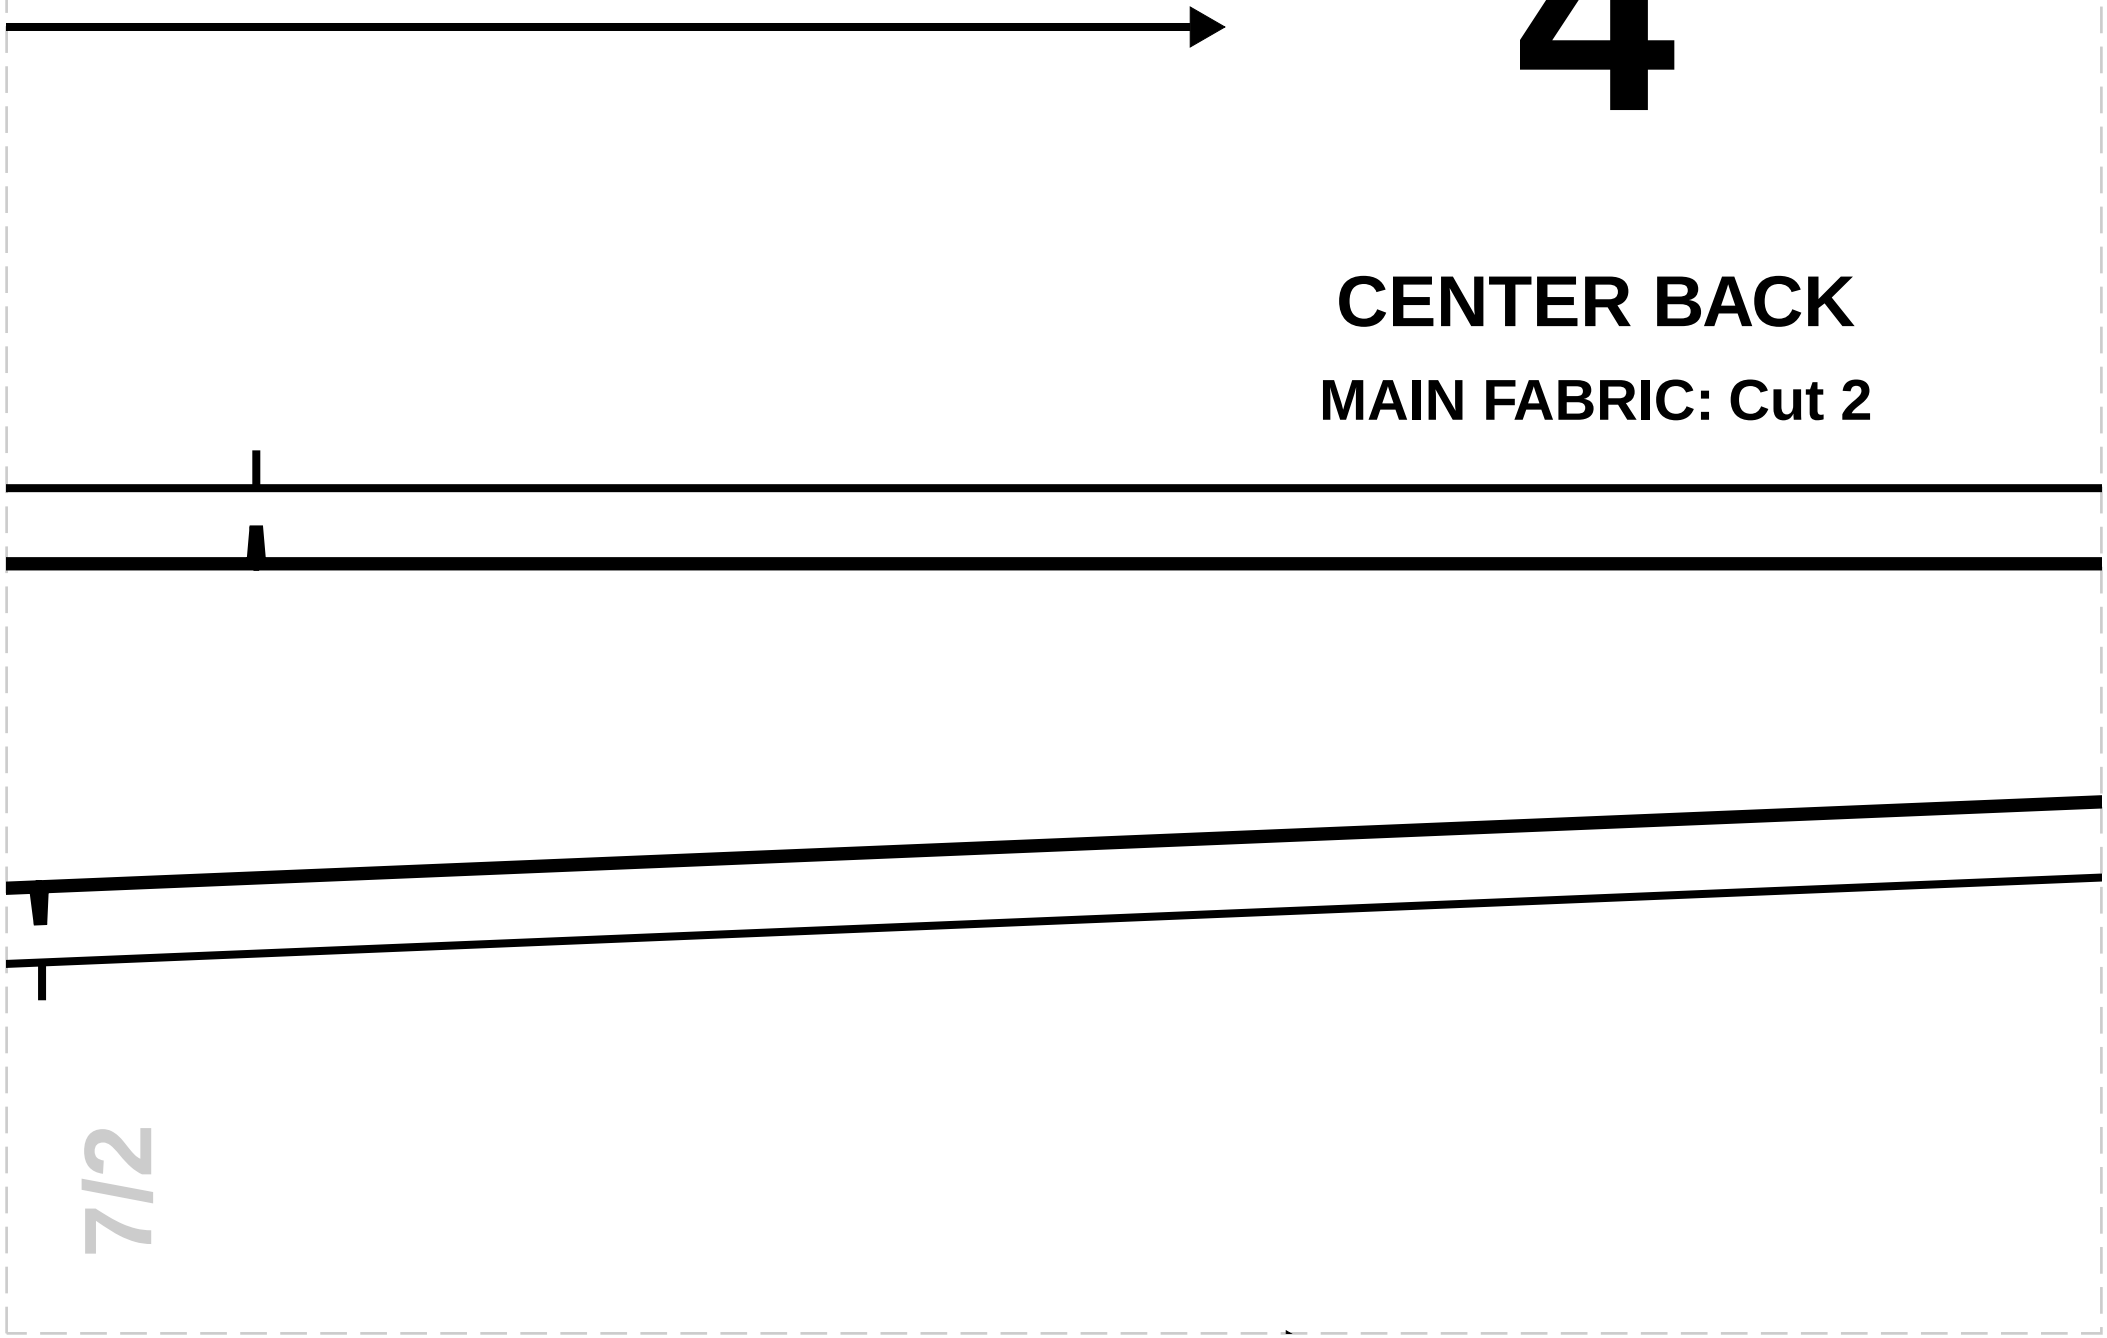


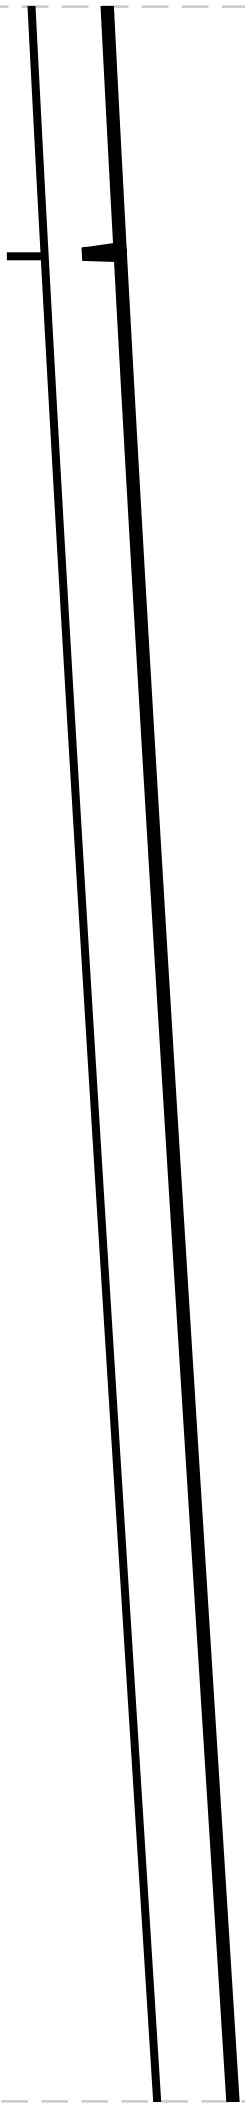


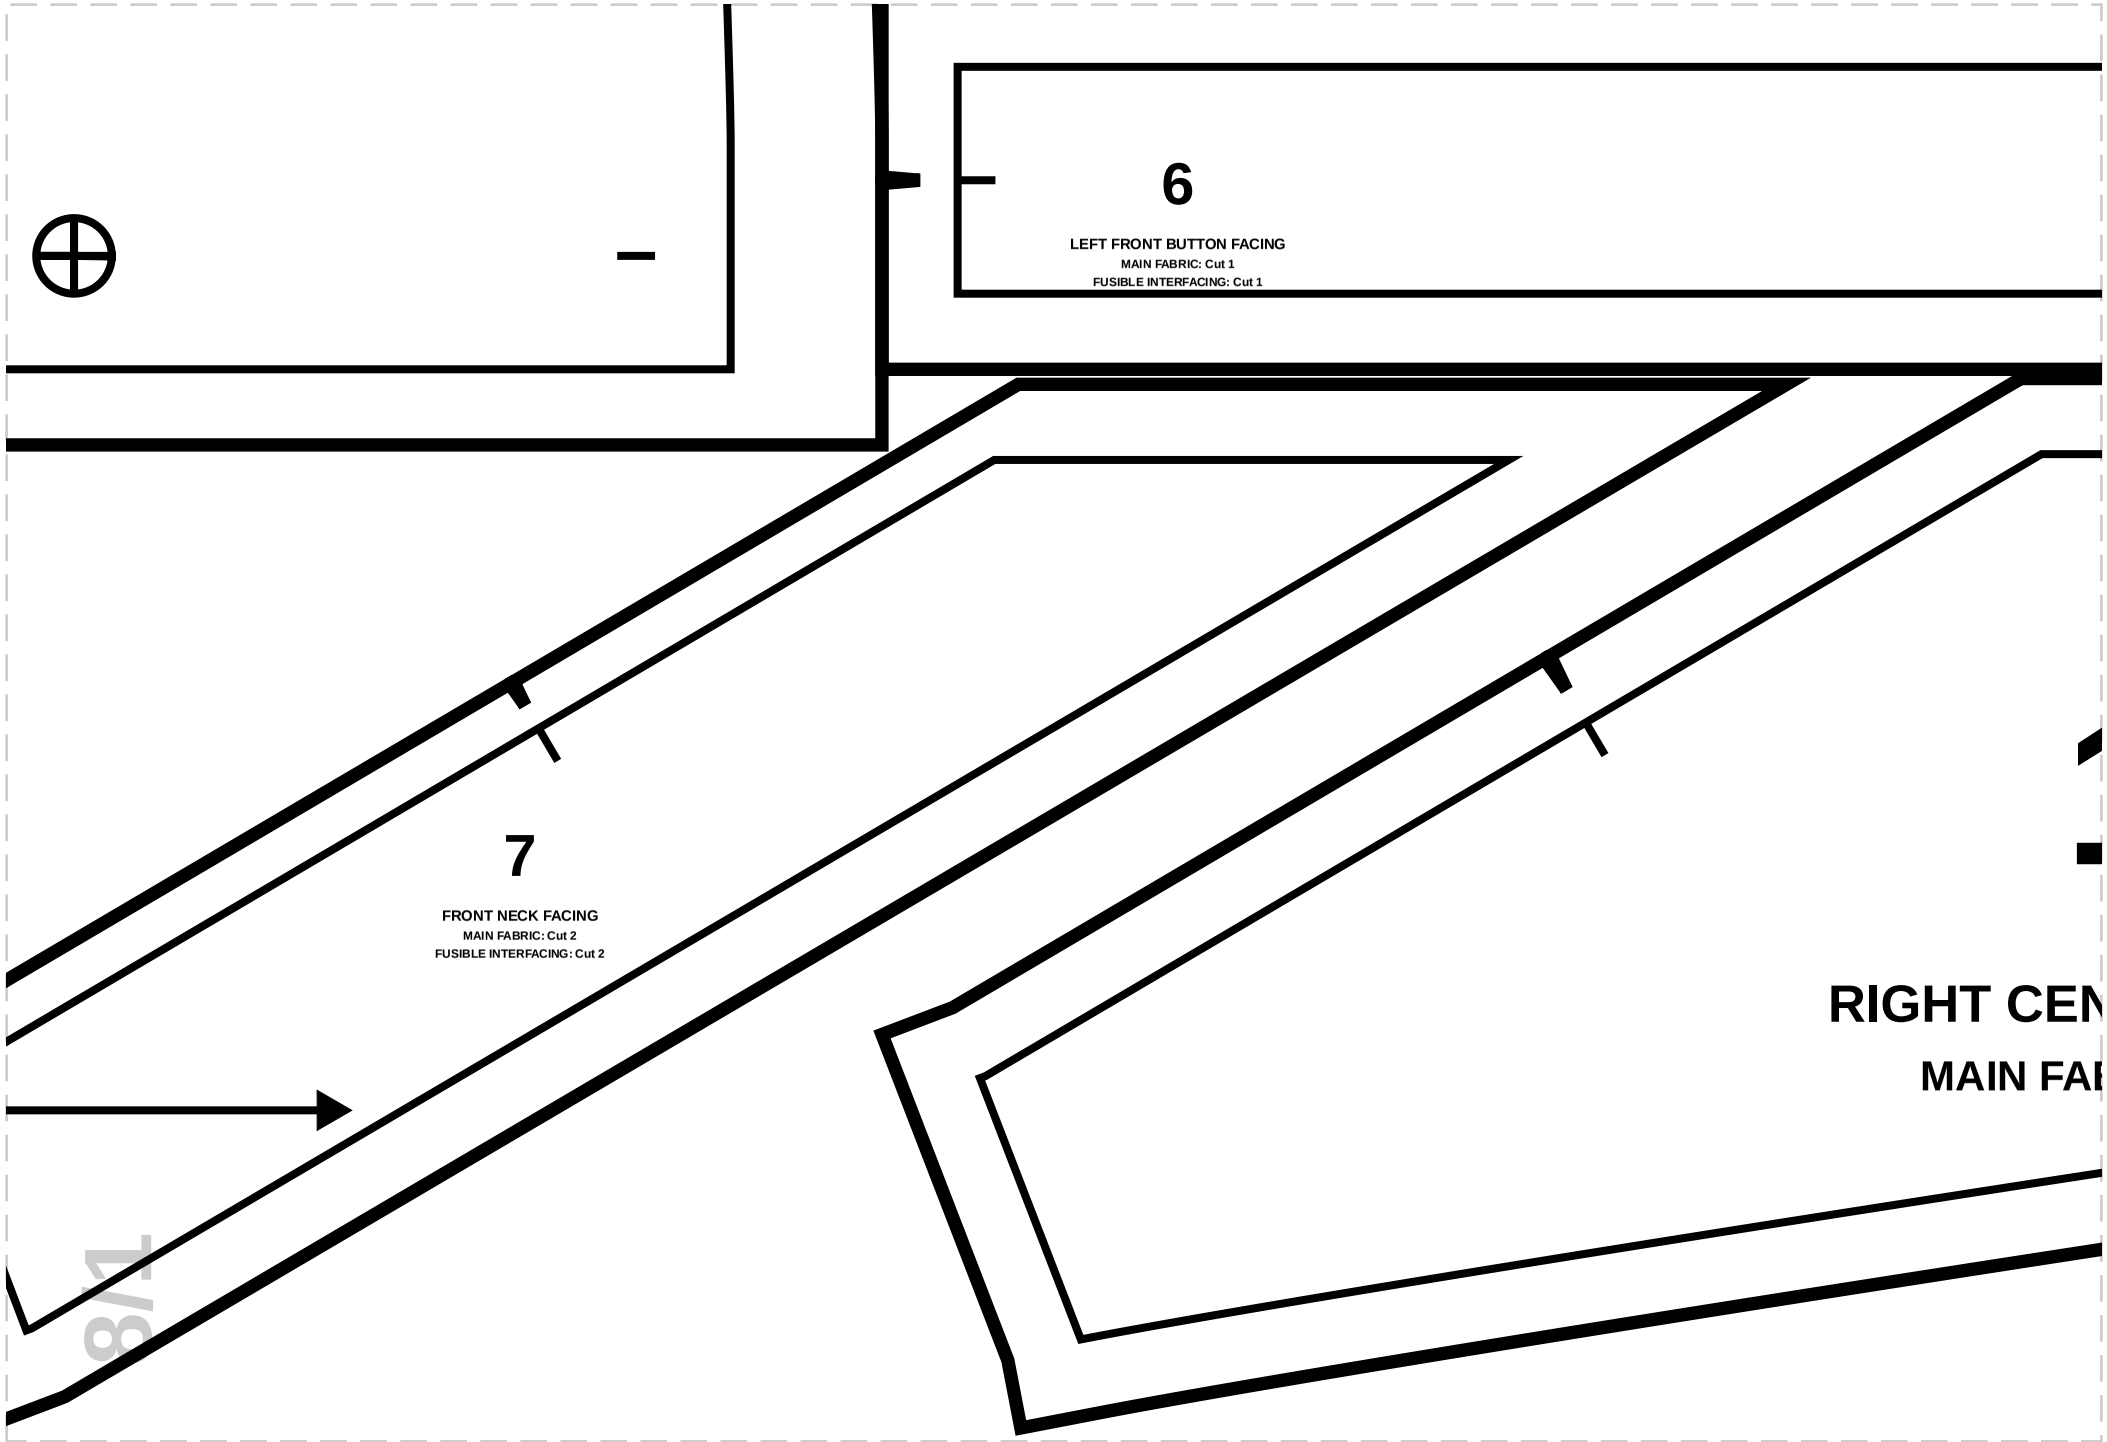
6
LEFT FRONT BUTTON FACING
MAIN FABRIC: Cut 1
FUSIBLE INTERFACING: Cut 1
7
FRONT NECK FACING
MAIN FABRIC: Cut 2
FUSIBLE INTERFACING: Cut 2
RIGHT CEN
MAIN FA
8/1

8/2

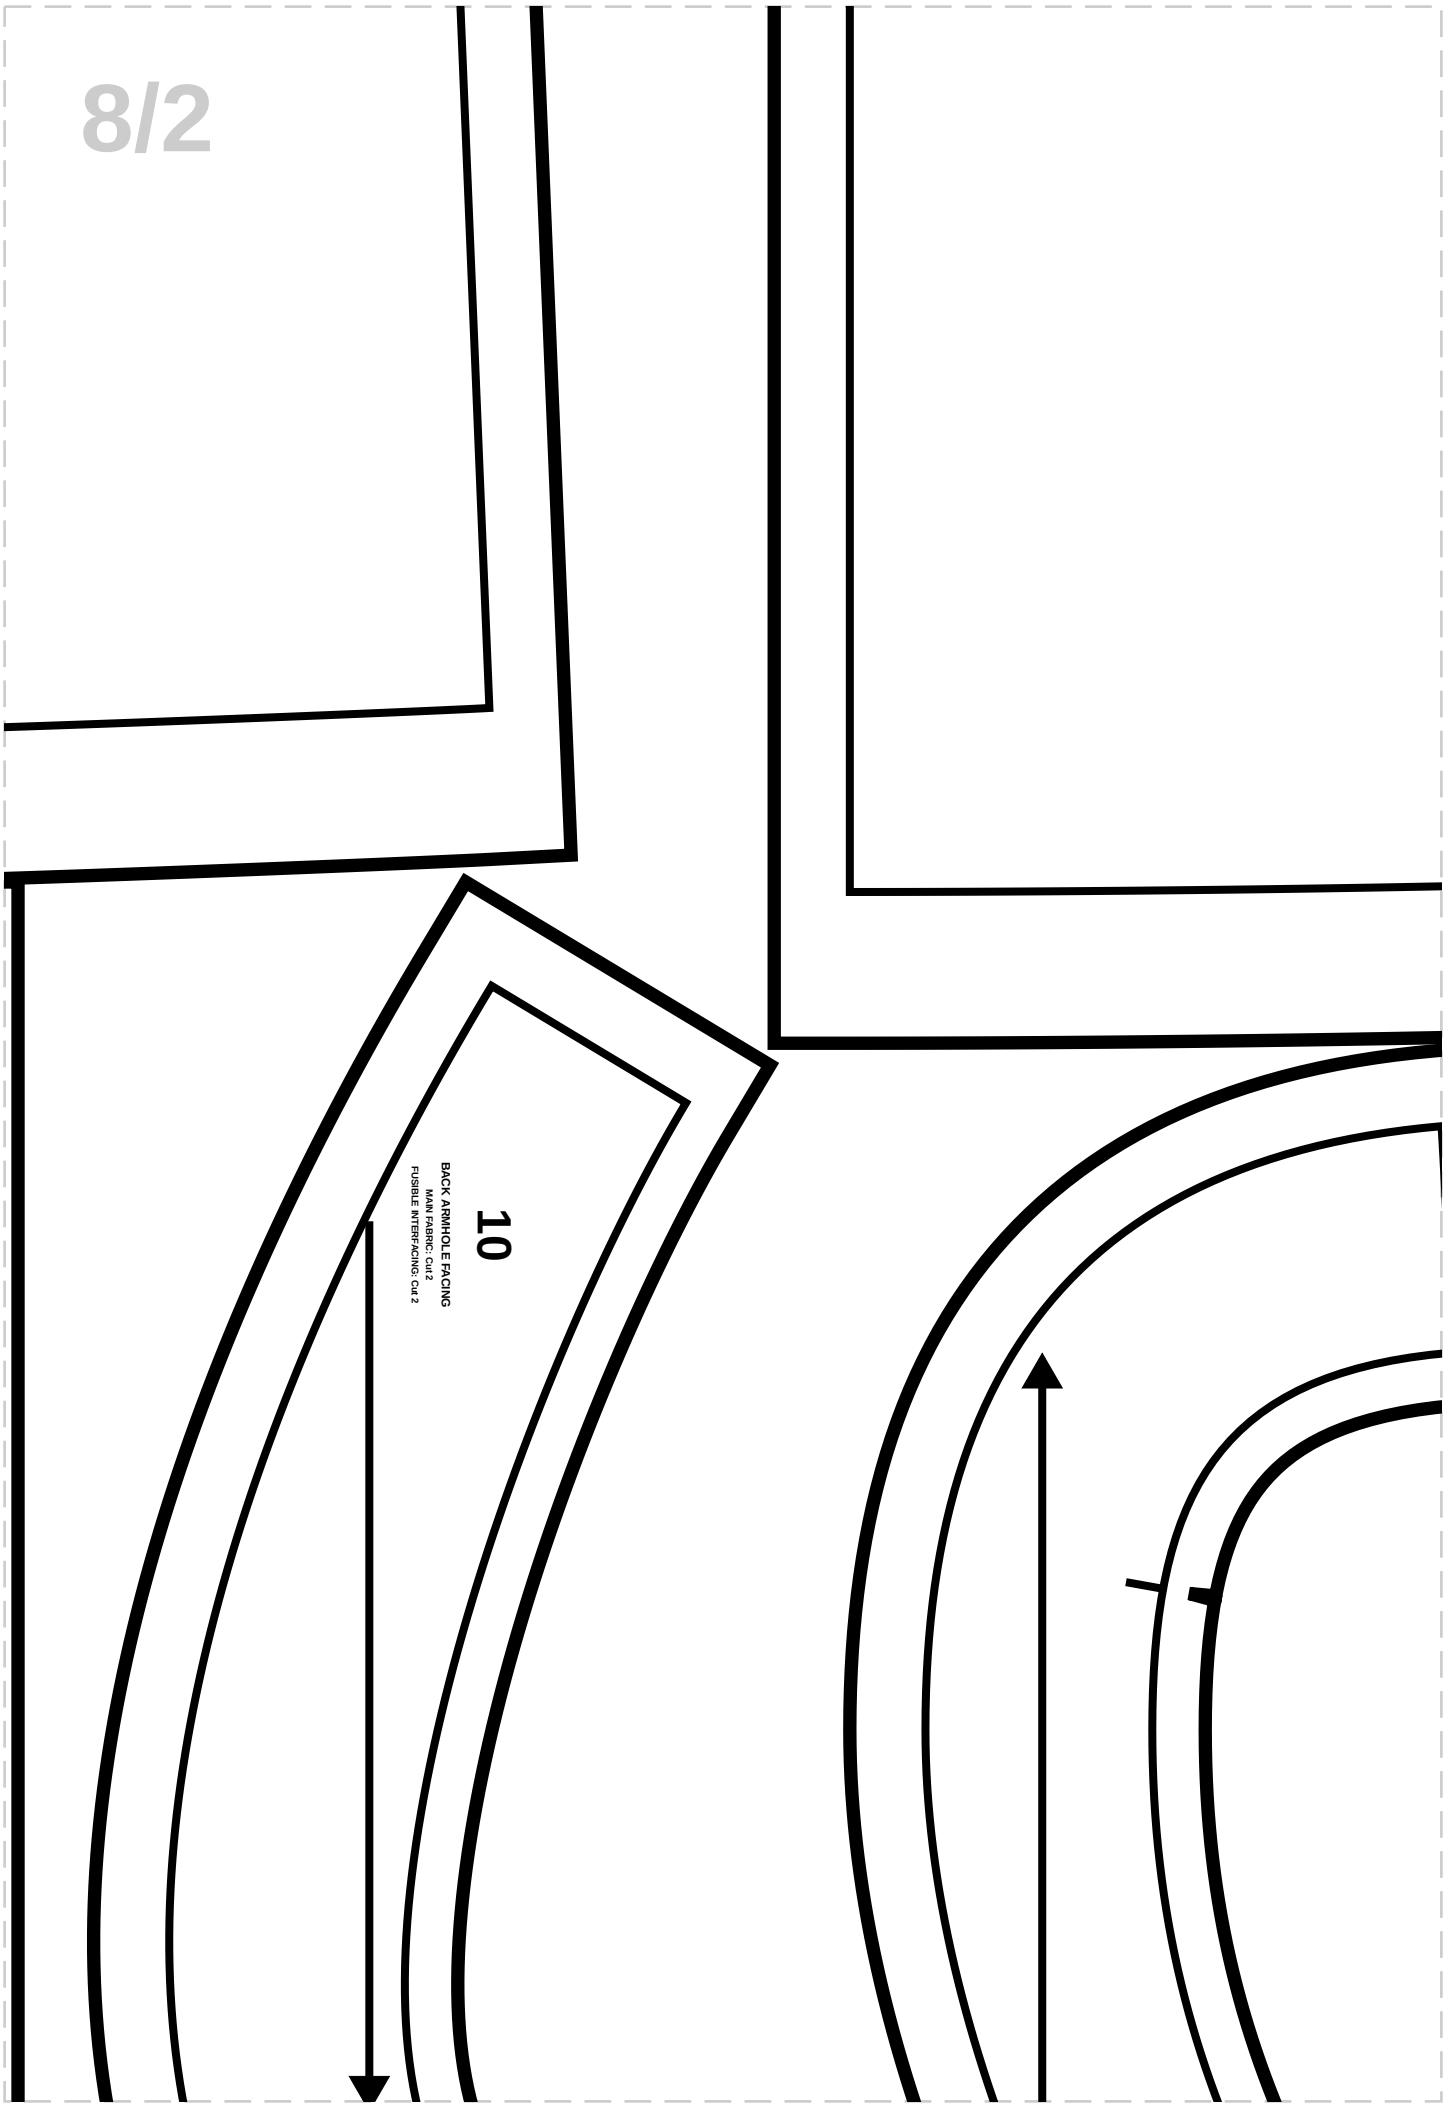
10
BACK ARMHOLE FACING
MAIN FABRIC: Cut 2
FUSIBLE INTERFACING: Cut 2

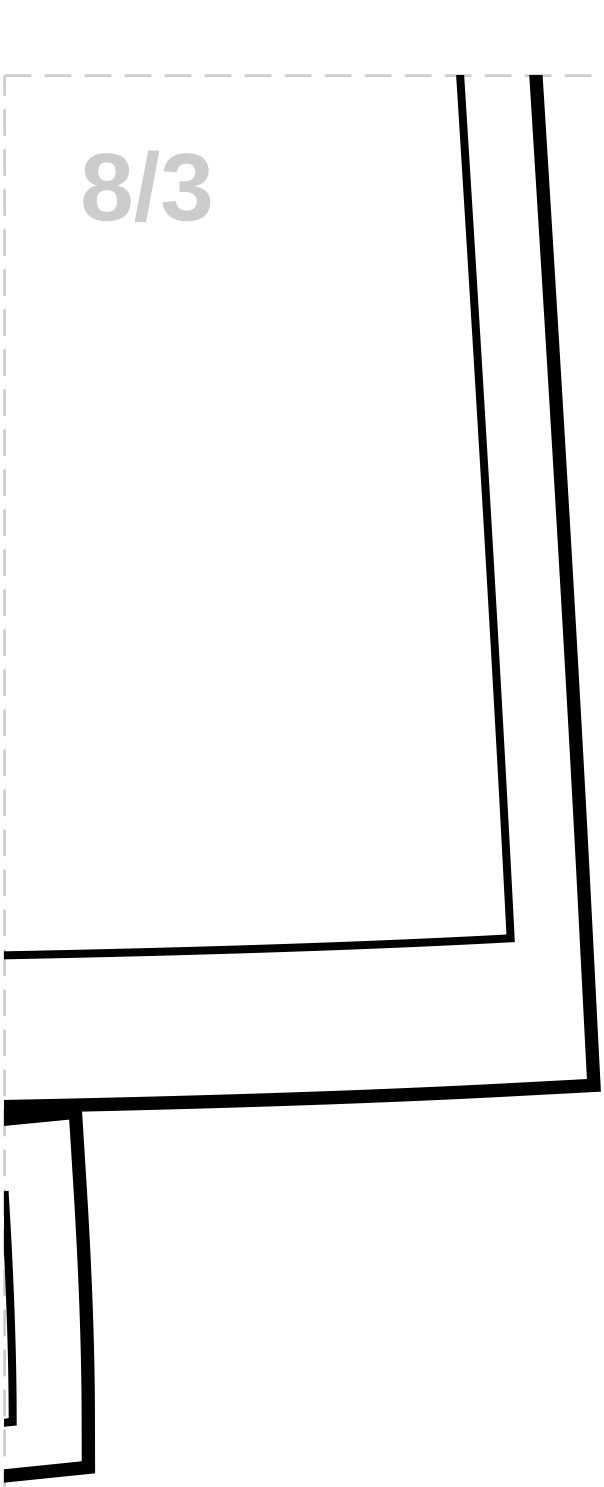

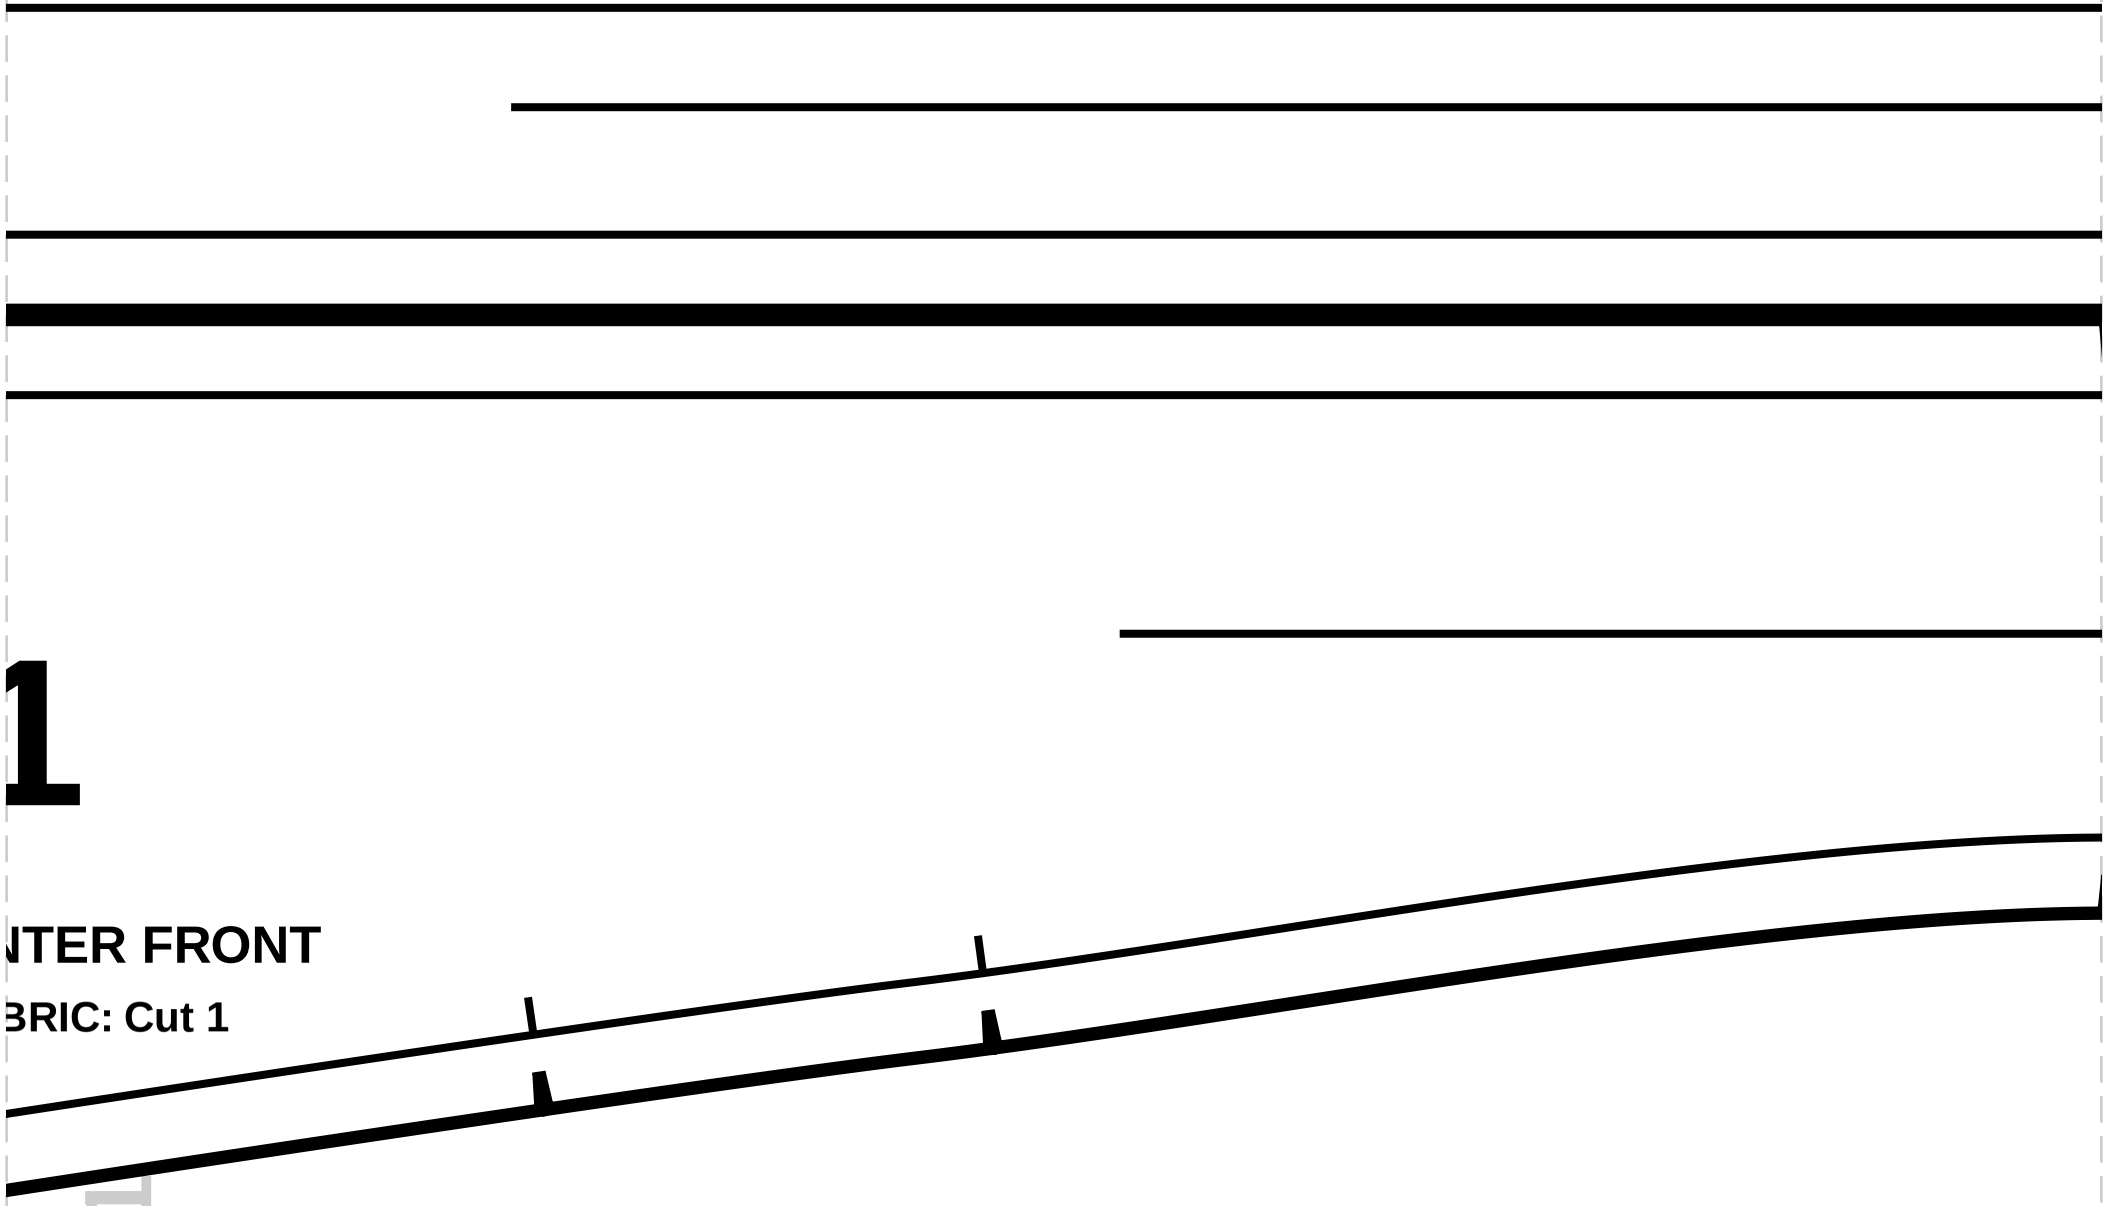



1


NTER FRONT

BRIC: Cut 1

9/1

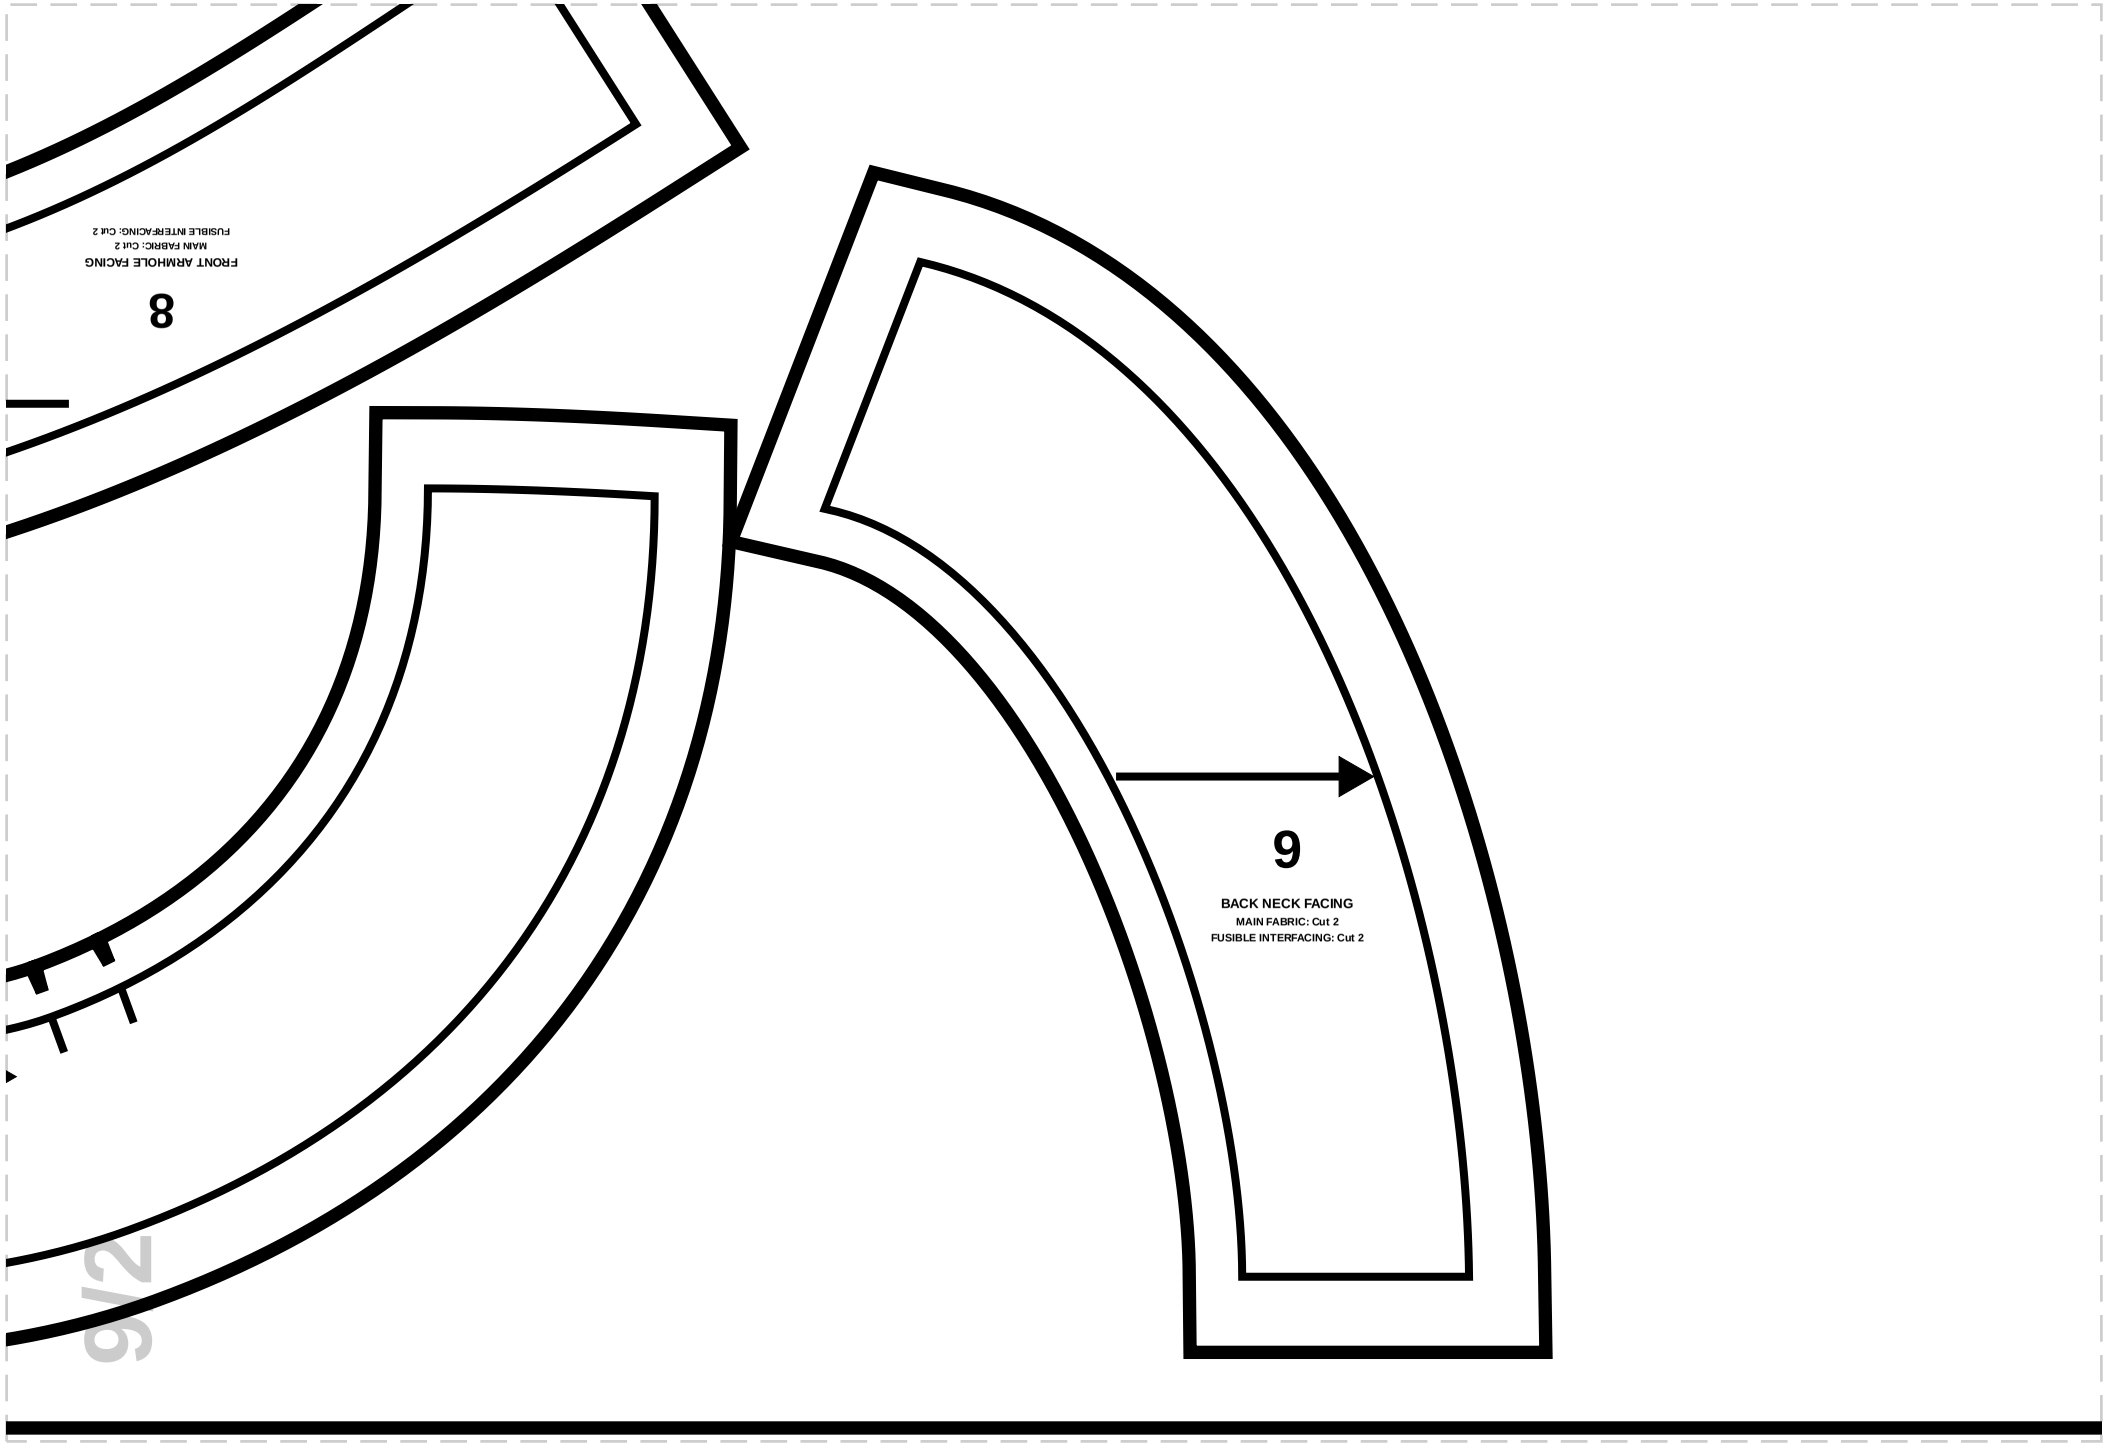

FRONT ARMHOLE FACING
MAIN FABRIC: Cut 2
FUSIBLE INTERFACING: Cut 2
8
9
BACK NECK FACING
MAIN FABRIC: Cut 2
FUSIBLE INTERFACING: Cut 2
9/2

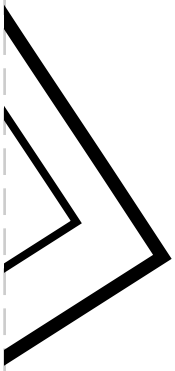

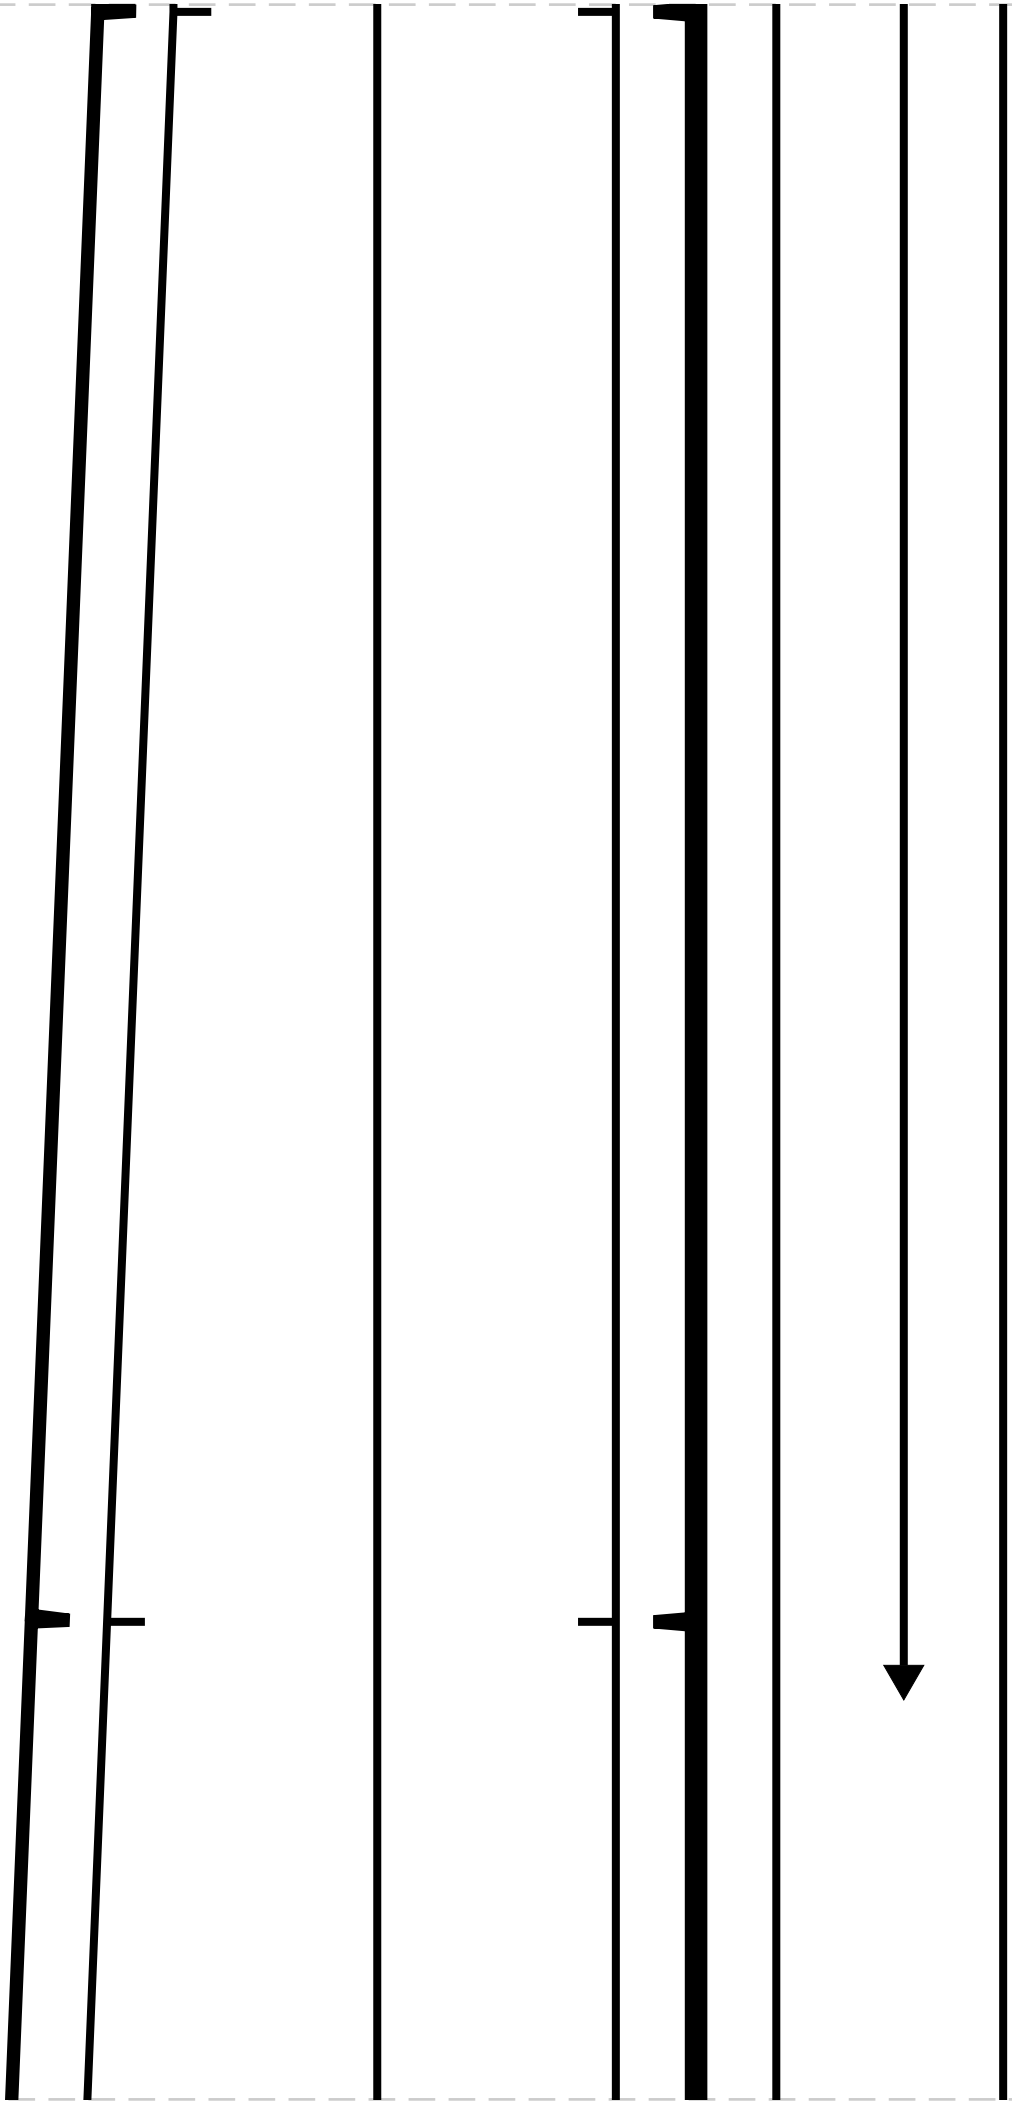

10/2

10/3

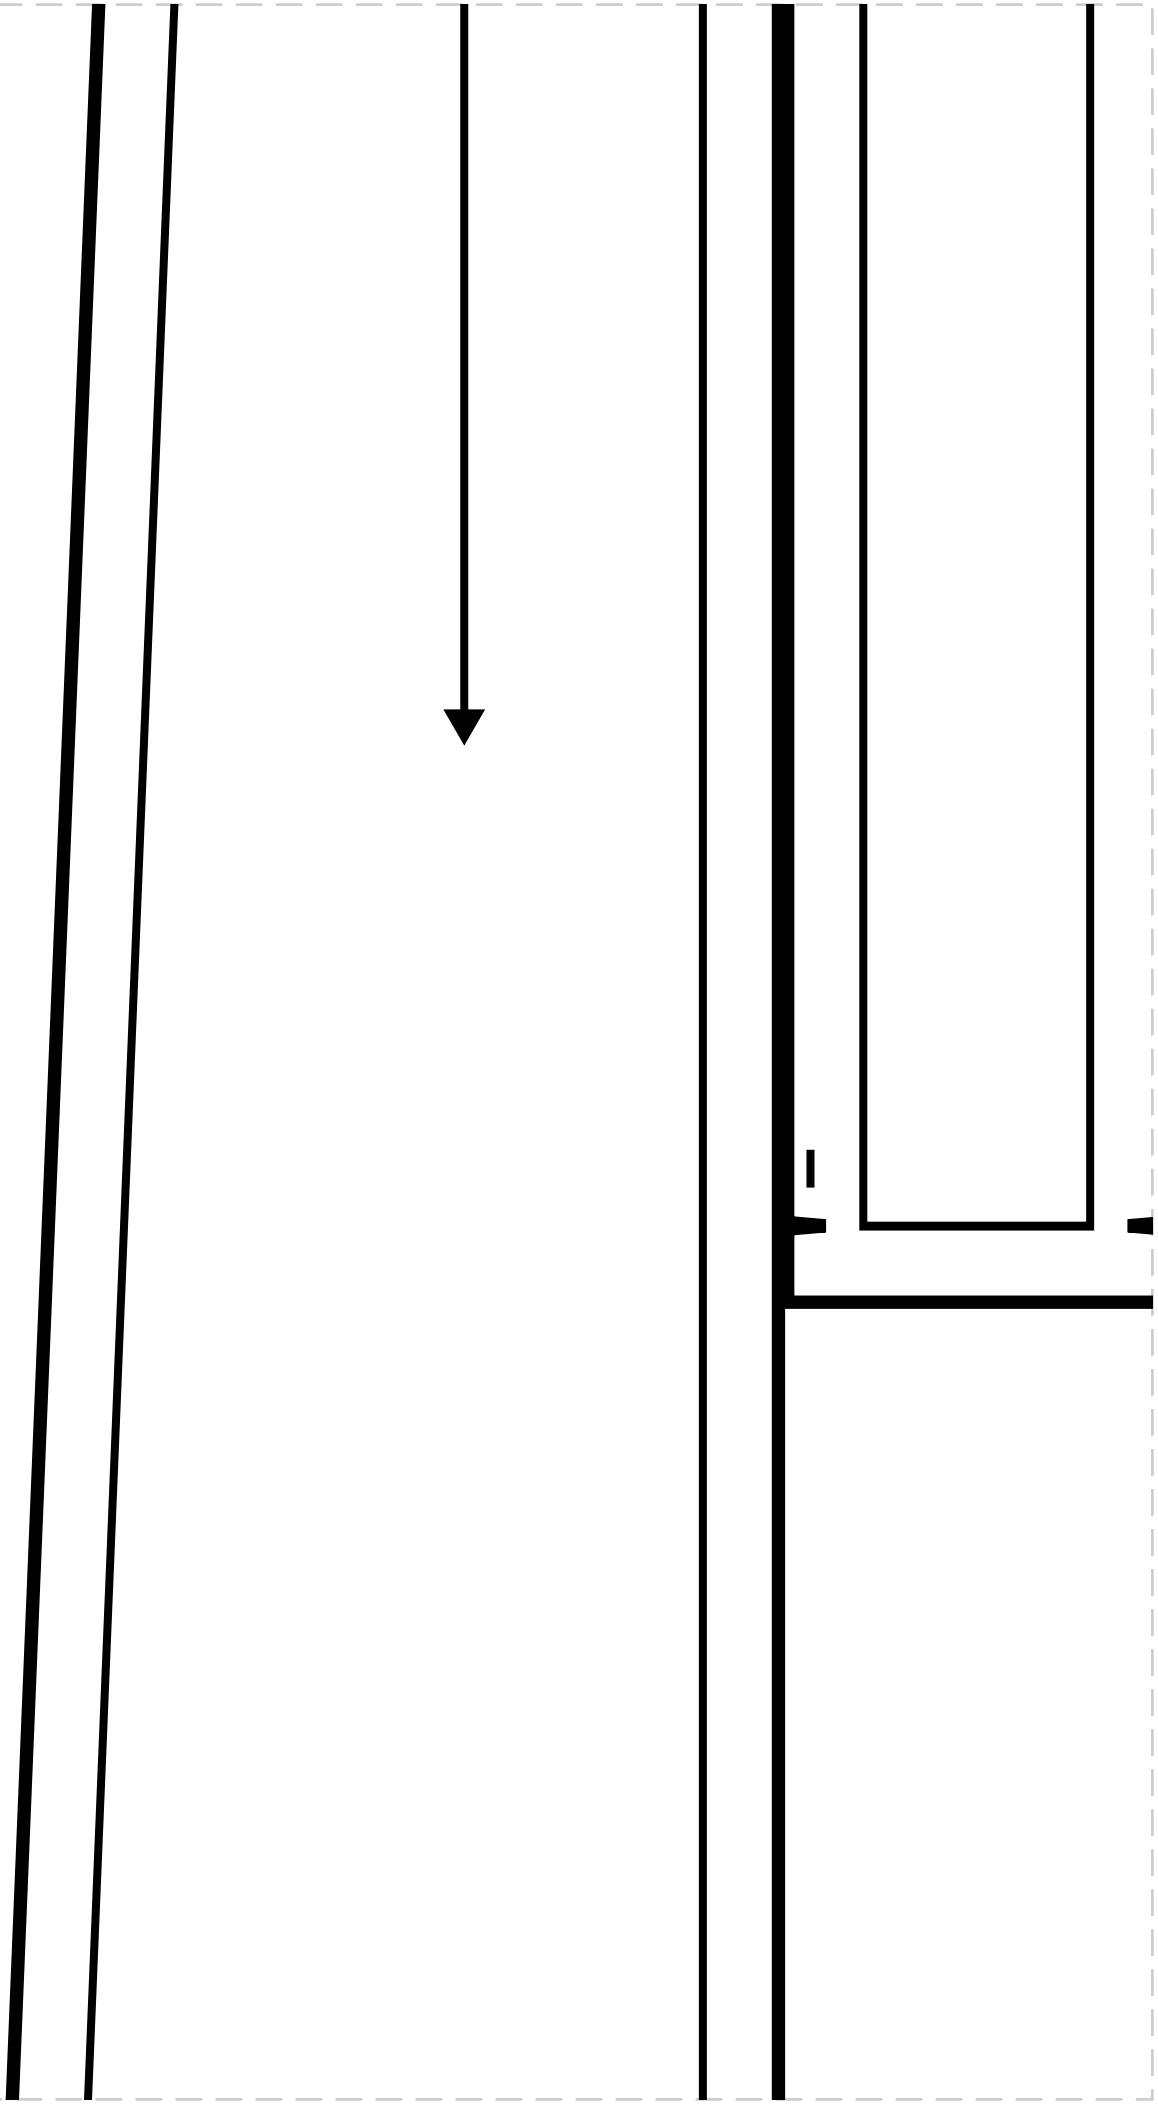

11/2

11/3



12/3