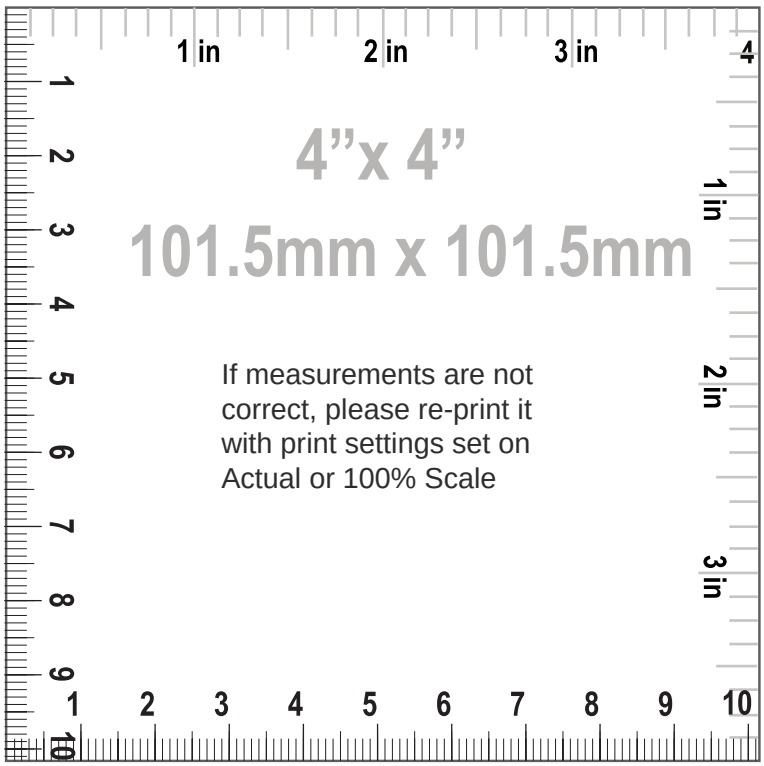
Print this Calibration Test page first!

Size: Height: 114.3, Bust: 58.4, Waist: 54, Hips: 60.3
Pattern Name: -

Notes



How to print

Printing

Once your Calibration Test Page has been printed, measure the 4”x 4” (10cm) scale box with a ruler. If the lengths match, you can confidently print your pattern. If the rulers do not match, set your print settings to 100% or Actual and retry.

Cutting

Your printouts will always have a dashed border to perfectly match your sheets. Cut off the right edge of each page. Be careful not to cut beyond the dashed mark, otherwise your patterns will not align accurately.

Tapping

Group each sheet by the second number marked on each pate i.e. in a group 1, there are: 1/1, 2/1, 3/1, 4/1, etc. In a group 2: 1/2, 2/2 etc. 2. Place page 1/1 on top of the page 2/1, overlapping the right side edge. Match corners and crosses and secure with a pin or tape. Then use a scotch tape to permanently attach the sheets together.

Pattern Name: -
Seam Allowance: 1 (3/8 in)

Pattern pieces:

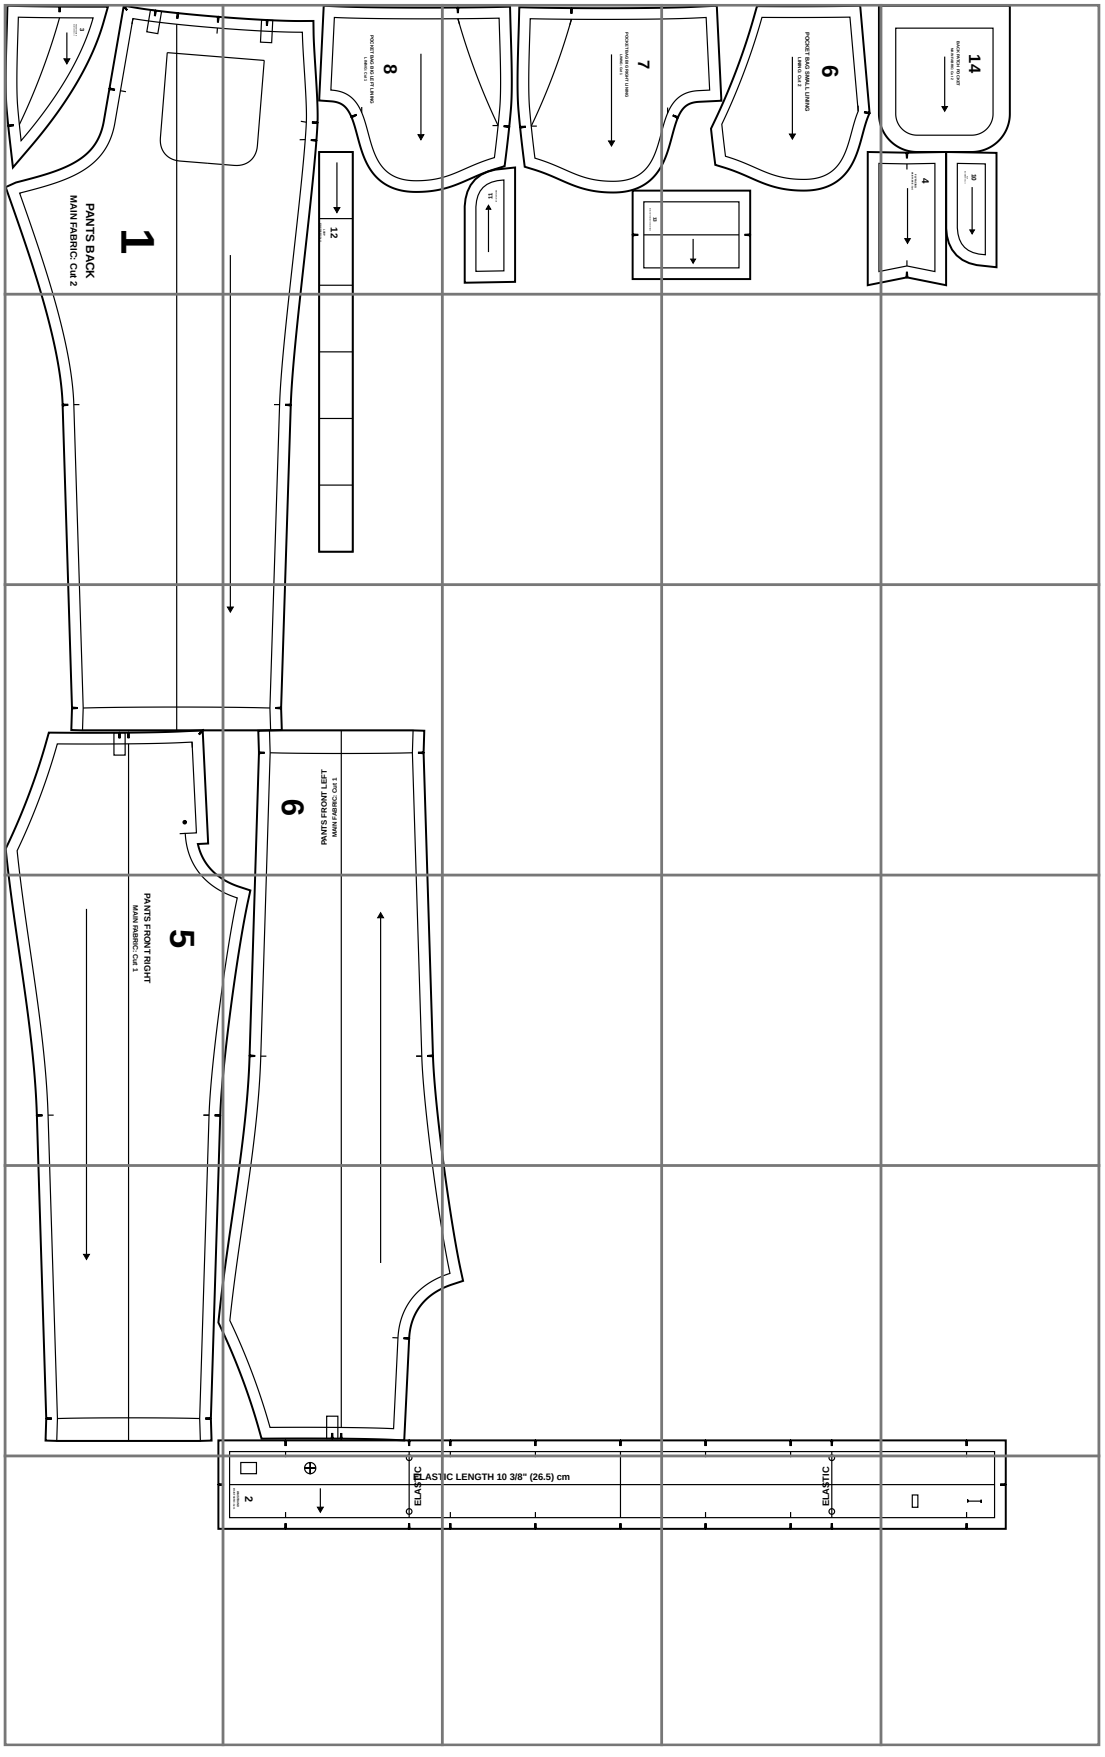
1. "PANTS BACK", MAIN FABRIC: Cut 2
2. "WAISTBAND", MAIN FABRIC: Cut 1
3. "POCKET FACING", MAIN FABRIC: Cut 2
4. "FLY FACING", MAIN FABRIC: Cut 1
5. "PANTS FRONT RIGHT", MAIN FABRIC: Cut 1
6. "POCKET BAG SMALL LINING", LINING: Cut 2
7. "POCKET BAG BIG RIGHT LINING", LINING: Cut 1
8. "POCKET BAG BIG LEFT LINING", LINING: Cut 1
9. "PANTS FRONT LEFT", MAIN FABRIC: Cut 1
10. "FLY", MAIN FABRIC: Cut 1
11. "FLY INTERFACING", FUSIBLE INTERFACING: Cut 1
12. "LOOP", MAIN FABRIC: Cut 1
13. "FUSIBLE INTERFACING FOR WAISTBAND", FUSIBLE INTERFACING: Cut 2
14. "BACK PATCH POCKET", MAIN FABRIC: Cut 2

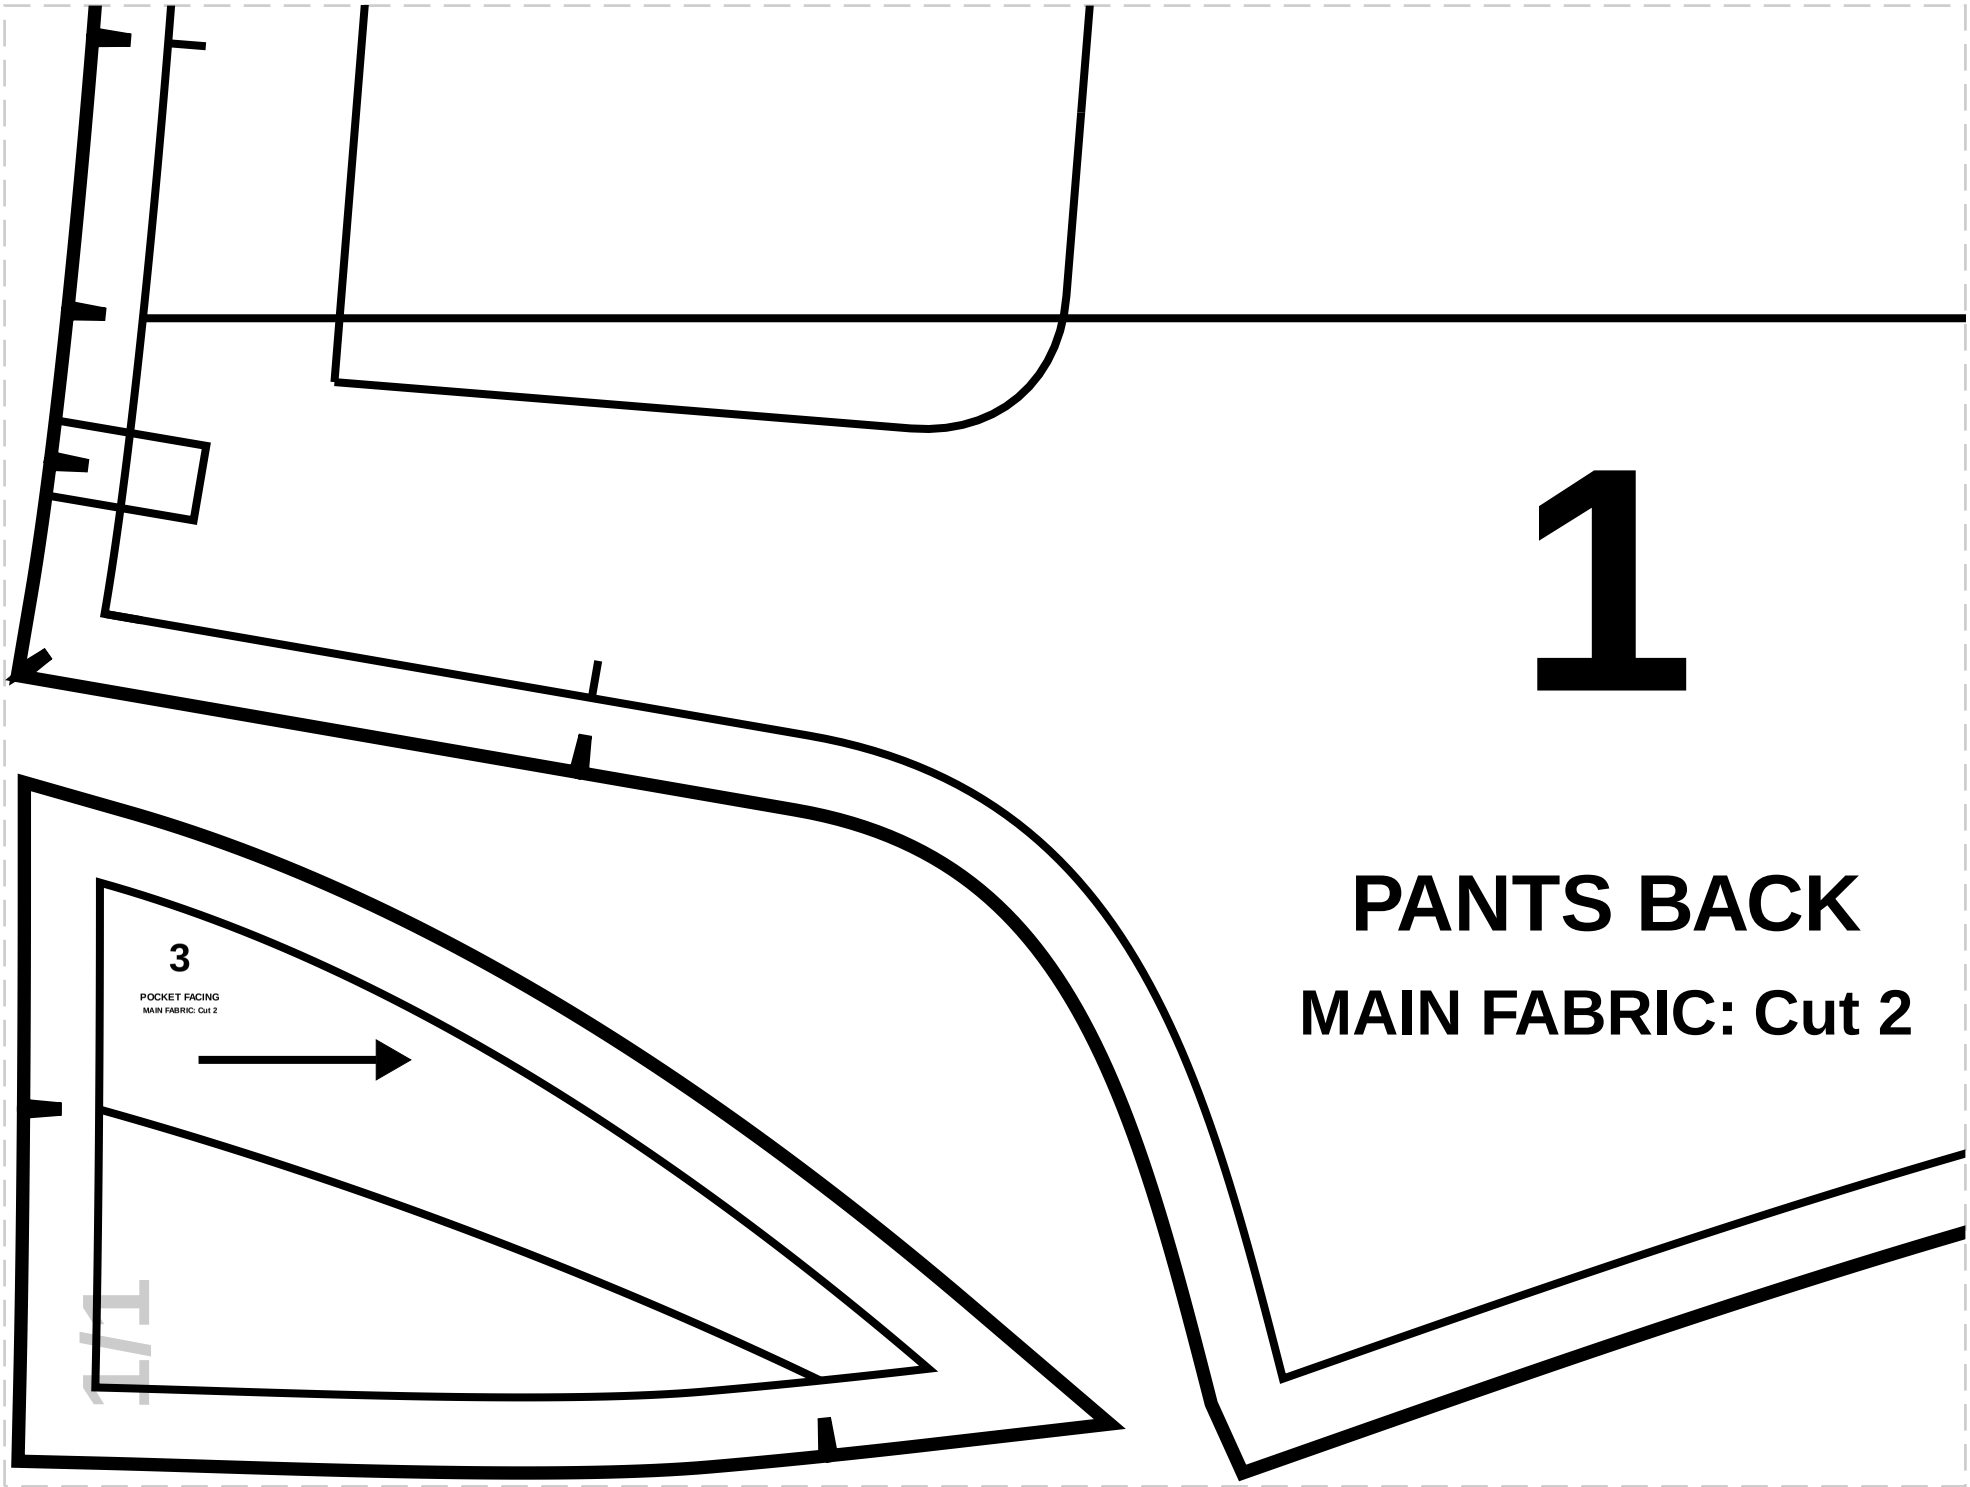
Pattern Specs (Circumferences are divided by 2):

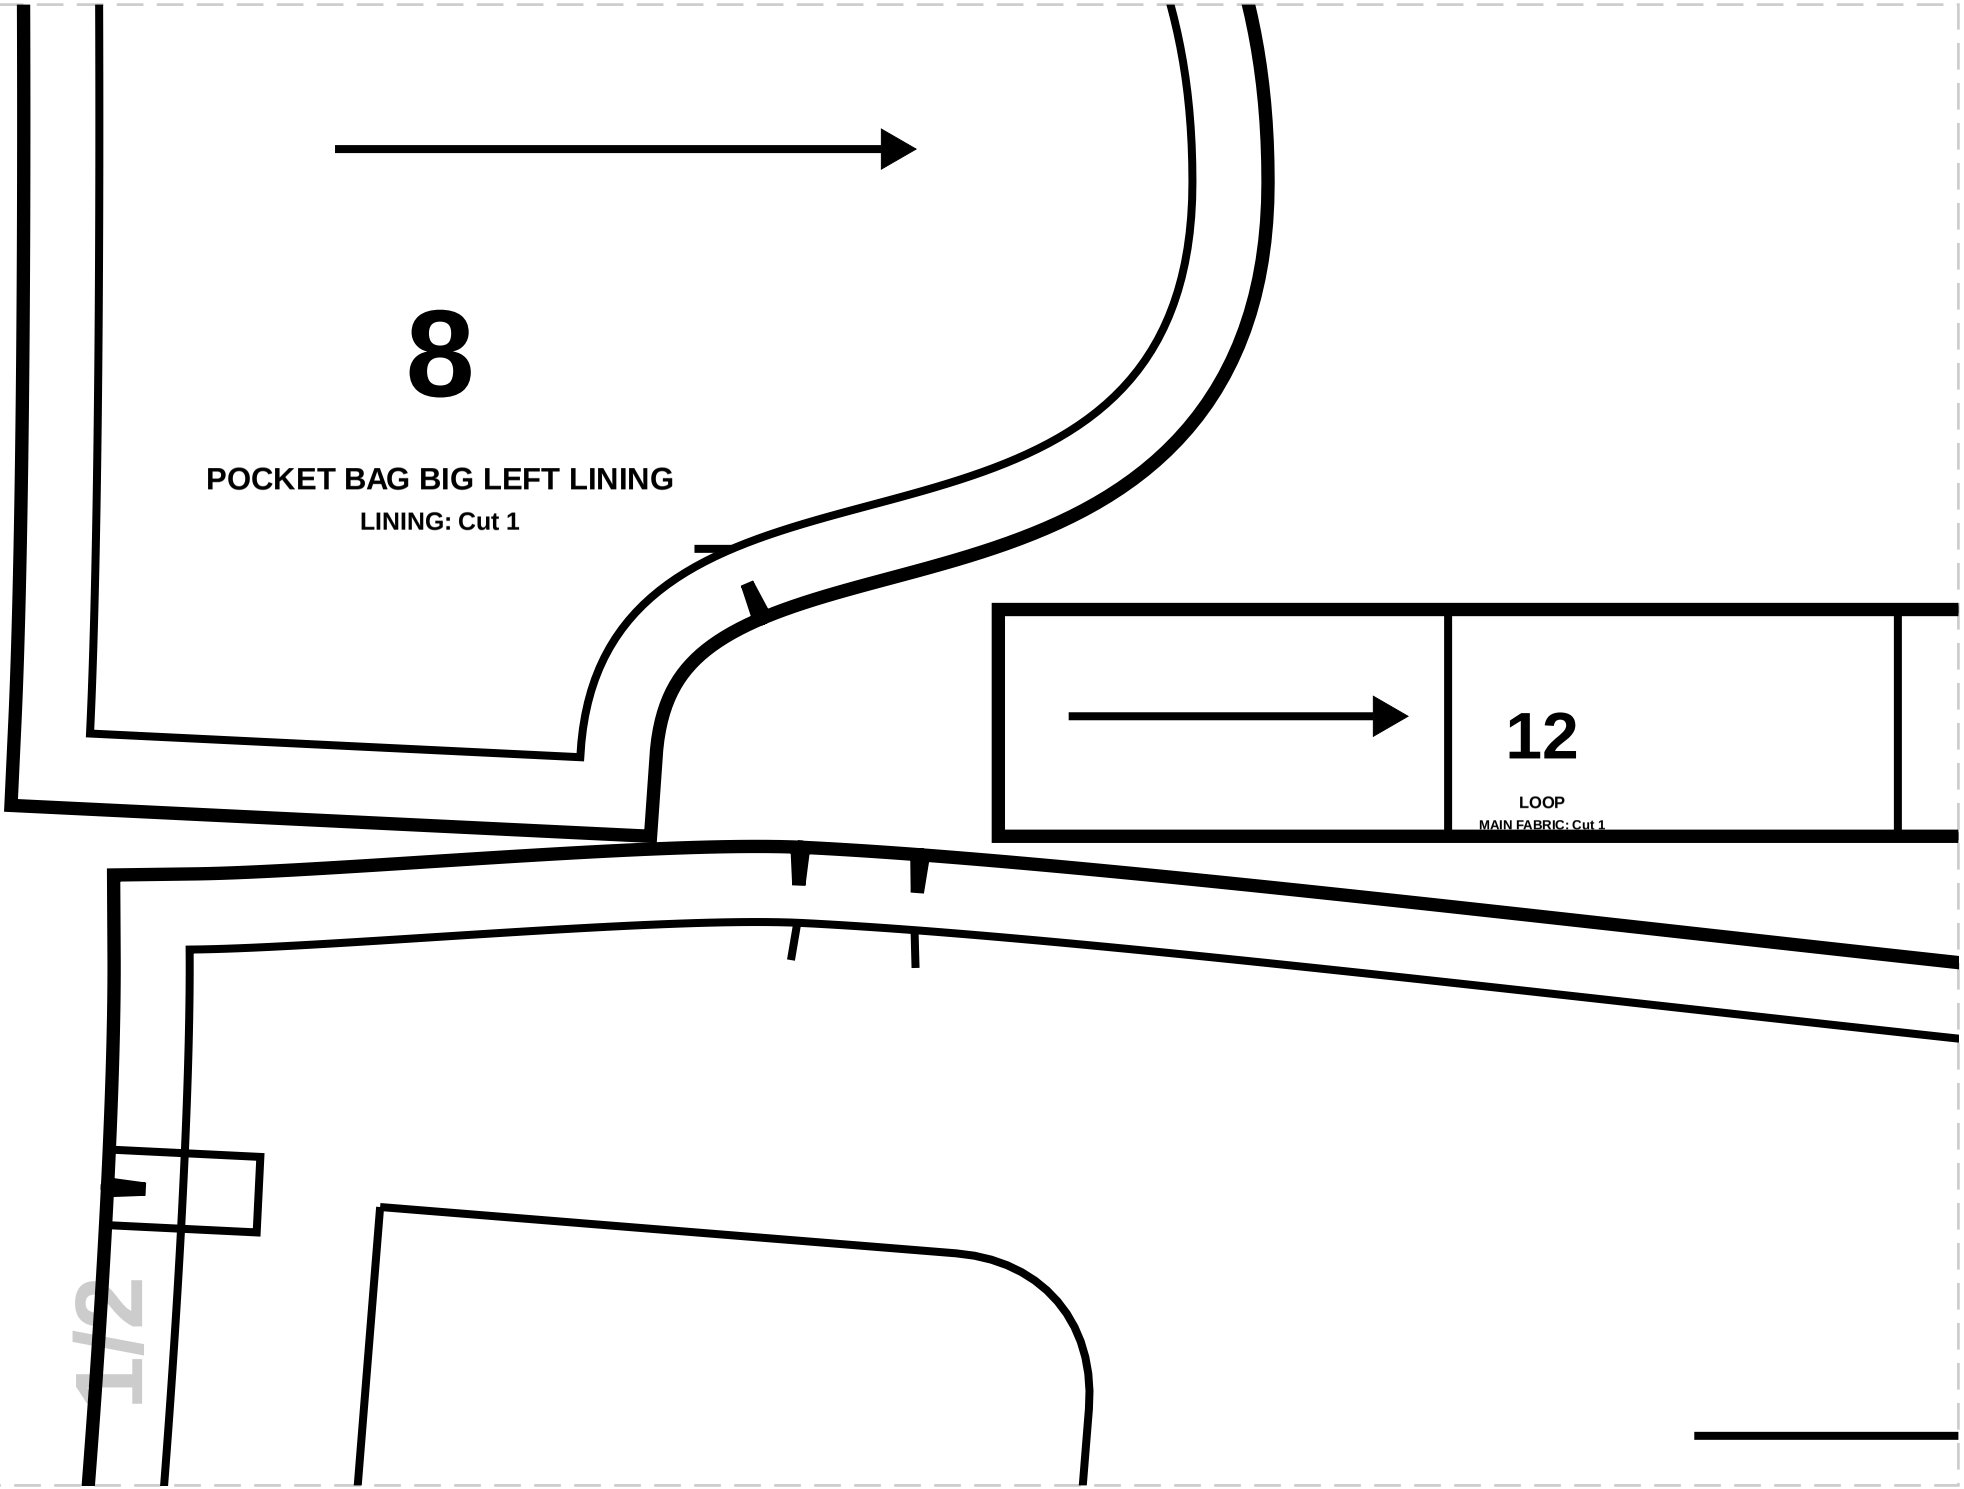
1. Hem max 3.00 none (1 1/8 in)
2. Seam allowance max 2.00 none (3/4 in)
3. Seam allowance p max 1.50 none (5/8 in)
4. Waistband partly elastic width 2.65 cm (1 in)
5. Waistband width 2.95 cm (1 1/8 in)
6. Stretch factor 1.00 none (3/8 in)
7. Stretch factor horizontal 1.00 none (3/8 in)
8. Stretch factor vertical 1.00 none (3/8 in)
9. Pocket bag height 14.46 cm (5 3/4 in)
10. Pocket side seam 9.59 cm (3 3/4 in)
11. Pocket waist seam 3.68 cm (1 1/2 in)
12. Back pocket entry length 8.69 cm (3 3/8 in)
13. Side seam back pocket position 3.55 cm (1 3/8 in)
14. Waist to back pocket length 2.56 cm (1 in)
15. Waist 55.00 cm (21 5/8 in)
16. Hips 64.52 cm (25 3/8 in)

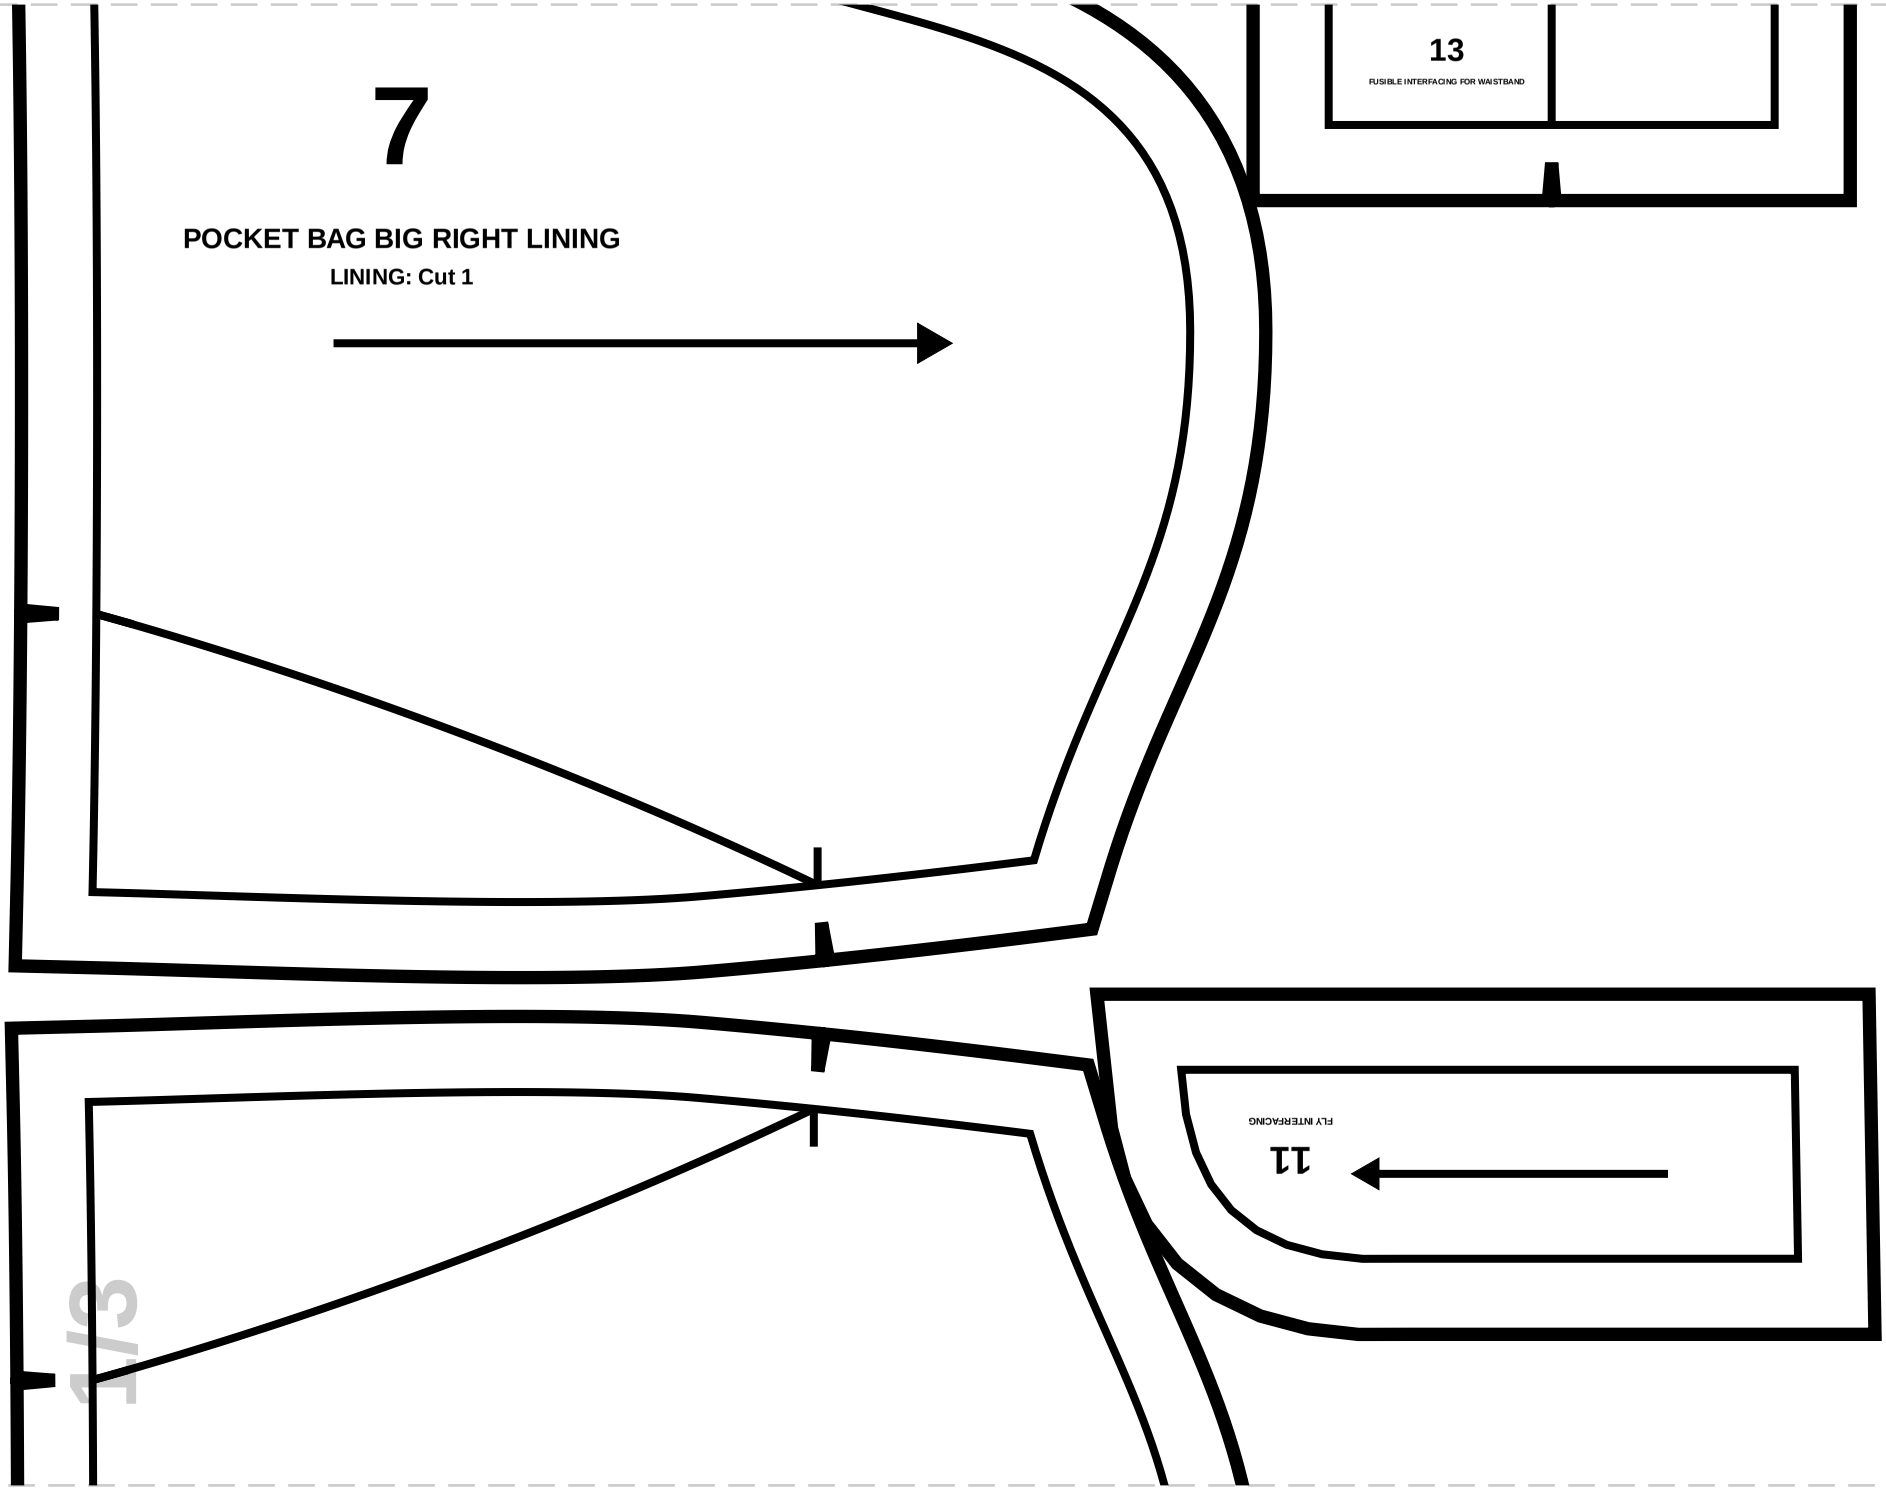
17. Thigh 44.30 cm (17 1/2 in)
18. Knee 32.76 cm (12 7/8 in)
19. Bottom opening 29.38 cm (11 5/8 in)
20. Front rise 16.04 cm (6 3/8 in)
21. Back rise 20.77 cm (8 1/8 in)
22. Crotch height 17.46 cm (6 7/8 in)
23. Inseam length 46.69 cm (18 3/8 in)
24. Pants side seam length 50.90 cm (20 in)
25. Fly zipper length 8.12 cm (3 1/4 in)
26. Pocket bag height 13.68 cm (5 3/8 in)
27. Waistband length 59.83 cm (23 1/2 in)
28. Waistband partly elastic length 26.50 cm (10 3/8 in)
29. Waistband button diameter 1.00 cm (3/8 in)
30. Waistband buttons quantity 1.00 pc
31. Hook quantity 1.00 pc
32. Eye quantity 1.00 pc
33. Seam allowance poc max 3.00 none (1 1/8 in)
34. Hem poc max 6.00 none (2 3/8 in)
35. Back pocket height 9.56 cm (3 3/4 in)

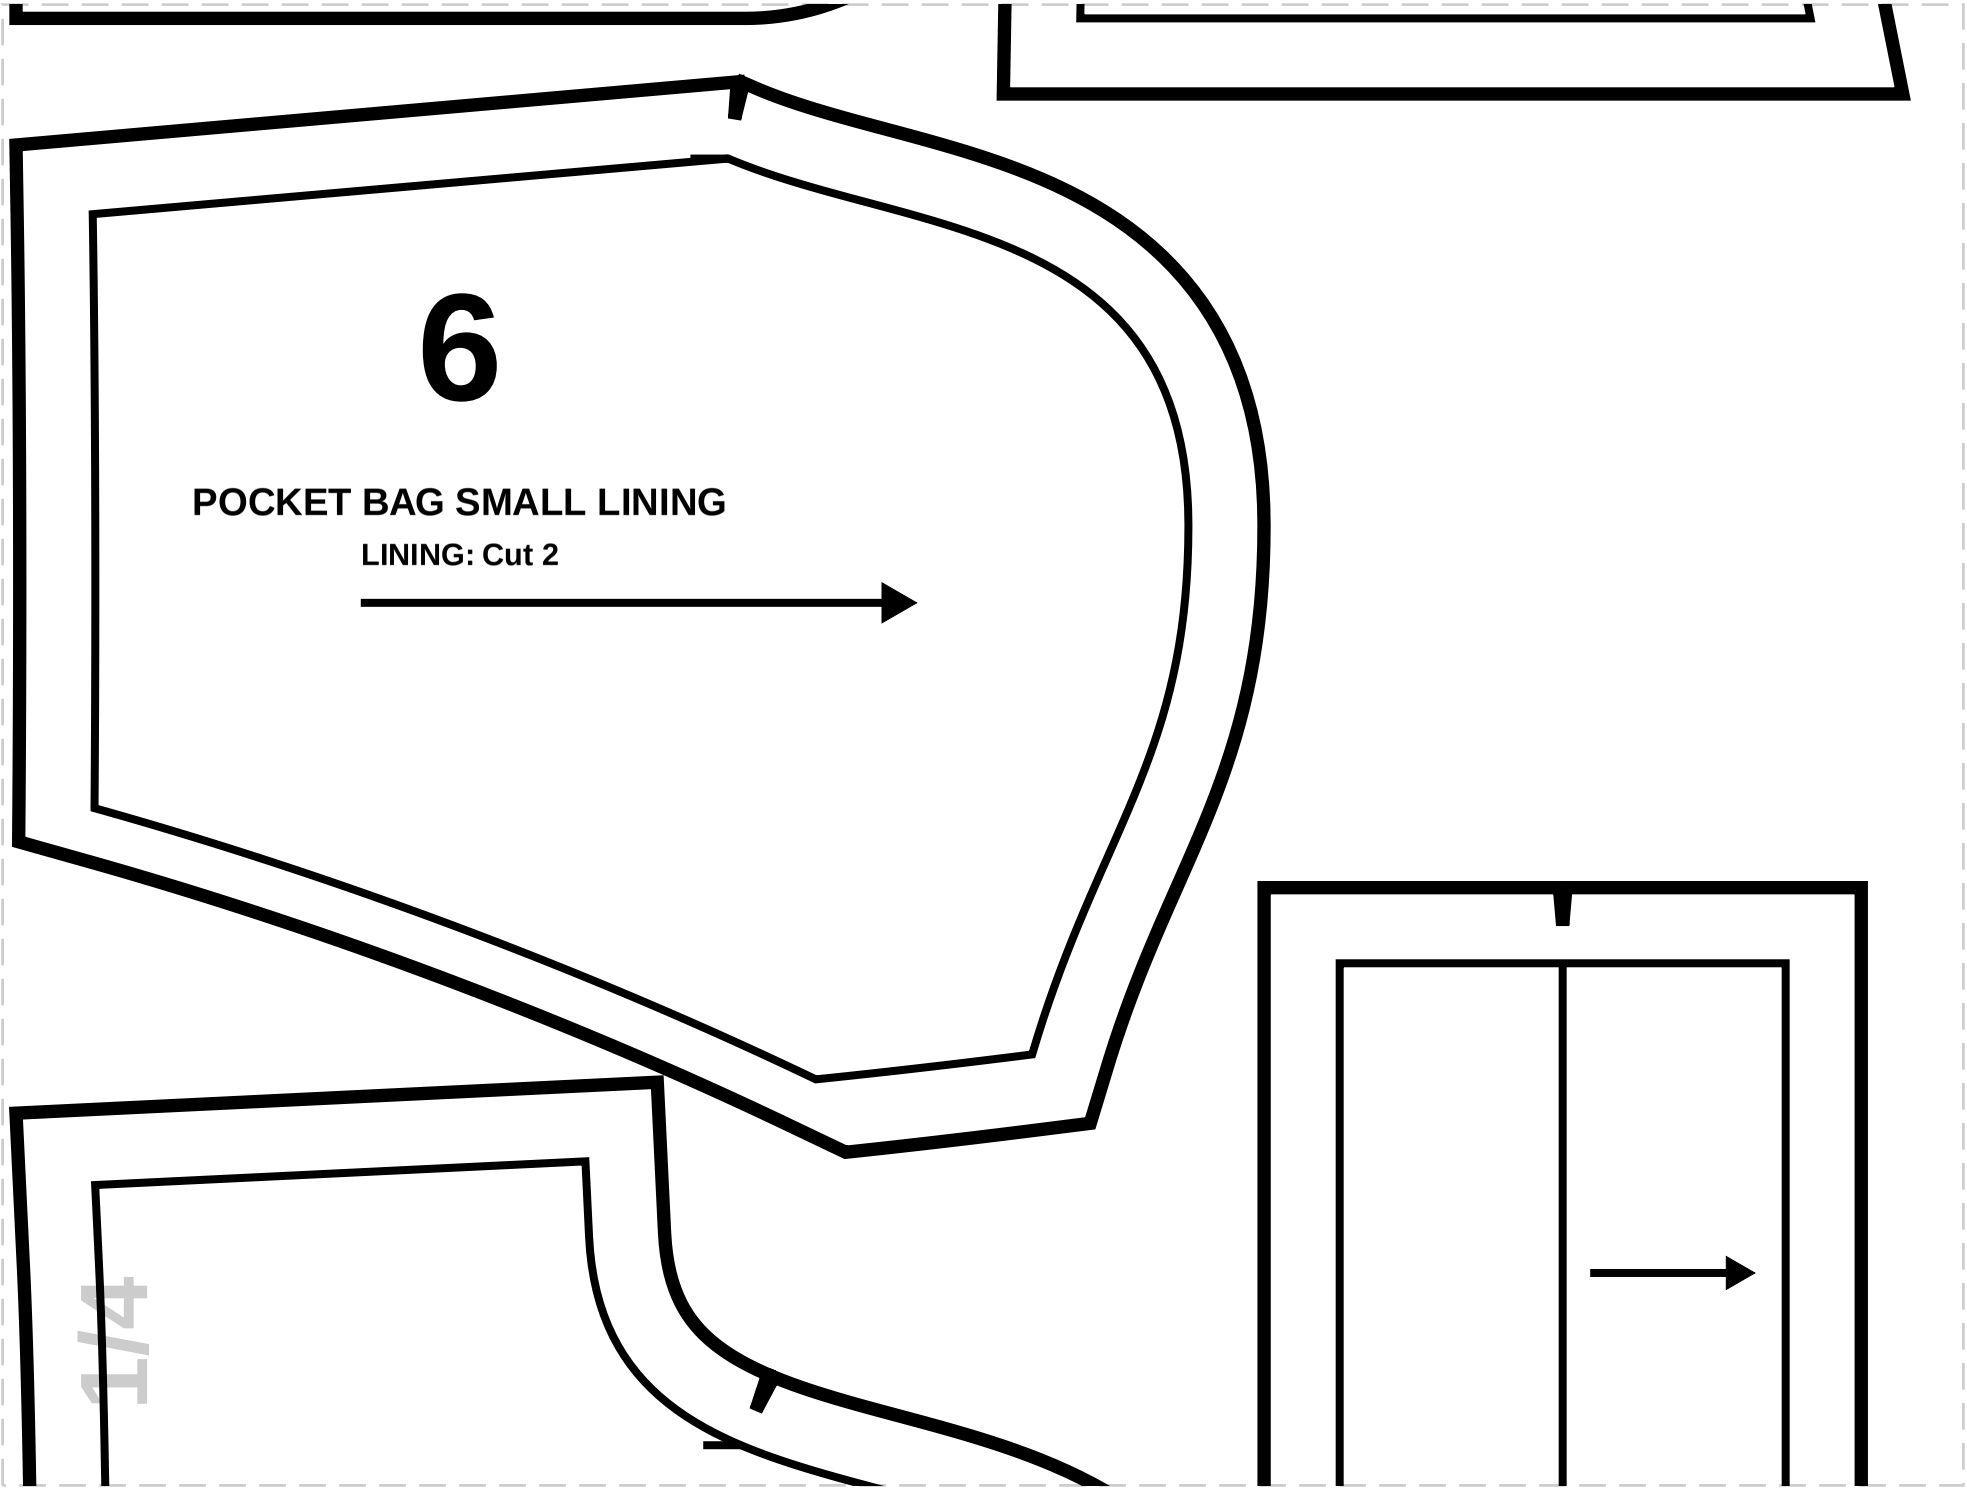
Paper Size: LETTER;
Print Actual Size (100% Scale);

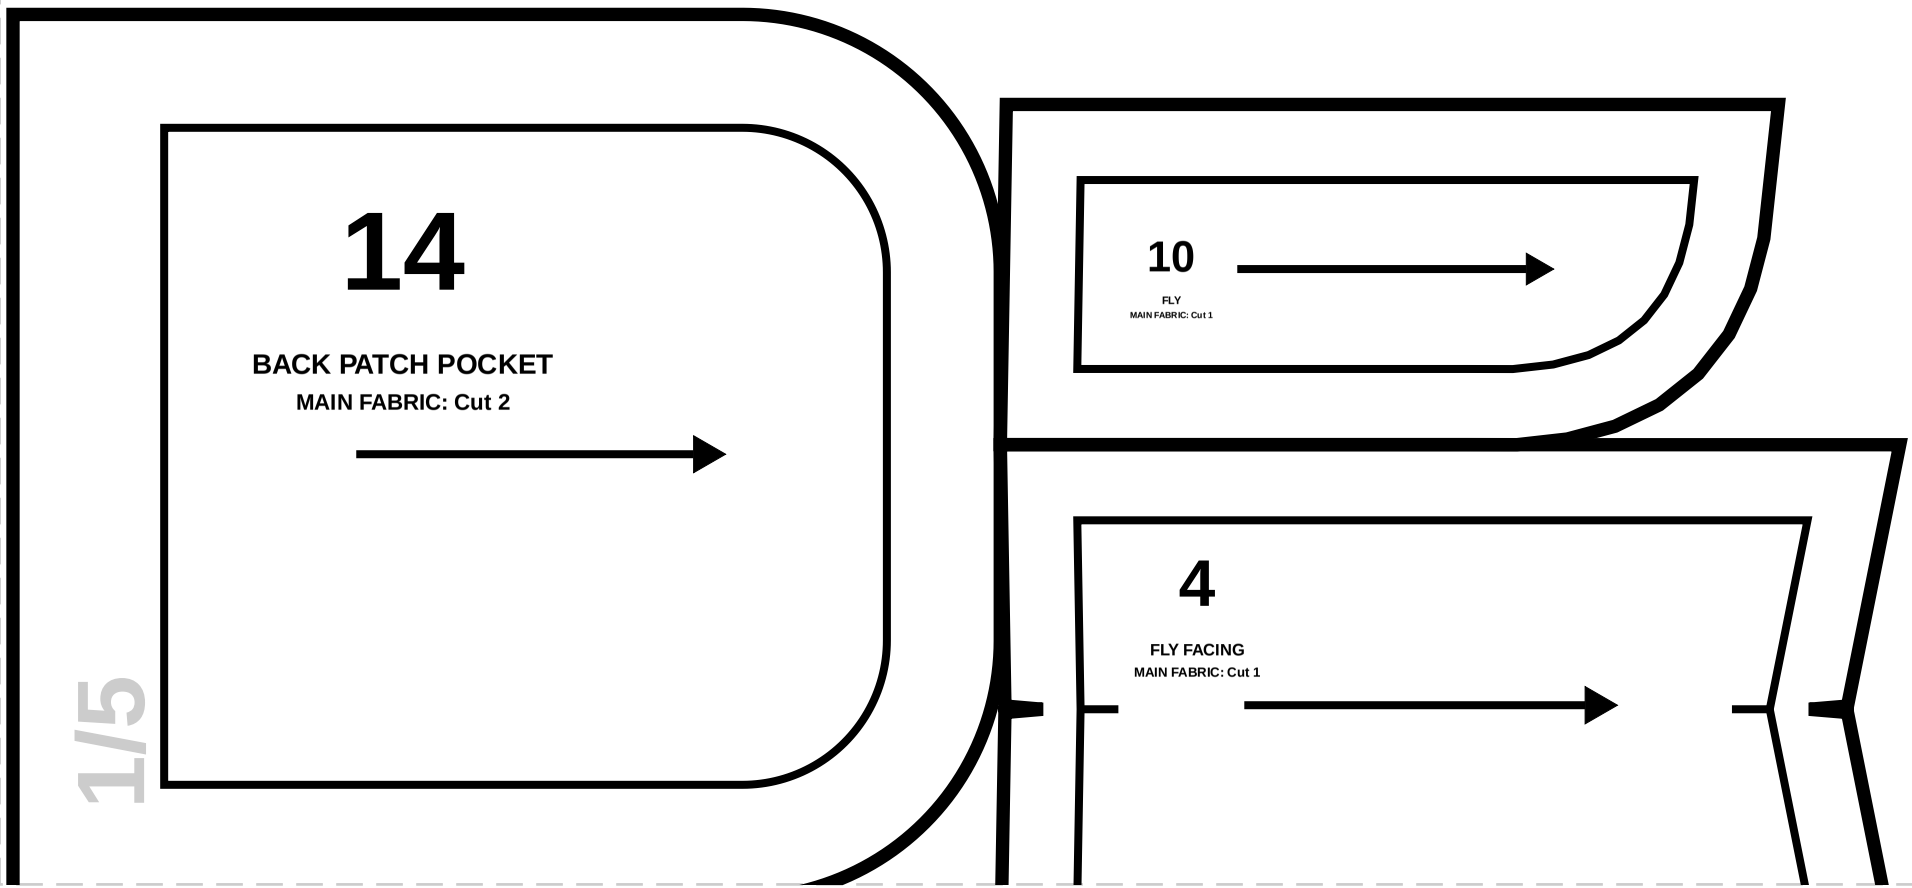


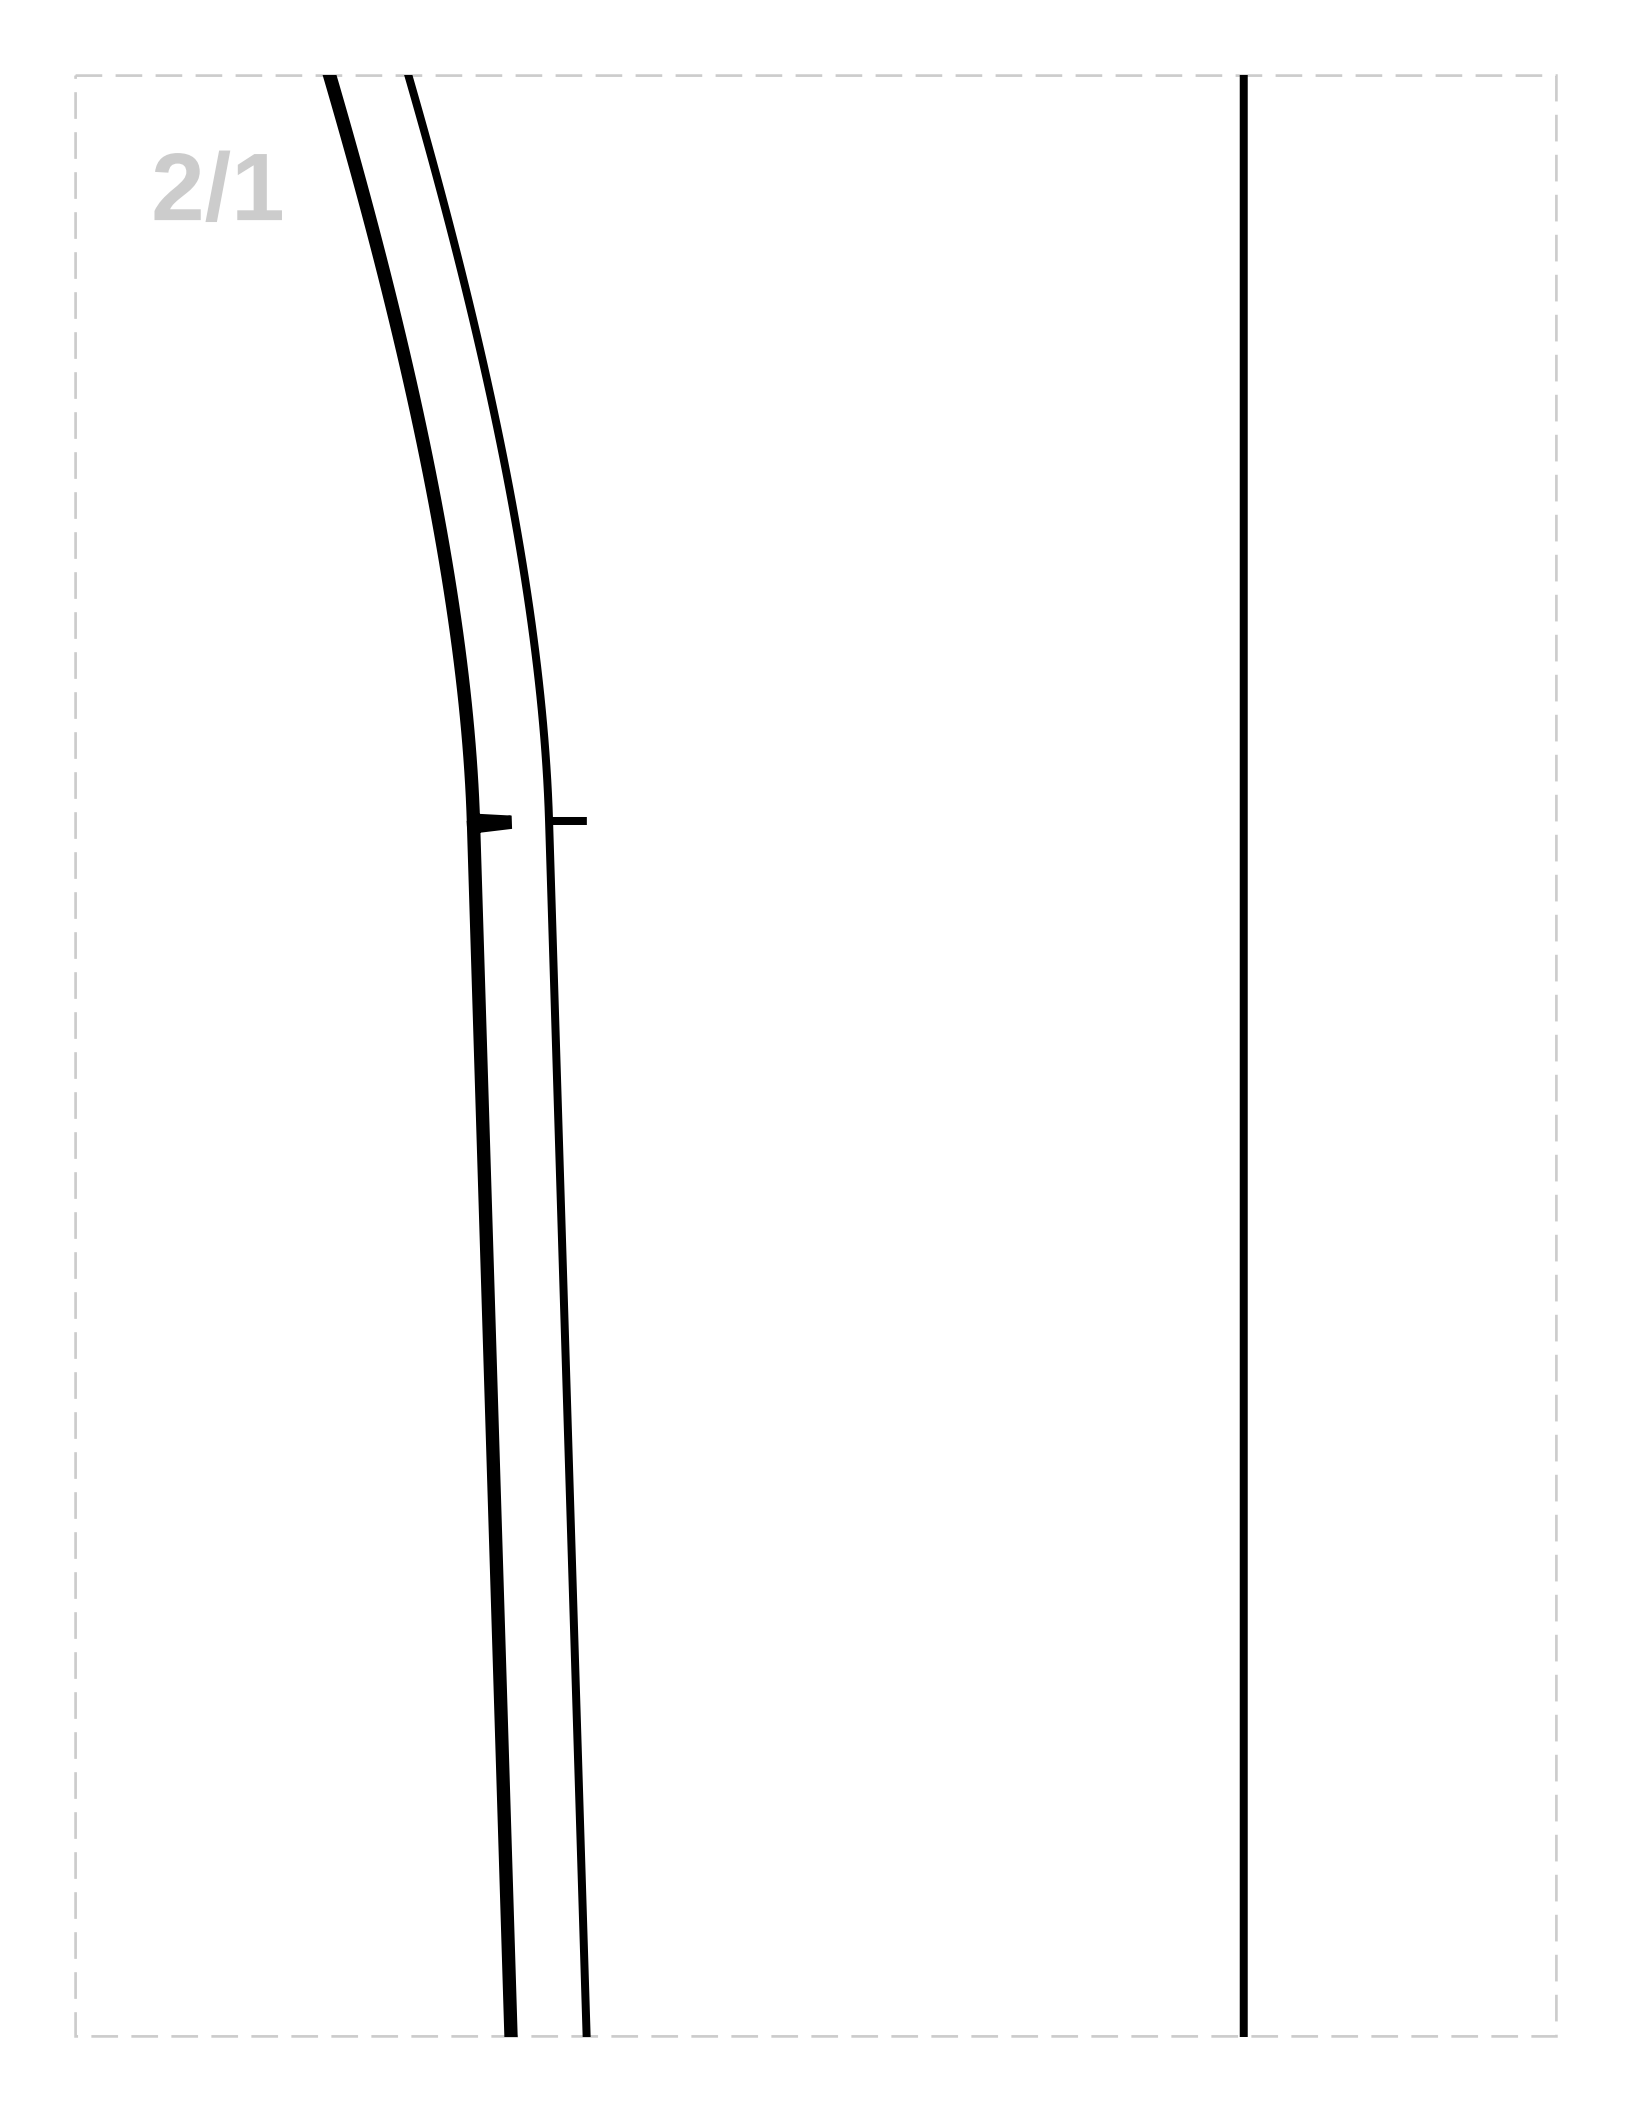

1
PANTS BACK
MAIN FABRIC: Cut 2
3
POCKET FACING
MAIN FABRIC: Cut 2

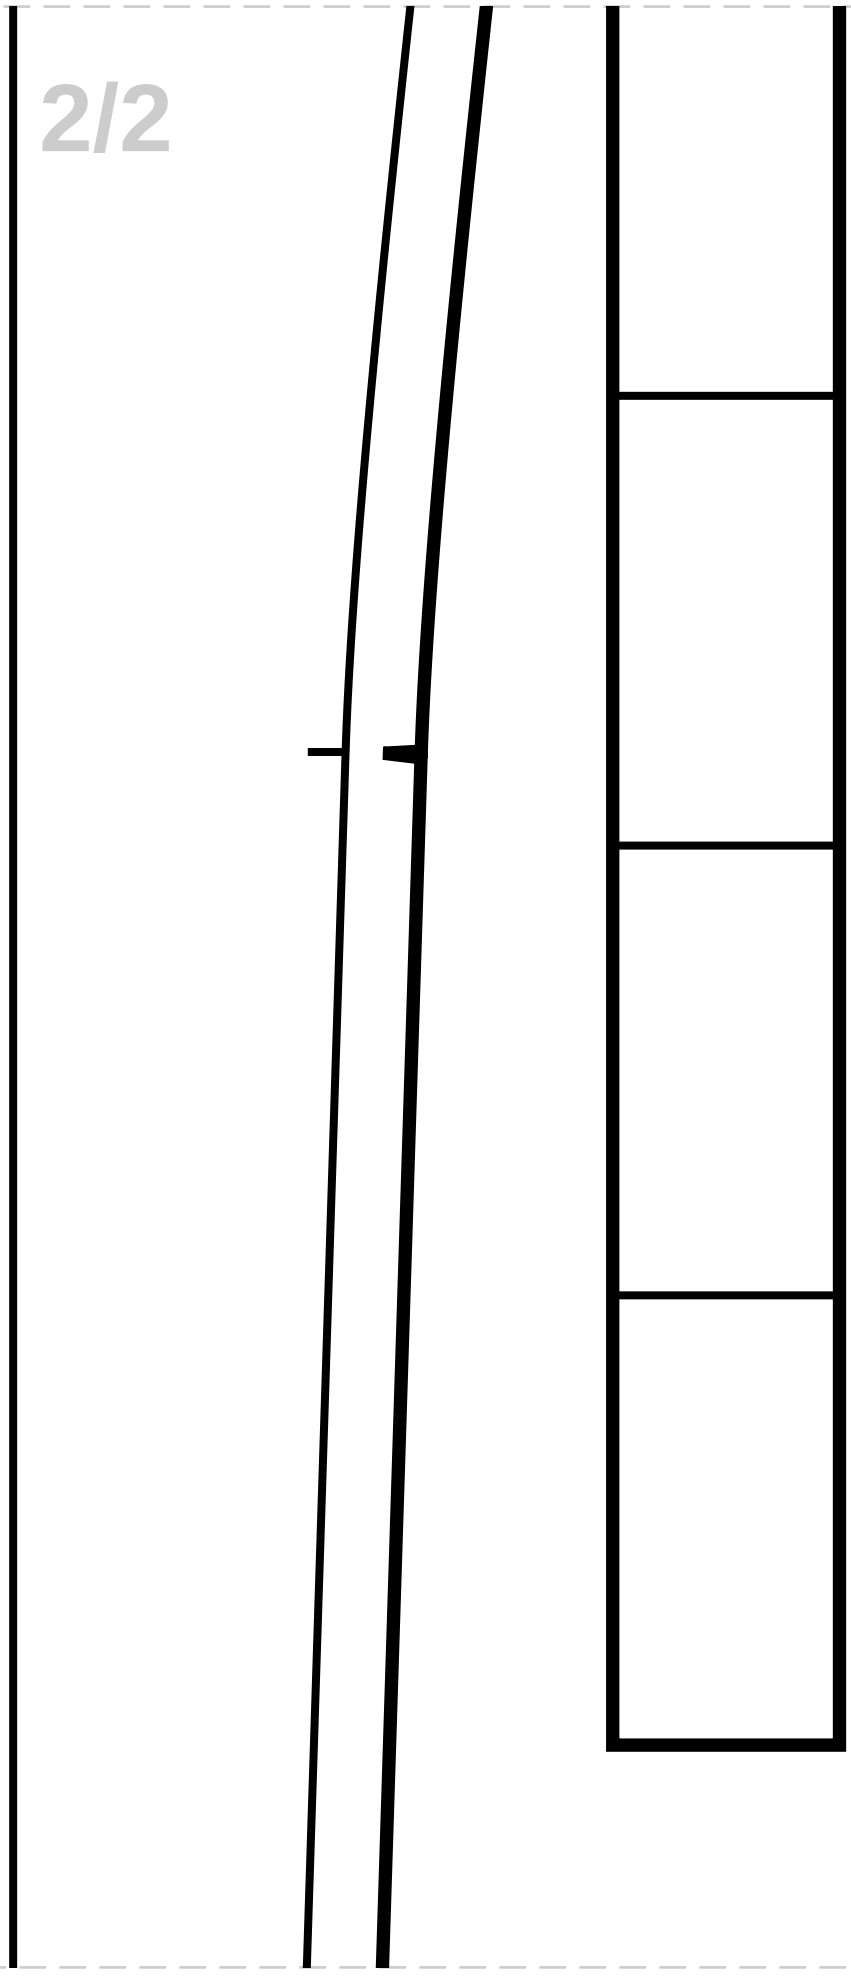

8
POCKET BAG BIG LEFT LINING
LINING: Cut 1
12
LOOP
MAIN FABRIC: Cut 1
1/2

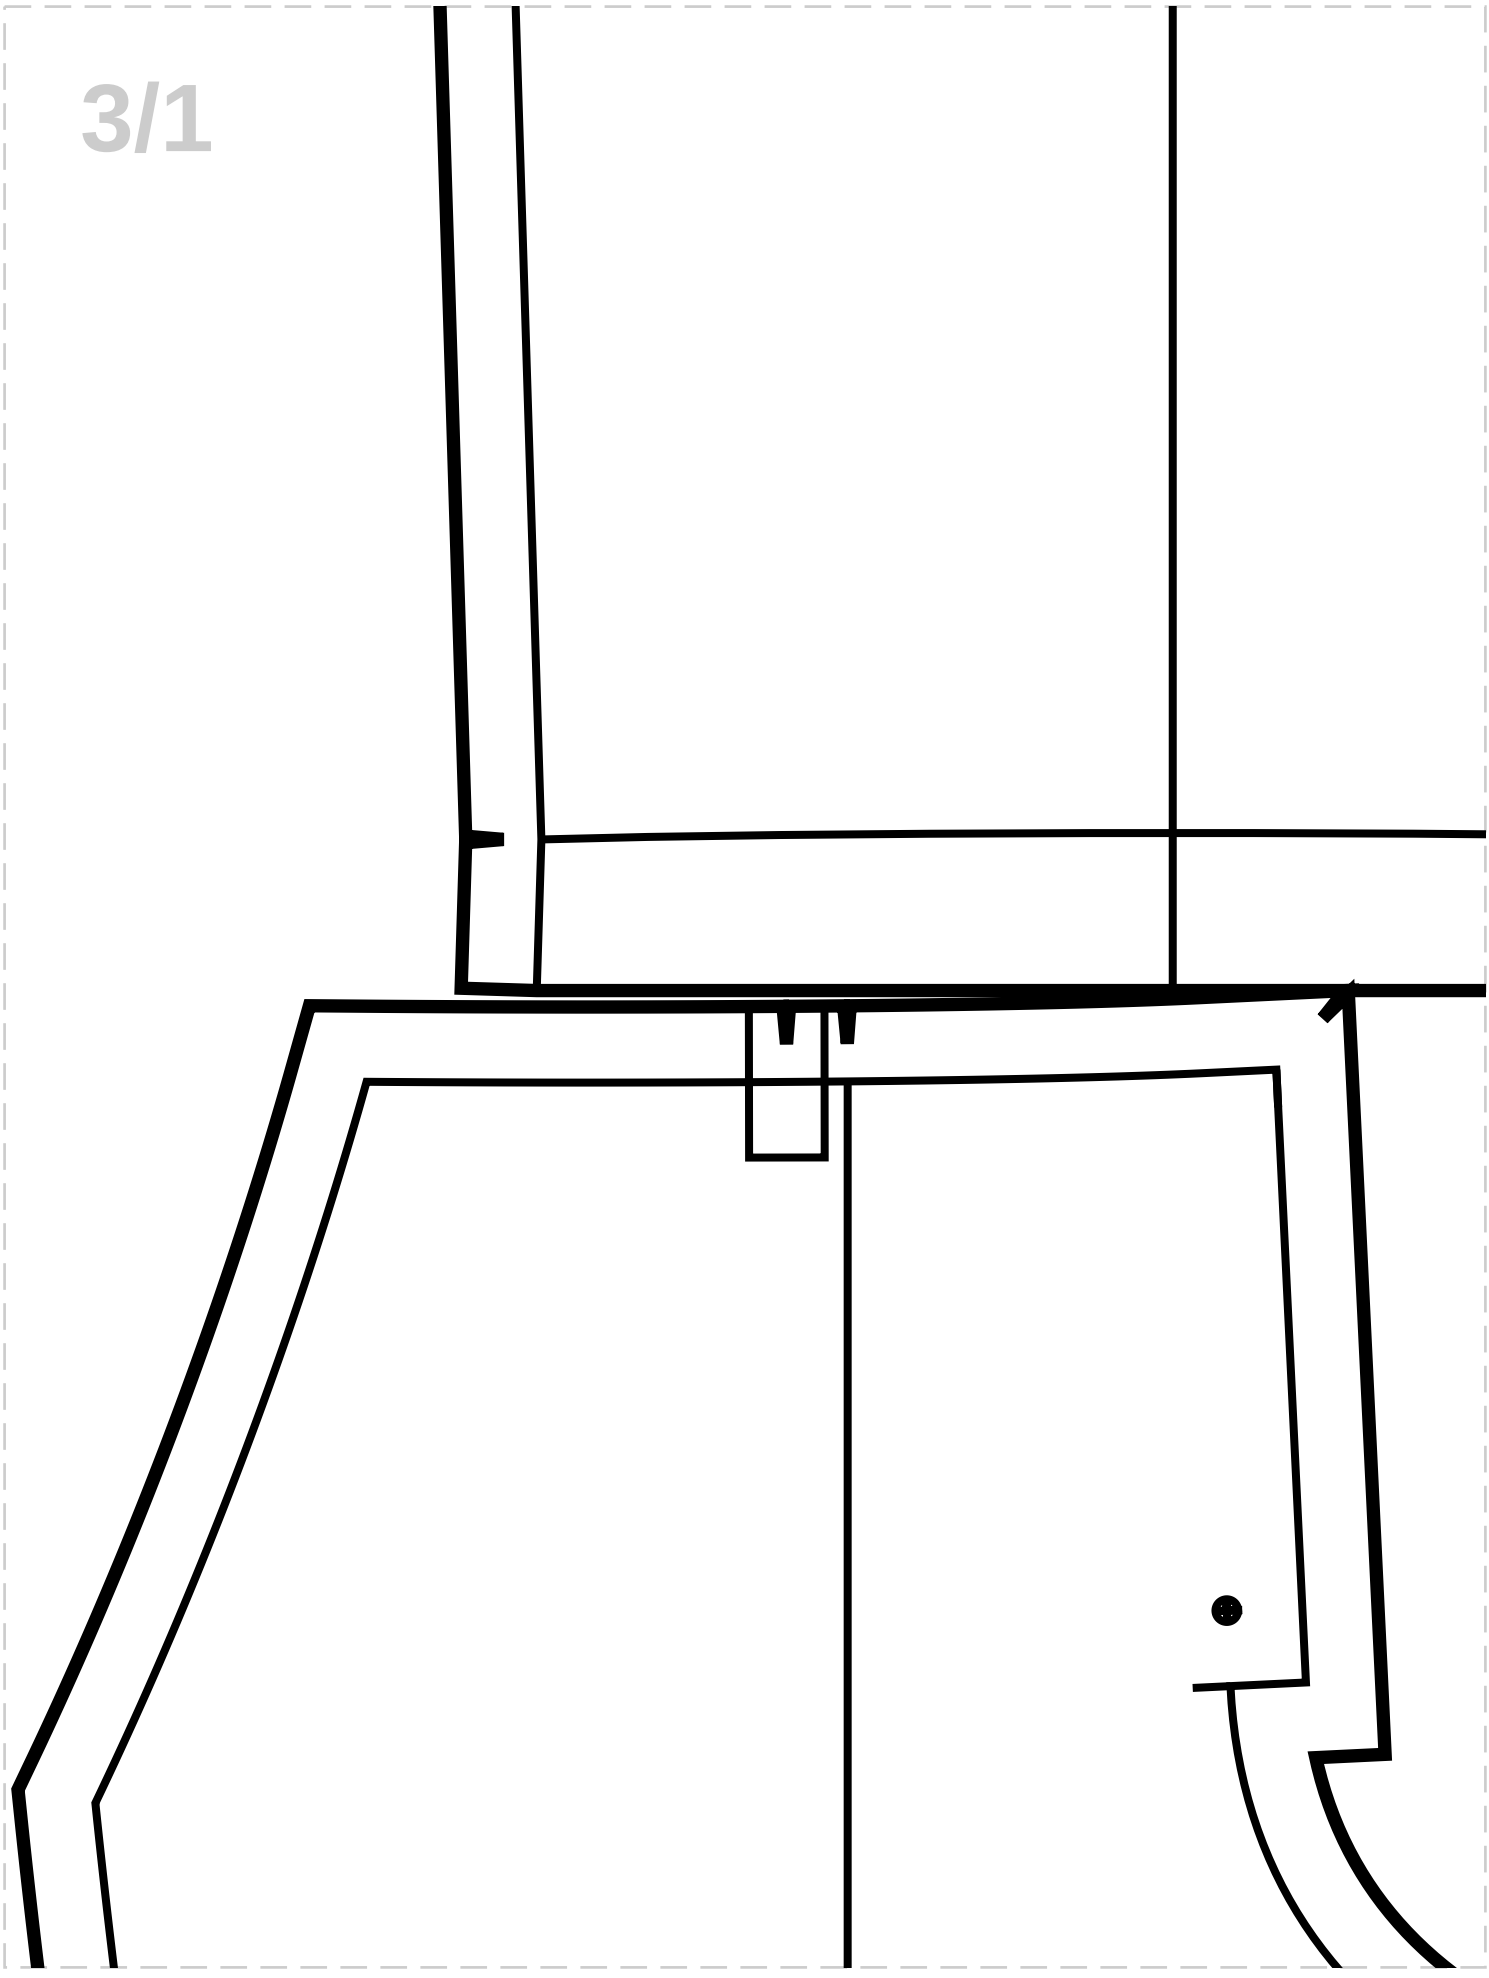

7
POCKET BAG BIG RIGHT LINING
LINING: Cut 1
13
FUSIBLE INTERFACING FOR WAISTBAND
11
FLY INTERFACING
1/3

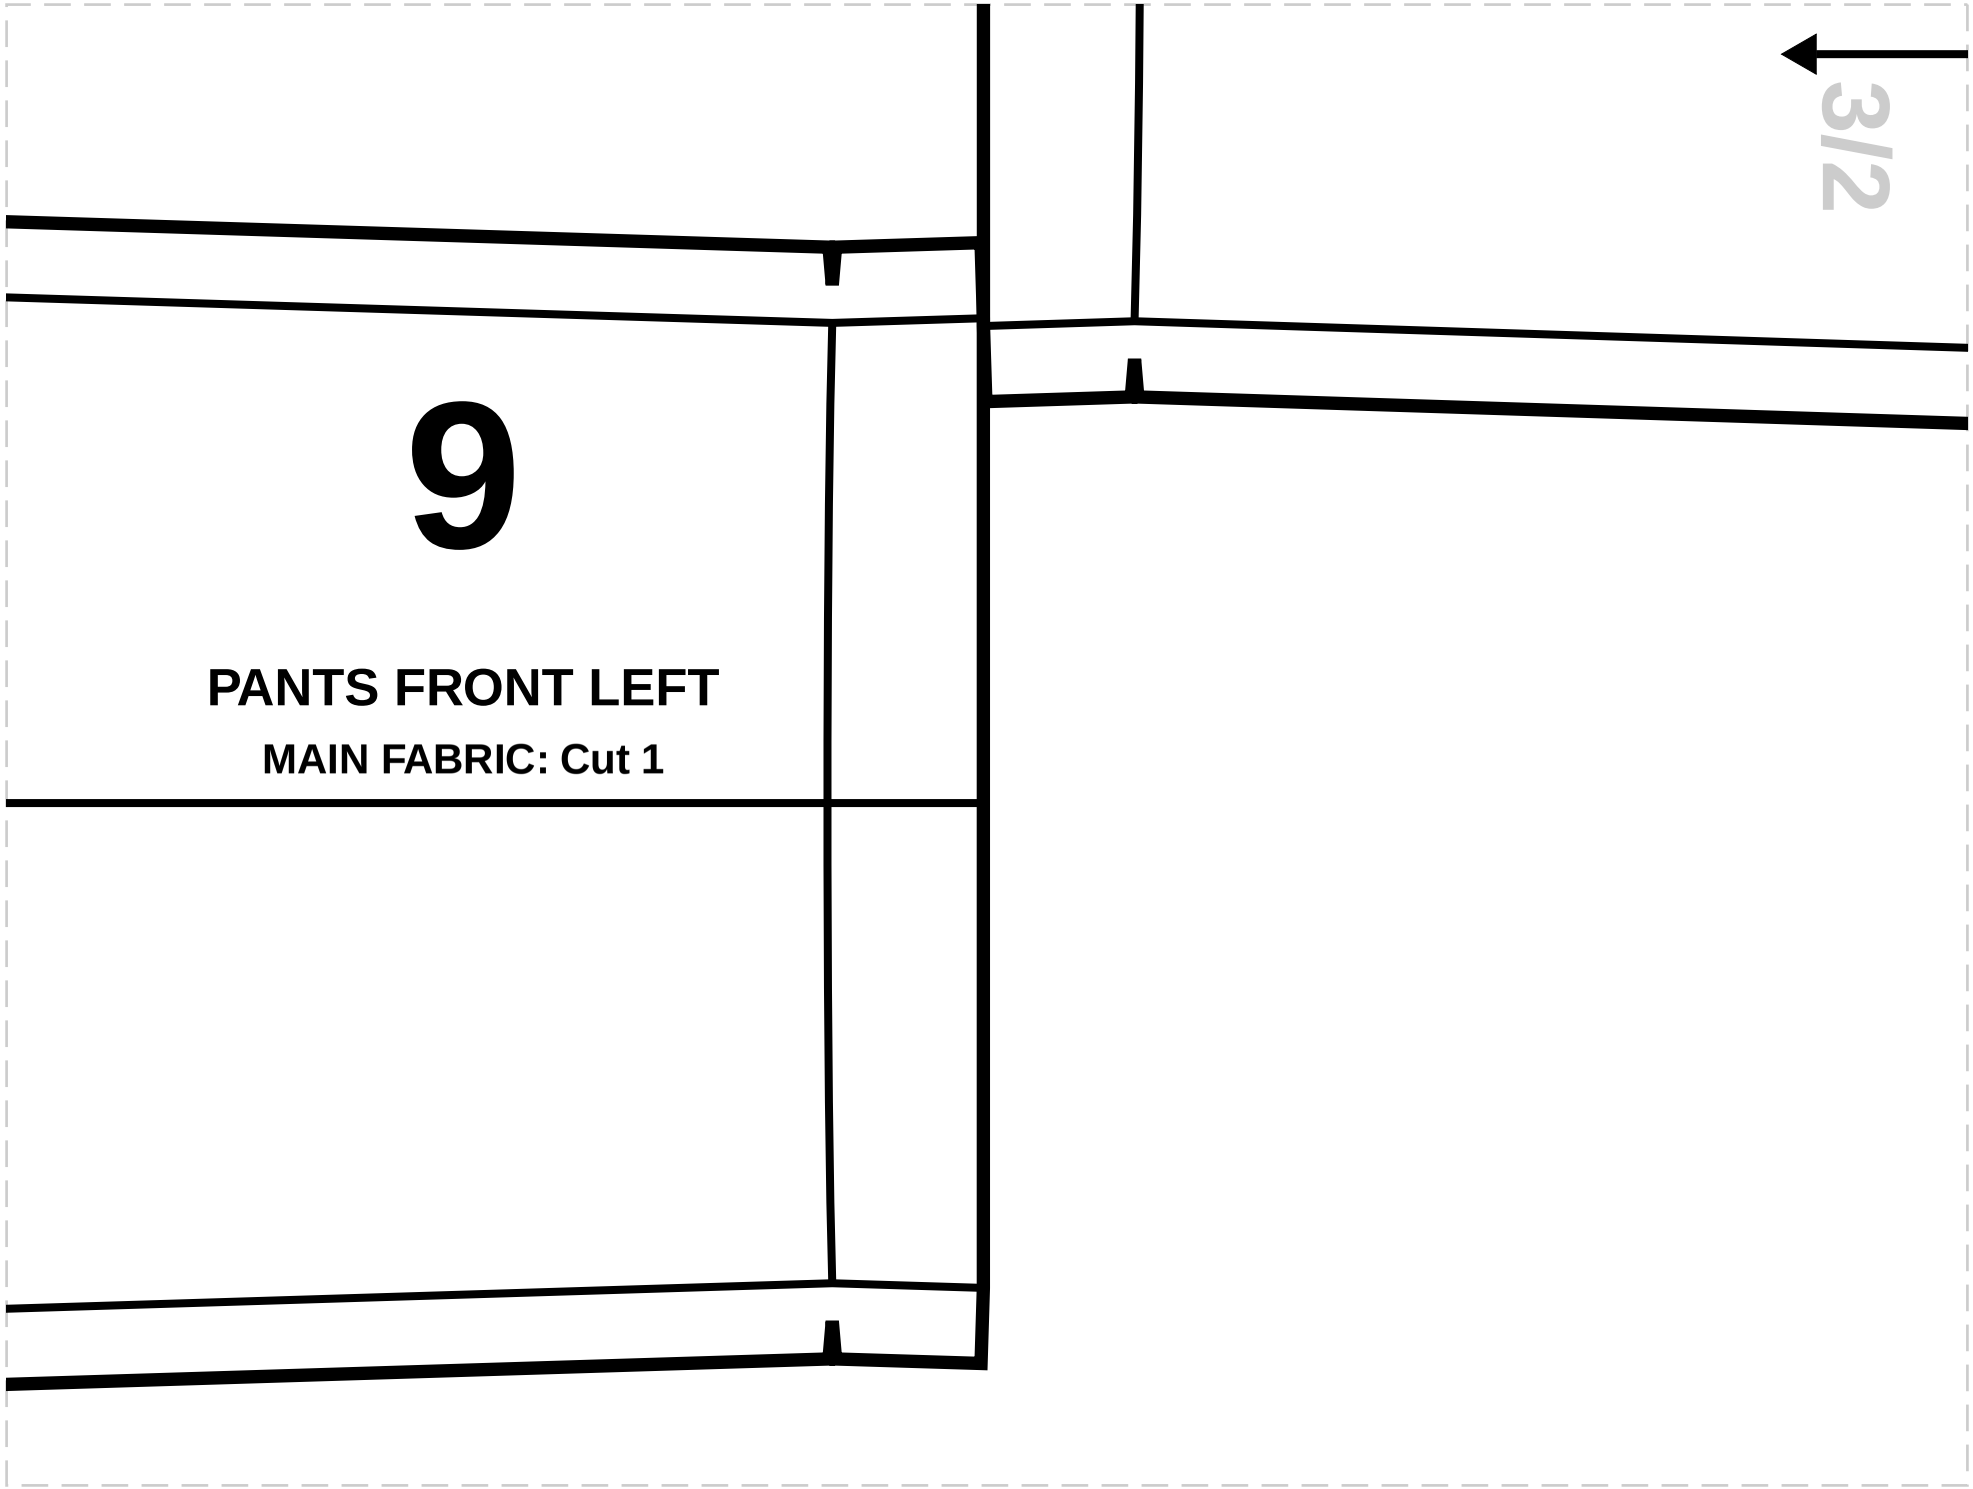

6
POCKET BAG SMALL LINING
LINING: Cut 2
1/4


14
BACK PATCH POCKET
MAIN FABRIC: Cut 2
10
FLY
MAIN FABRIC: Cut 1
4
FLY FACING
MAIN FABRIC: Cut 1





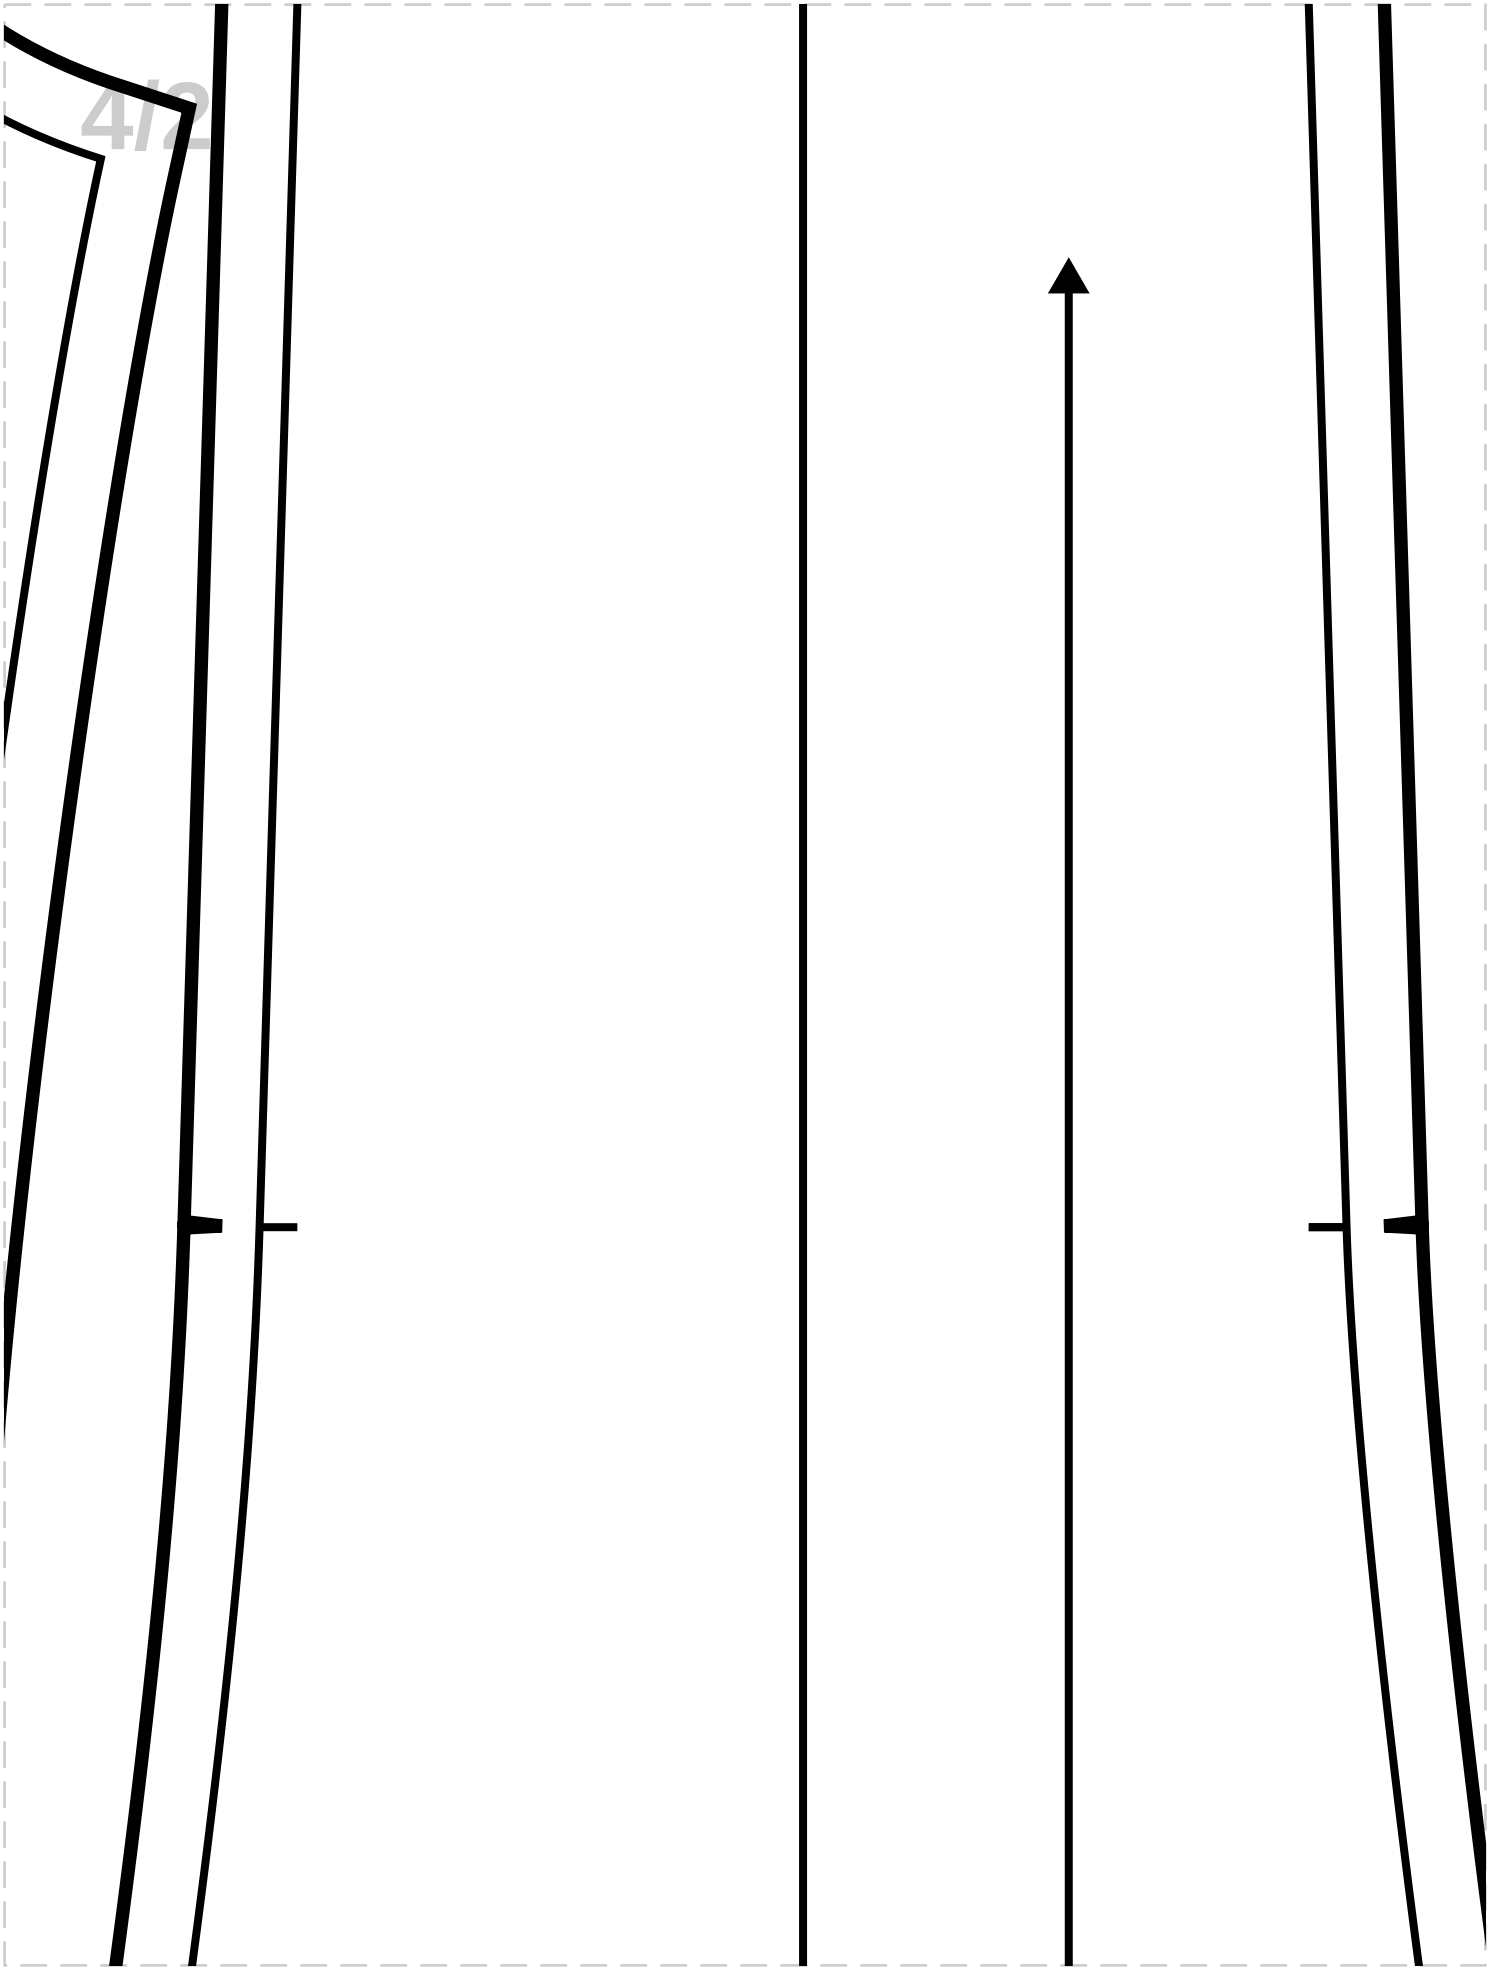



3/2
9
PANTS FRONT LEFT
MAIN FABRIC: Cut 1

5

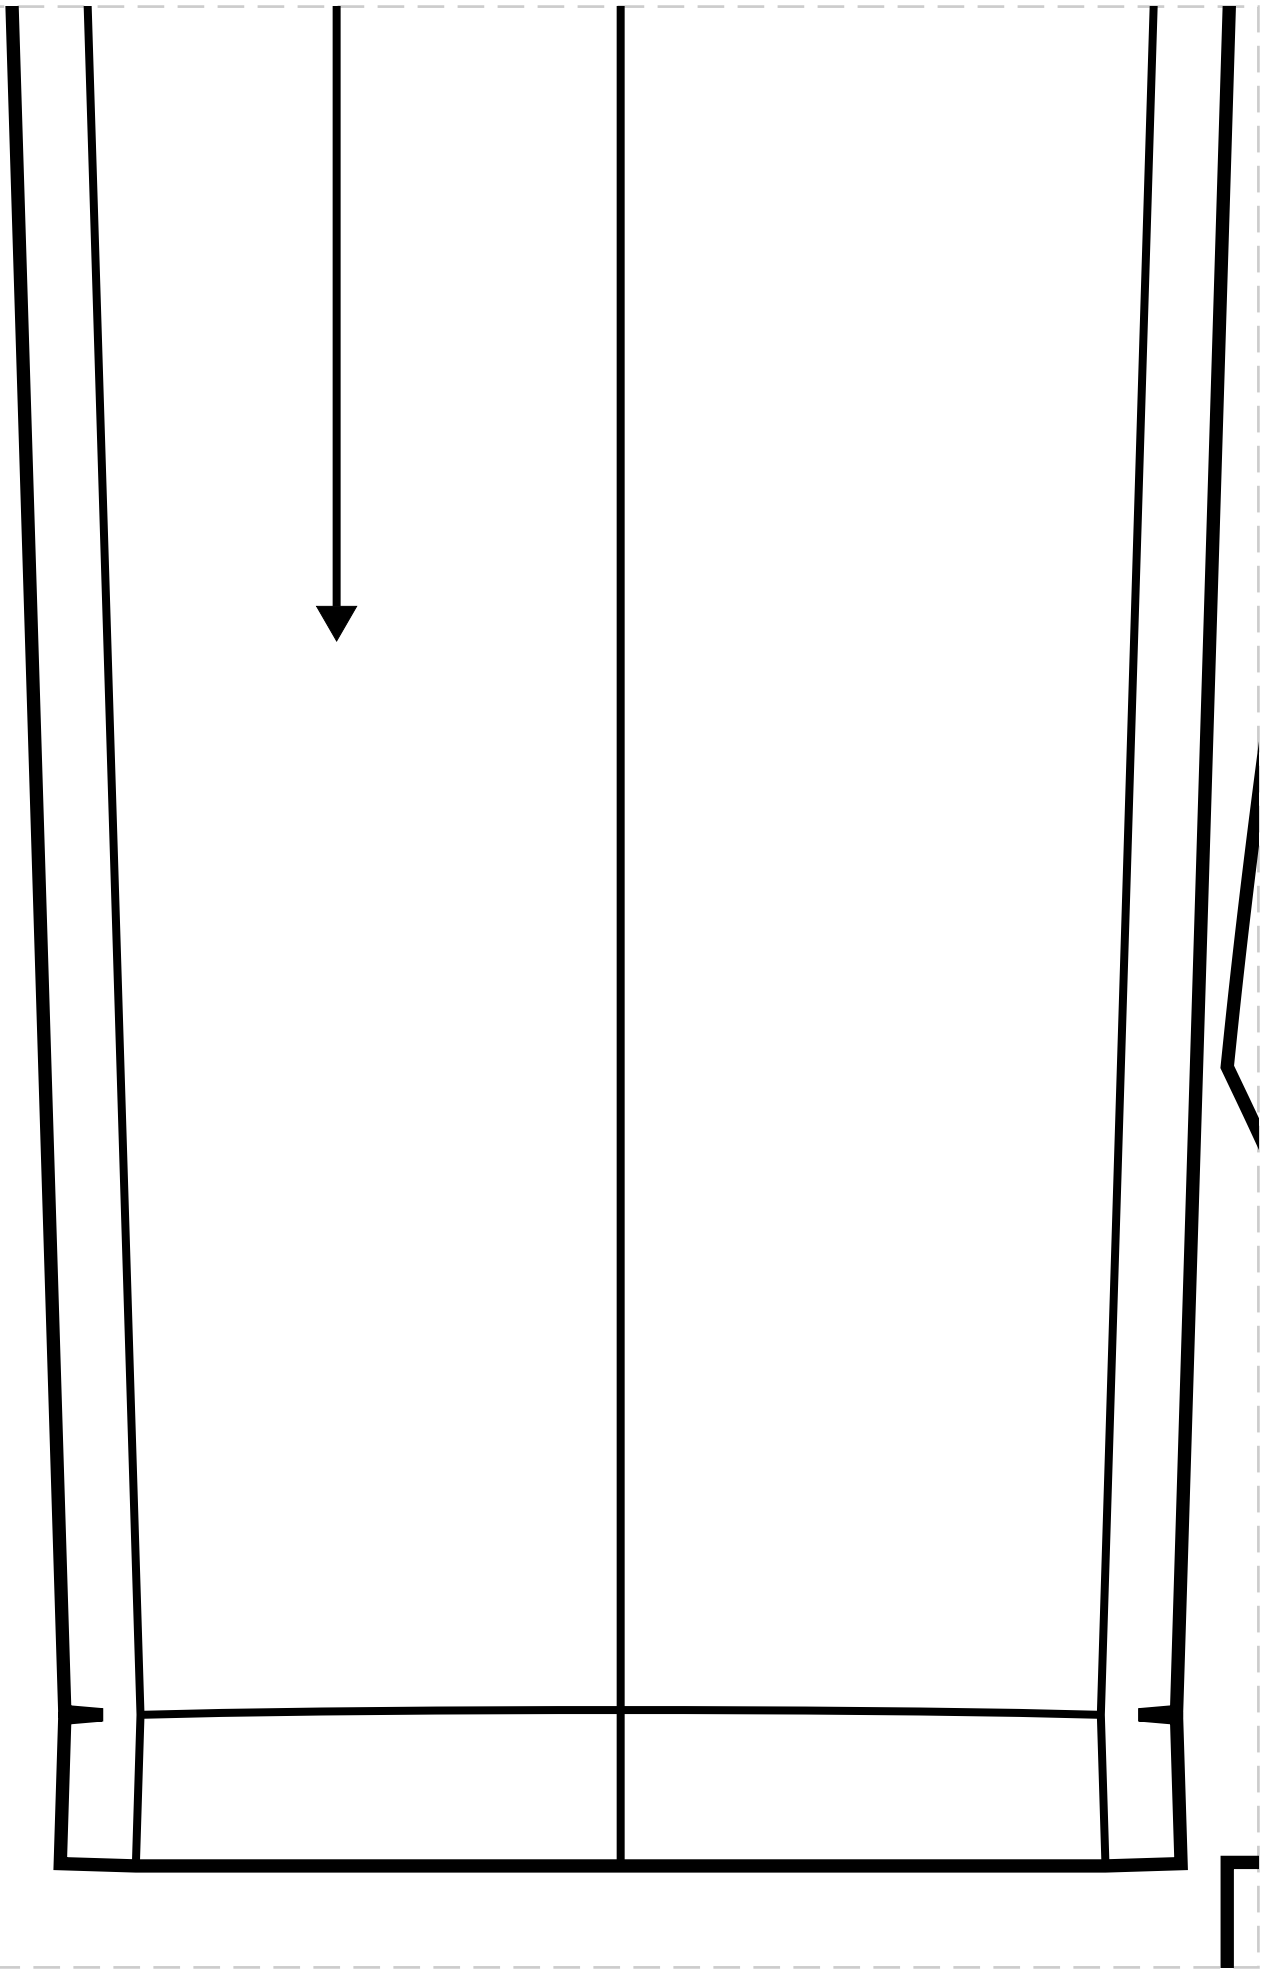
PANTS FRONT RIGHT

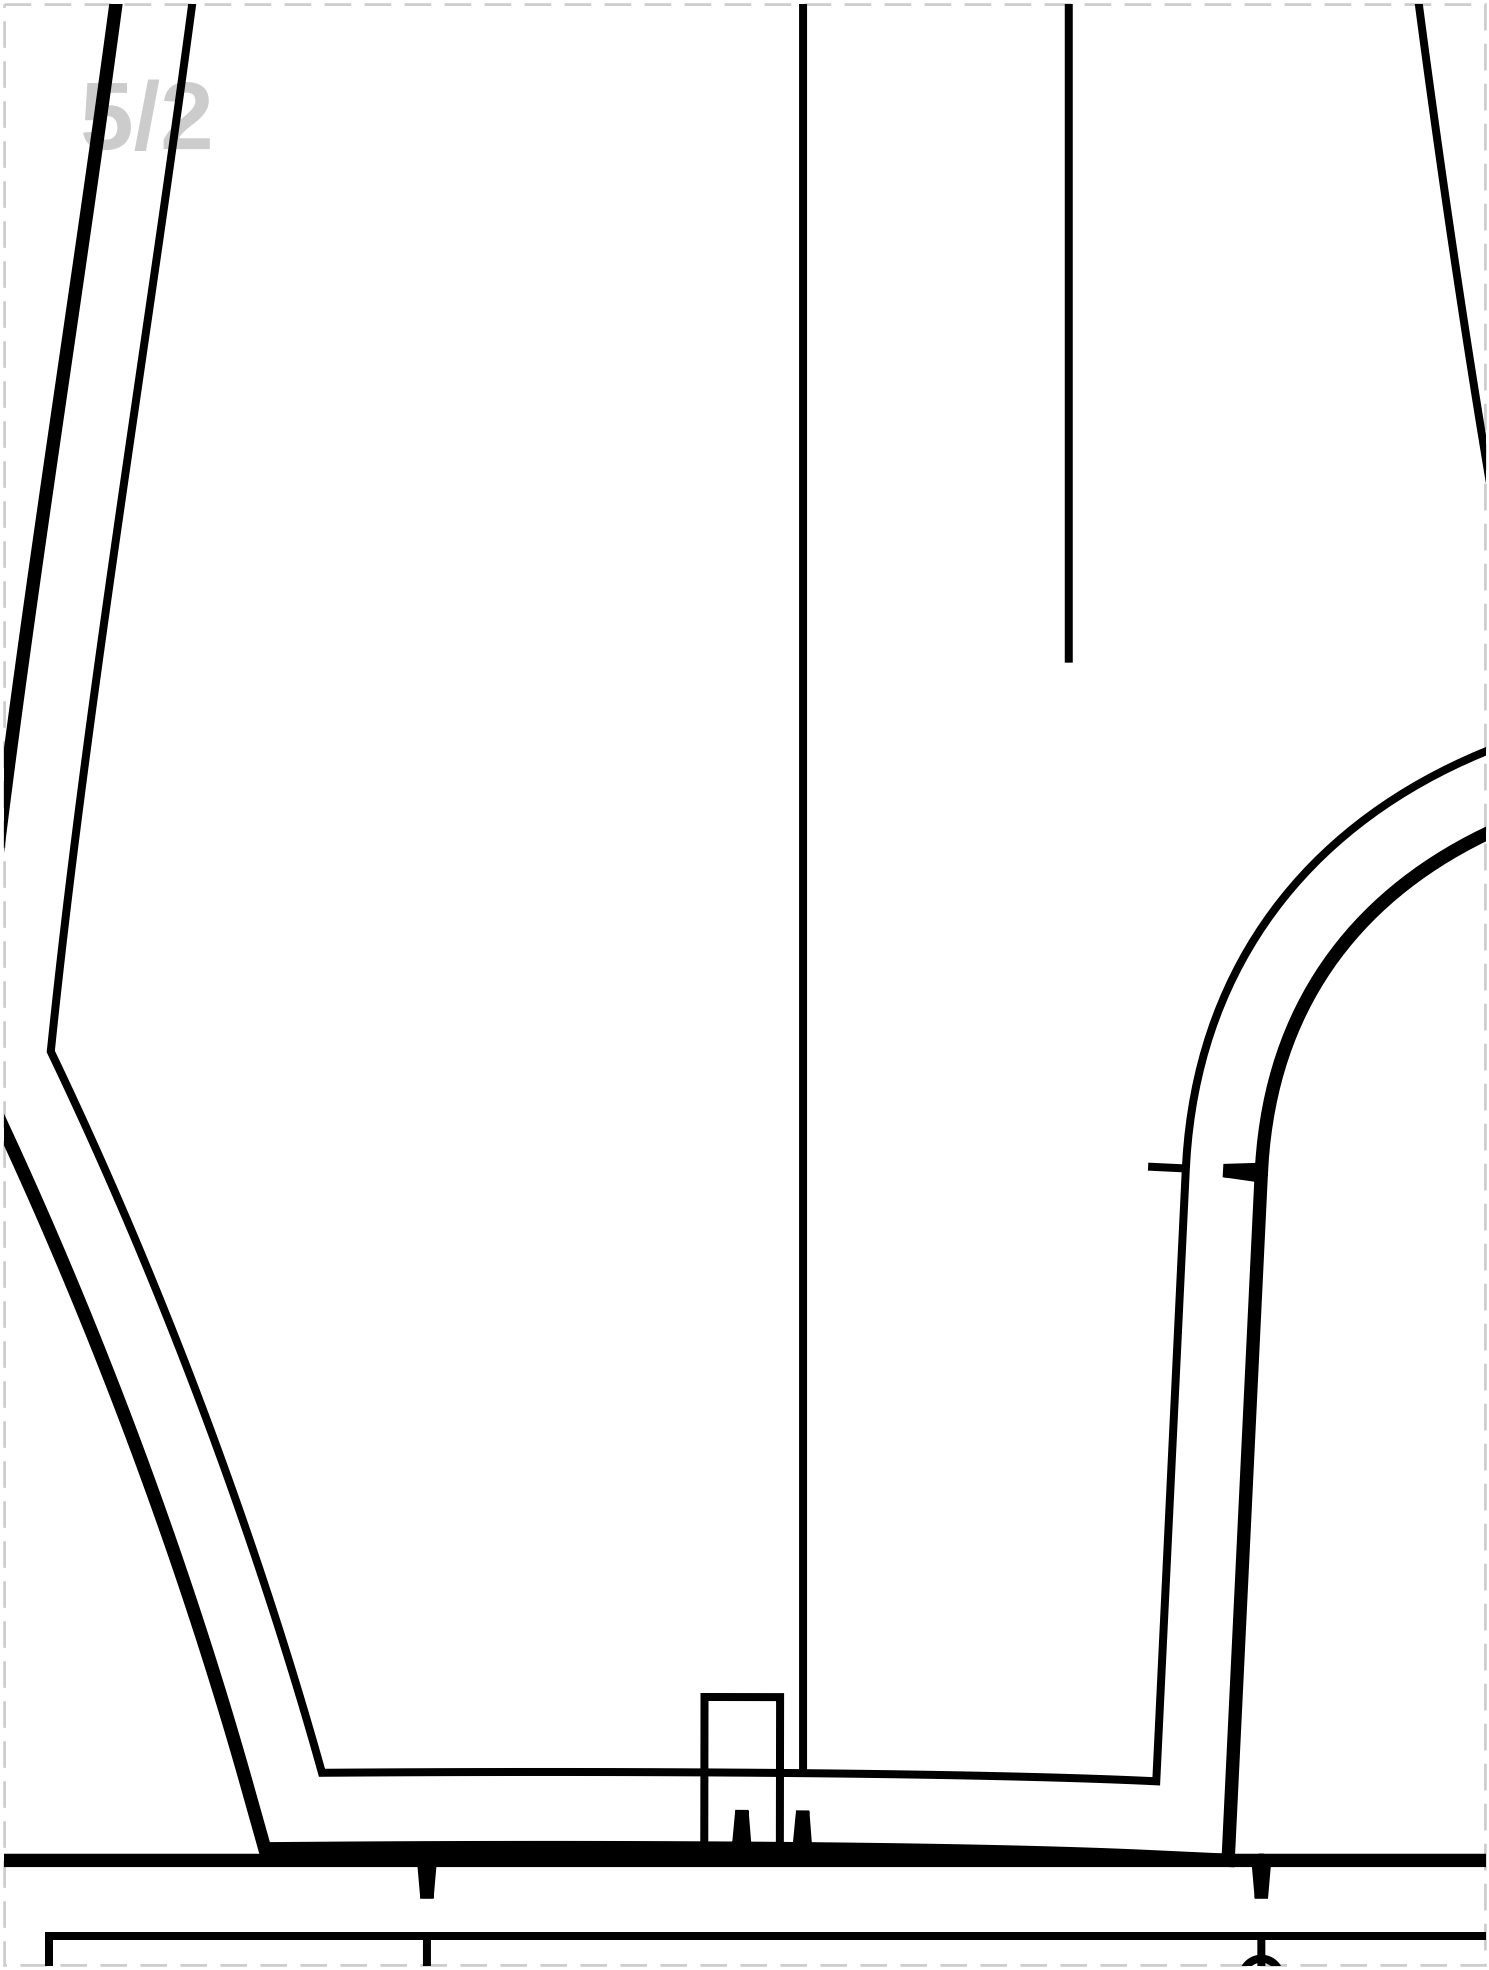
MAIN FABRIC: Cut 1

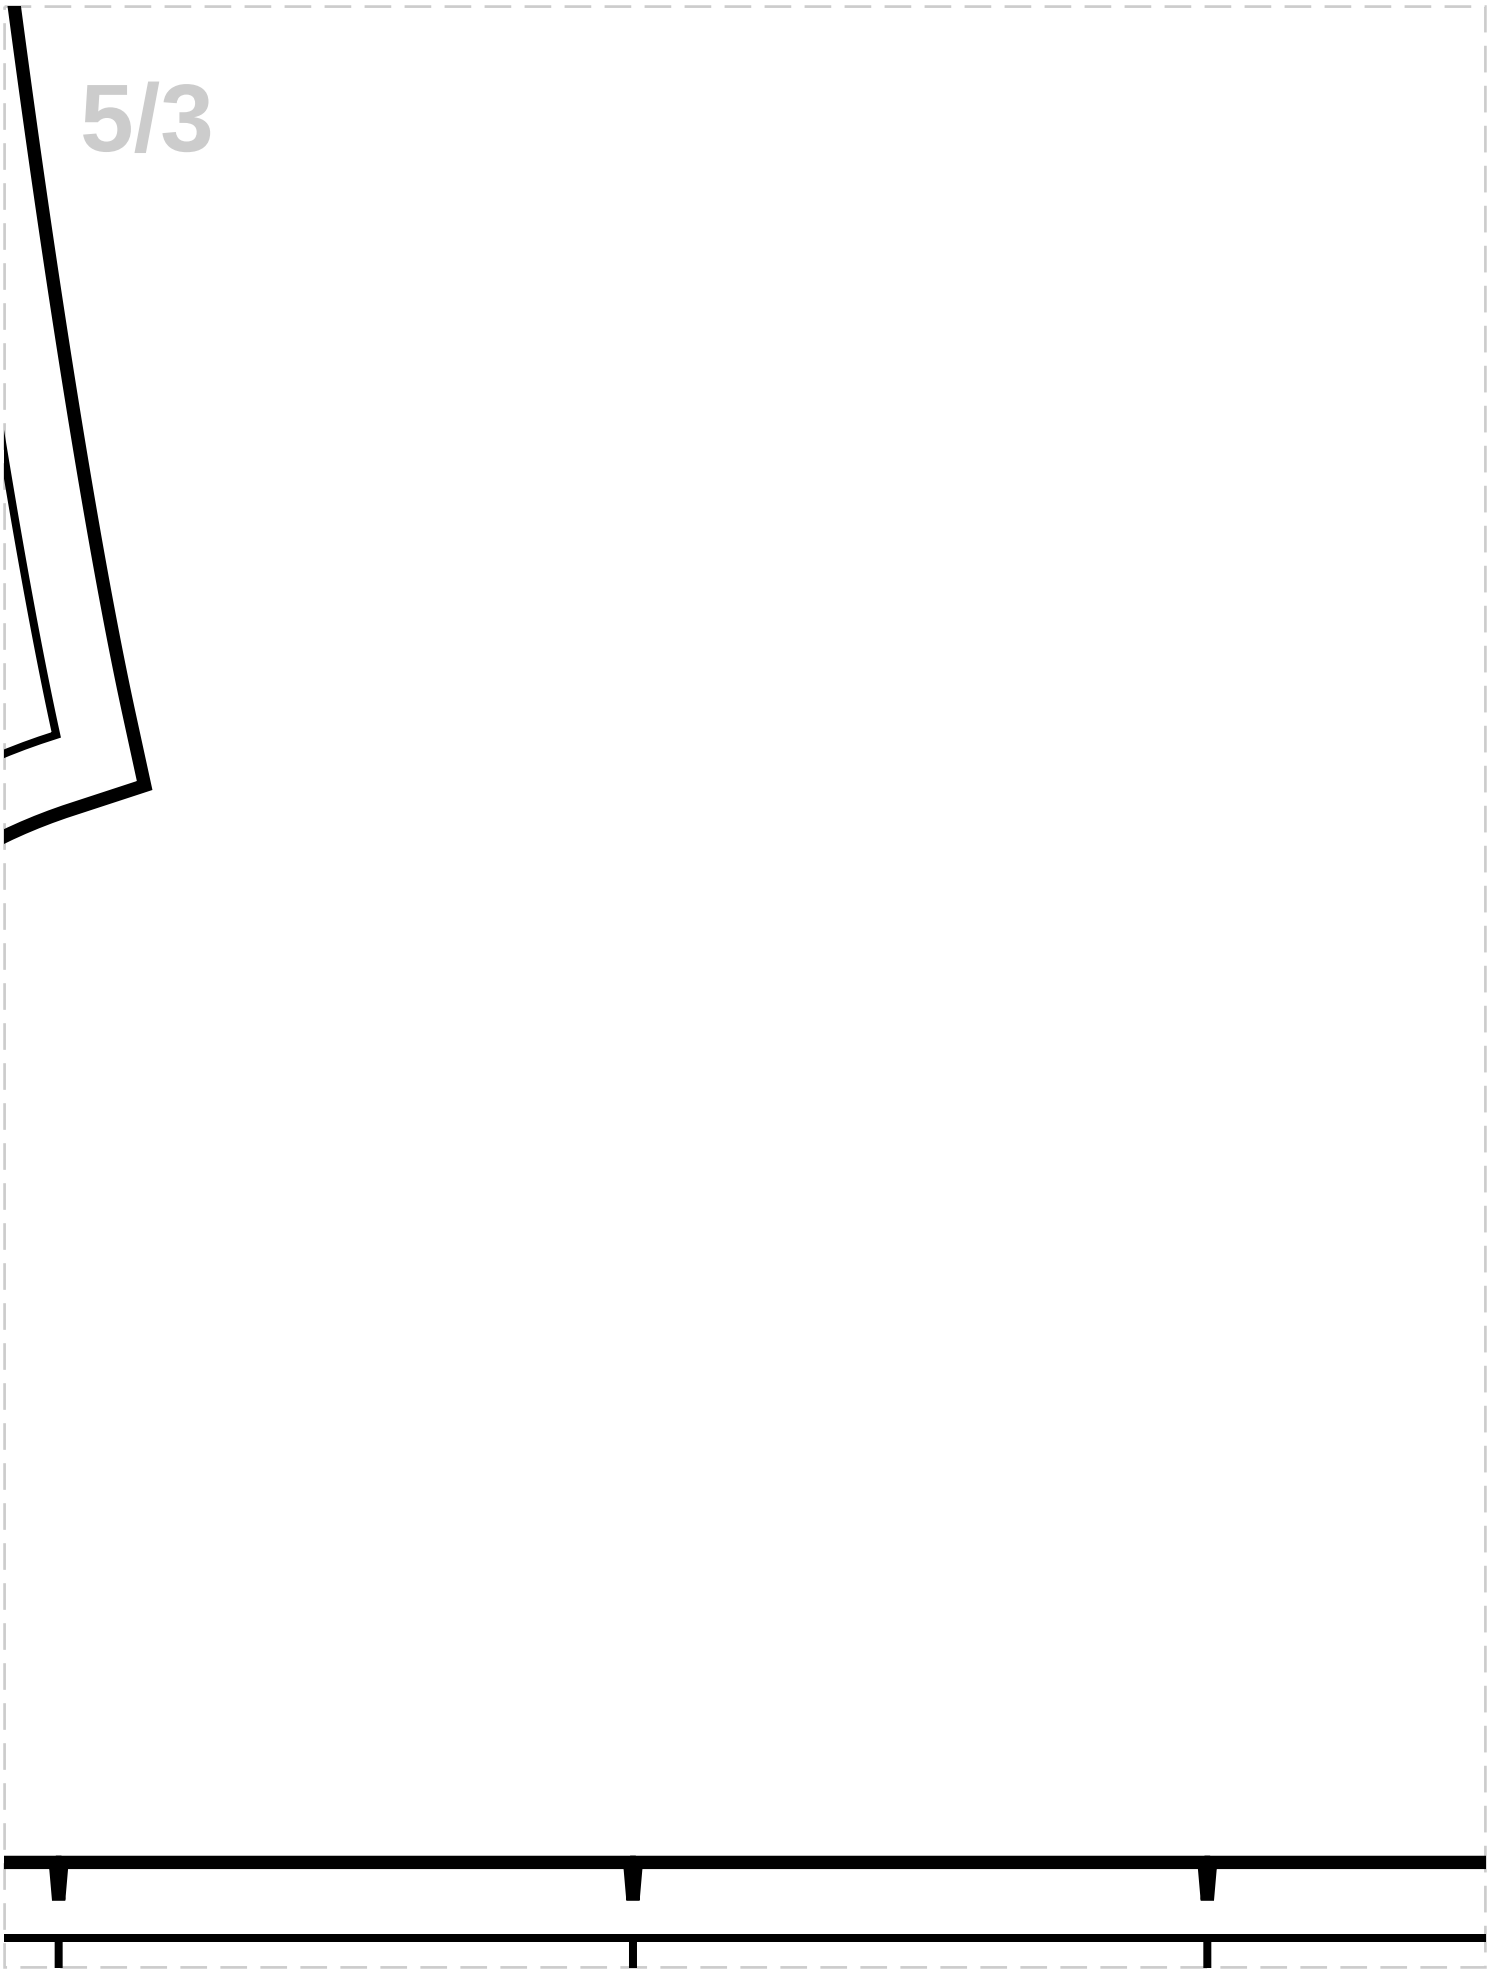

4/2

4/3

5/1







5/4

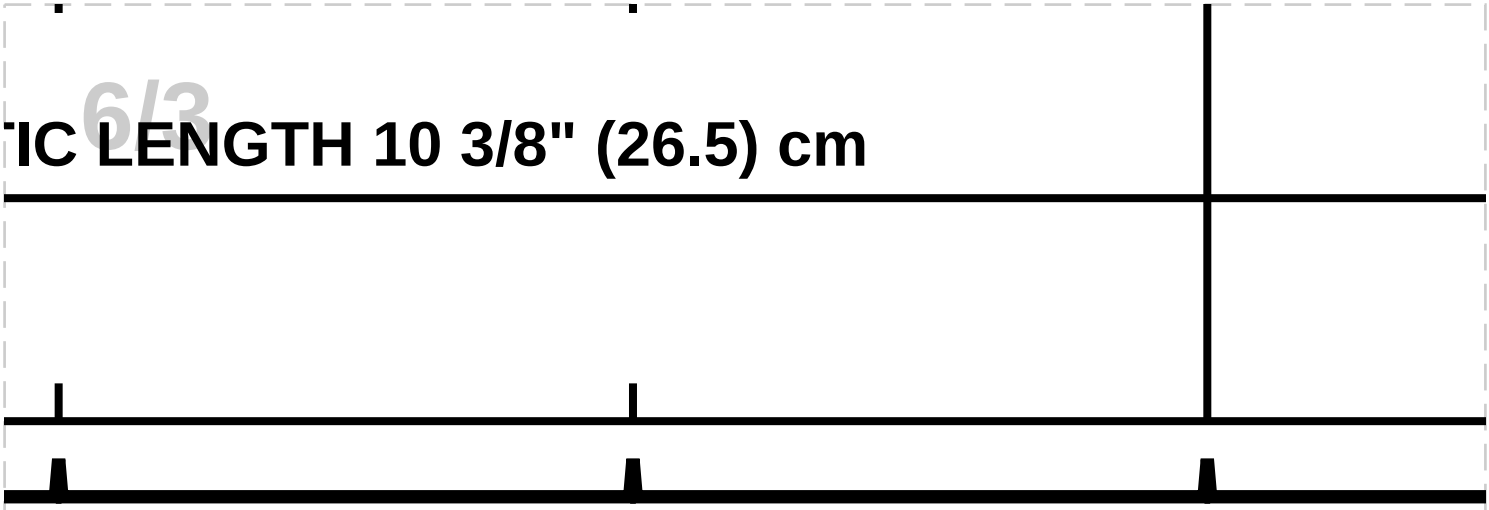


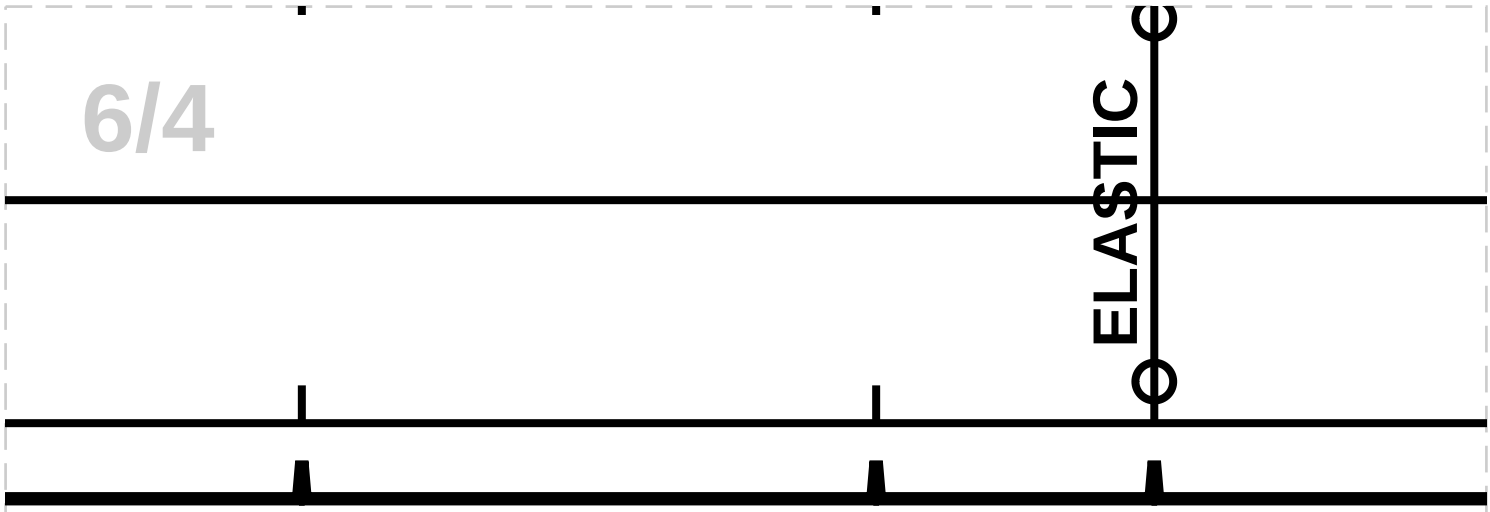


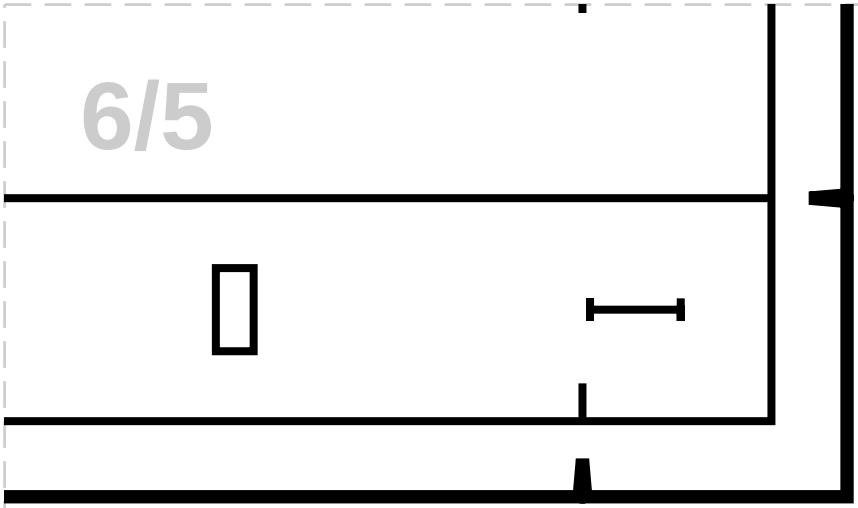
6/1



6/2
ELASTIC
LAST
WAISTBAND
MAIN FABRIC: Cut 1
2


IC LENGTH 10 3/8" (26.5) cm


ELA$TIC


6/5