cozysewpatterns

Print this Calibration Test page first!

Size: Height: 167.75, Bust: 80, Waist: 63.5, Hips: 87.75
SIZE 00

Notes

How to print

Printing


Once your Calibration Test Page has been printed, measure the 4”x 4” (10cm) scale box with a ruler. If the lengths match, you can confidently print your pattern. If the rulers do not match, set your print settings to 100% or Actual and retry.

Cutting

Your printouts will always have a dashed border to perfectly match your sheets. Cut off the right edge of each page. Be careful not to cut beyond the dashed mark, otherwise your patterns will not align accurately.

Tapping

Group each sheet by the second number marked on each pate i.e. in a group 1, there are: 1/1, 2/1, 3/1, 4/1, etc. In a group 2: 1/2, 2/2 etc. 2. Place page 1/1 on top of the page 2/1, overlapping the right side edge. Match corners and crosses and secure with a pin or tape. Then use a scotch tape to permanently attach the sheets together.

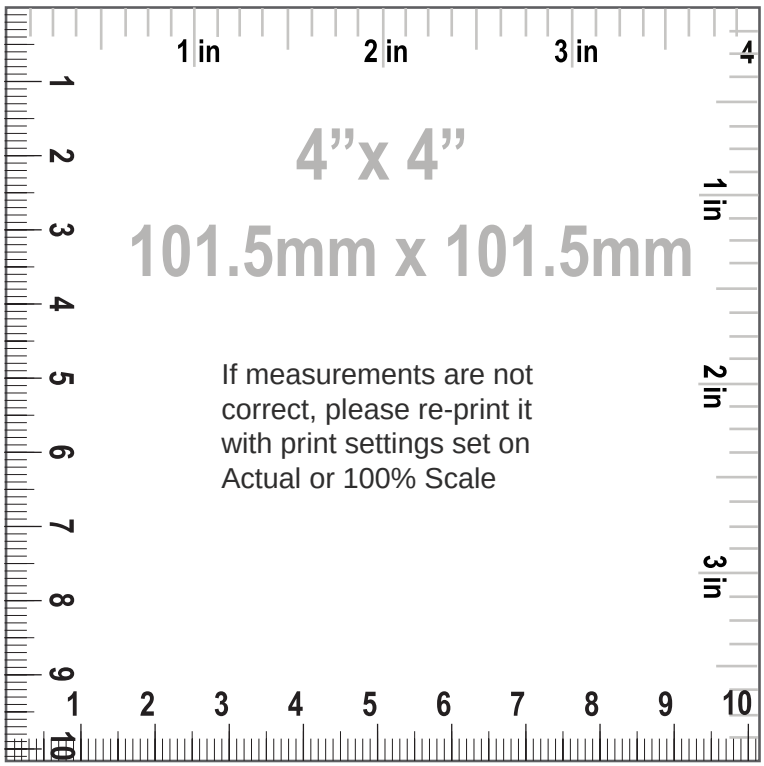

SIZE 00
Seam Allowance: 1 (3/8 in)

Pattern pieces:

1. "FRONT LINING", LINING: Cut 2
2. "CENTER FRONT", MAIN FABRIC, FUSIBLE INTERFACING: Cut 2
3. "SIDE FRONT", MAIN FABRIC, FUSIBLE INTERFACING: Cut 2
4. "CENTER BACK", MAIN FABRIC, FUSIBLE INTERFACING: Cut 2
5. "CENTER BACK LINING", LINING: Cut 1
6. "SIDE BACK", MAIN FABRIC, FUSIBLE INTERFACING: Cut 2
7. "SIDE BACK LINING", LINING: Cut 2
8. "FRONT NECK FACING", MAIN FABRIC, FUSIBLE INTERFACING: Cut 2
9. "BACK NECK FACING", MAIN FABRIC, FUSIBLE INTERFACING: Cut 1
10. "UPPER COLLAR", MAIN FABRIC, FUSIBLE INTERFACING: Cut 1
11. "LOWER COLLAR", MAIN FABRIC, FUSIBLE INTERFACING: Cut 1
12. "BELT", MAIN FABRIC, FUSIBLE INTERFACING: Cut 1
13. "PATCH POCKET", MAIN FABRIC: Cut 2
14. "TWO BELT LOOPS", MAIN FABRIC: Cut 1
15. "UPPER SLEEVE", MAIN FABRIC: Cut 2
16. "LOWER SLEEVE", MAIN FABRIC: Cut 2
17. "UPPER SLEEVE LINING", LINING: Cut 2
18. "LOWER SLEEVE LINING", LINING: Cut 2


Pattern Specs (Circumferences are divided by 2):


1. Hem max 4.60 none (1 3/4 in)
2. Seam allowance max 2.00 none (3/4 in)
3. Seam allowance p max 1.50 none (5/8 in)
4. Stretch factor 1.00 none (3/8 in)
5. Shoulder pads thickness 1.00 none (3/8 in)
6. Pocket entry length 11.00 cm (4 3/8 in)
7. Waist to pocket length 9.74 cm (3 7/8 in)
8. Side seam pocket position 2.37 cm (7/8 in)
9. Button diameter 1.50 cm (5/8 in)
10. Front buttons quantity 12.00 pc
11. Front length from HPS to hem 88.24 cm (34 3/4 in)
12. Across chest 45.99 cm (18 1/8 in)
13. Center front length to hem 79.04 cm (31 1/8 in)

14. Center back length to hem 87.19 cm (34 3/8 in)
15. Across front 30.47 cm (12 in)
16. Across back 36.80 cm (14 1/2 in)
17. Across shoulders 38.05 cm (15 in)
18. Side seam 65.79 cm (25 7/8 in)
19. Waist 38.75 cm (15 1/4 in)
20. Low hips 49.38 cm (19 1/2 in)
21. Blazer hemline sweep 54.32 cm (21 3/8 in)
22. Armhole length 45.54 cm (17 7/8 in)
23. Neck opening 17.30 cm (6 3/4 in)
24. Front neck drop 17.77 cm (7 in)
25. Back neck drop 3.74 cm (1 1/2 in)
26. Shoulder width 12.10 cm (4 3/4 in)
27. Apex to apex 17.00 cm (6 3/4 in)
28. Seam allowance poc max 3.00 none (1 1/8 in)
29. Hem poc max 6.00 none (2 3/8 in)
30. Pocket height 12.10 cm (4 3/4 in)
31. Stretch factor horizontal 1.00 none (3/8 in)
32. Stretch factor vertical 1.00 none (3/8 in)
33. Sleeve length 58.54 none (23 in)
34. Sleeve cap length 46.85 none (18 1/2 in)
35. Armhole length 45.54 none (17 7/8 in)
36. Sleeve upper arm width 30.04 none (11 7/8 in)
37. Sleeve opening 22.99 none (9 in)

cozysewpatterns

Paper Size: A4;
Print Actual Size (100% Scale);

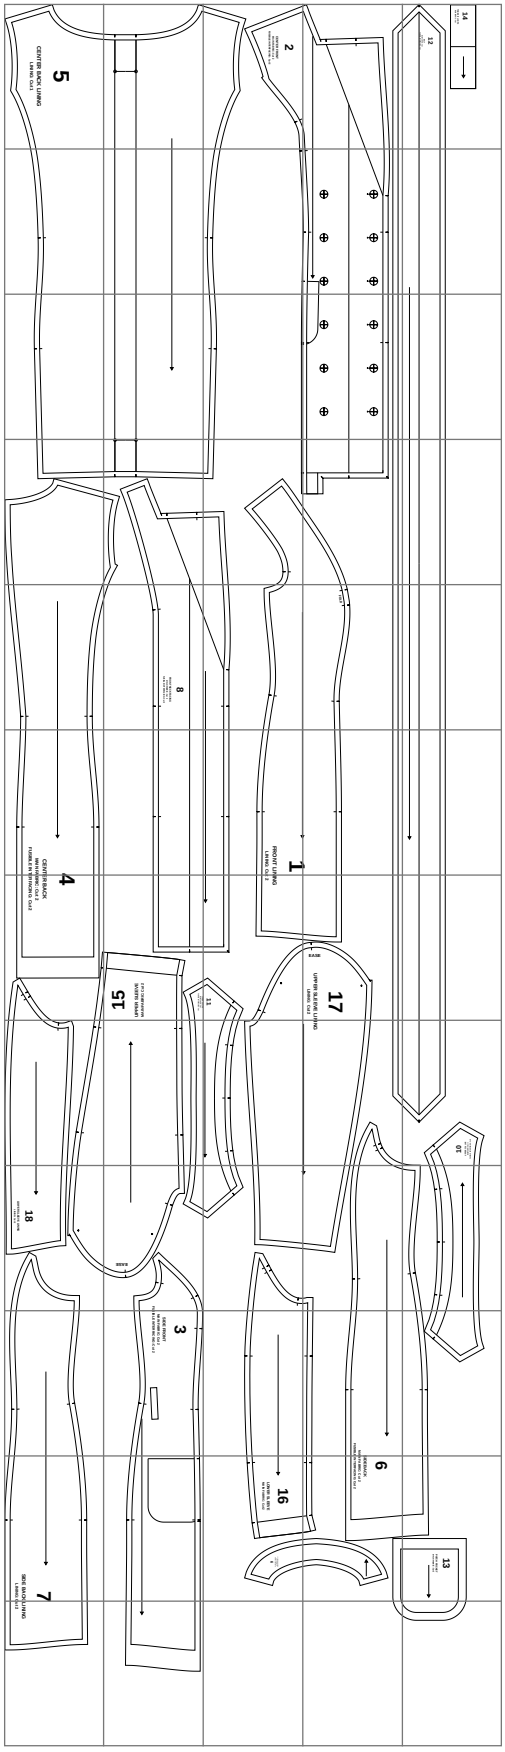


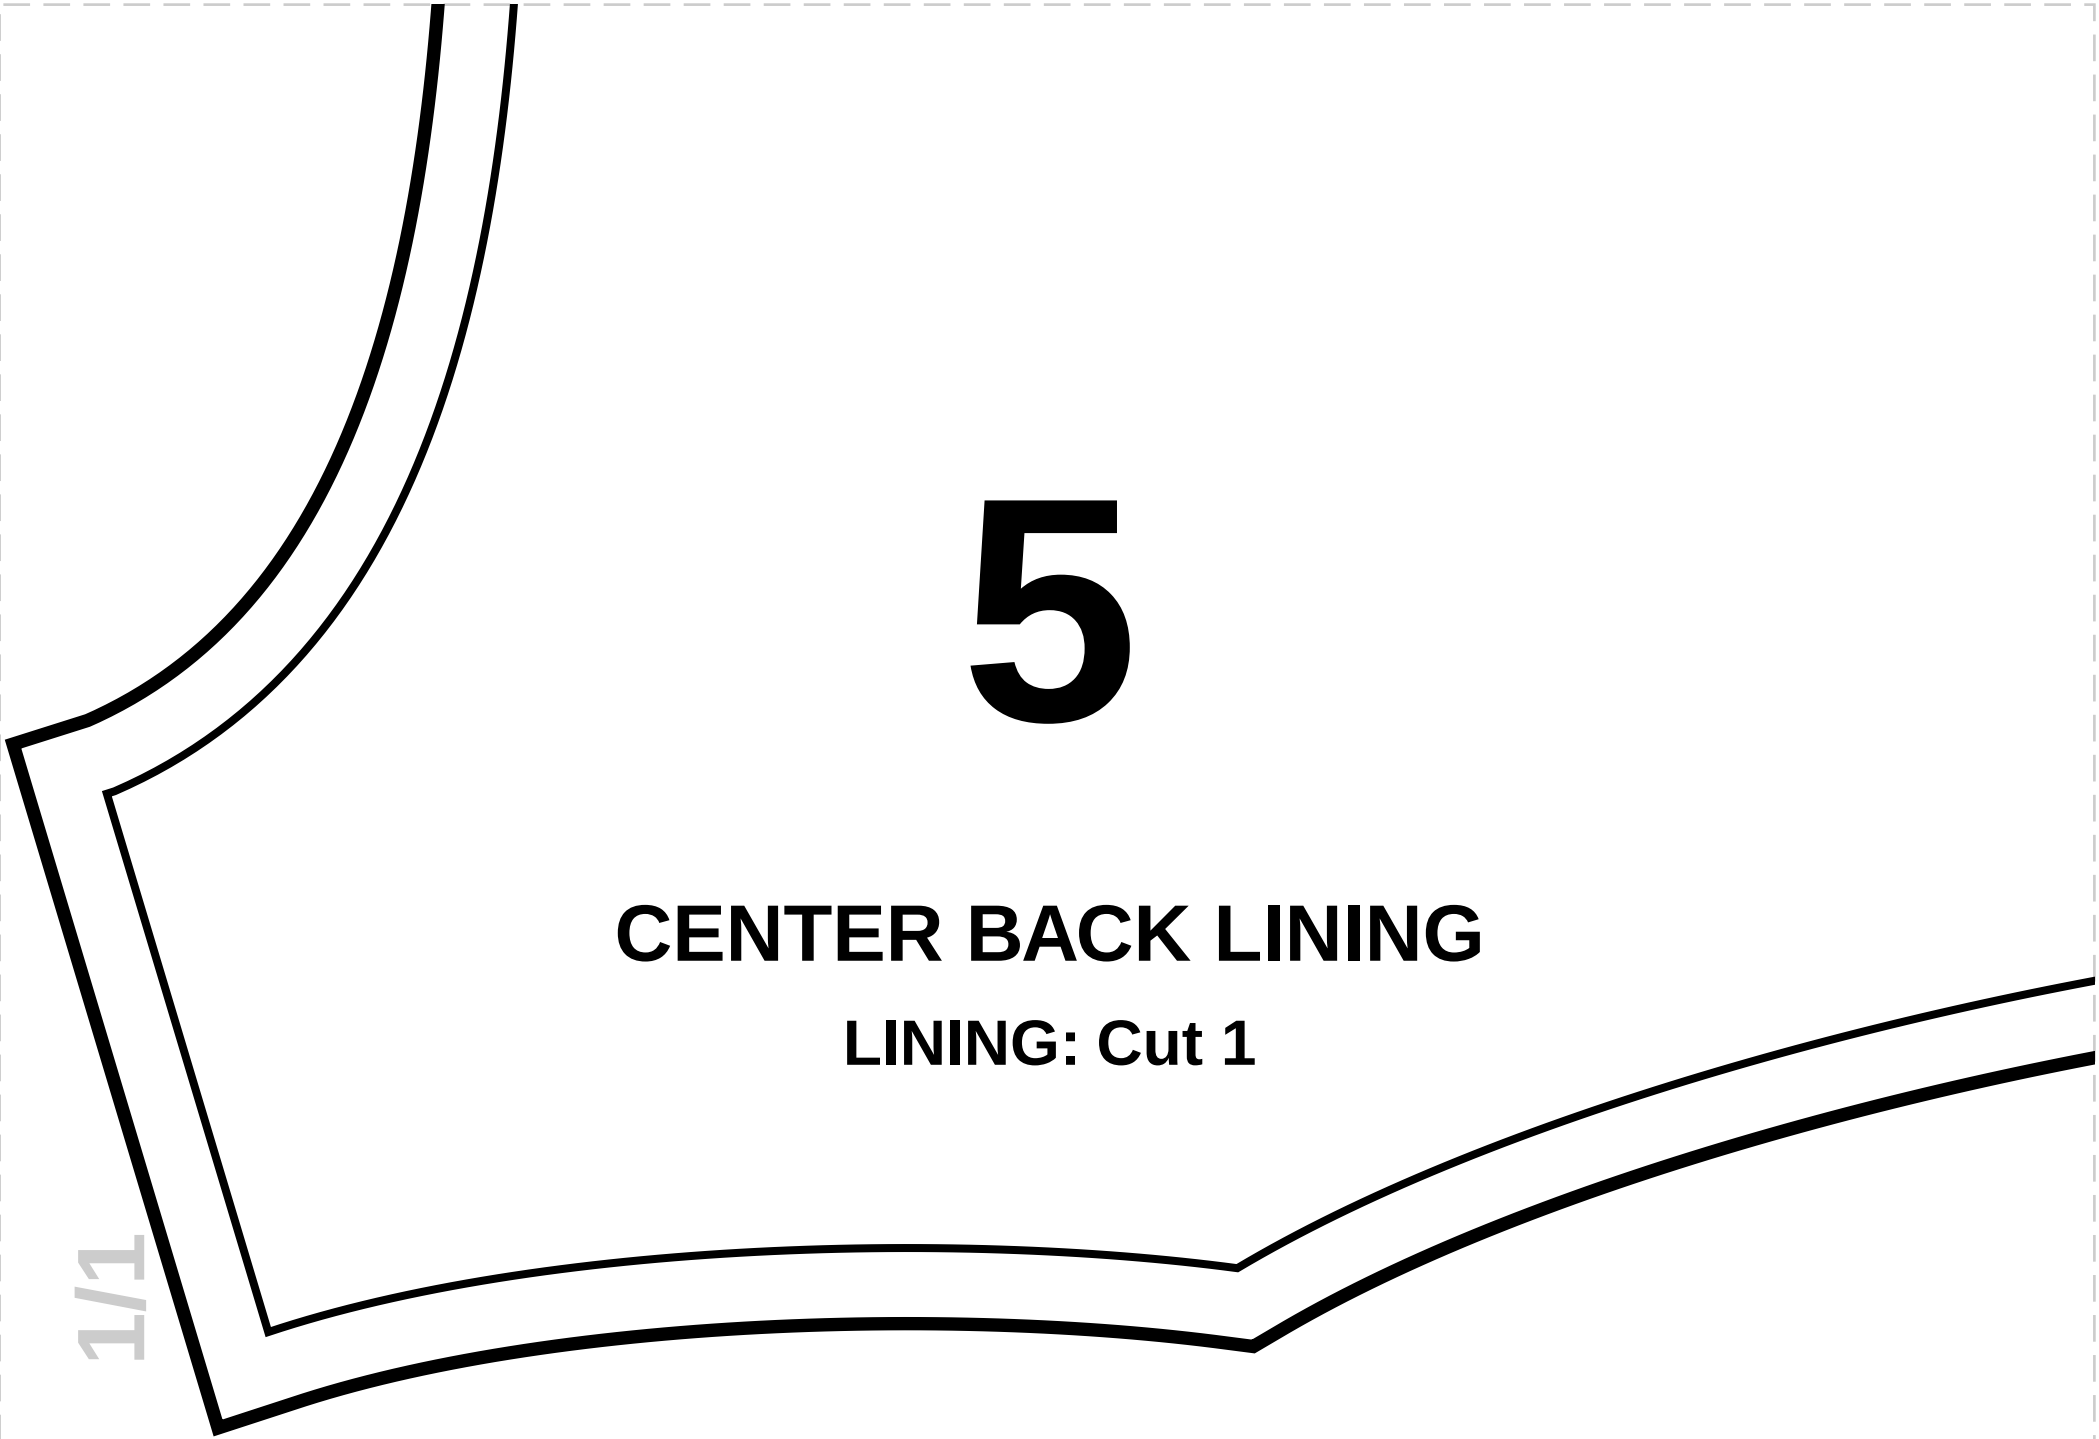

5

CENTER BACK LINING

LINING: Cut 1

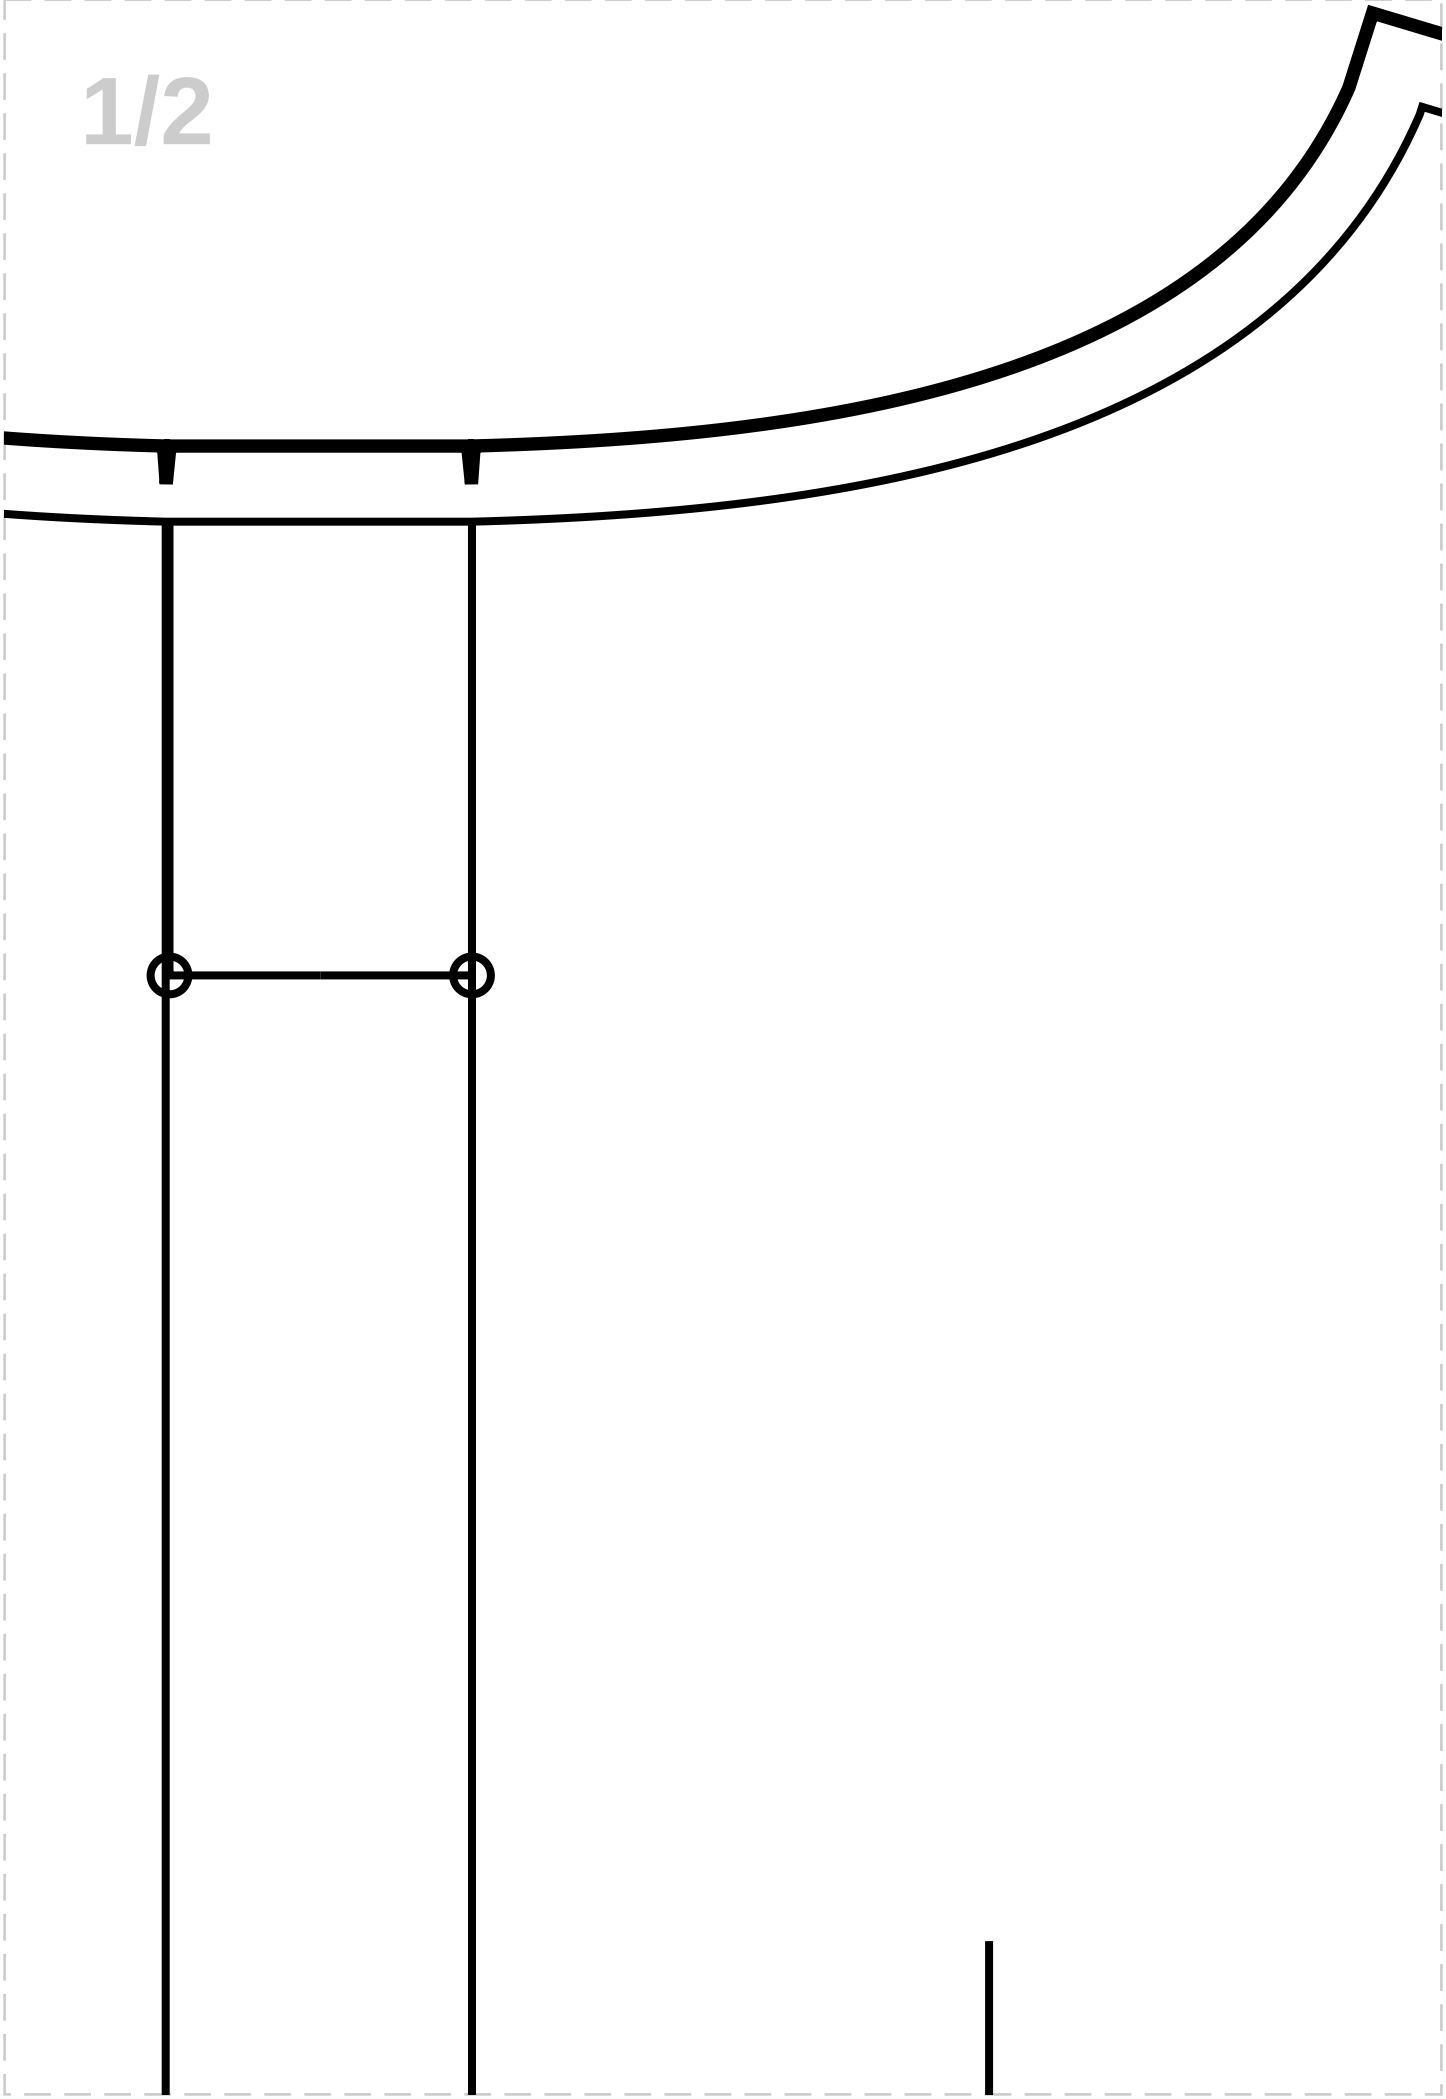



2


CENTER FRONT


MAIN FABRIC: Cut 2

FUSIBLE INTERFACING: Cut 2

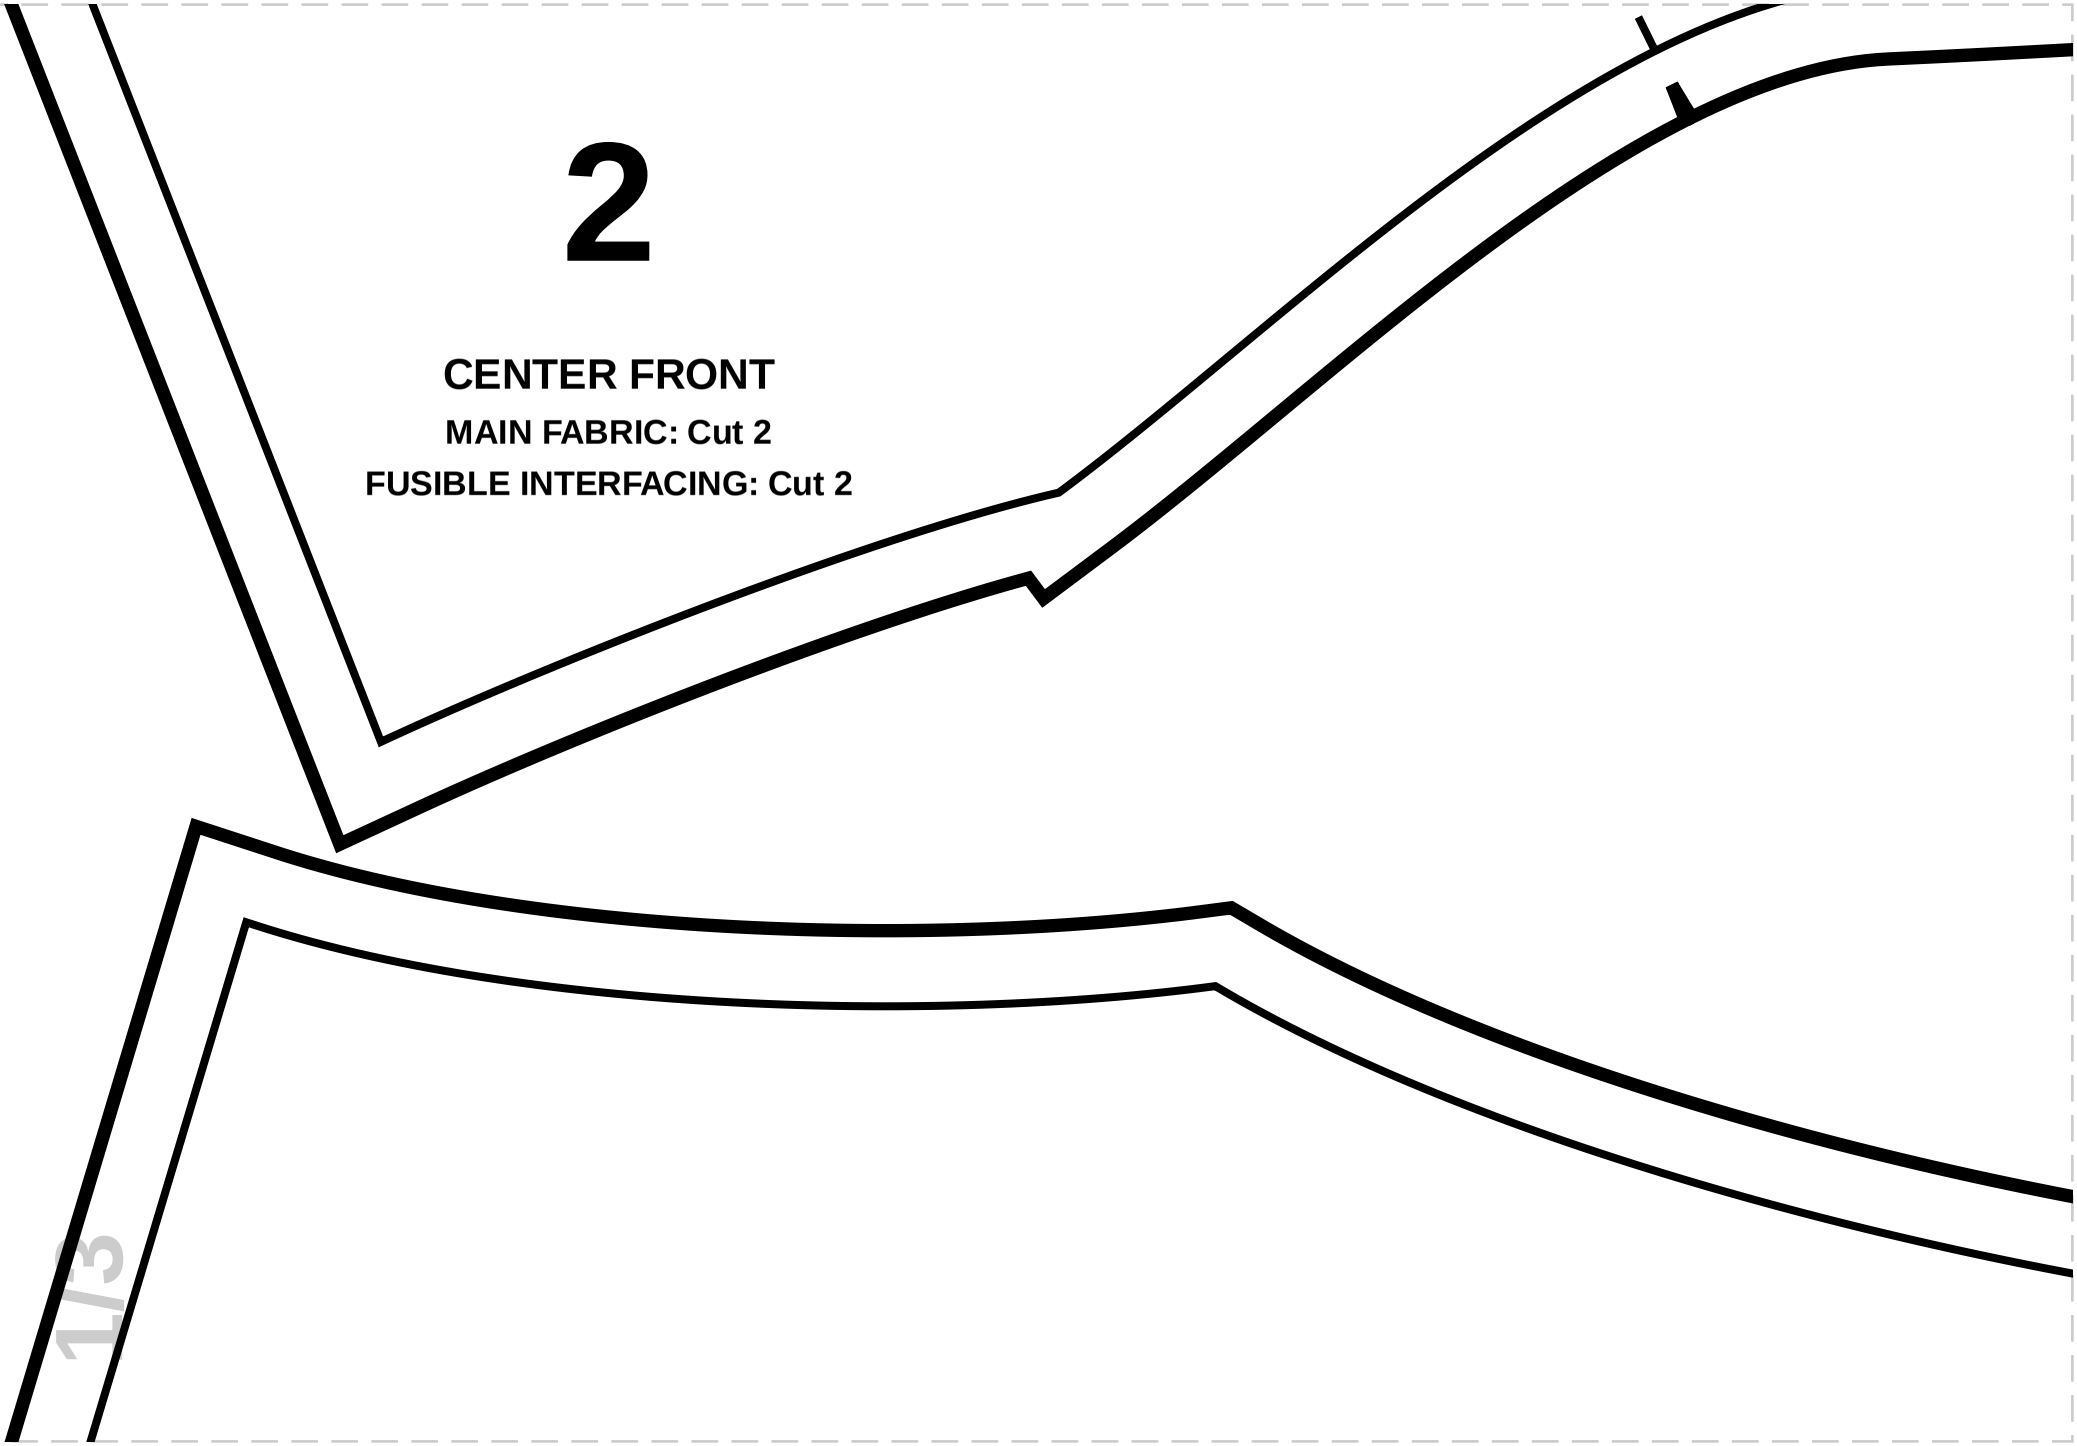


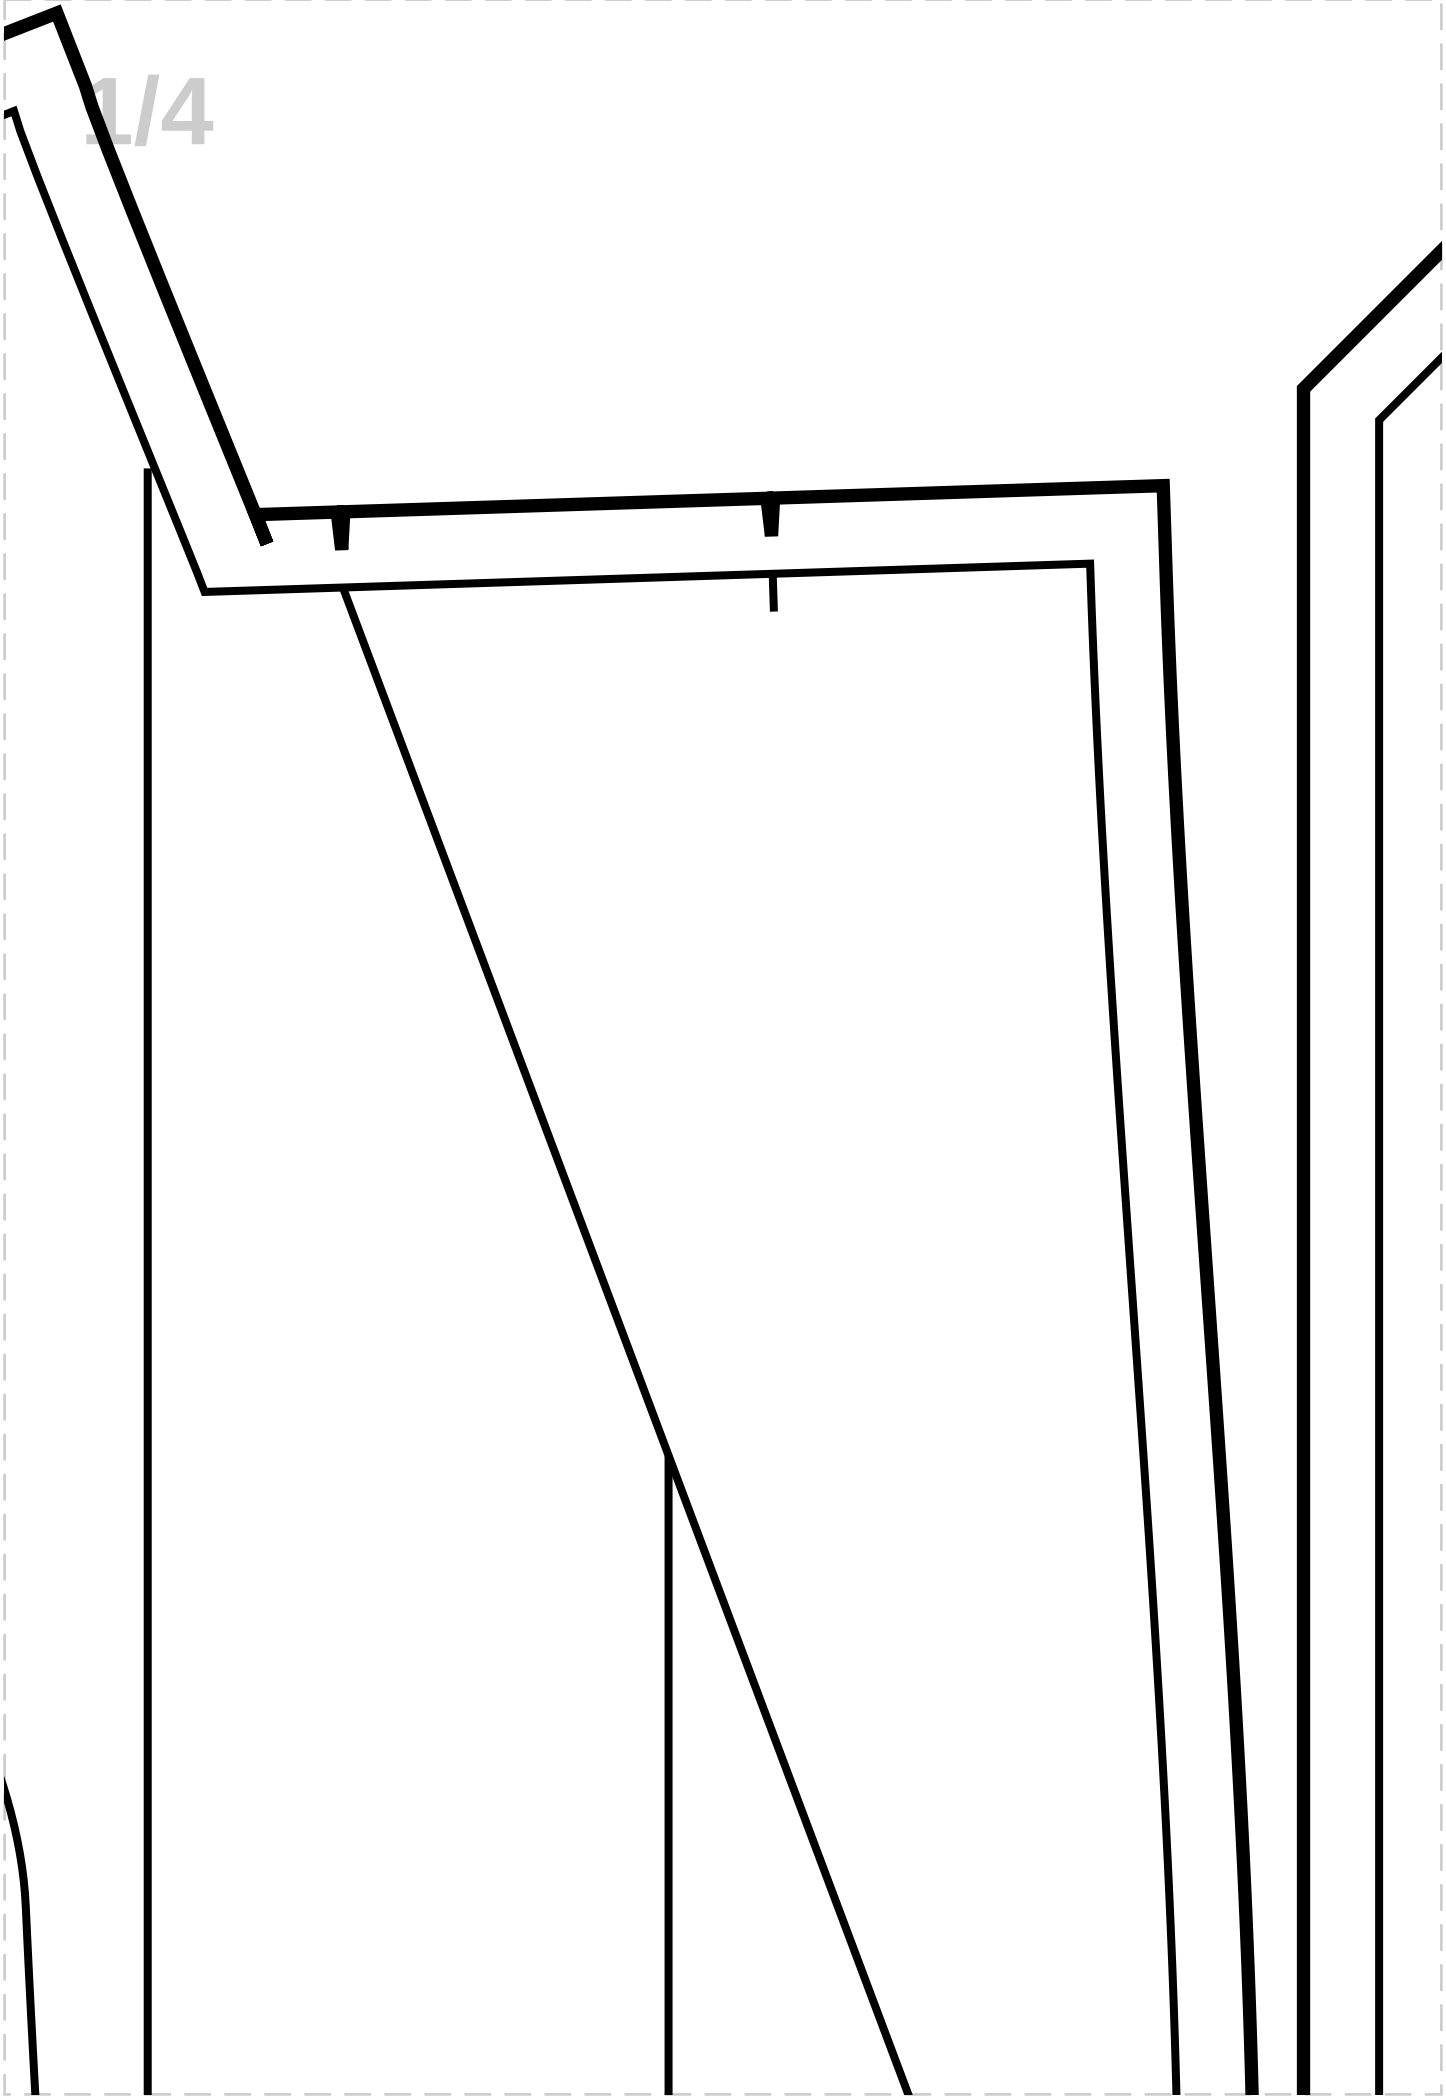


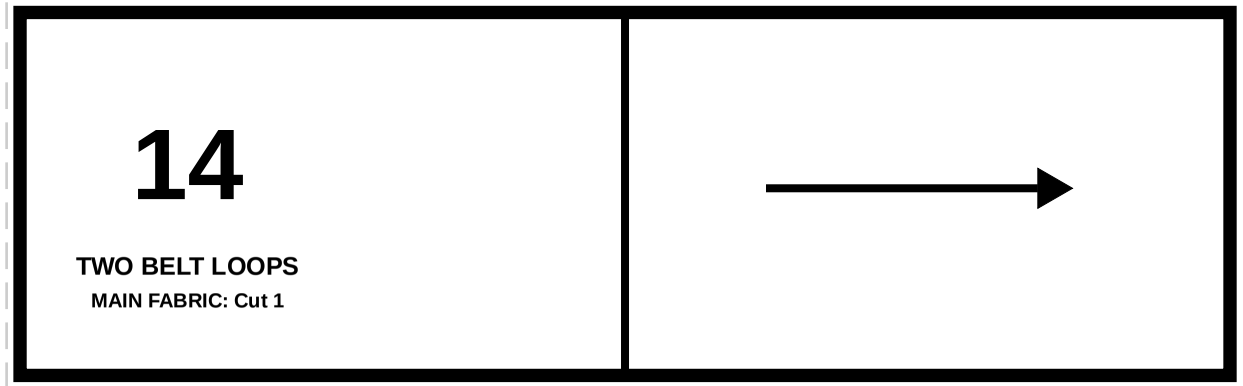

14
TWO BELT LOOPS
MAIN FABRIC: Cut 1

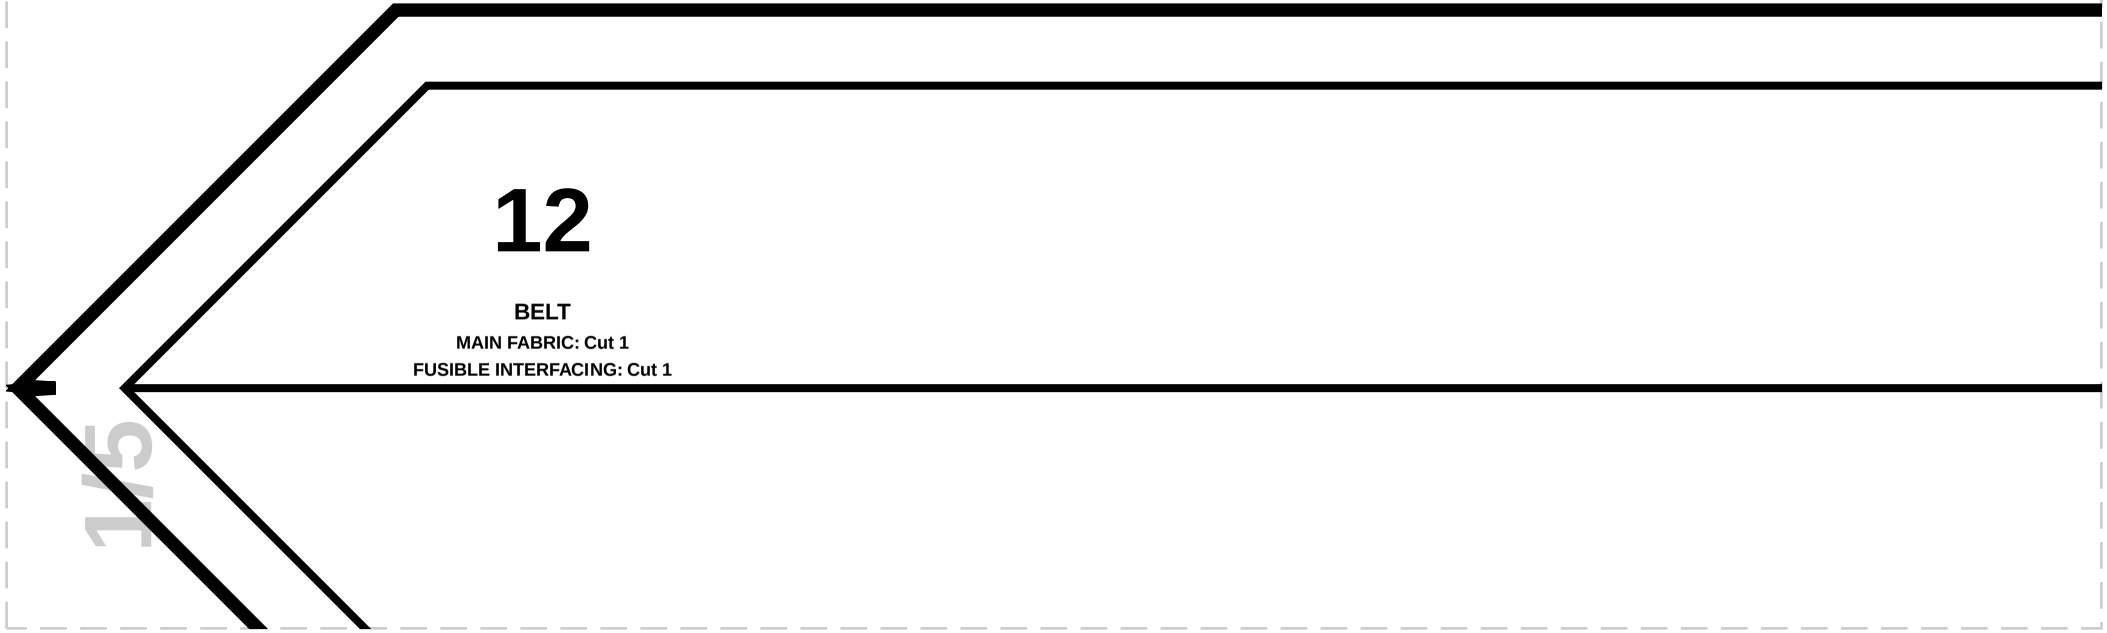

12
BELT
MAIN FABRIC: Cut 1
FUSIBLE INTERFACING: Cut 1


2/1

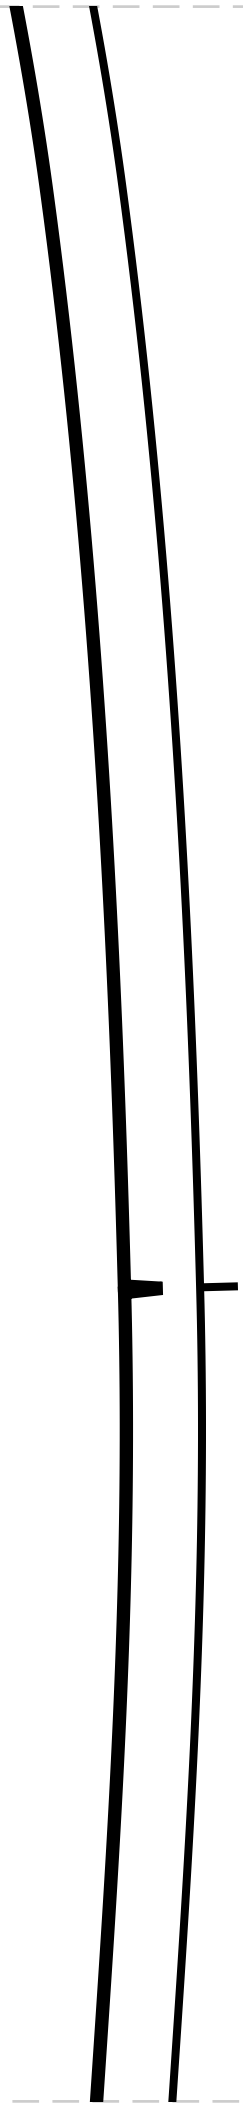


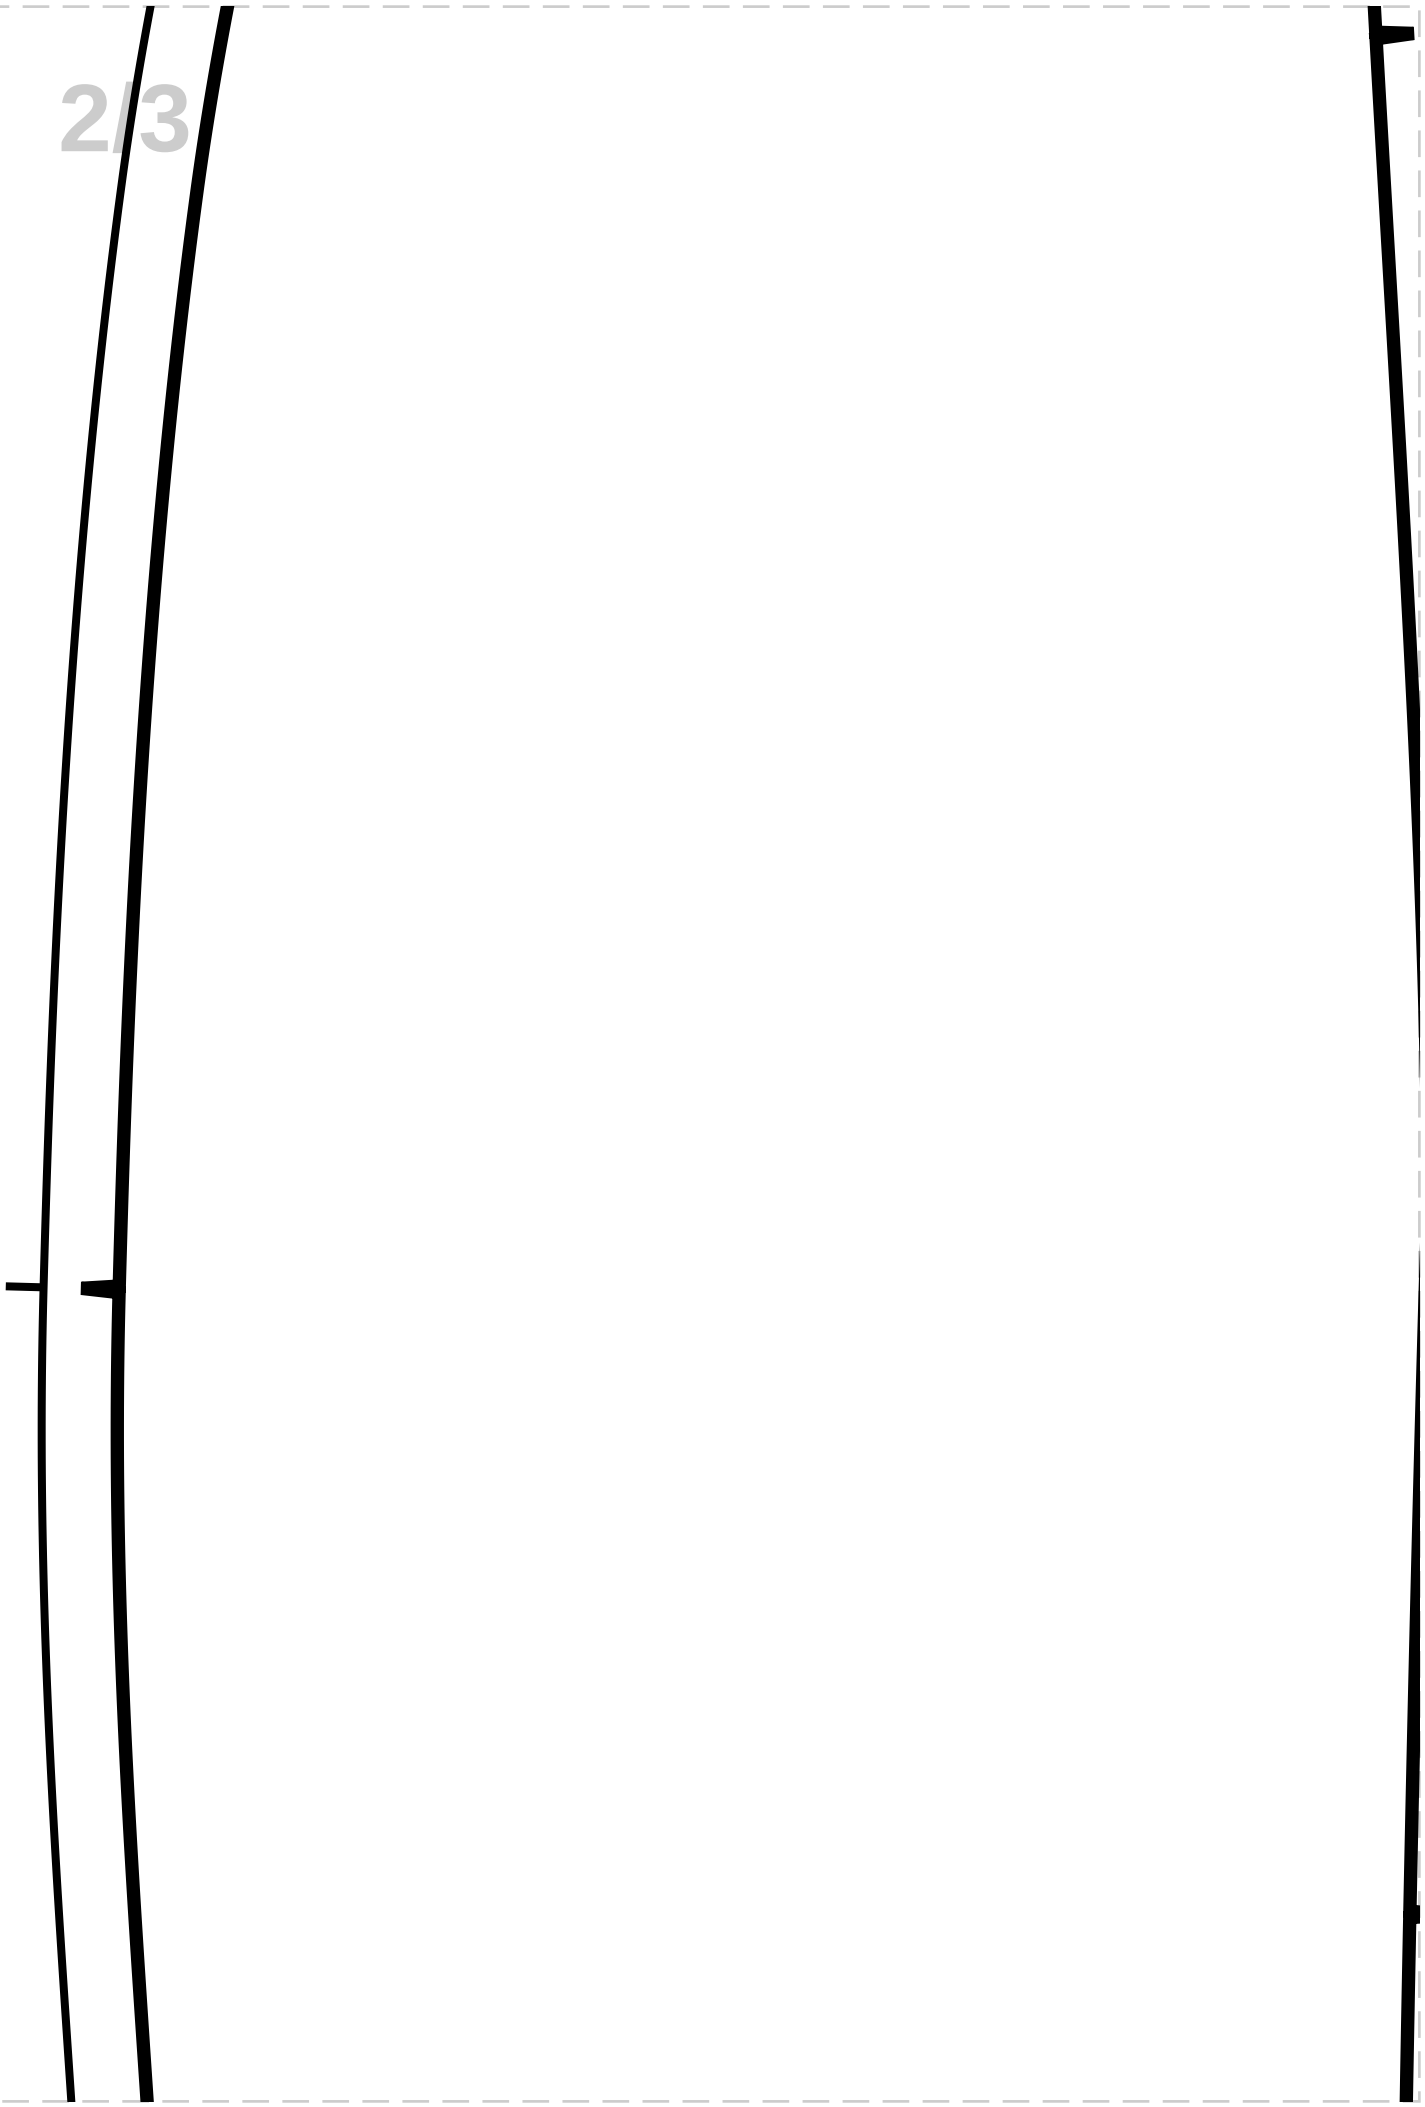


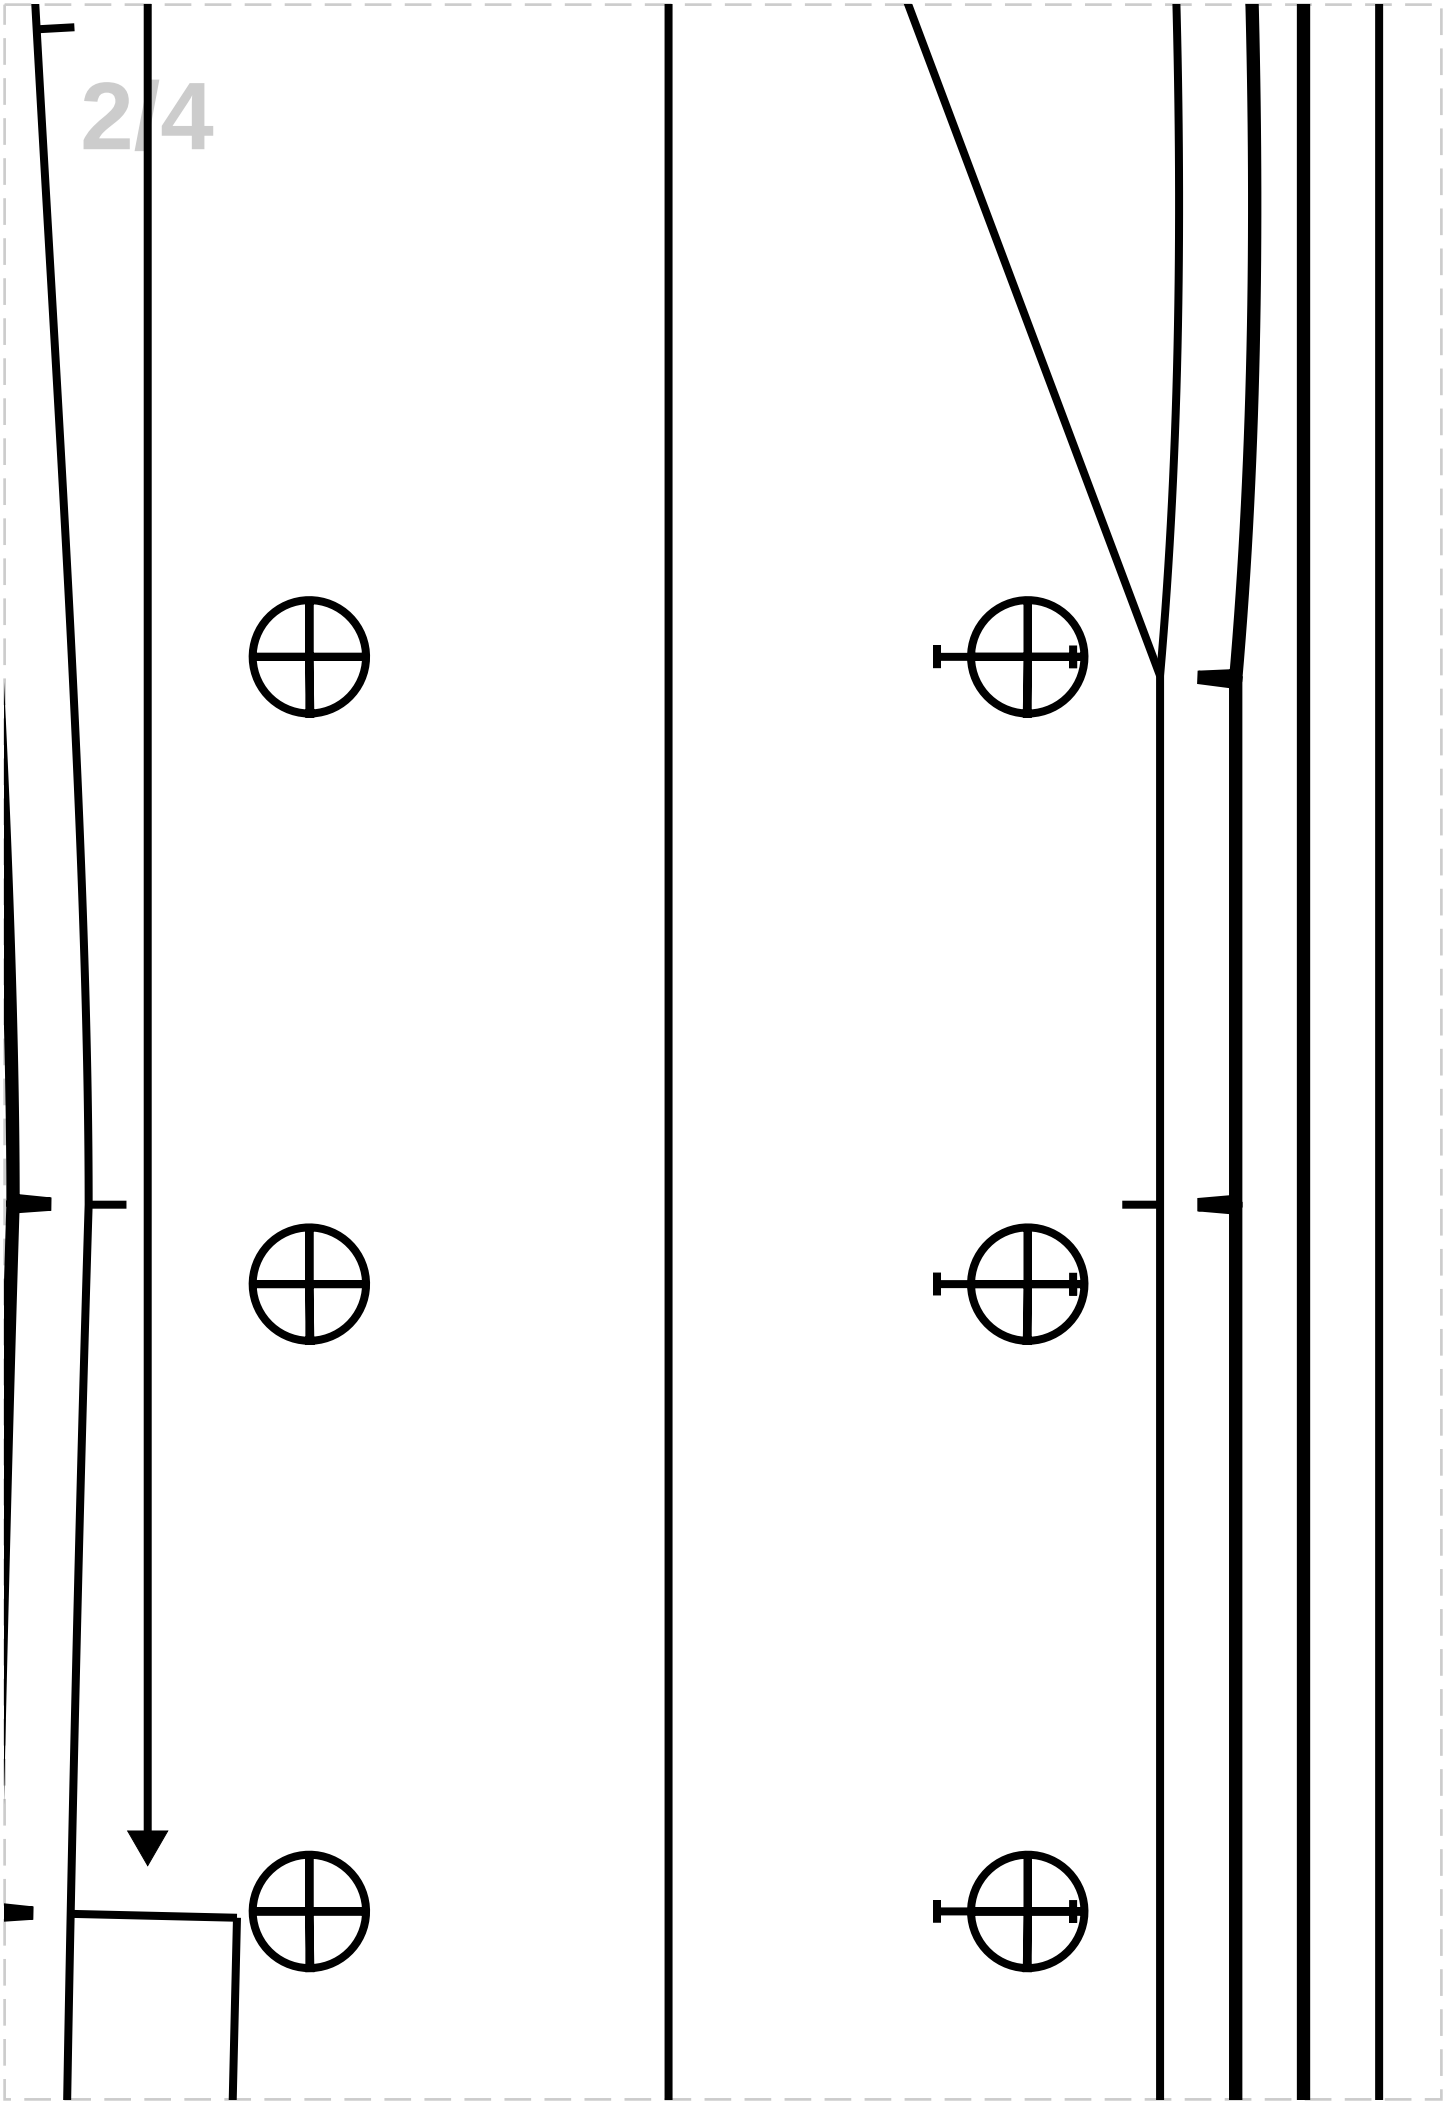


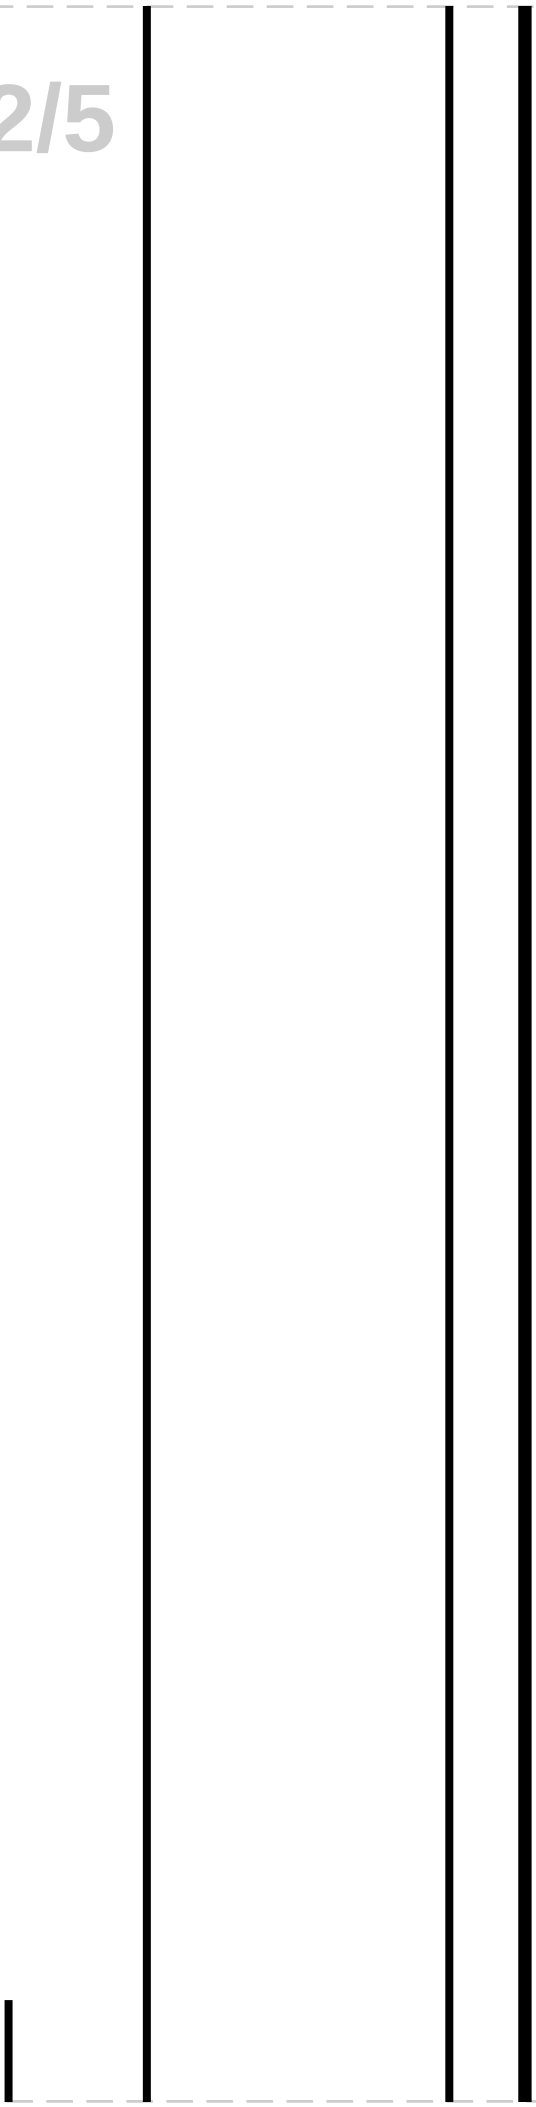


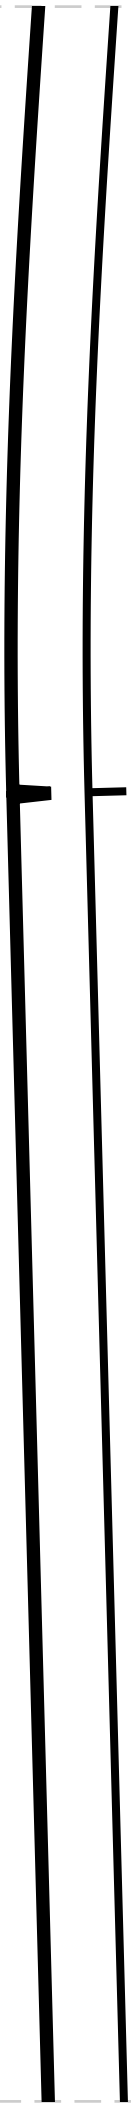


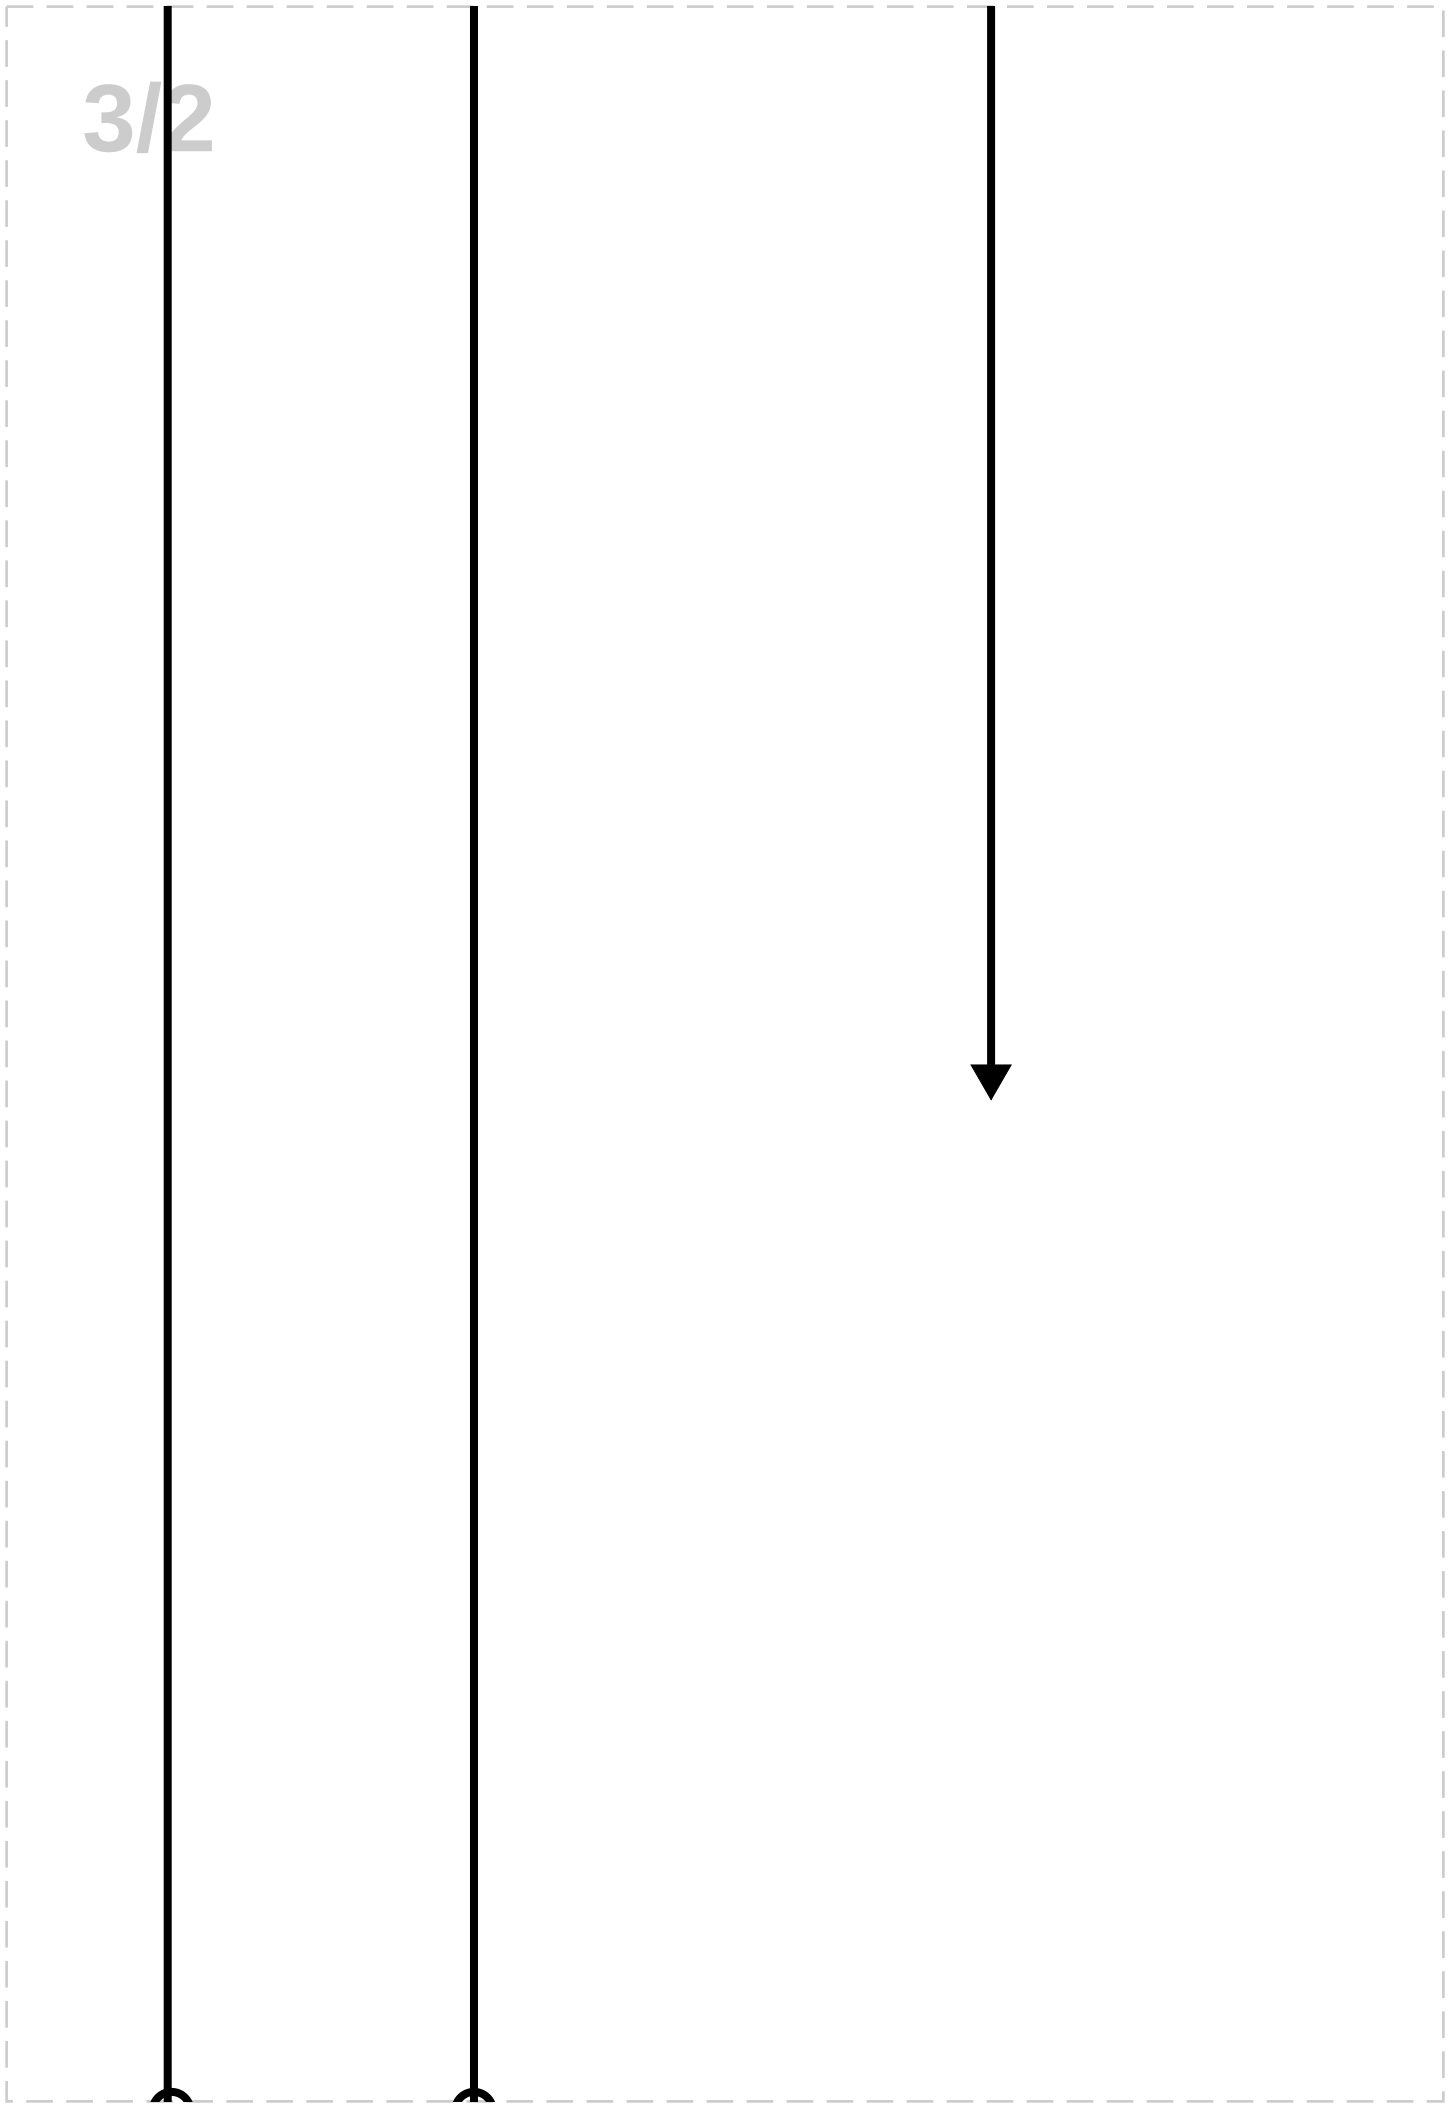


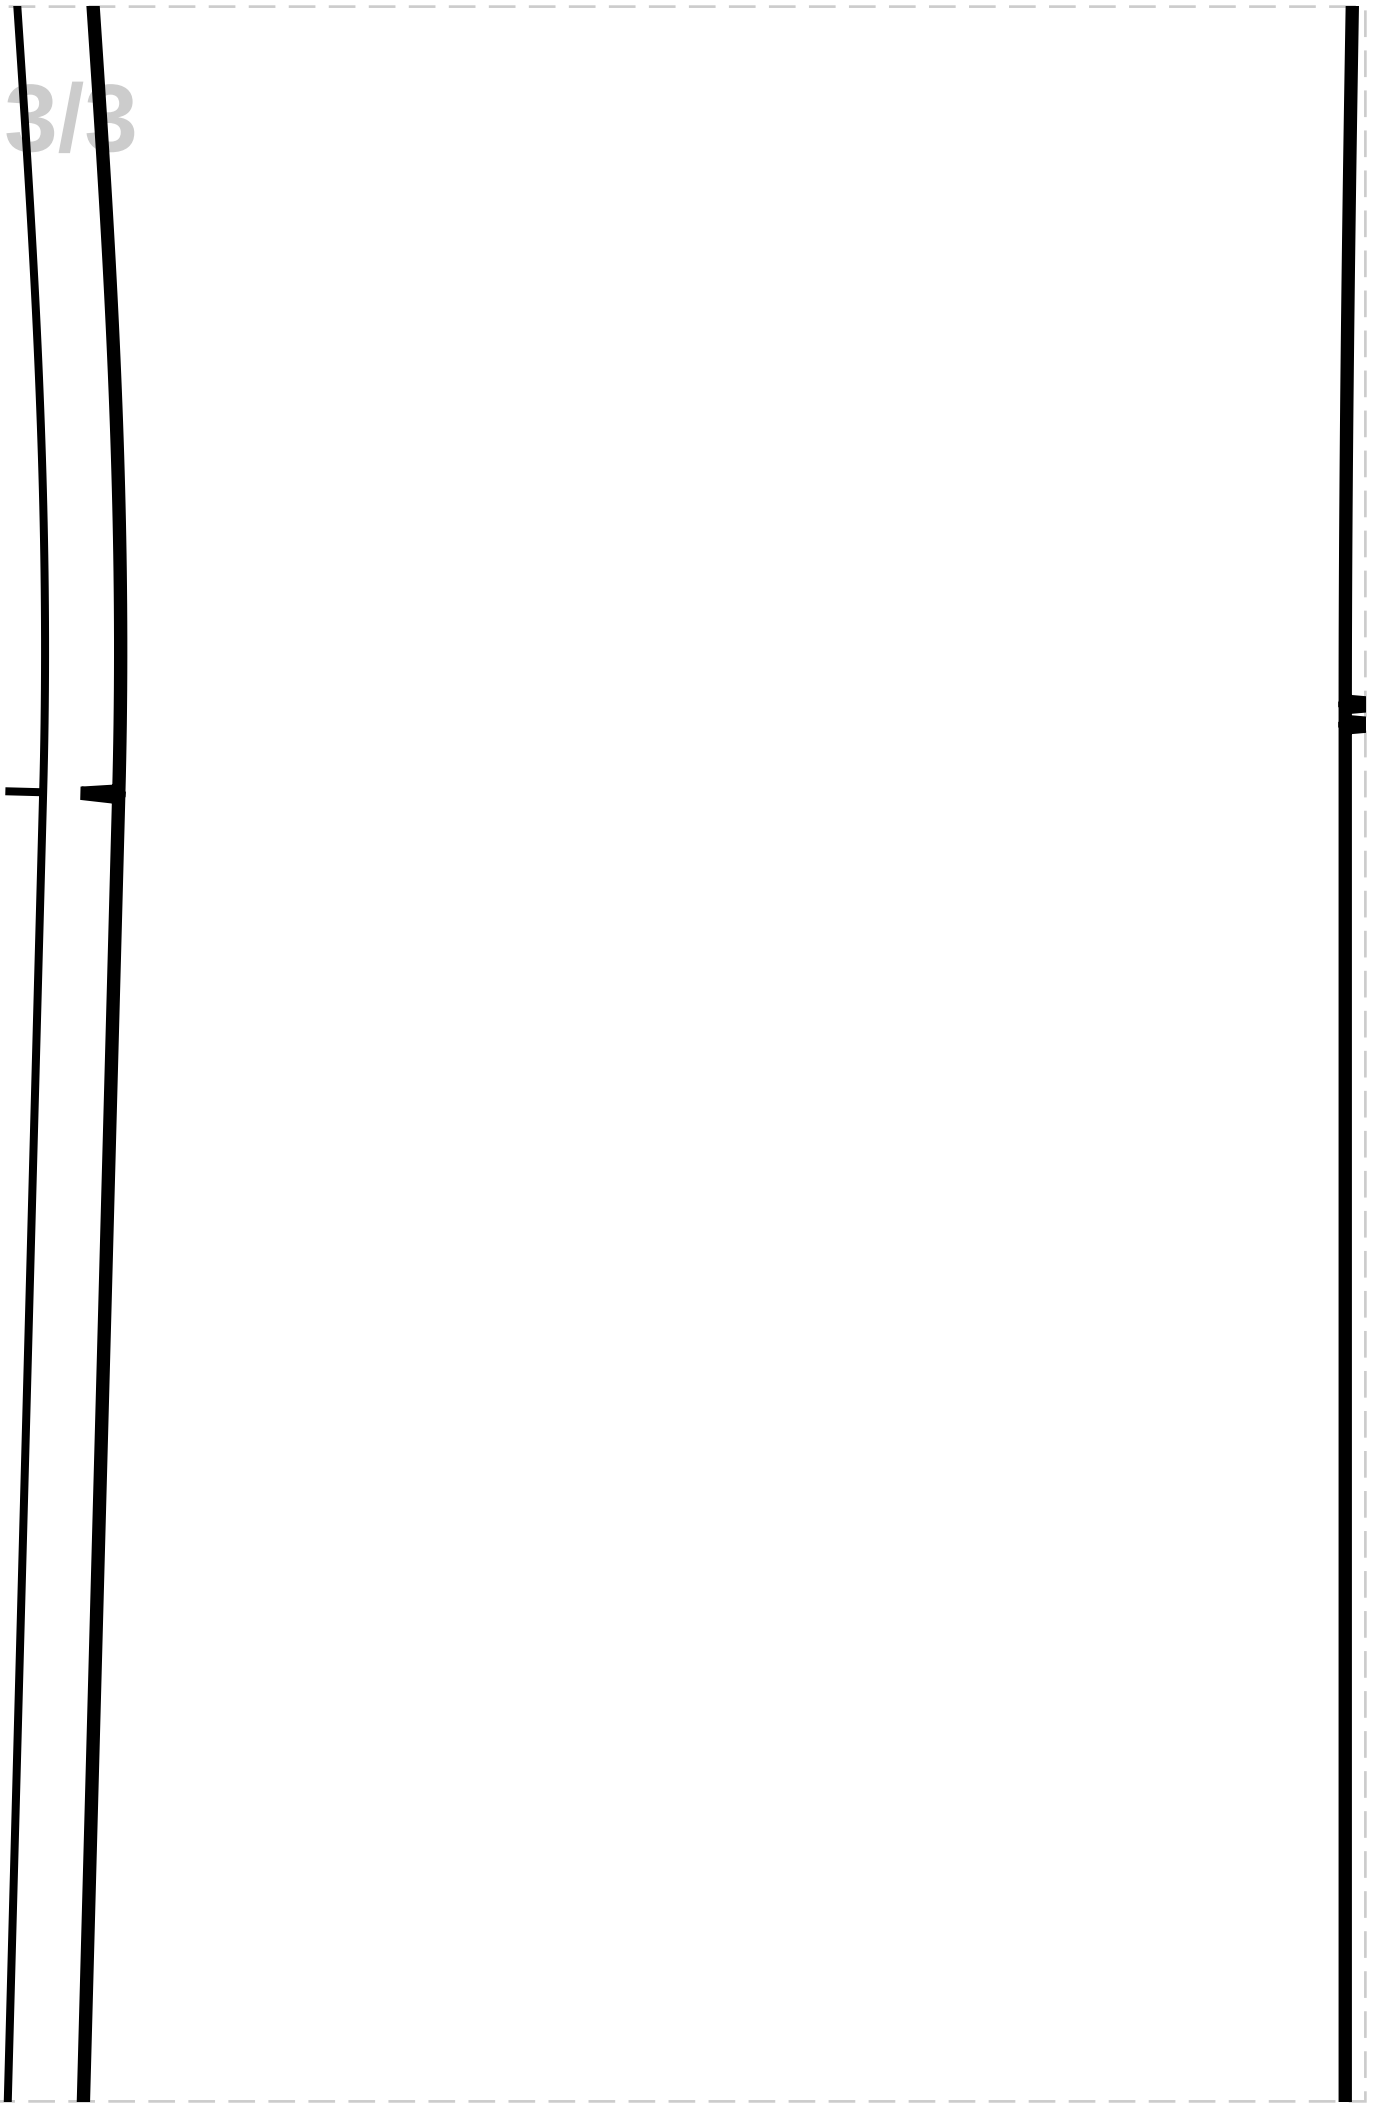


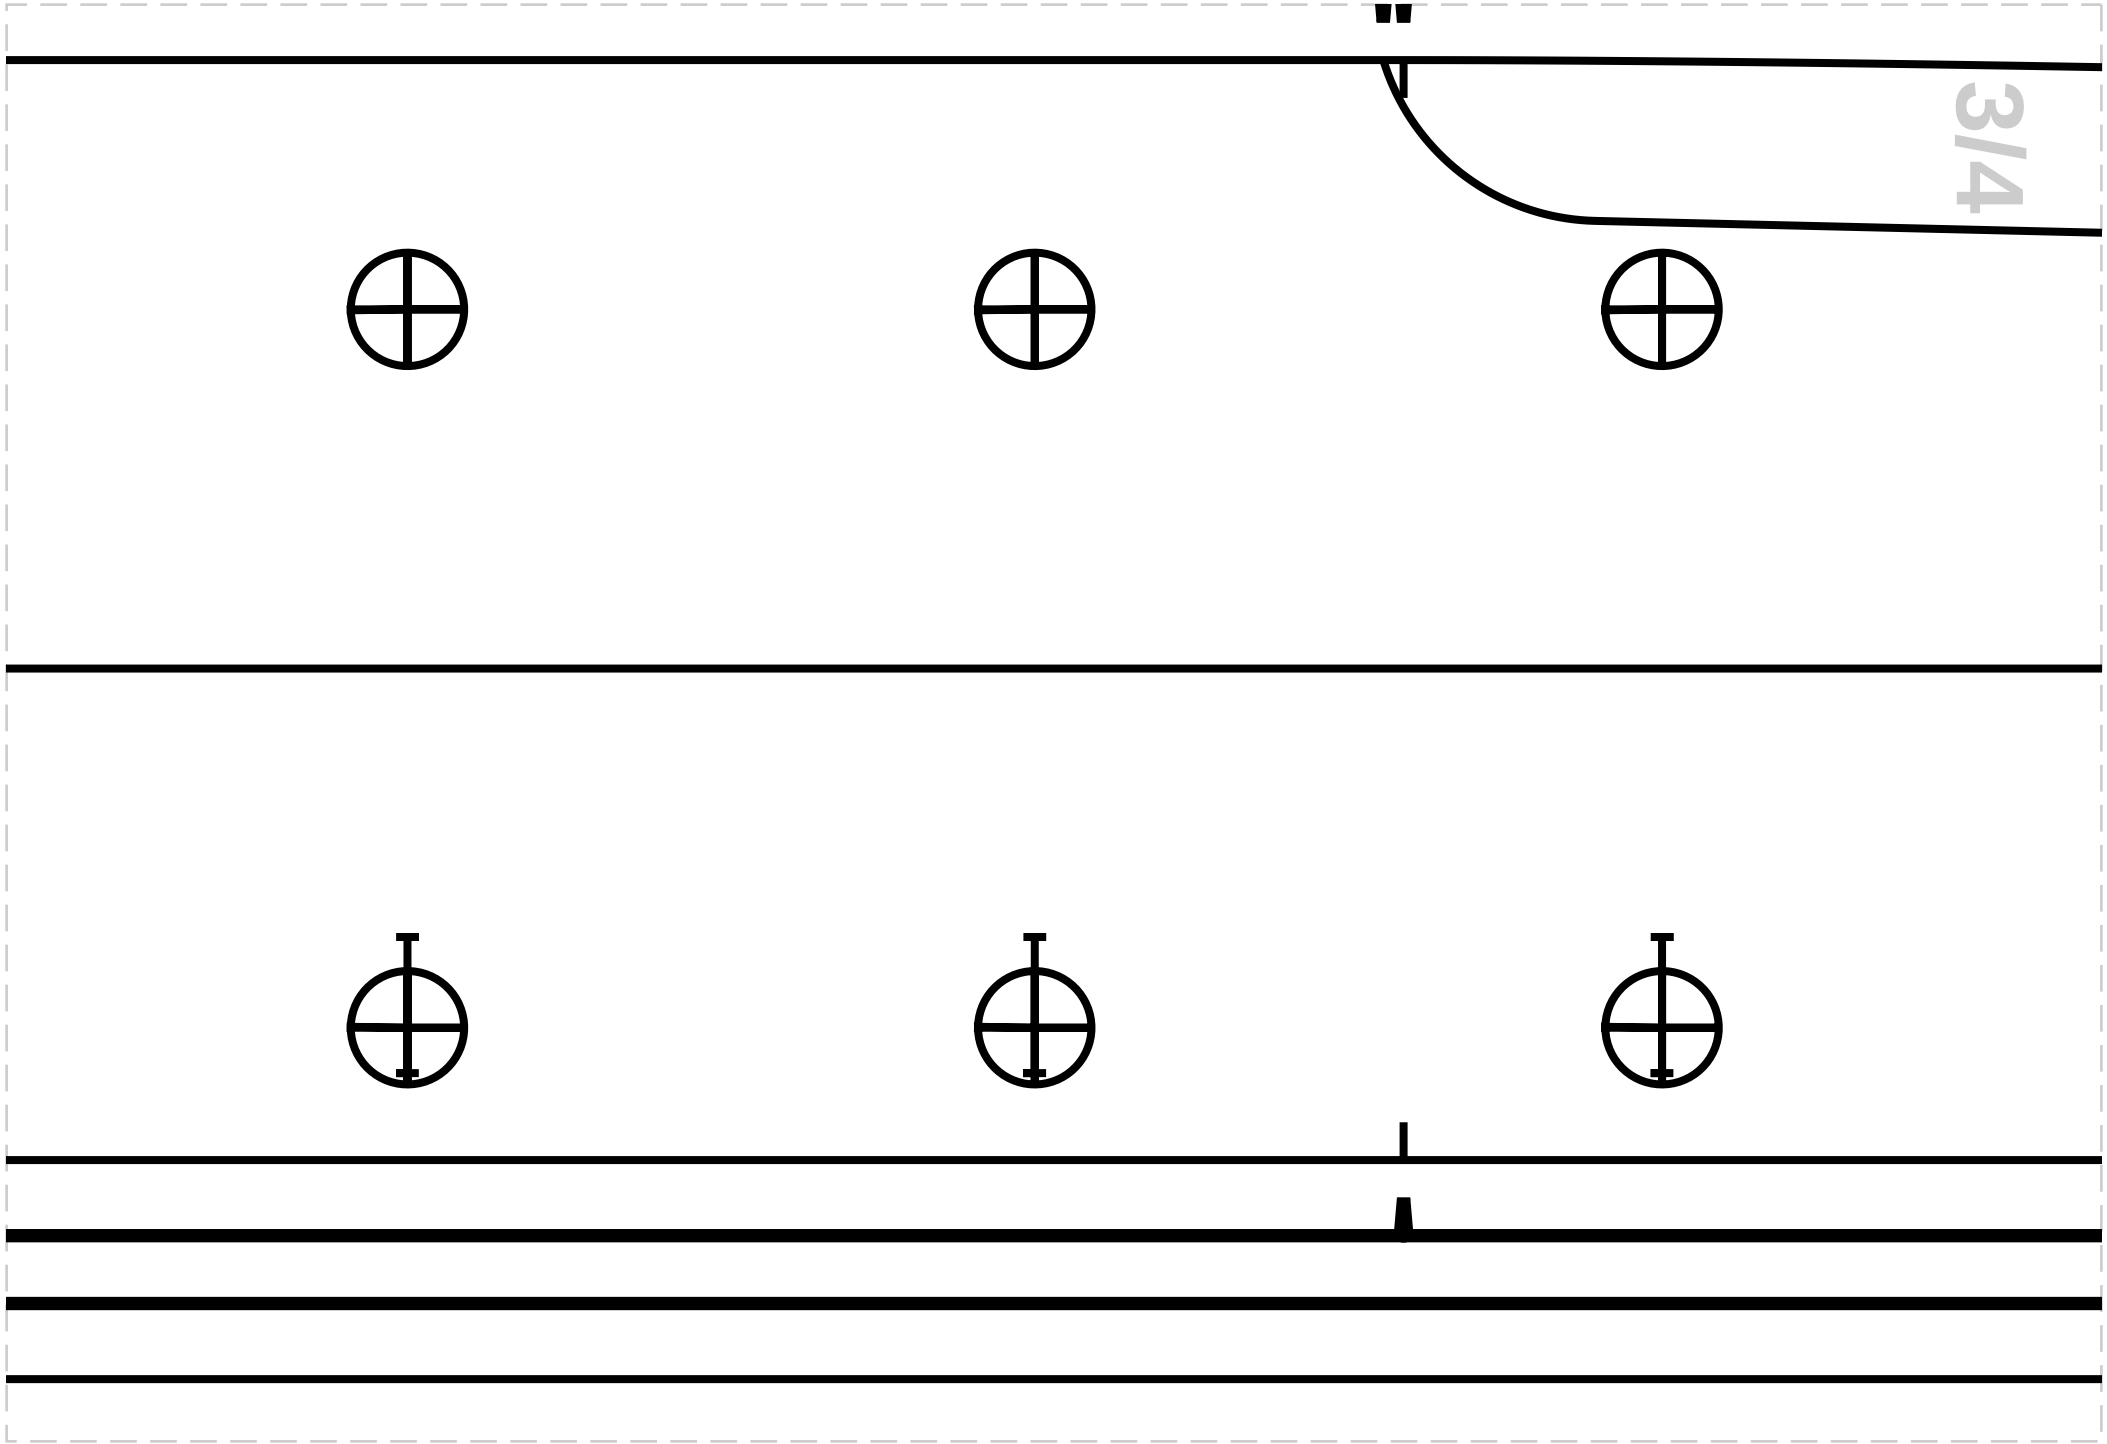

3/4

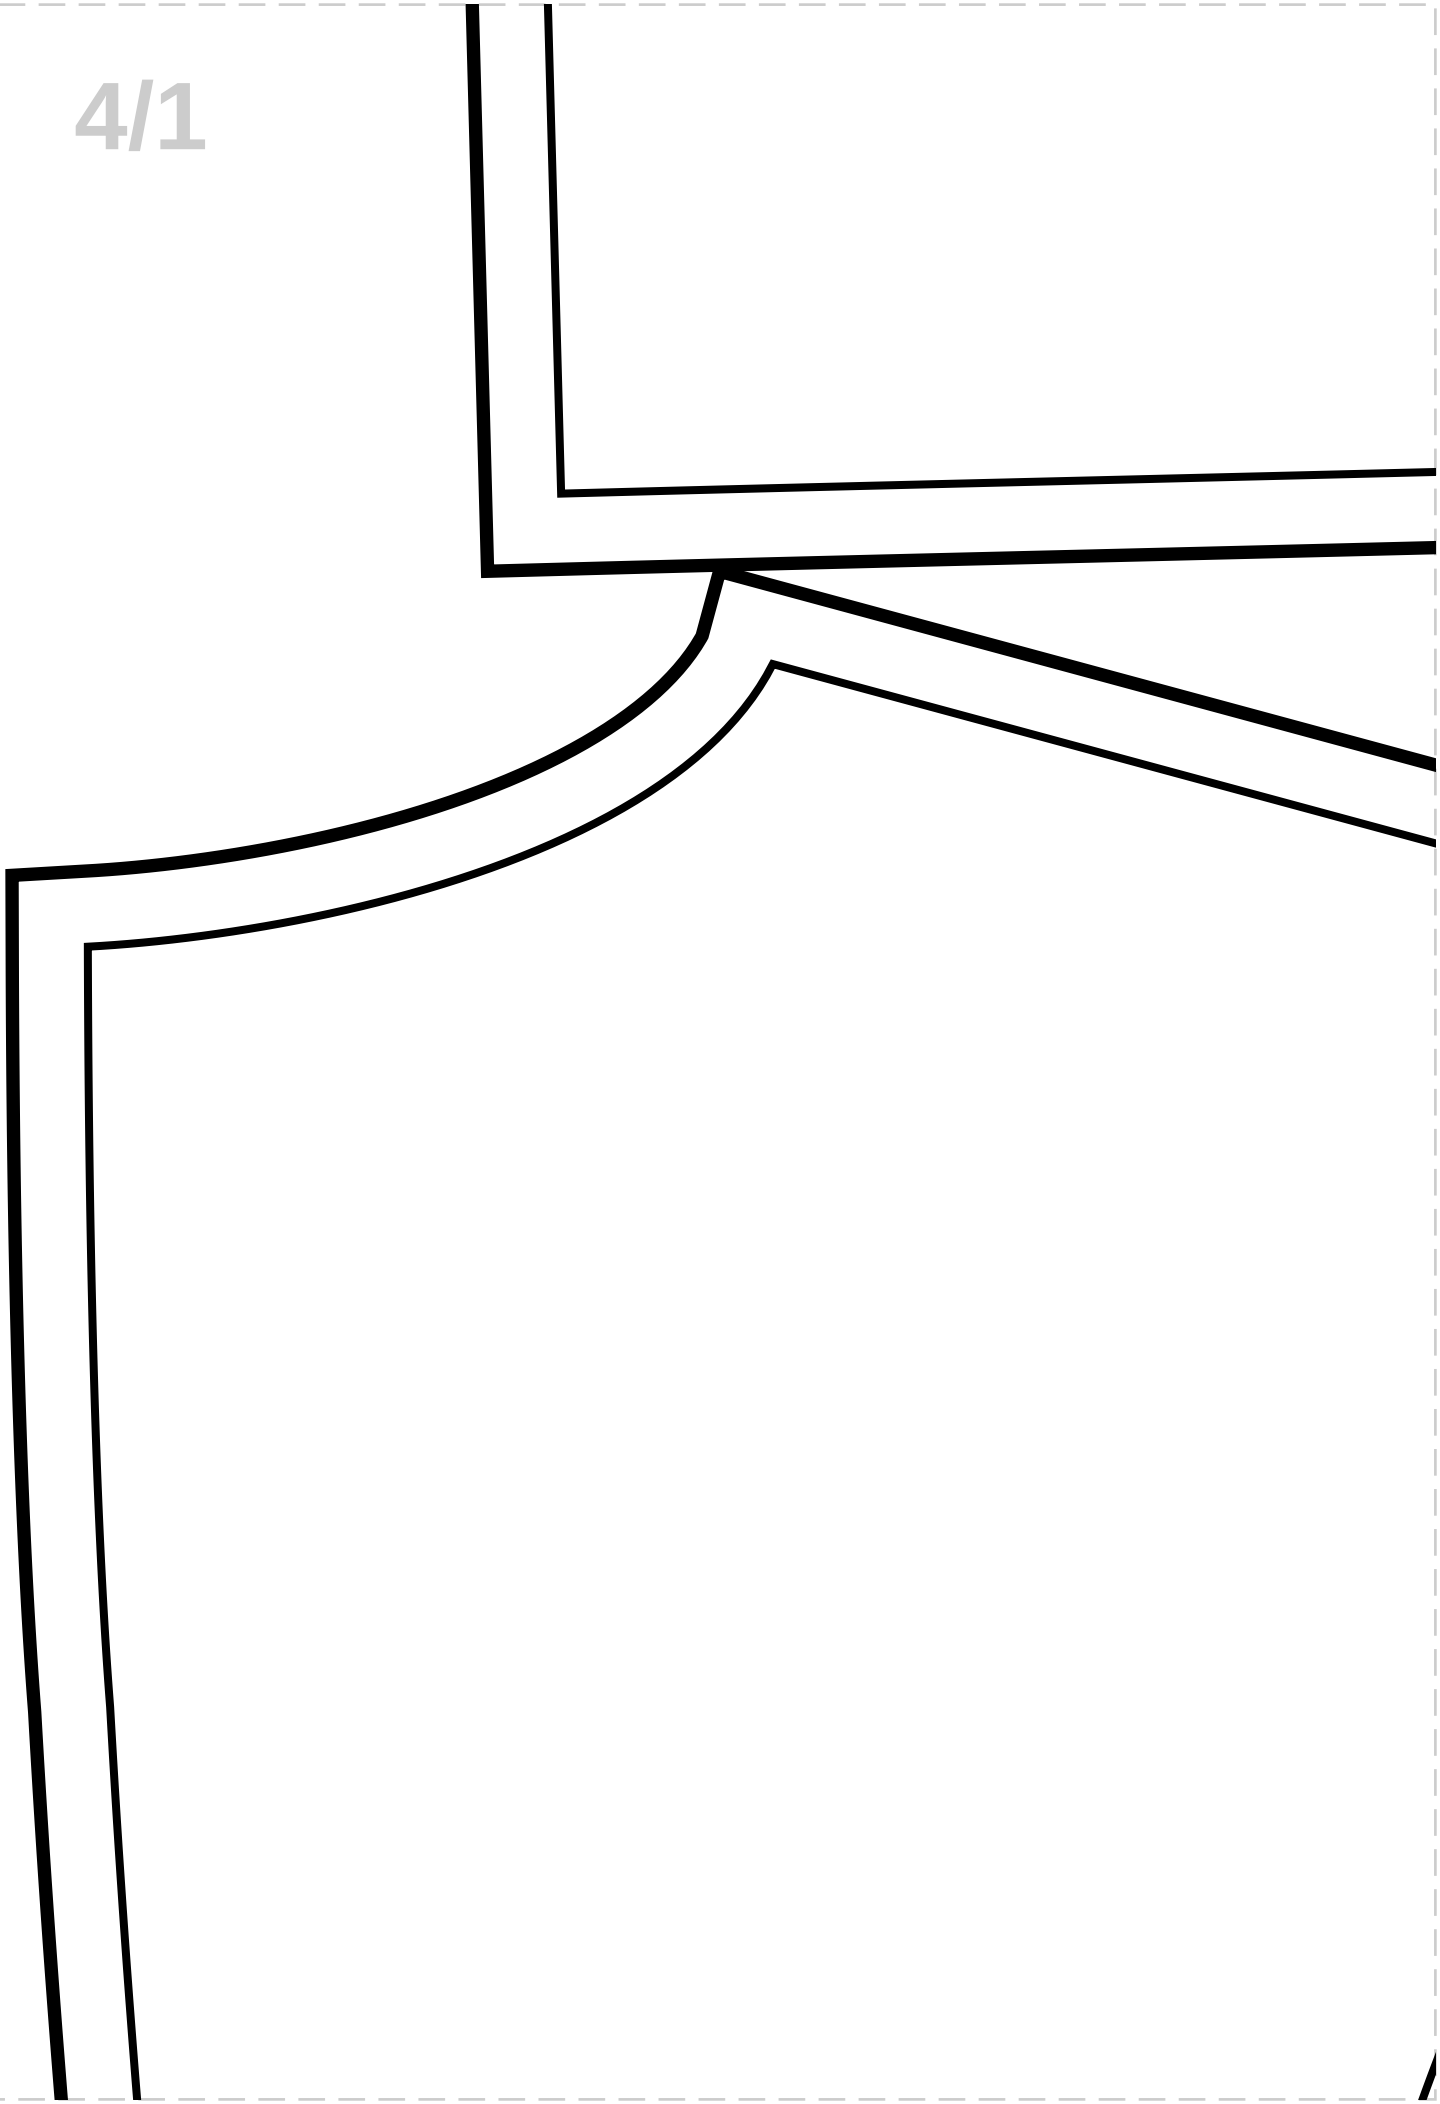


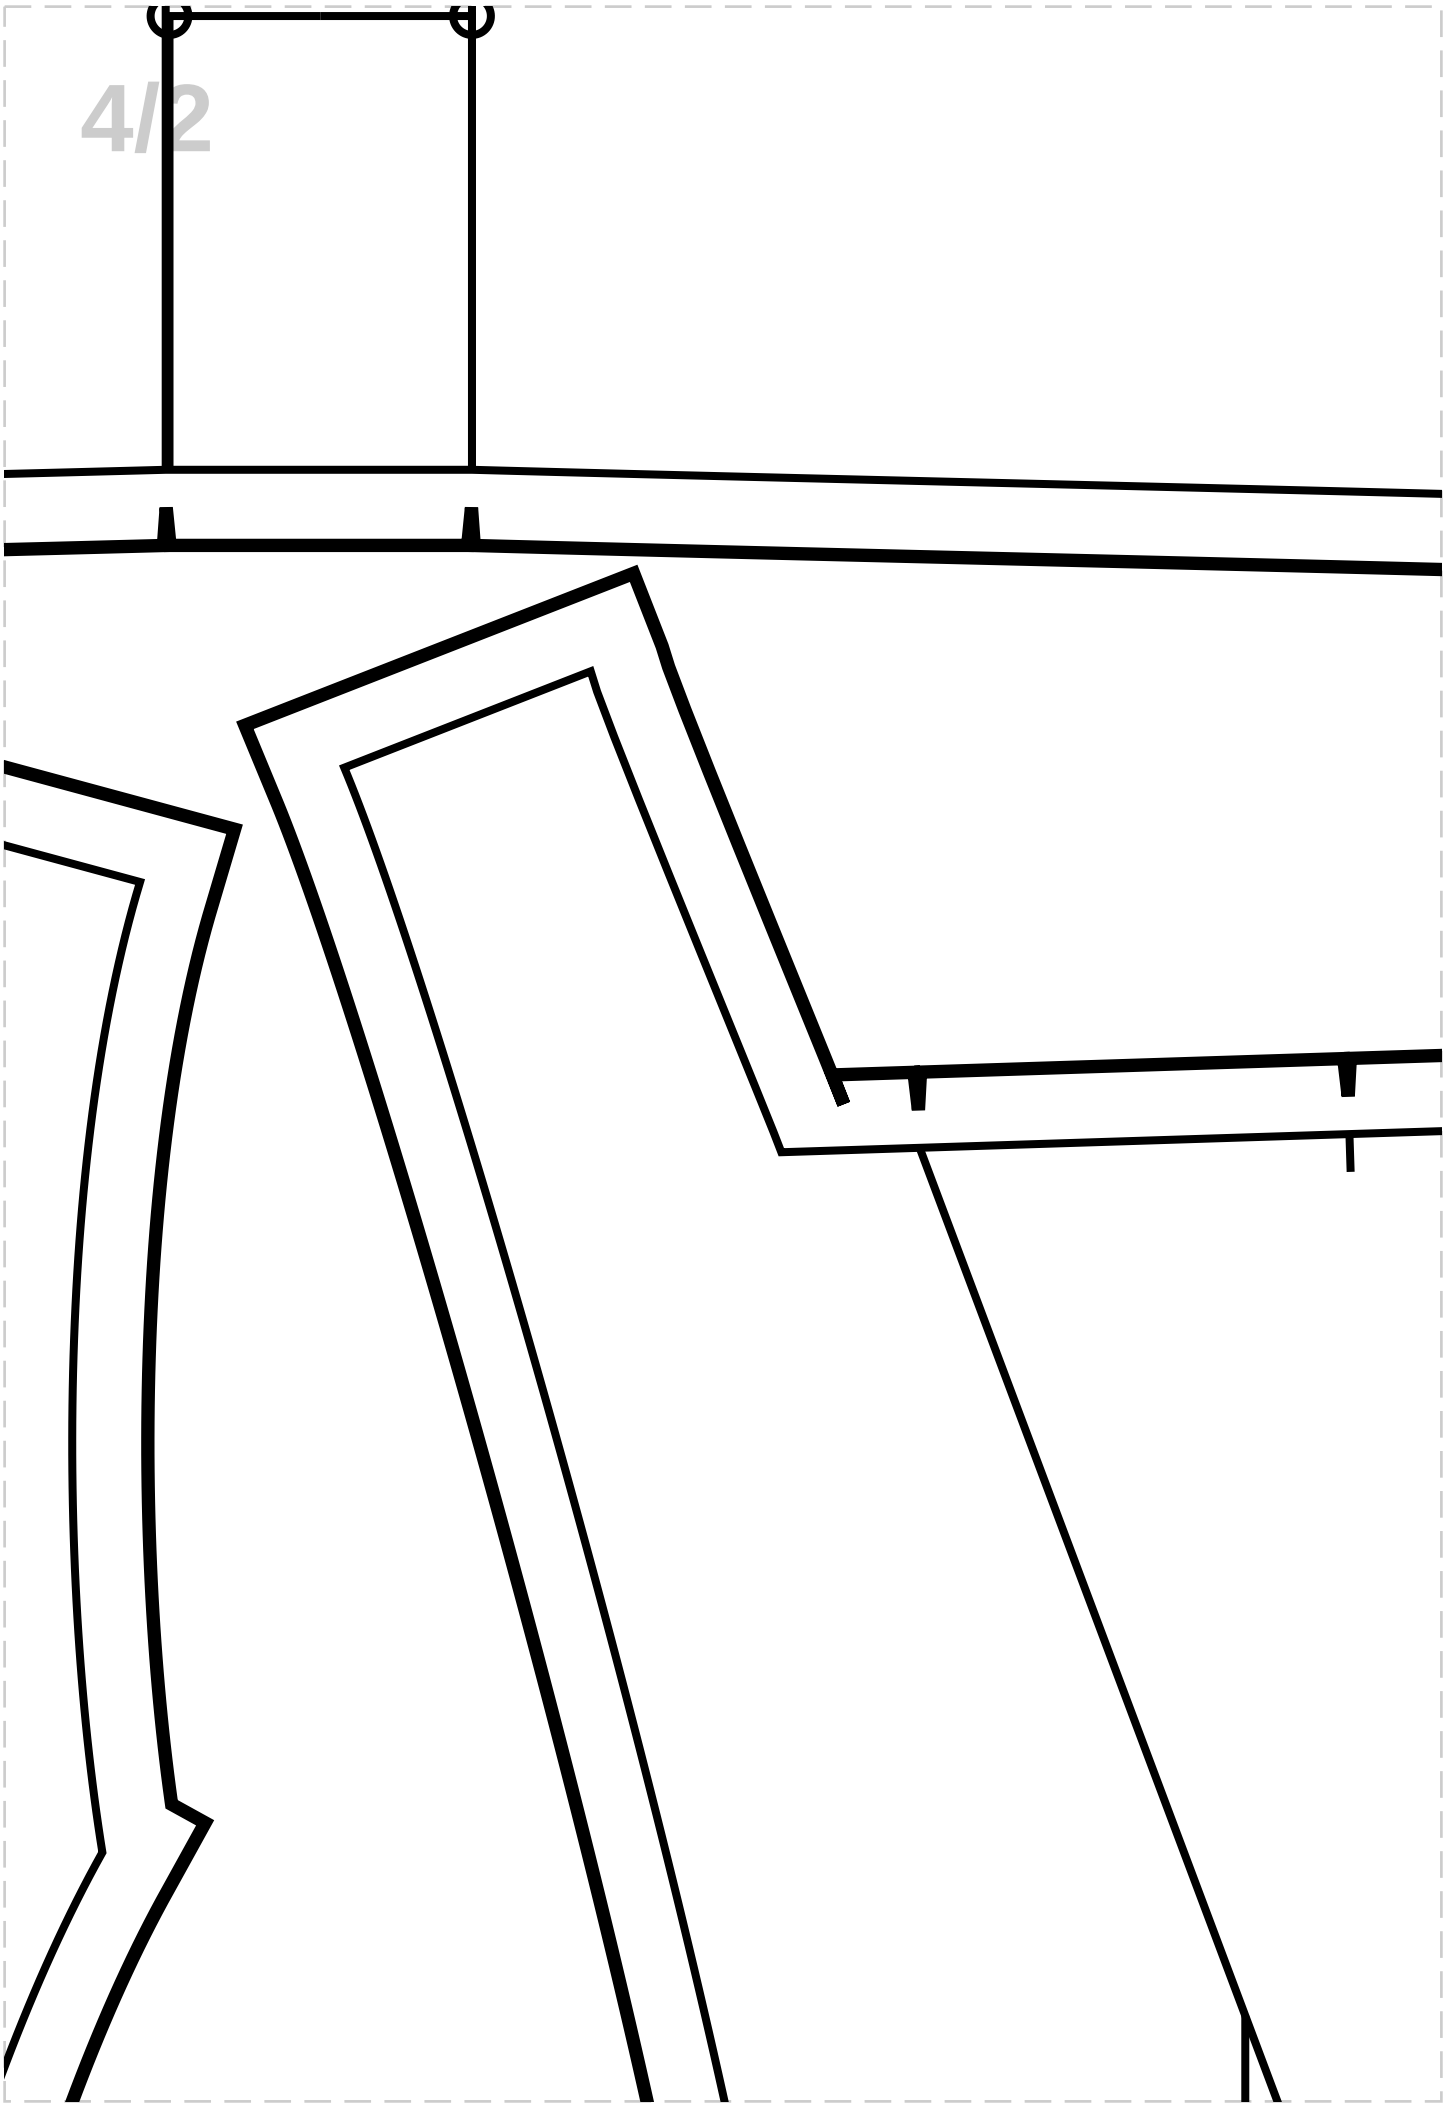


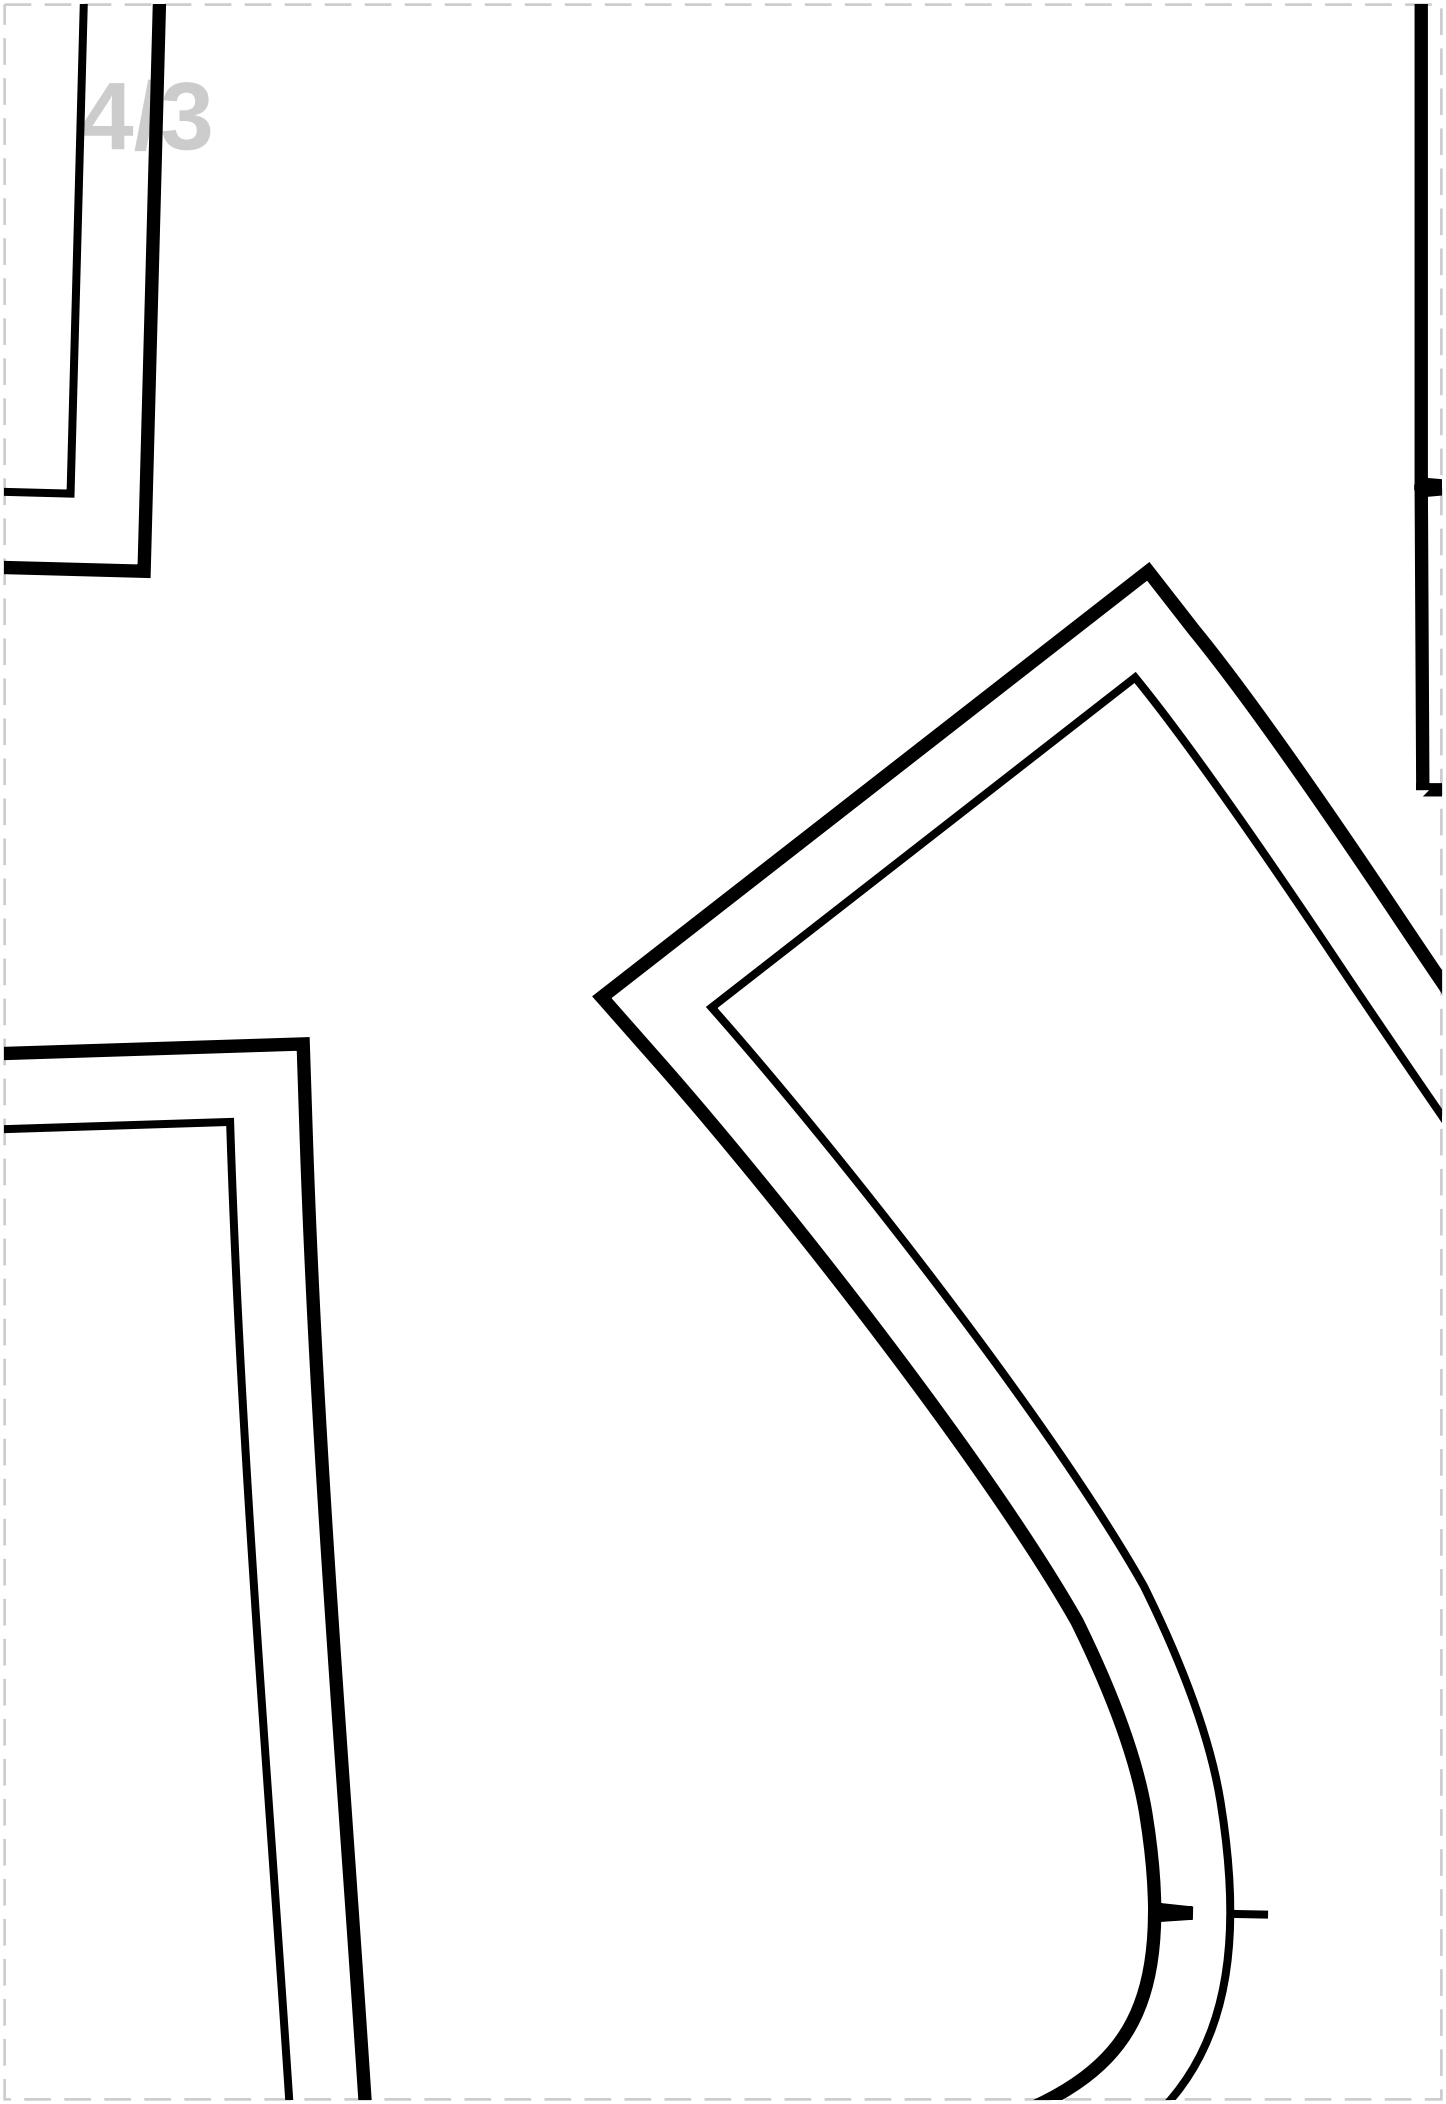

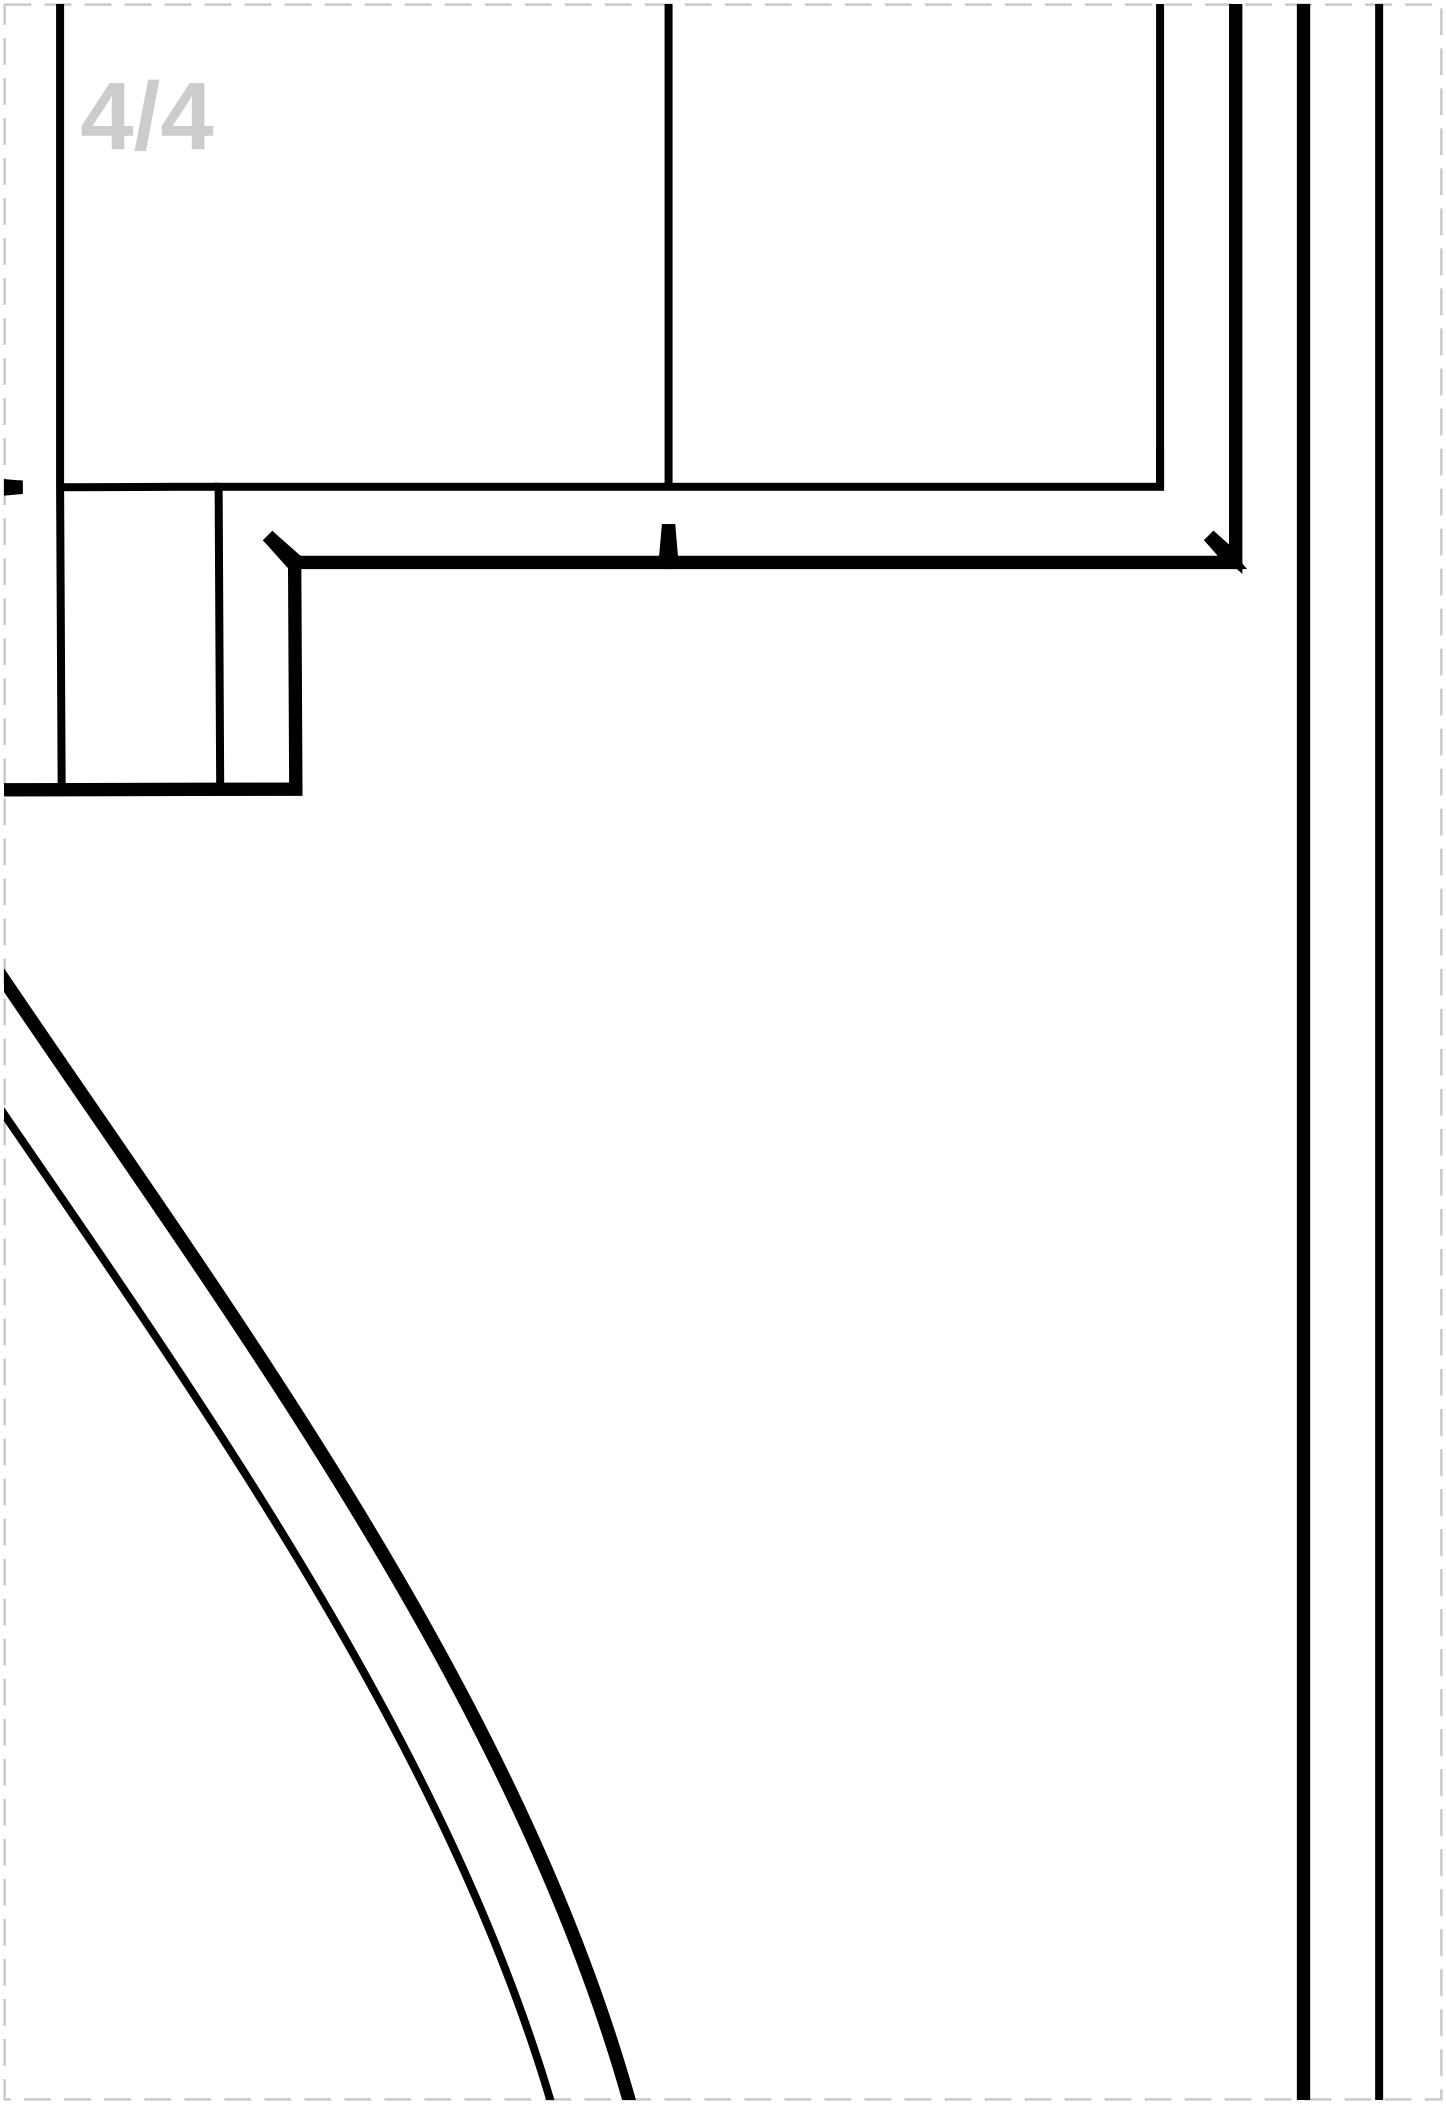


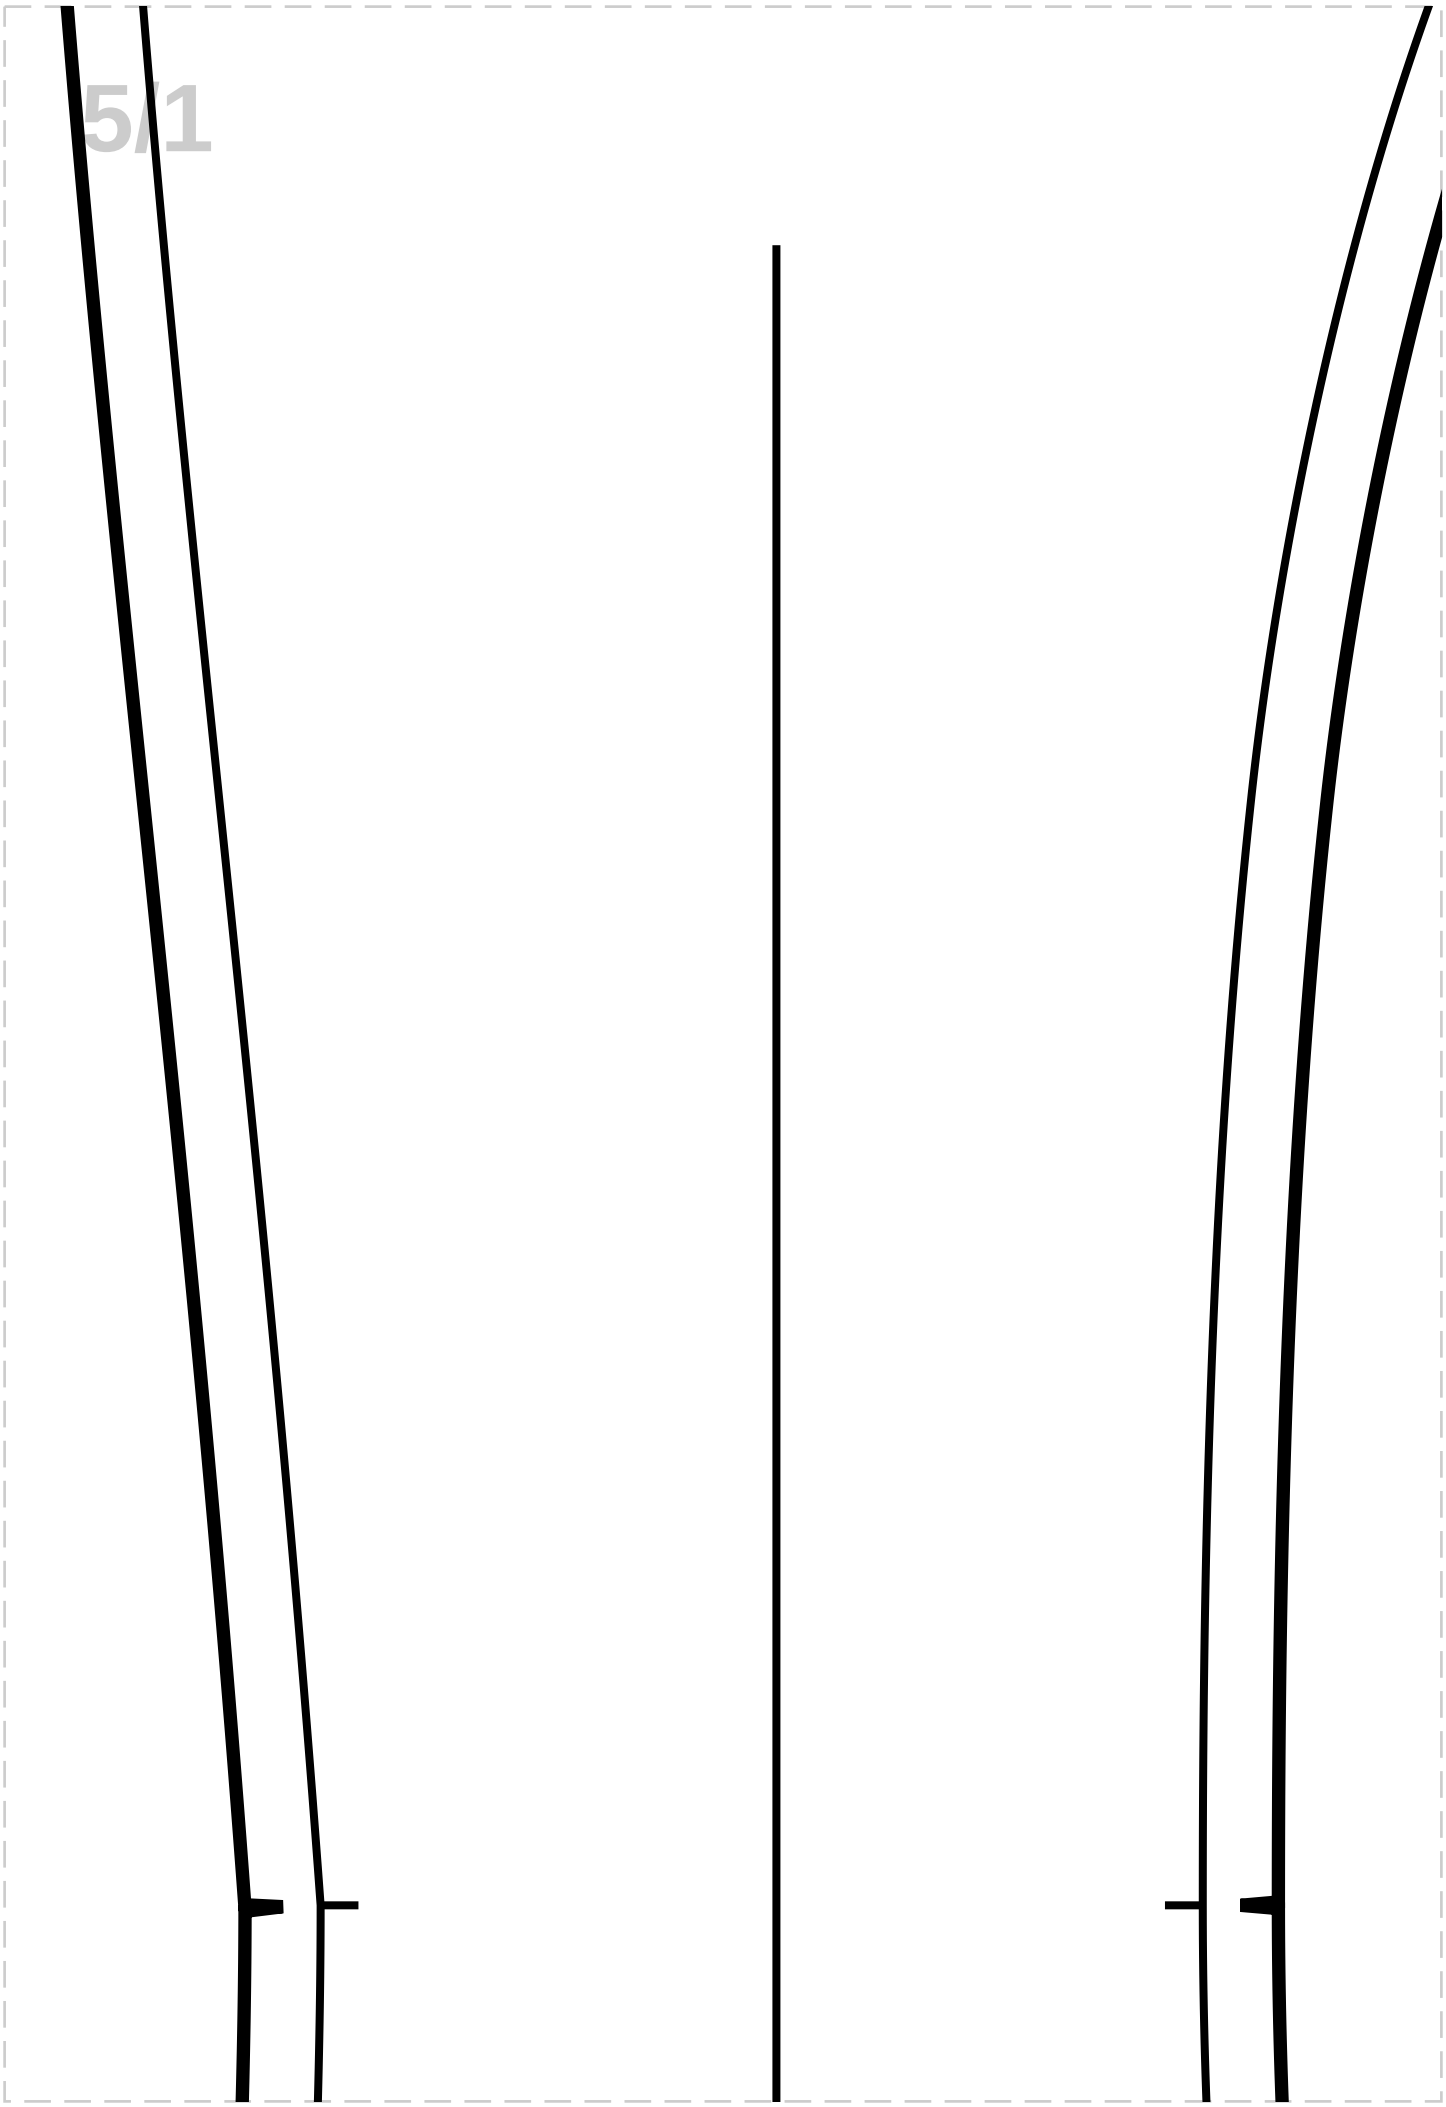


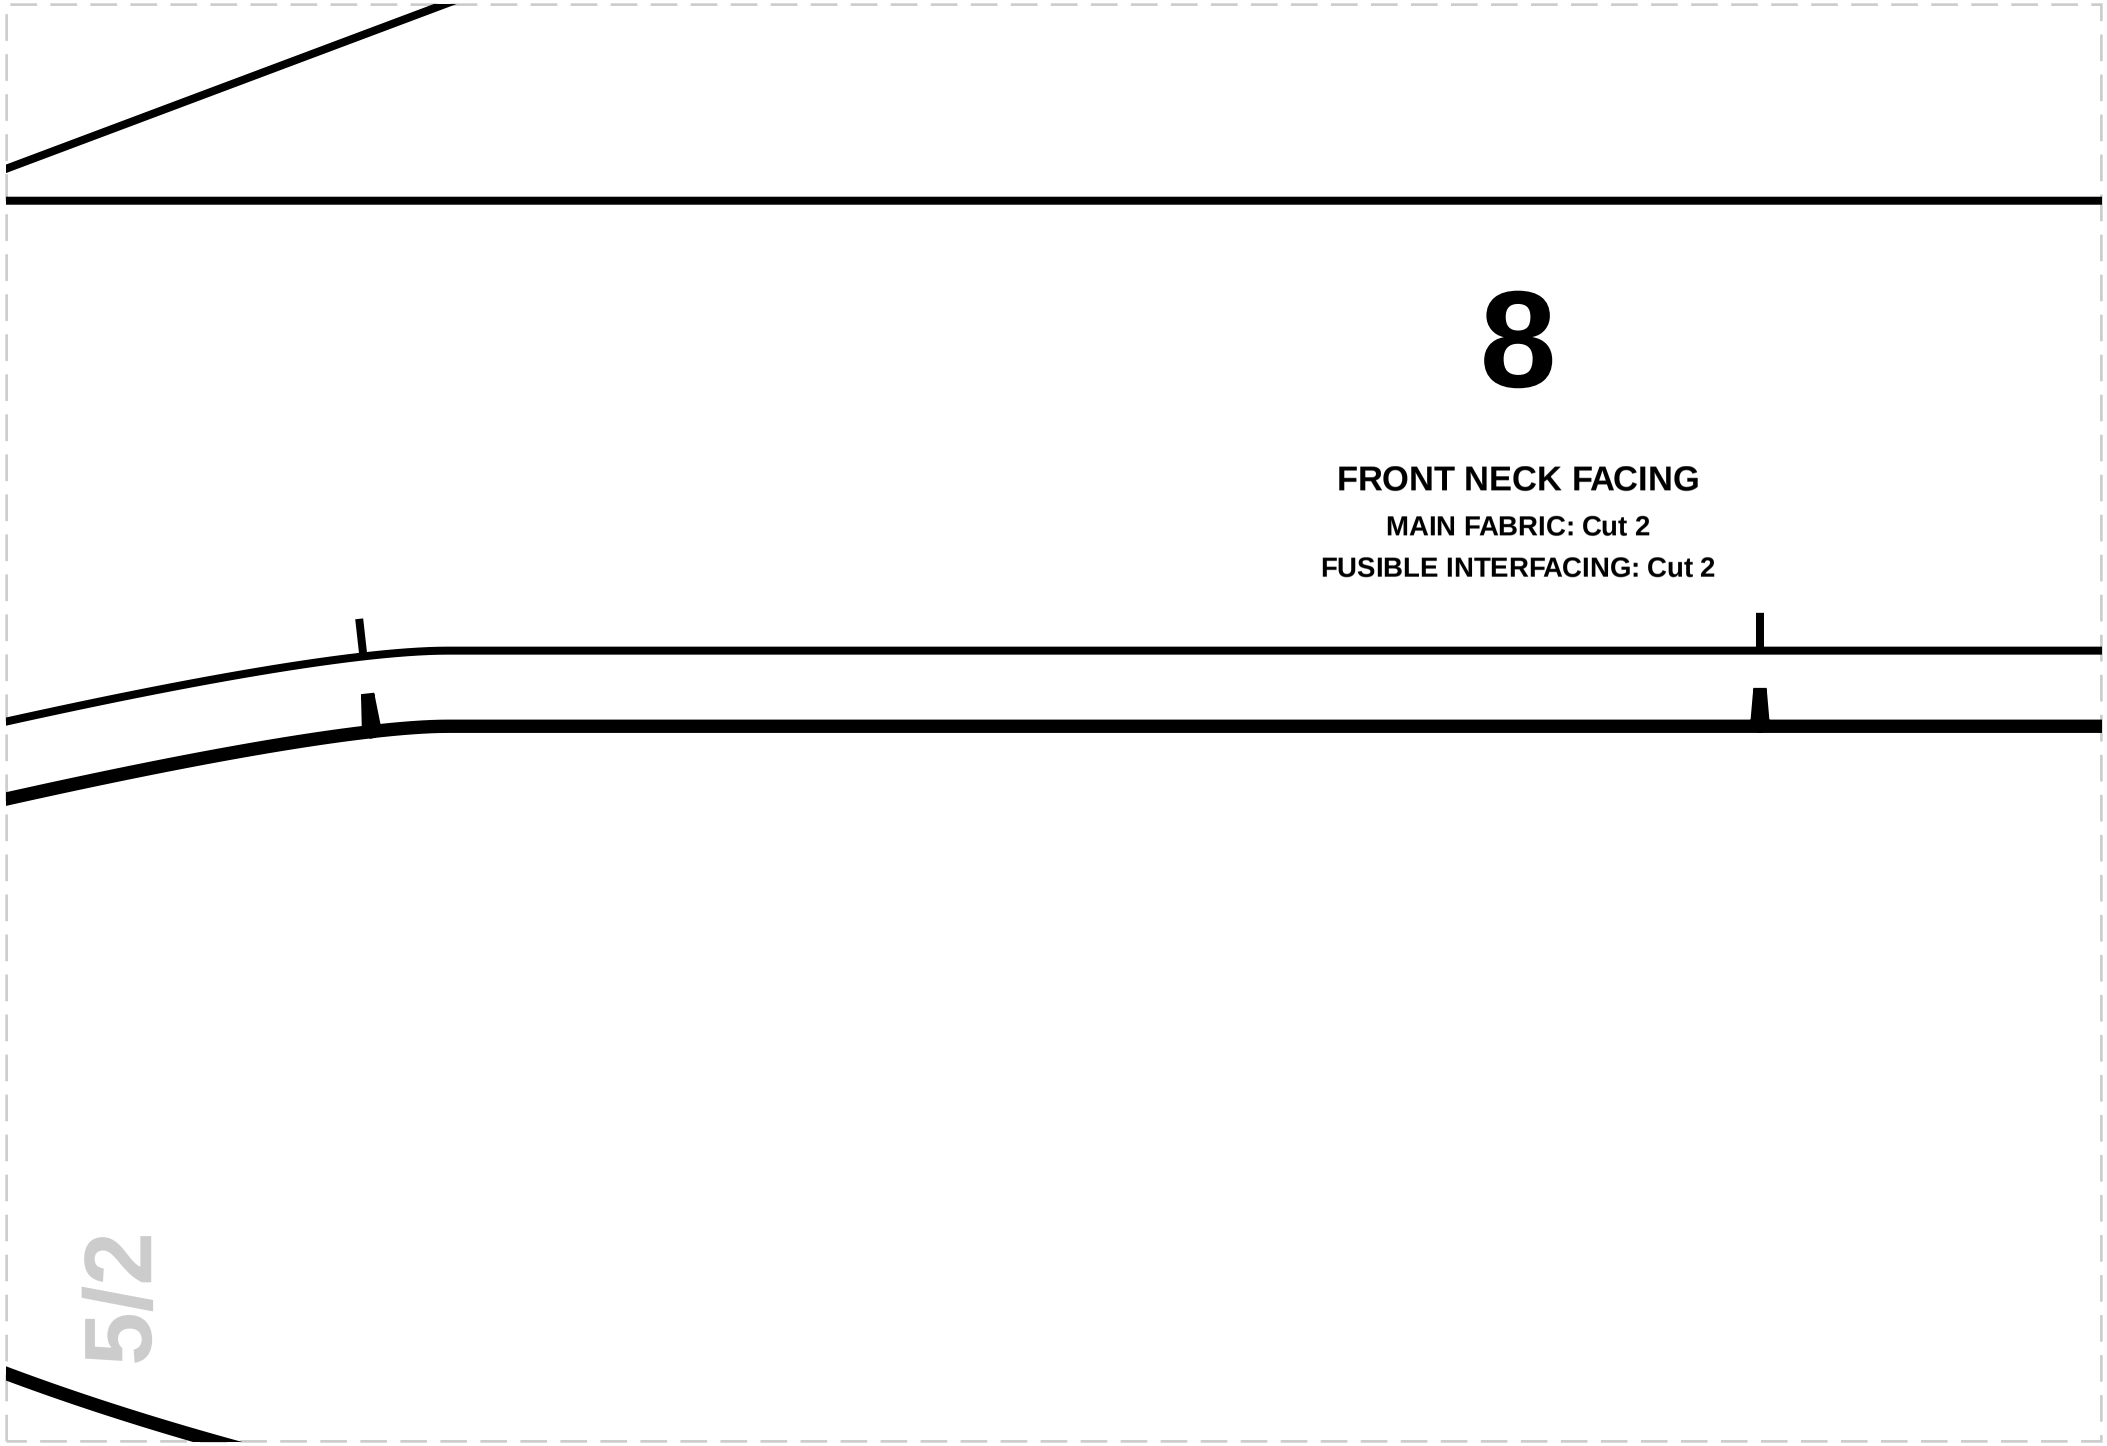

8
FRONT NECK FACING
MAIN FABRIC: Cut 2
FUSIBLE INTERFACING: Cut 2
5/2

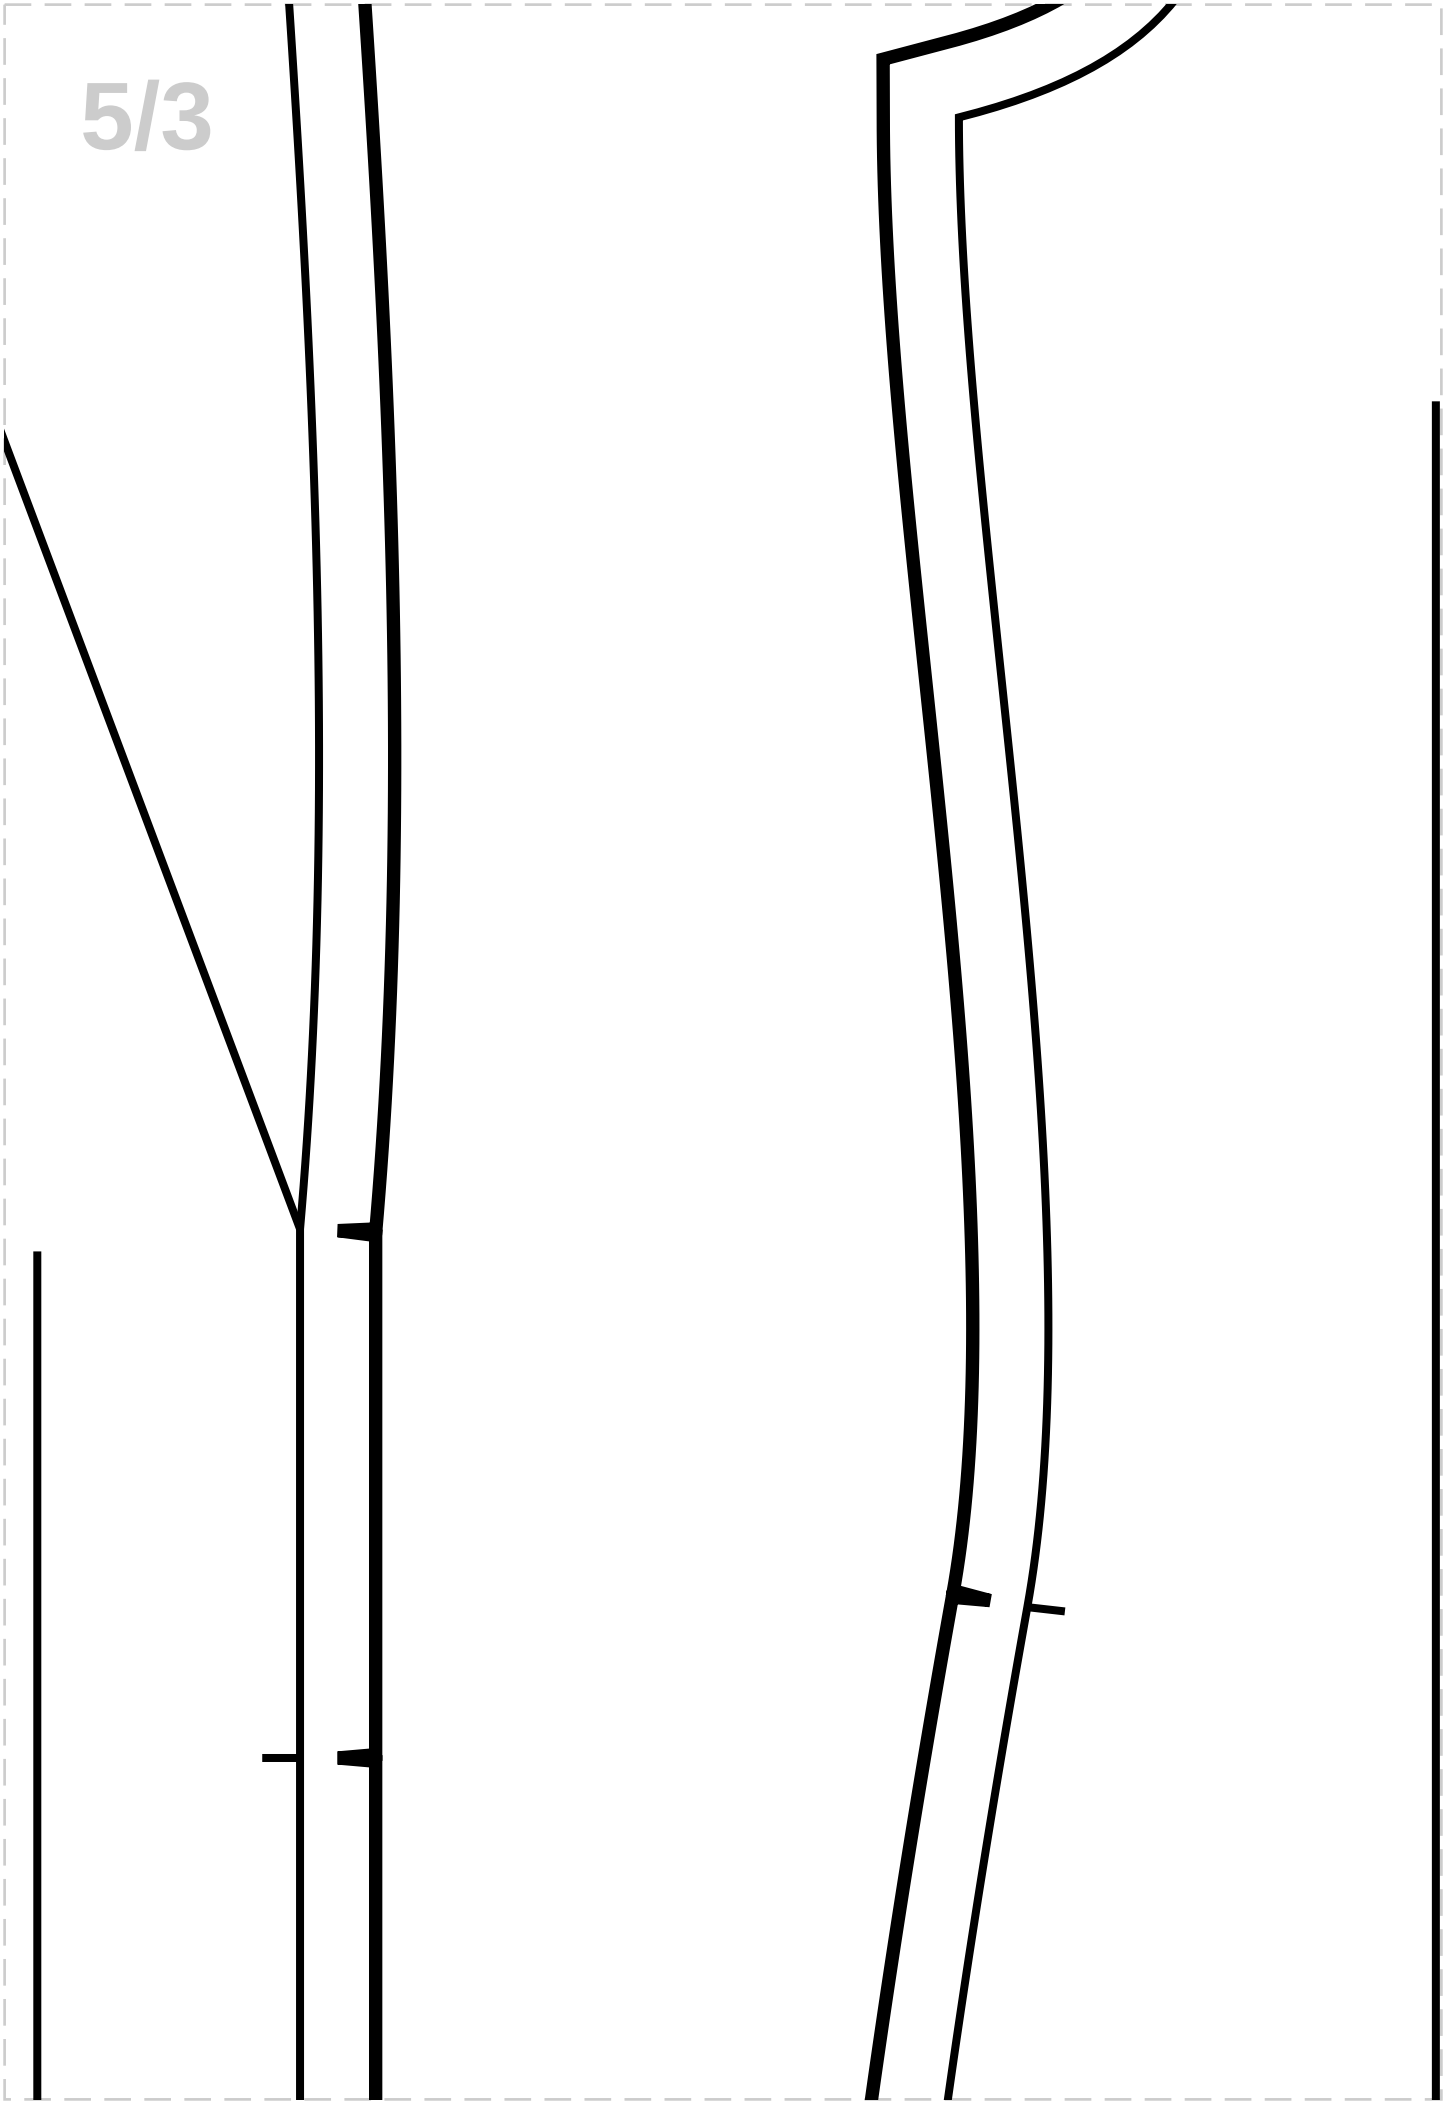

5/4

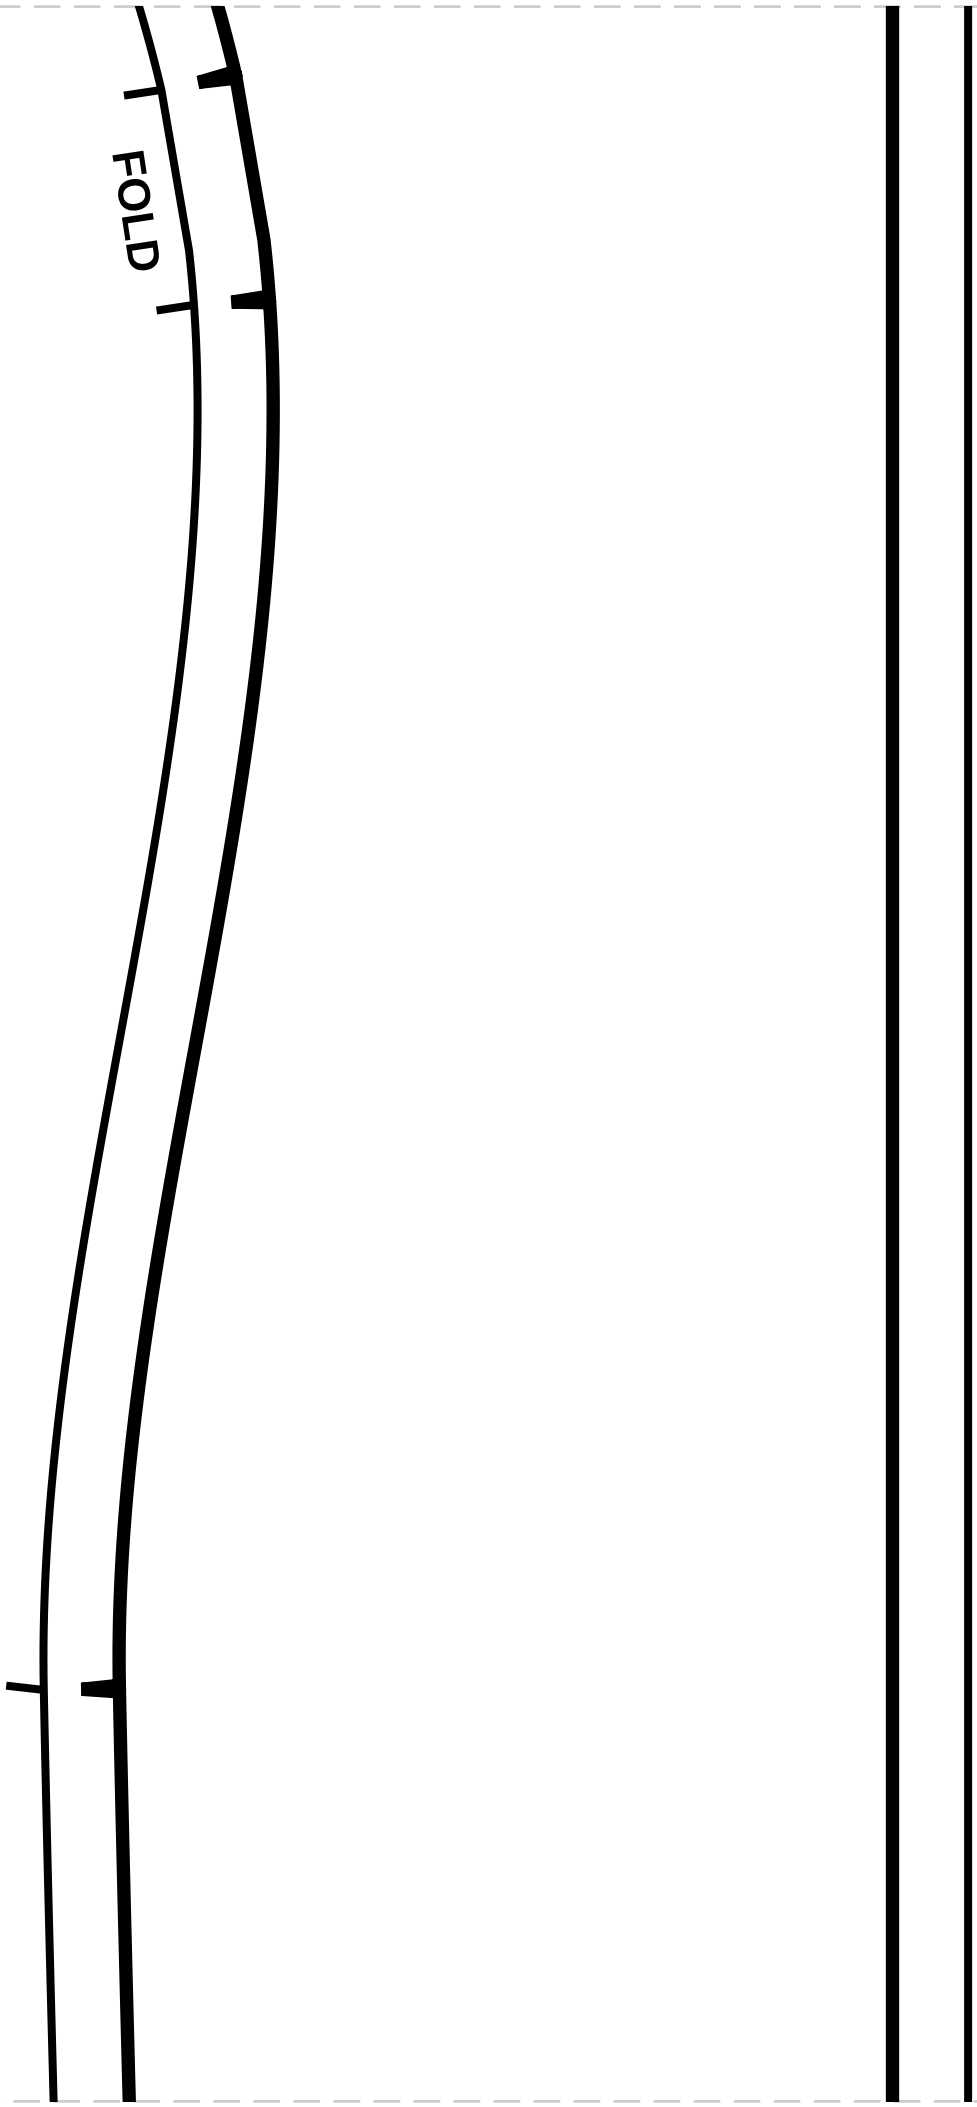

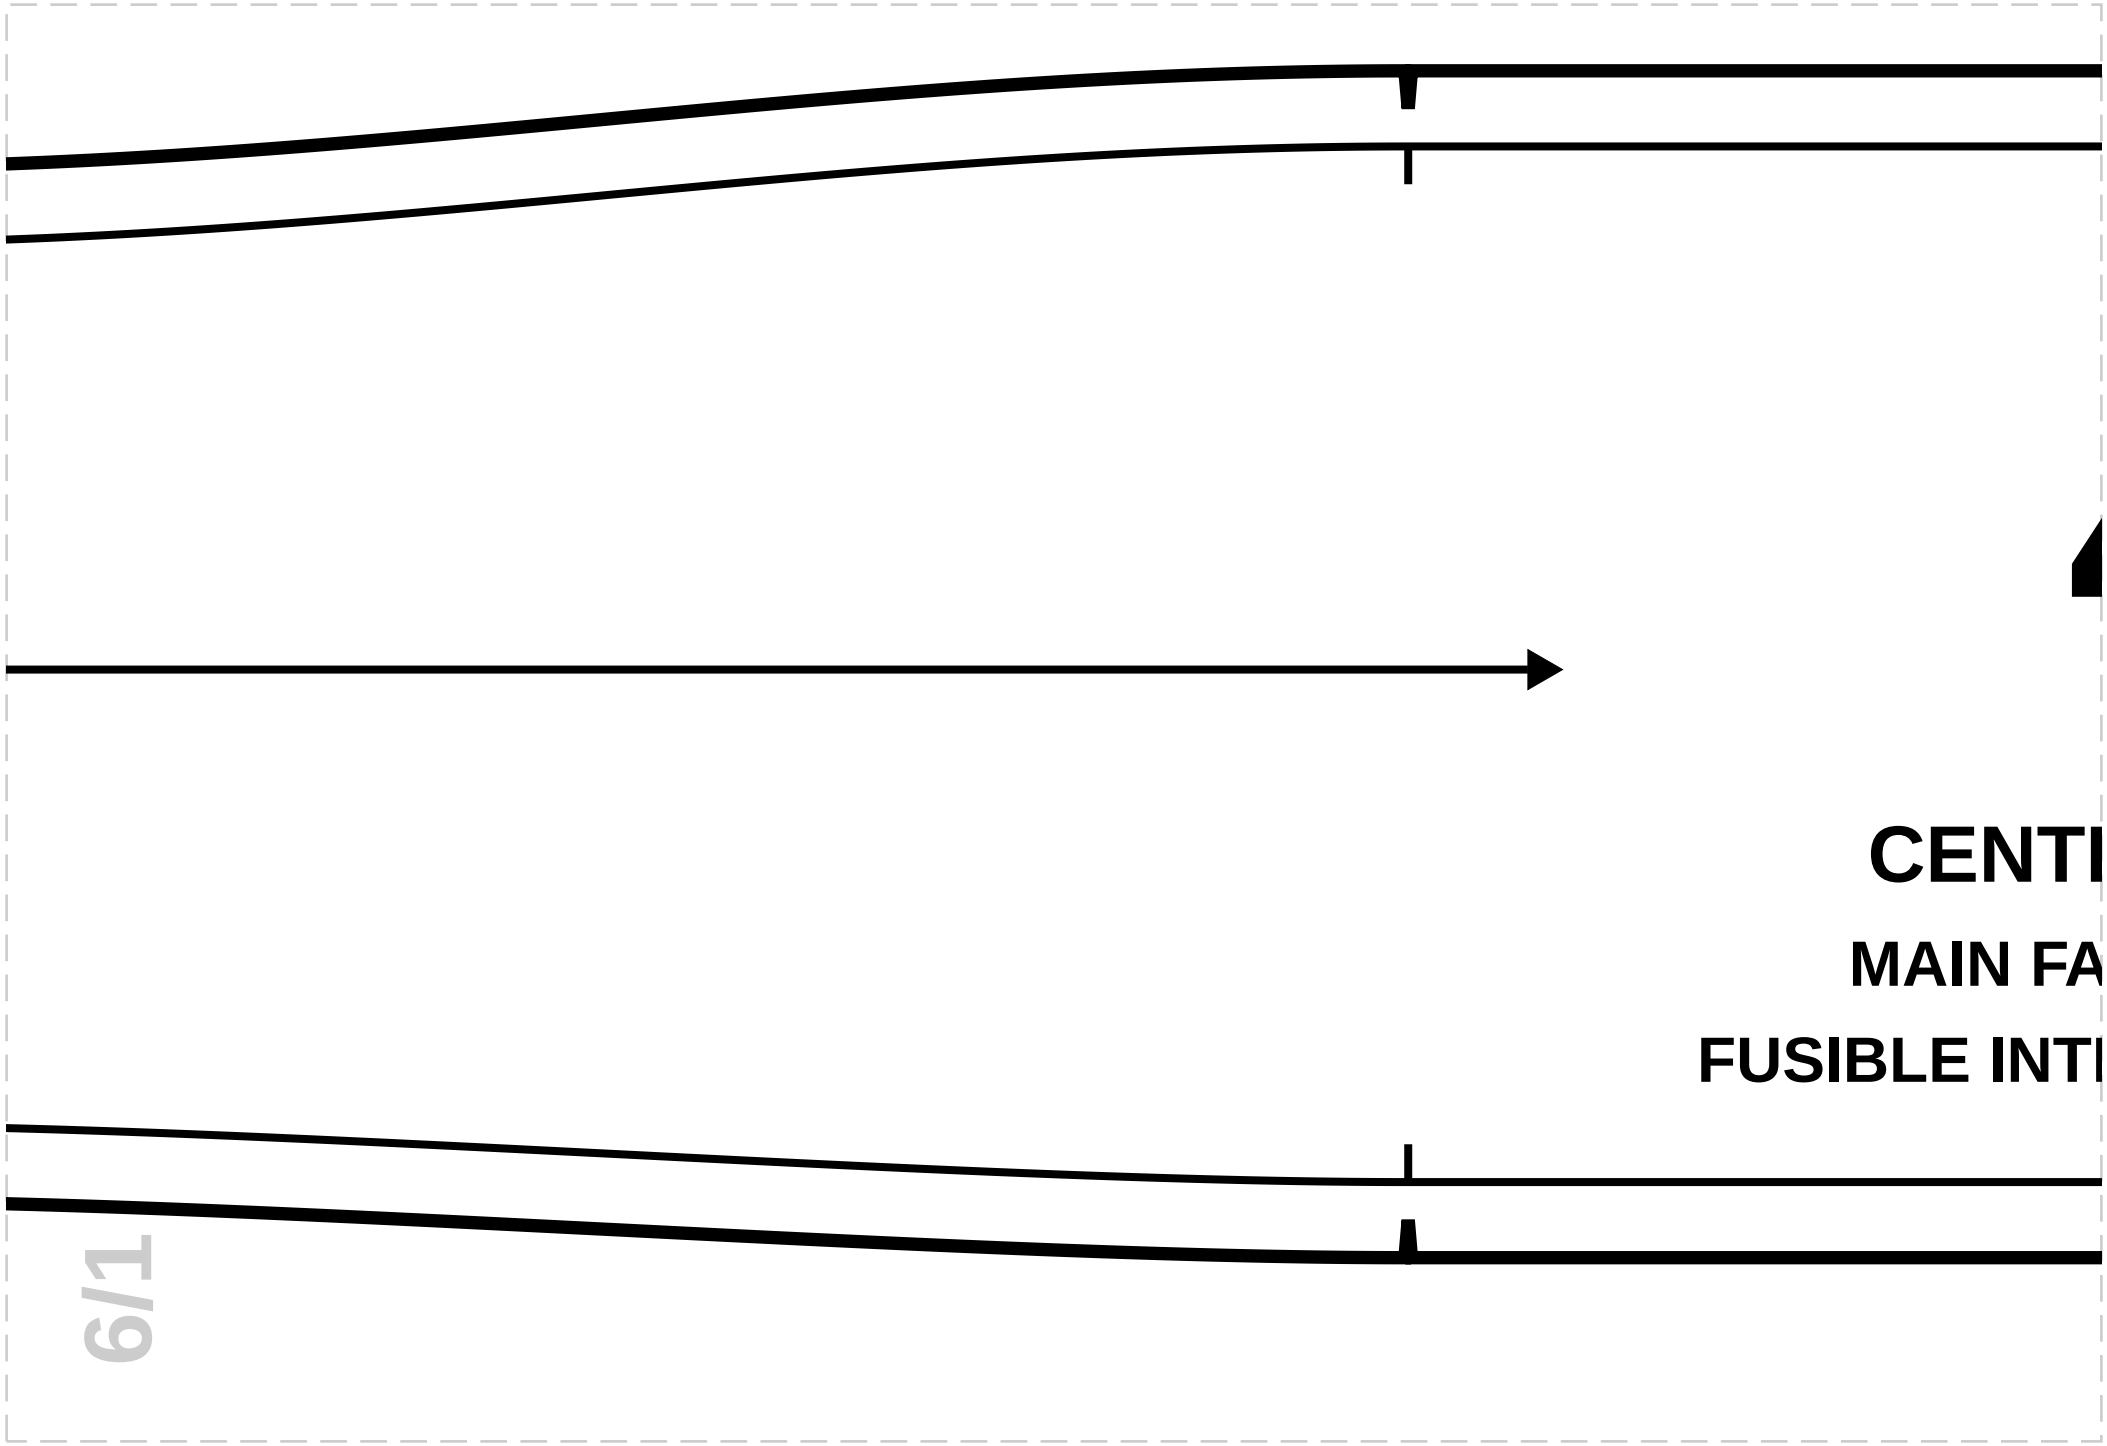

CENTI
MAIN FA
FUSIBLE INTI




1


FRONT LIN

LINING: Cu

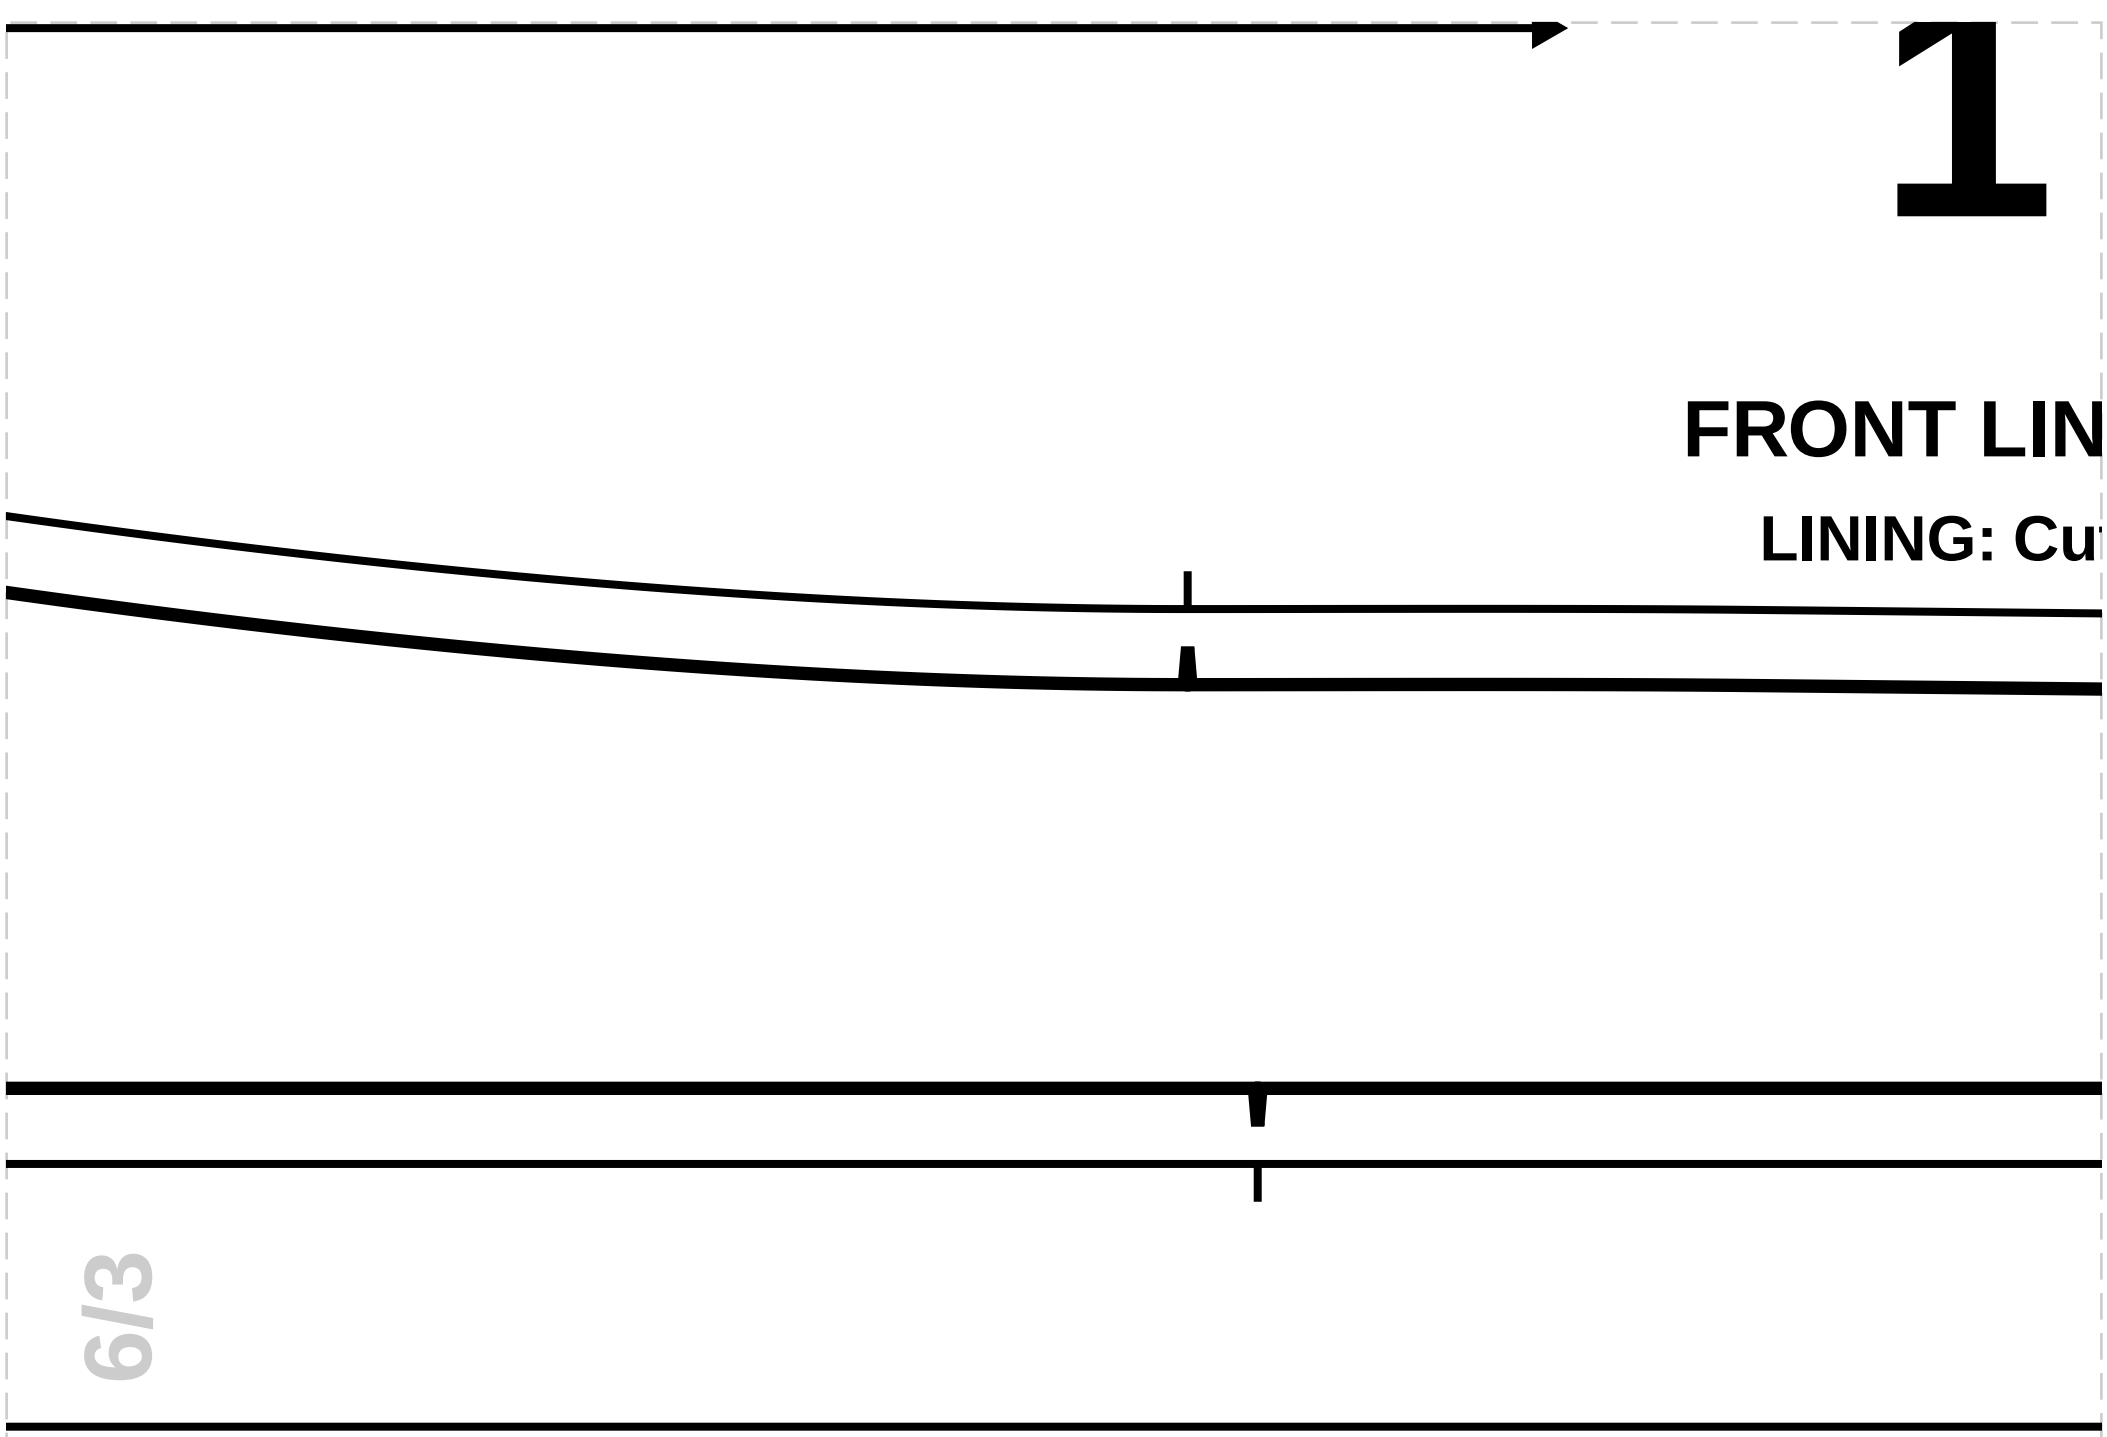

6/3

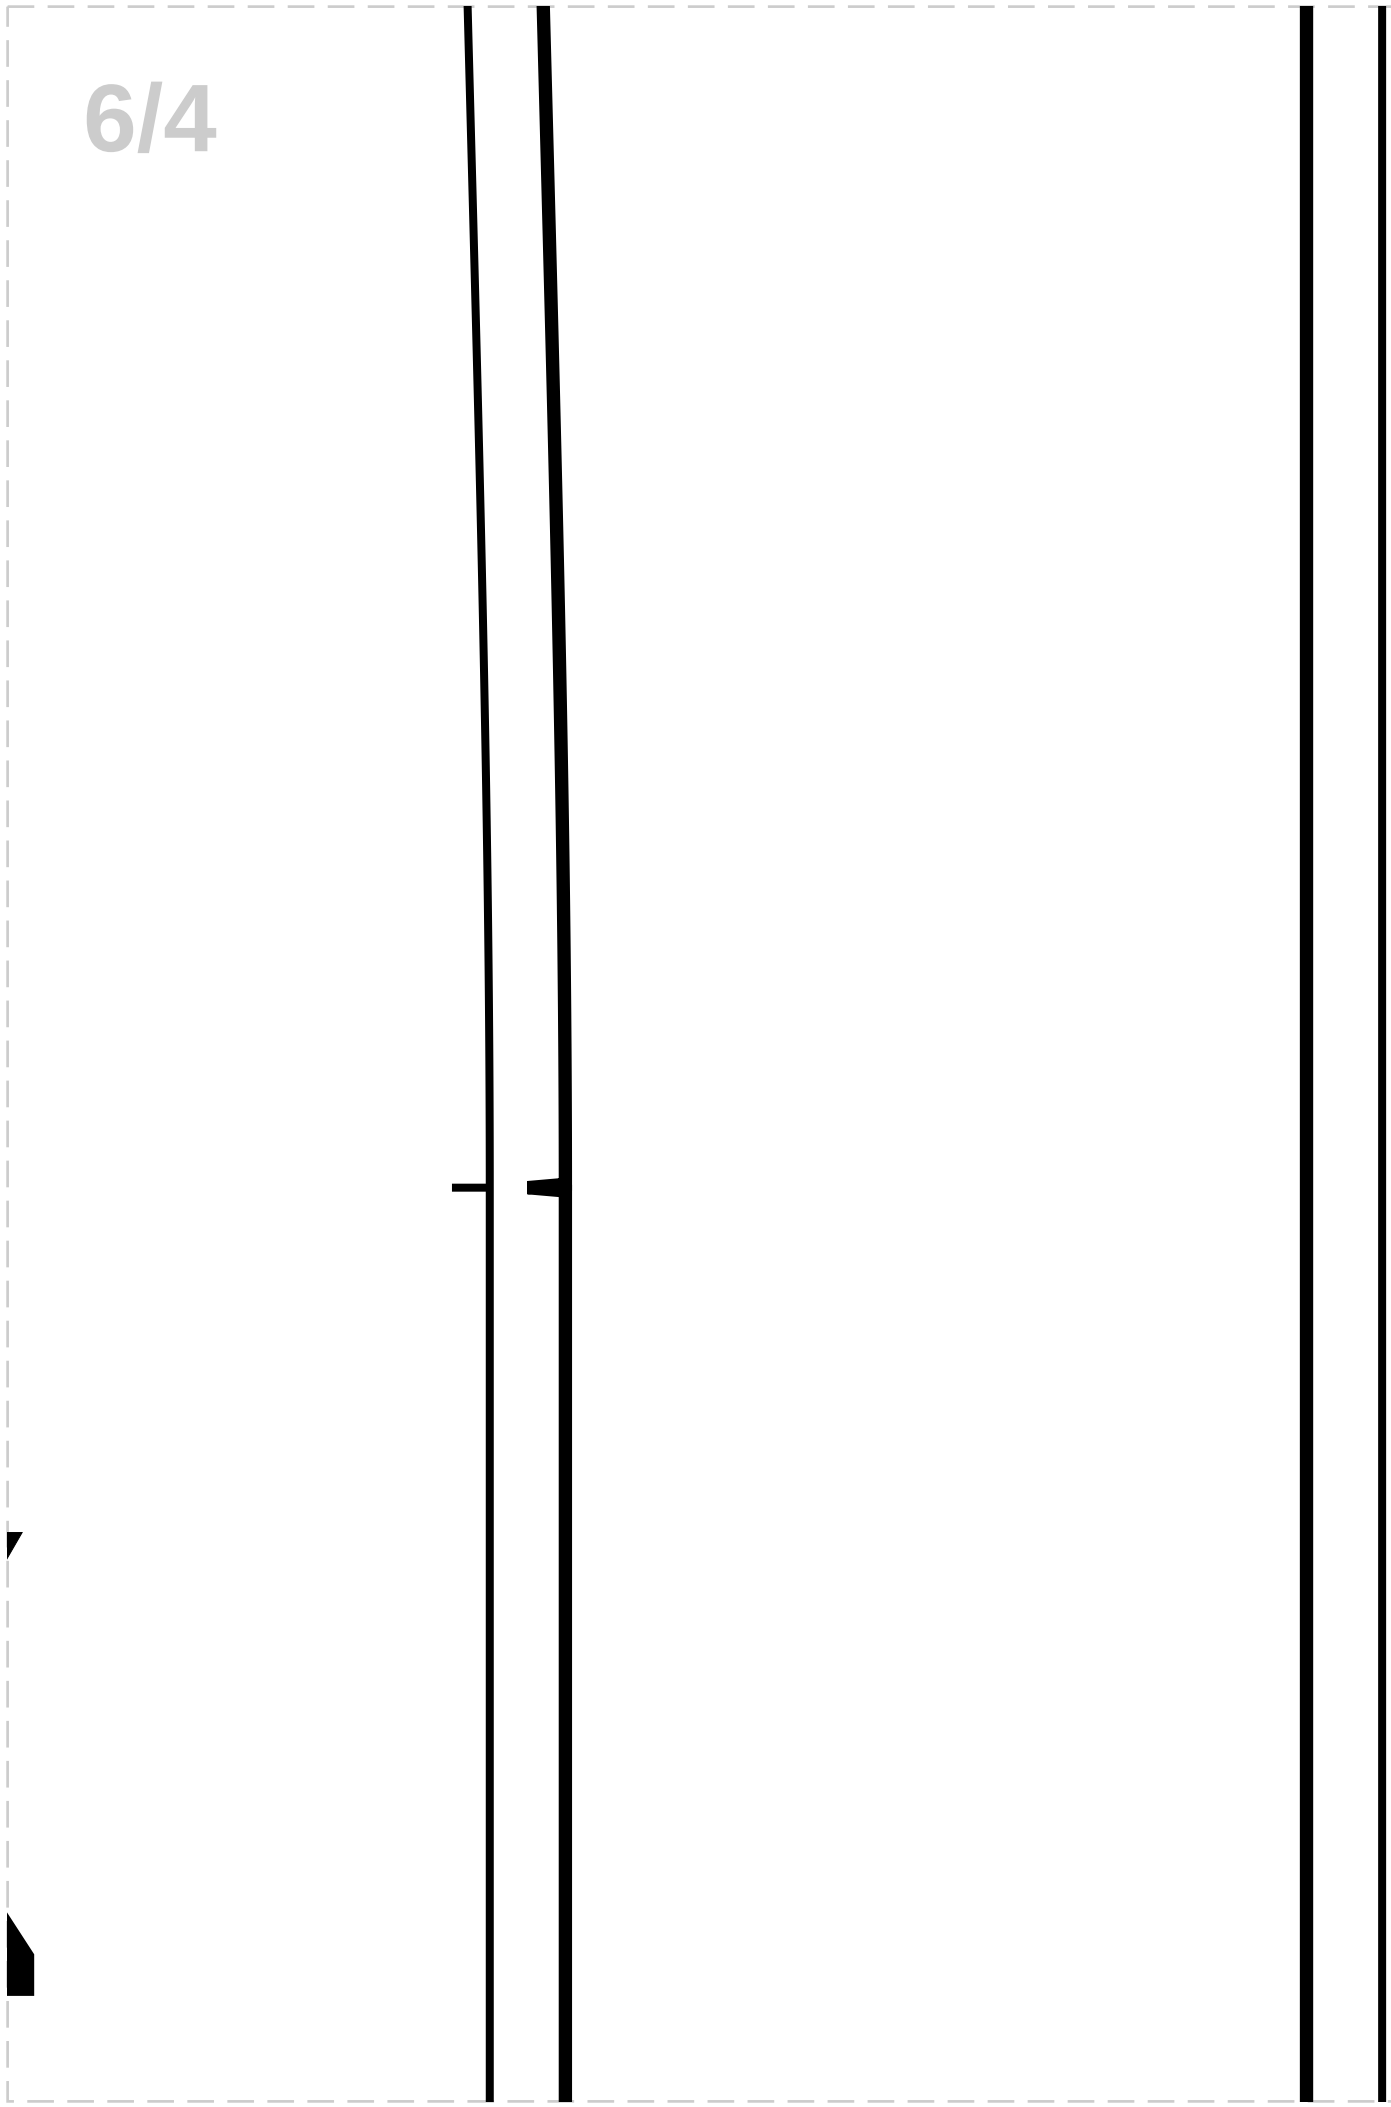

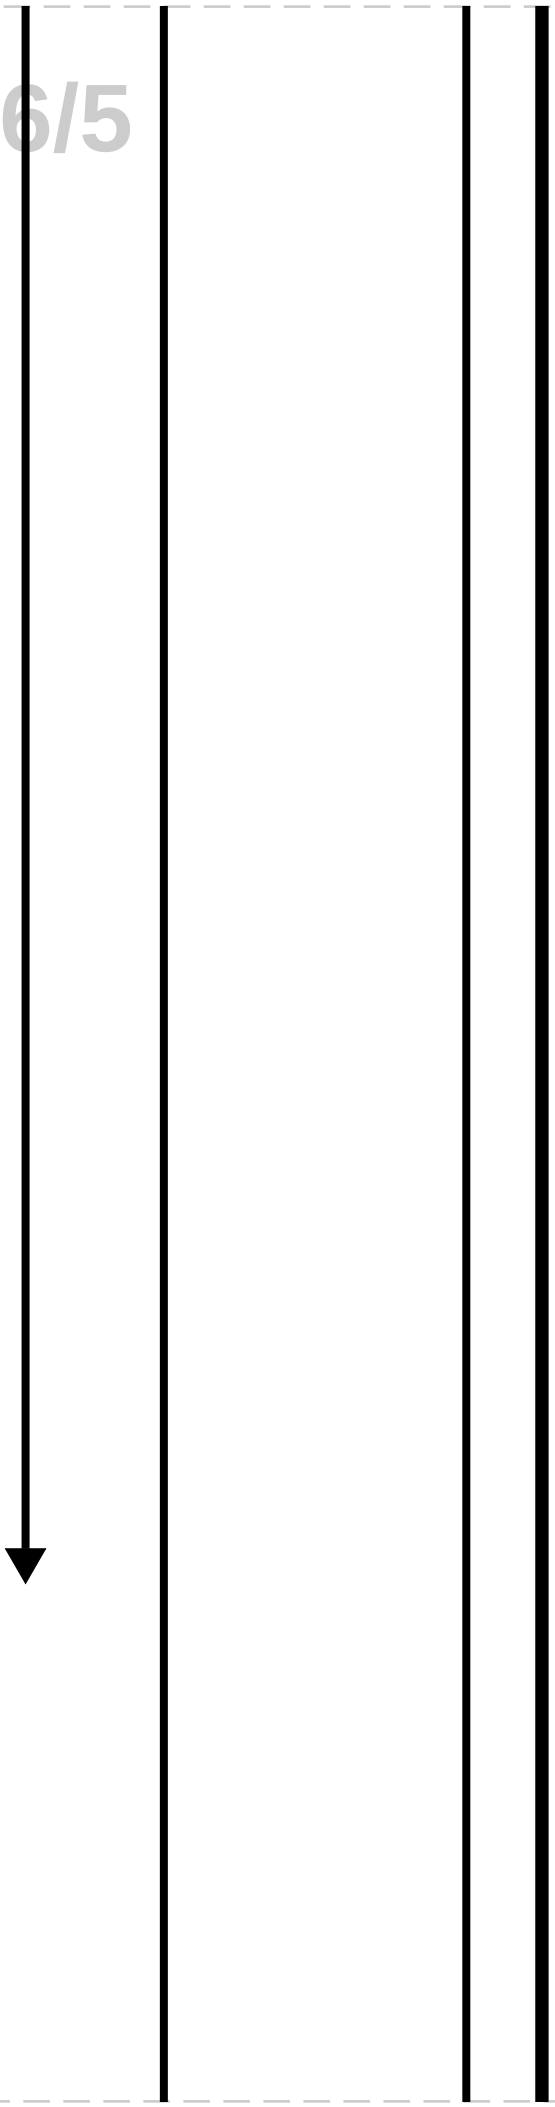


4

ER BACK

BRIC: Cut 2

ERFACING: Cut 2

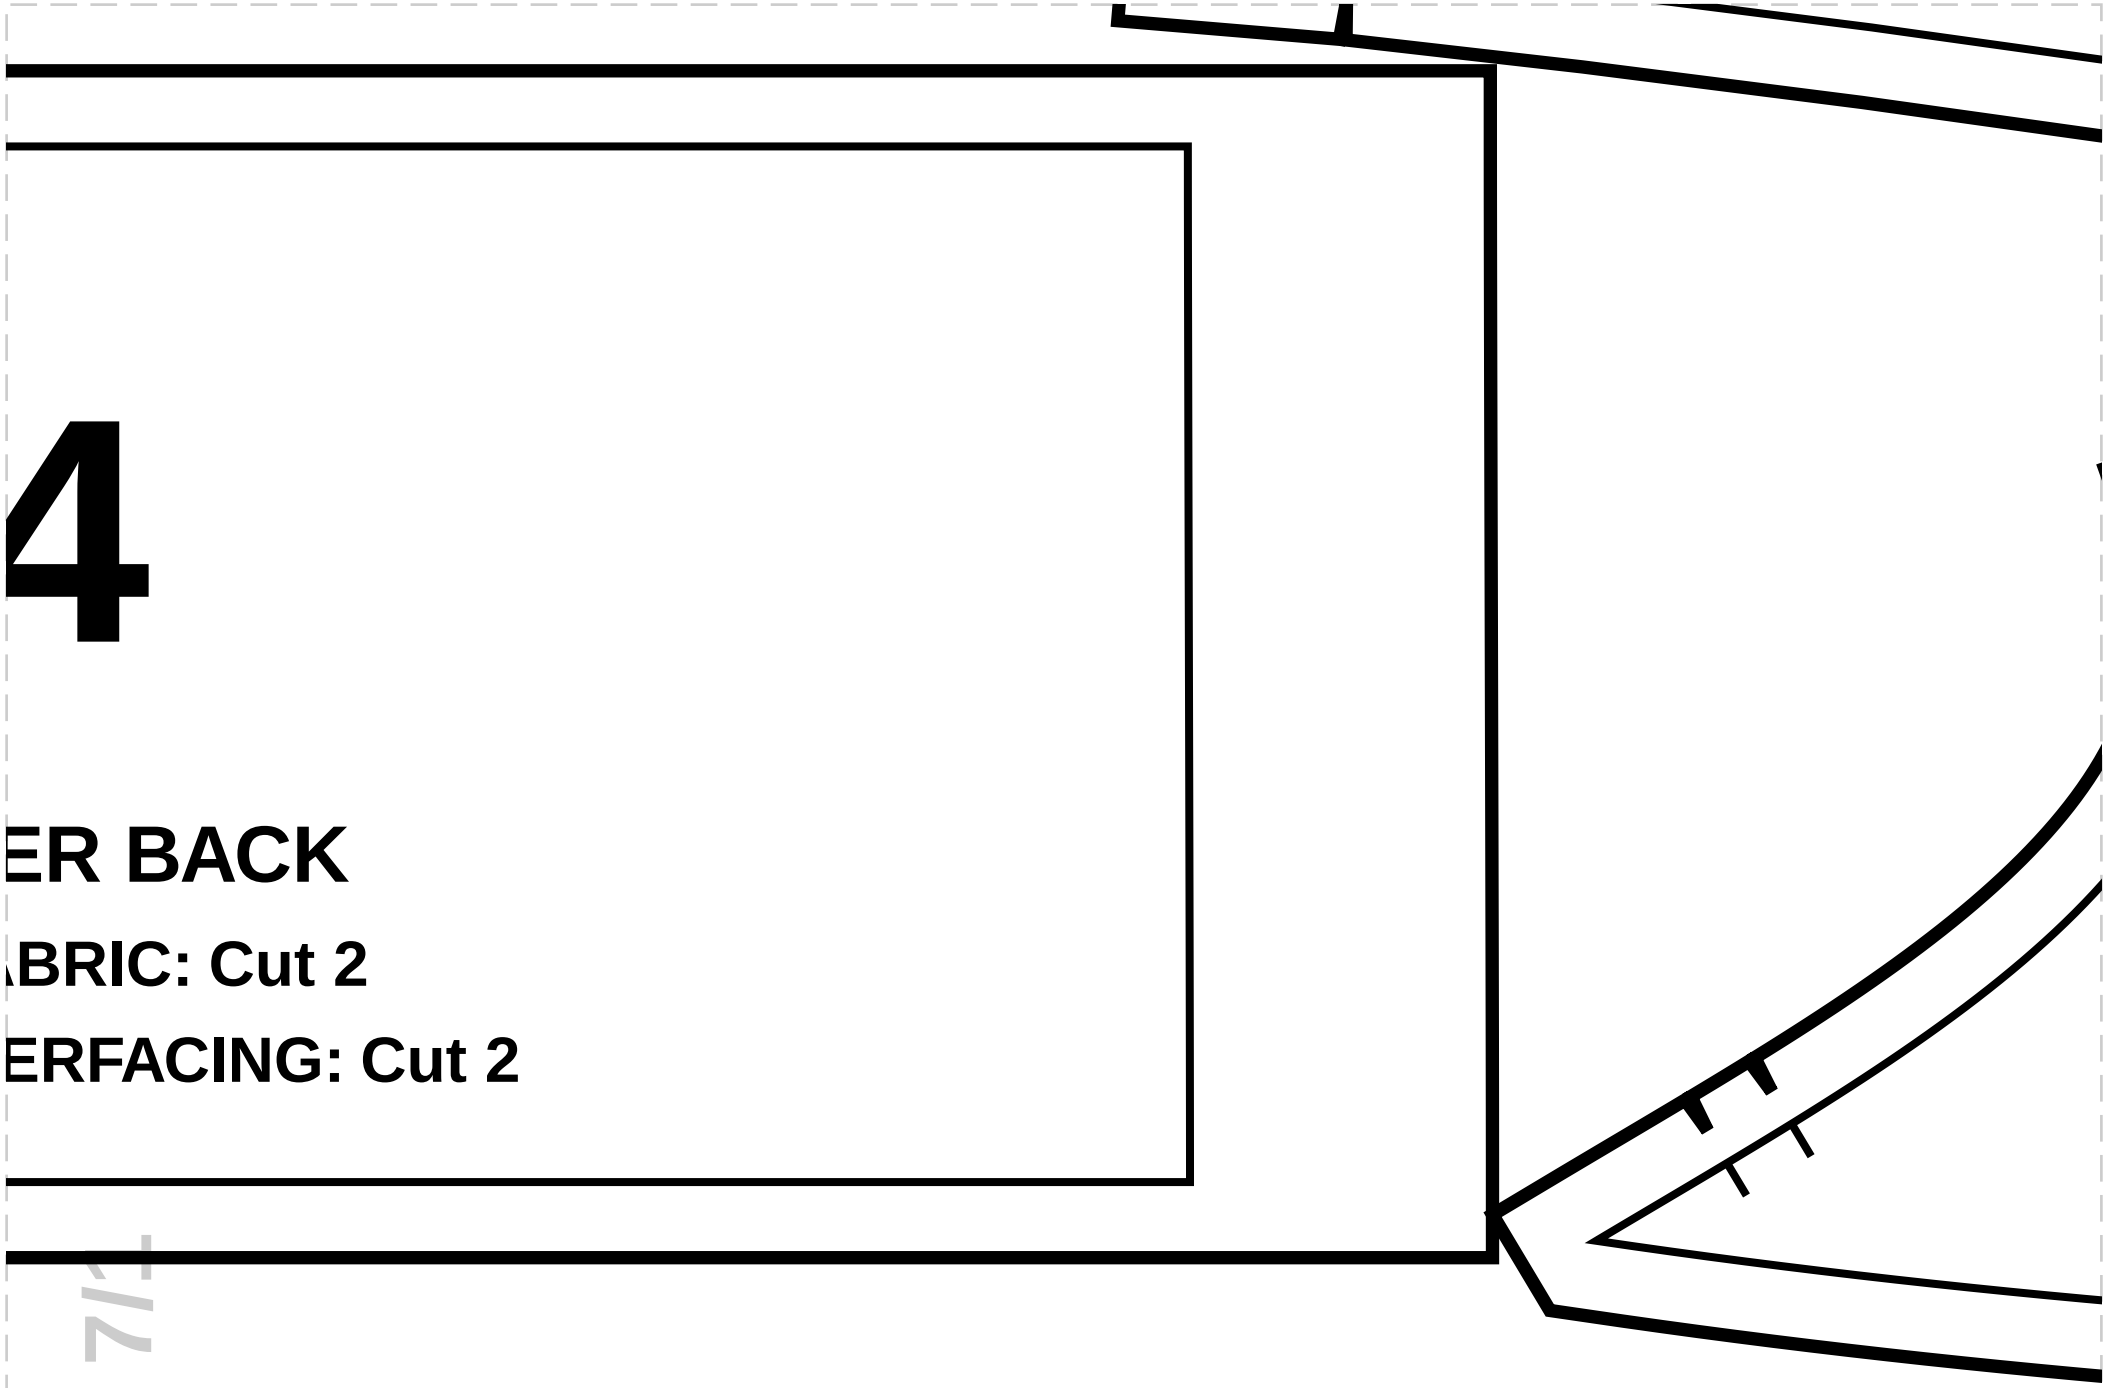

7/2

15


UPPER SLEEVE


MAIN FABRIC: Cut 2

LOWER COLLAR


MAIN FABRIC: Cut 1

FUSIBLE INTERFACING: Cut 1

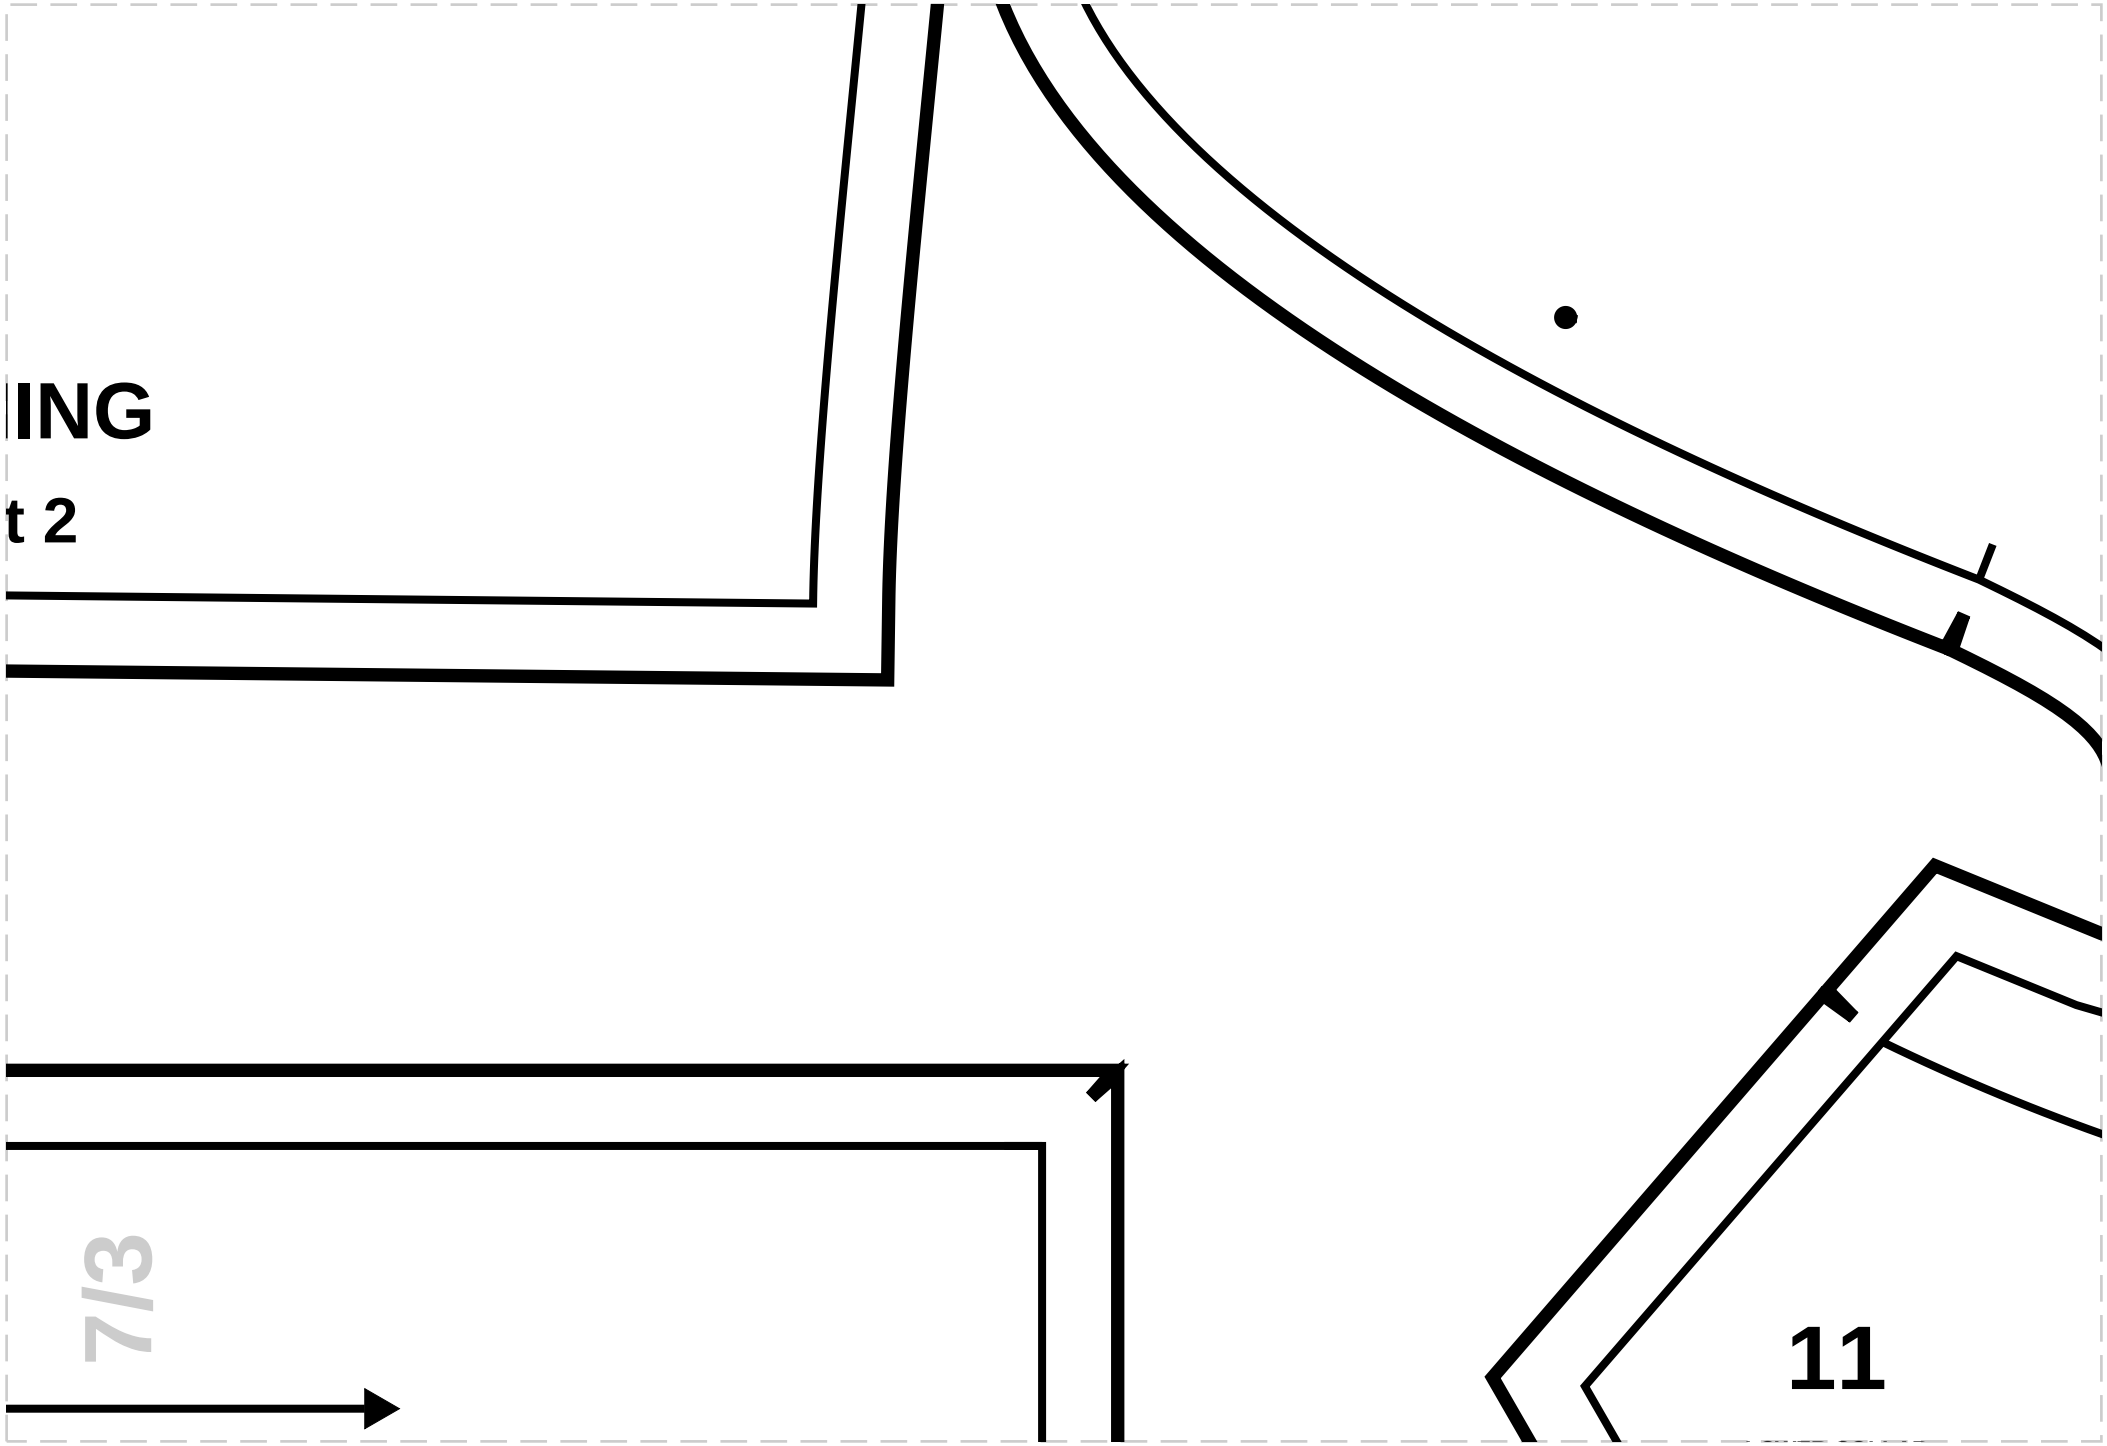

ING
t 2
7/3
11

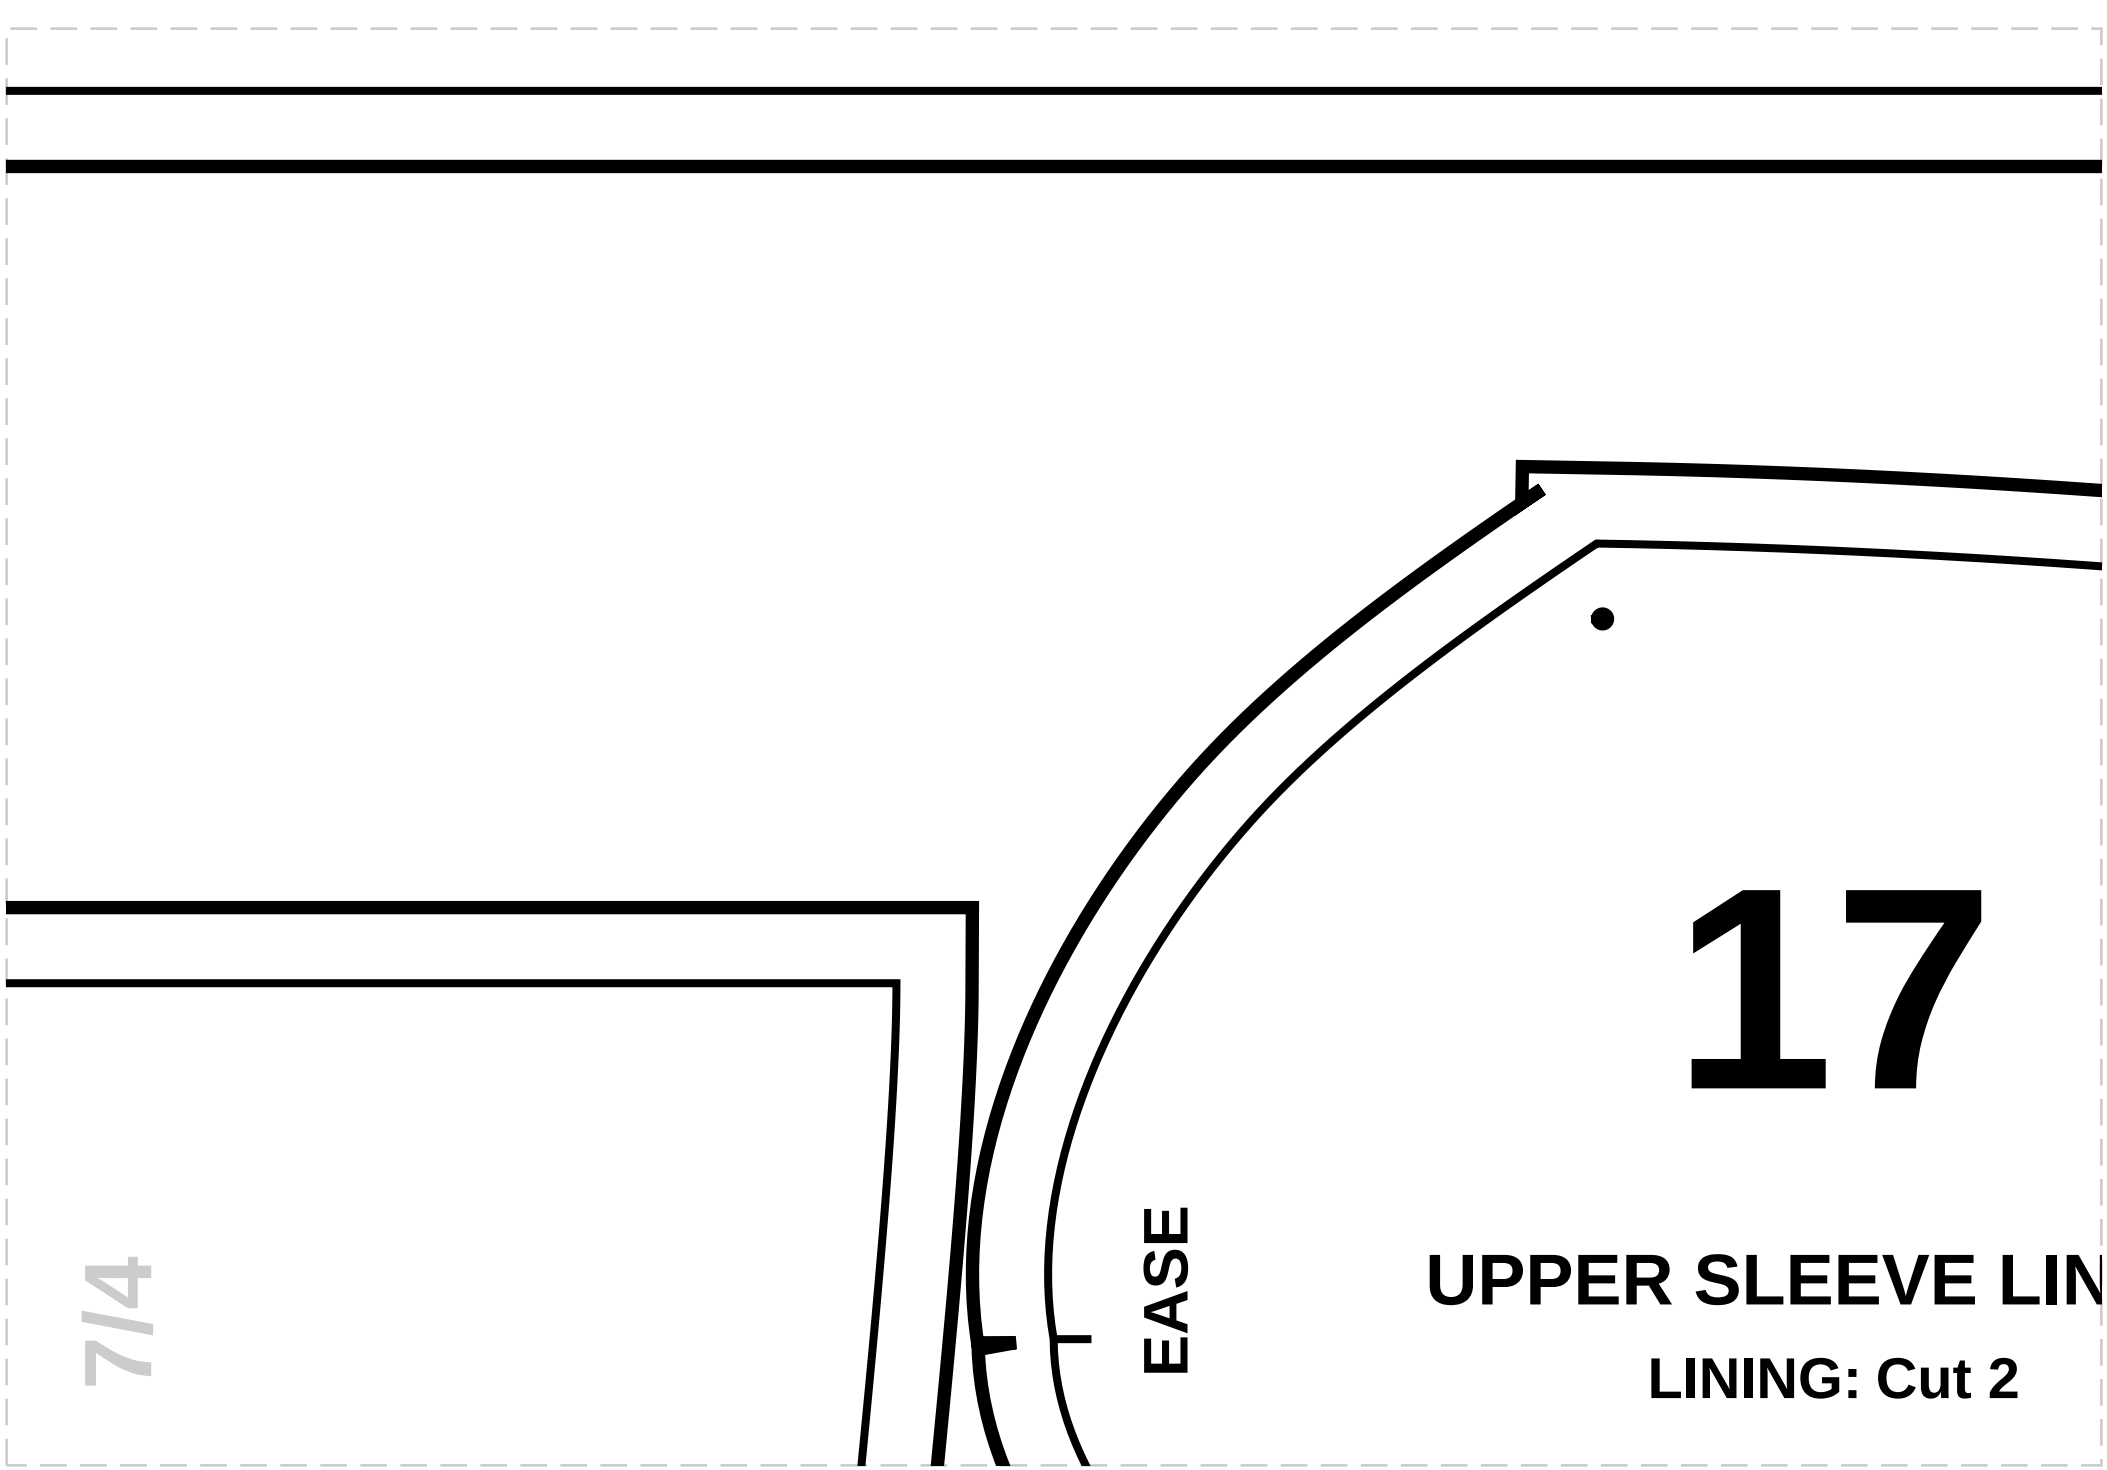
17
EASE
UPPER SLEEVE LIN
LINING: Cut 2
7/4


7/5

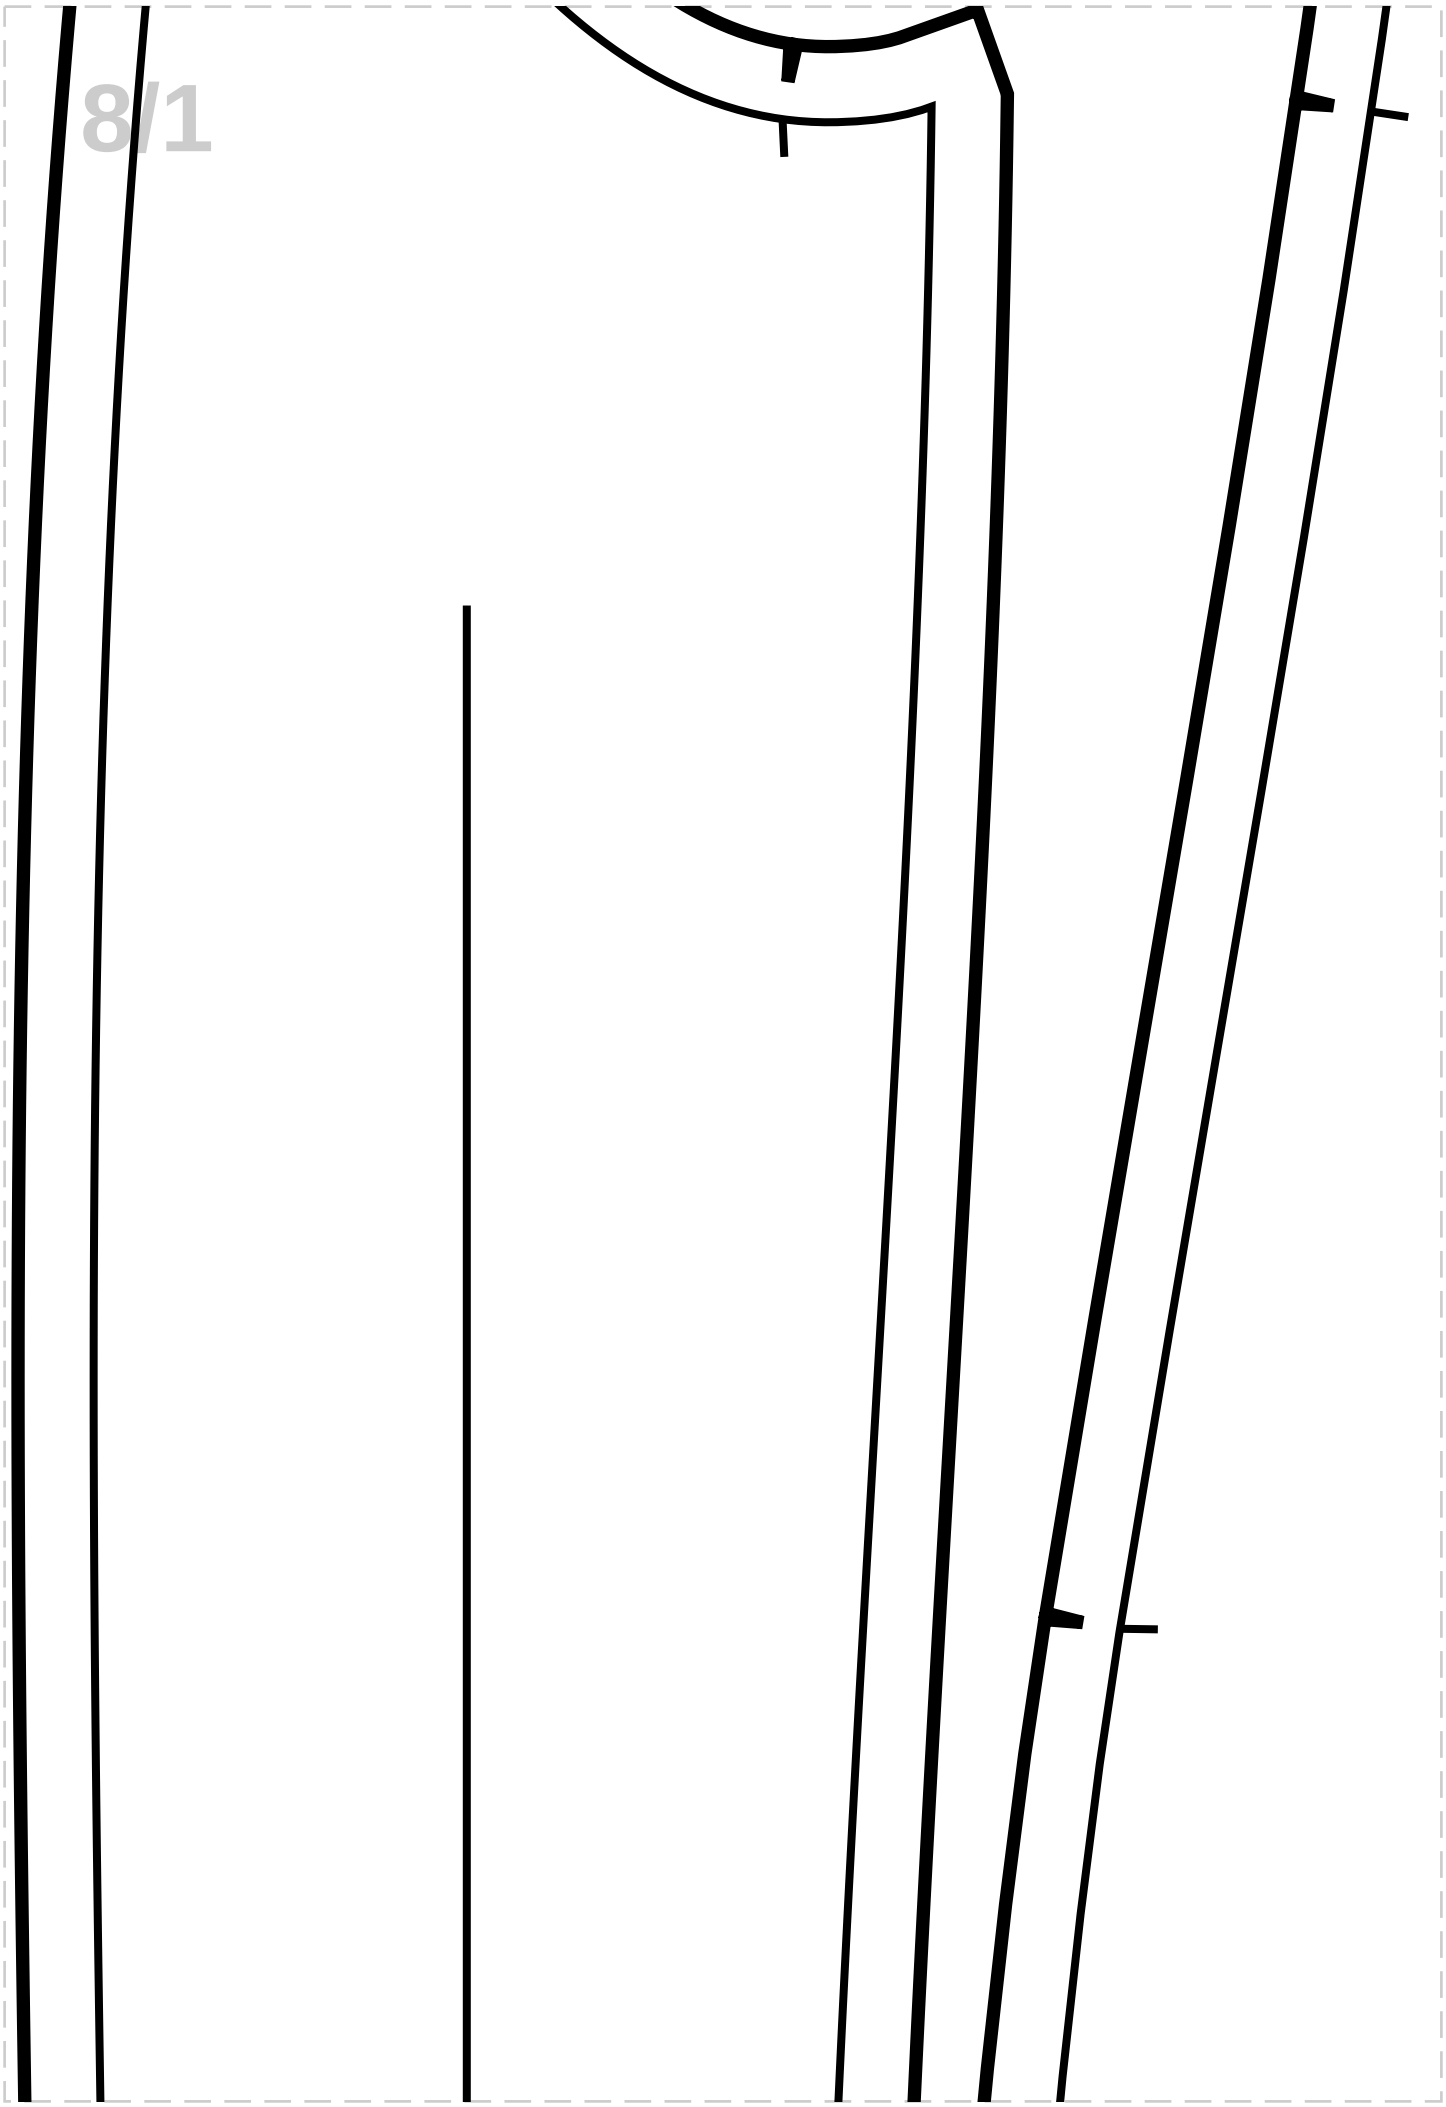

8/1

8/2

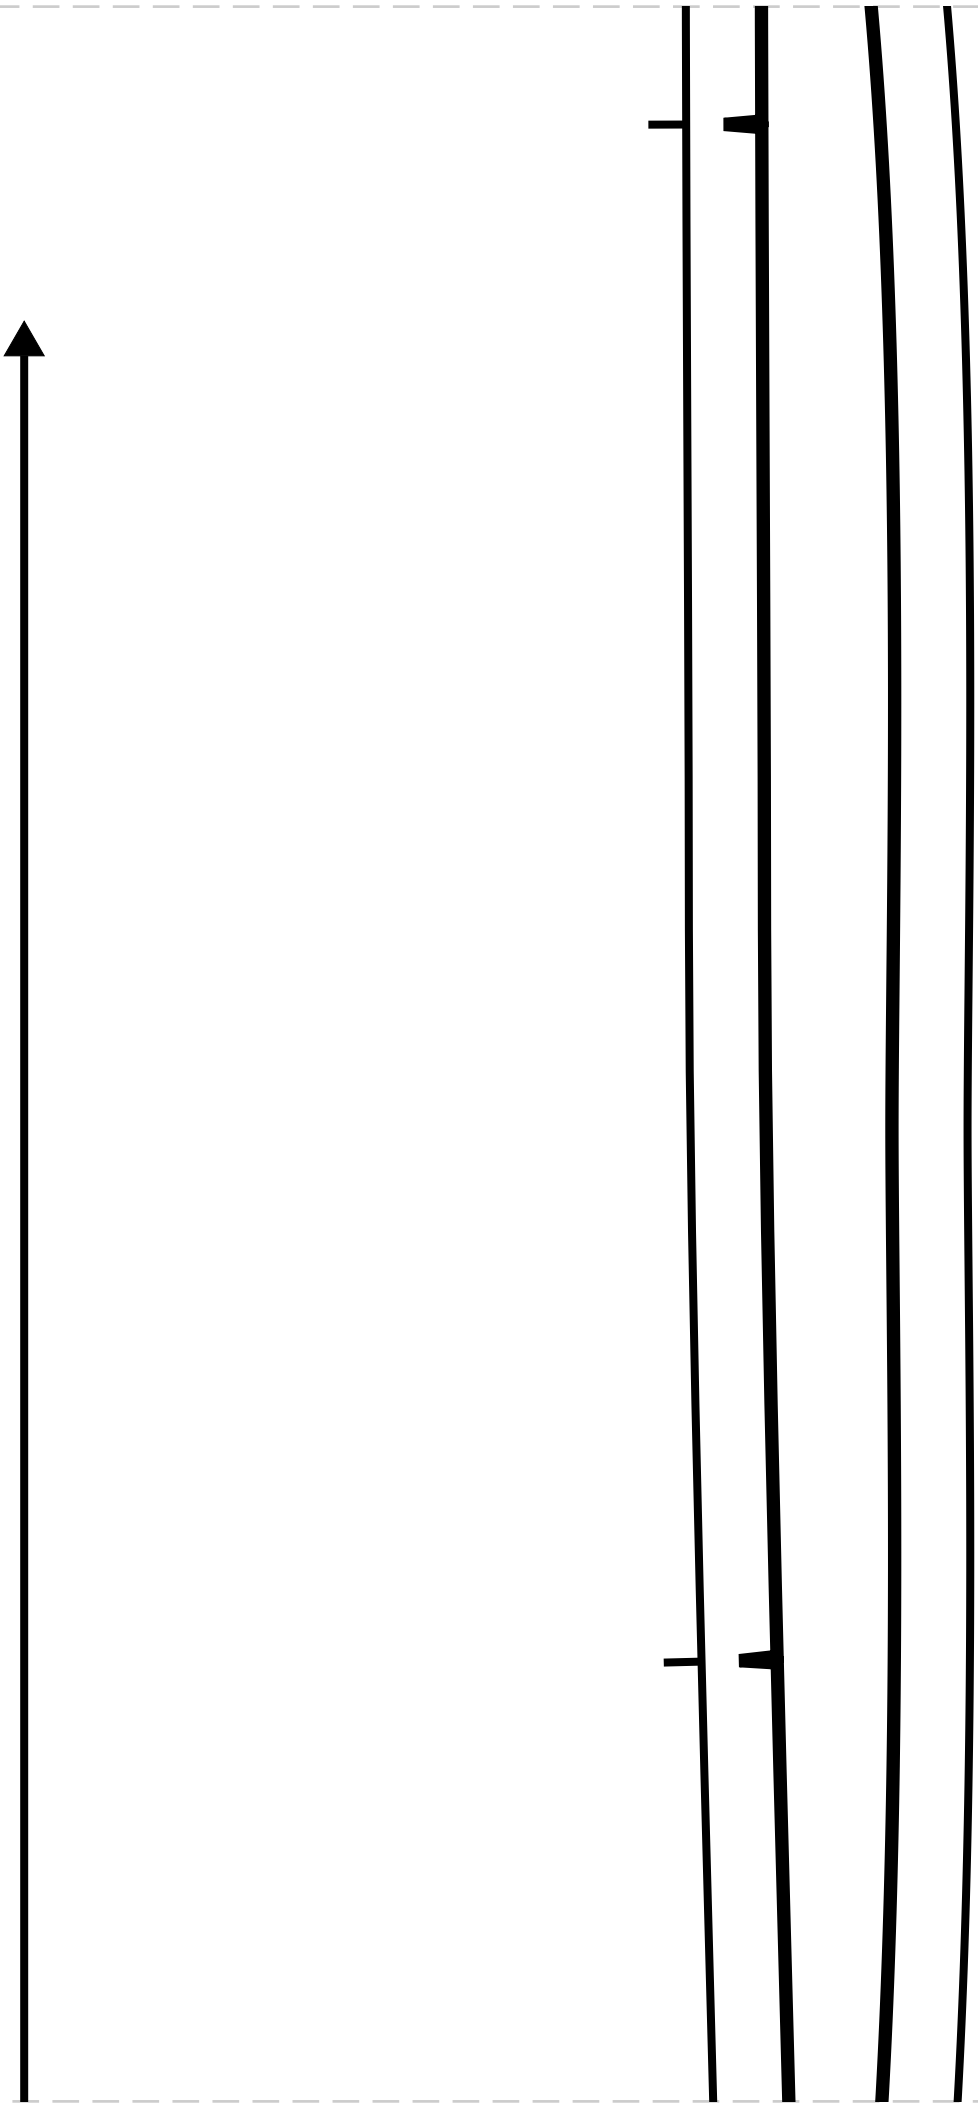


8/3

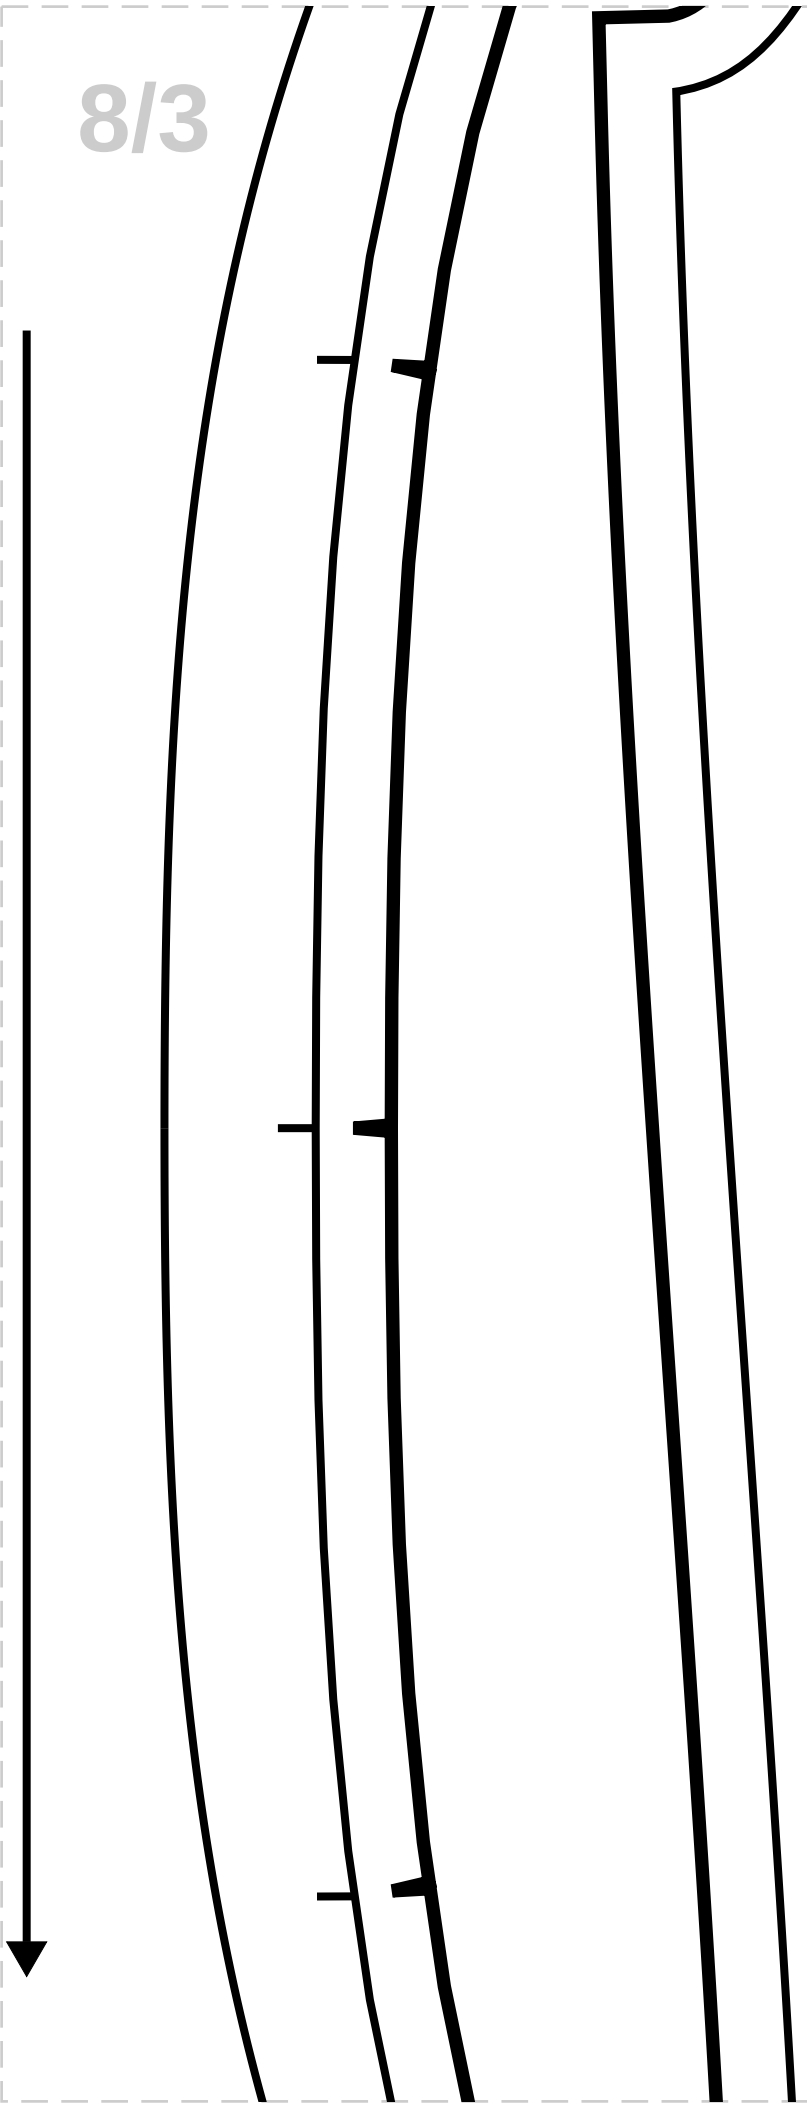

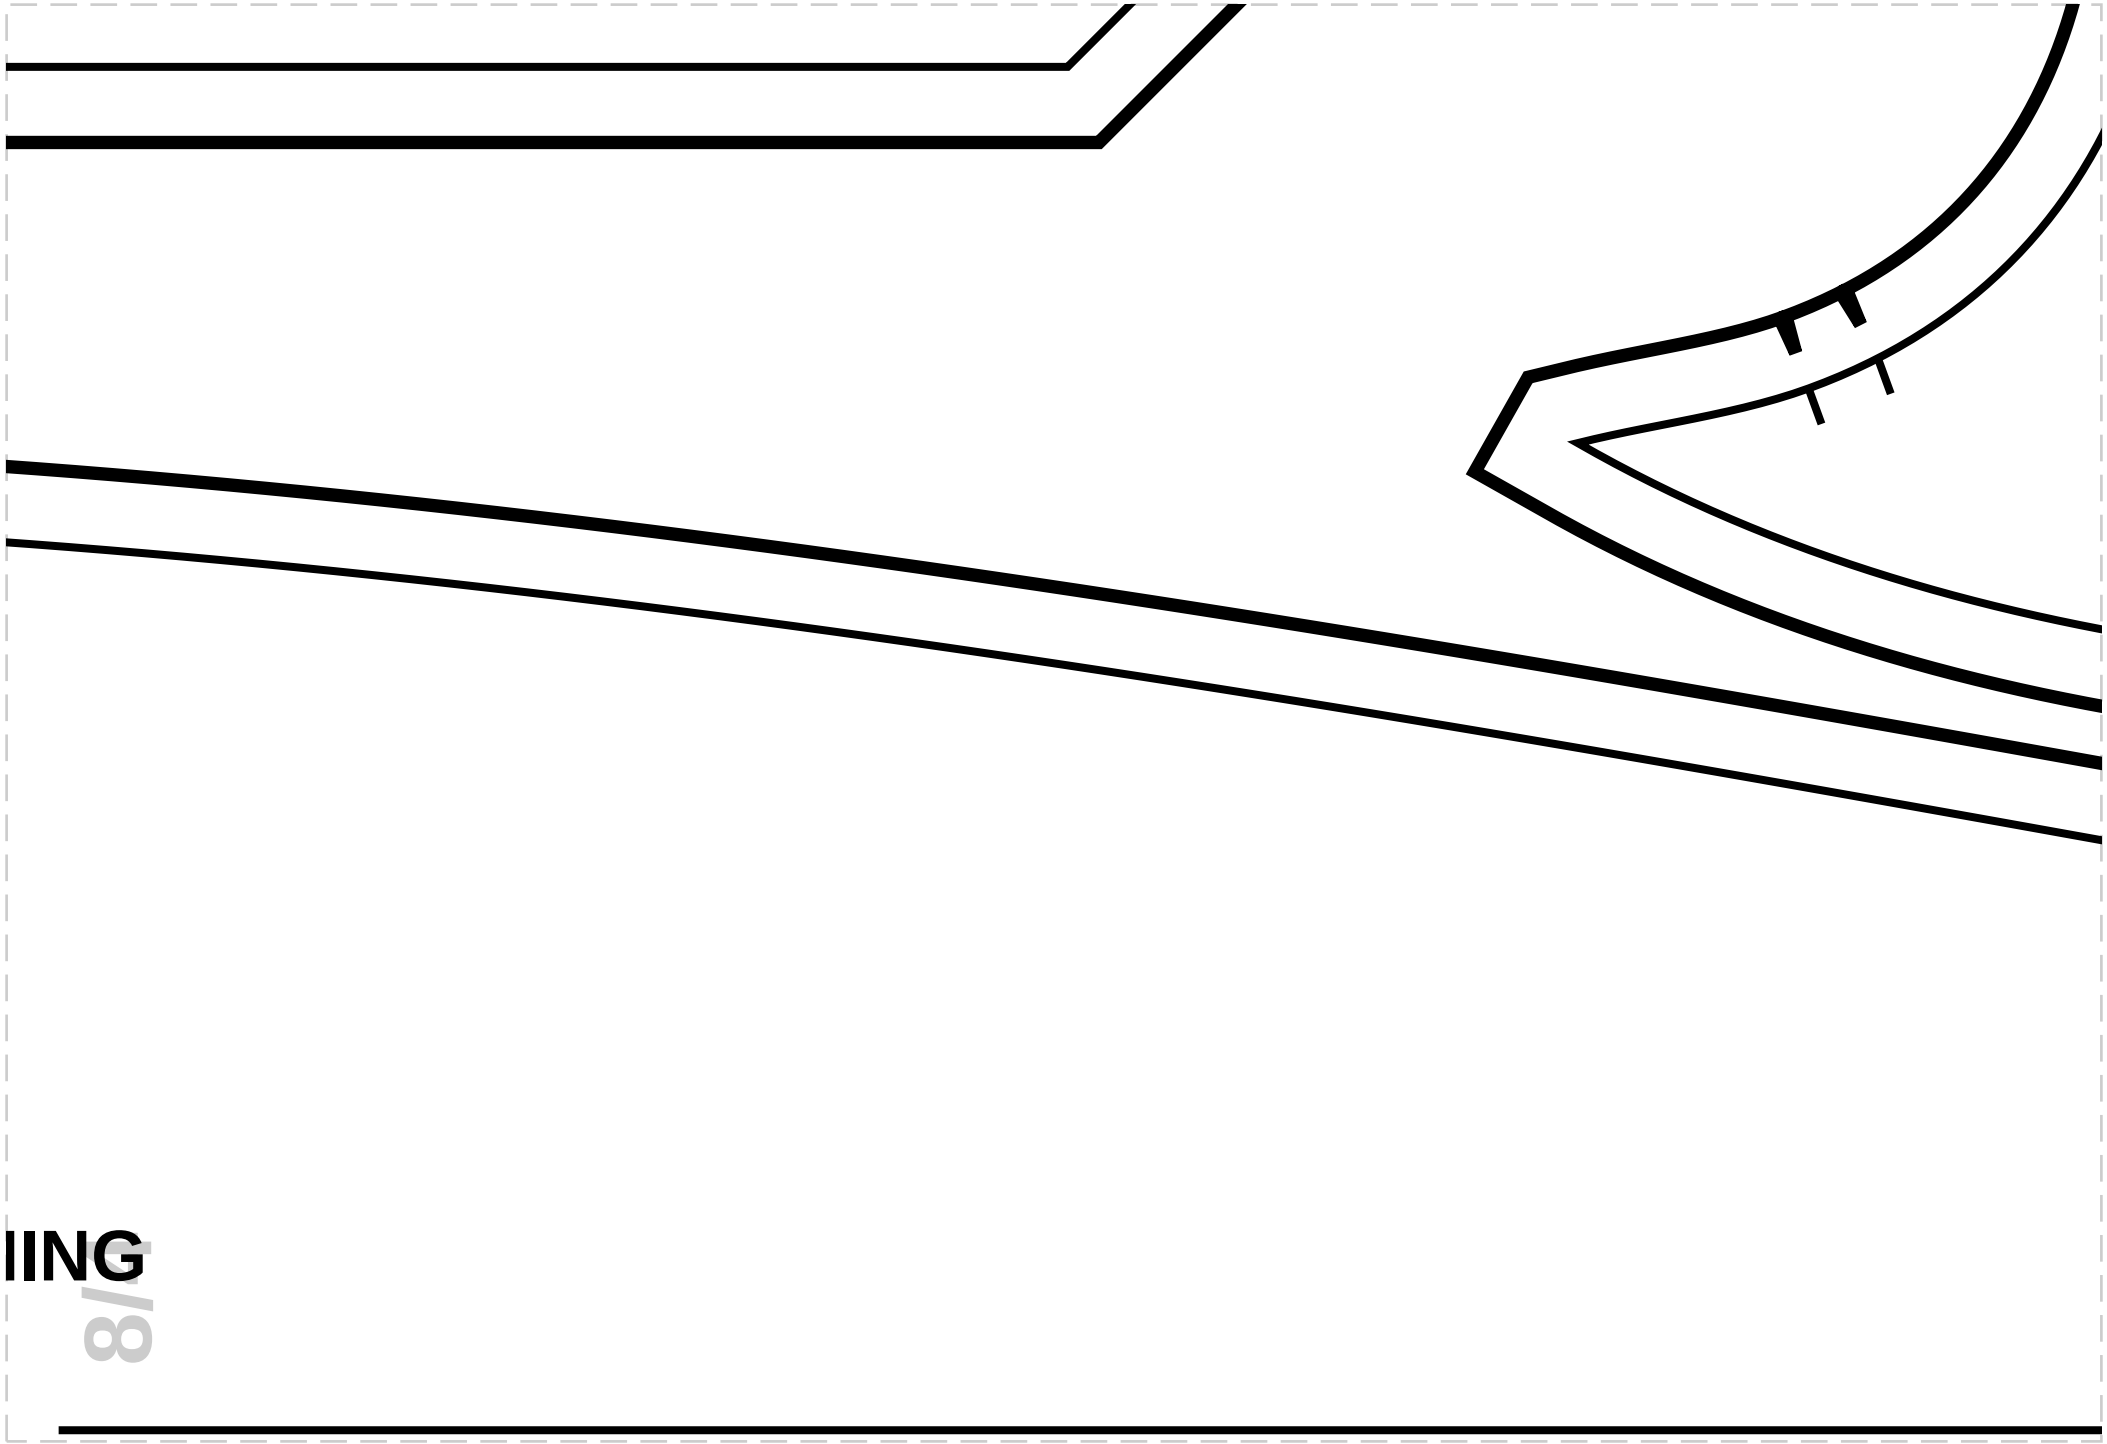

IING

8/

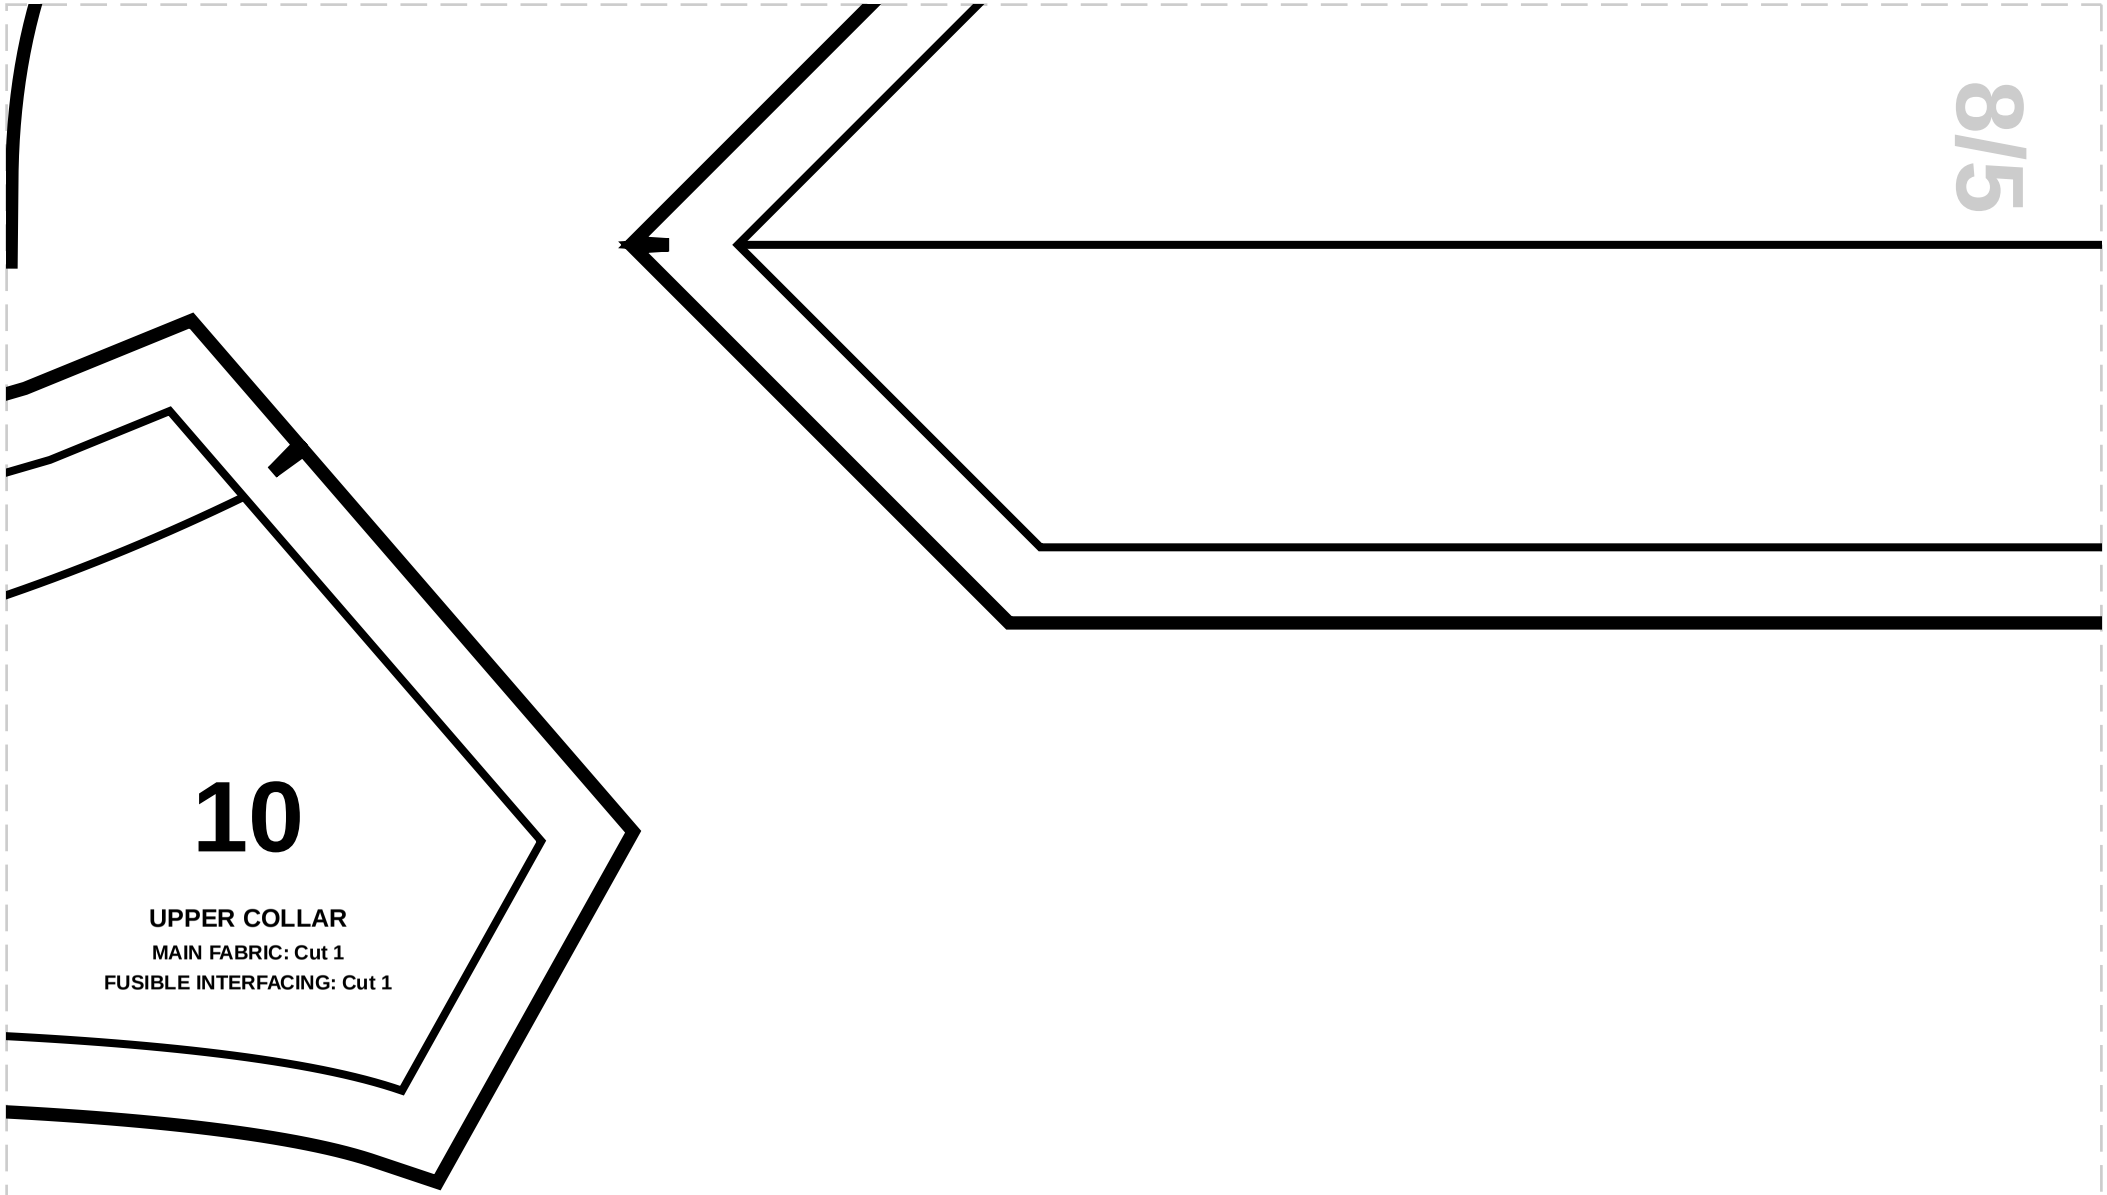


10


UPPER COLLAR


MAIN FABRIC: Cut 1


FUSIBLE INTERFACING: Cut 1

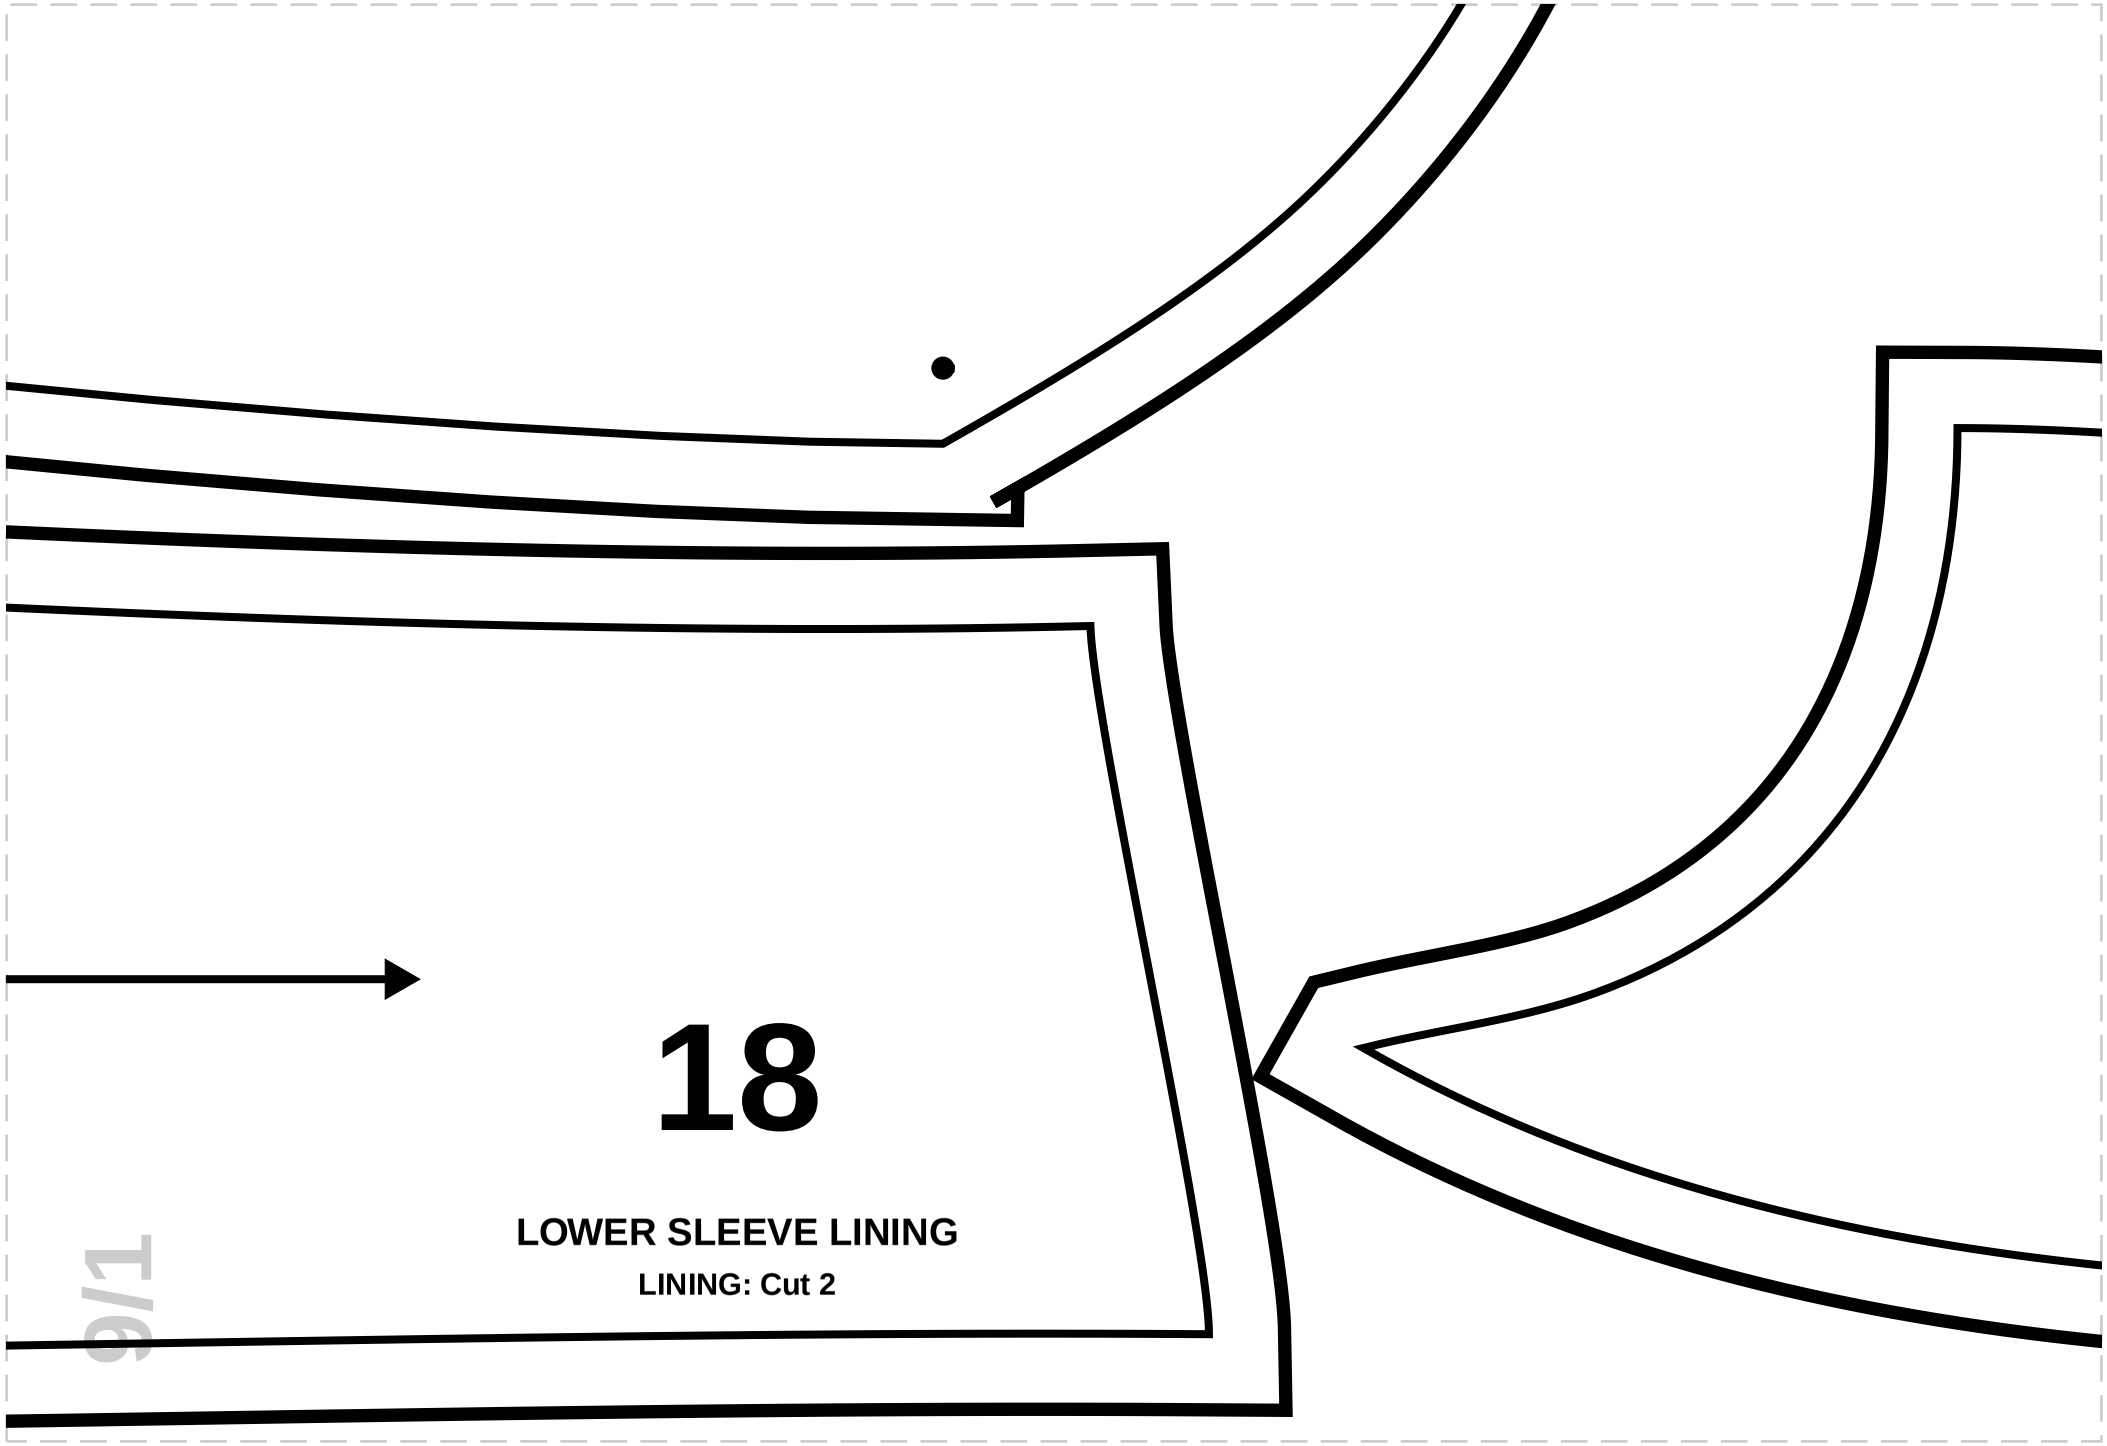

18
LOWER SLEEVE LINING
LINING: Cut 2
9/1


EASE

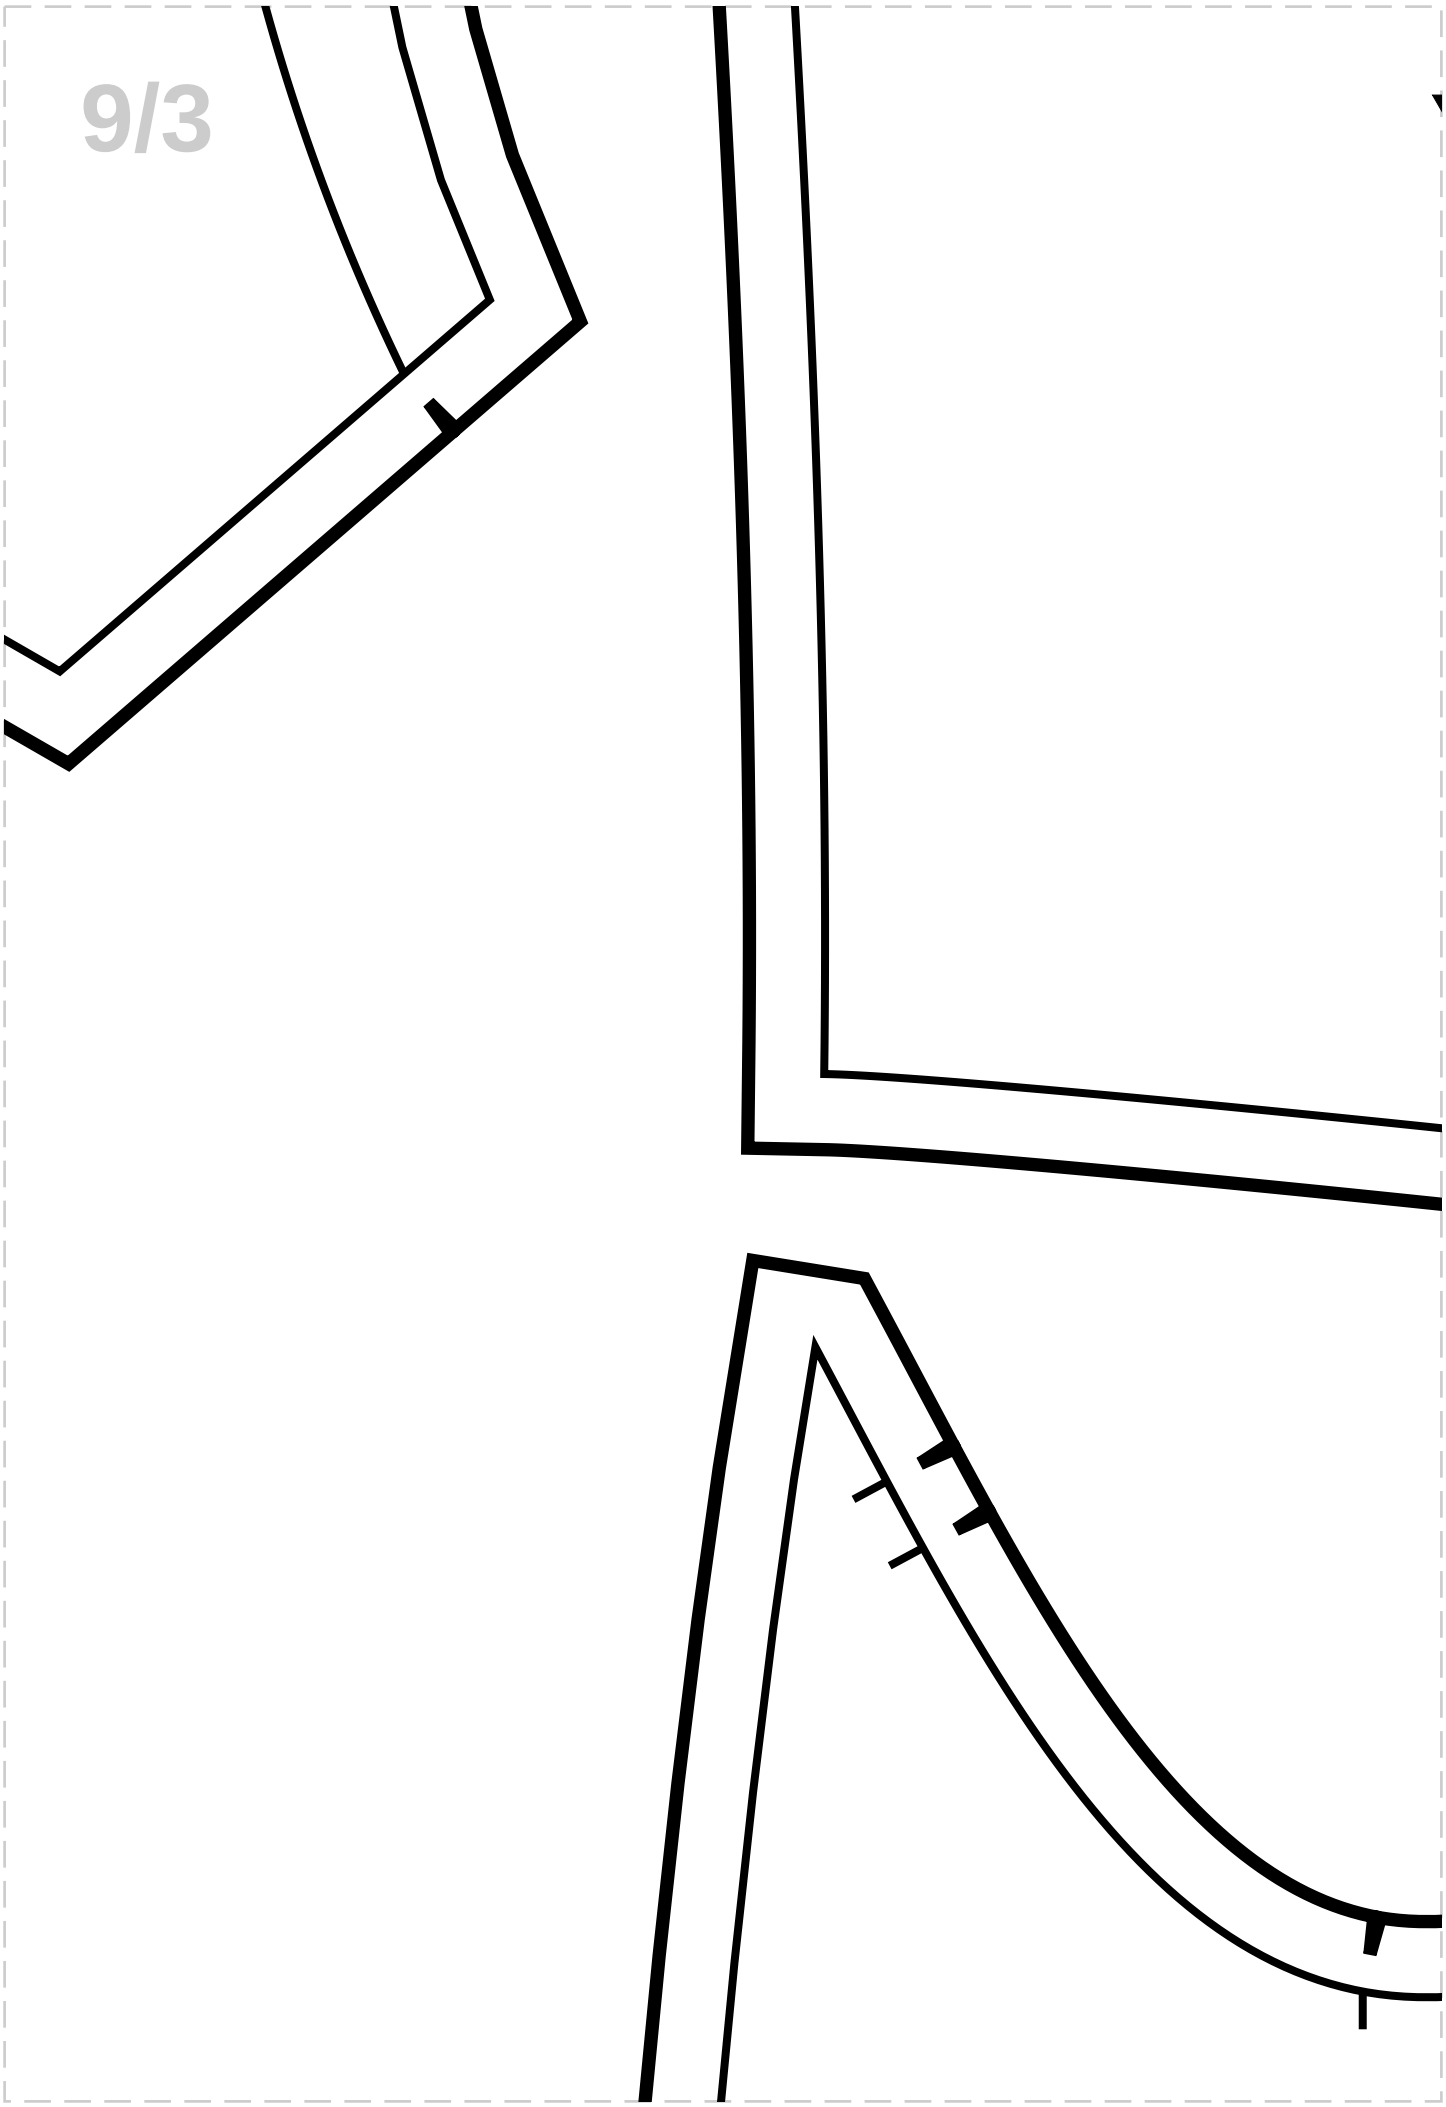

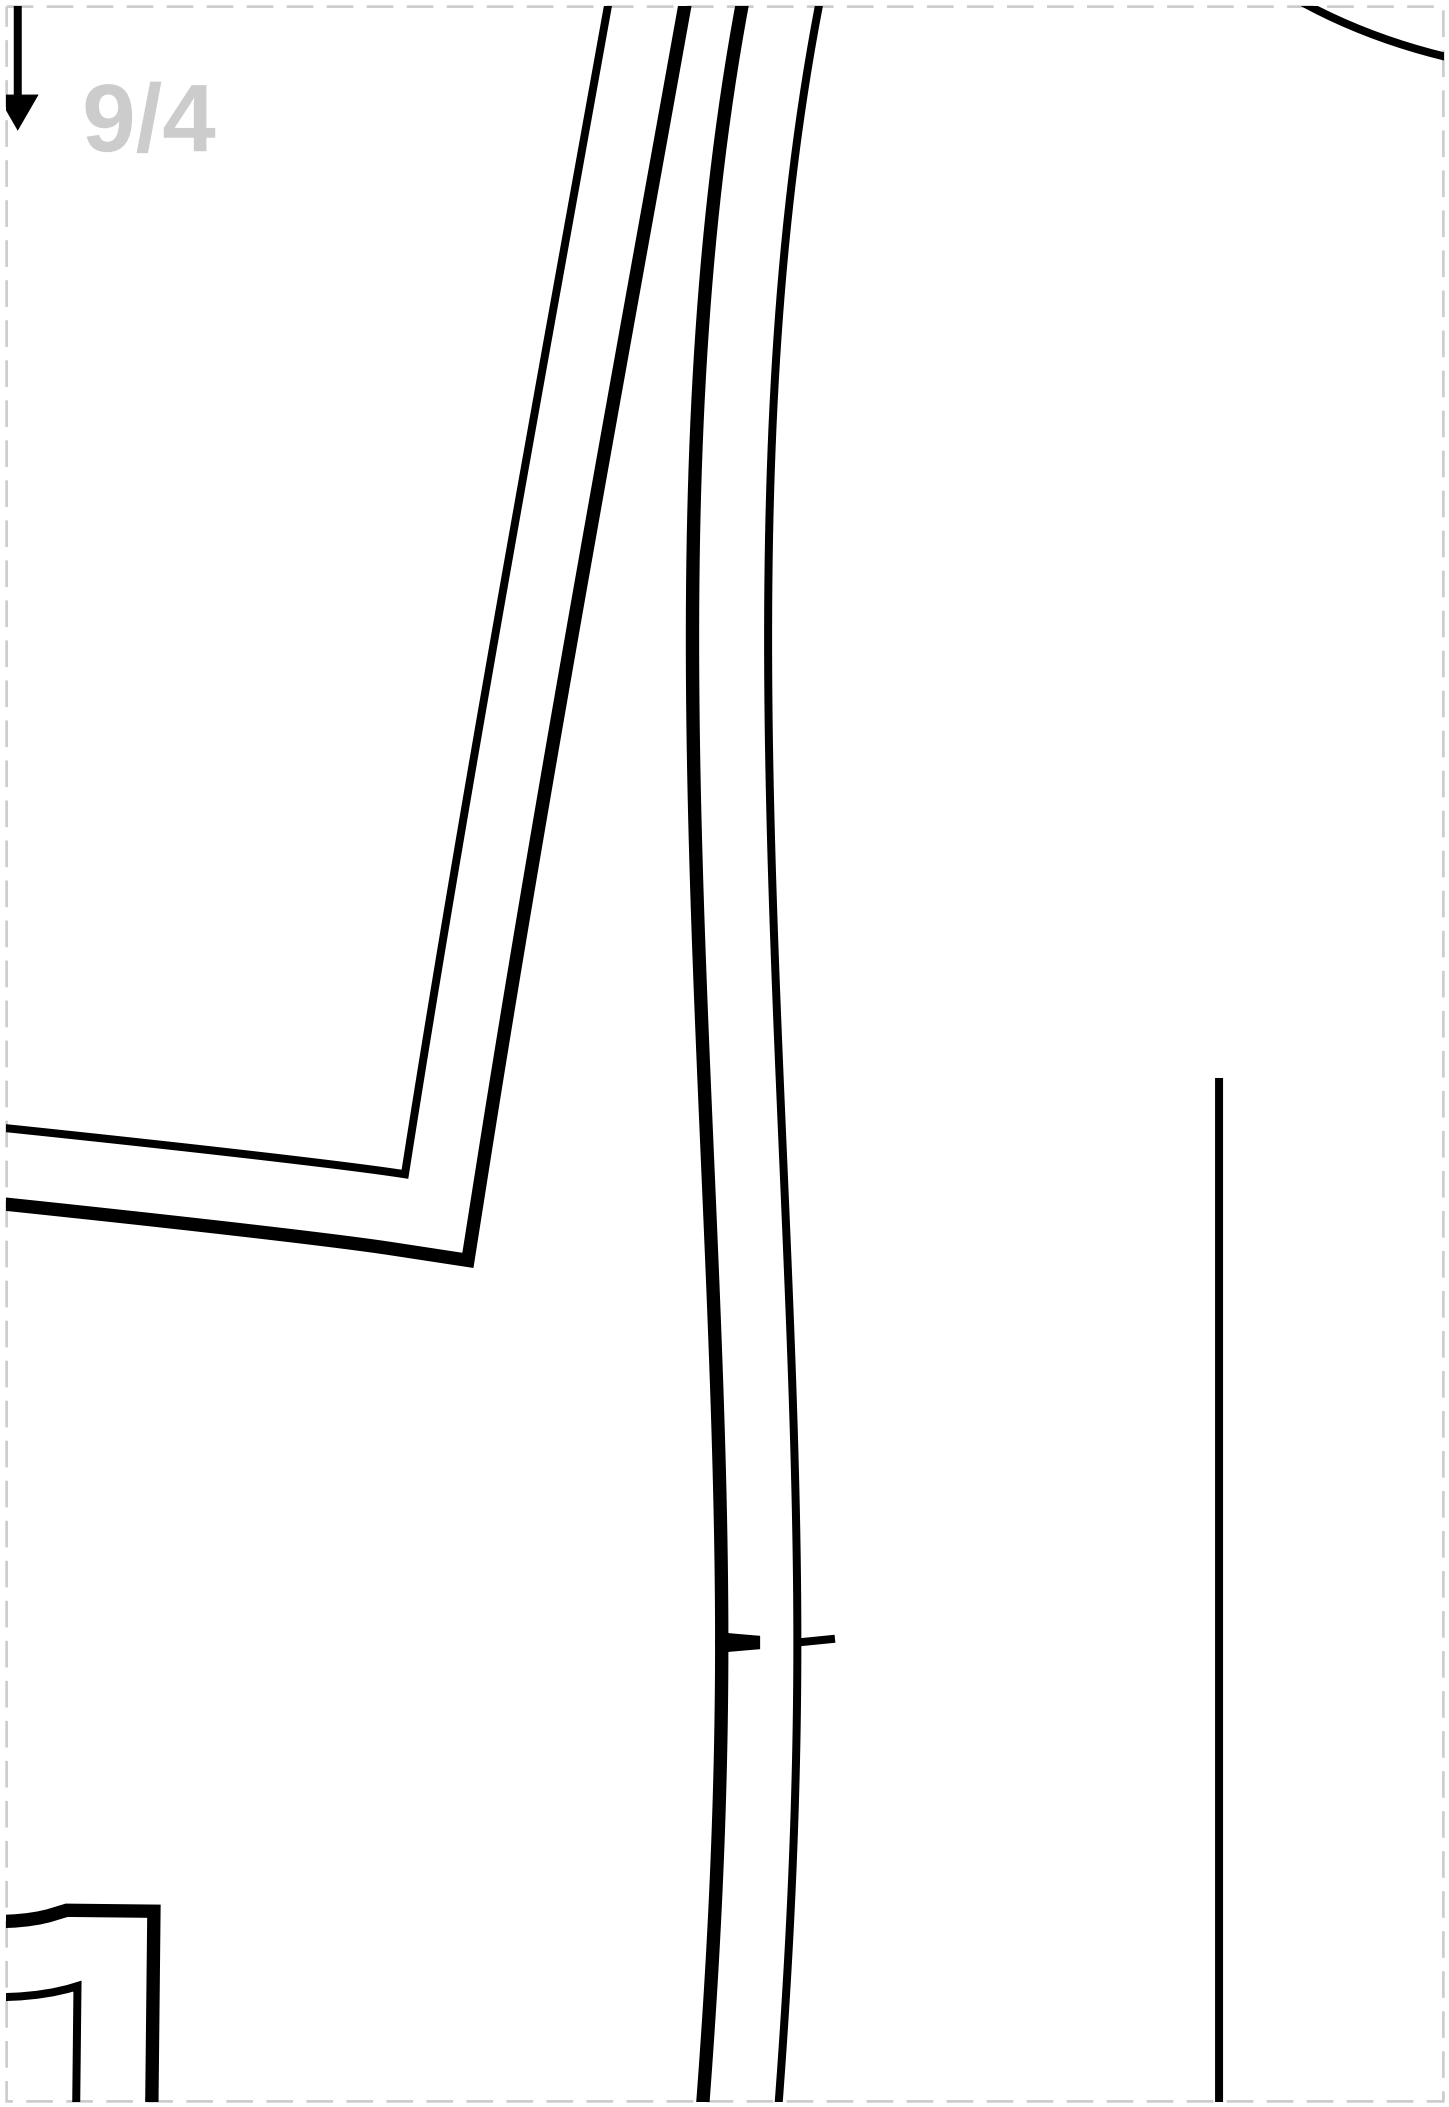
9/4

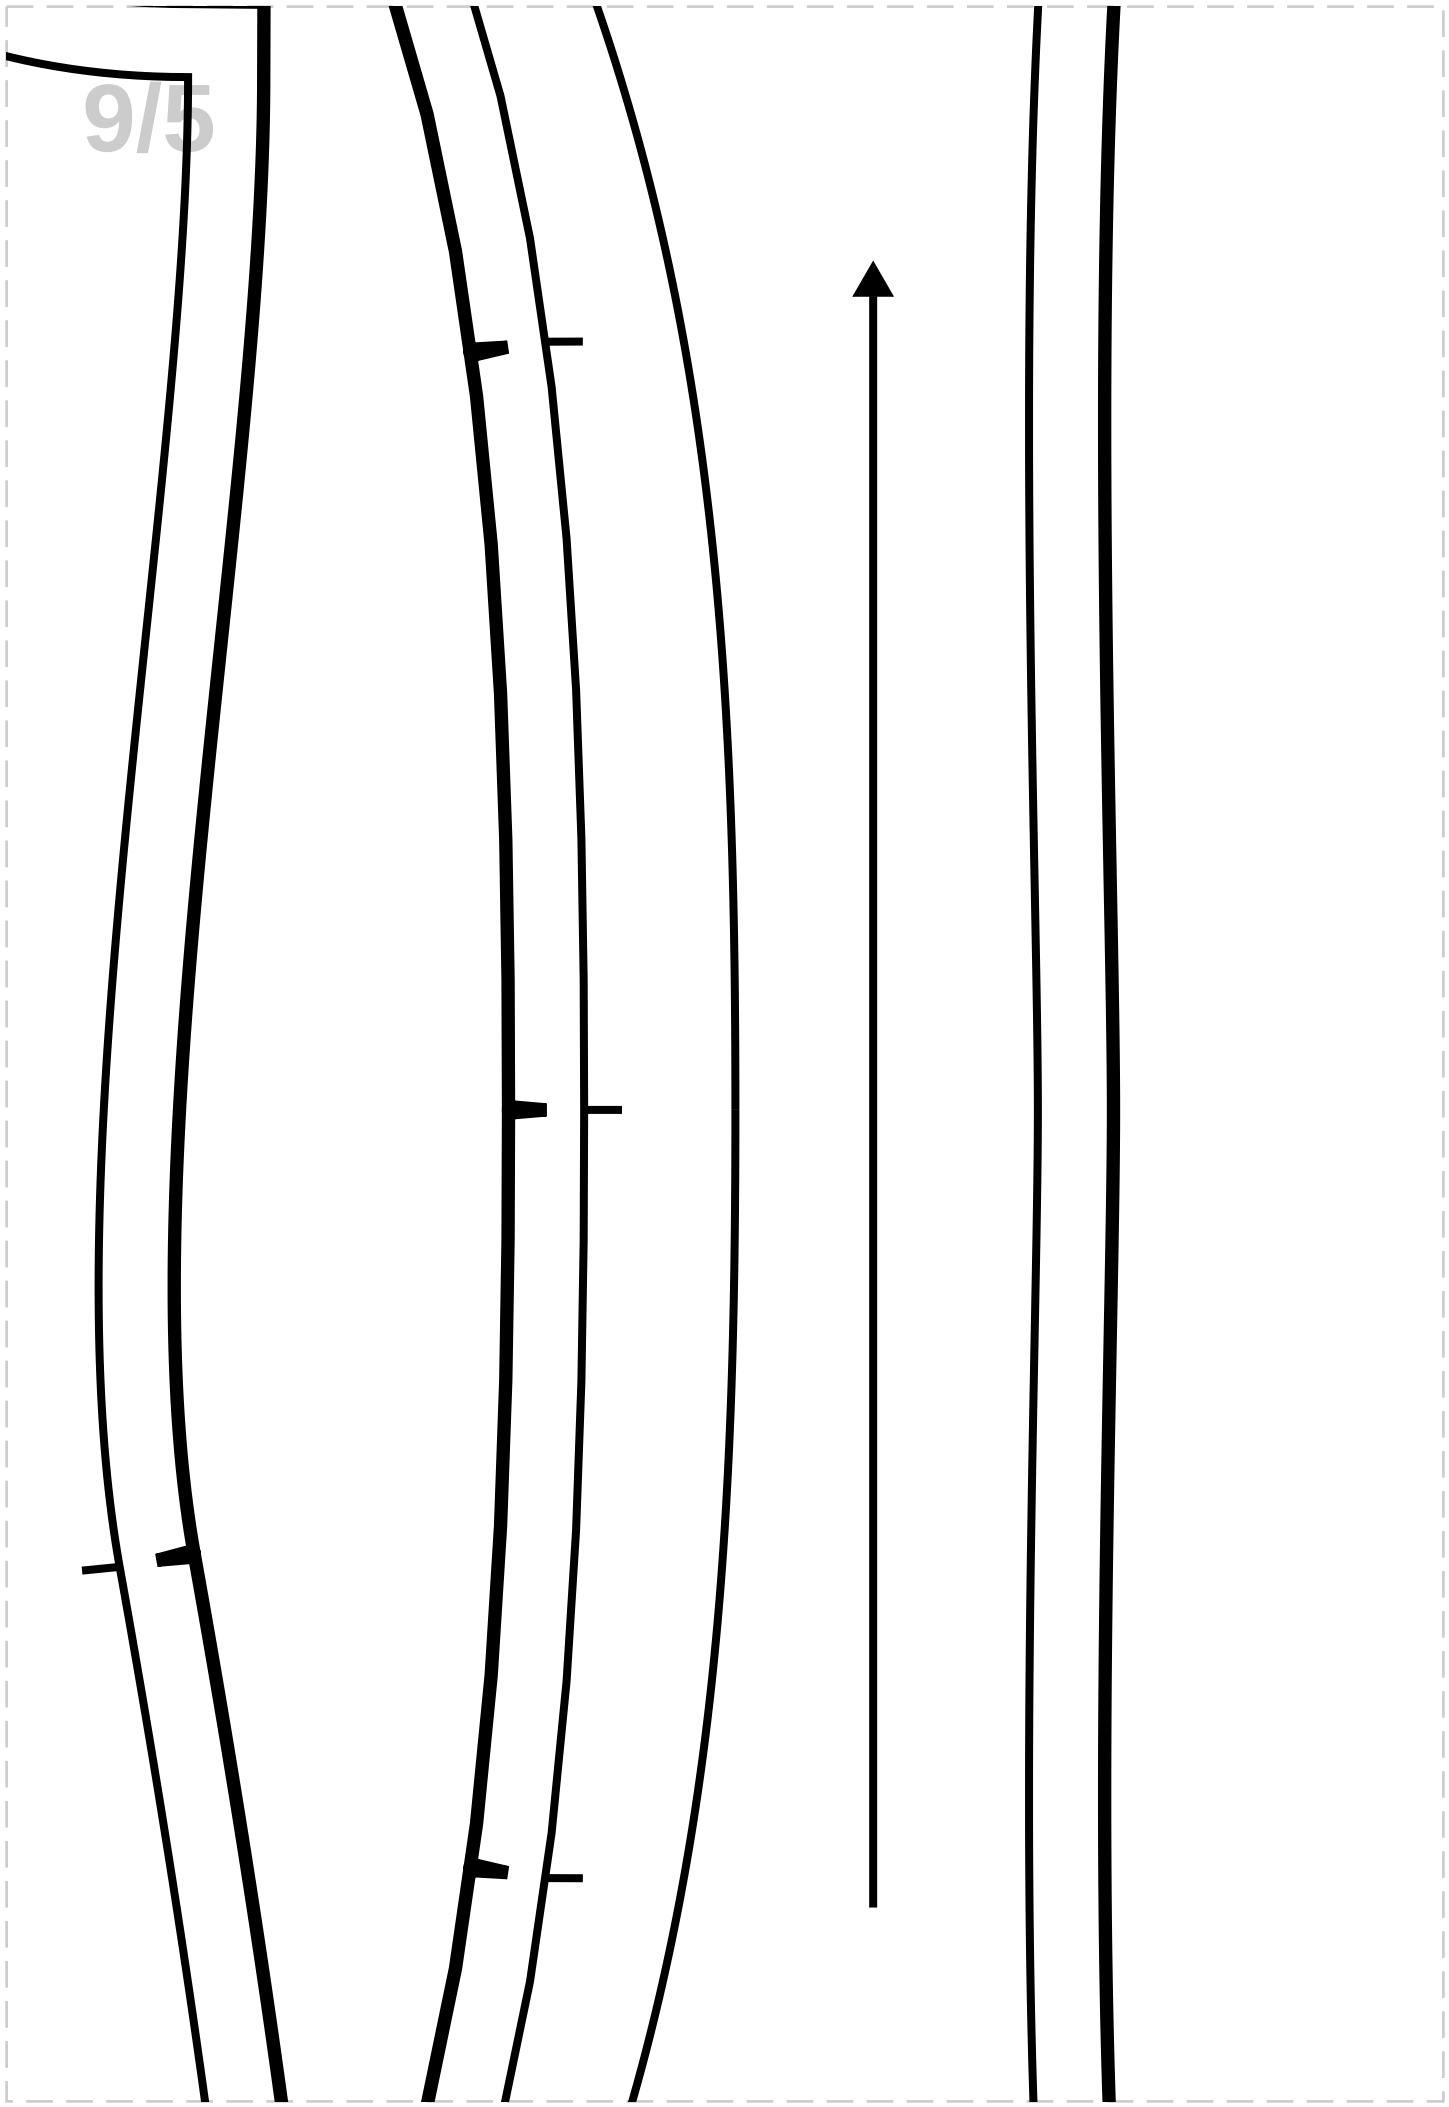

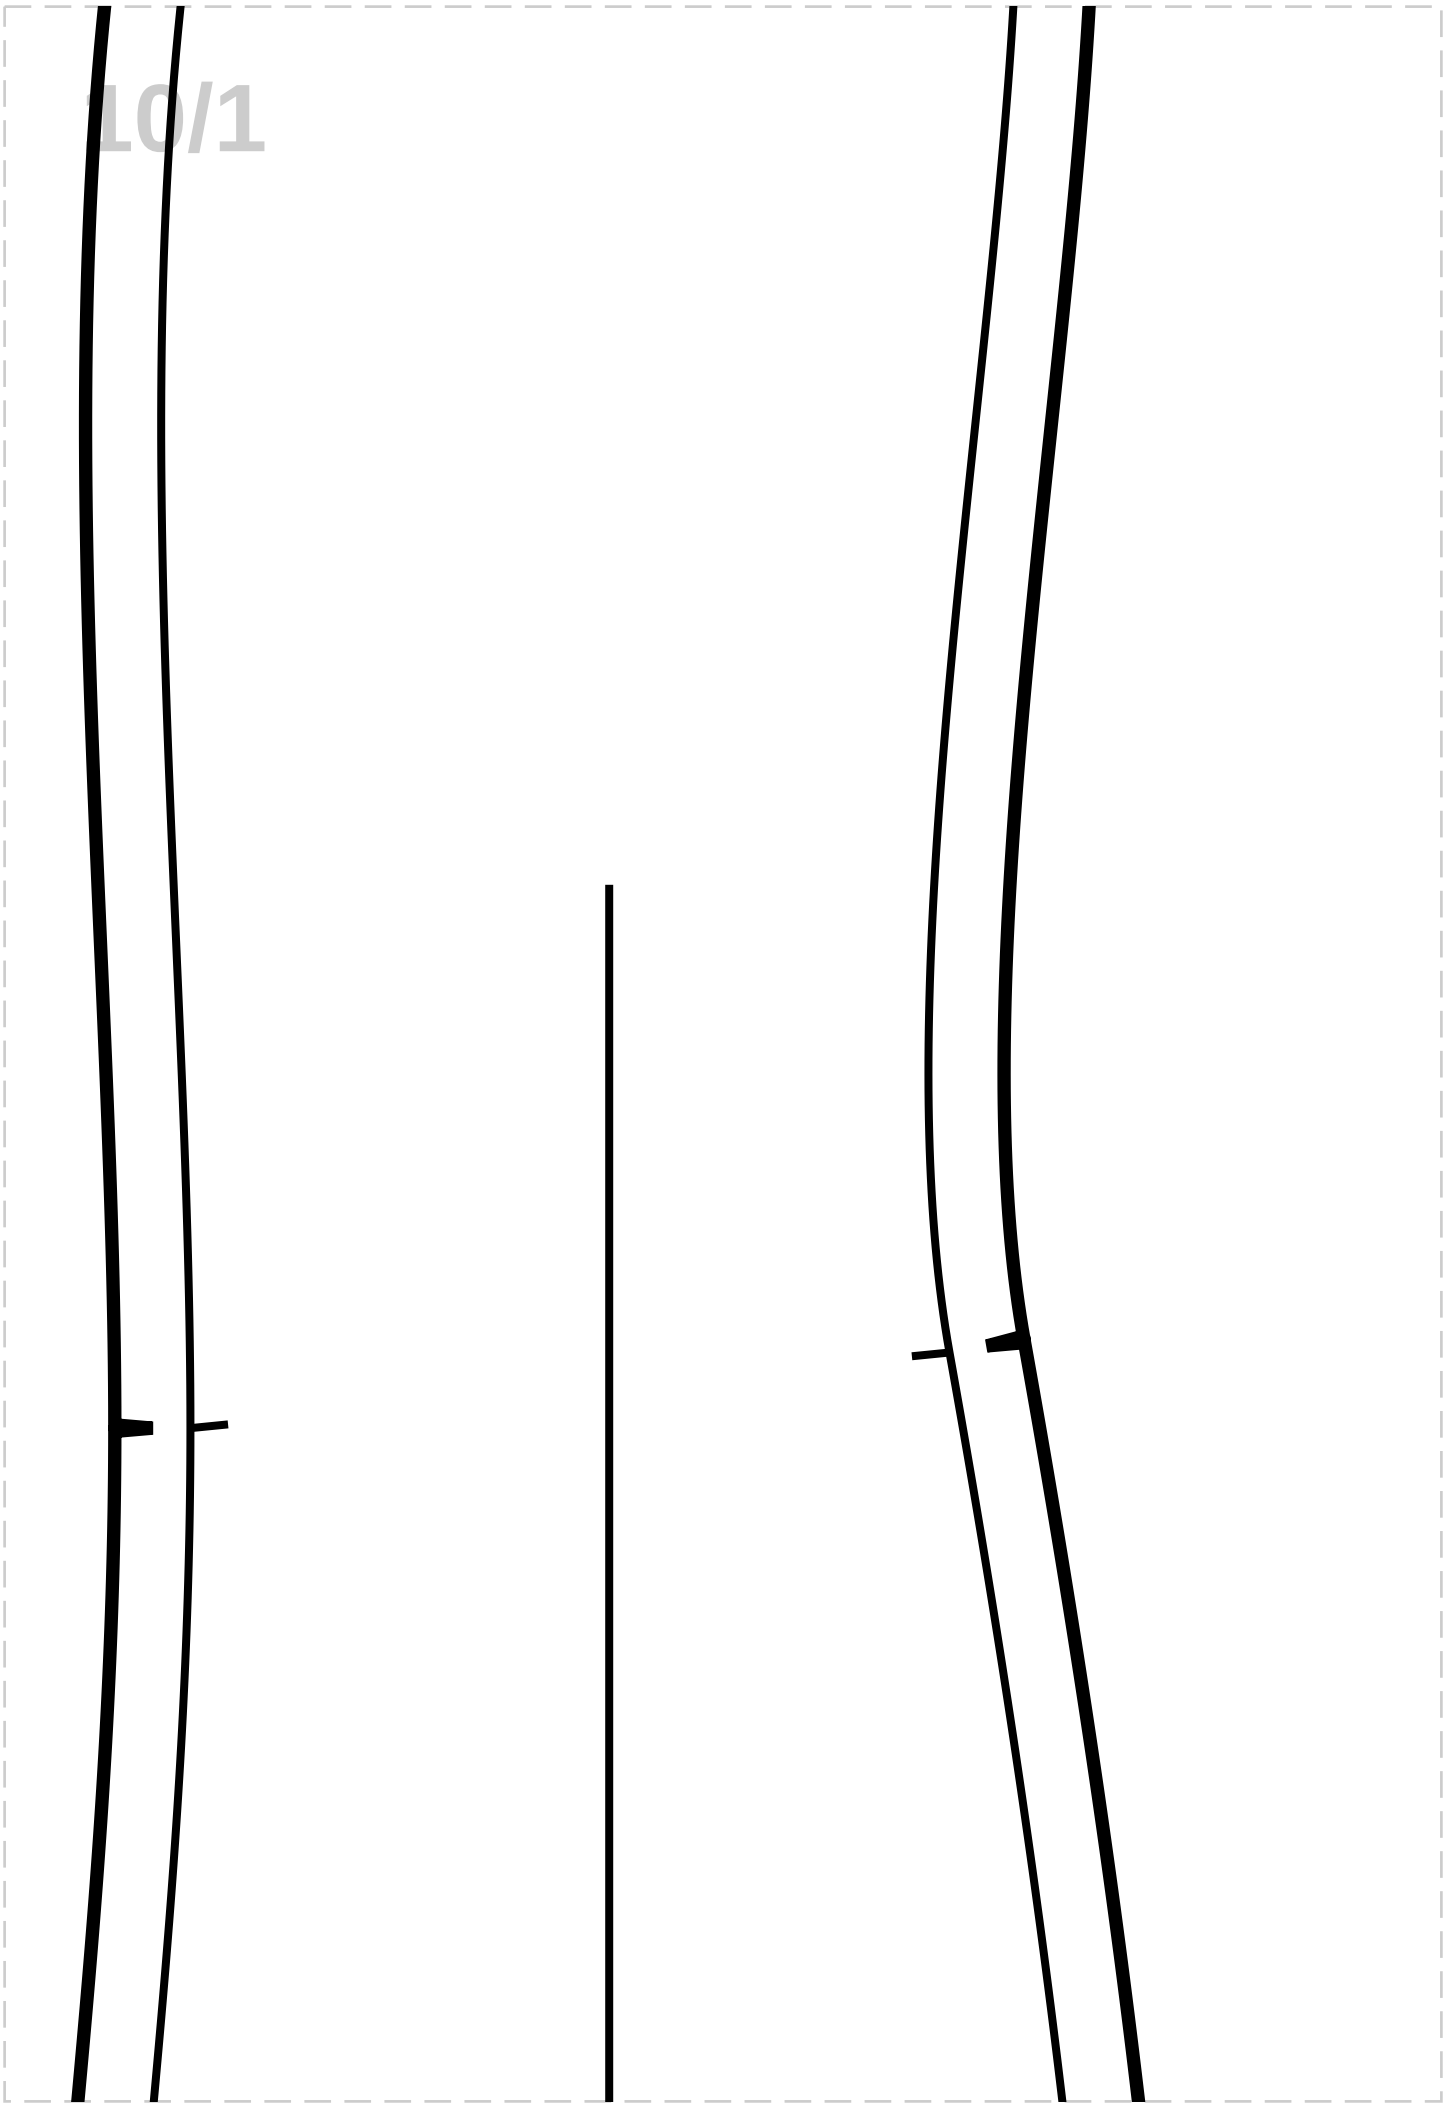
10/1

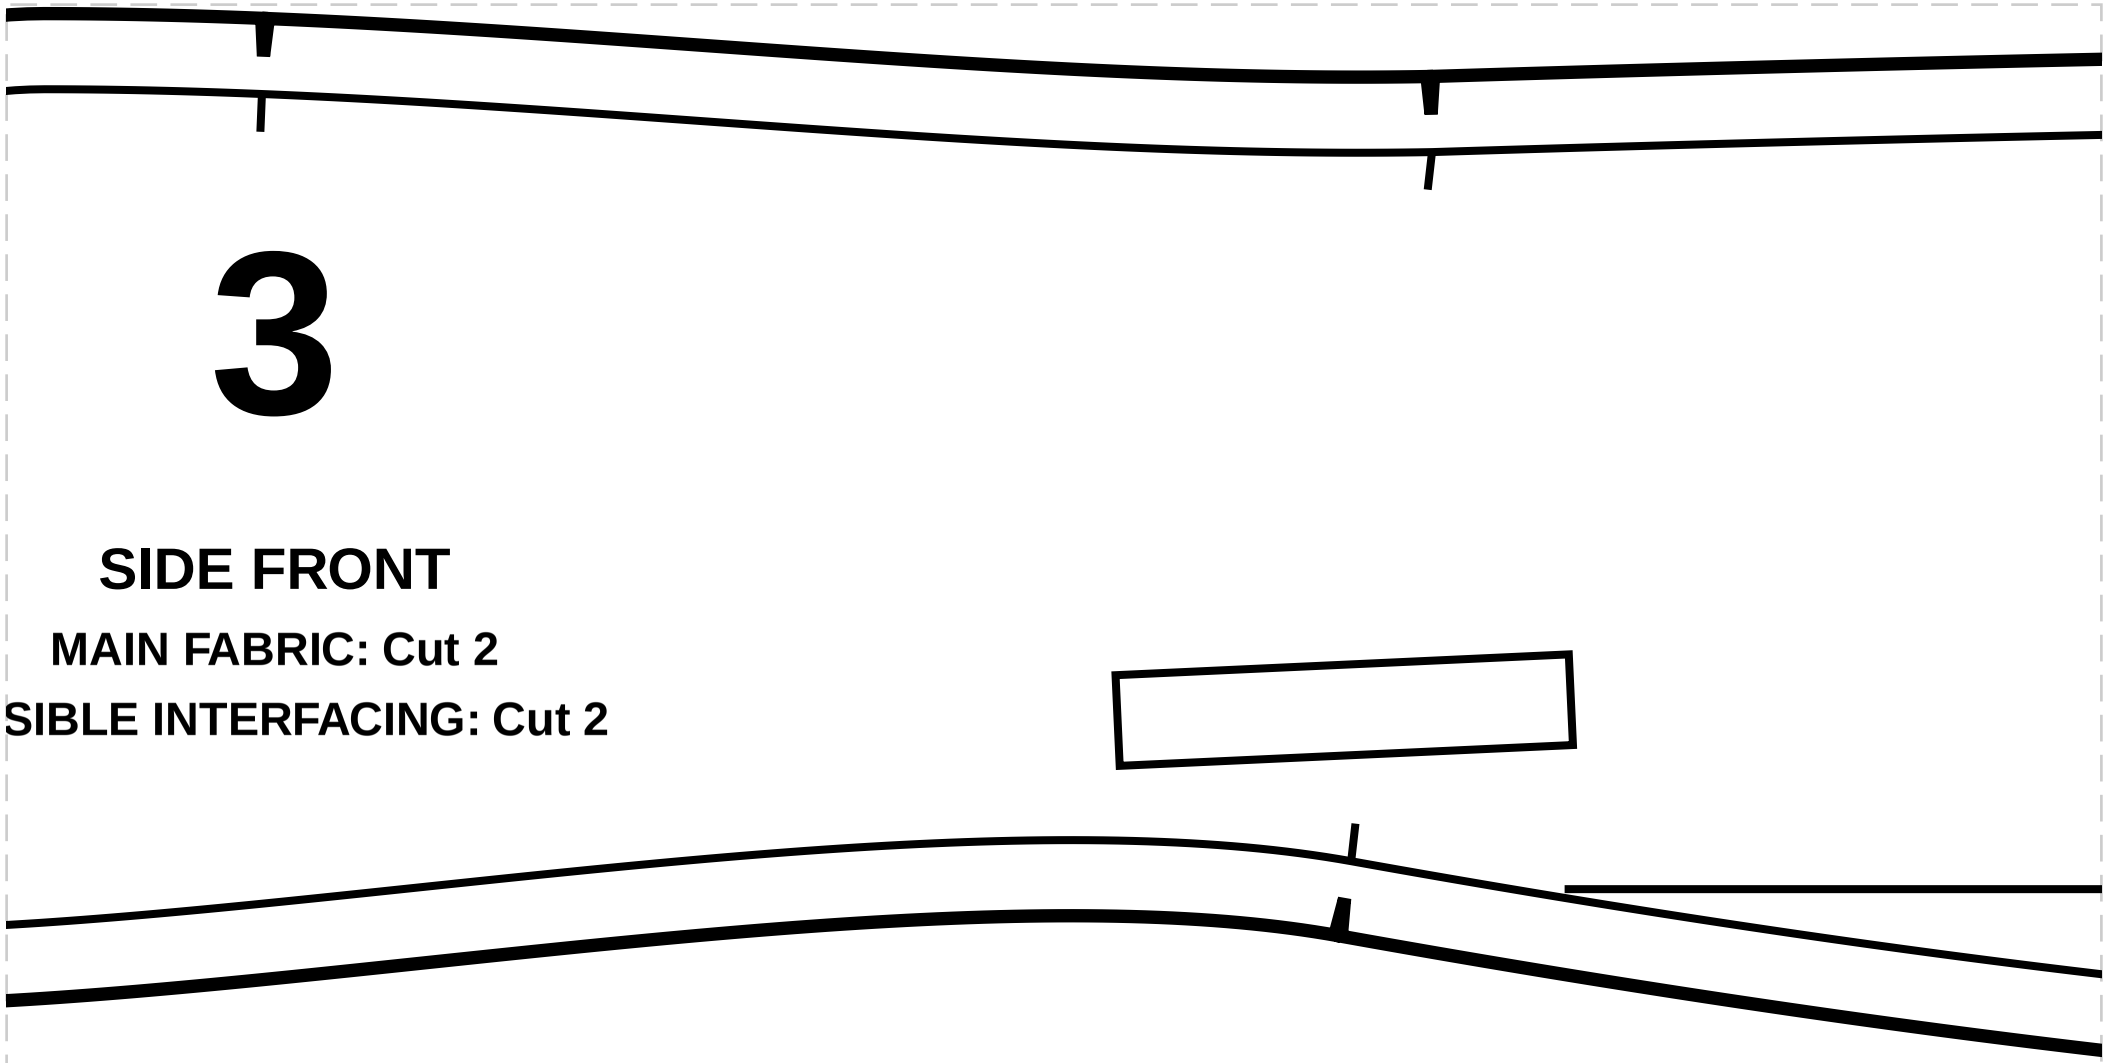


3


SIDE FRONT


MAIN FABRIC: Cut 2


SIBLE INTERFACING: Cut 2

10/2

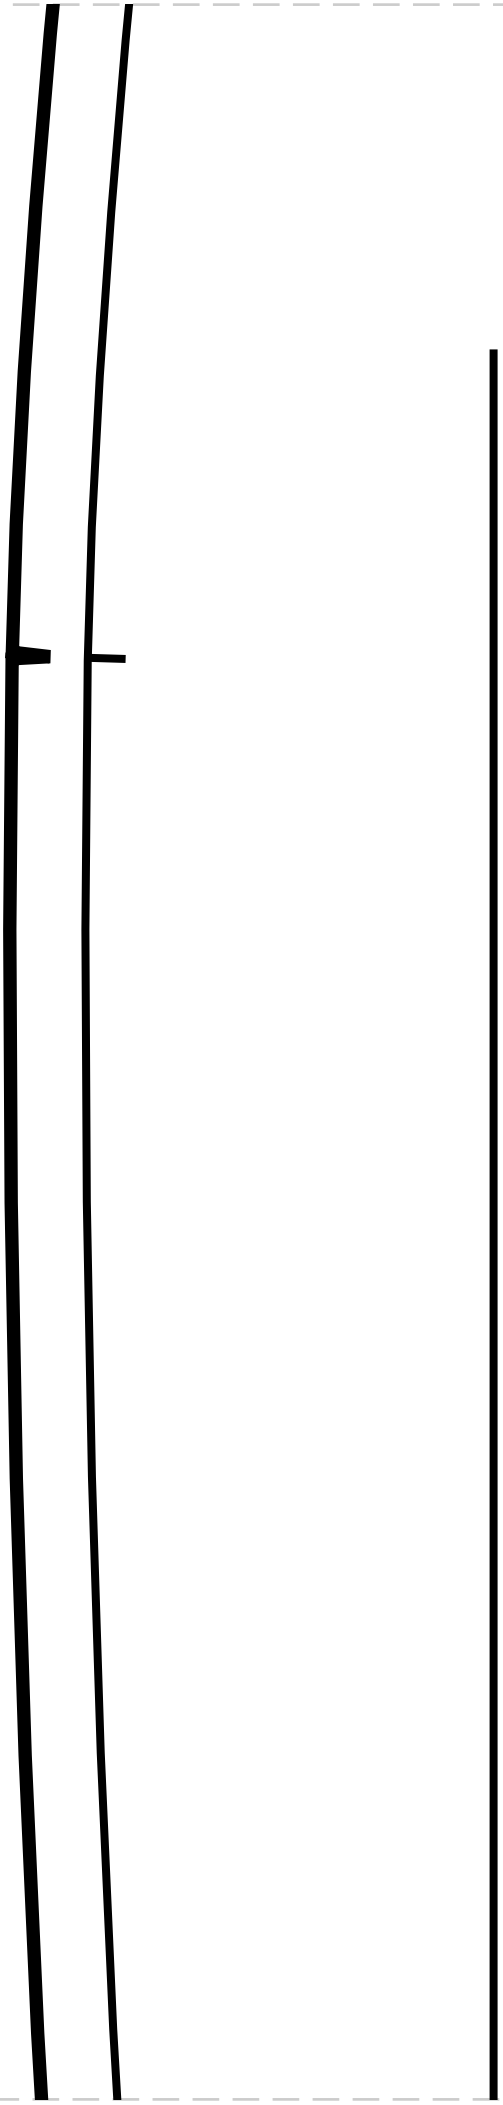

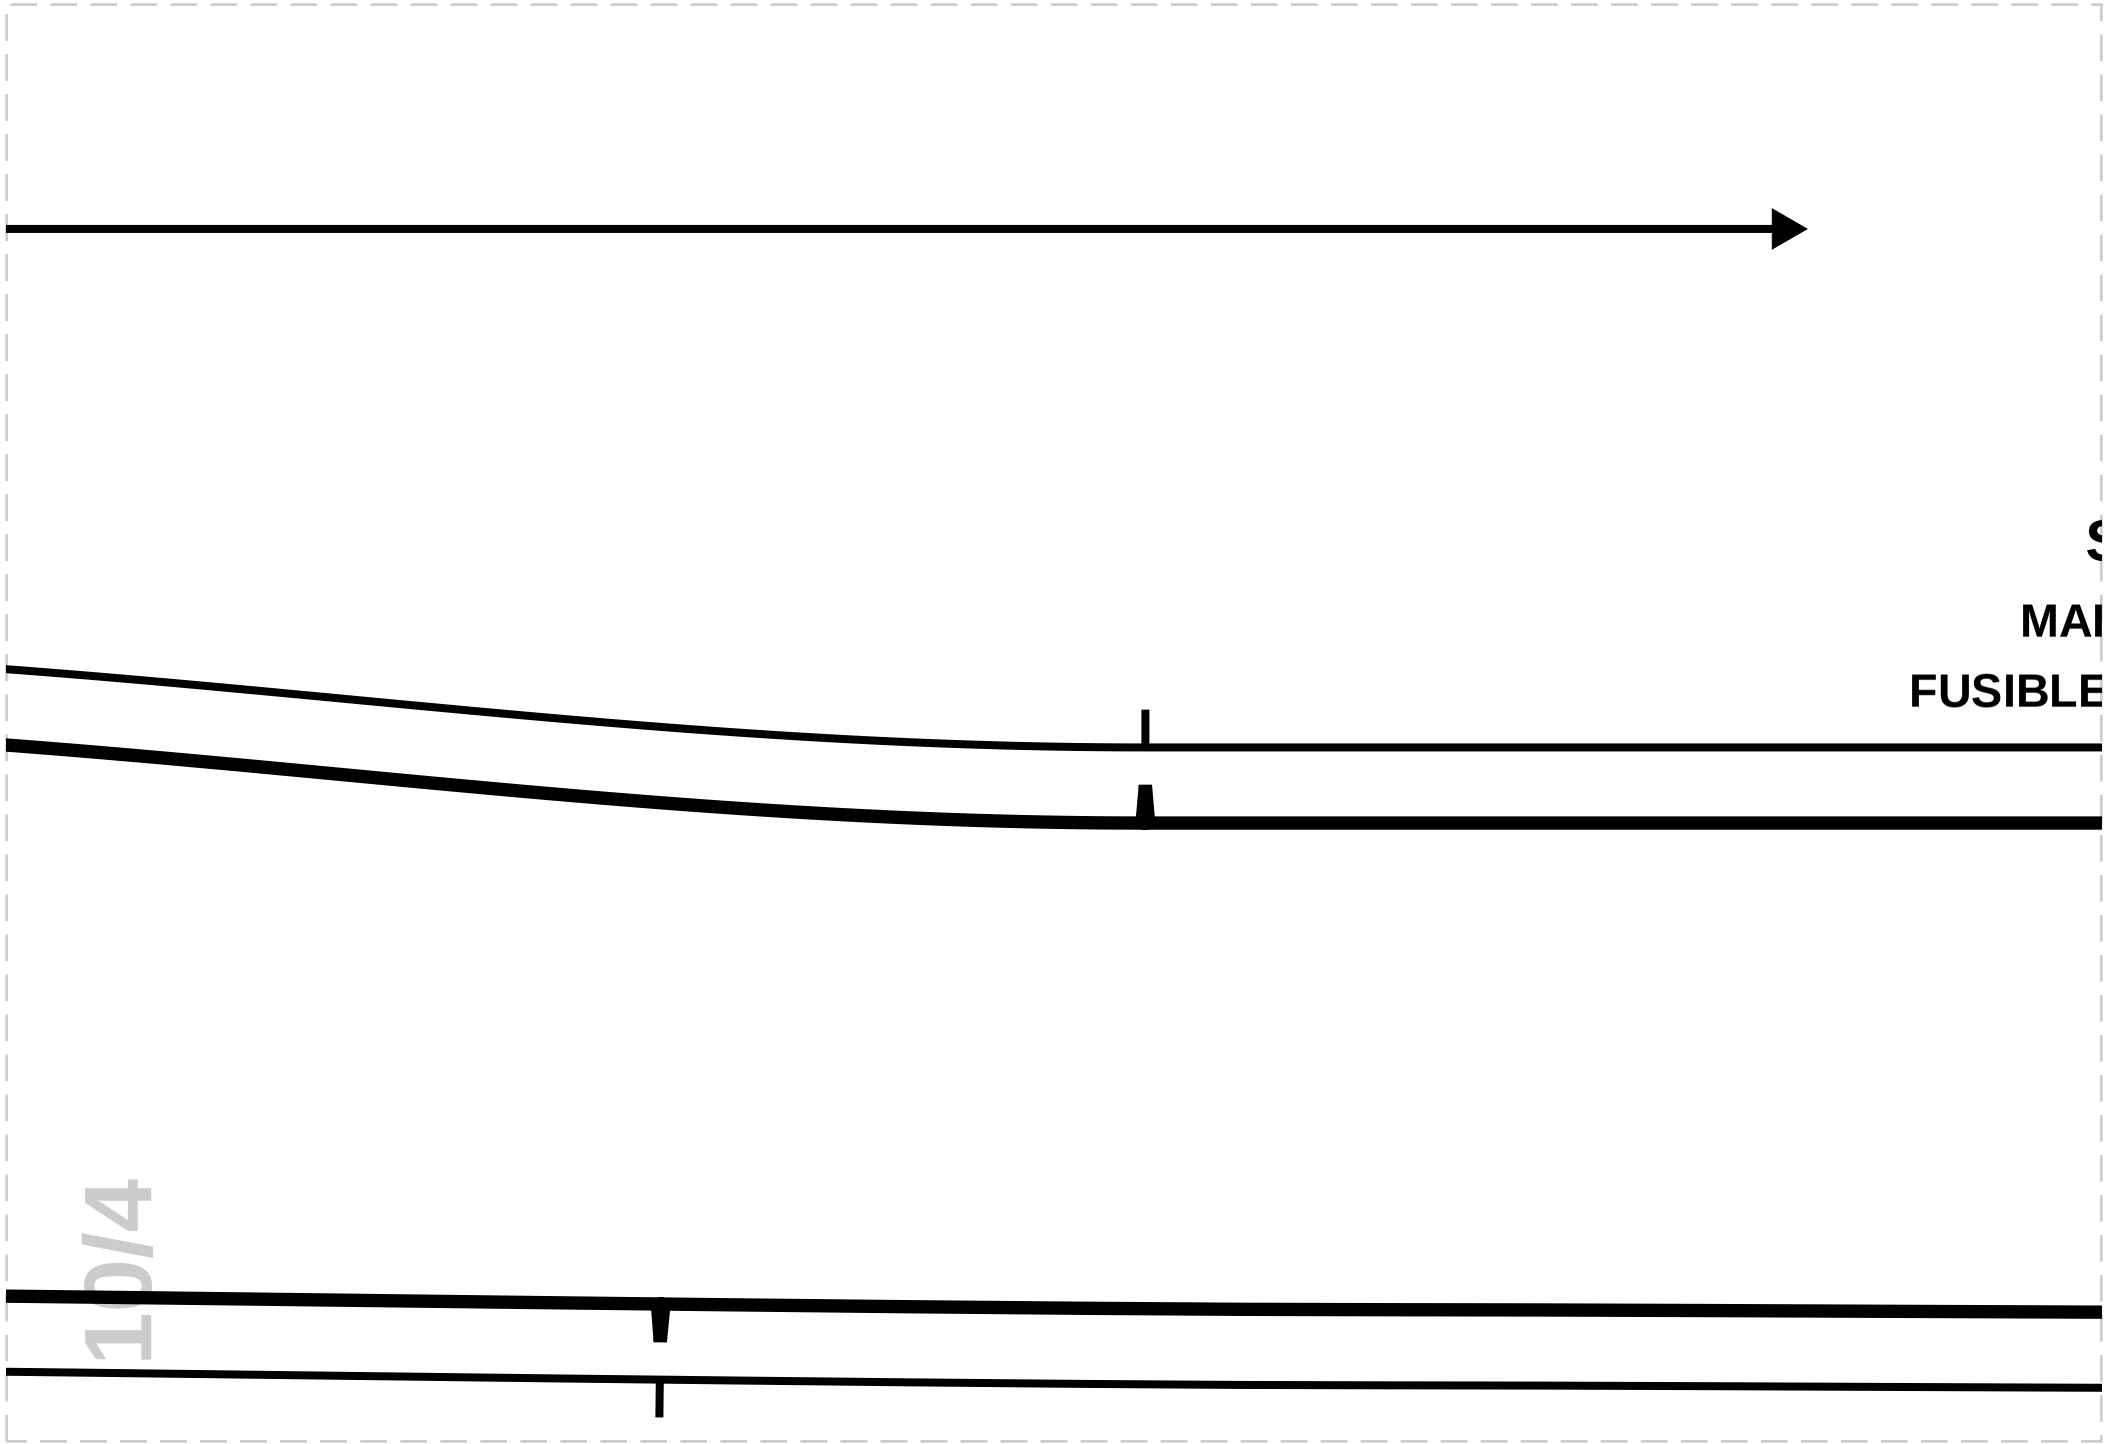
S
MAI
FUSIBLE
10/4

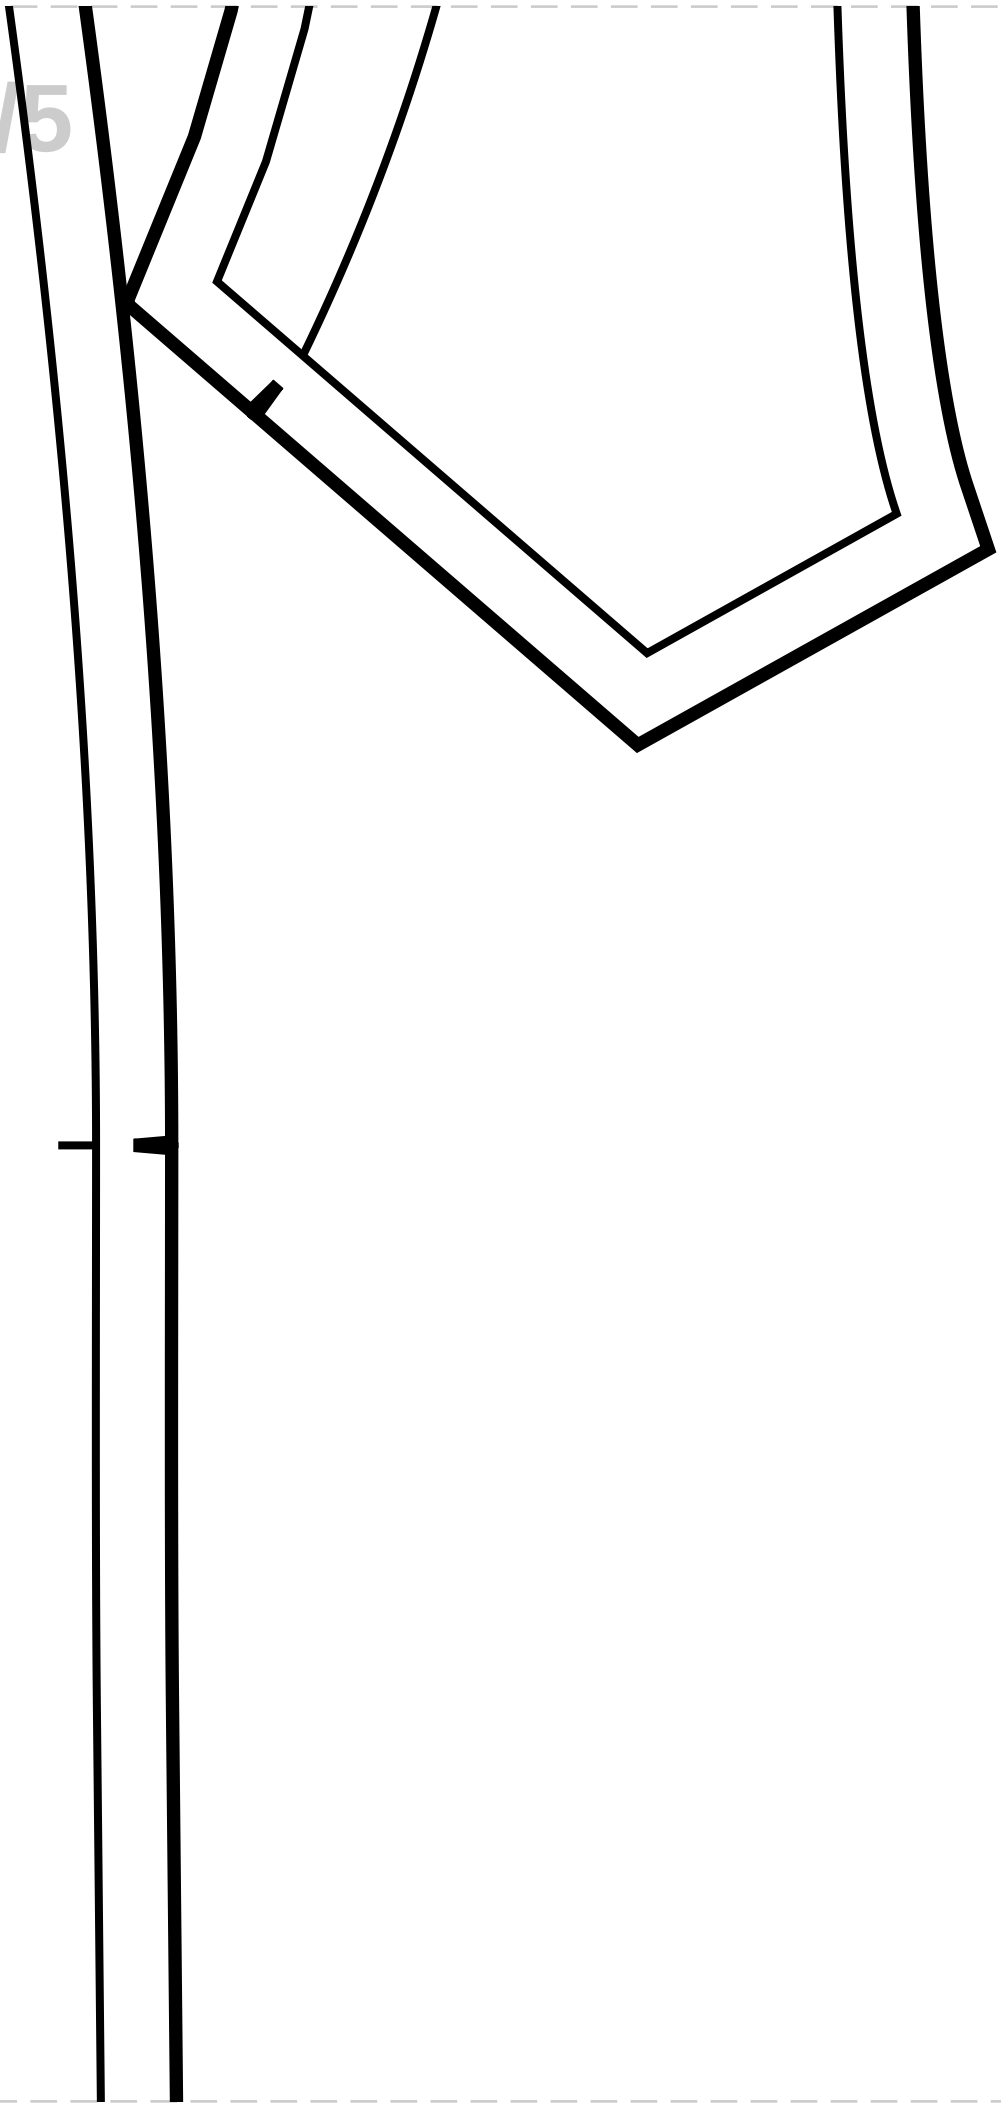

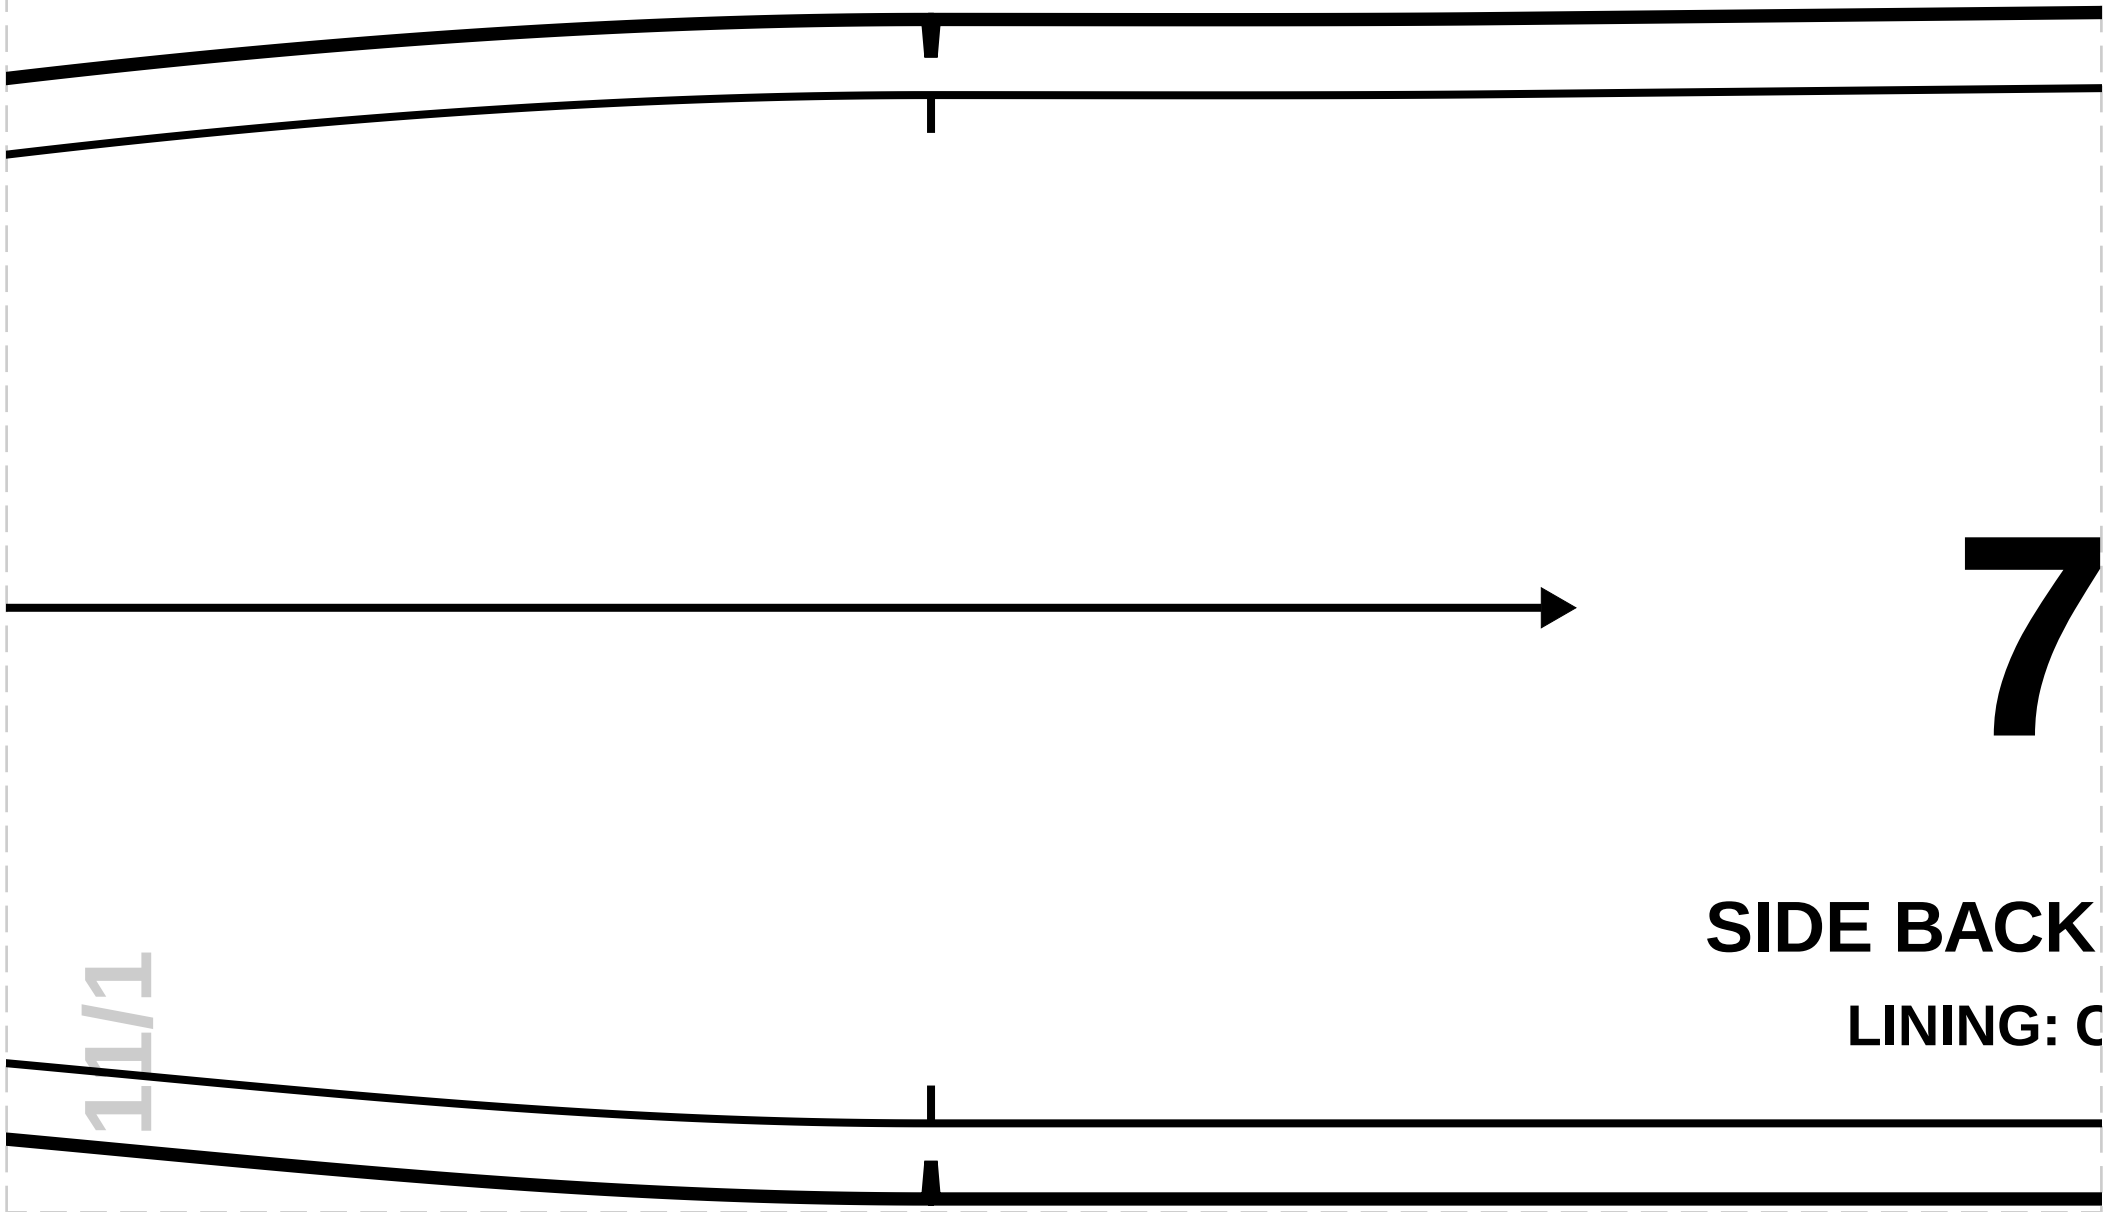


7


SIDE BACK

LINING: C

1/1/1

11/2

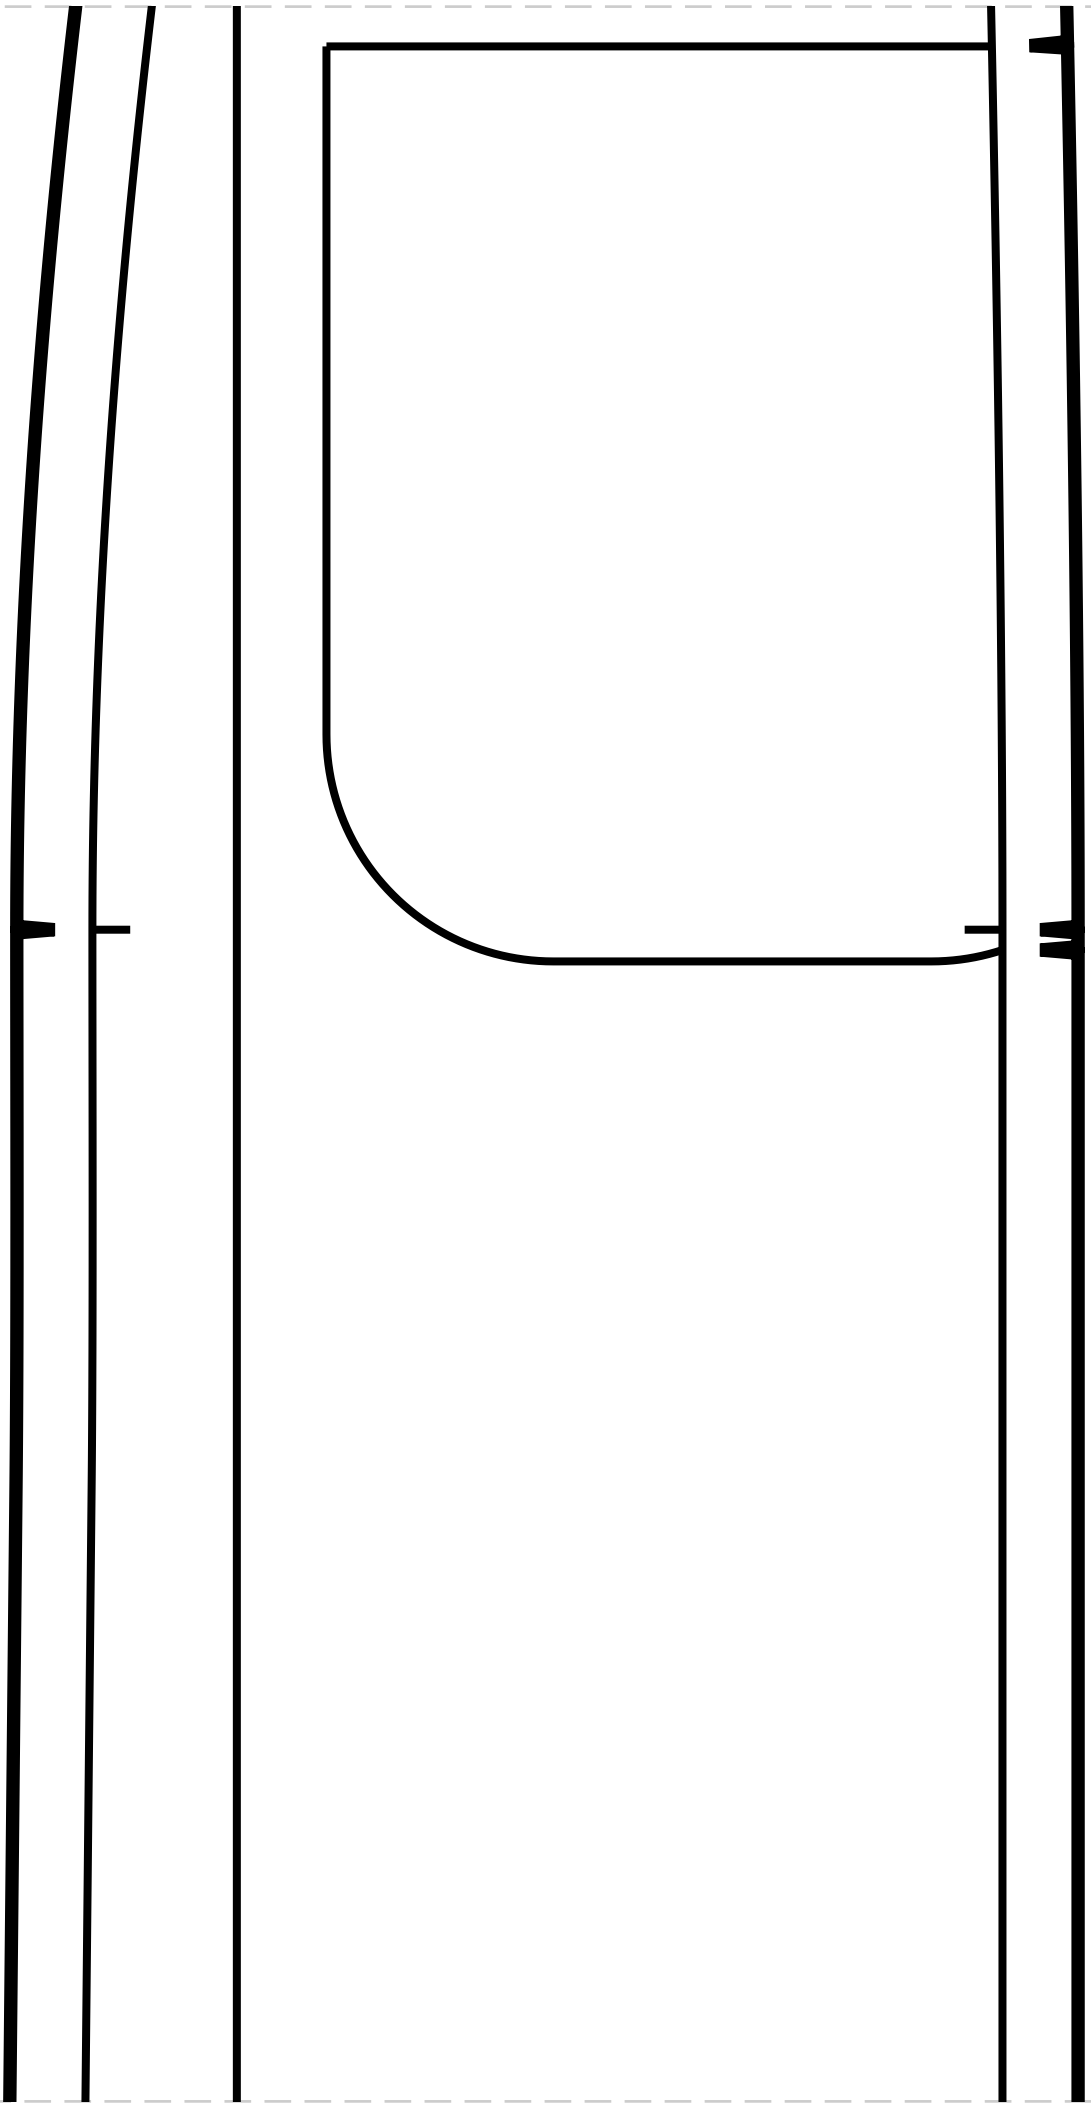

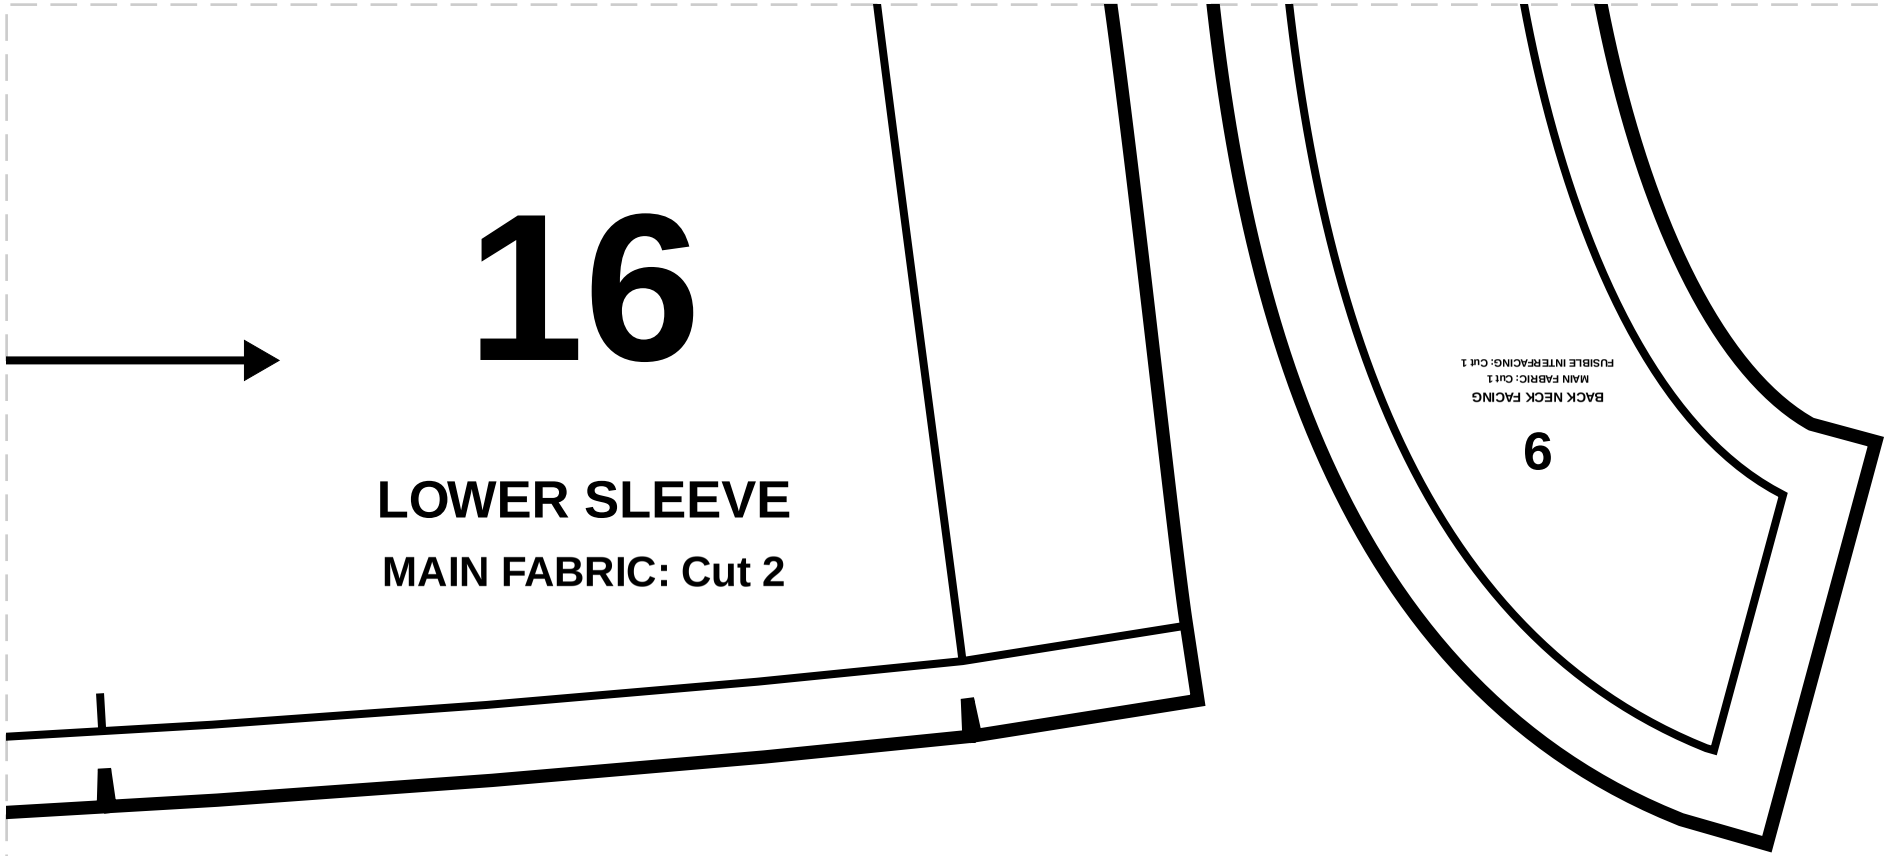

16
LOWER SLEEVE
MAIN FABRIC: Cut 2
BACK NECK FACING
MAIN FABRIC: Cut 1
FUSIBLE INTERFACING: Cut 1
6

6


SIDE BACK


IN FABRIC: Cut 2

: INTERFACING: Cut 2

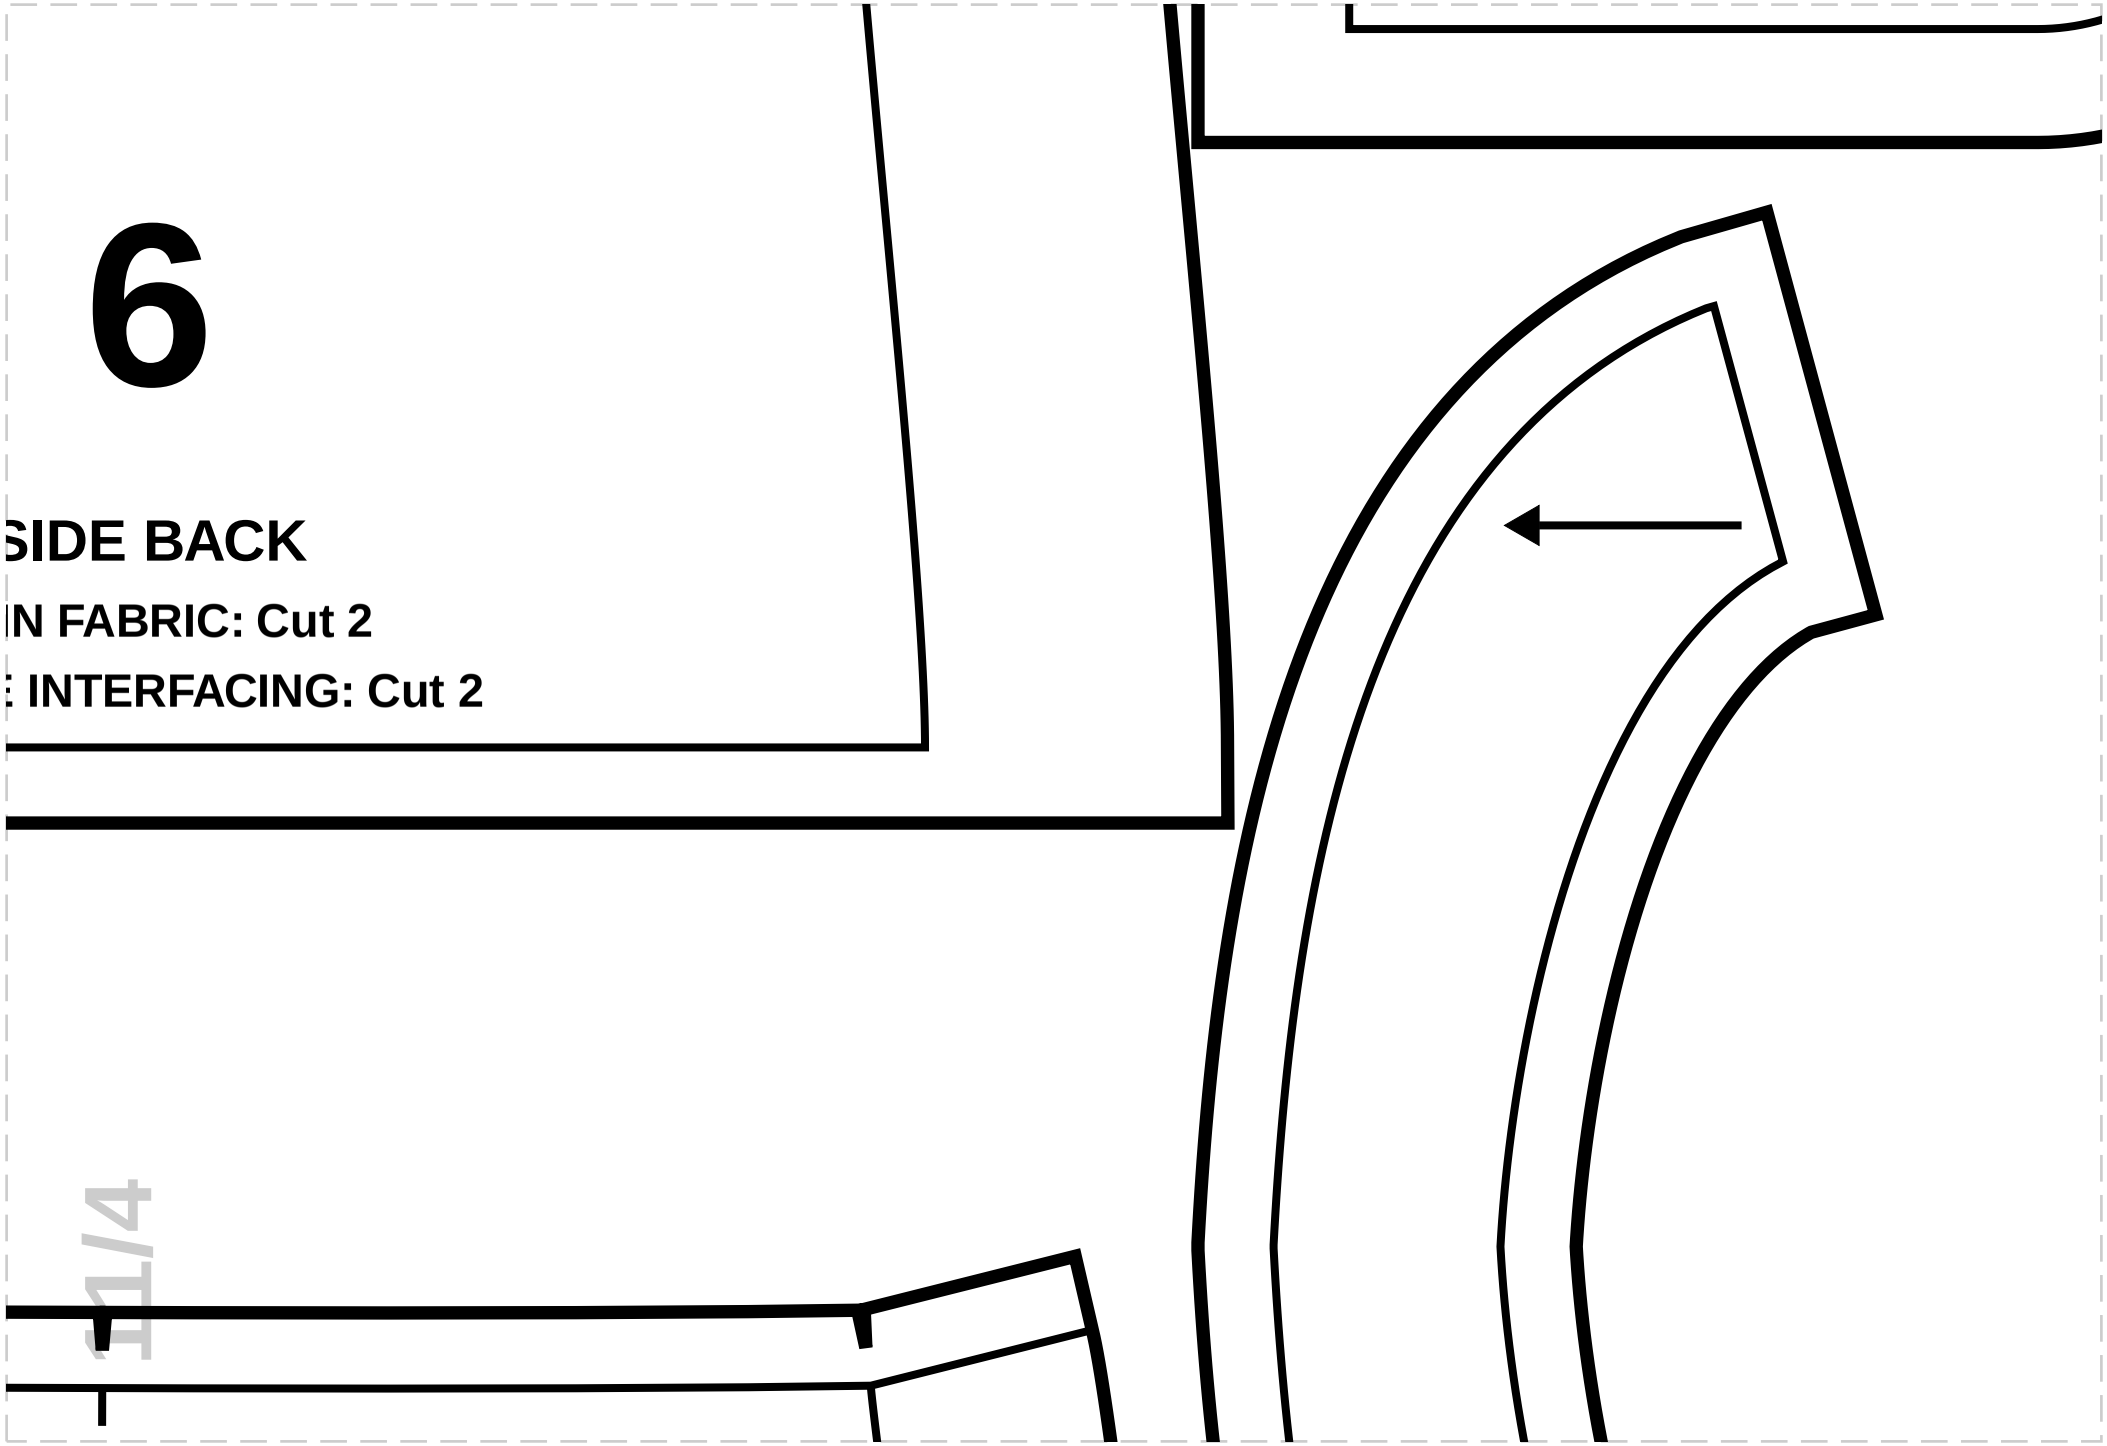

1/4

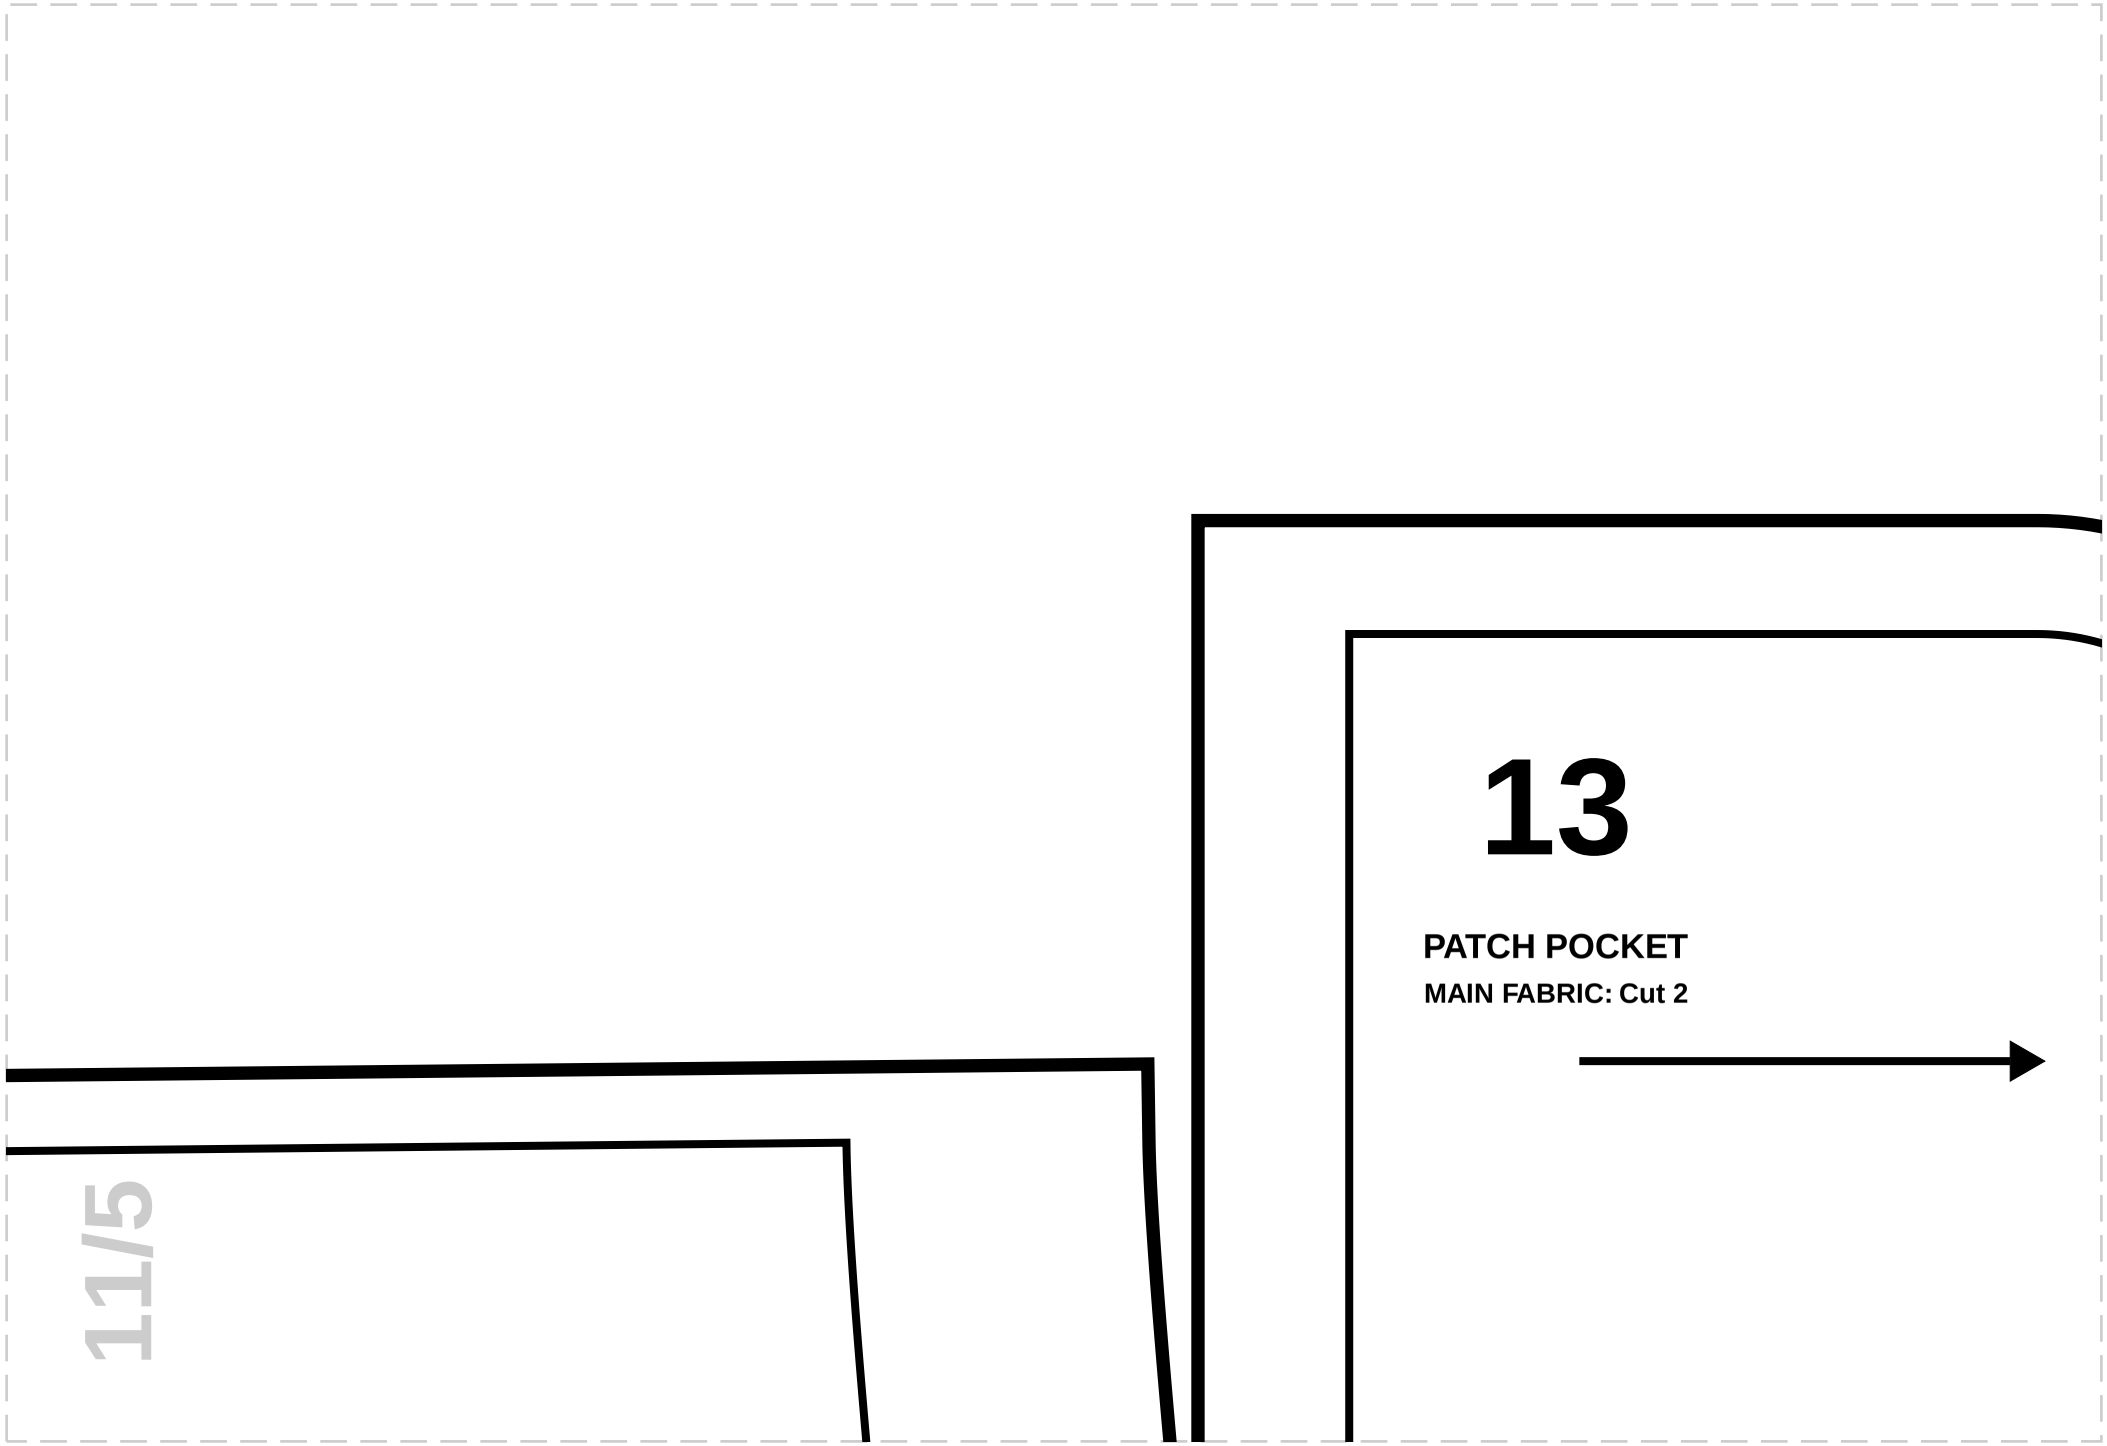

13
PATCH POCKET
MAIN FABRIC: Cut 2
11/5

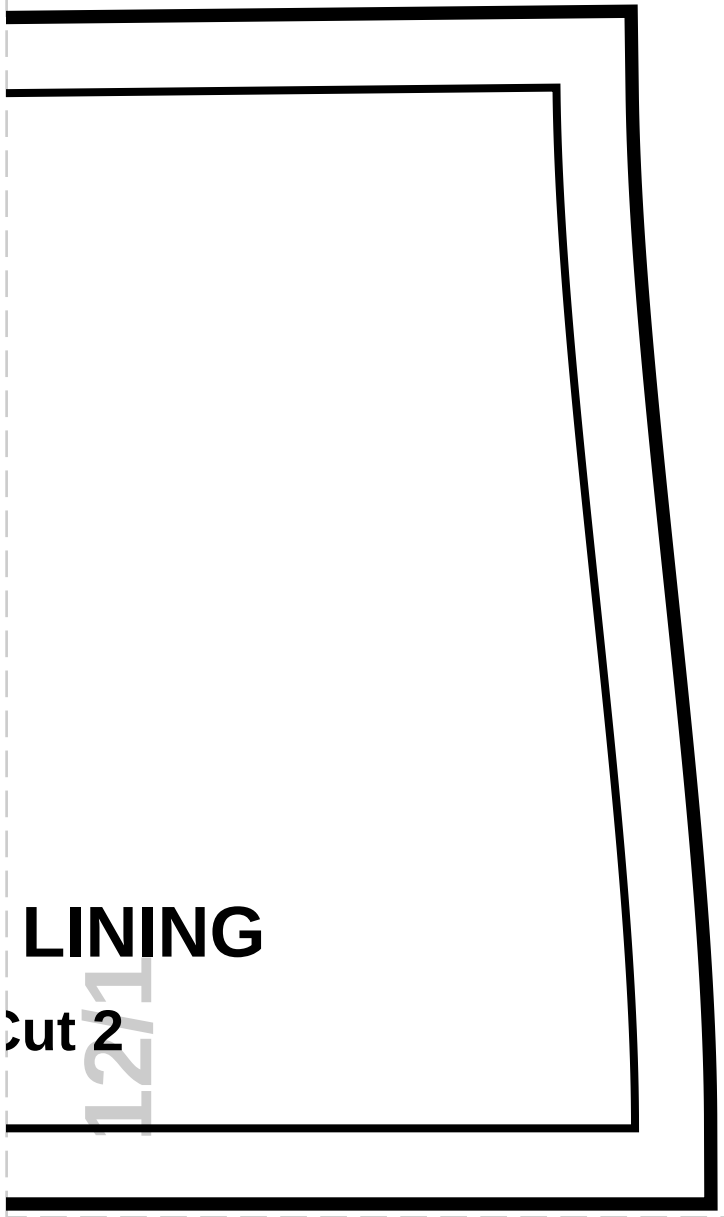

LINING

Cut 2

1271

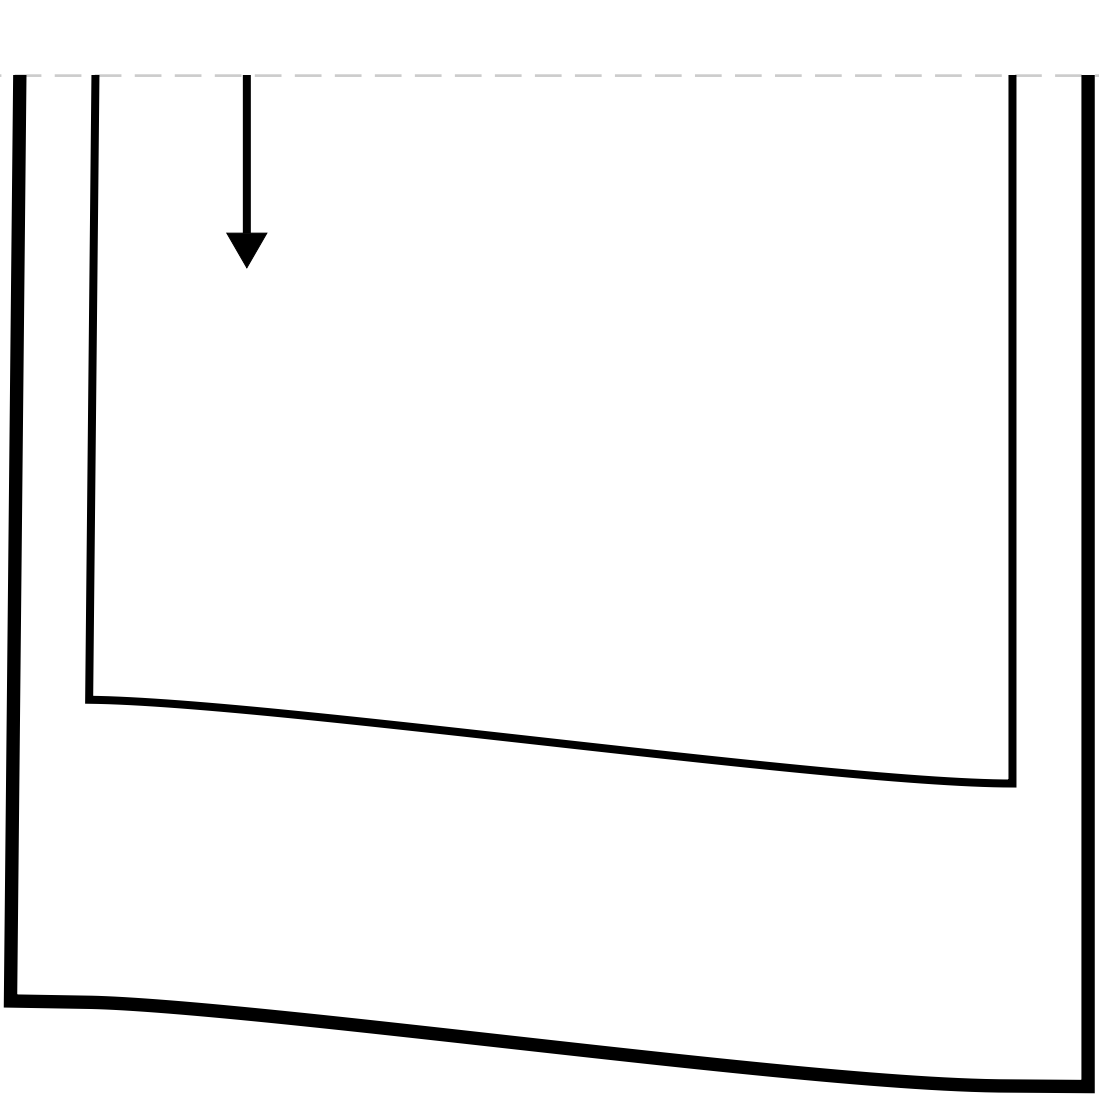

12/3

