cozysewpatterns

Print this Calibration Test page first!

Size: Height: 167.75, Bust: 114.25, Waist: 99, Hips: 120.75
SIZE 18

Notes

How to print

Printing


Once your Calibration Test Page has been printed, measure the 4”x 4” (10cm) scale box with a ruler. If the lengths match, you can confidently print your pattern. If the rulers do not match, set your print settings to 100% or Actual and retry.

Cutting

Your printouts will always have a dashed border to perfectly match your sheets. Cut off the right edge of each page. Be careful not to cut beyond the dashed mark, otherwise your patterns will not align accurately.

Tapping

Group each sheet by the second number marked on each pate i.e. in a group 1, there are: 1/1, 2/1, 3/1, 4/1, etc. In a group 2: 1/2, 2/2 etc. 2. Place page 1/1 on top of the page 2/1, overlapping the right side edge. Match corners and crosses and secure with a pin or tape. Then use a scotch tape to permanently attach the sheets together.

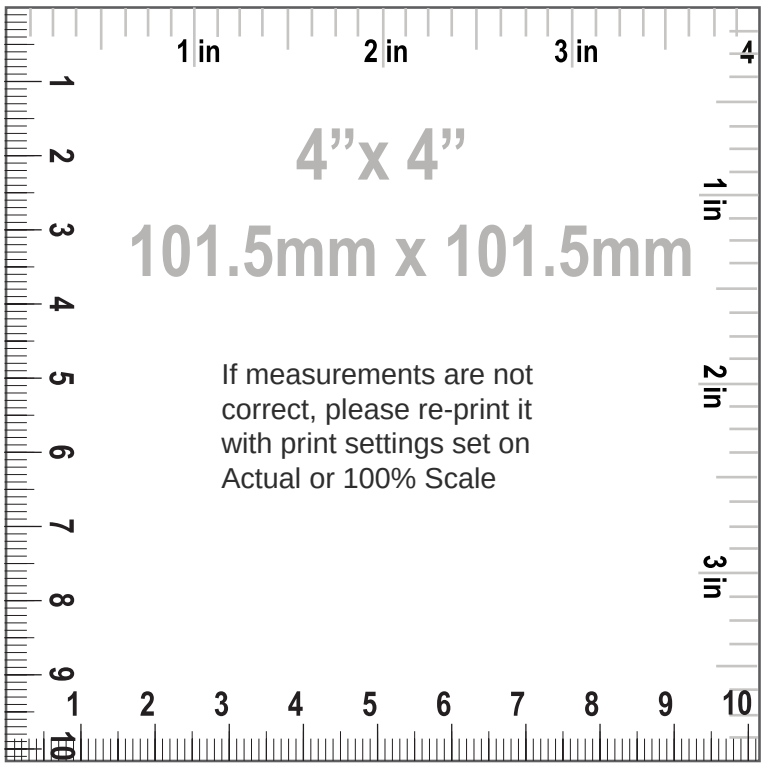

SIZE 18
Seam Allowance: 1 (3/8 in)

Pattern pieces:

1. "FRONT LINING", LINING: Cut 2
2. "CENTER FRONT", MAIN FABRIC, FUSIBLE INTERFACING: Cut 2
3. "SIDE FRONT", MAIN FABRIC, FUSIBLE INTERFACING: Cut 2
4. "CENTER BACK", MAIN FABRIC, FUSIBLE INTERFACING: Cut 2
5. "CENTER BACK LINING", LINING: Cut 1
6. "SIDE BACK", MAIN FABRIC, FUSIBLE INTERFACING: Cut 2
7. "SIDE BACK LINING", LINING: Cut 2
8. "FRONT NECK FACING", MAIN FABRIC, FUSIBLE INTERFACING: Cut 2
9. "BACK NECK FACING", MAIN FABRIC, FUSIBLE INTERFACING: Cut 1
10. "UPPER COLLAR", MAIN FABRIC, FUSIBLE INTERFACING: Cut 1
11. "LOWER COLLAR", MAIN FABRIC, FUSIBLE INTERFACING: Cut 1
12. "BELT", MAIN FABRIC, FUSIBLE INTERFACING: Cut 1
13. "PATCH POCKET", MAIN FABRIC: Cut 2
14. "TWO BELT LOOPS", MAIN FABRIC: Cut 1
15. "UPPER SLEEVE", MAIN FABRIC: Cut 2
16. "LOWER SLEEVE", MAIN FABRIC: Cut 2
17. "UPPER SLEEVE LINING", LINING: Cut 2
18. "LOWER SLEEVE LINING", LINING: Cut 2


Pattern Specs (Circumferences are divided by 2):


1. Hem max 4.60 none (1 3/4 in)
2. Seam allowance max 2.00 none (3/4 in)
3. Seam allowance p max 1.50 none (5/8 in)
4. Stretch factor 1.00 none (3/8 in)
5. Shoulder pads thickness 1.00 none (3/8 in)
6. Pocket entry length 13.14 cm (5 1/8 in)
7. Waist to pocket length 10.14 cm (4 in)
8. Side seam pocket position 9.56 cm (3 3/4 in)
9. Button diameter 1.50 cm (5/8 in)
10. Front buttons quantity 12.00 pc
11. Front length from HPS to hem 93.72 cm (36 7/8 in)
12. Across chest 64.77 cm (25 1/2 in)
13. Center front length to hem 83.43 cm (32 7/8 in)

14. Center back length to hem 88.68 cm (34 7/8 in)
15. Across front 45.82 cm (18 in)
16. Across back 43.34 cm (17 1/8 in)
17. Across shoulders 42.65 cm (16 3/4 in)
18. Side seam 61.18 cm (24 1/8 in)
19. Waist 57.09 cm (22 1/2 in)
20. Low hips 68.97 cm (27 1/8 in)
21. Blazer hemline sweep 73.89 cm (29 1/8 in)
22. Armhole length 62.41 cm (24 5/8 in)
23. Neck opening 19.35 cm (7 5/8 in)
24. Front neck drop 20.58 cm (8 1/8 in)
25. Back neck drop 3.86 cm (1 1/2 in)
26. Shoulder width 13.37 cm (5 1/4 in)
27. Apex to apex 23.85 cm (9 3/8 in)
28. Seam allowance poc max 3.00 none (1 1/8 in)
29. Hem poc max 6.00 none (2 3/8 in)
30. Pocket height 14.45 cm (5 3/4 in)
31. Stretch factor horizontal 1.00 none (3/8 in)
32. Stretch factor vertical 1.00 none (3/8 in)
33. Sleeve length 59.33 none (23 3/8 in)
34. Sleeve cap length 64.44 none (25 3/8 in)
35. Armhole length 62.41 none (24 5/8 in)
36. Sleeve upper arm width 43.53 none (17 1/8 in)
37. Sleeve opening 28.19 none (11 1/8 in)

cozysewpatterns

Paper Size: A4;
Print Actual Size (100% Scale);

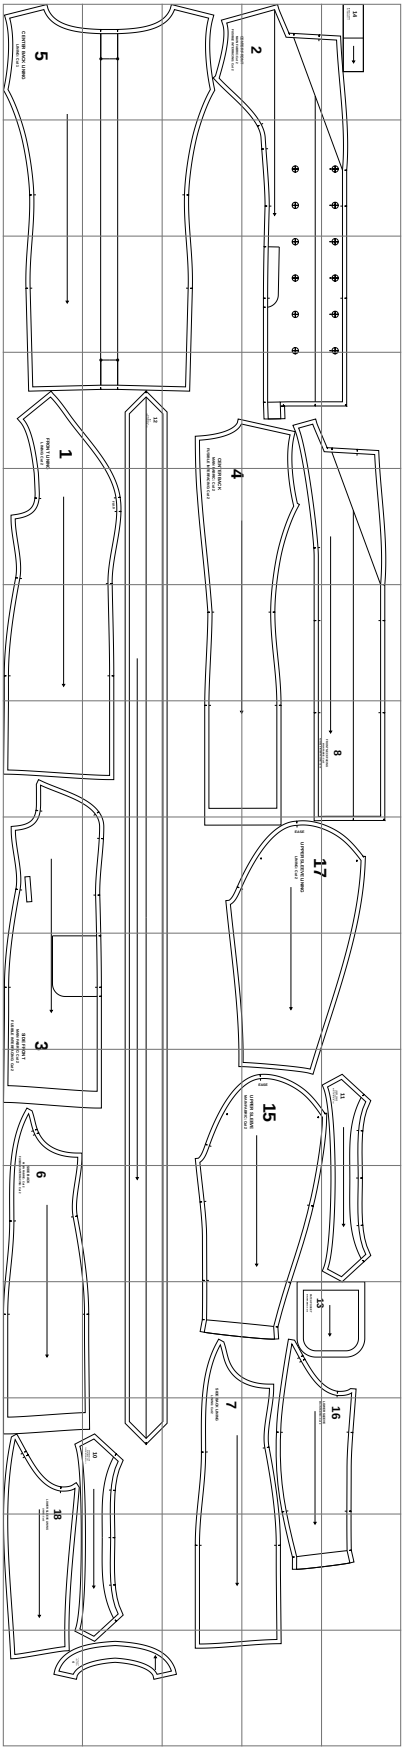


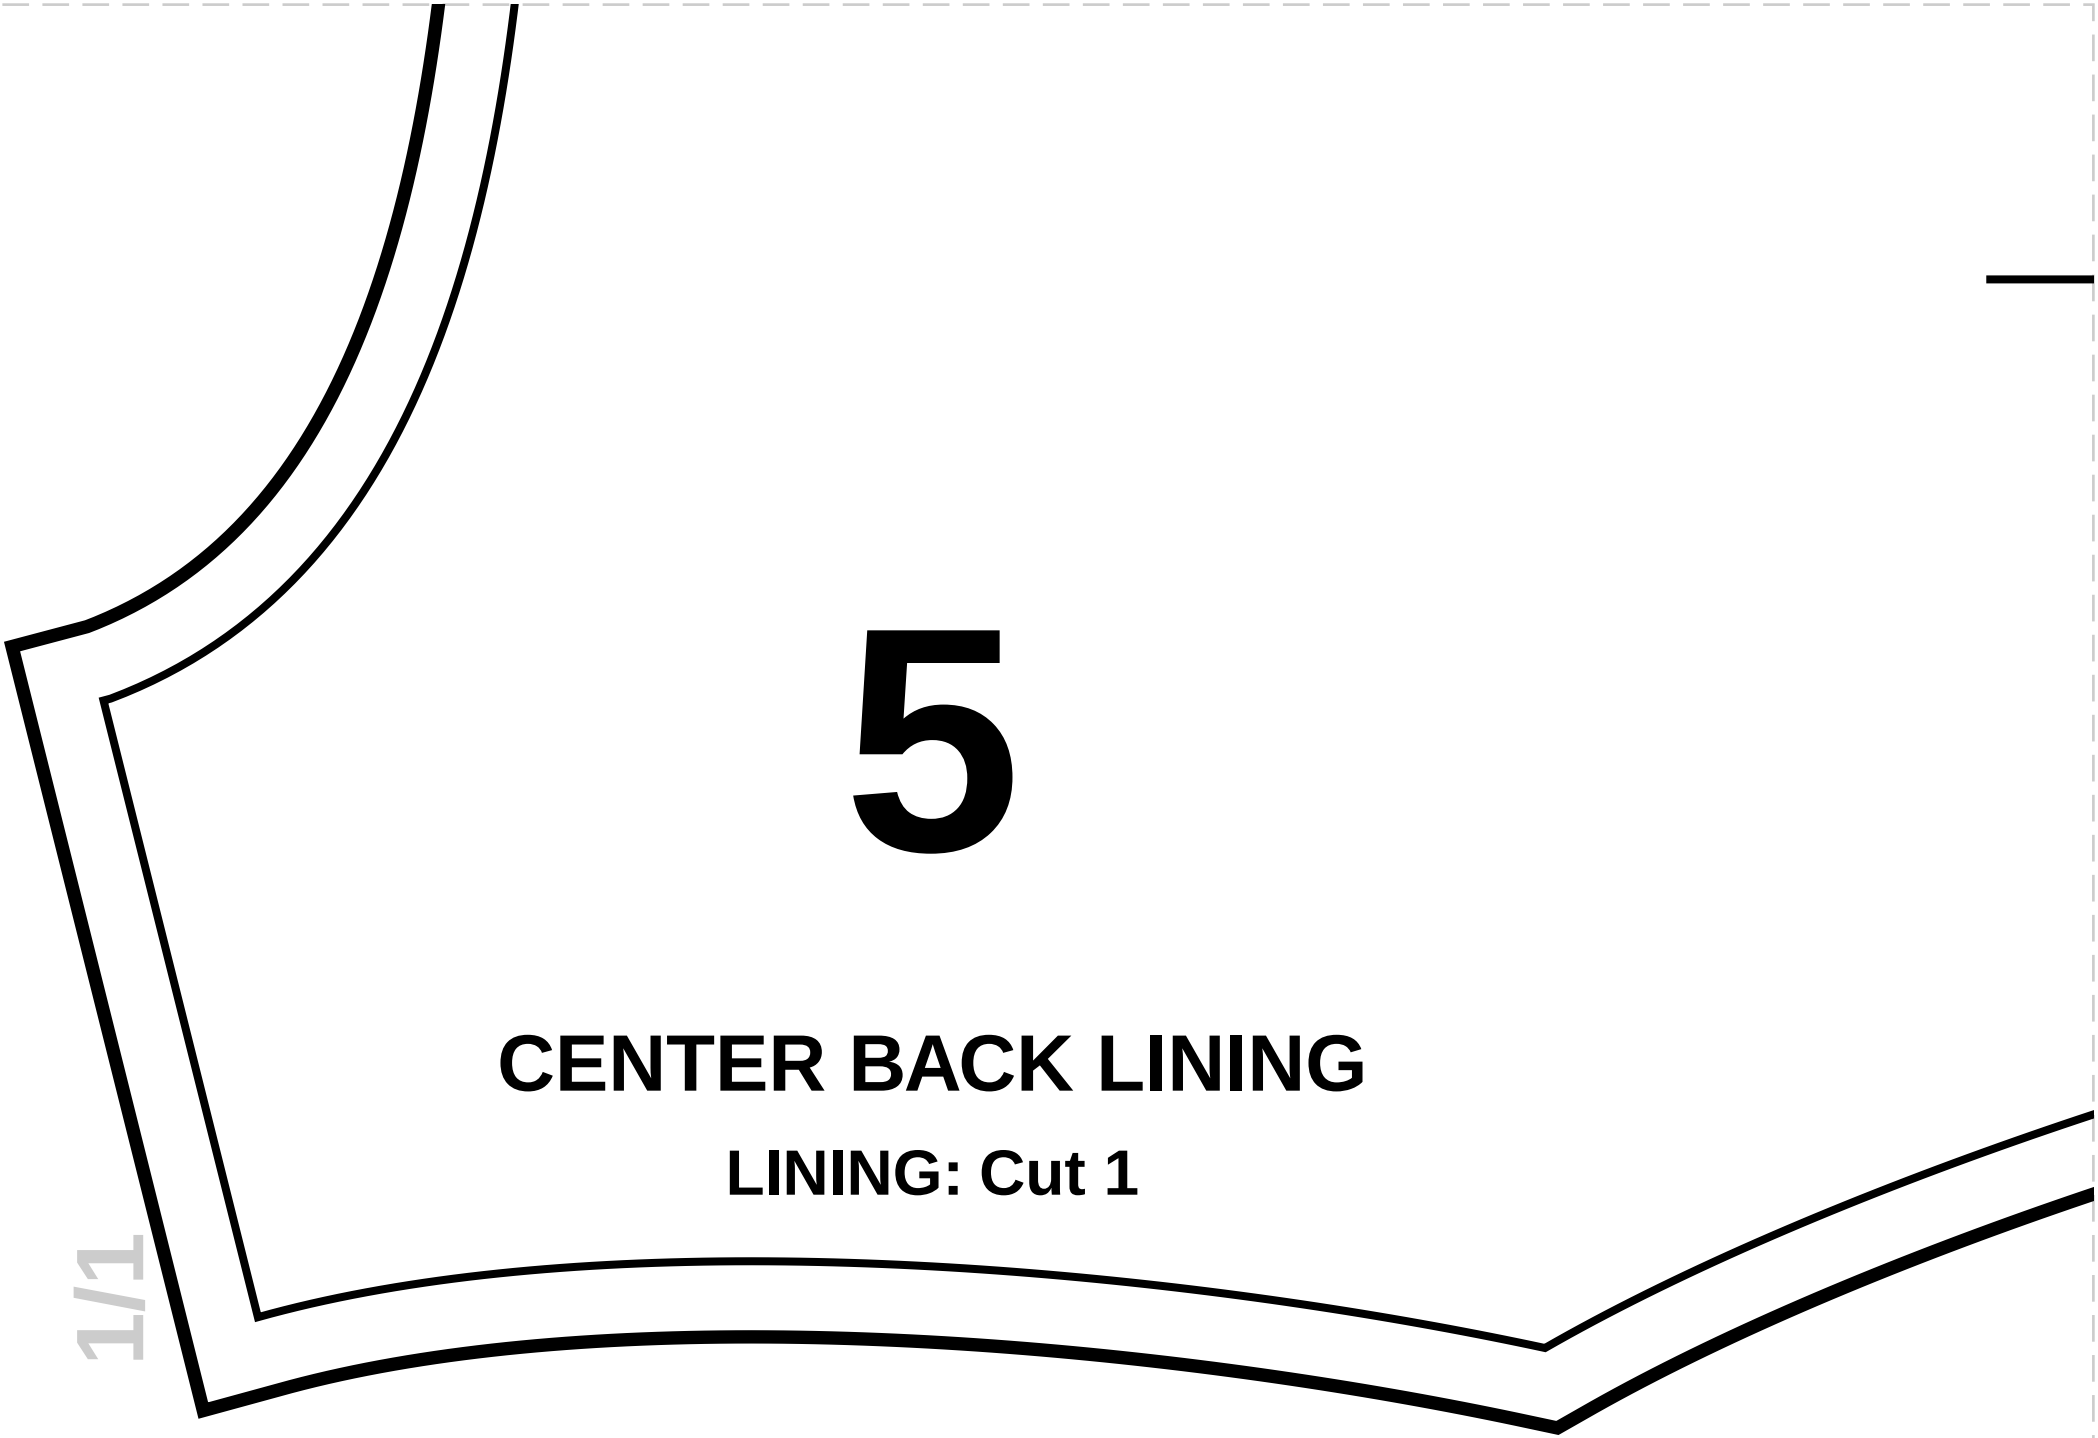

5

CENTER BACK LINING


LINING: Cut 1

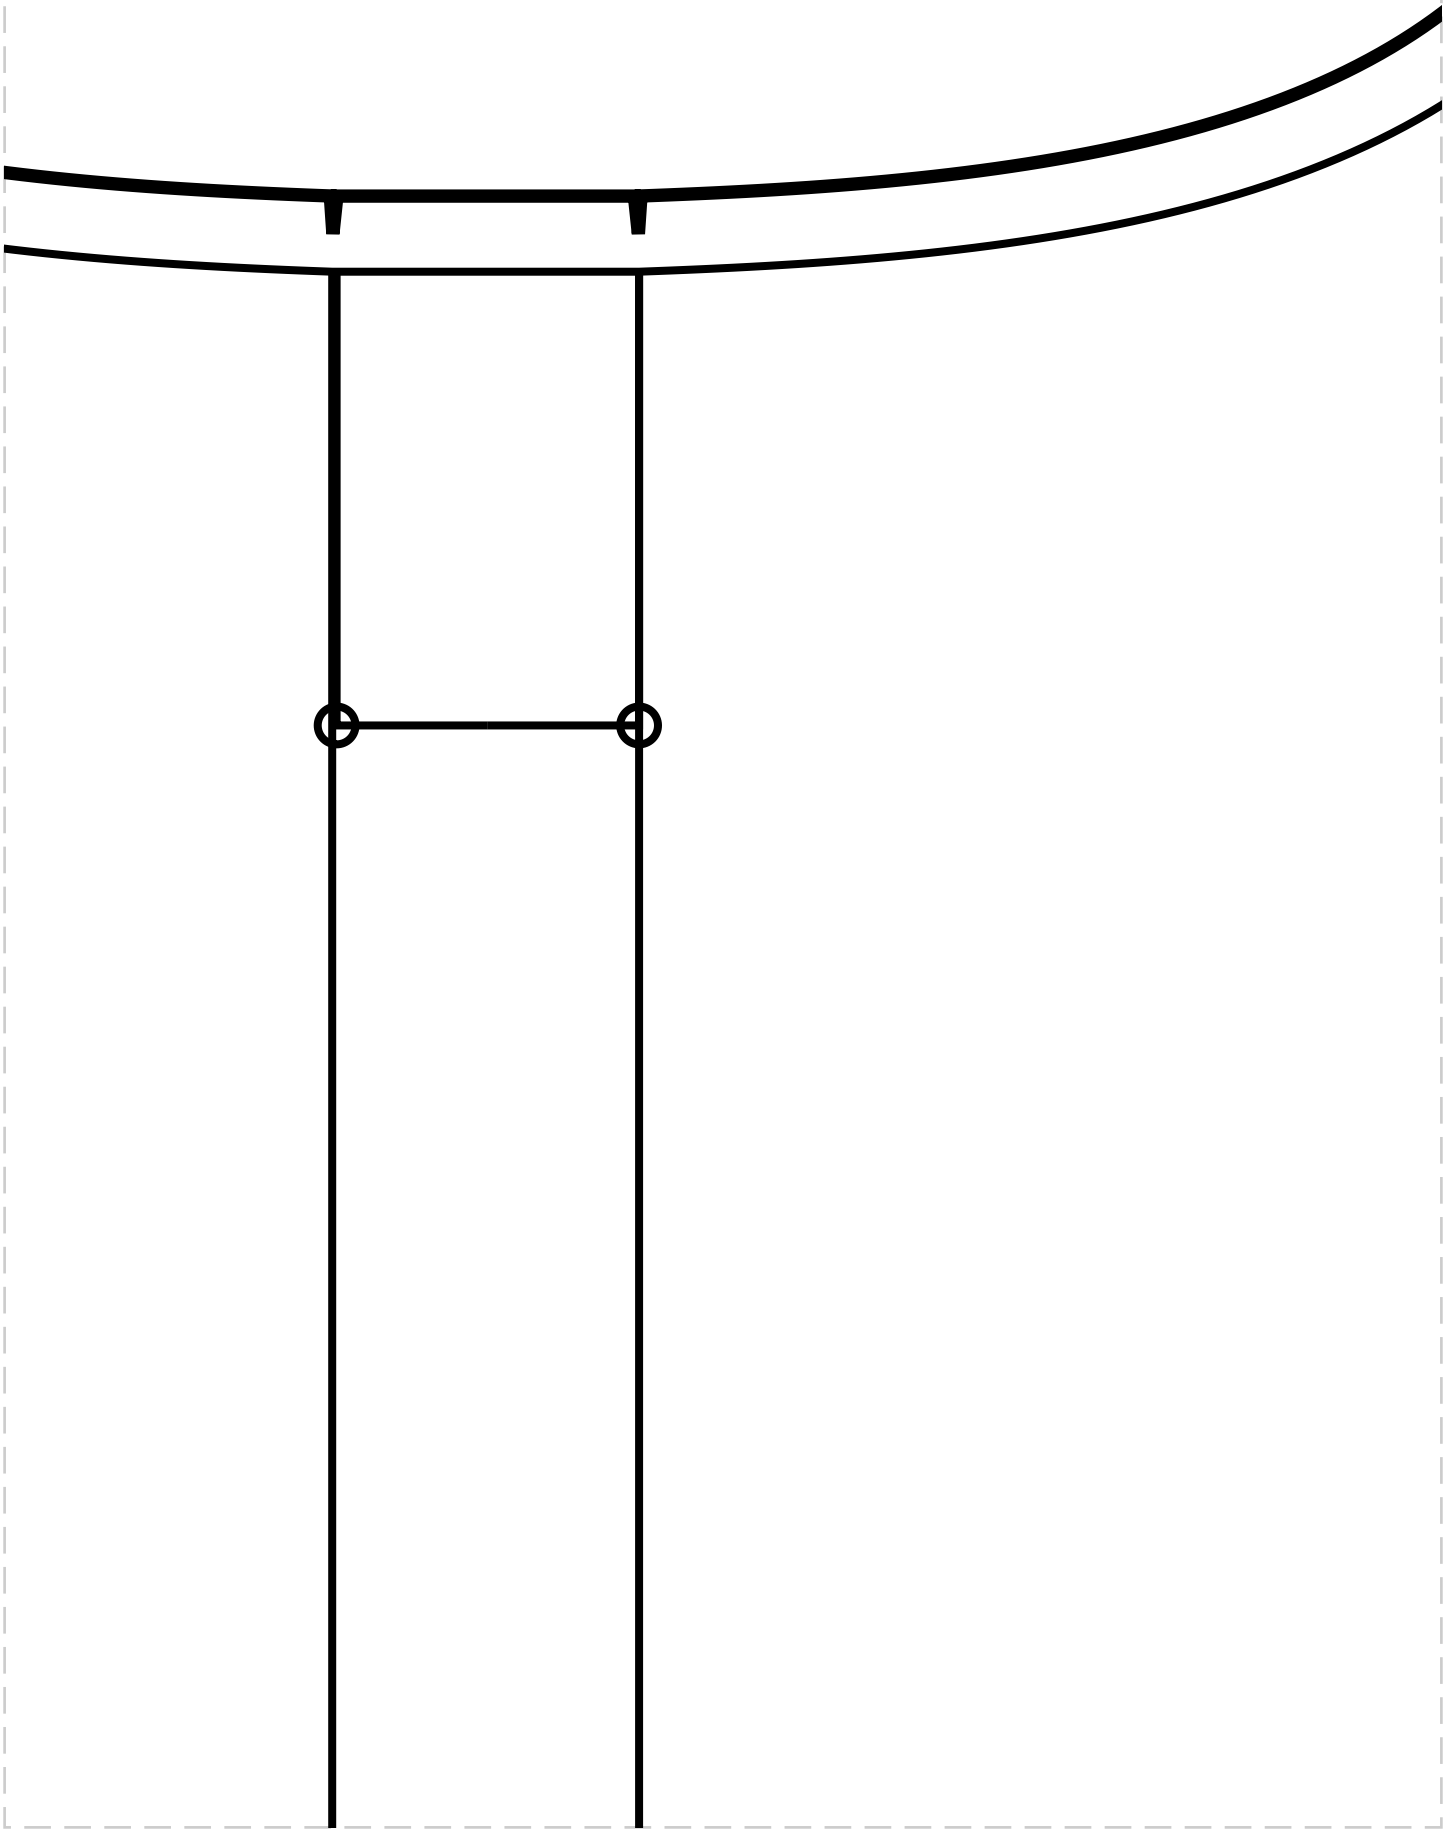

CENTER FRONT


MAIN FABRIC: Cut 2


FUSIBLE INTERFACING: Cut 2

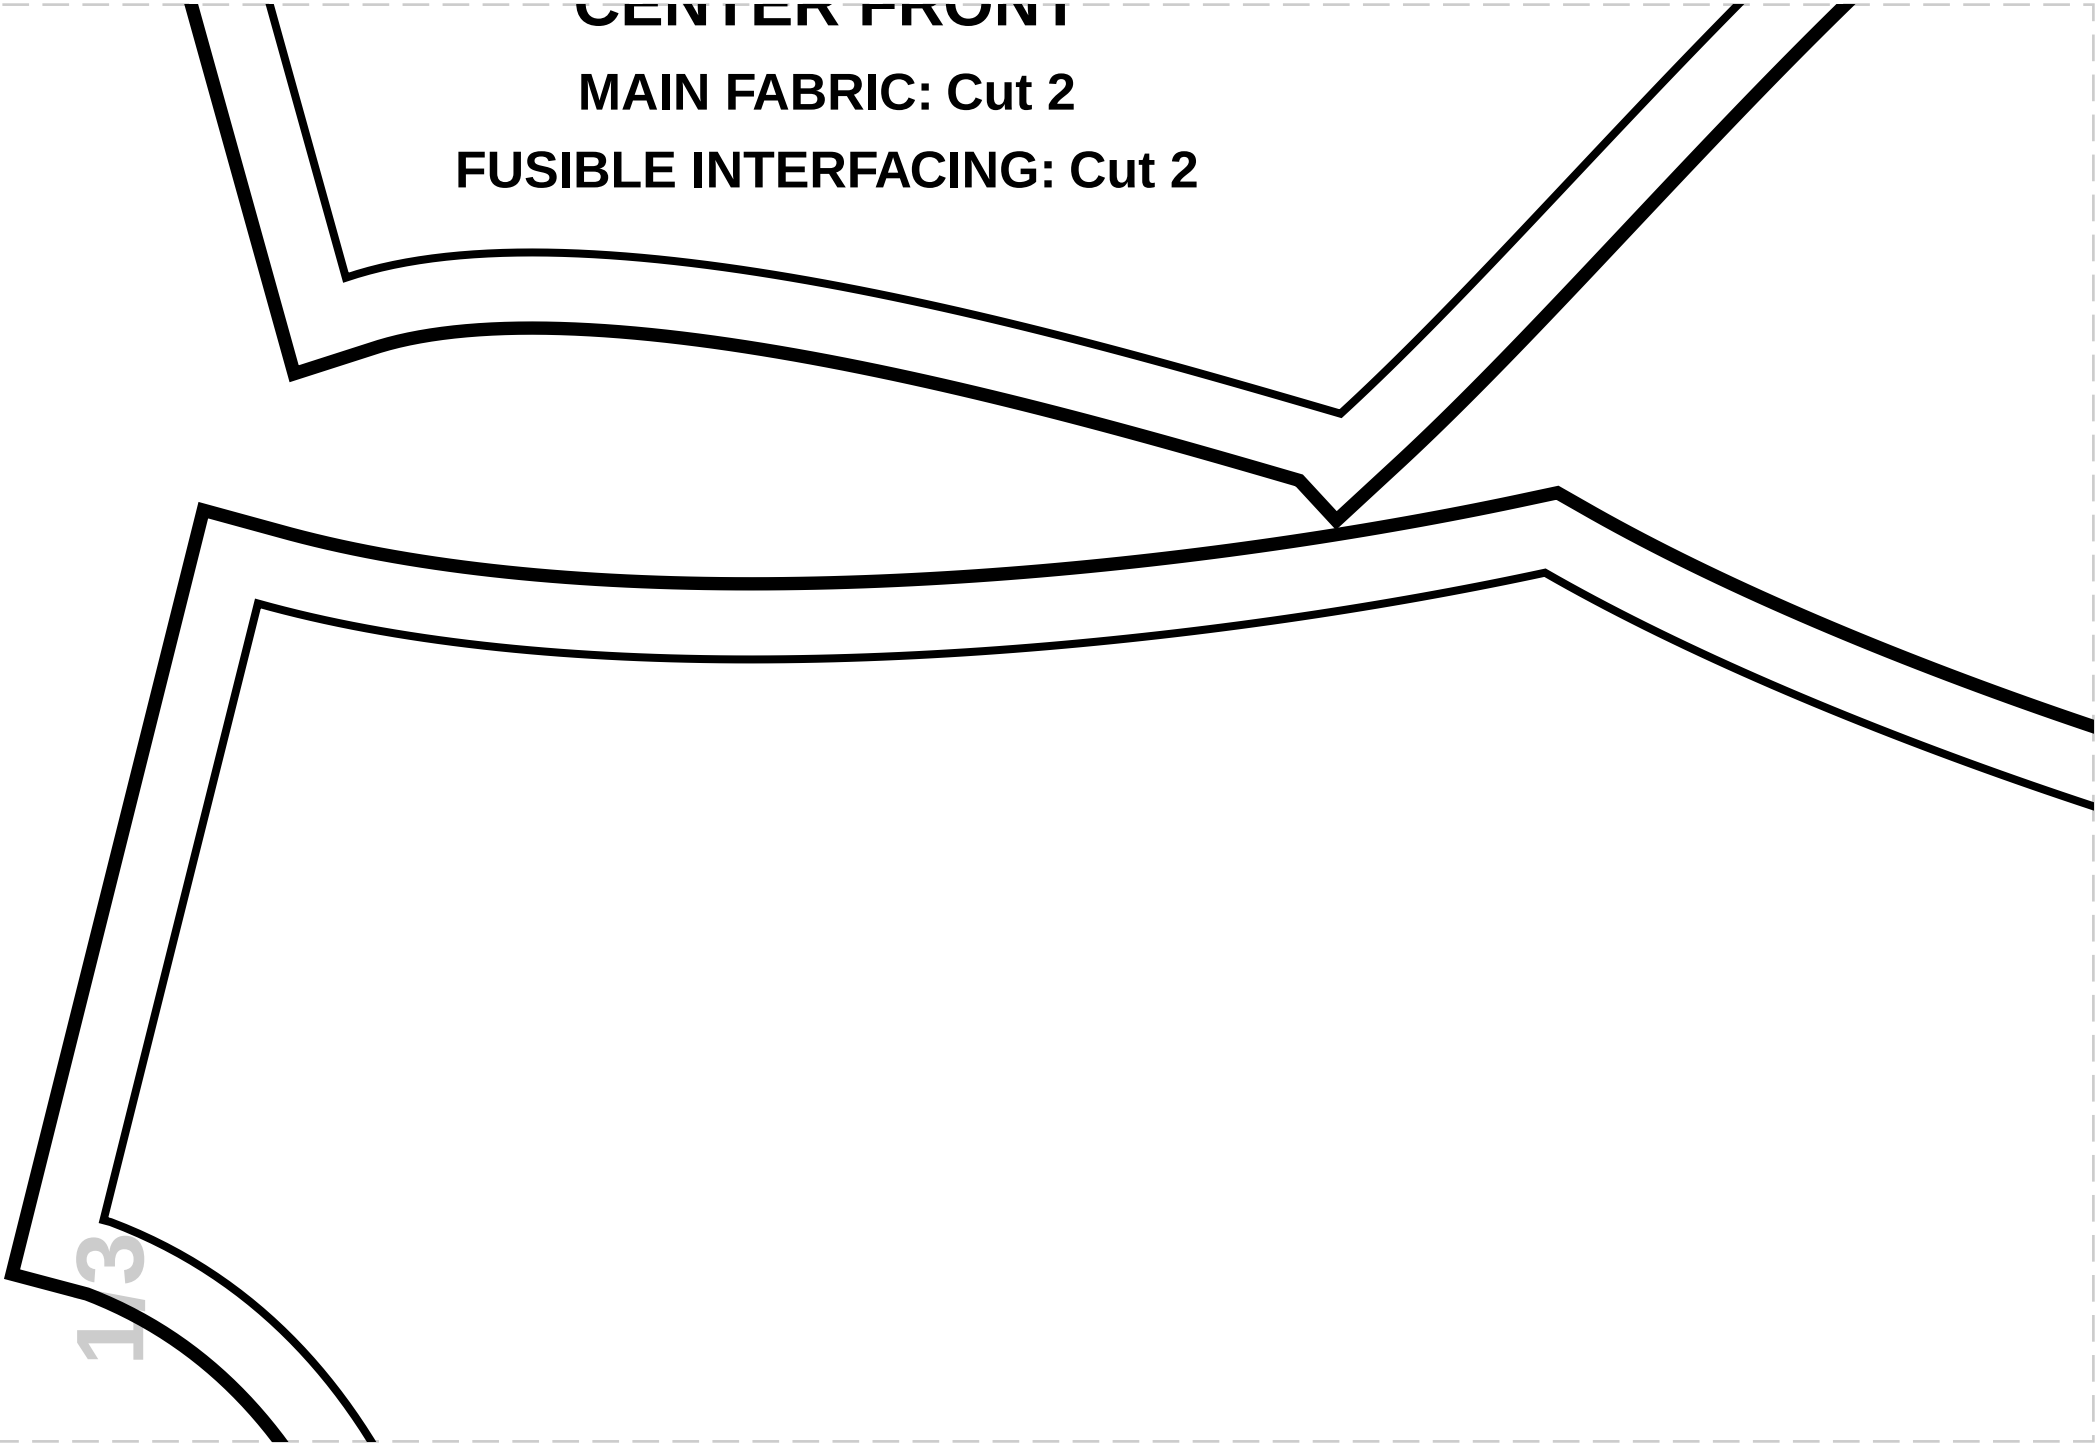



CENTER FRONT


2

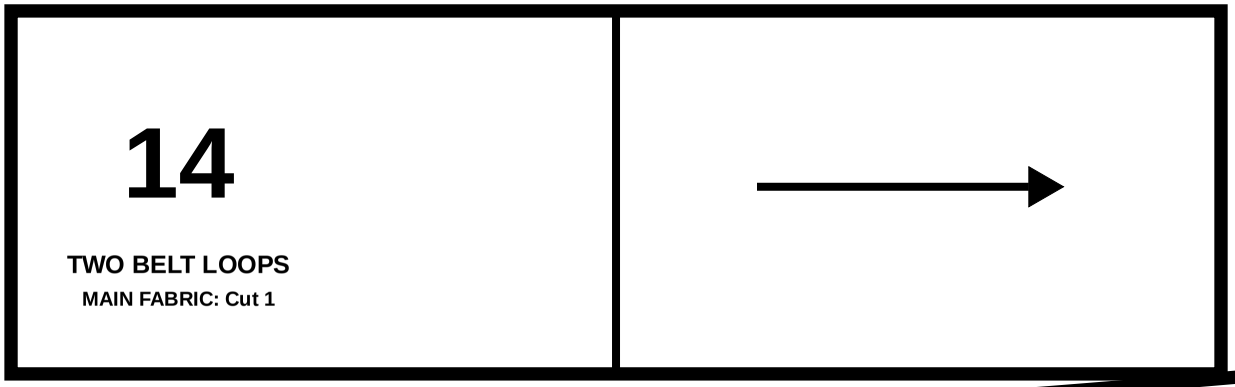
14
TWO BELT LOOPS
MAIN FABRIC: Cut 1

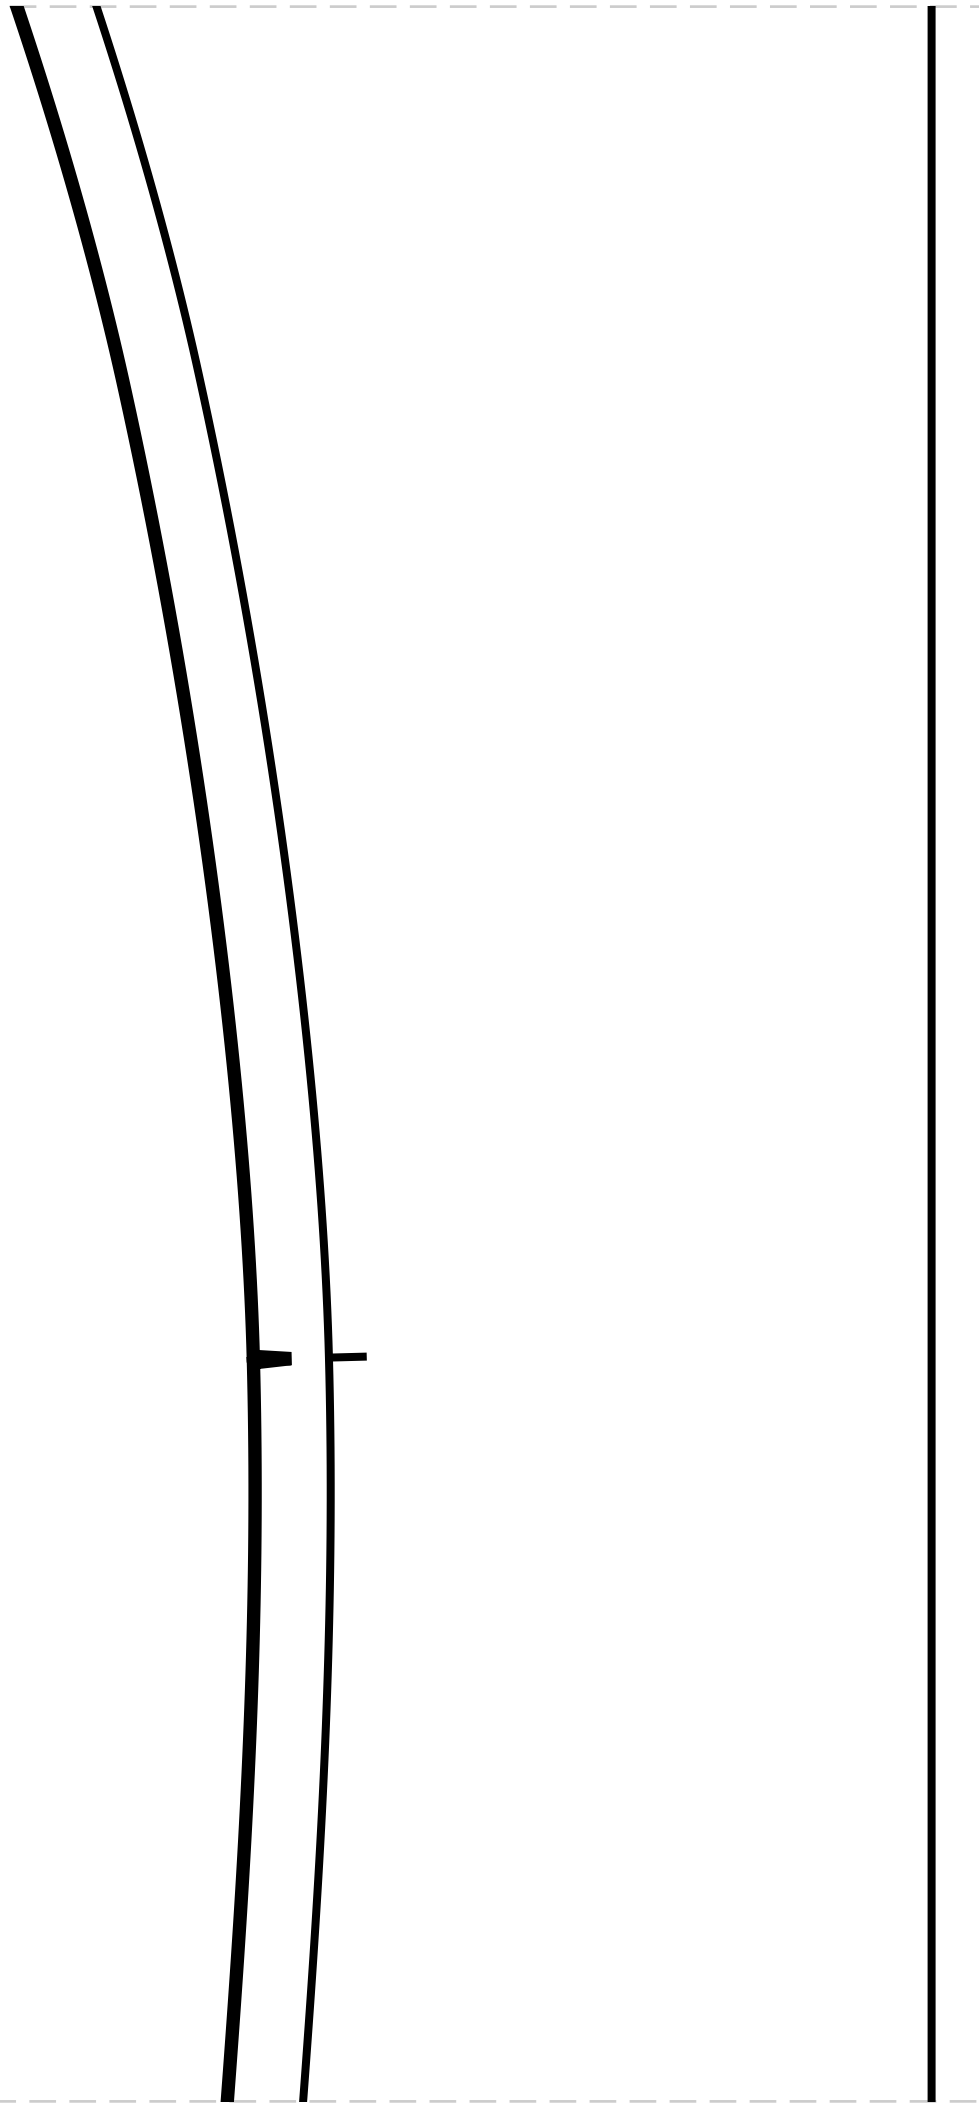


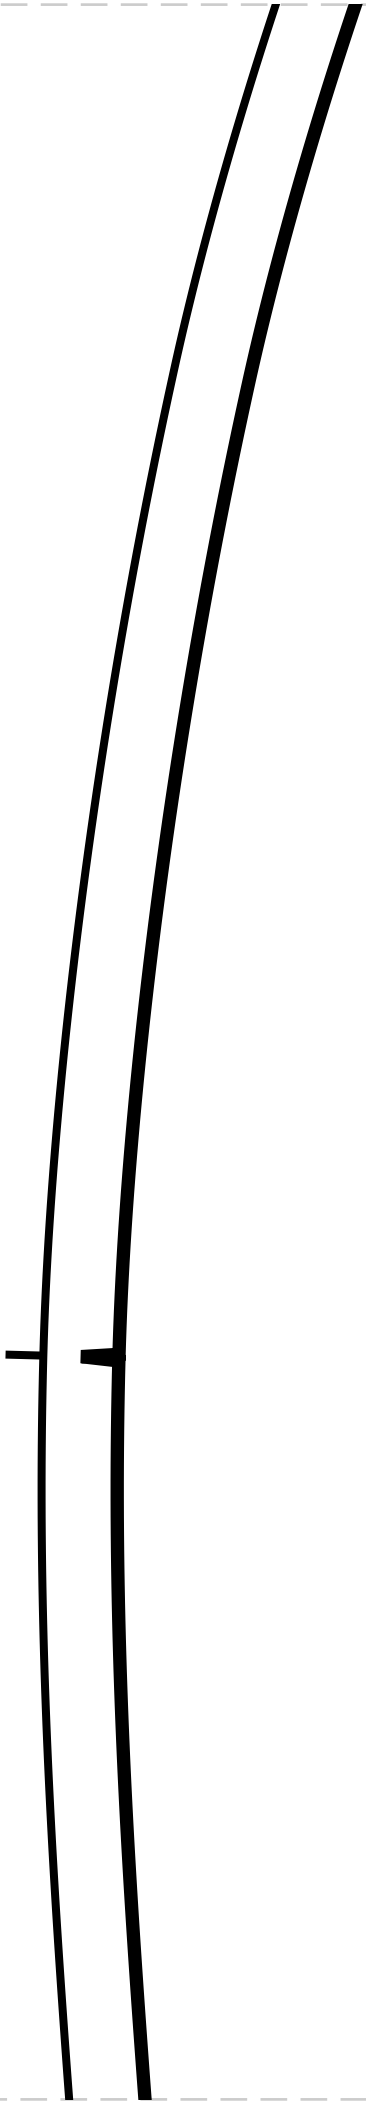

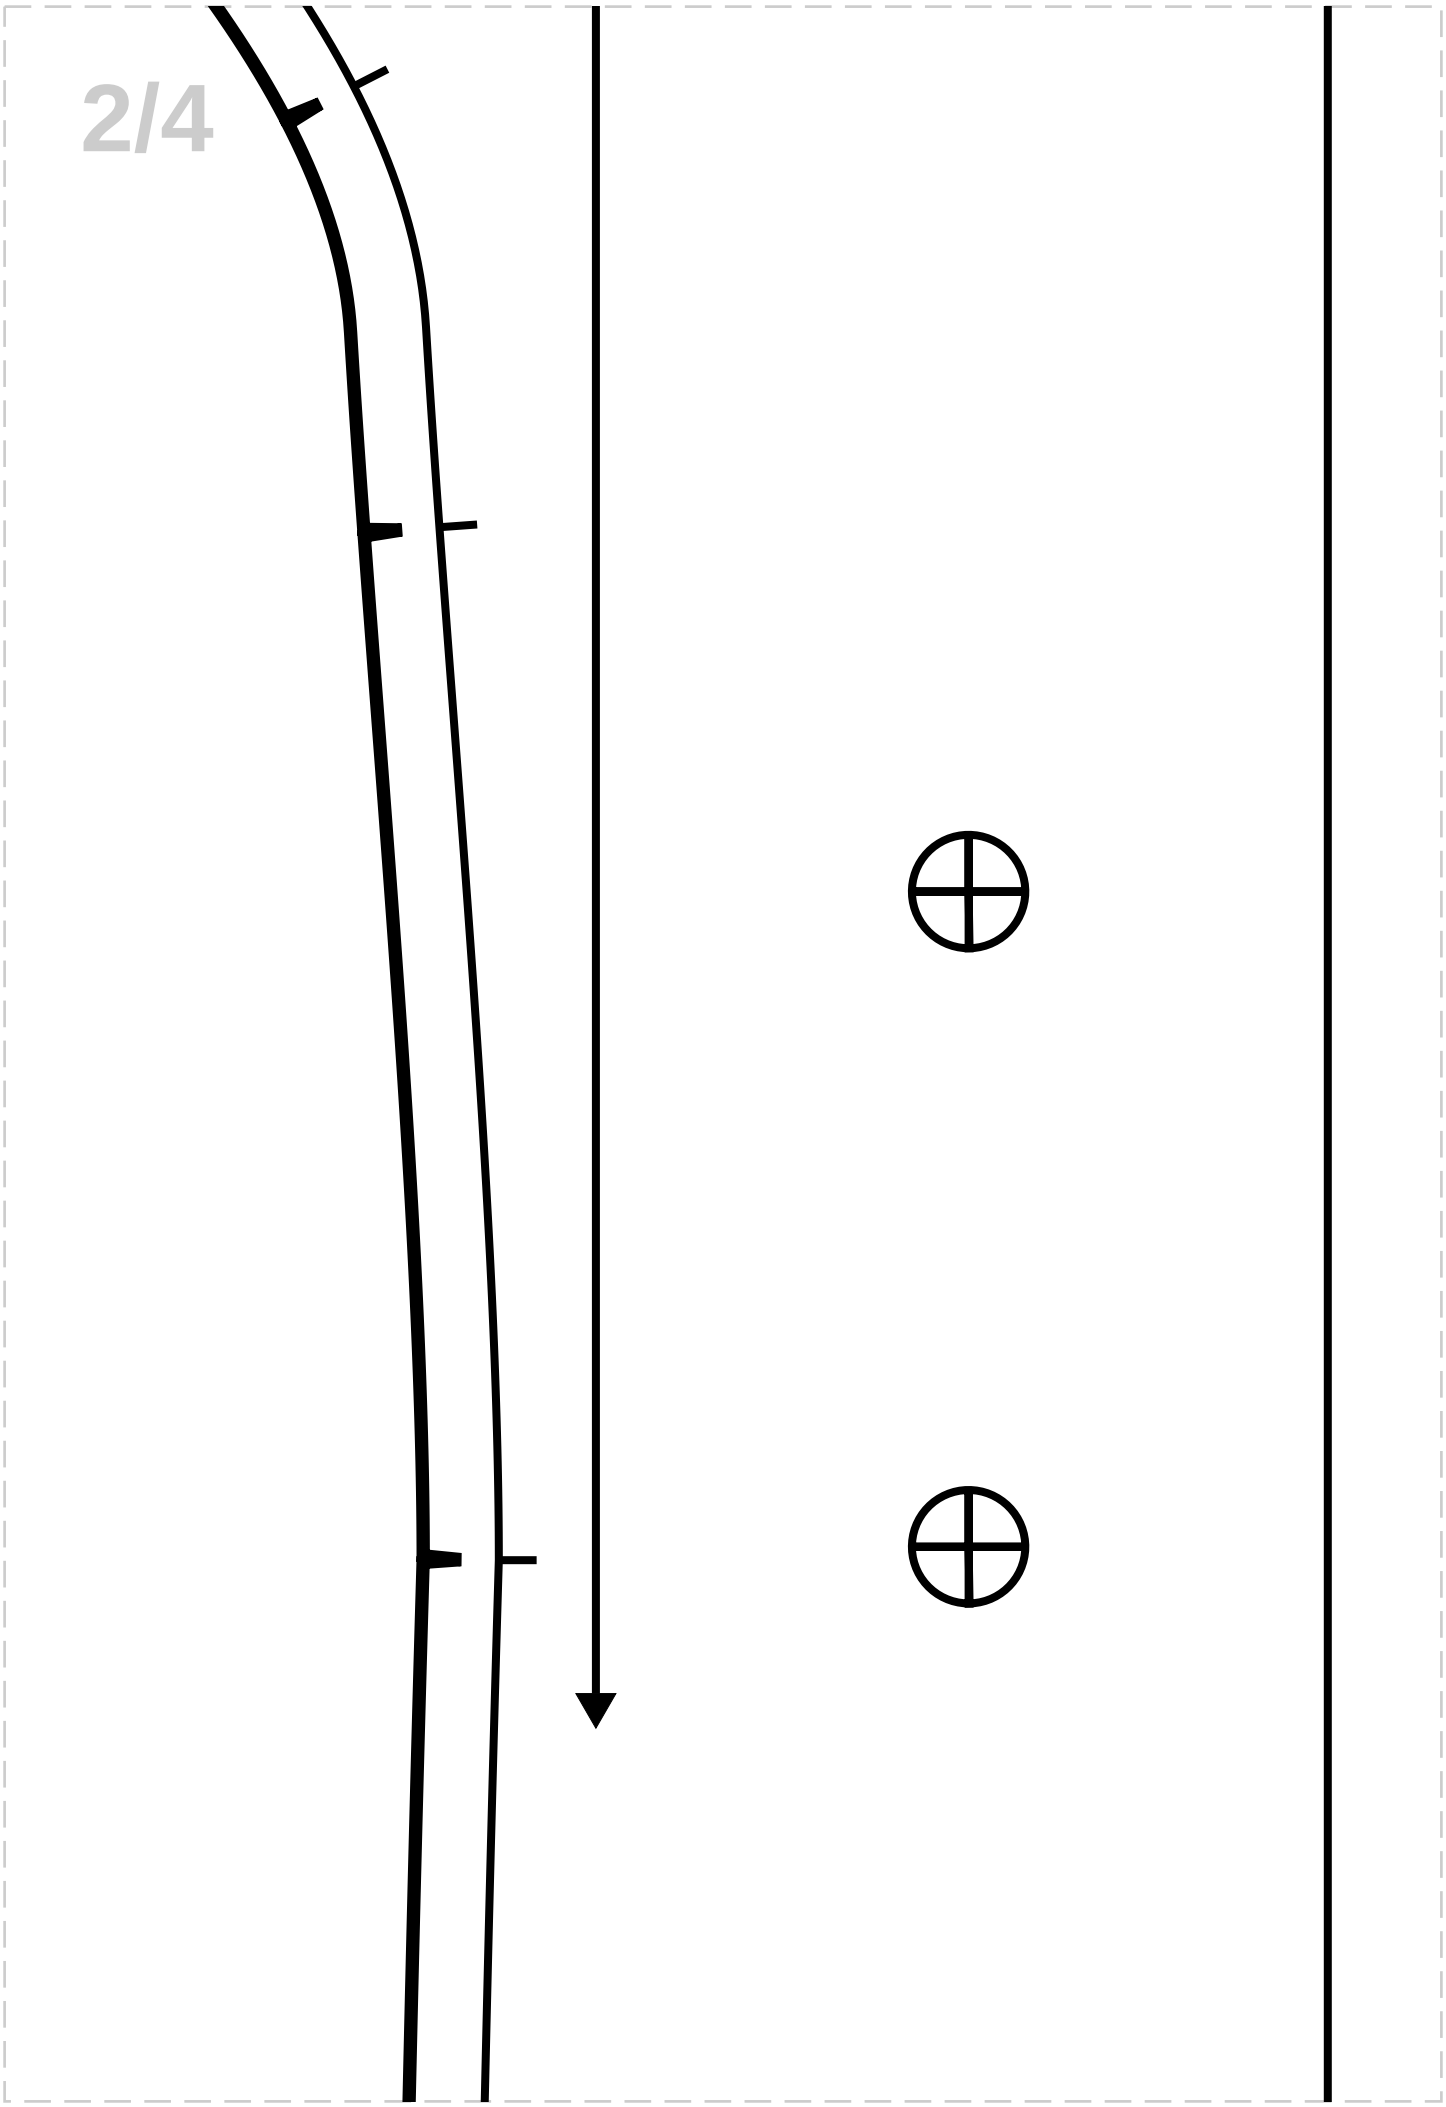


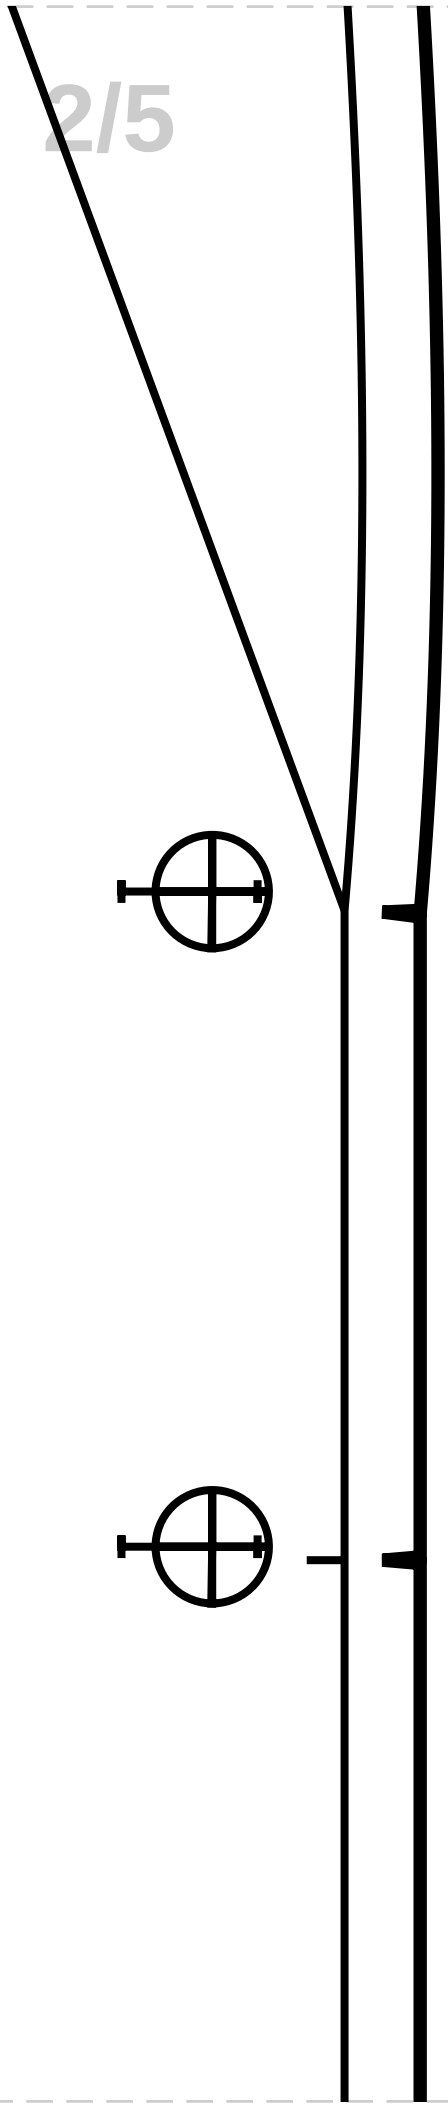



3/1

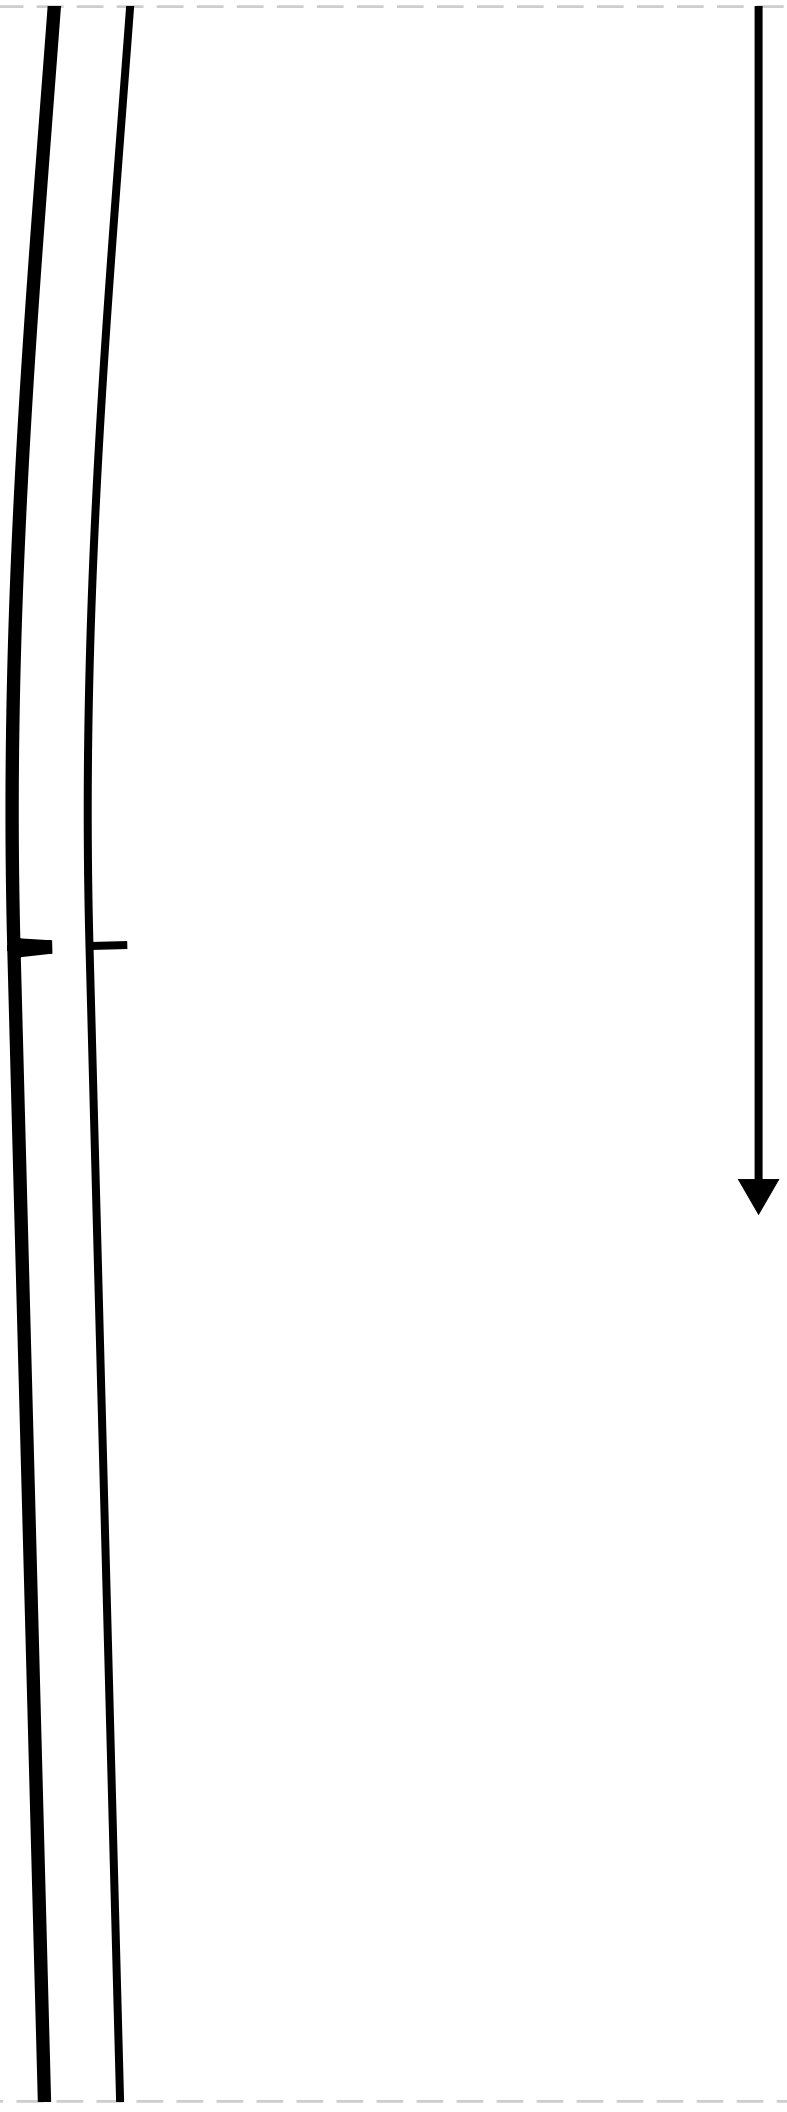


3/2

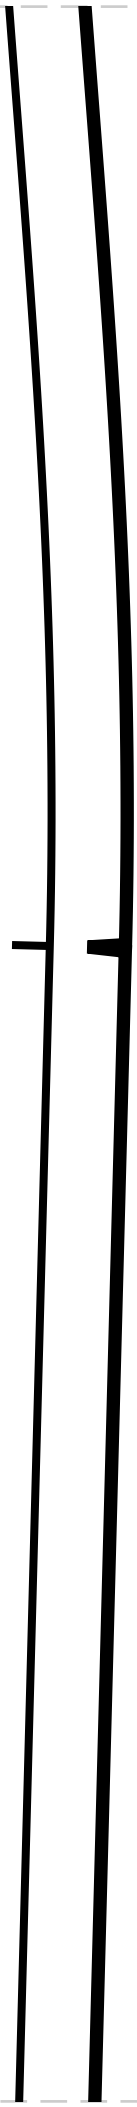

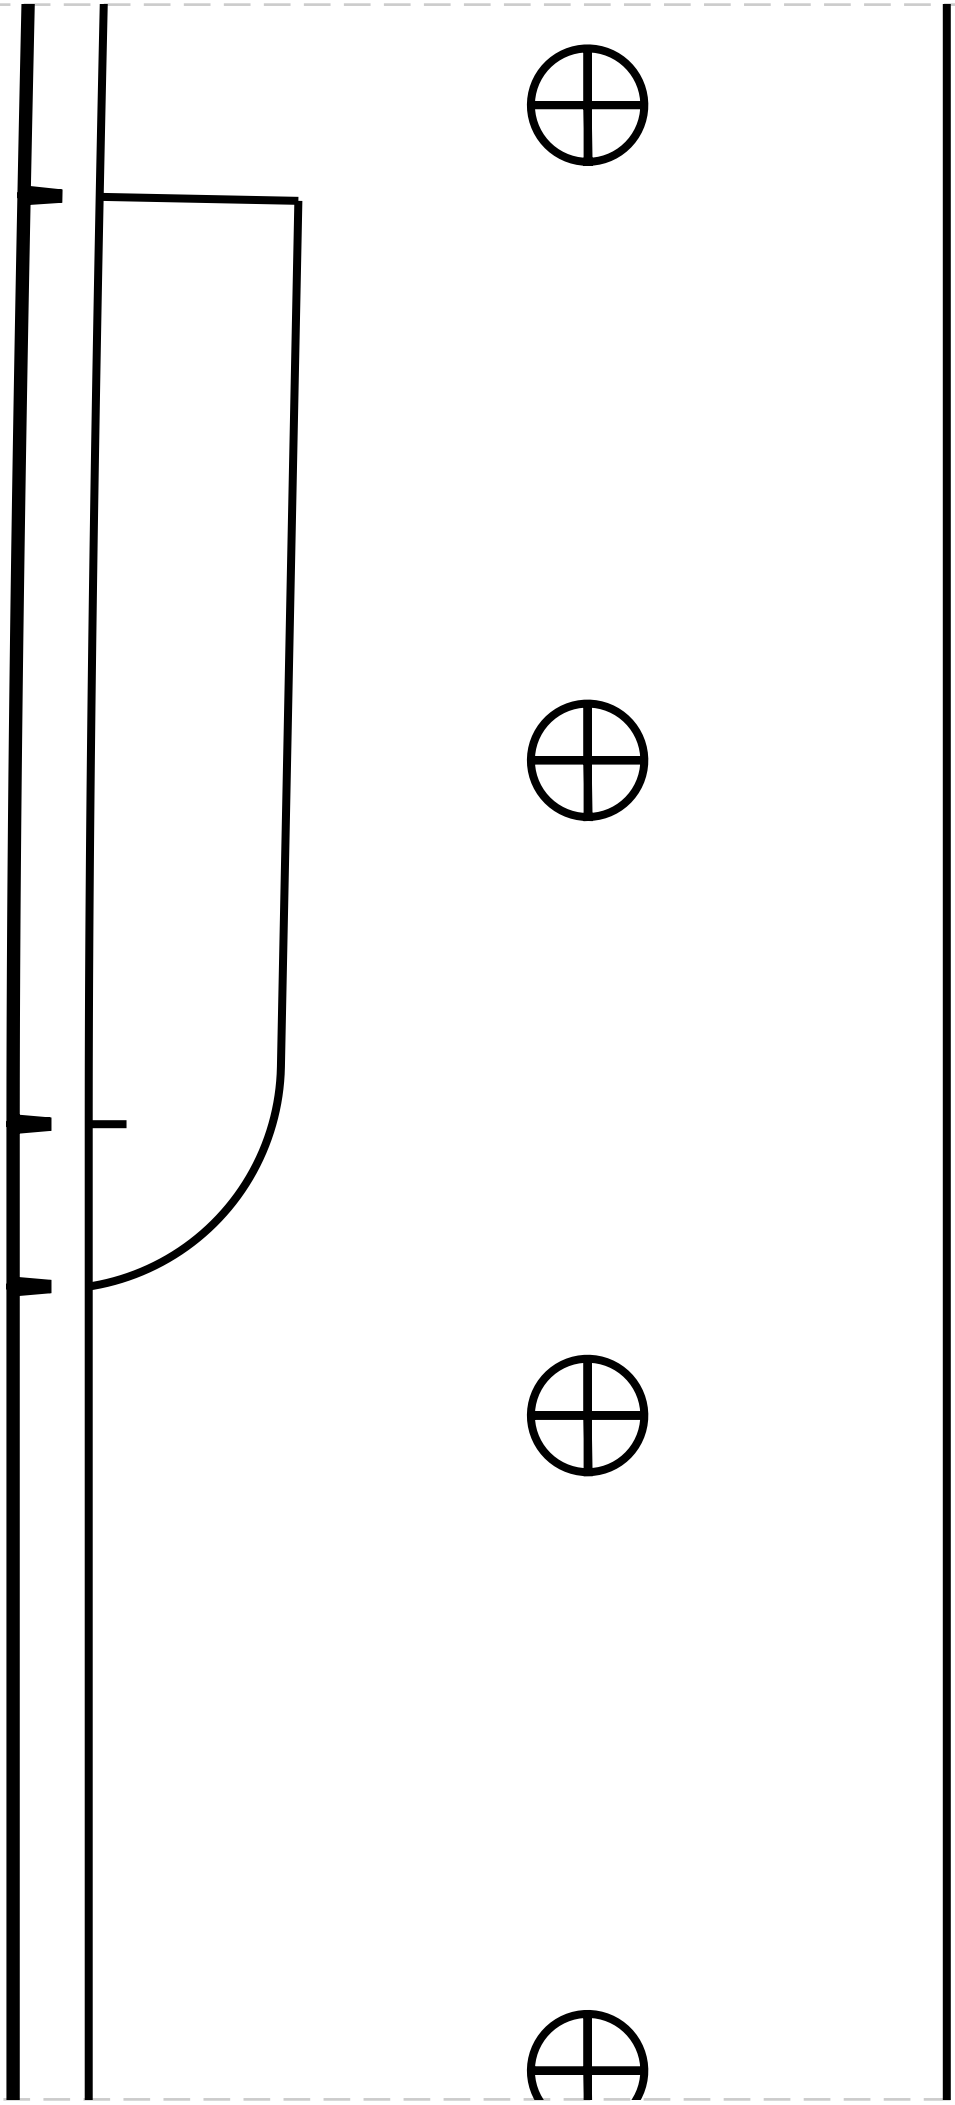

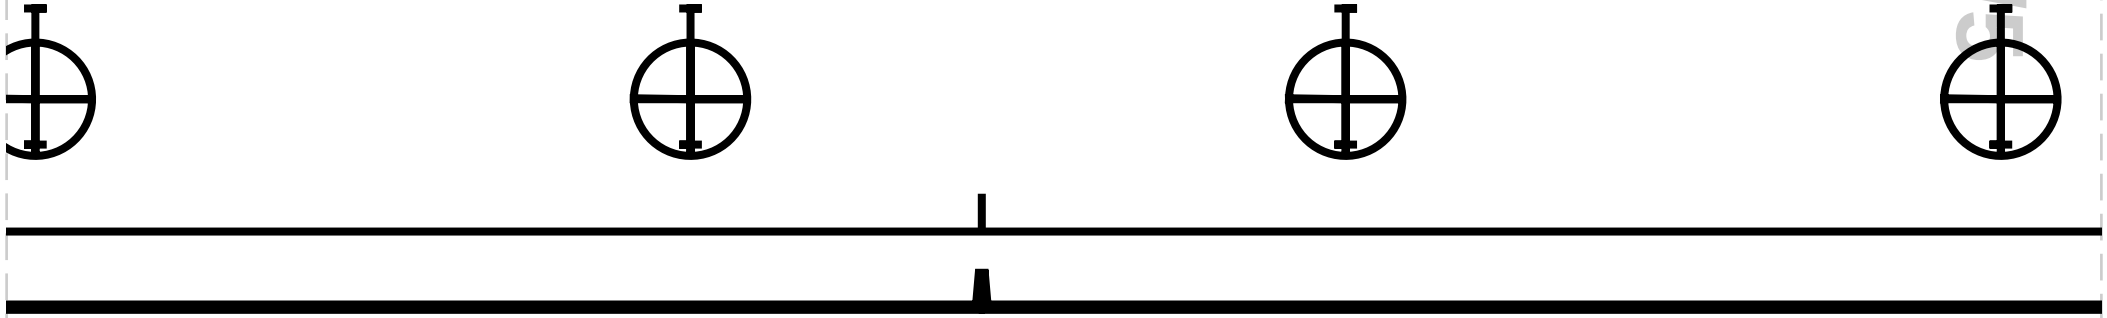


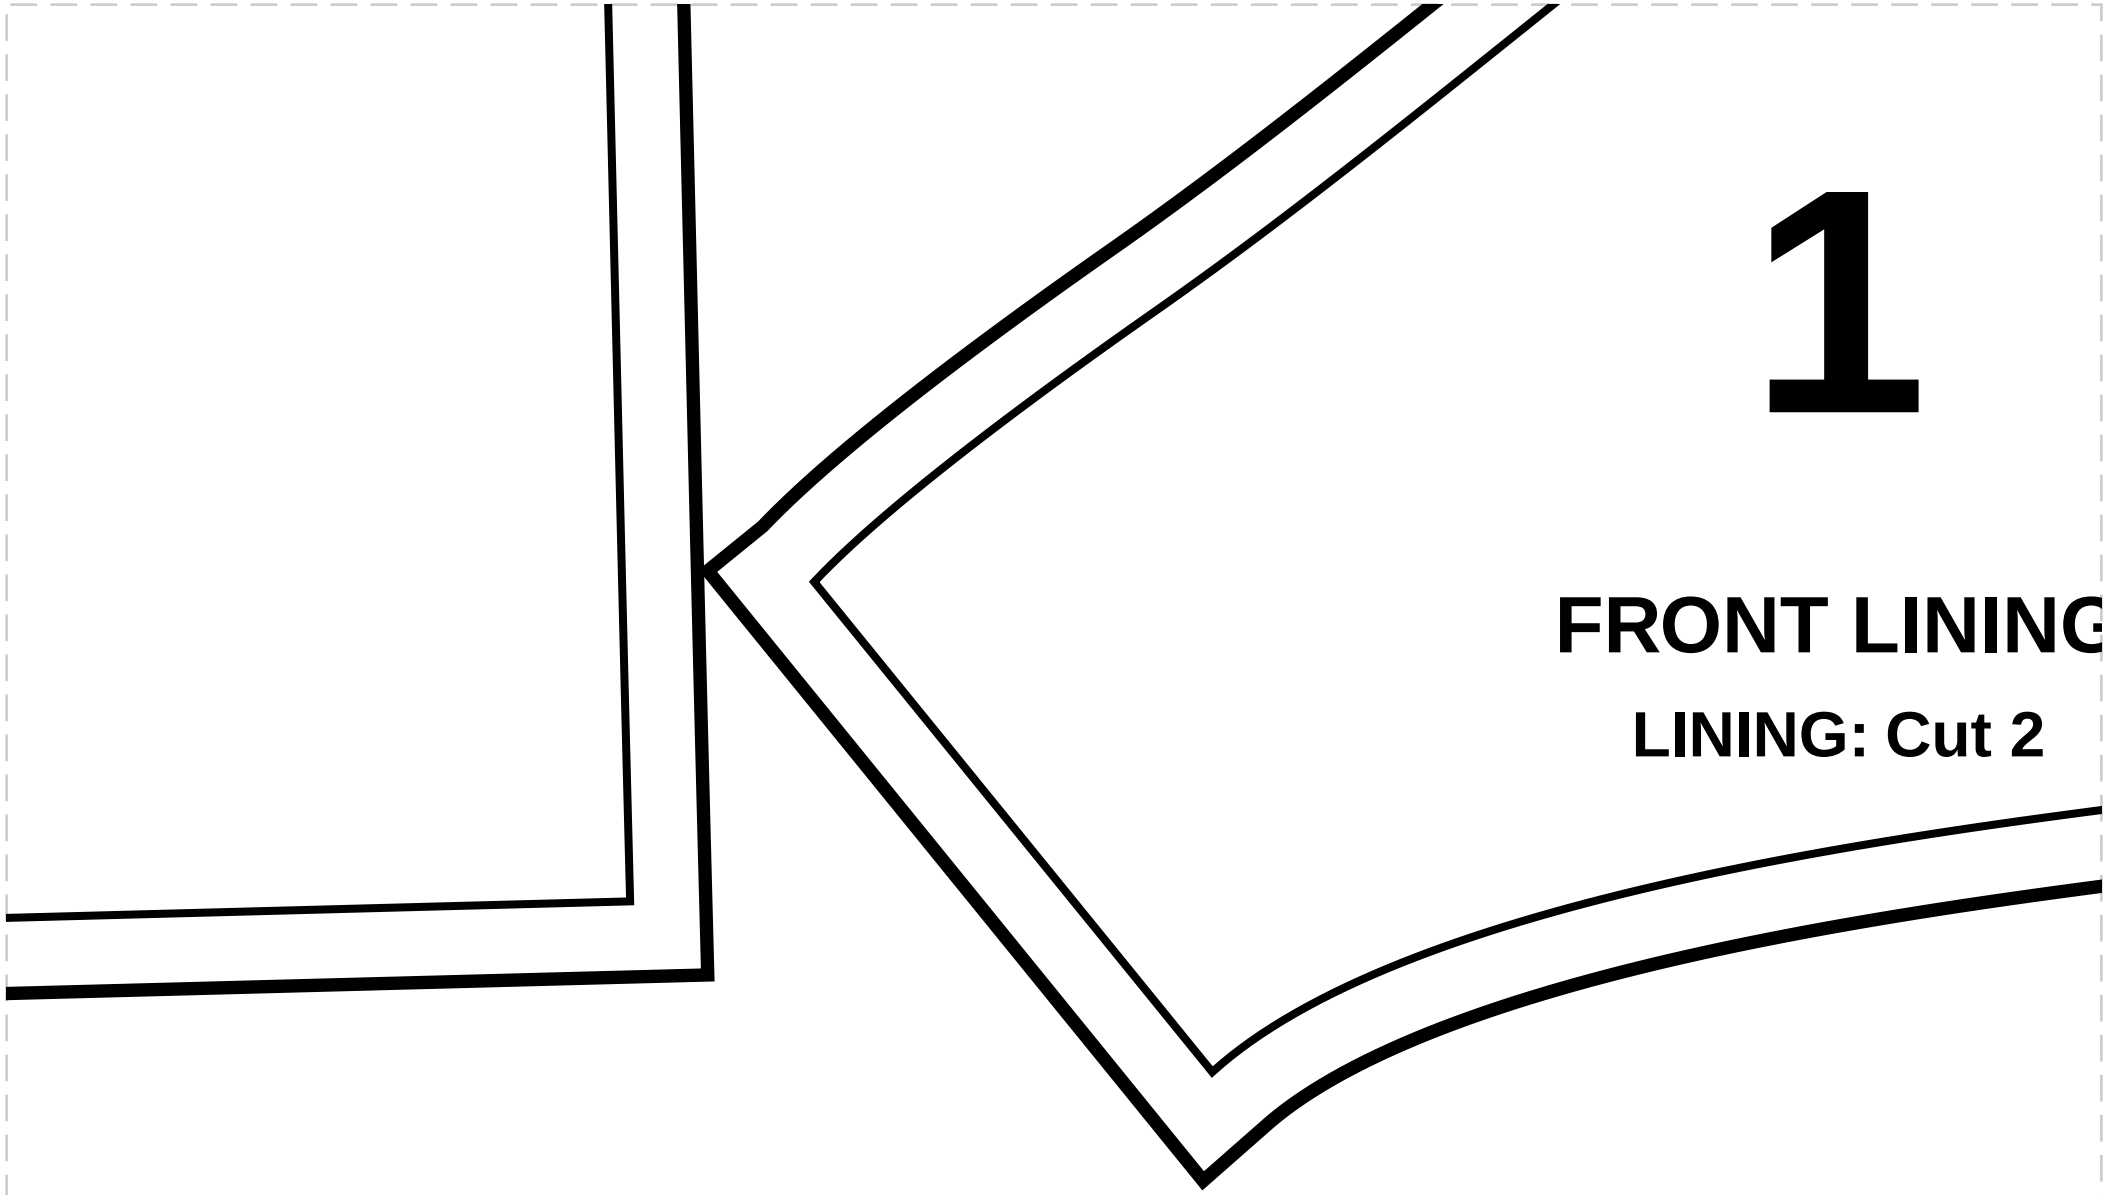



1


FRONT LINING


LINING: Cut 2

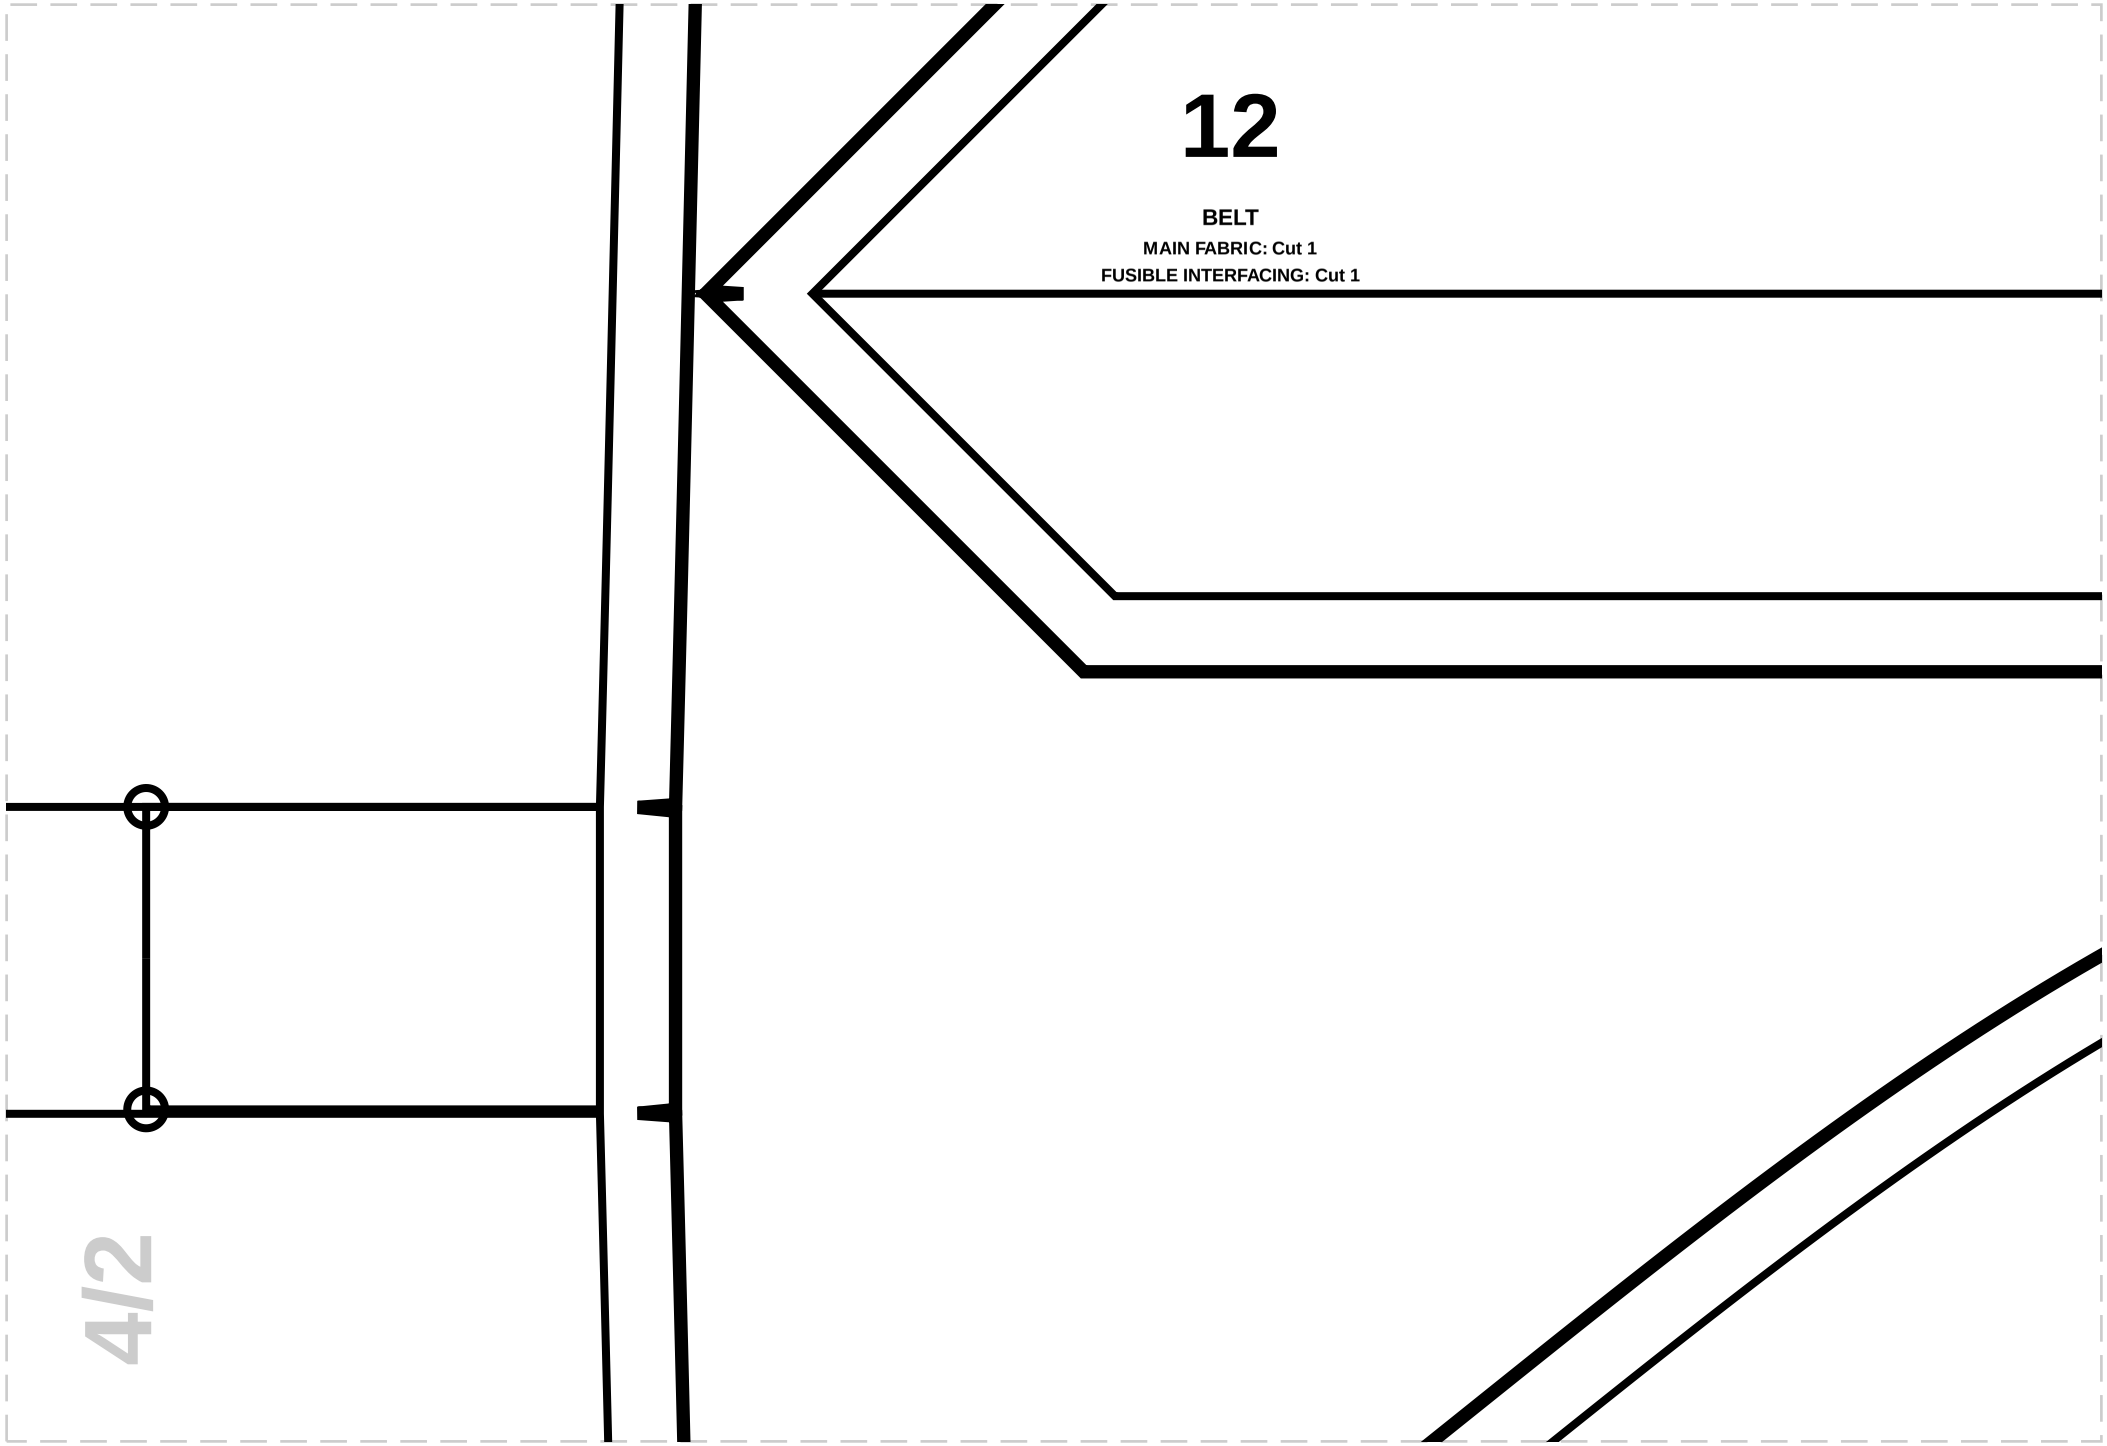
12
BELT
MAIN FABRIC: Cut 1
FUSIBLE INTERFACING: Cut 1
4/2

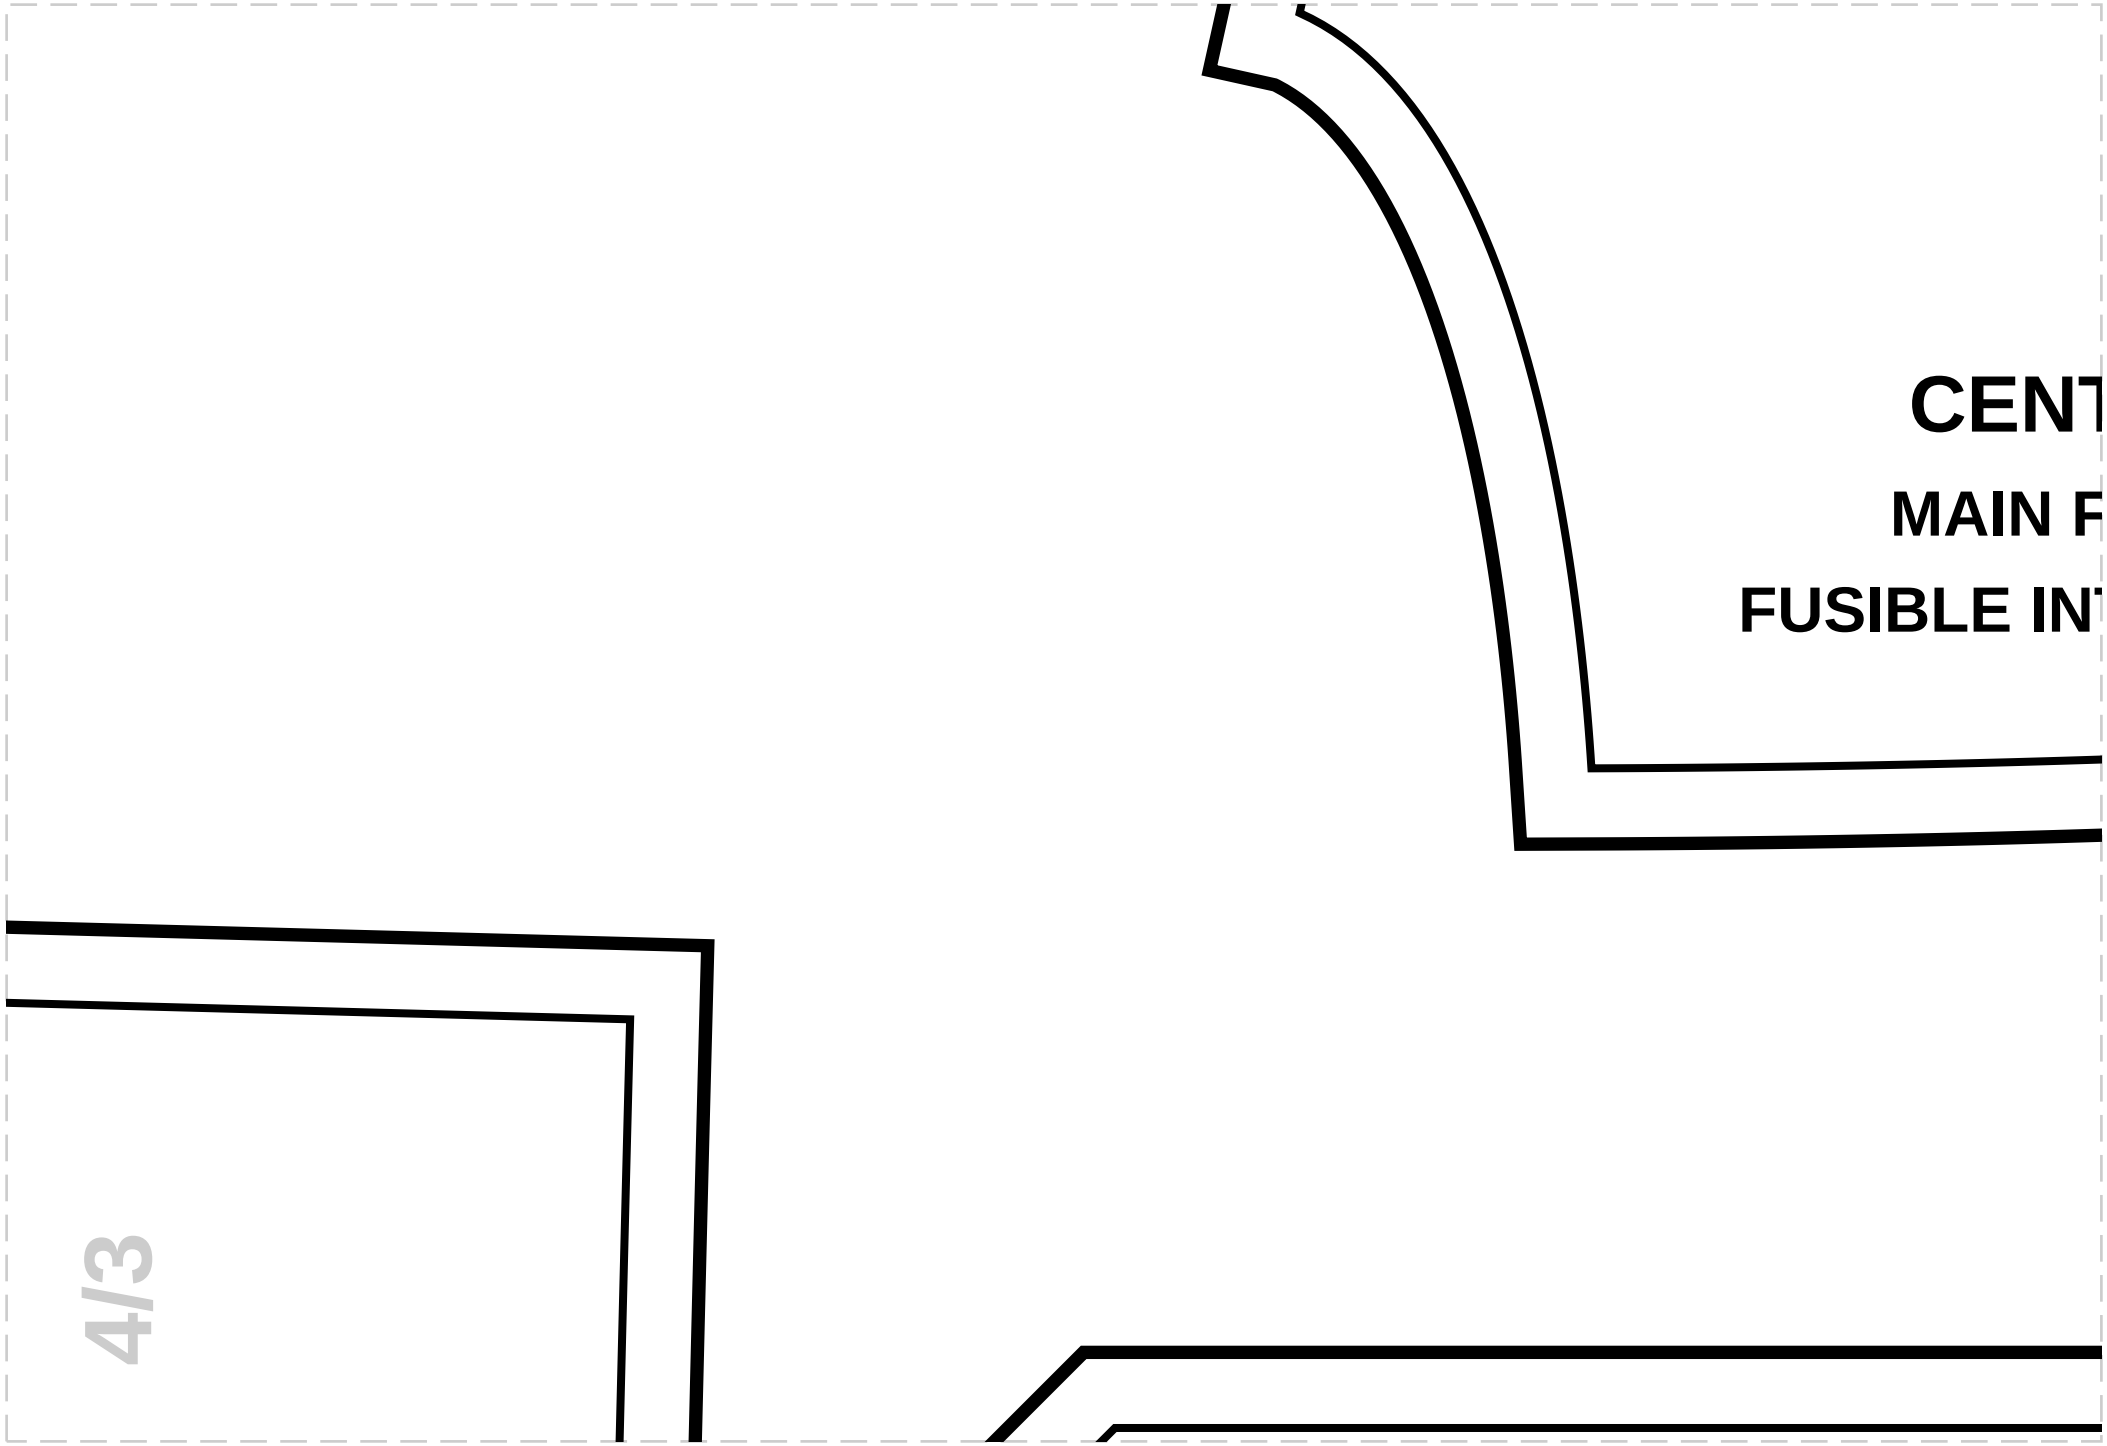

CENT
MAIN F
FUSIBLE IN
4/3

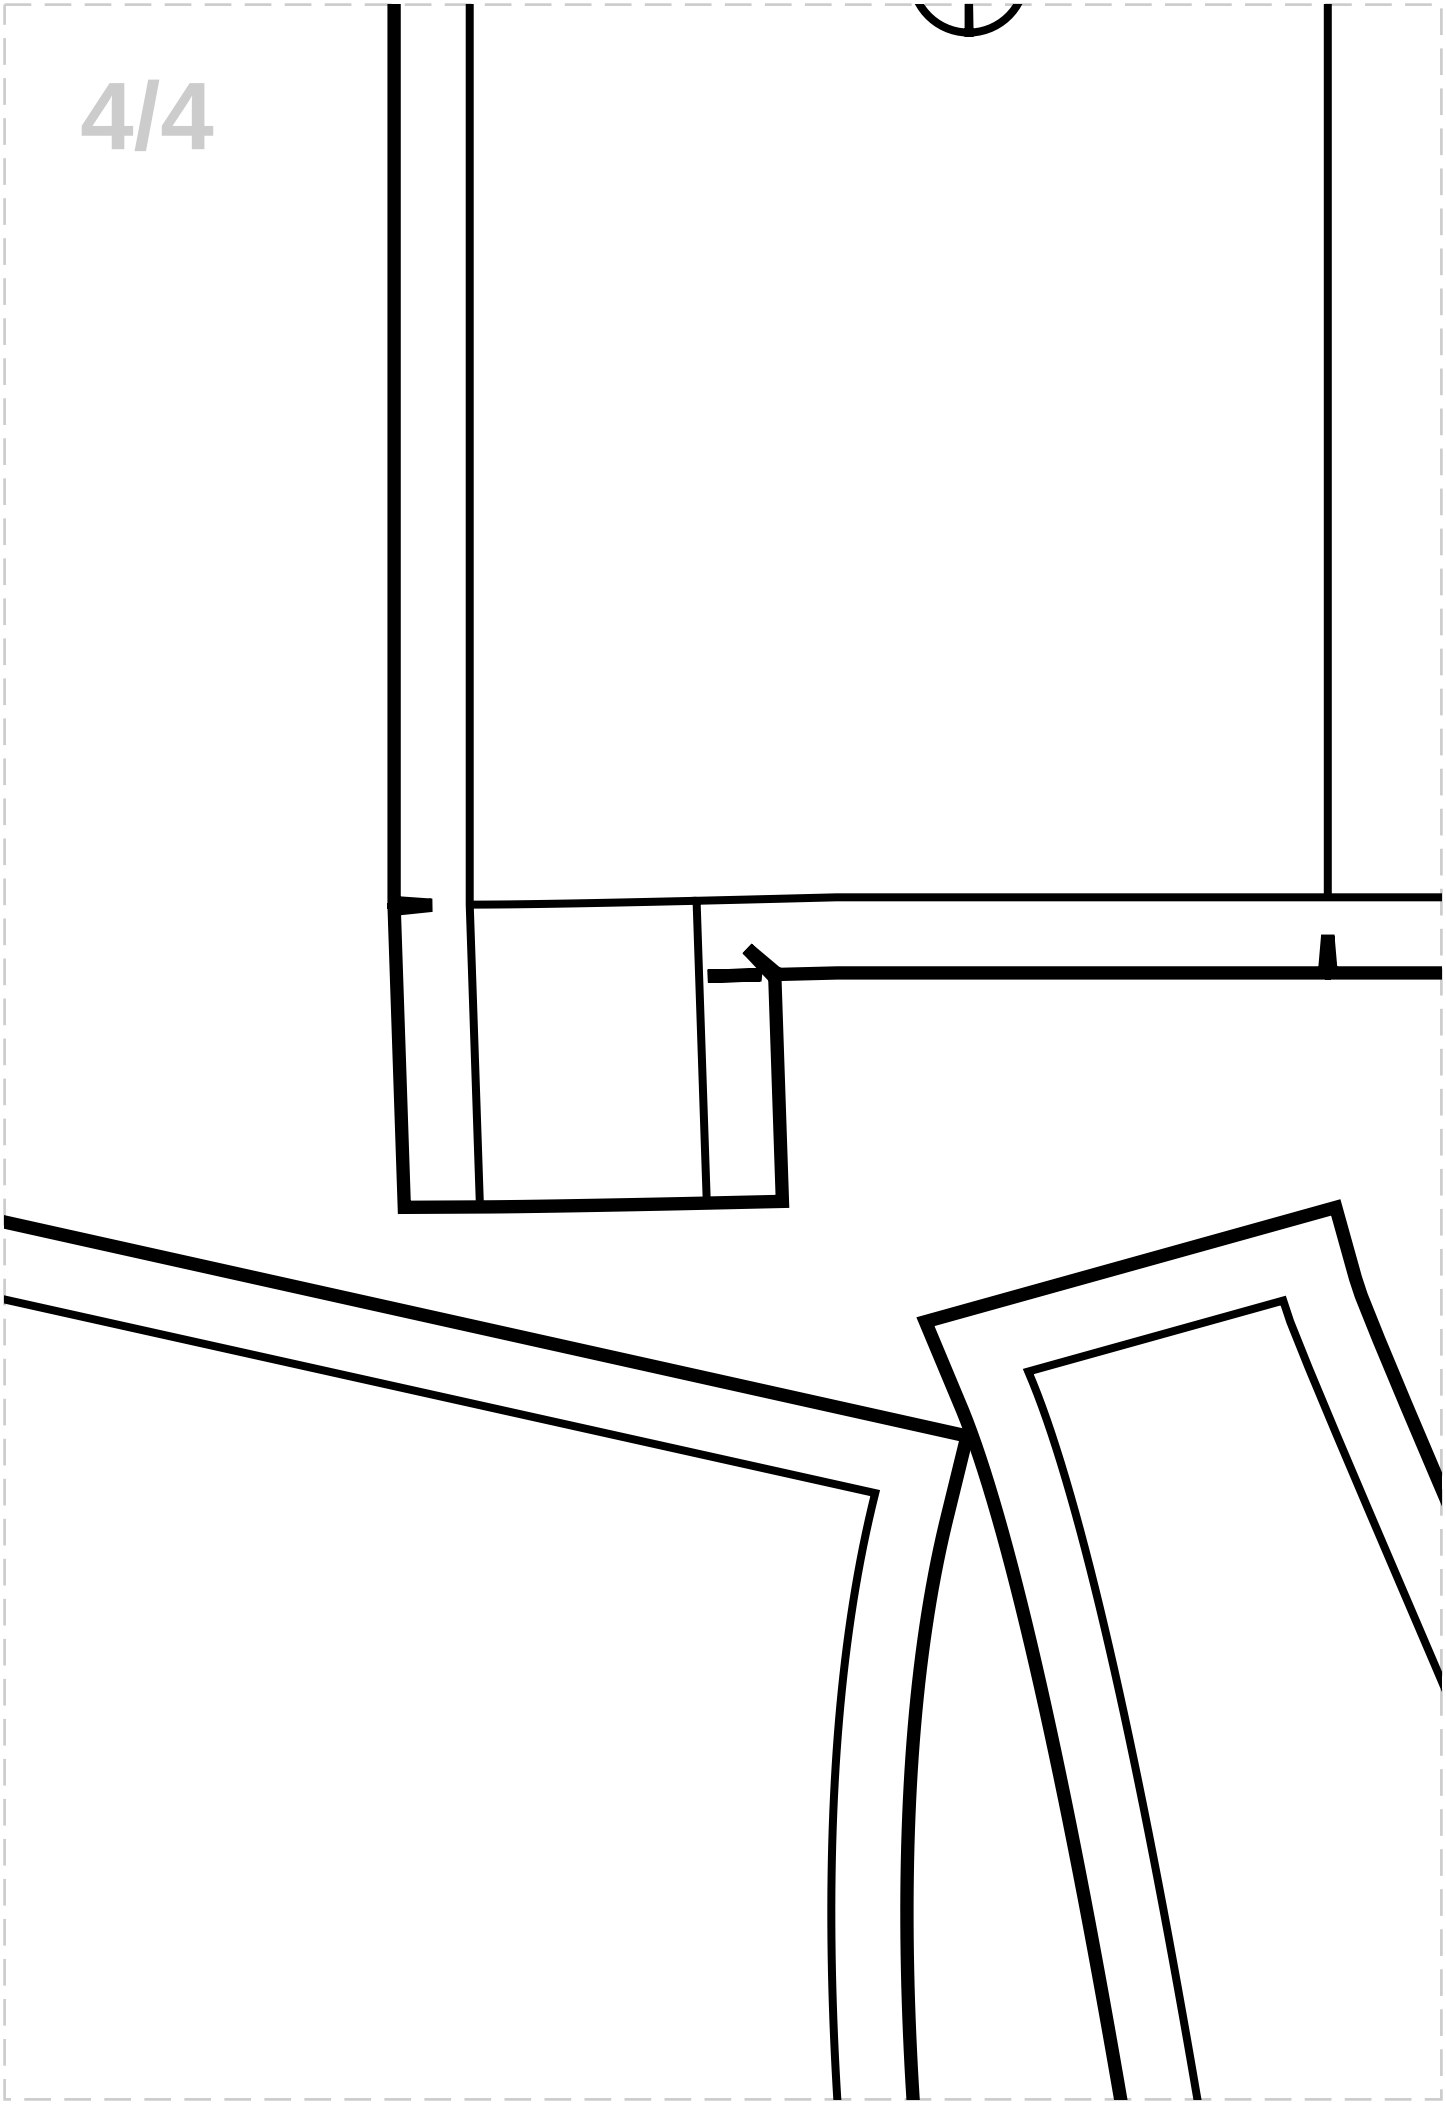

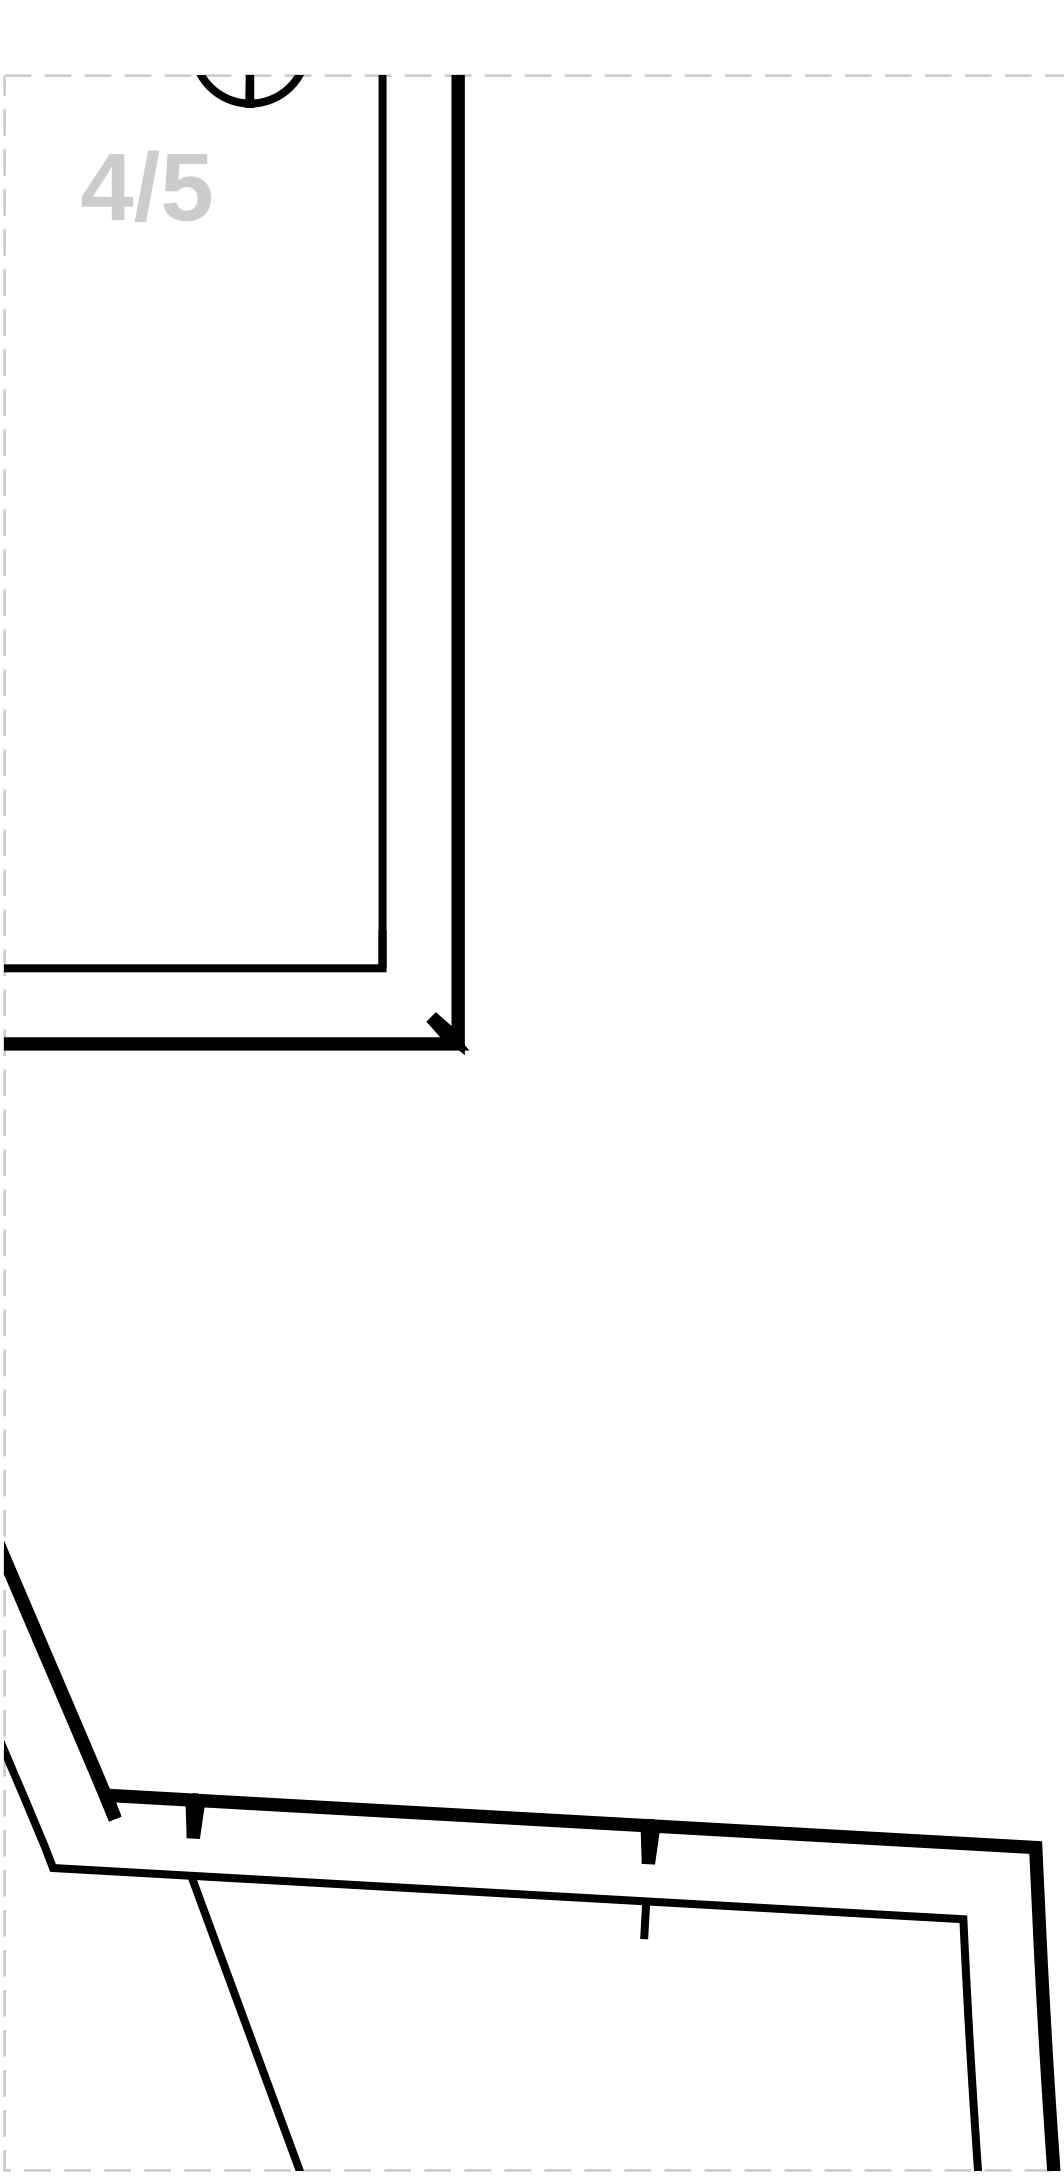

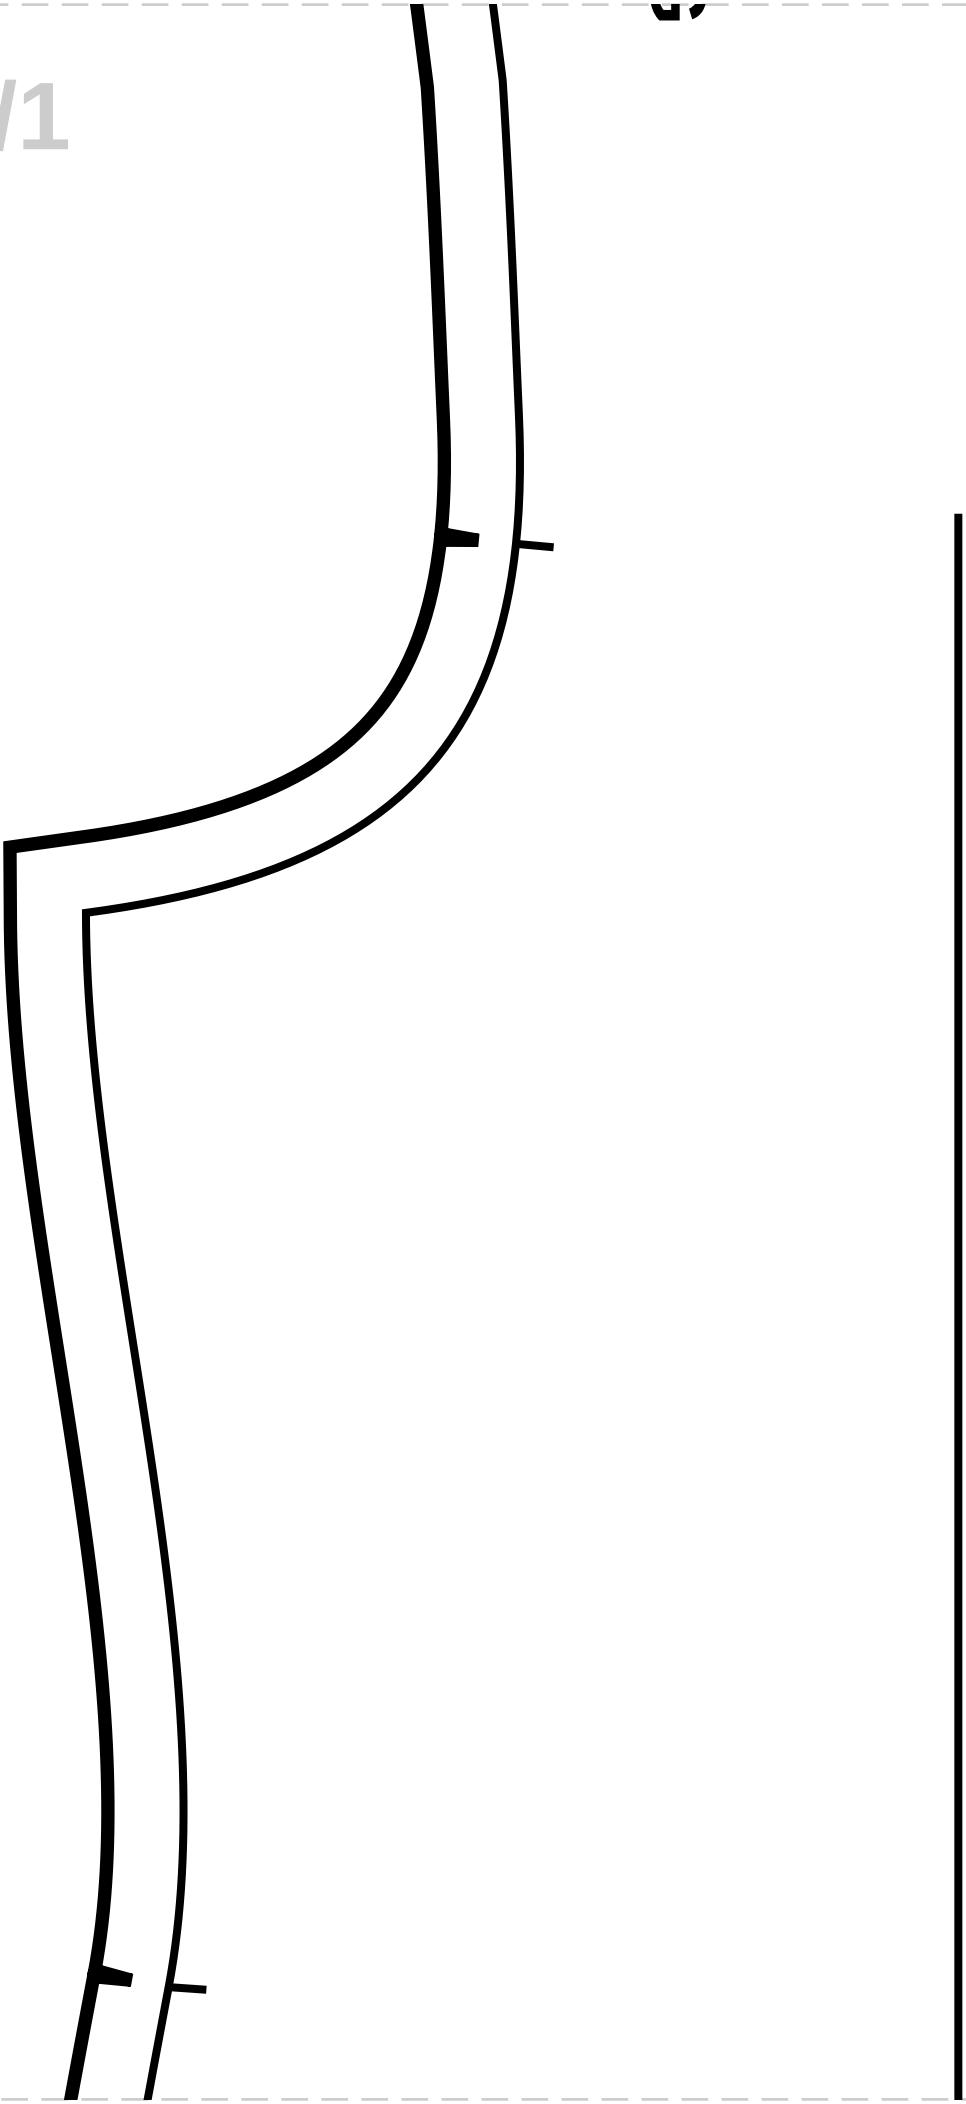

5/2

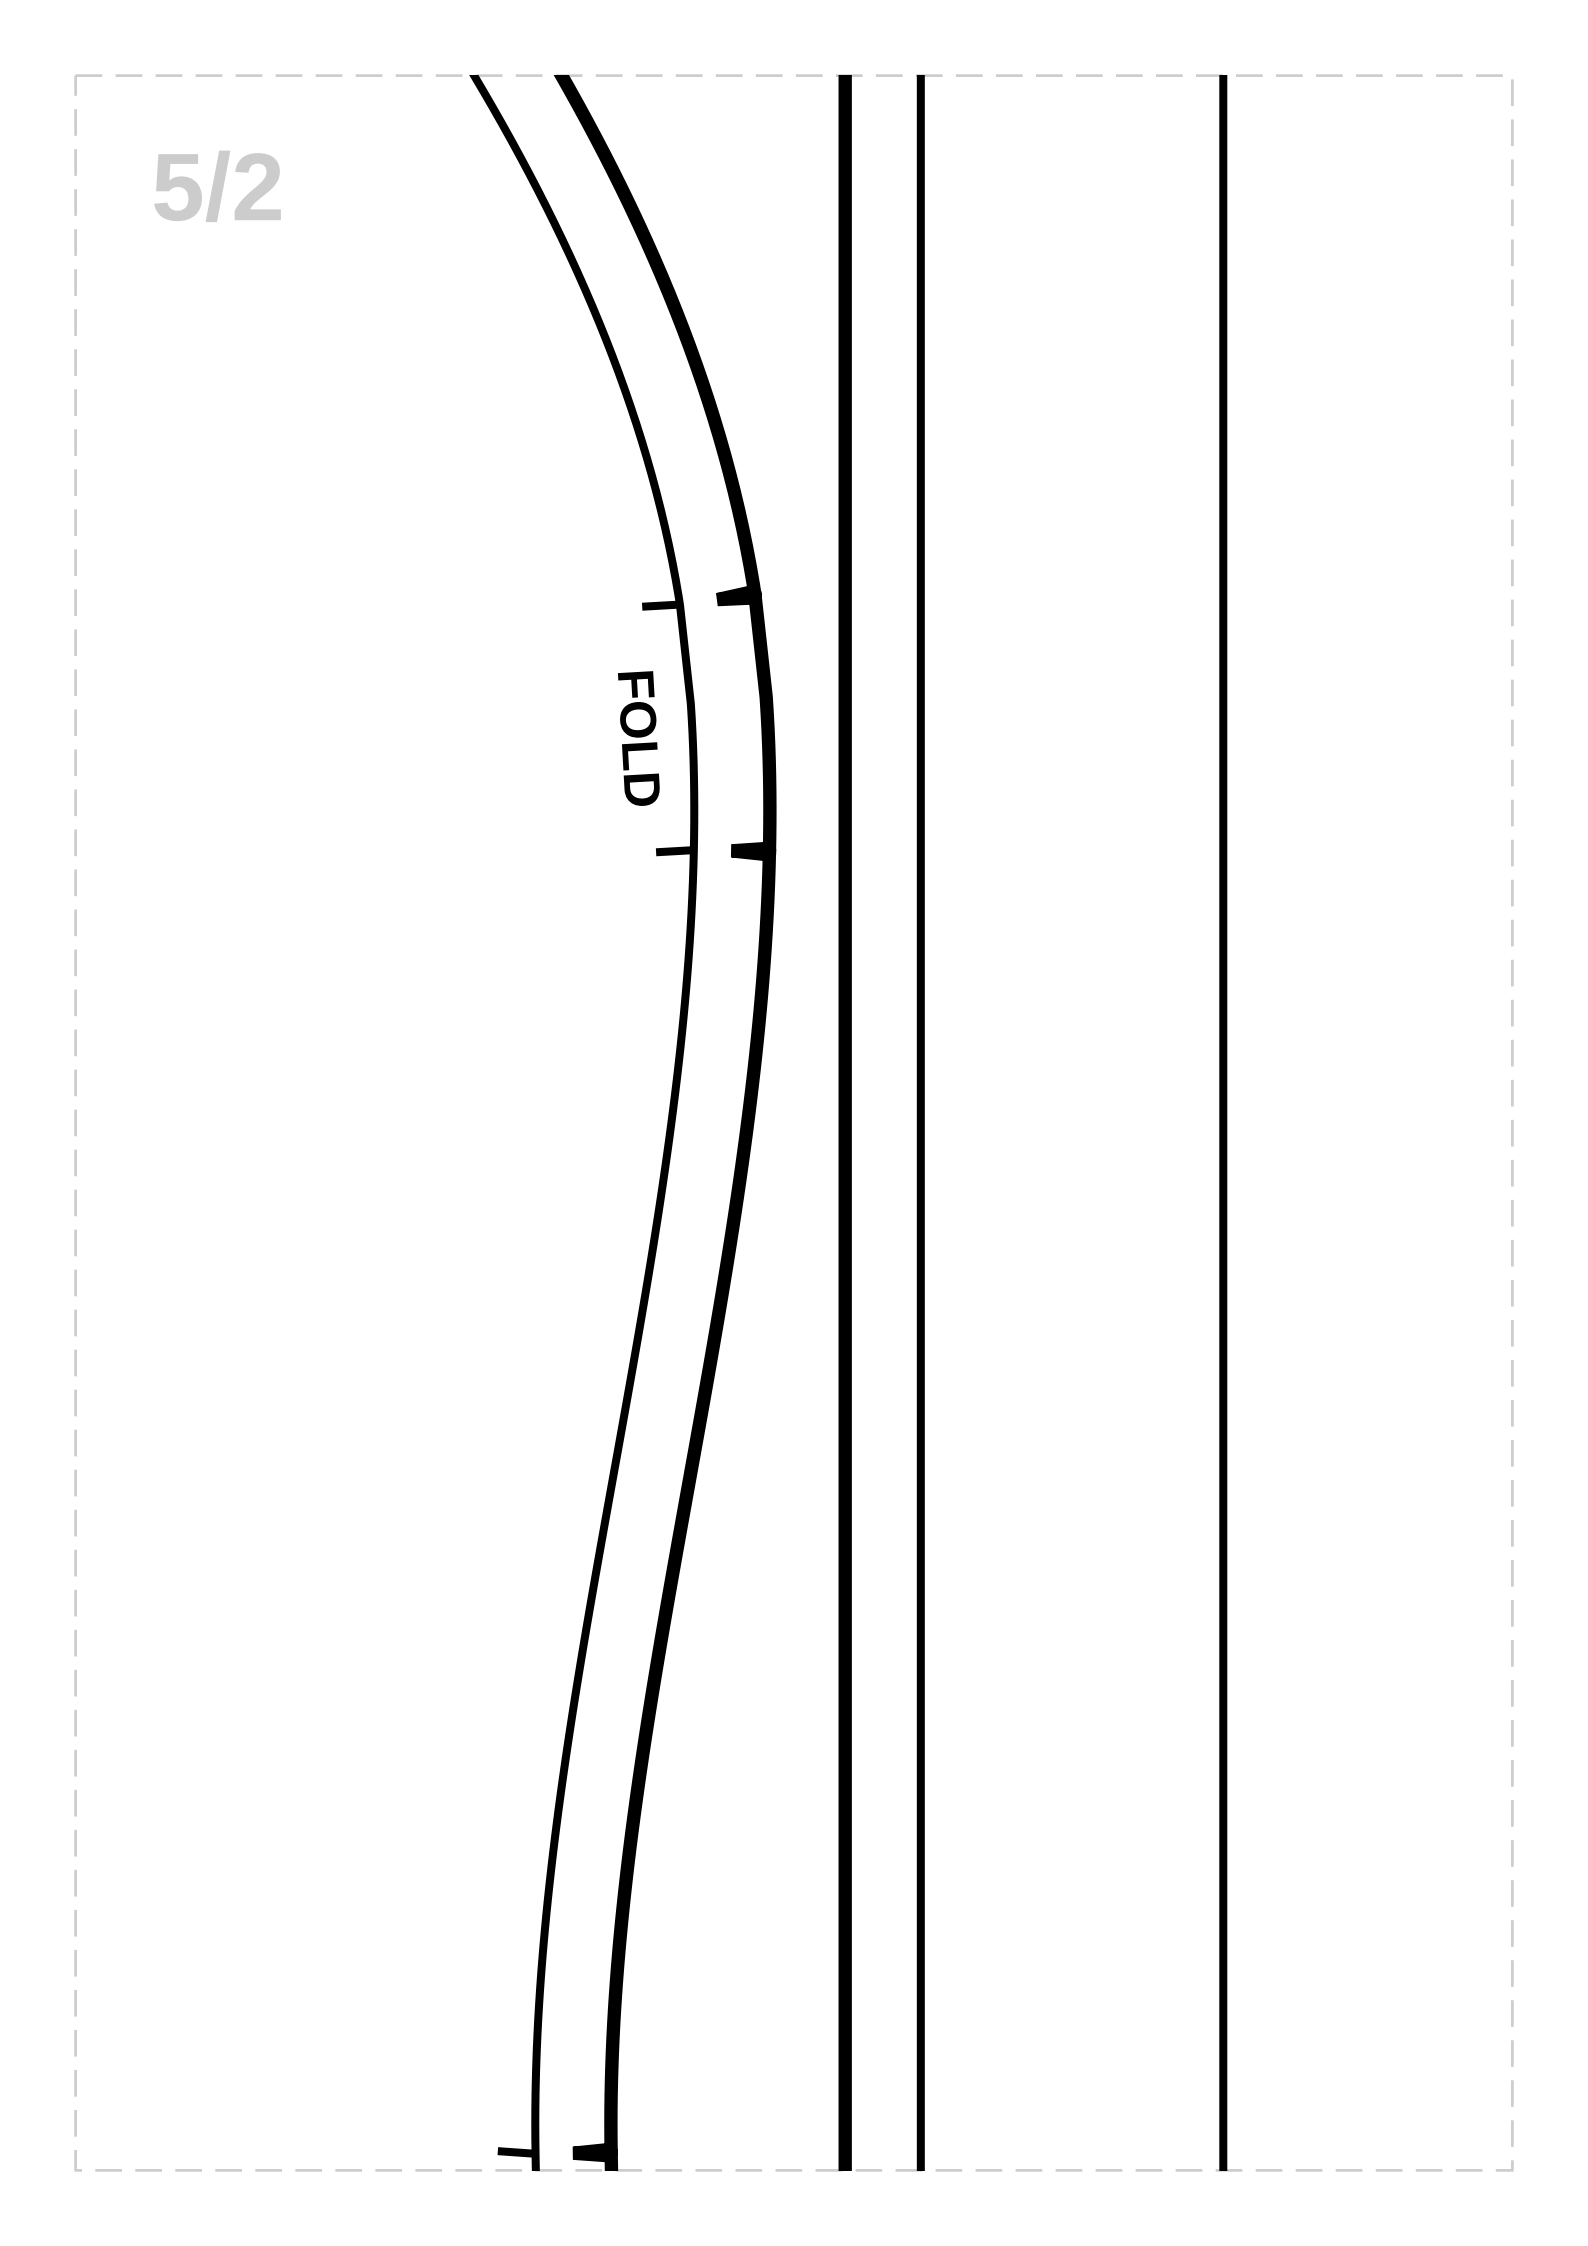


4


TER BACK


FABRIC: Cut 2

TERFACING: Cut 2


5/4

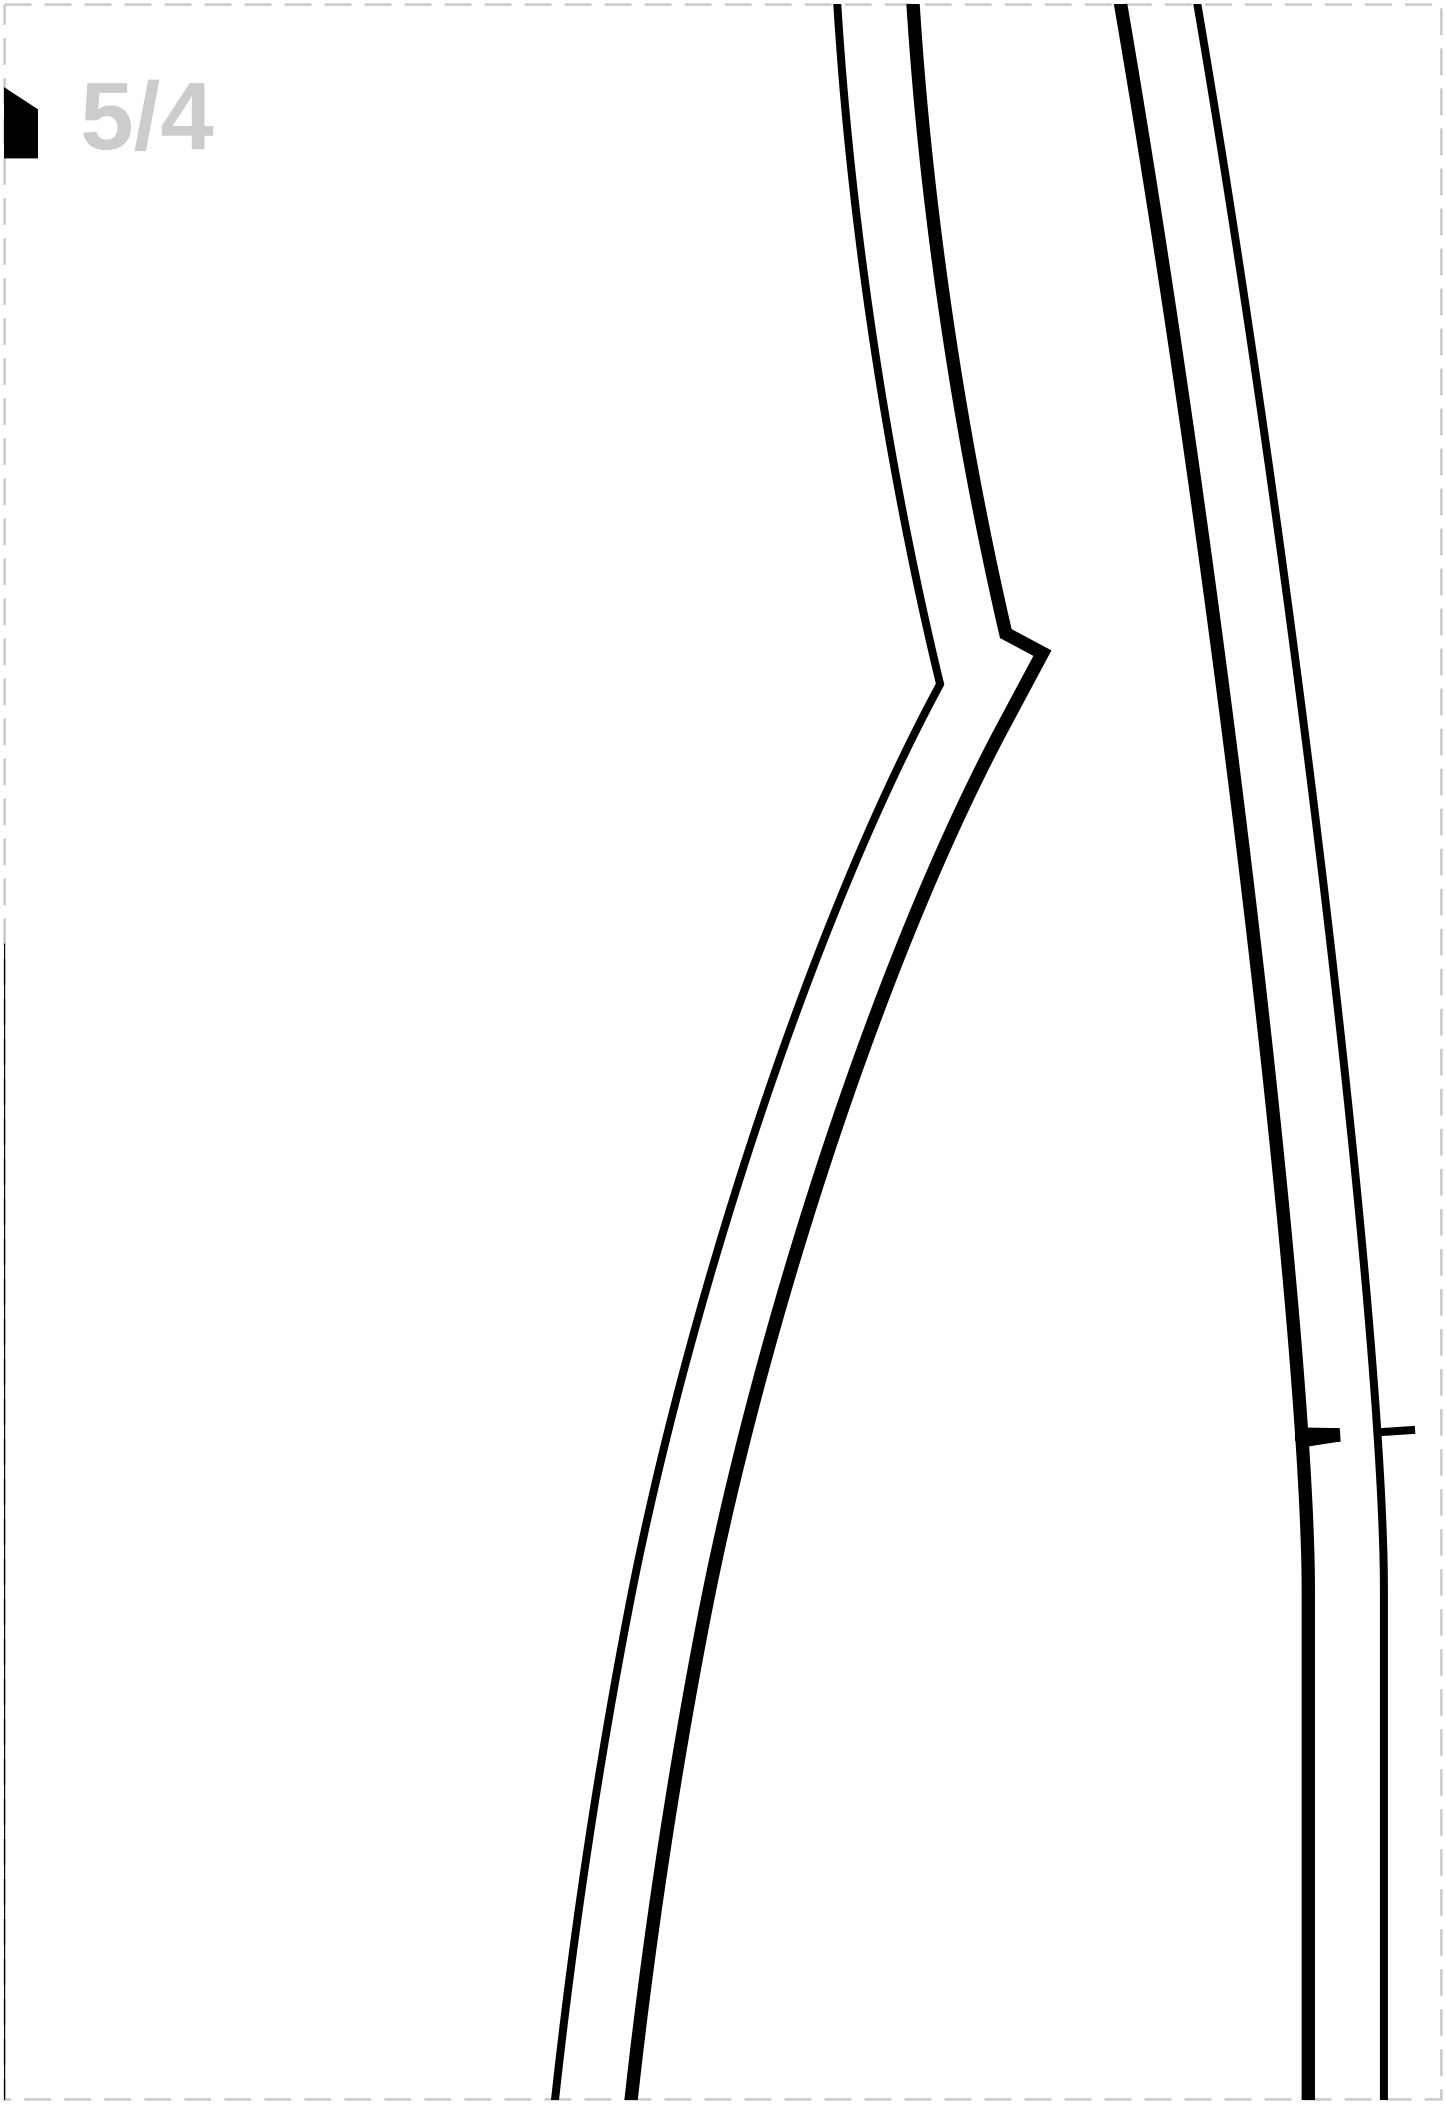


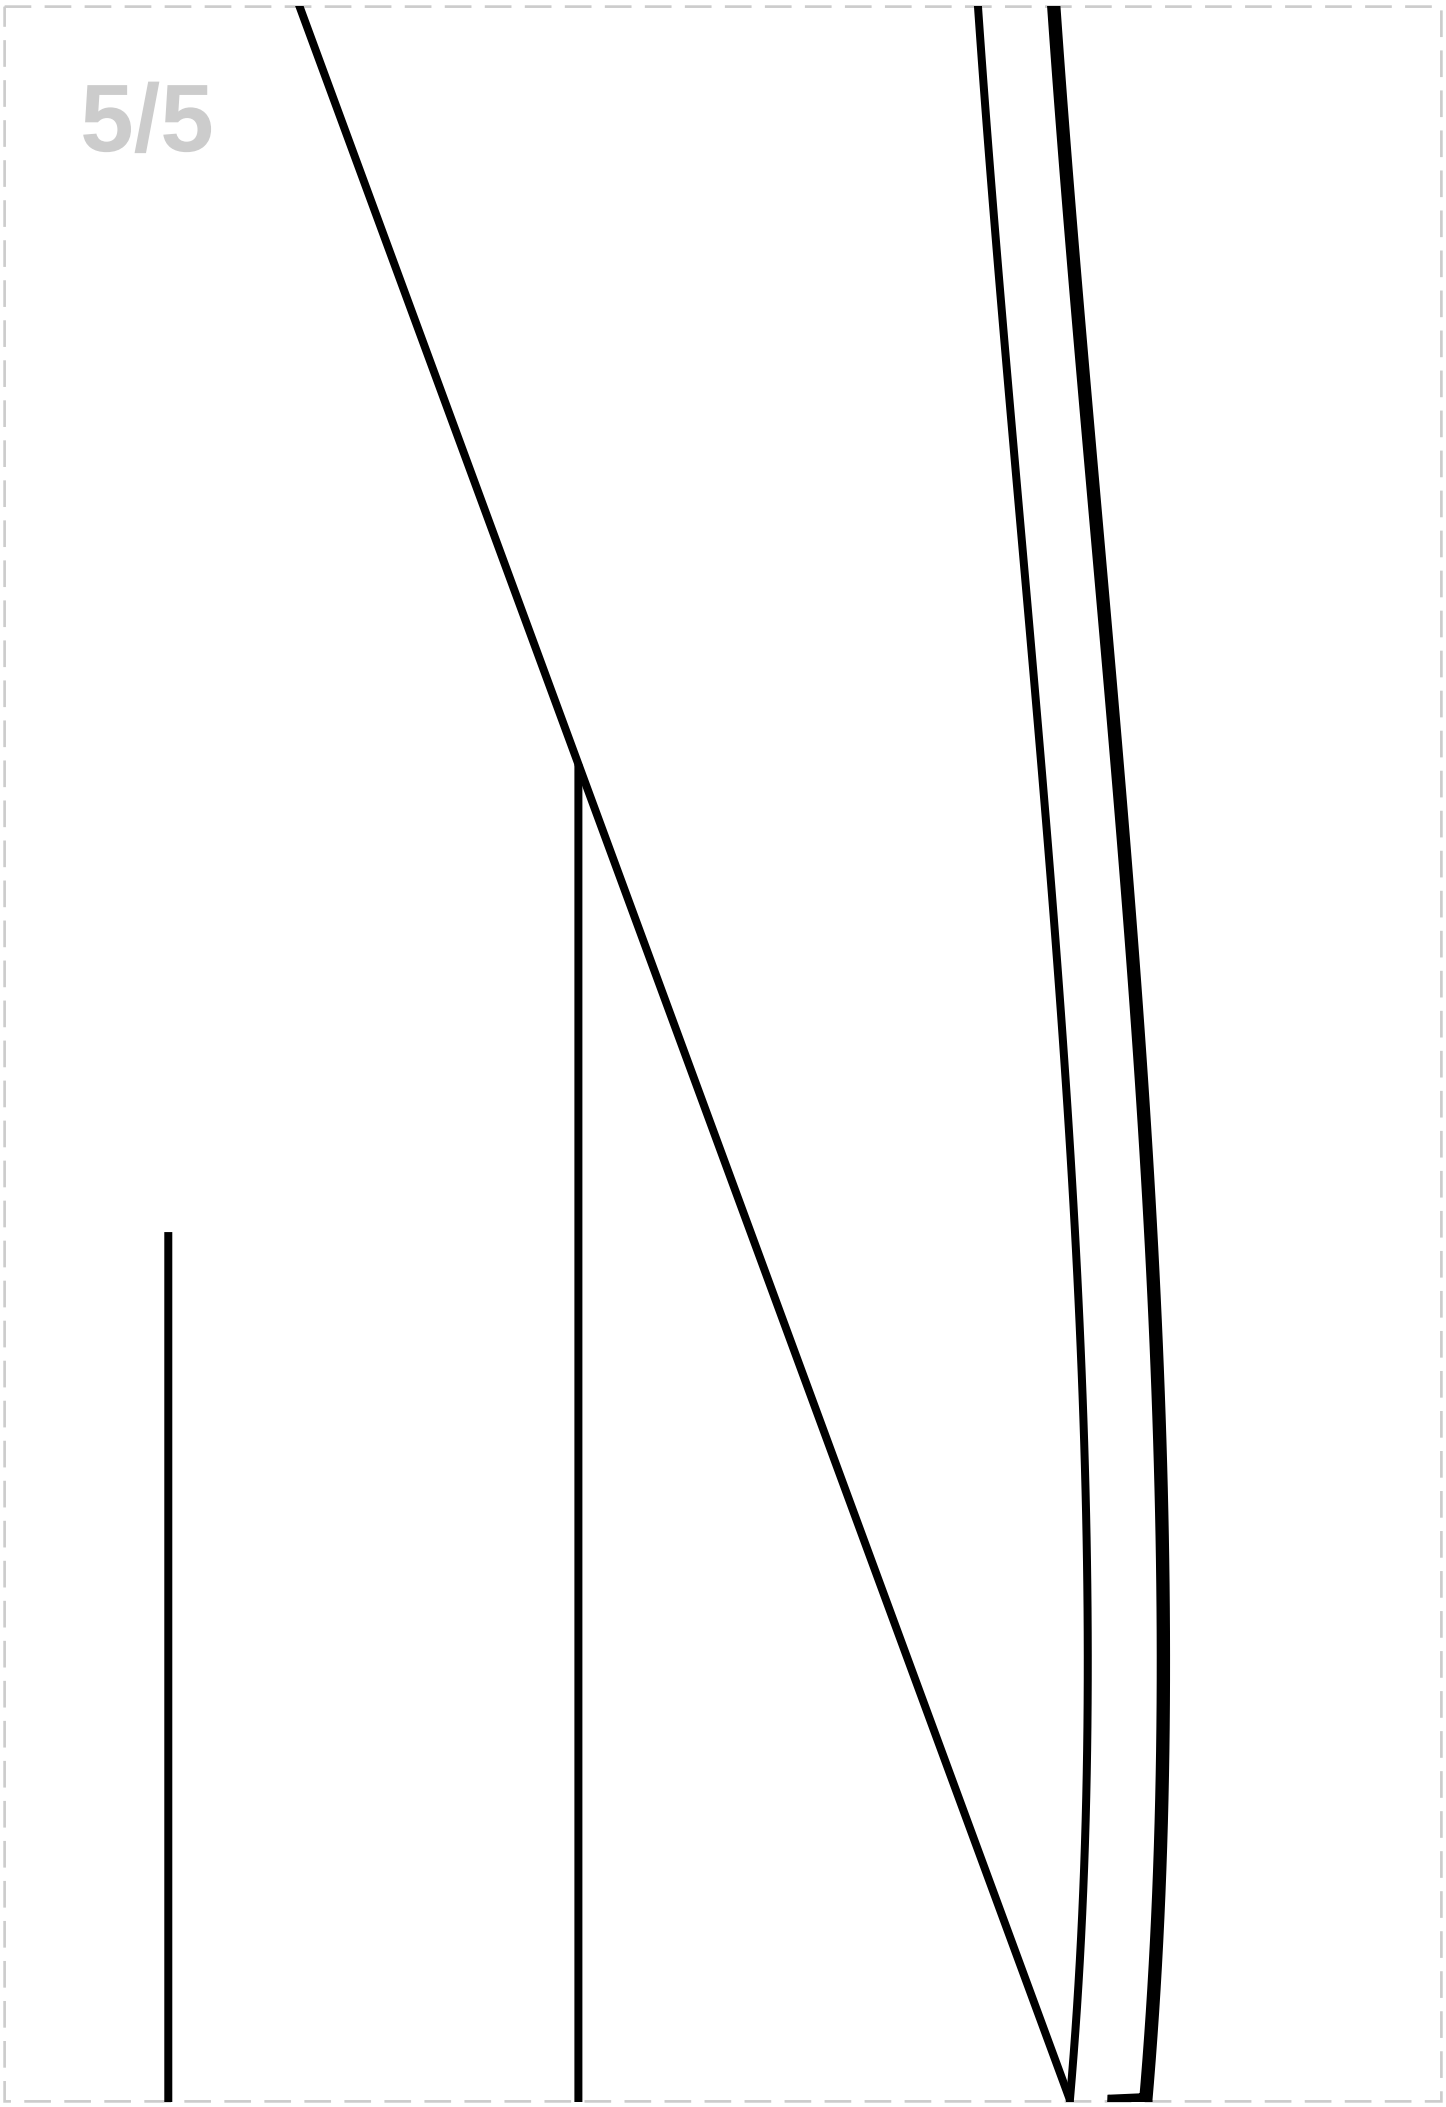


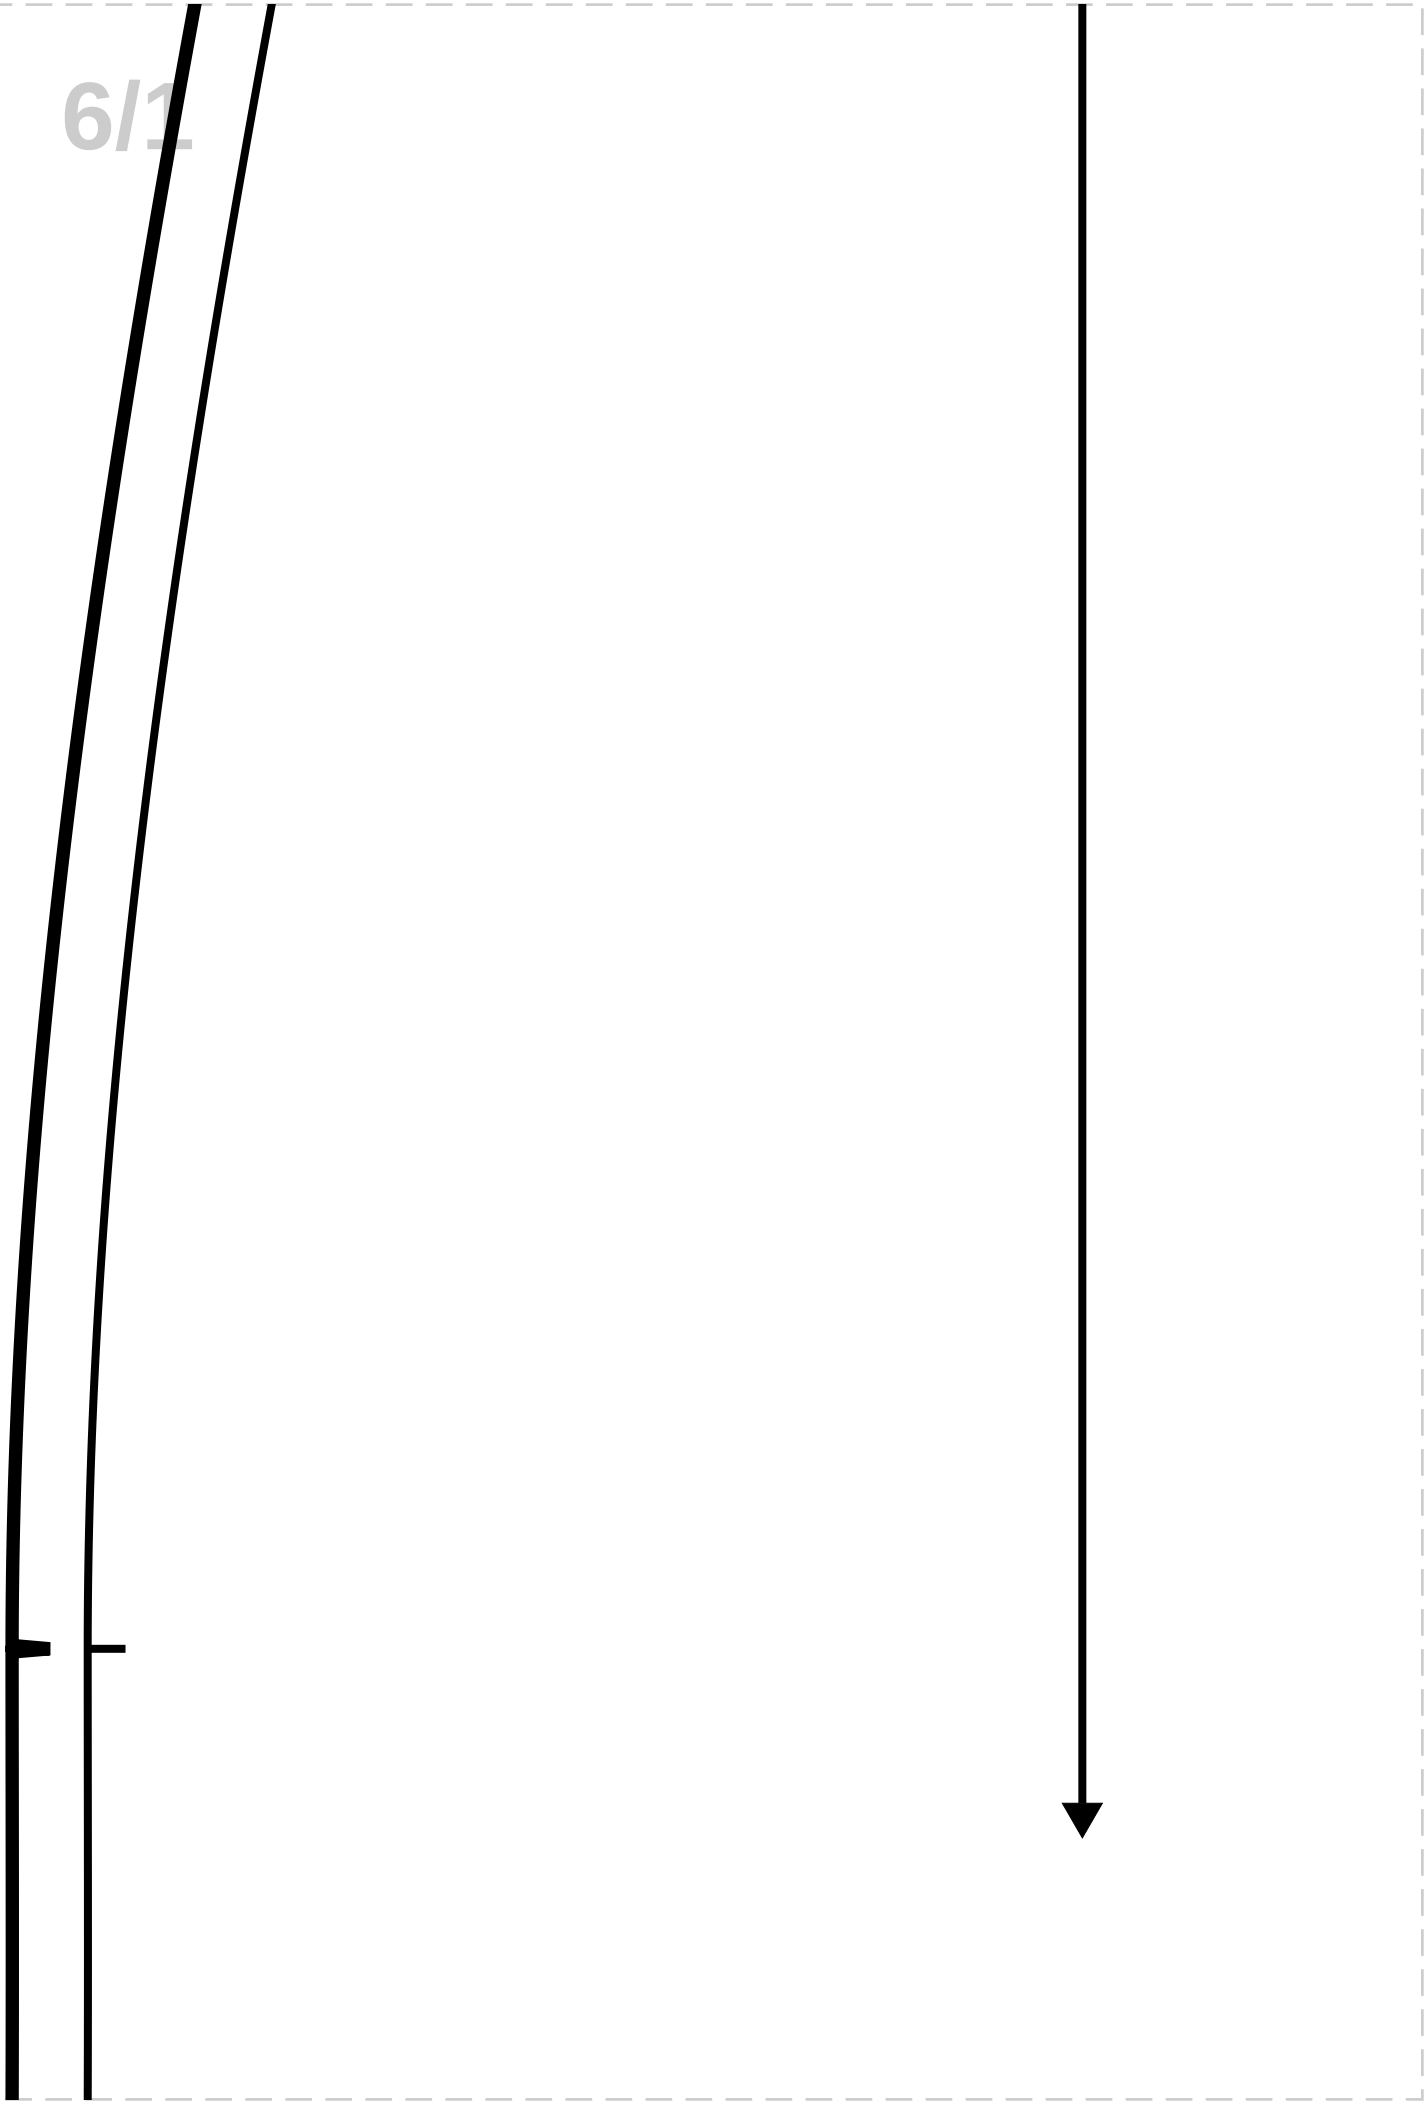



6/2

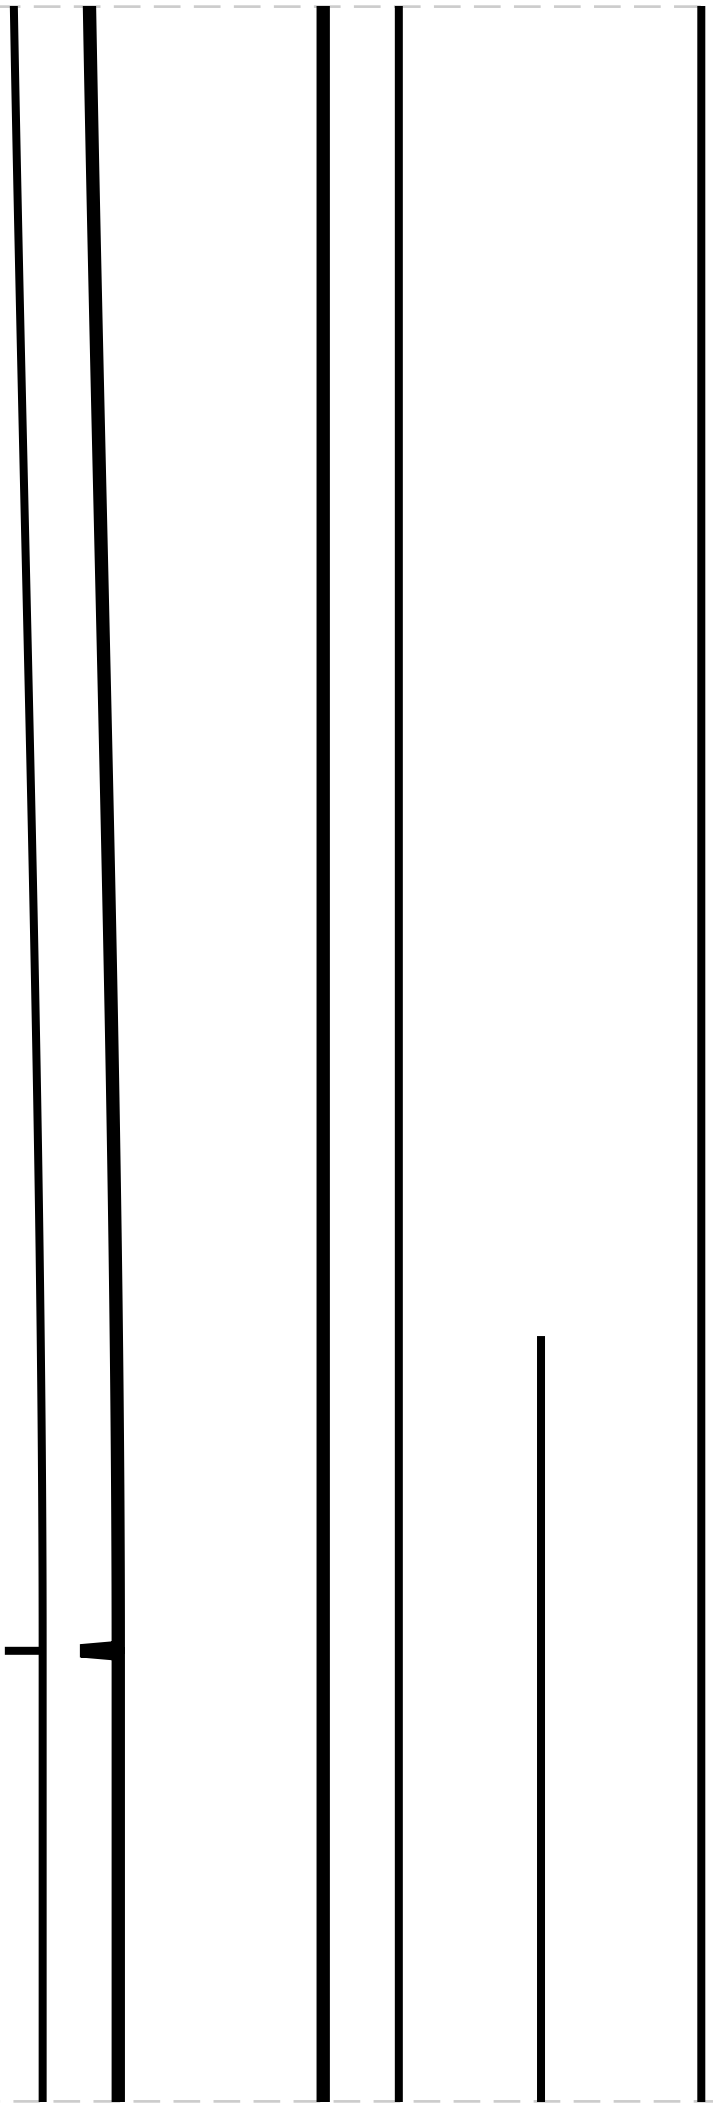


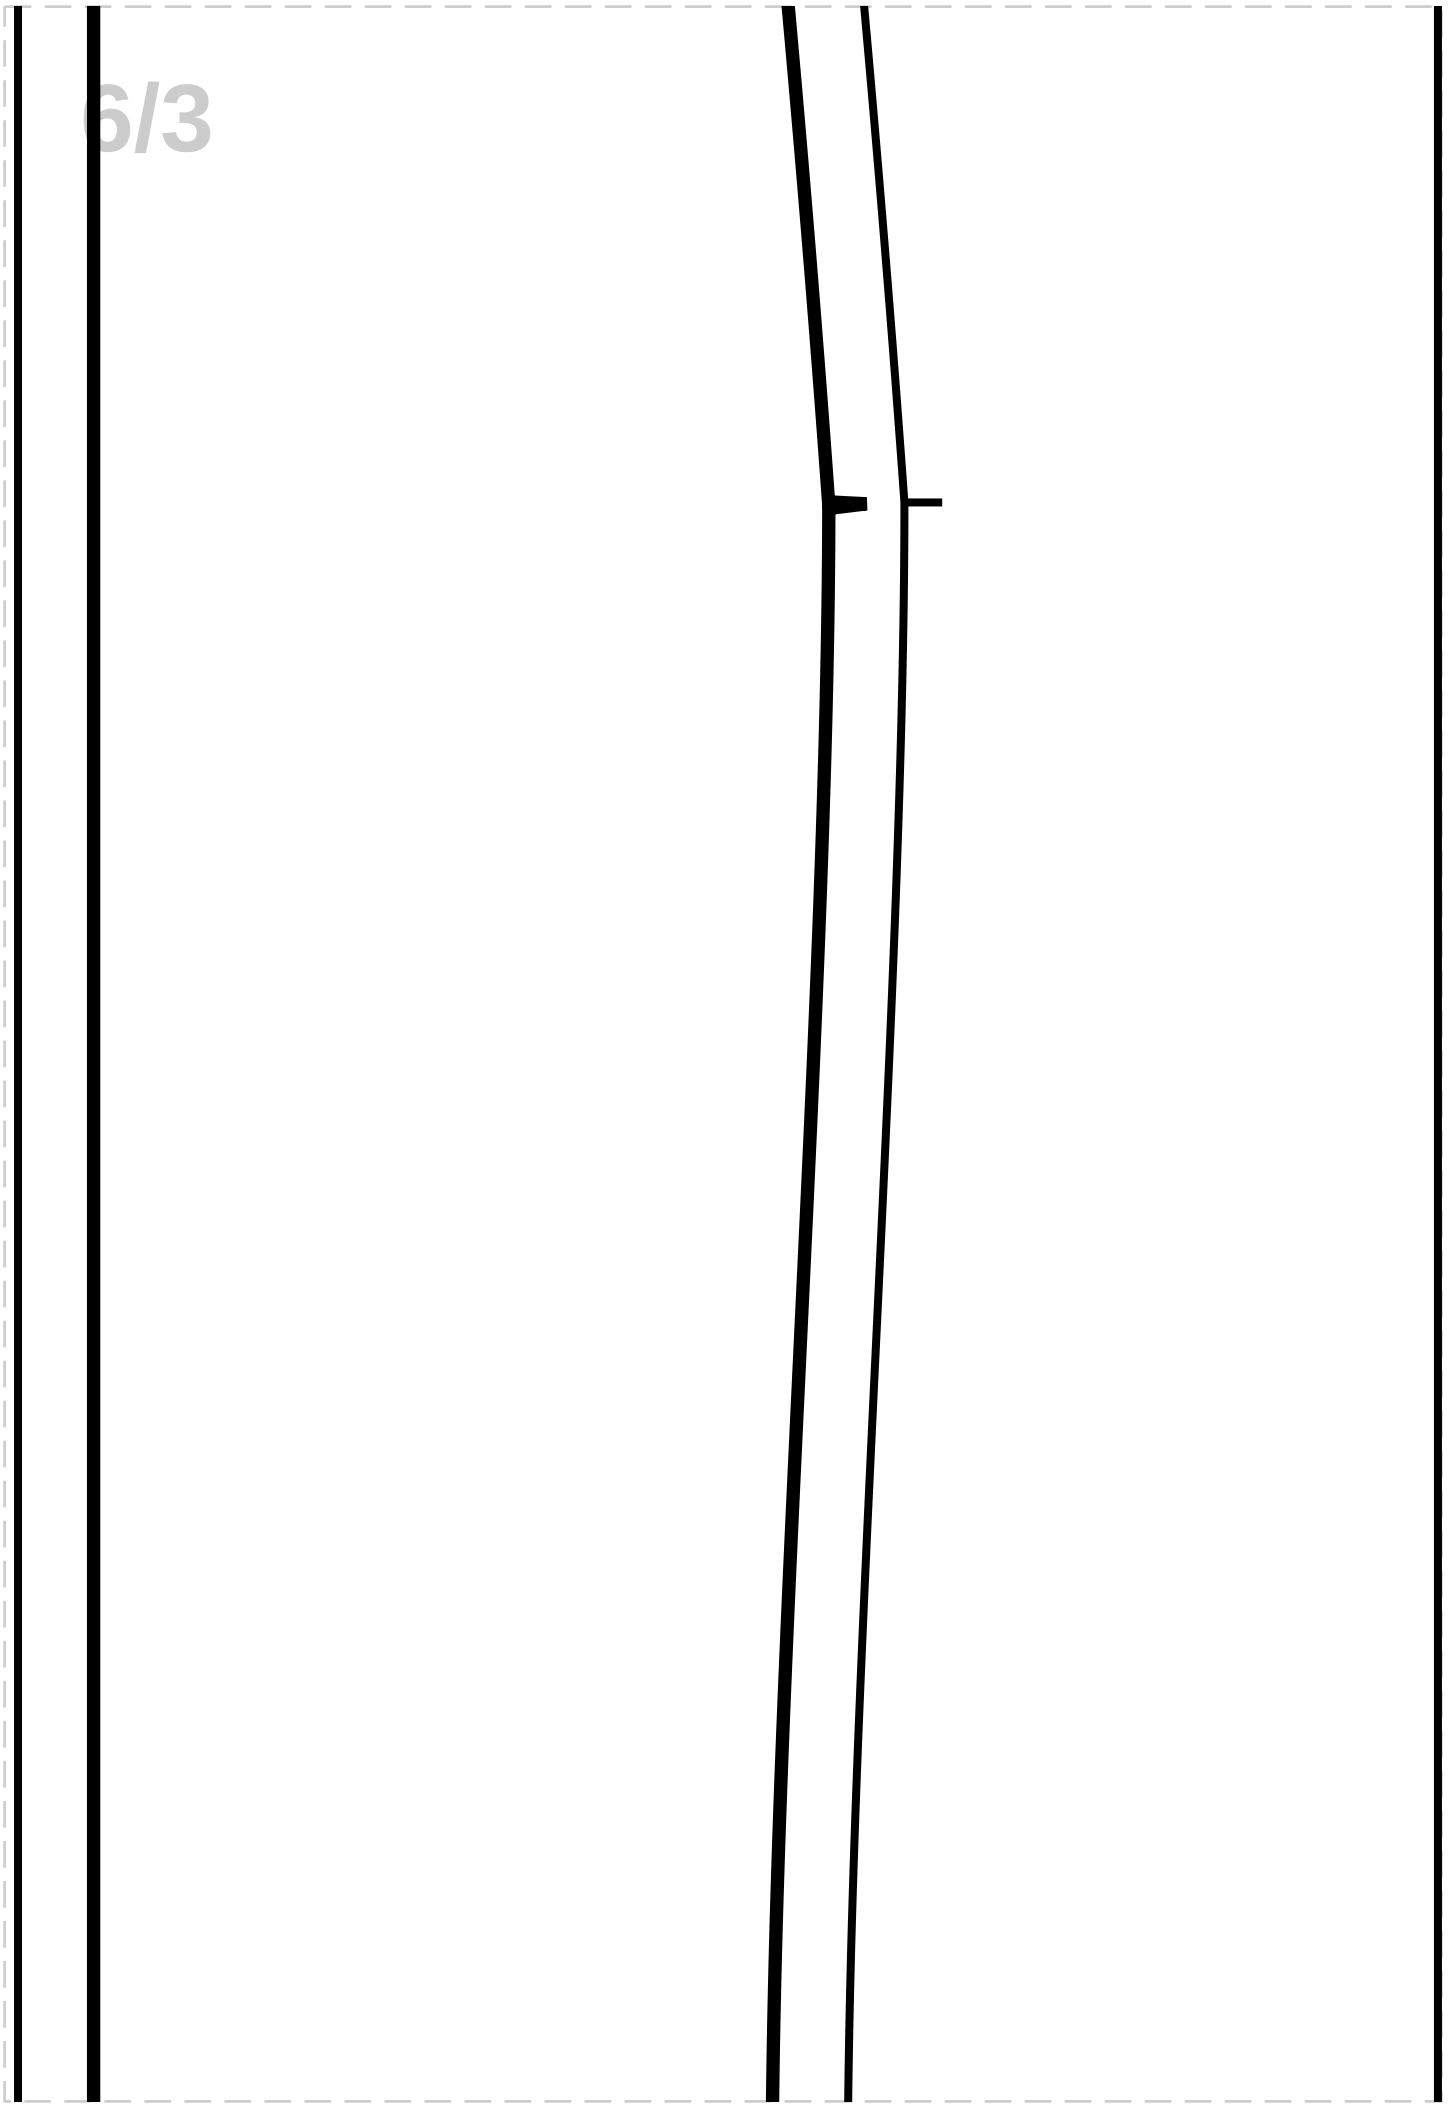


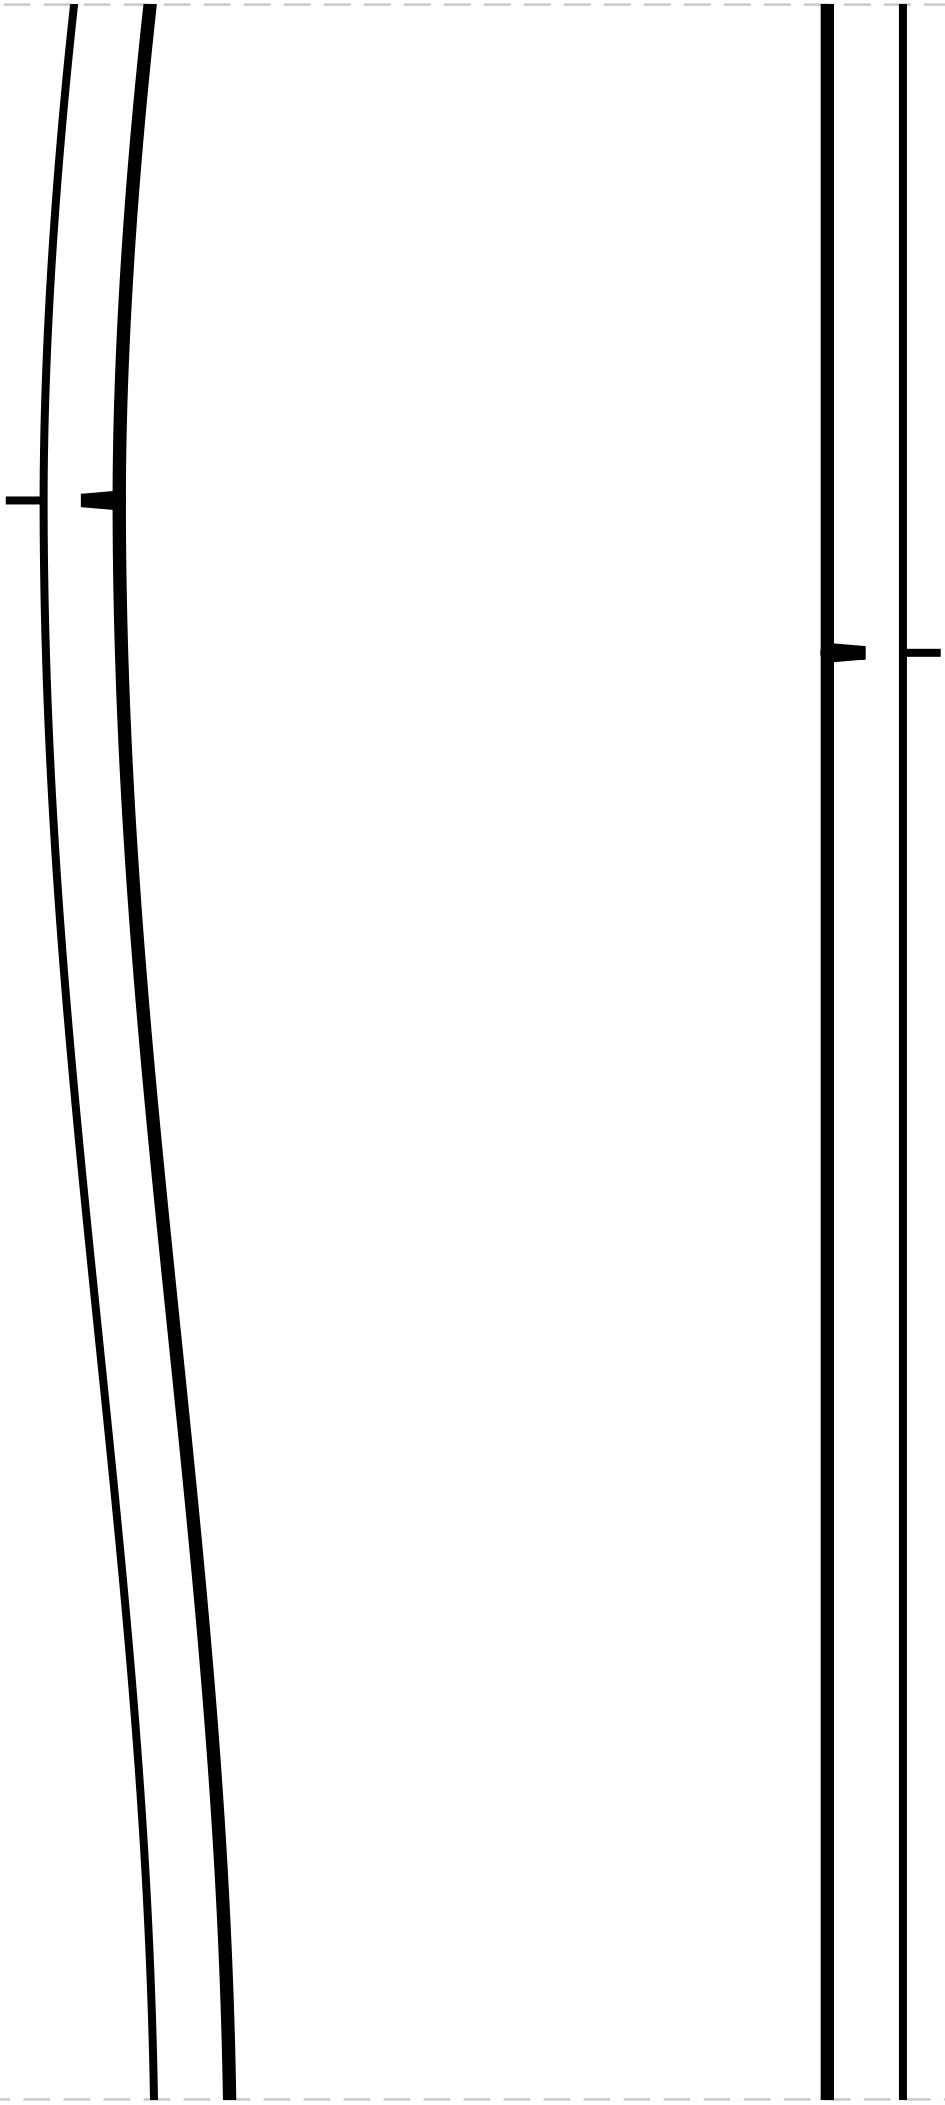

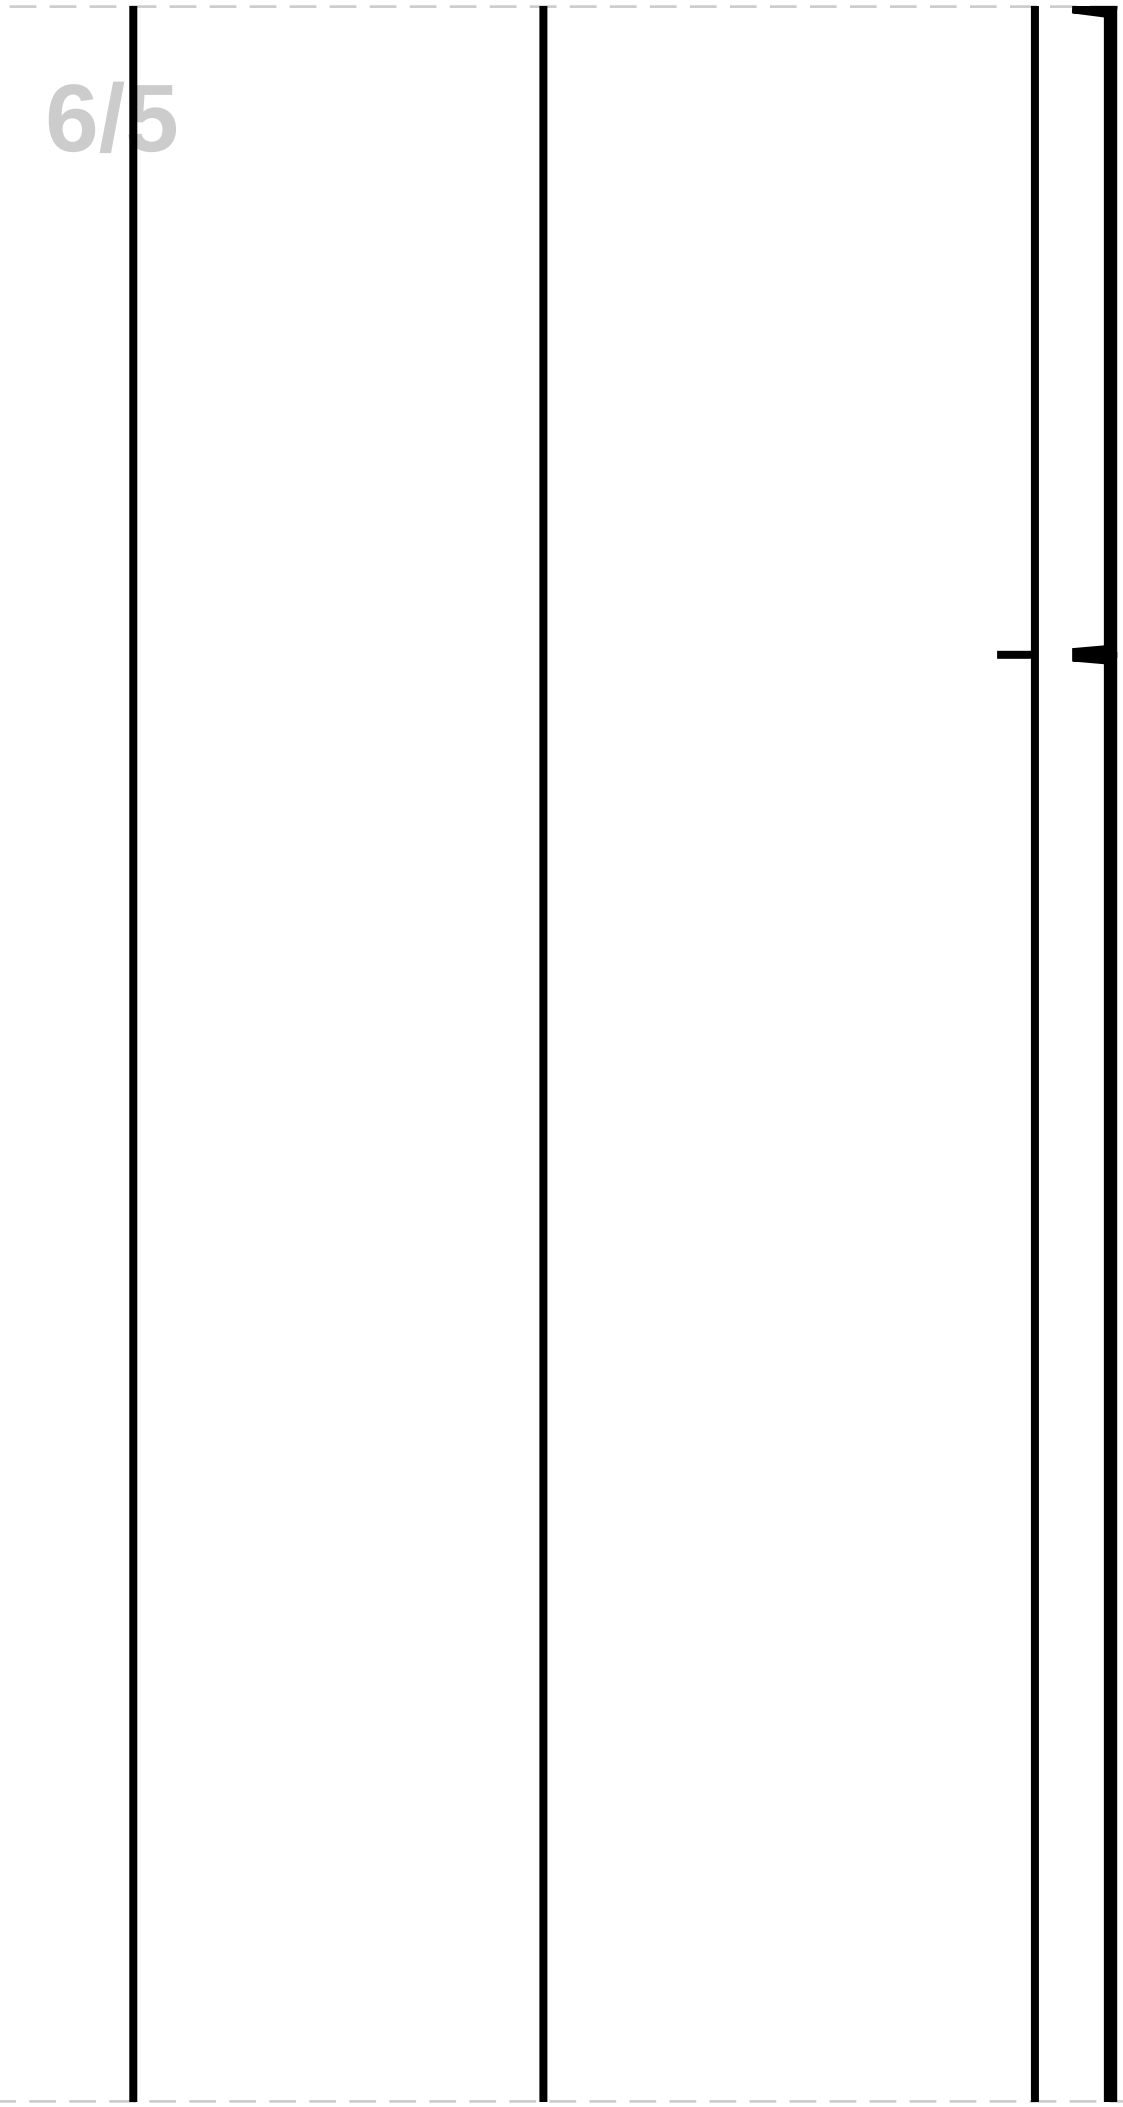


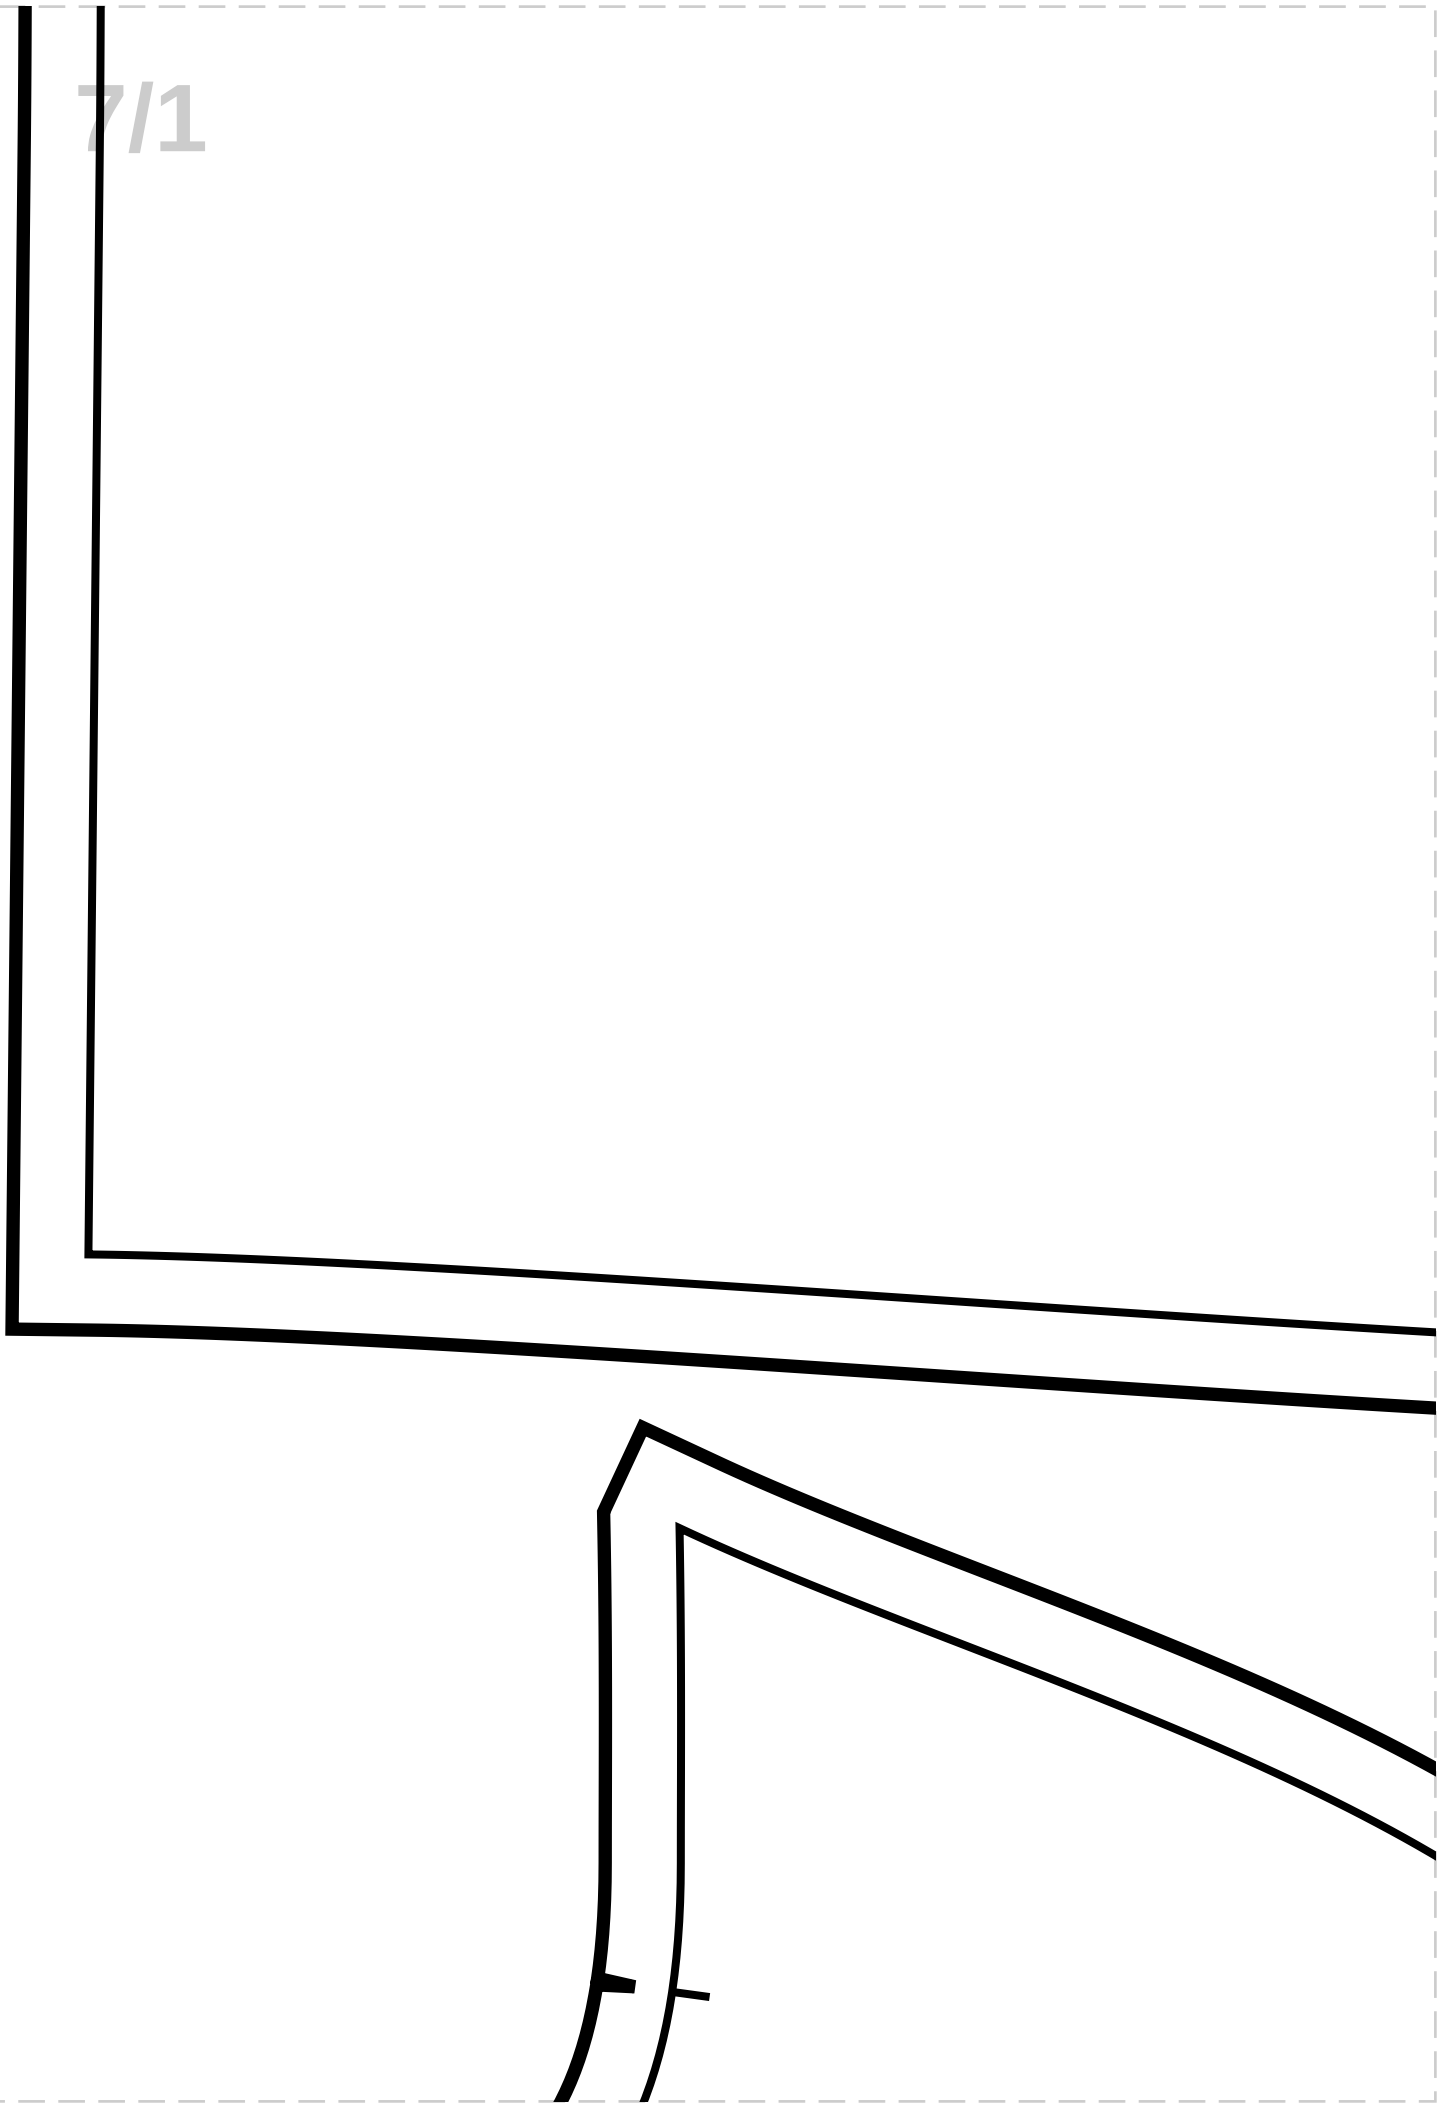

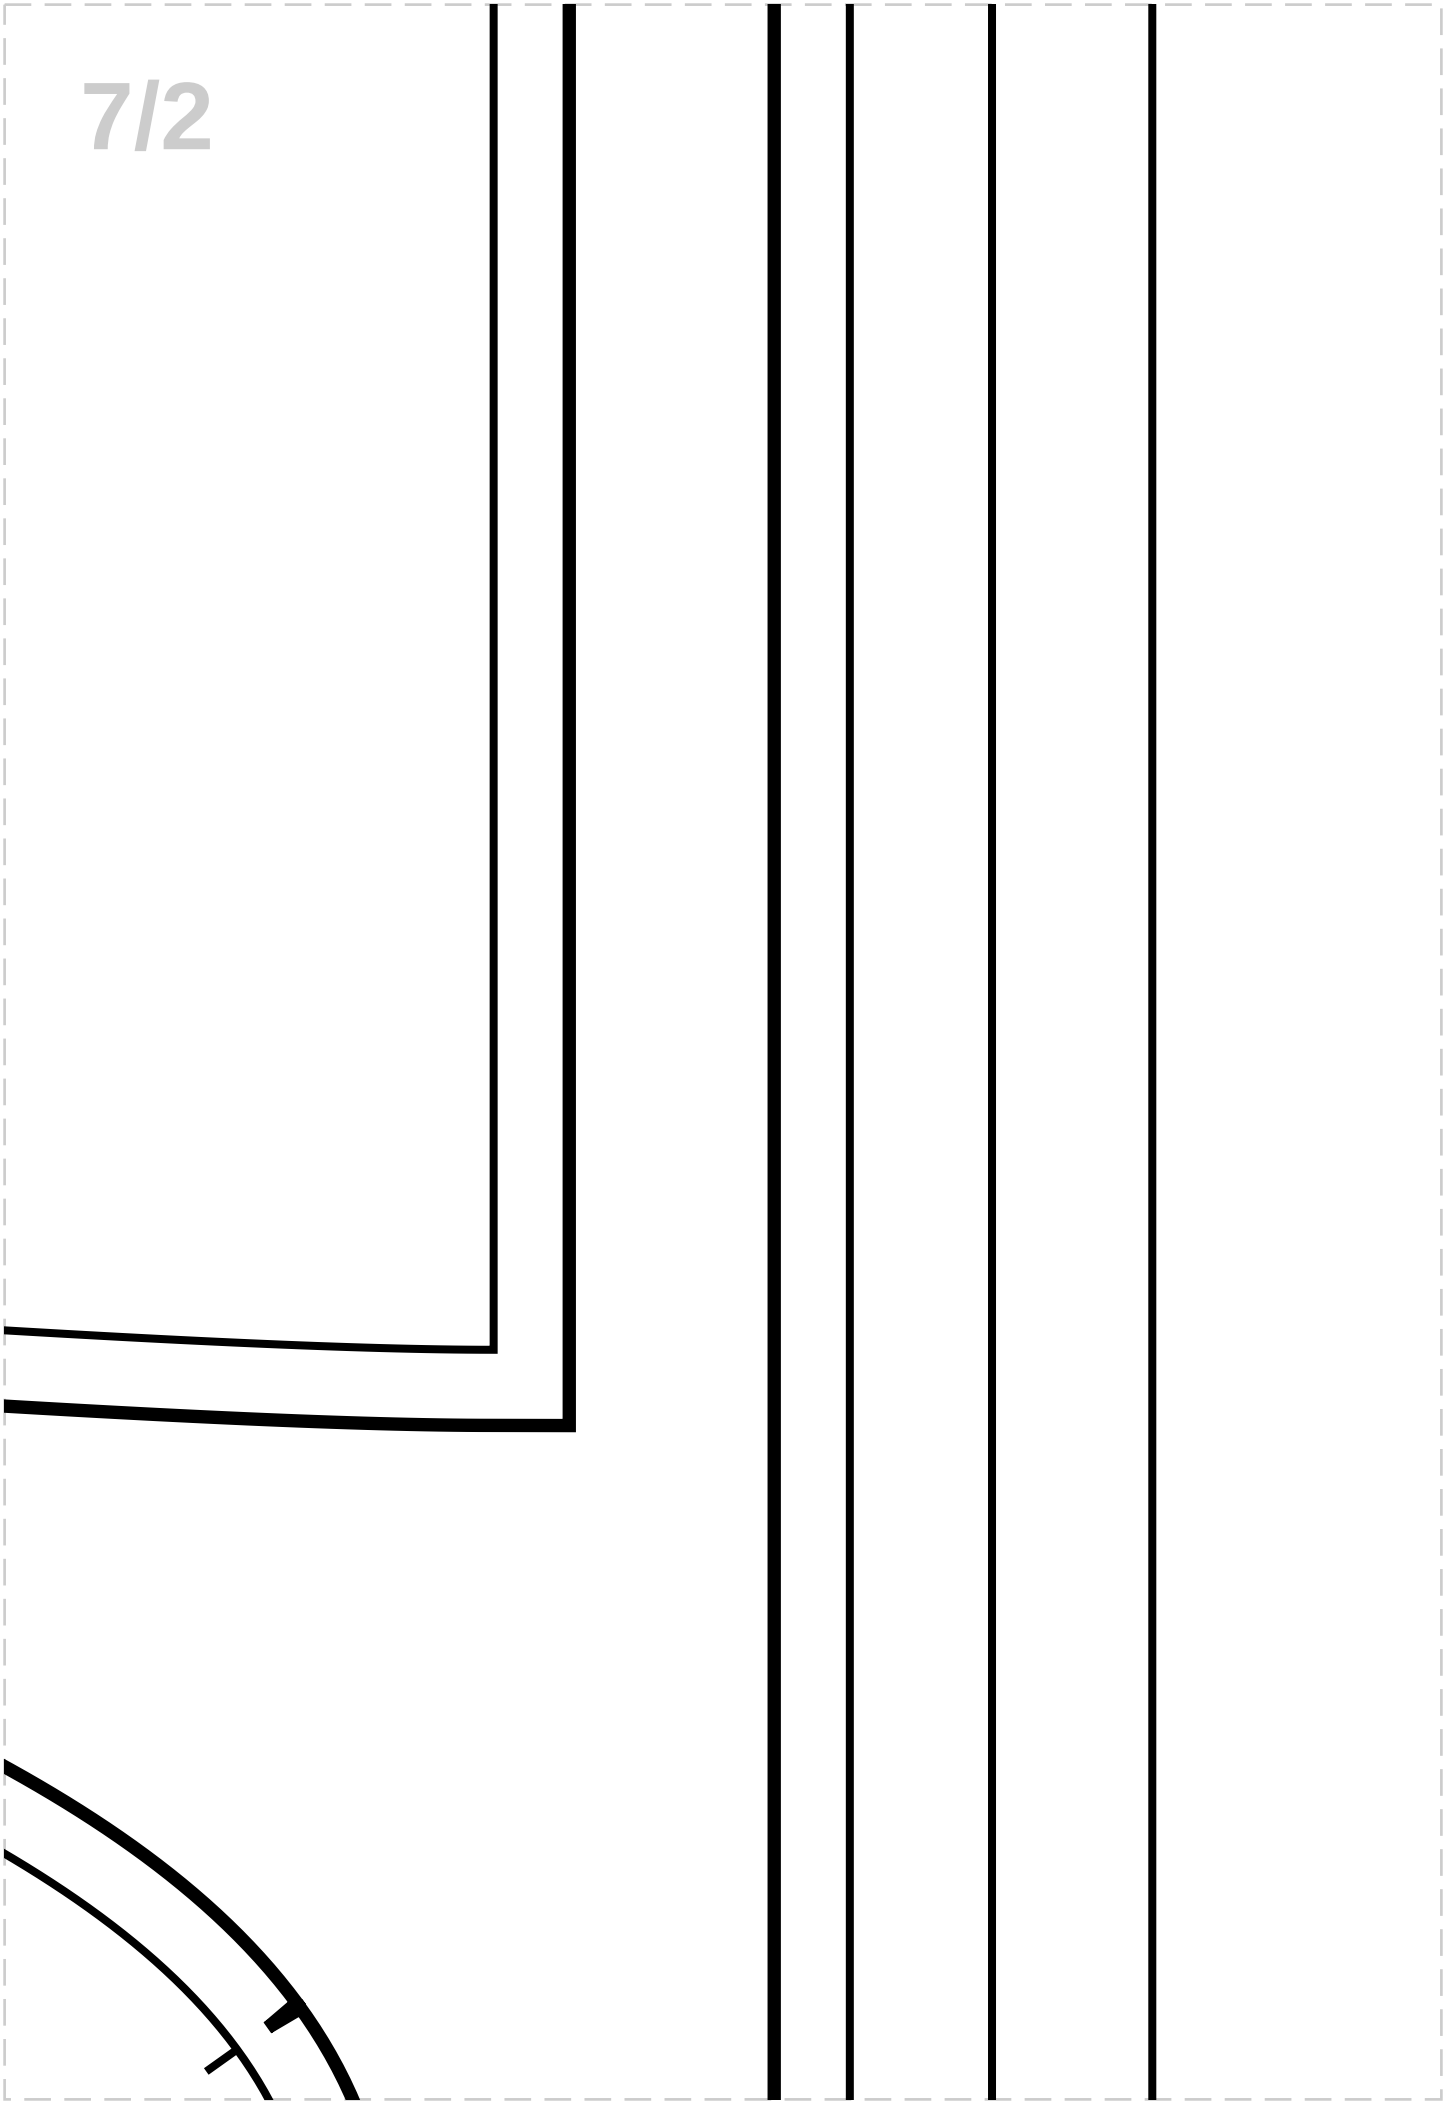


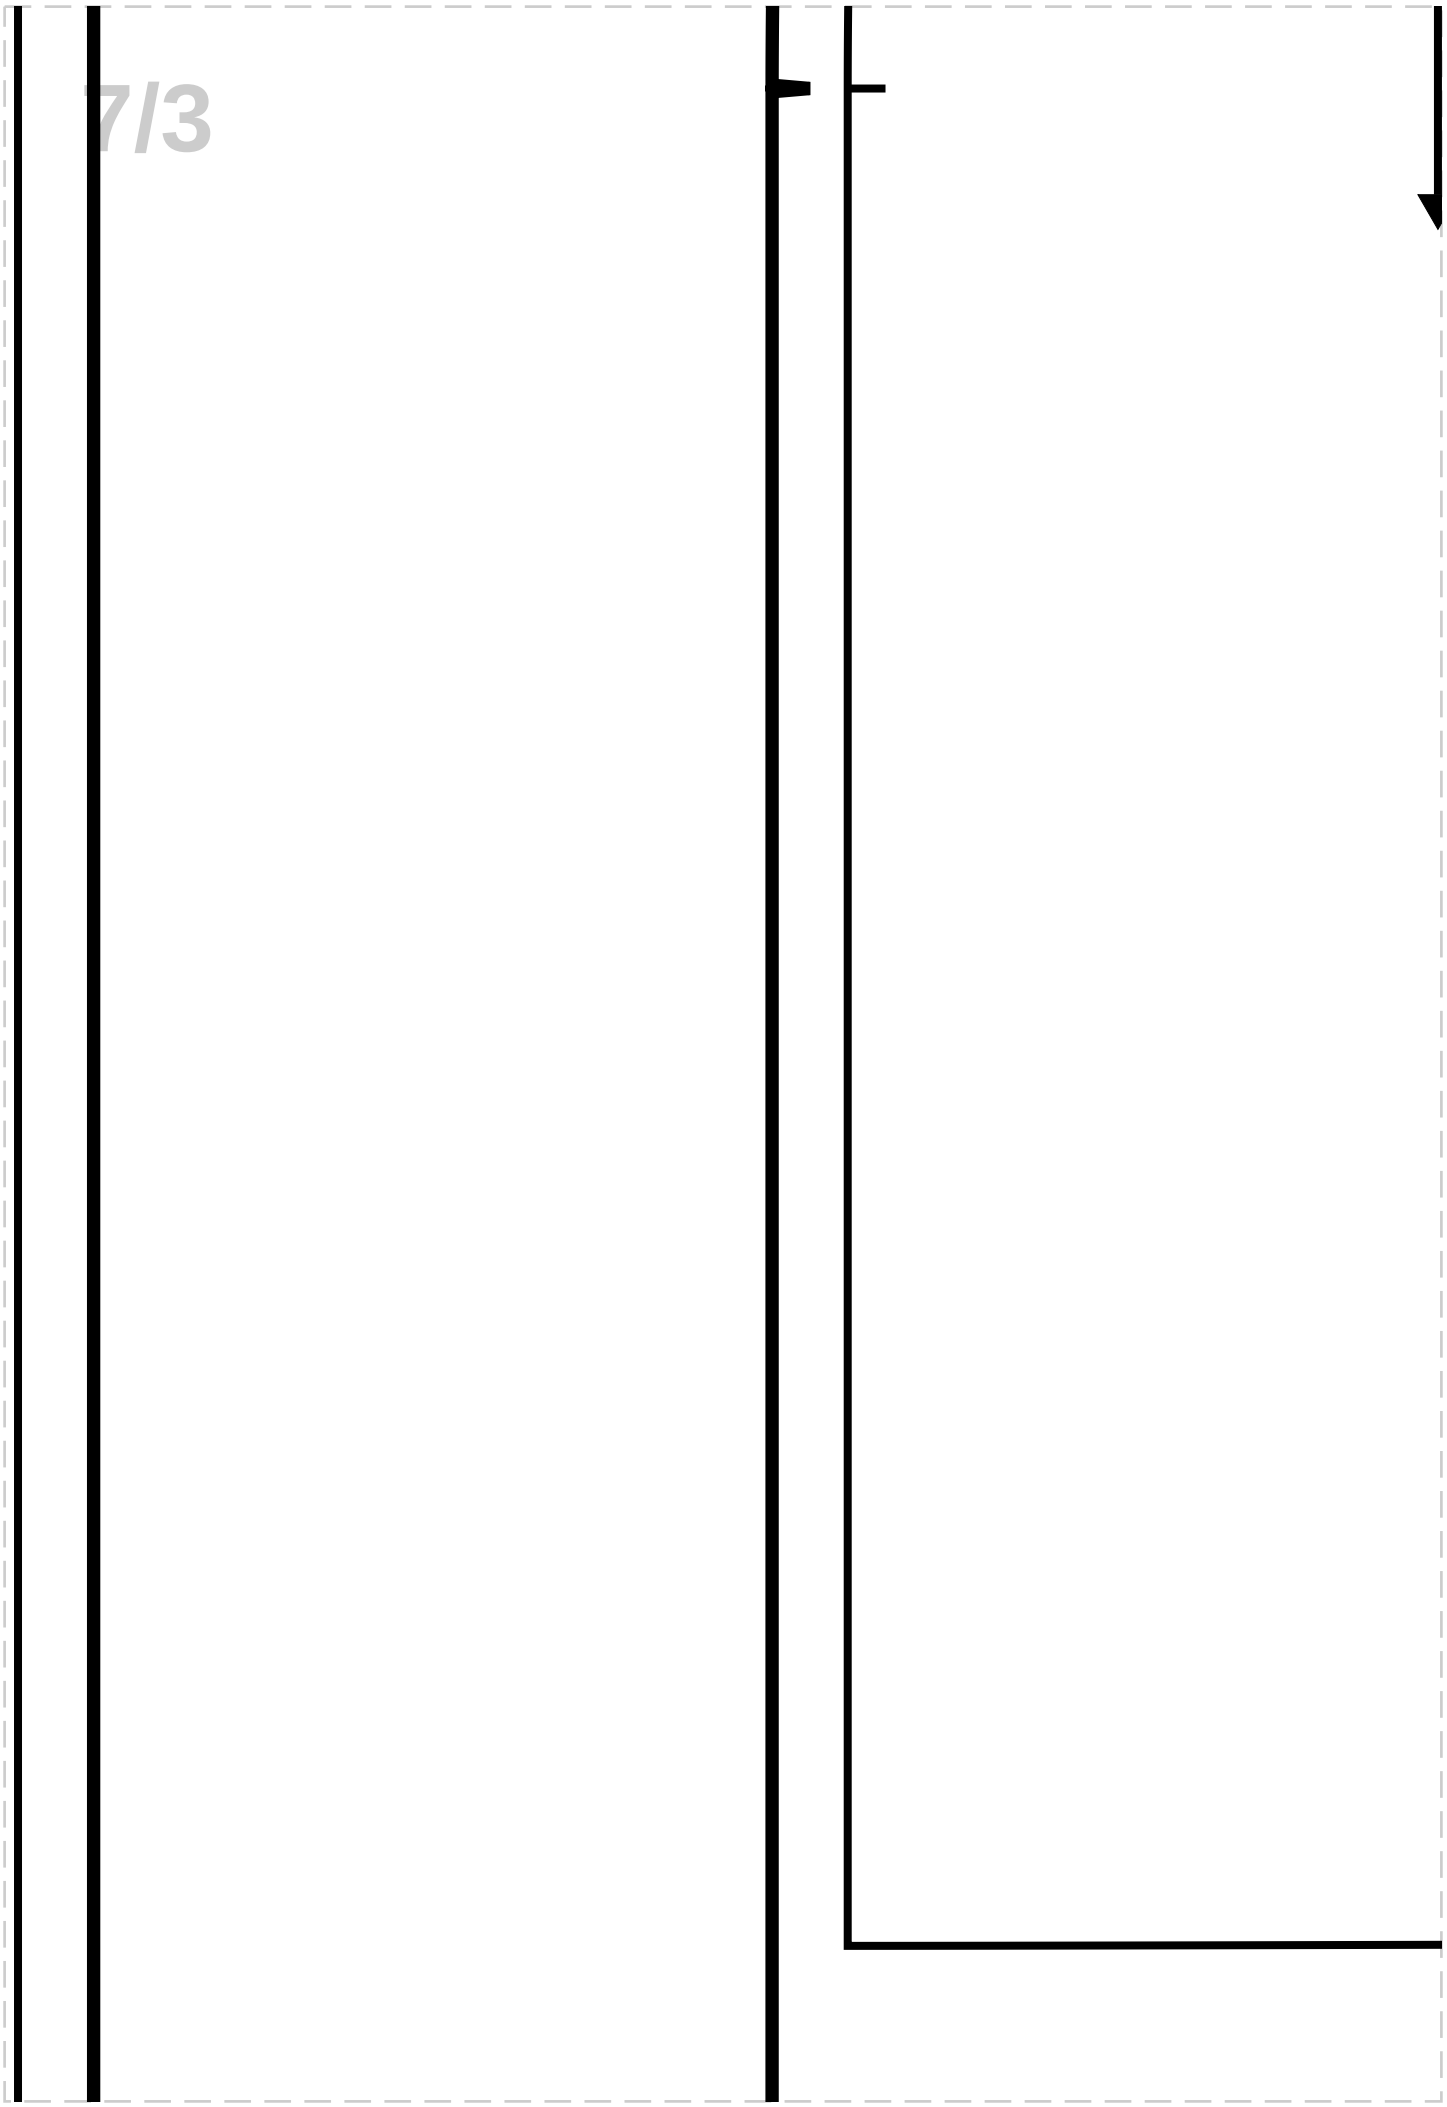


FUSIBLE INTERFACING: Cut 2

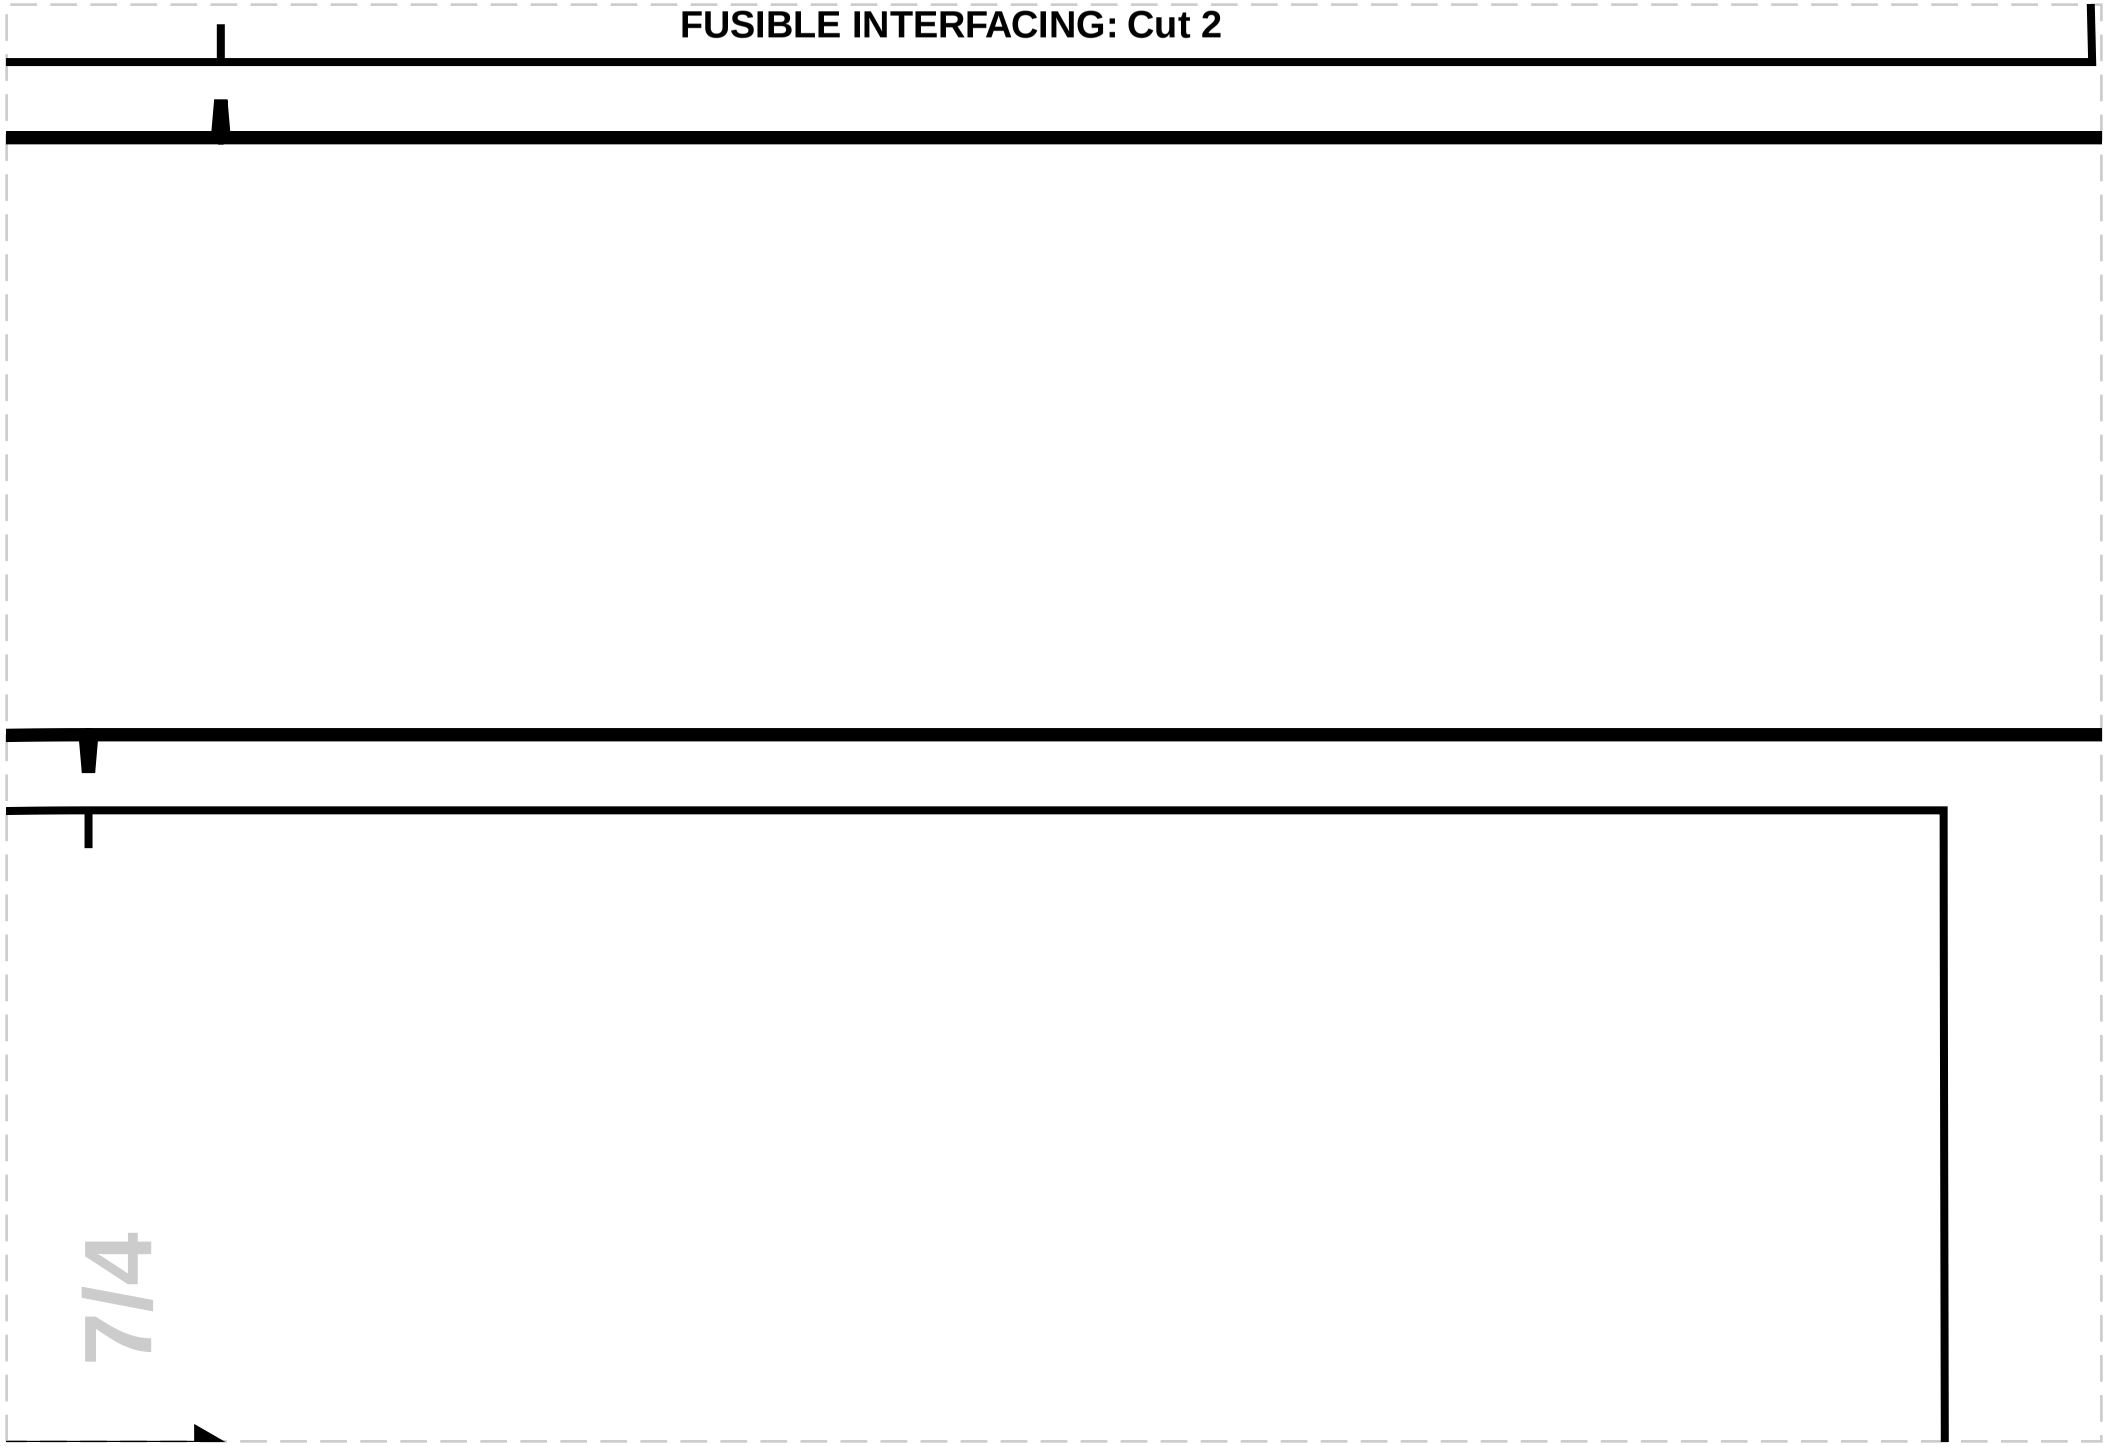


7/4

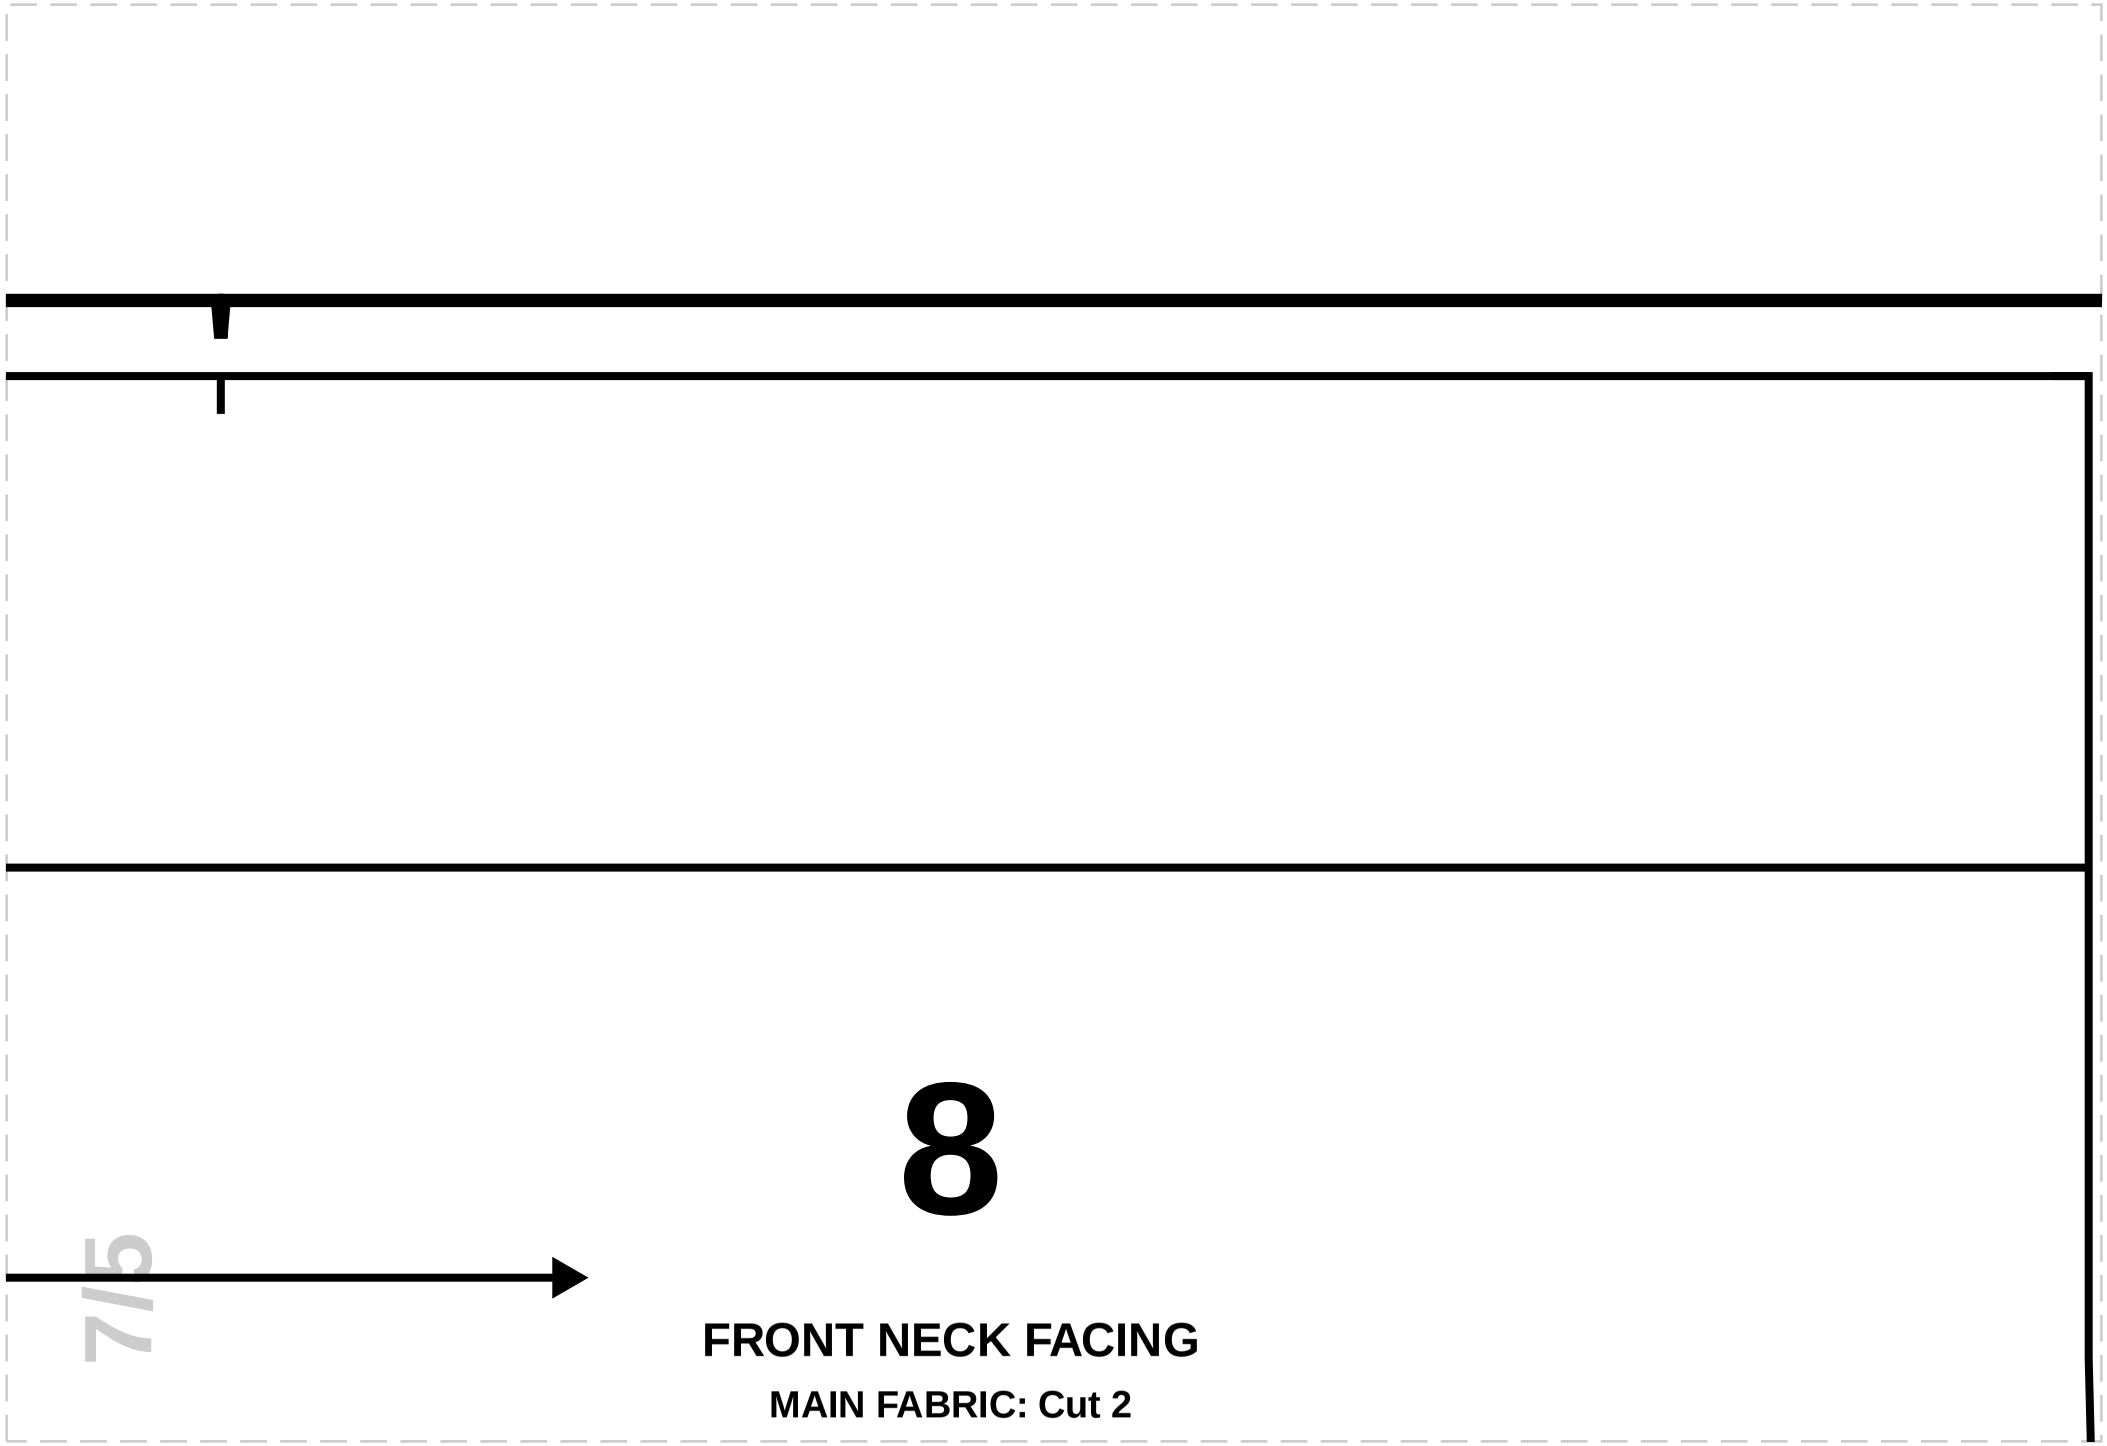

8
7/5
FRONT NECK FACING
MAIN FABRIC: Cut 2


8/1

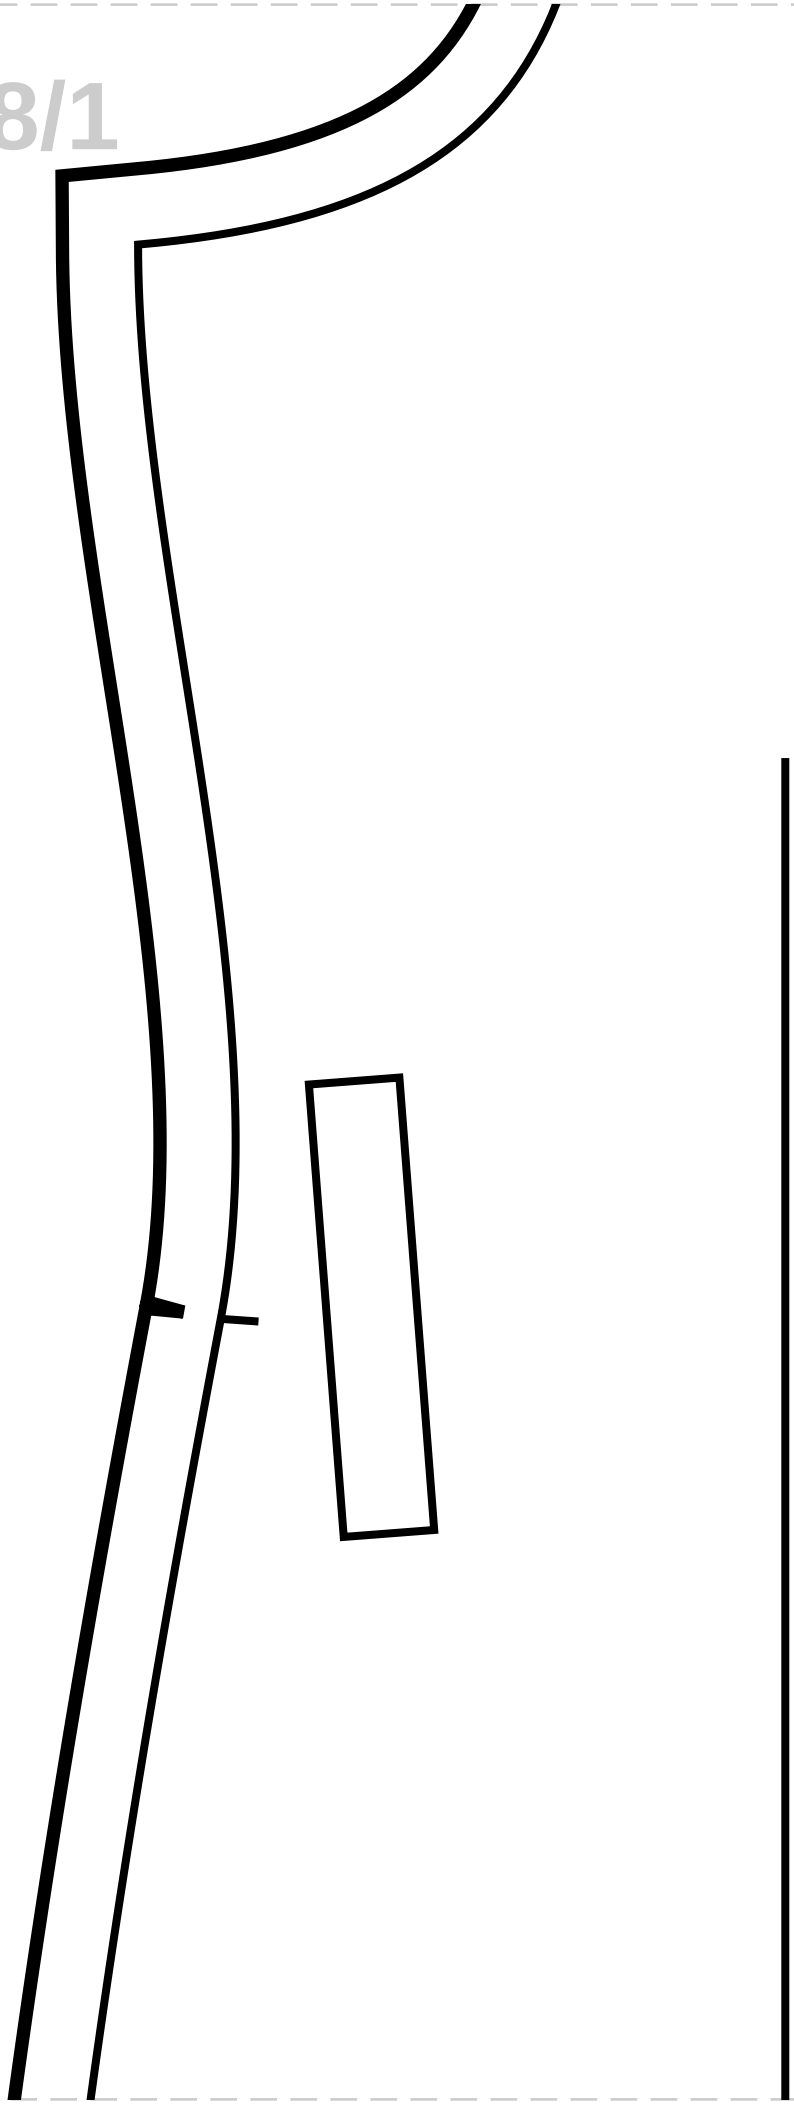


8/2

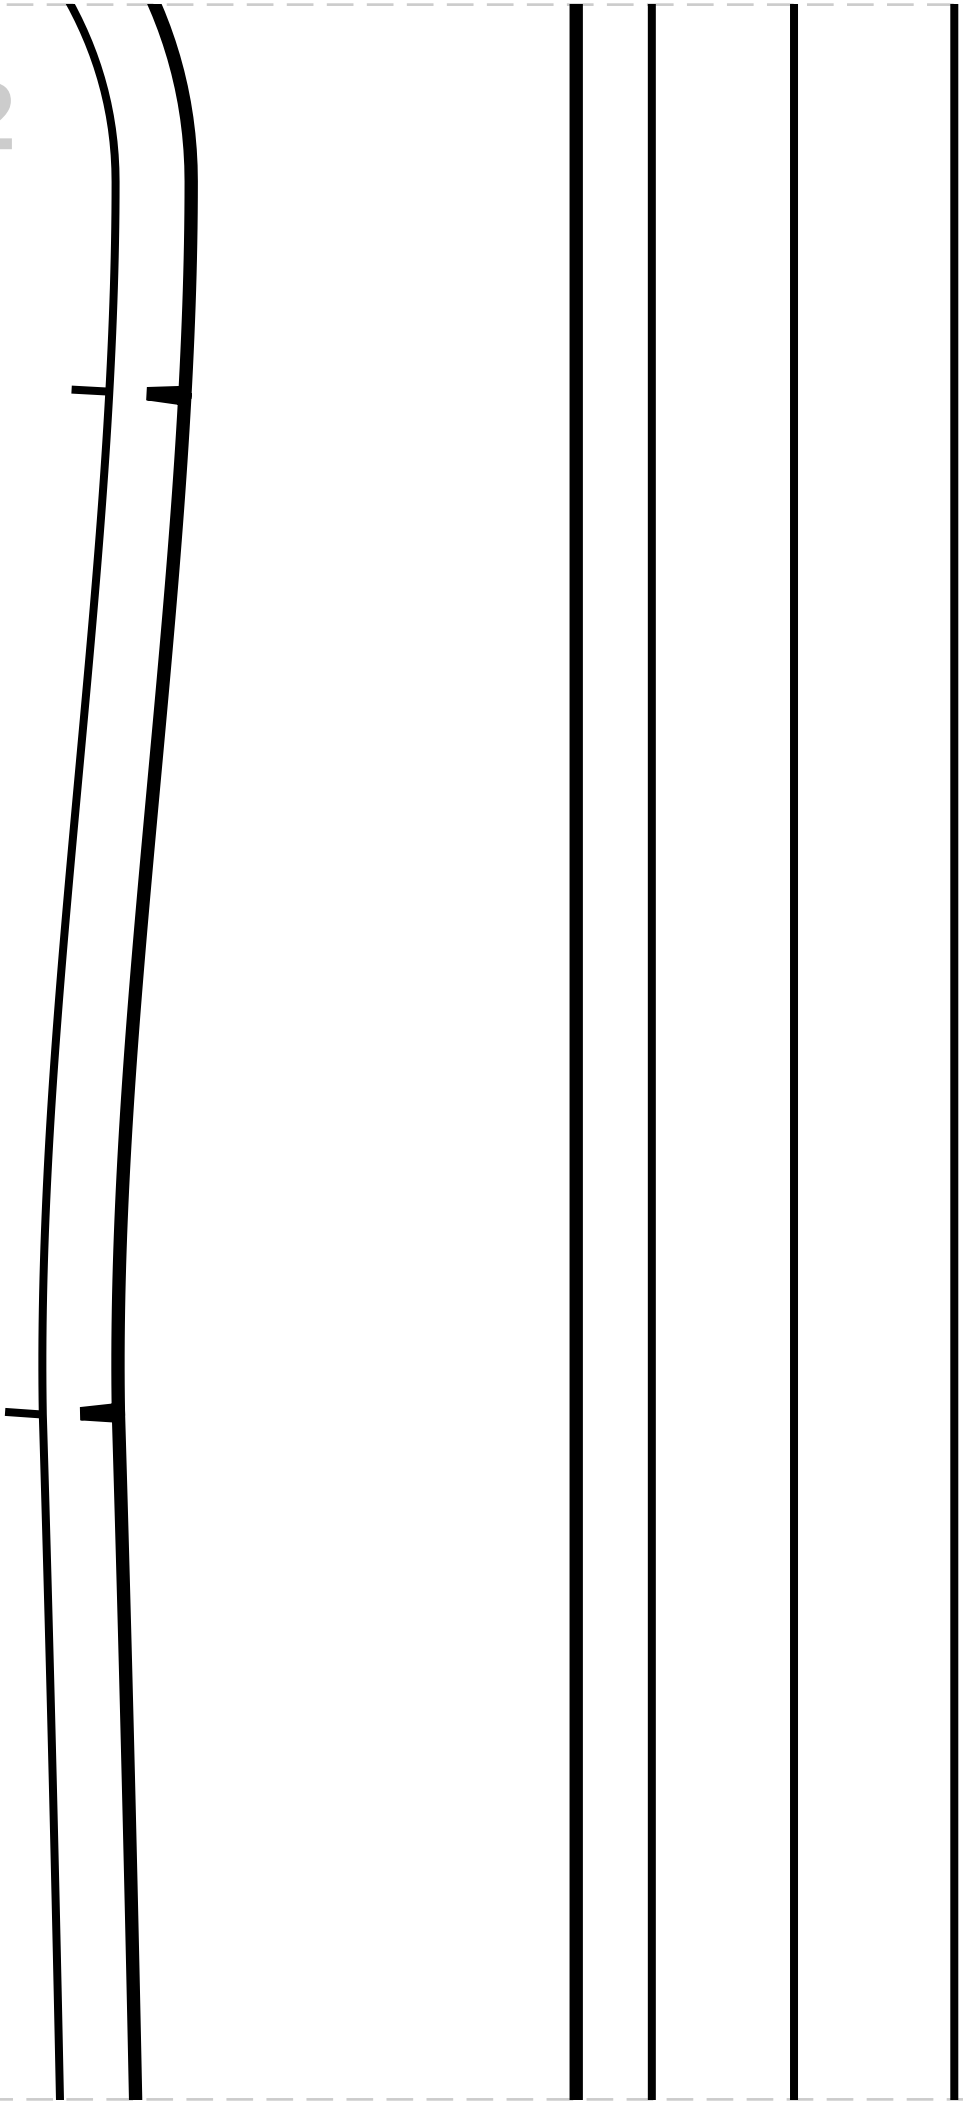

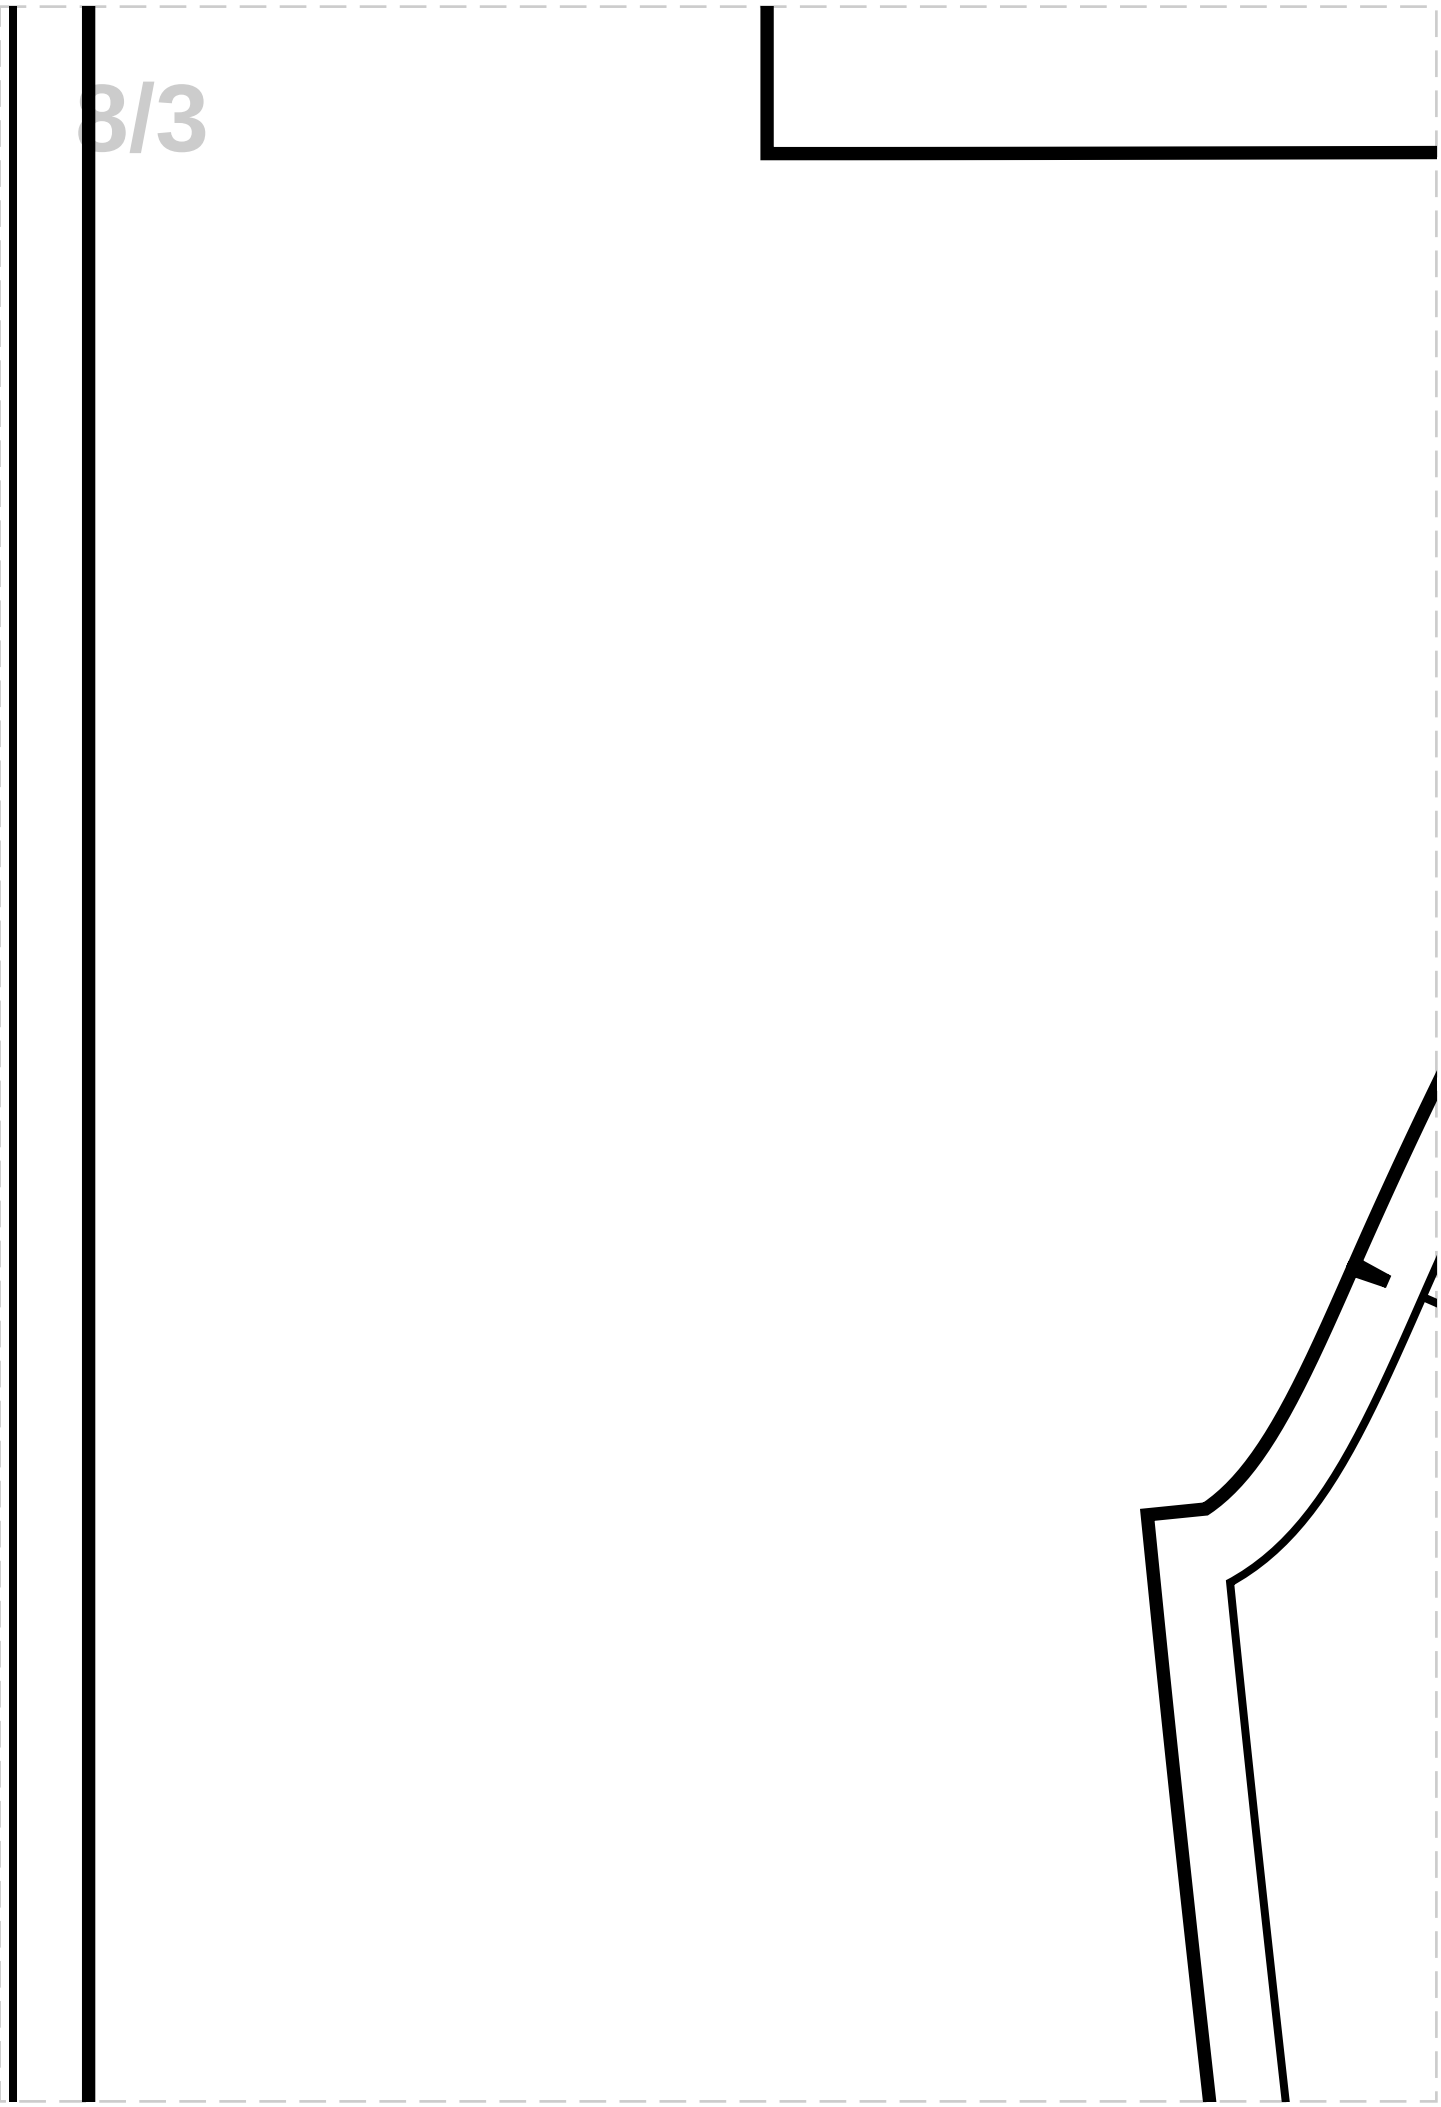

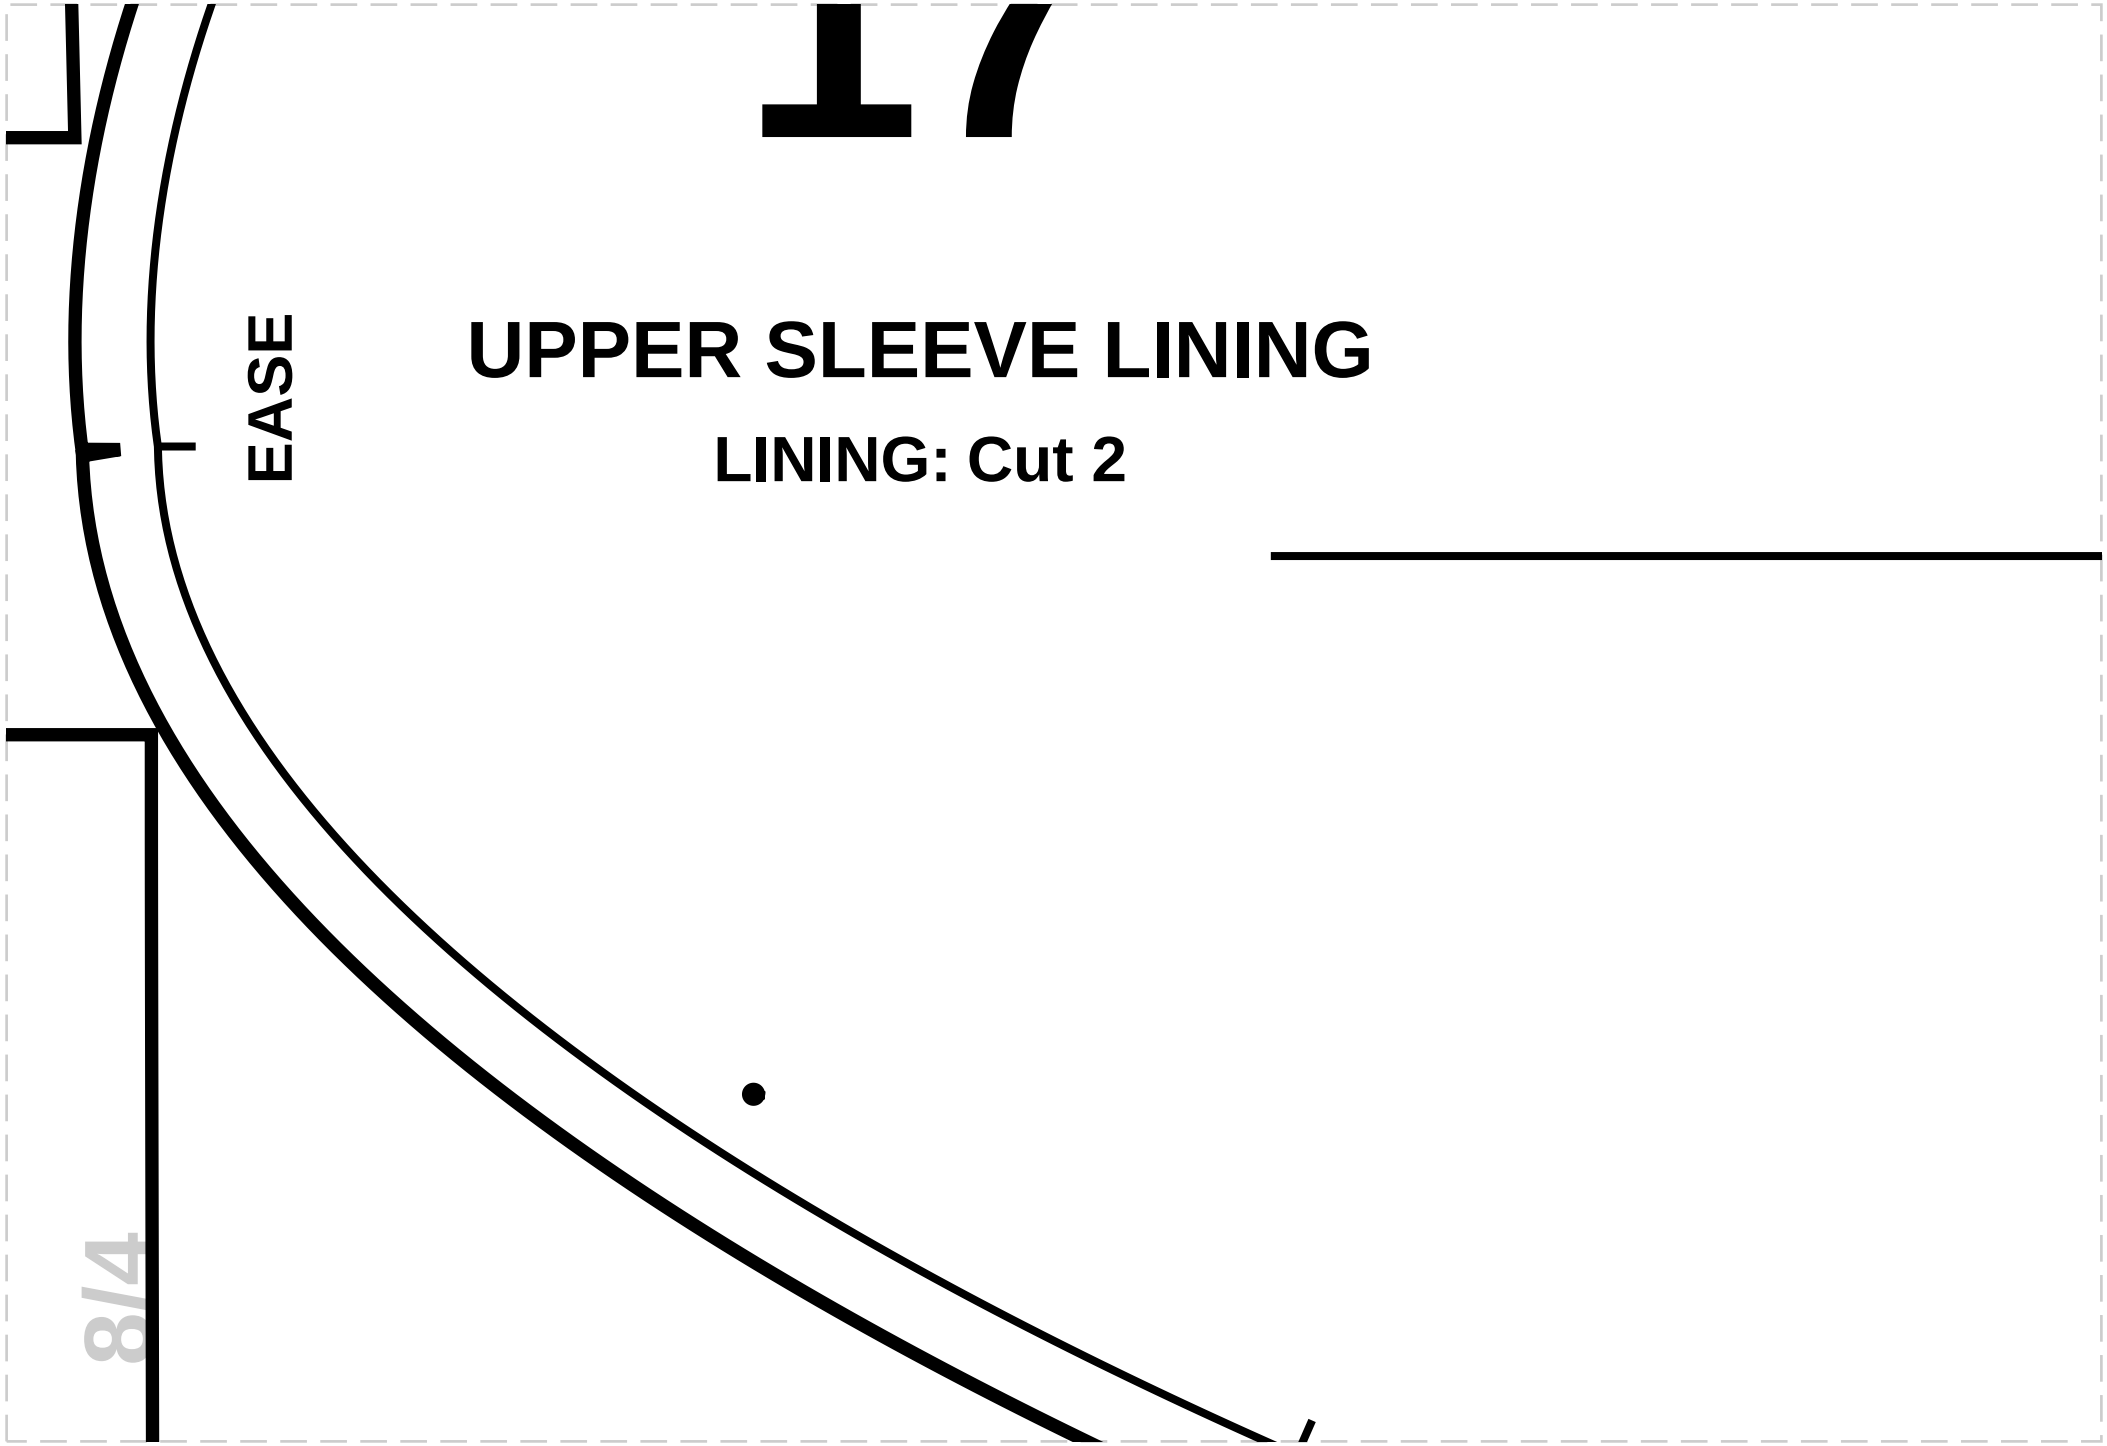
EASE
UPPER SLEEVE LINING
LINING: Cut 2
8/4

8/5

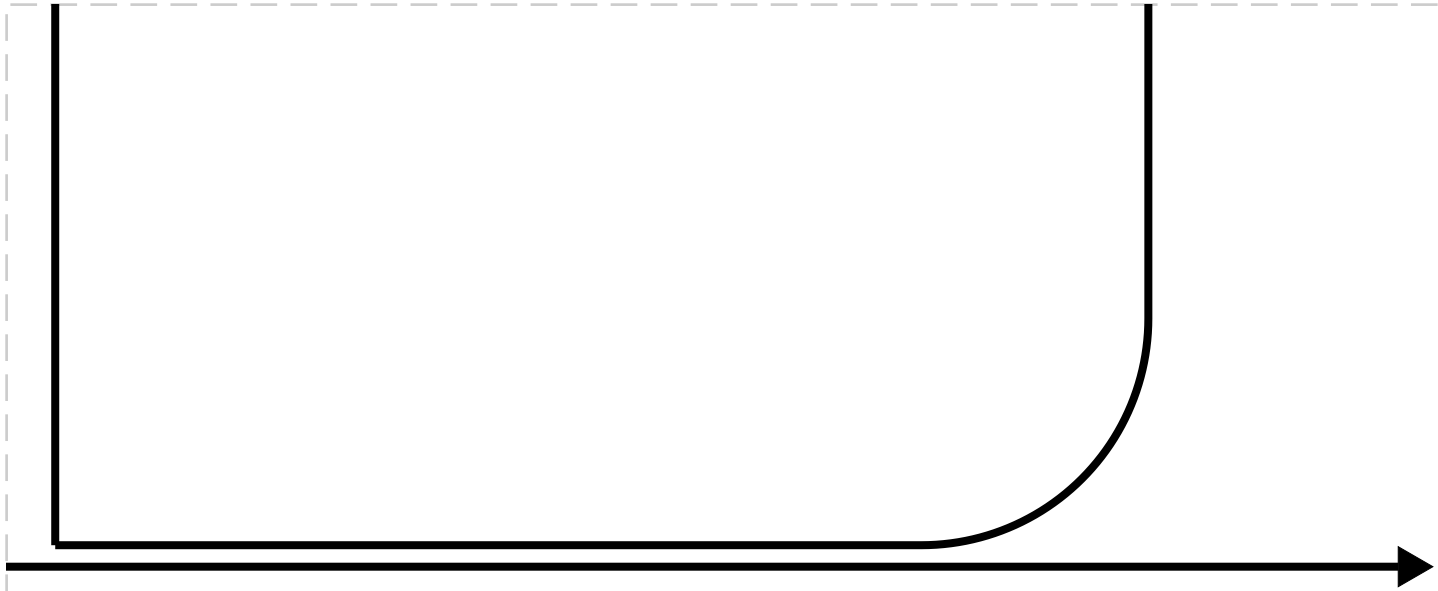



3

SIDE FR


MAIN FABRI


FUSIBLE INTERF

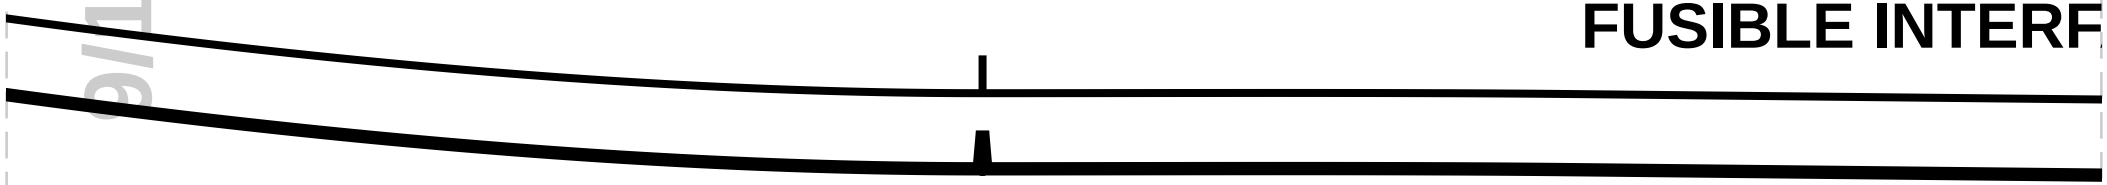


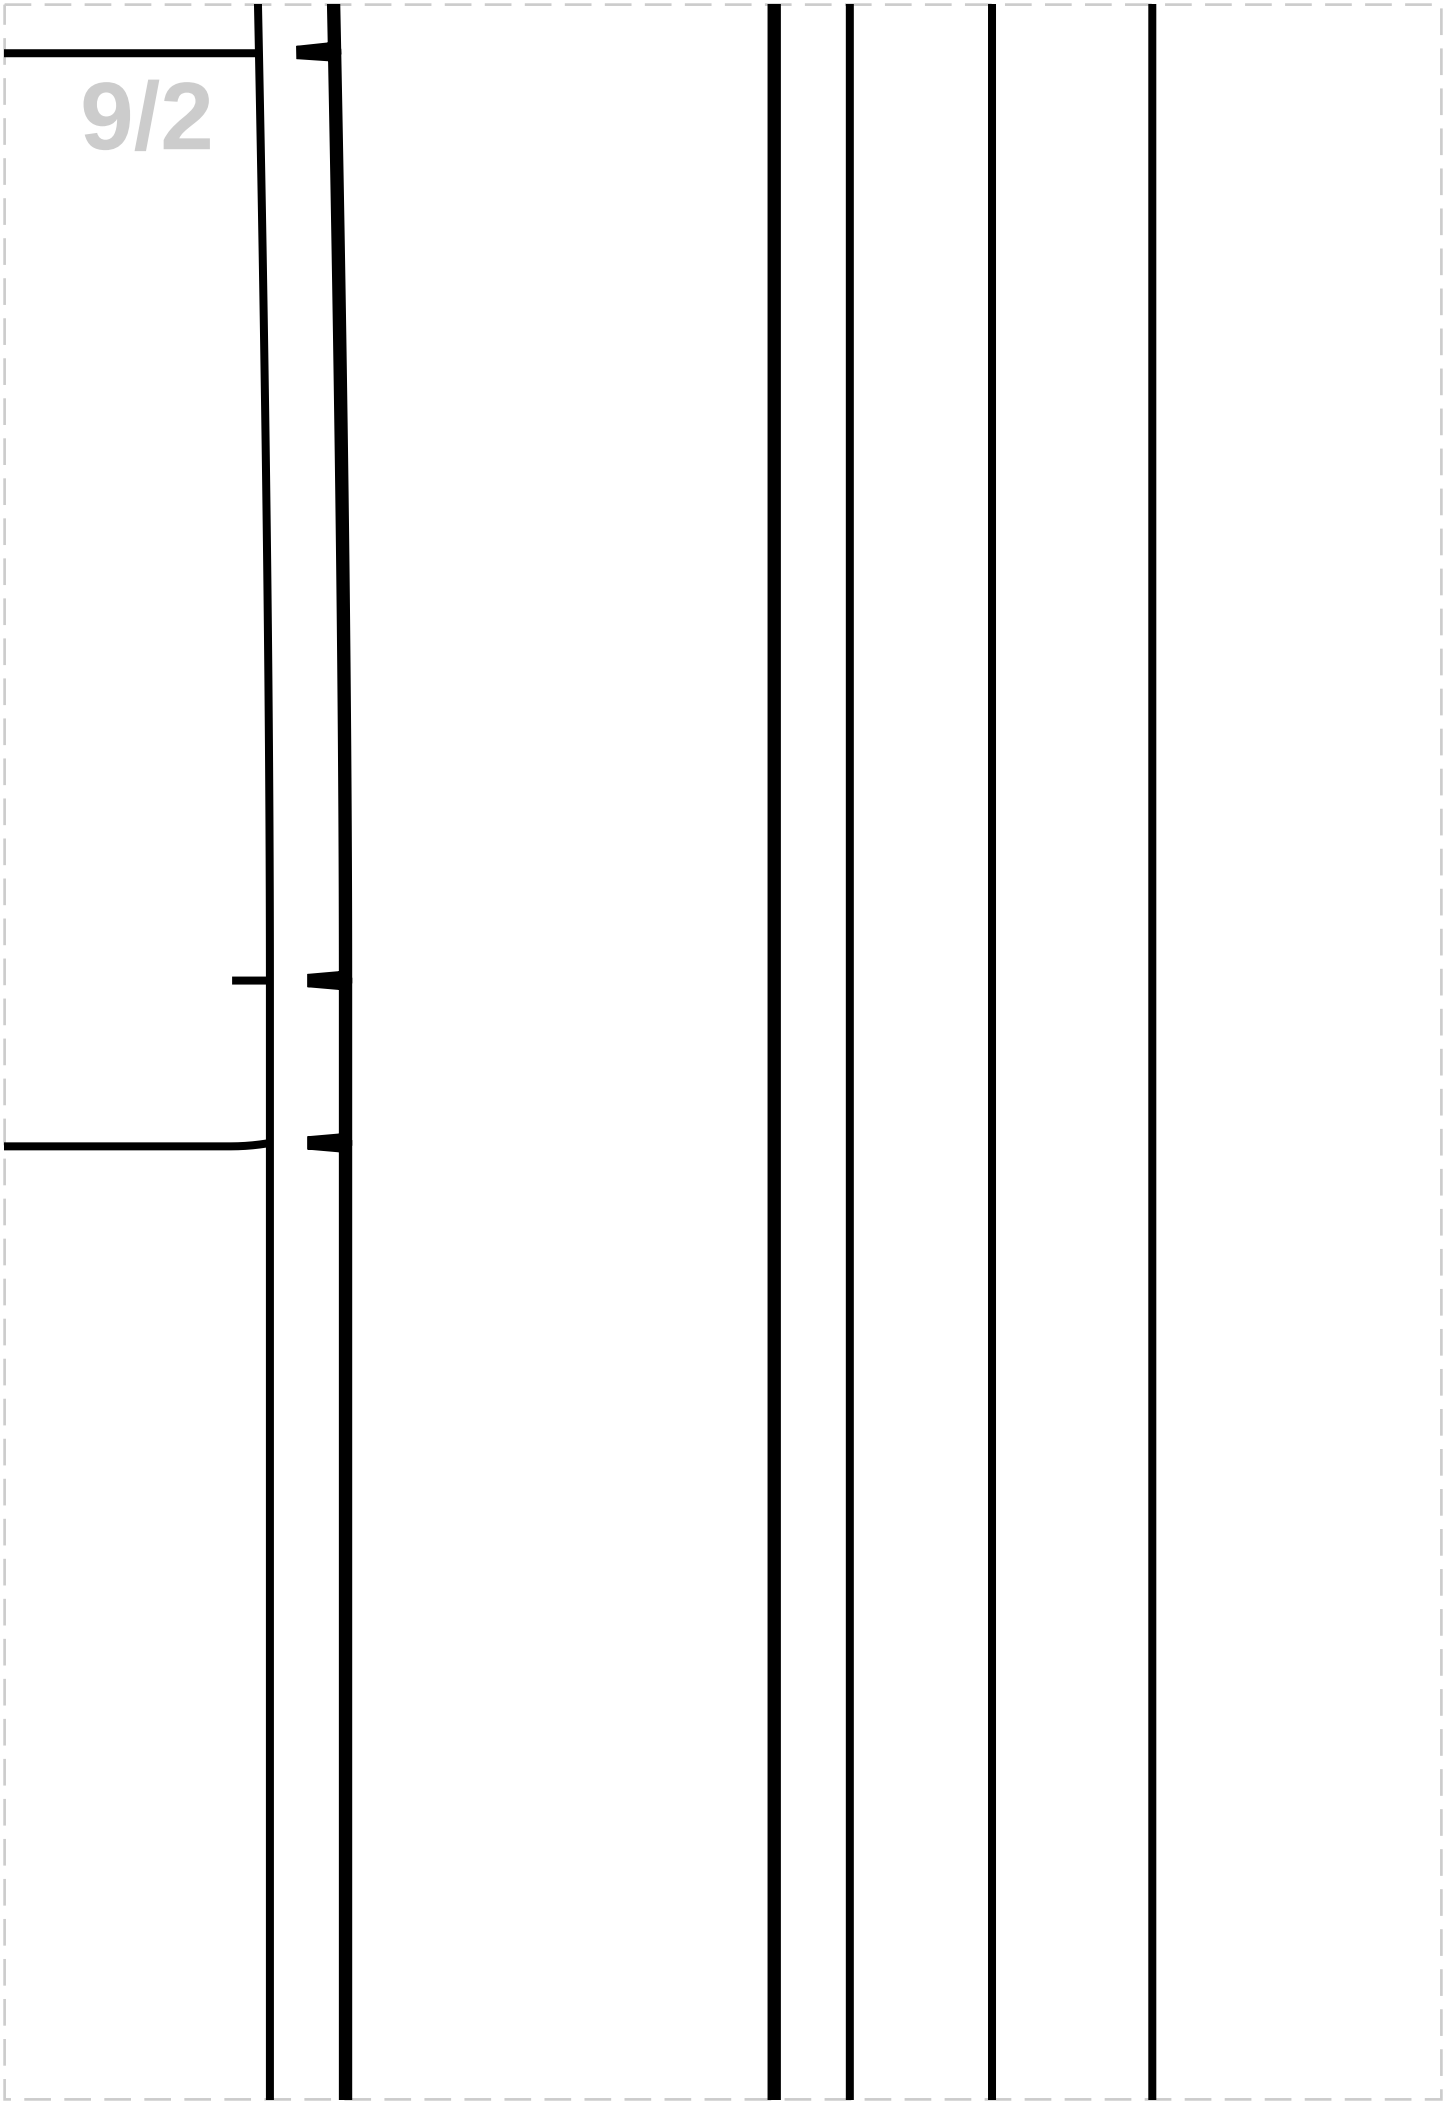

9/2

9/4

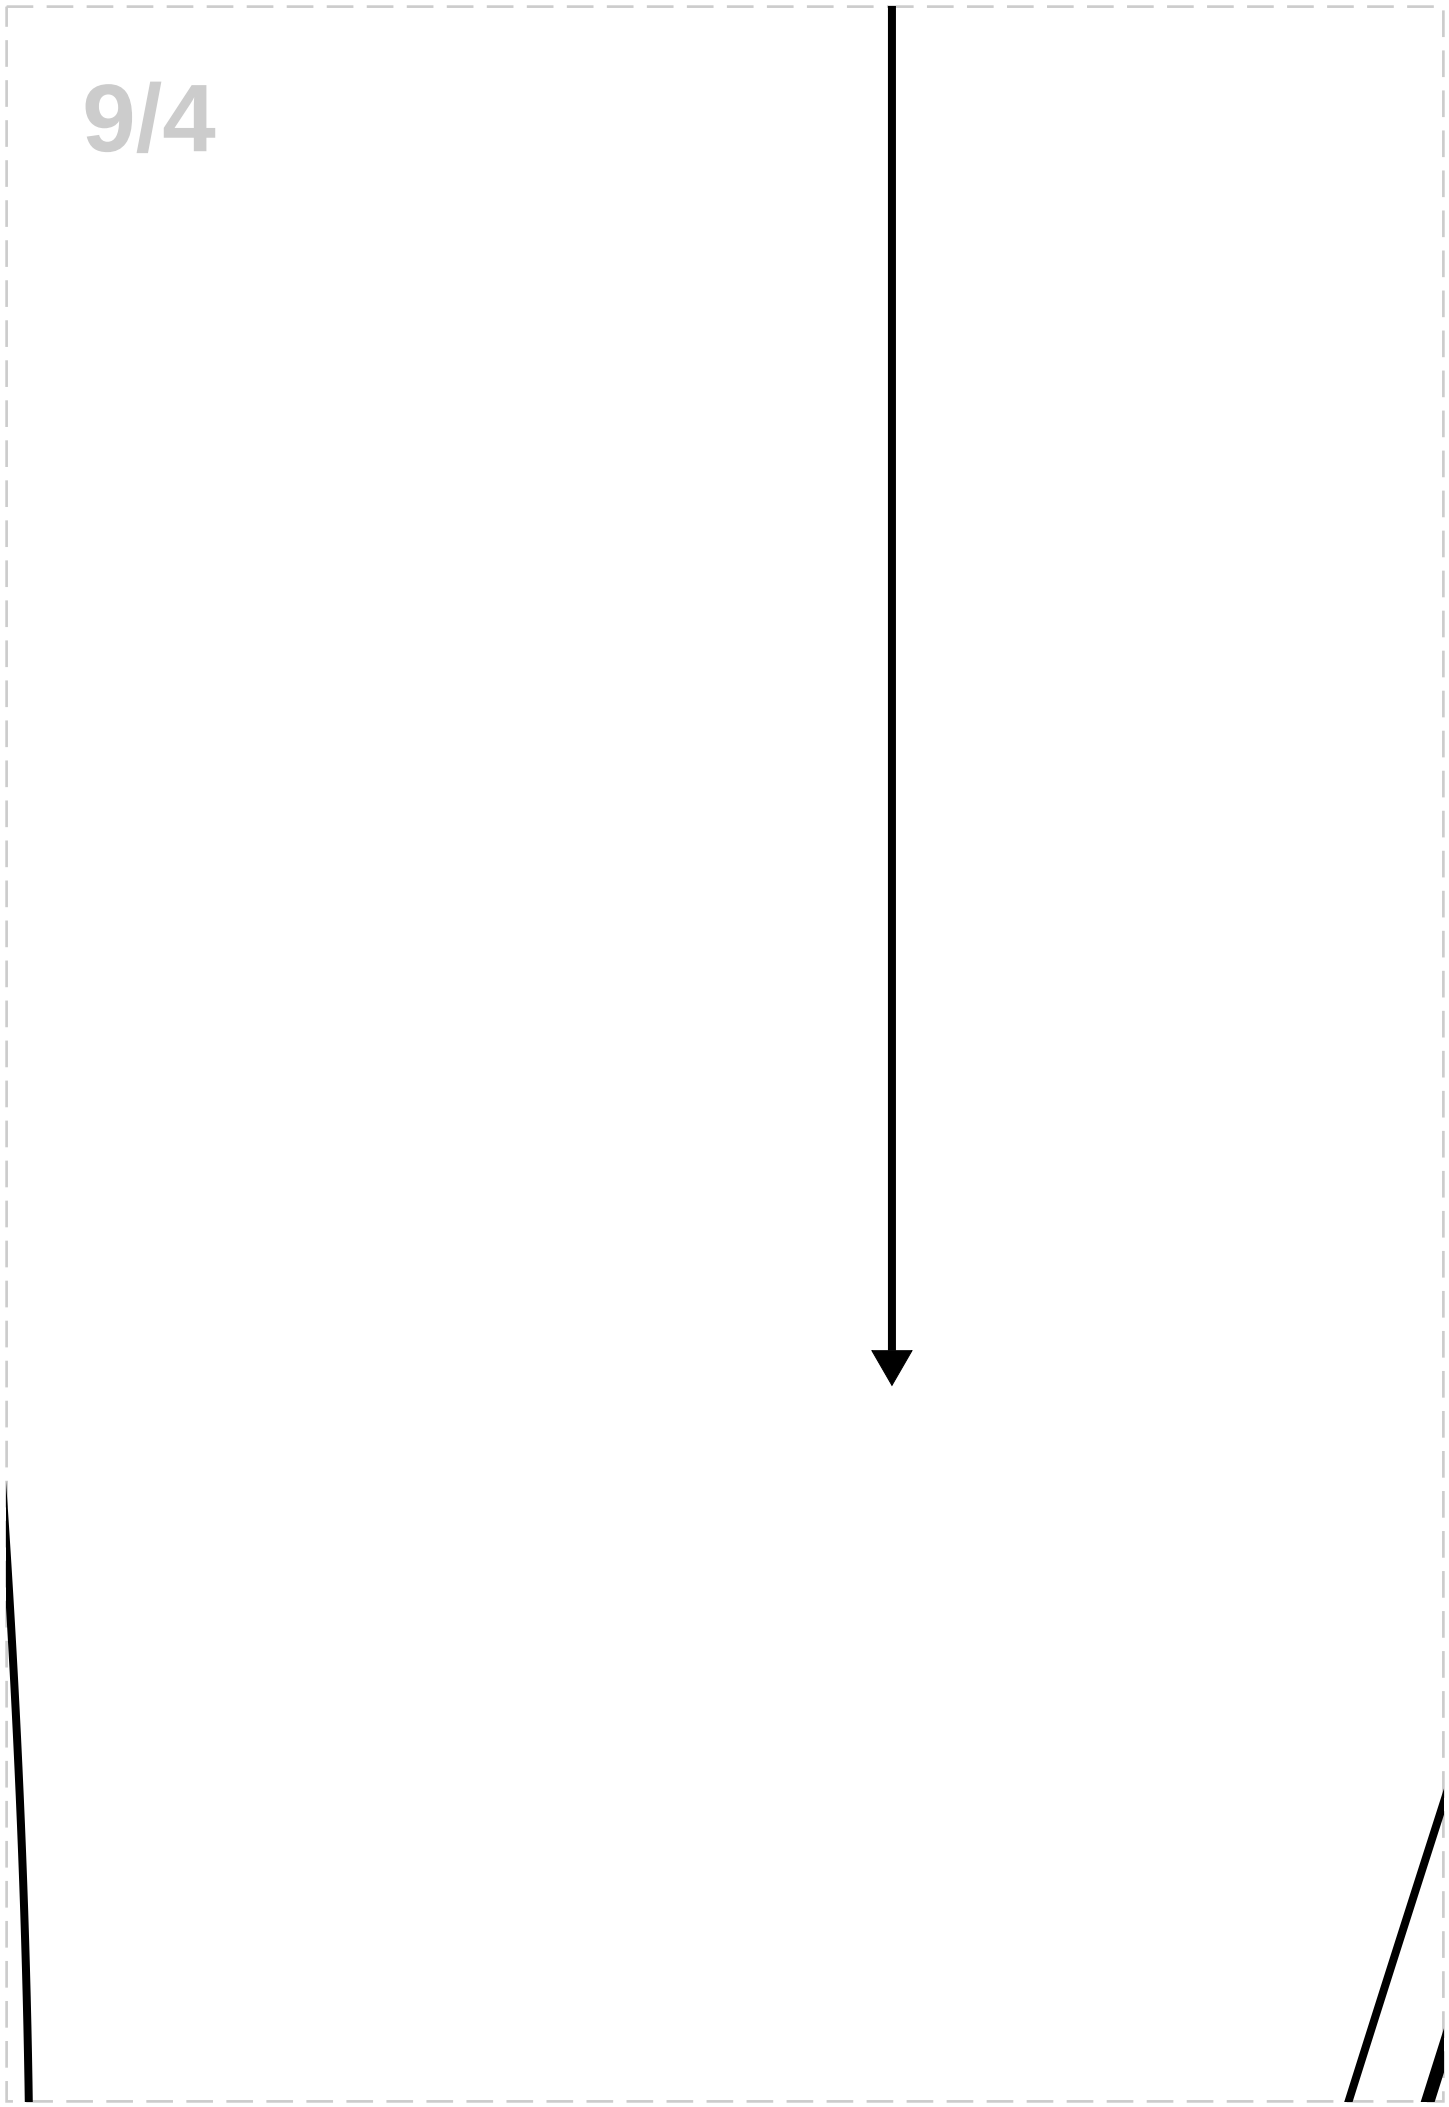


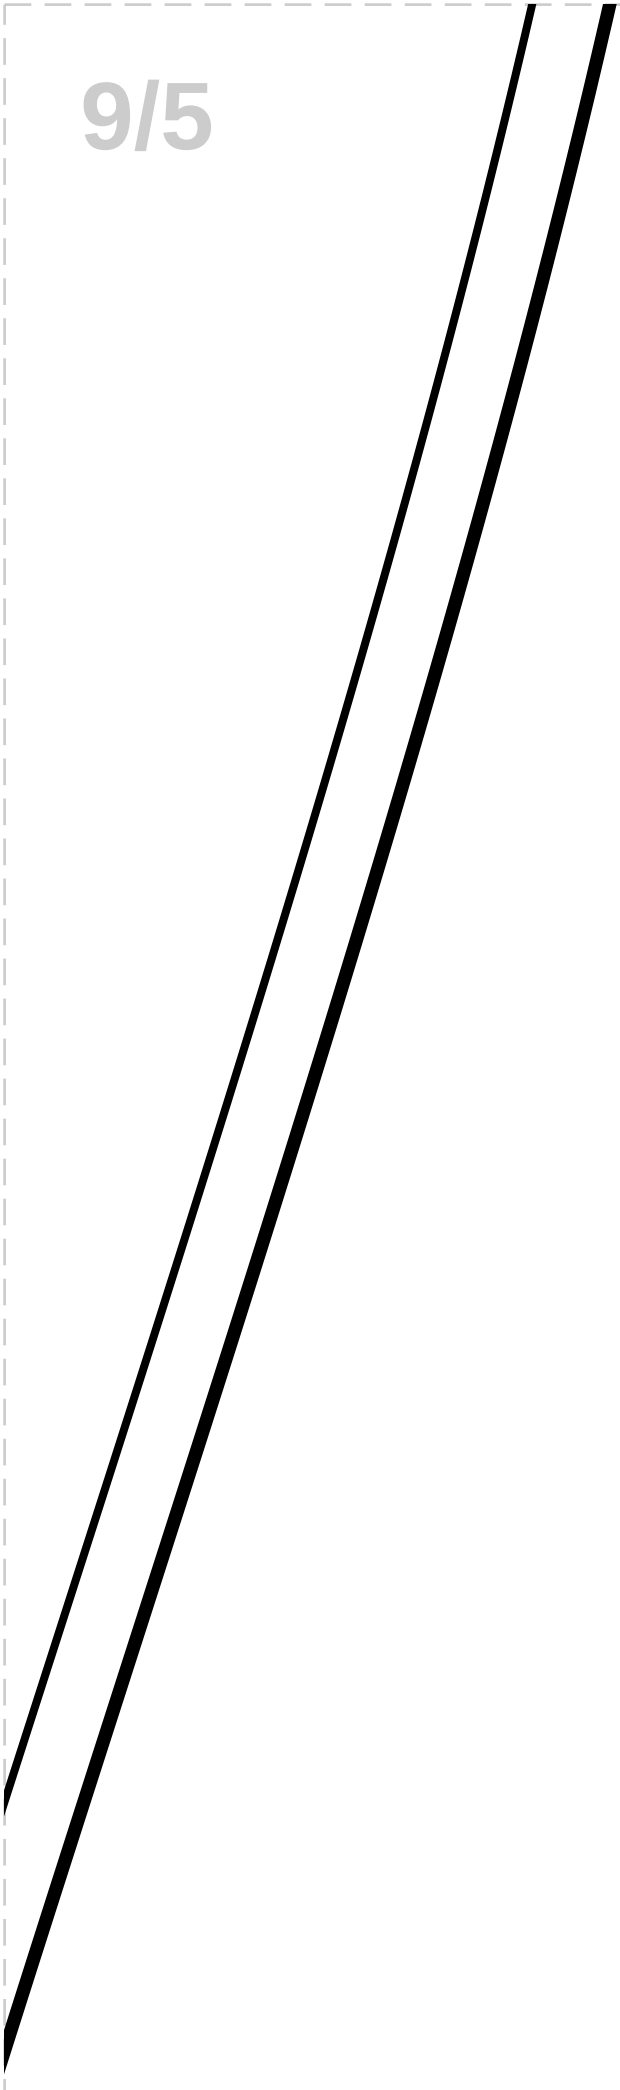


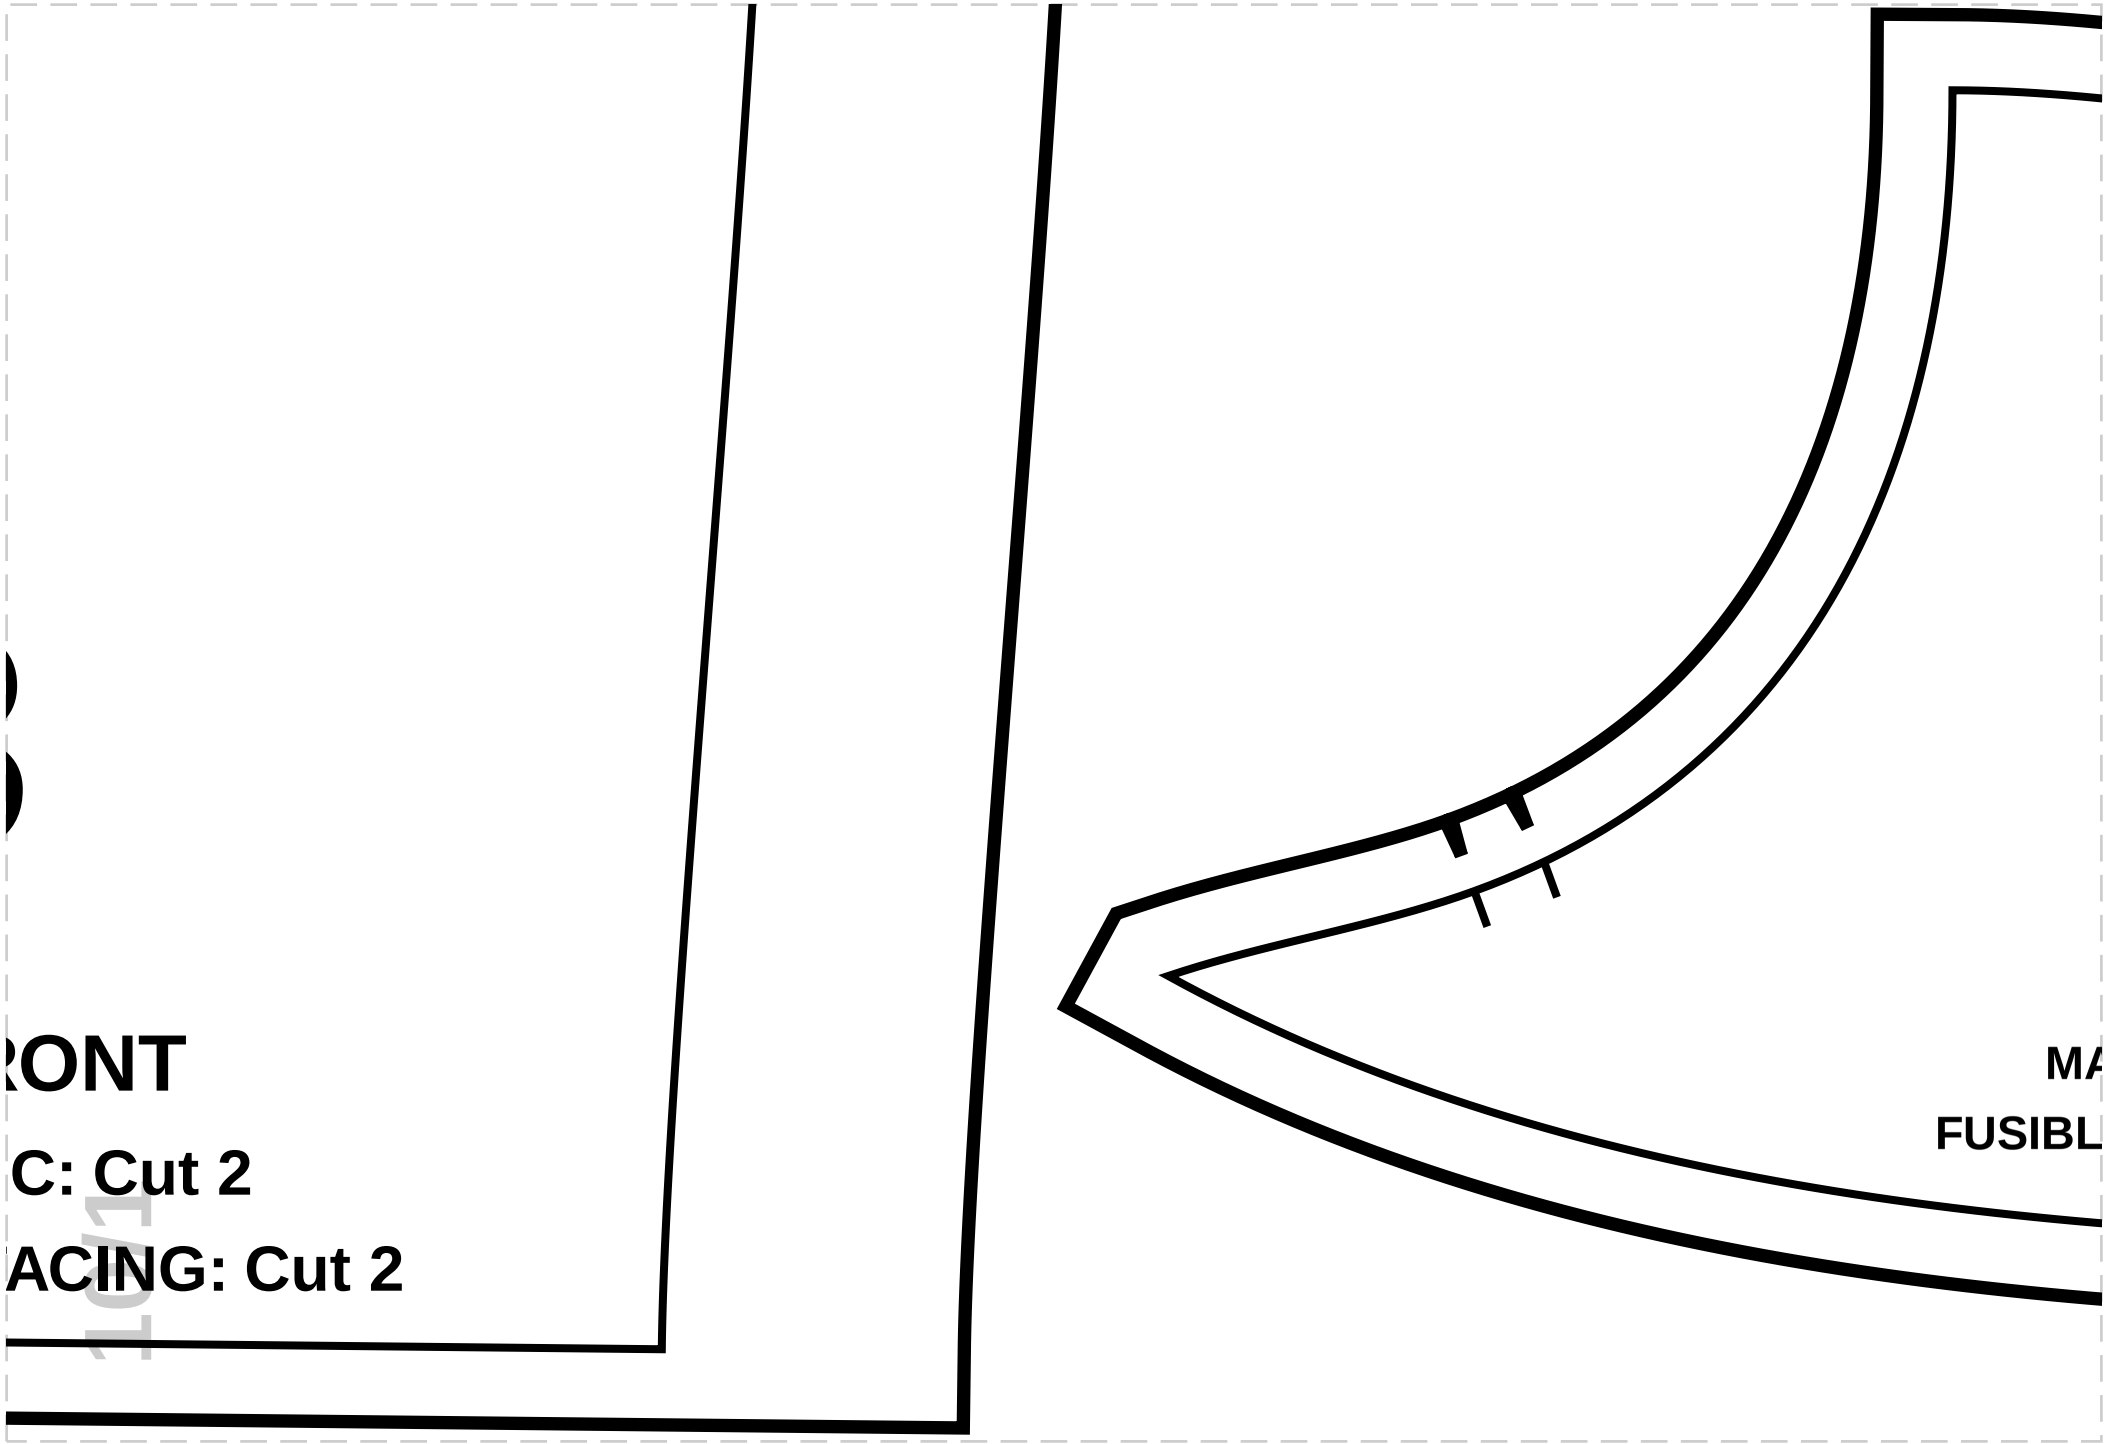

RONT
C: Cut 2
ACING: Cut 2
MA
FUSIBL

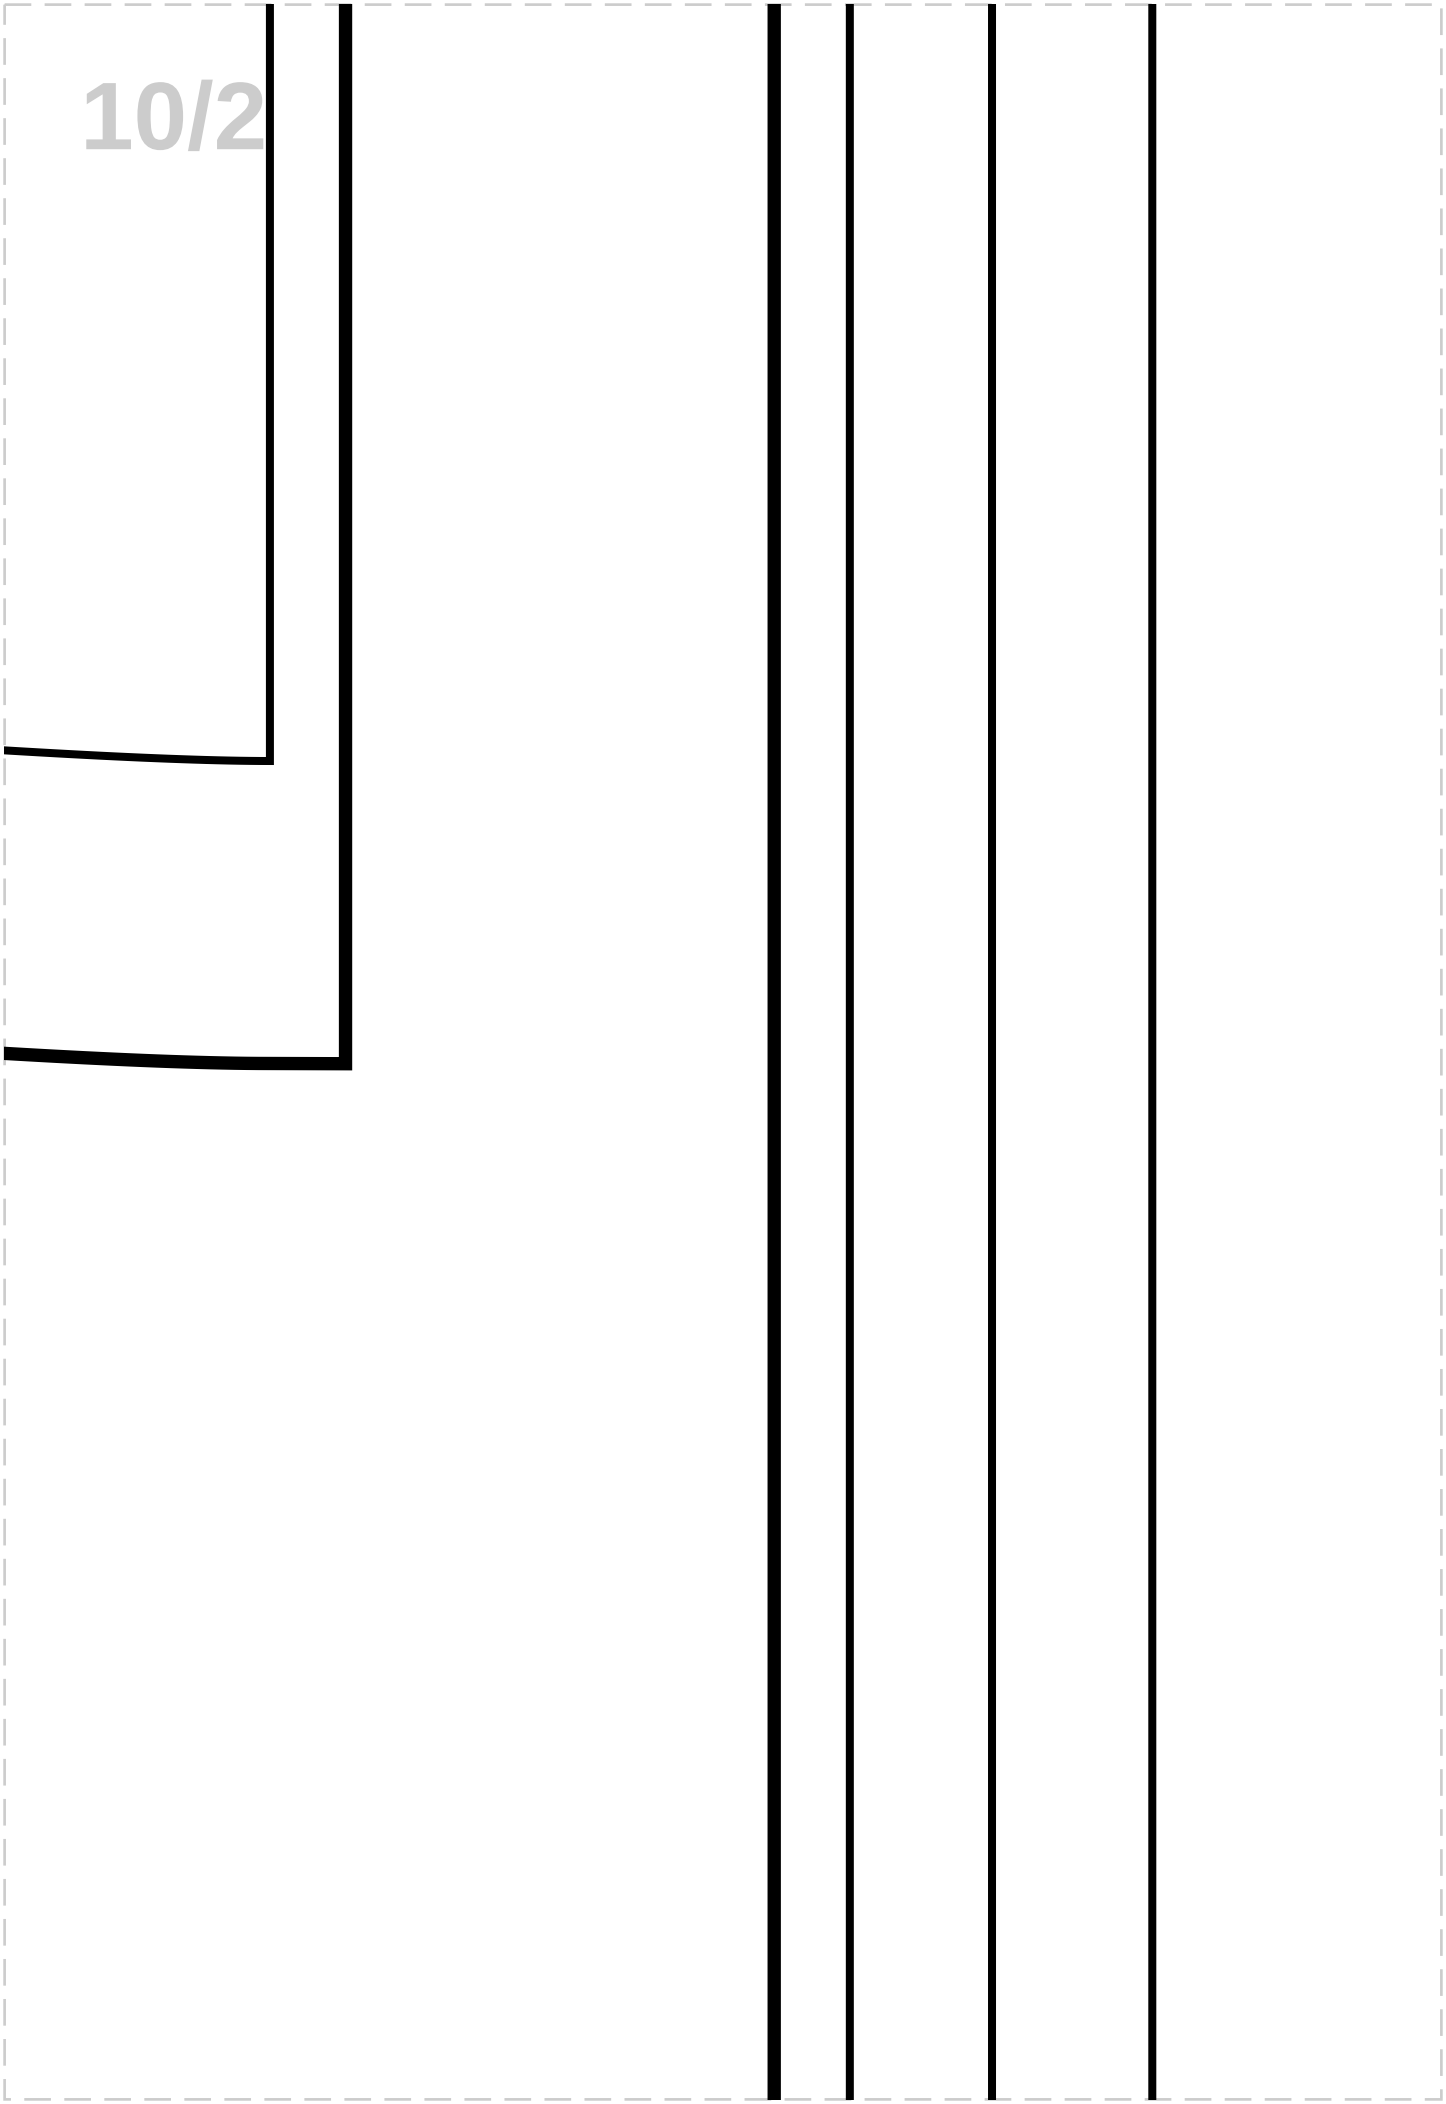


L0/3

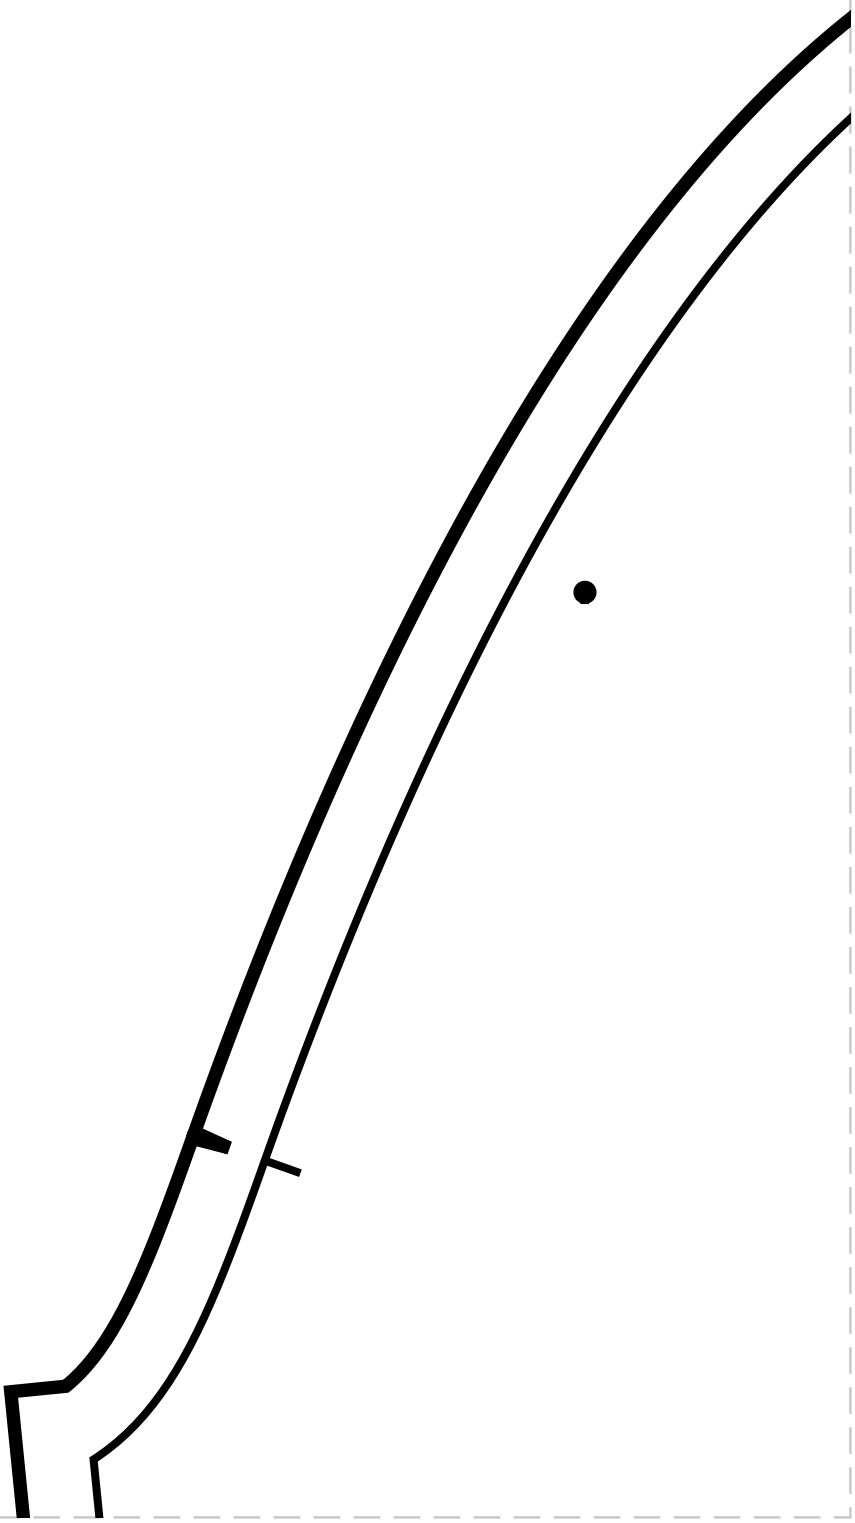

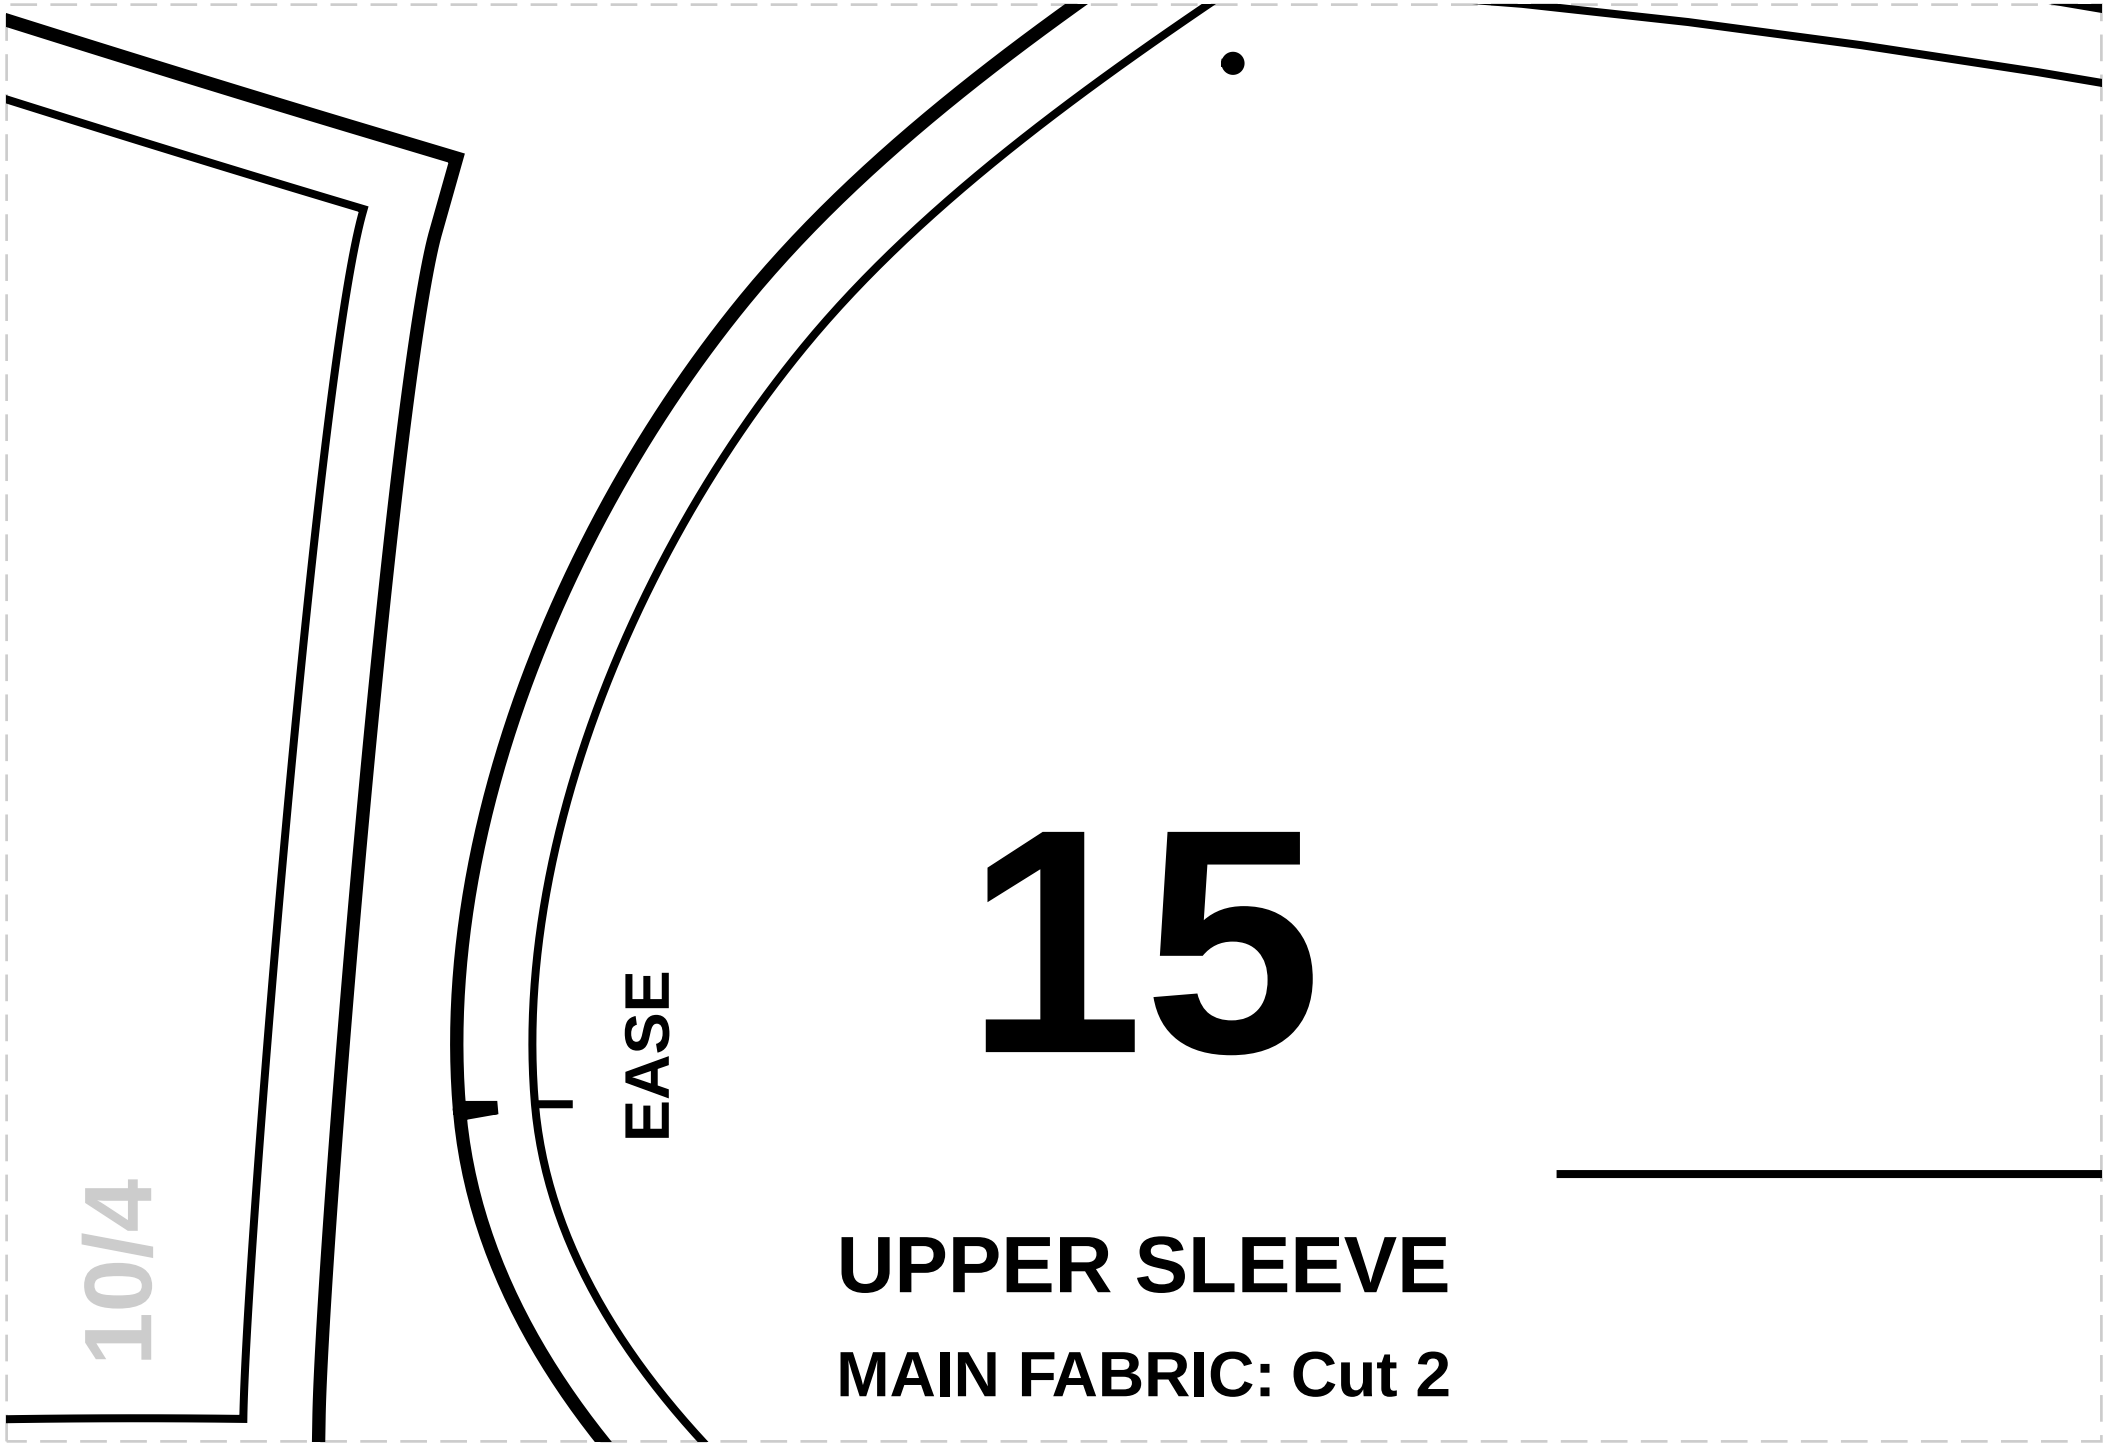
EASE
15
10/4
UPPER SLEEVE
MAIN FABRIC: Cut 2

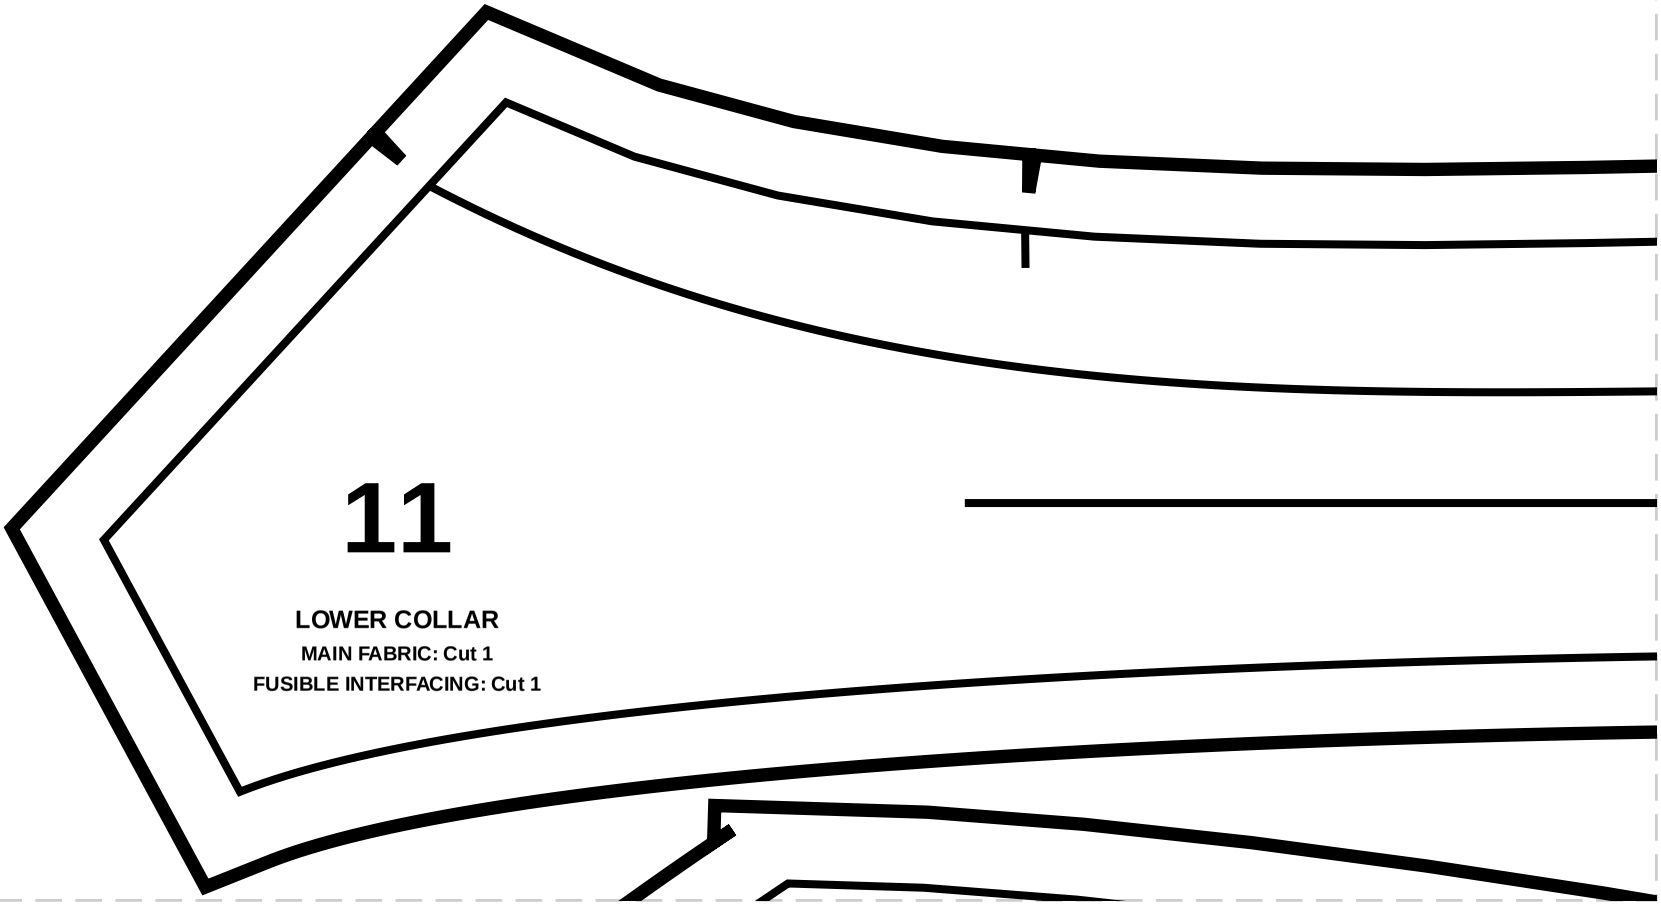
11
LOWER COLLAR
MAIN FABRIC: Cut 1
FUSIBLE INTERFACING: Cut 1

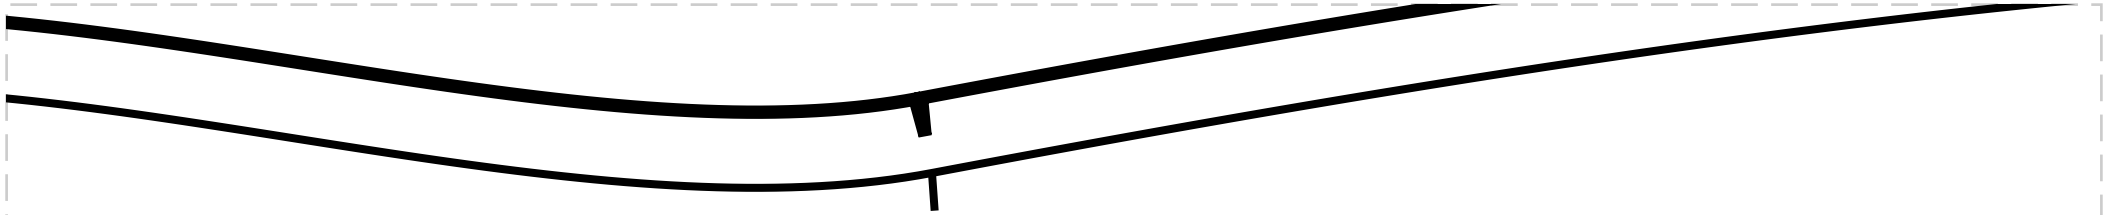


6


SIDE BACK


AIN FABRIC: Cut 2


E INTERFACING: Cut 2

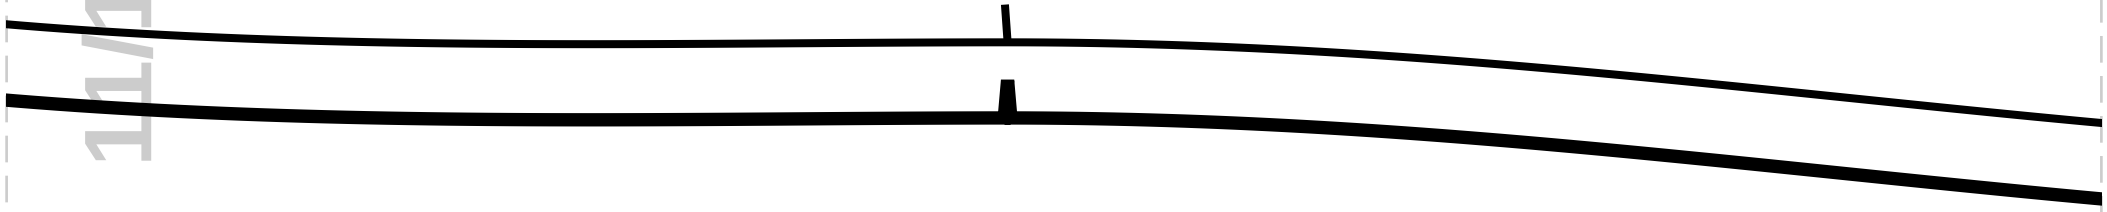



11/1

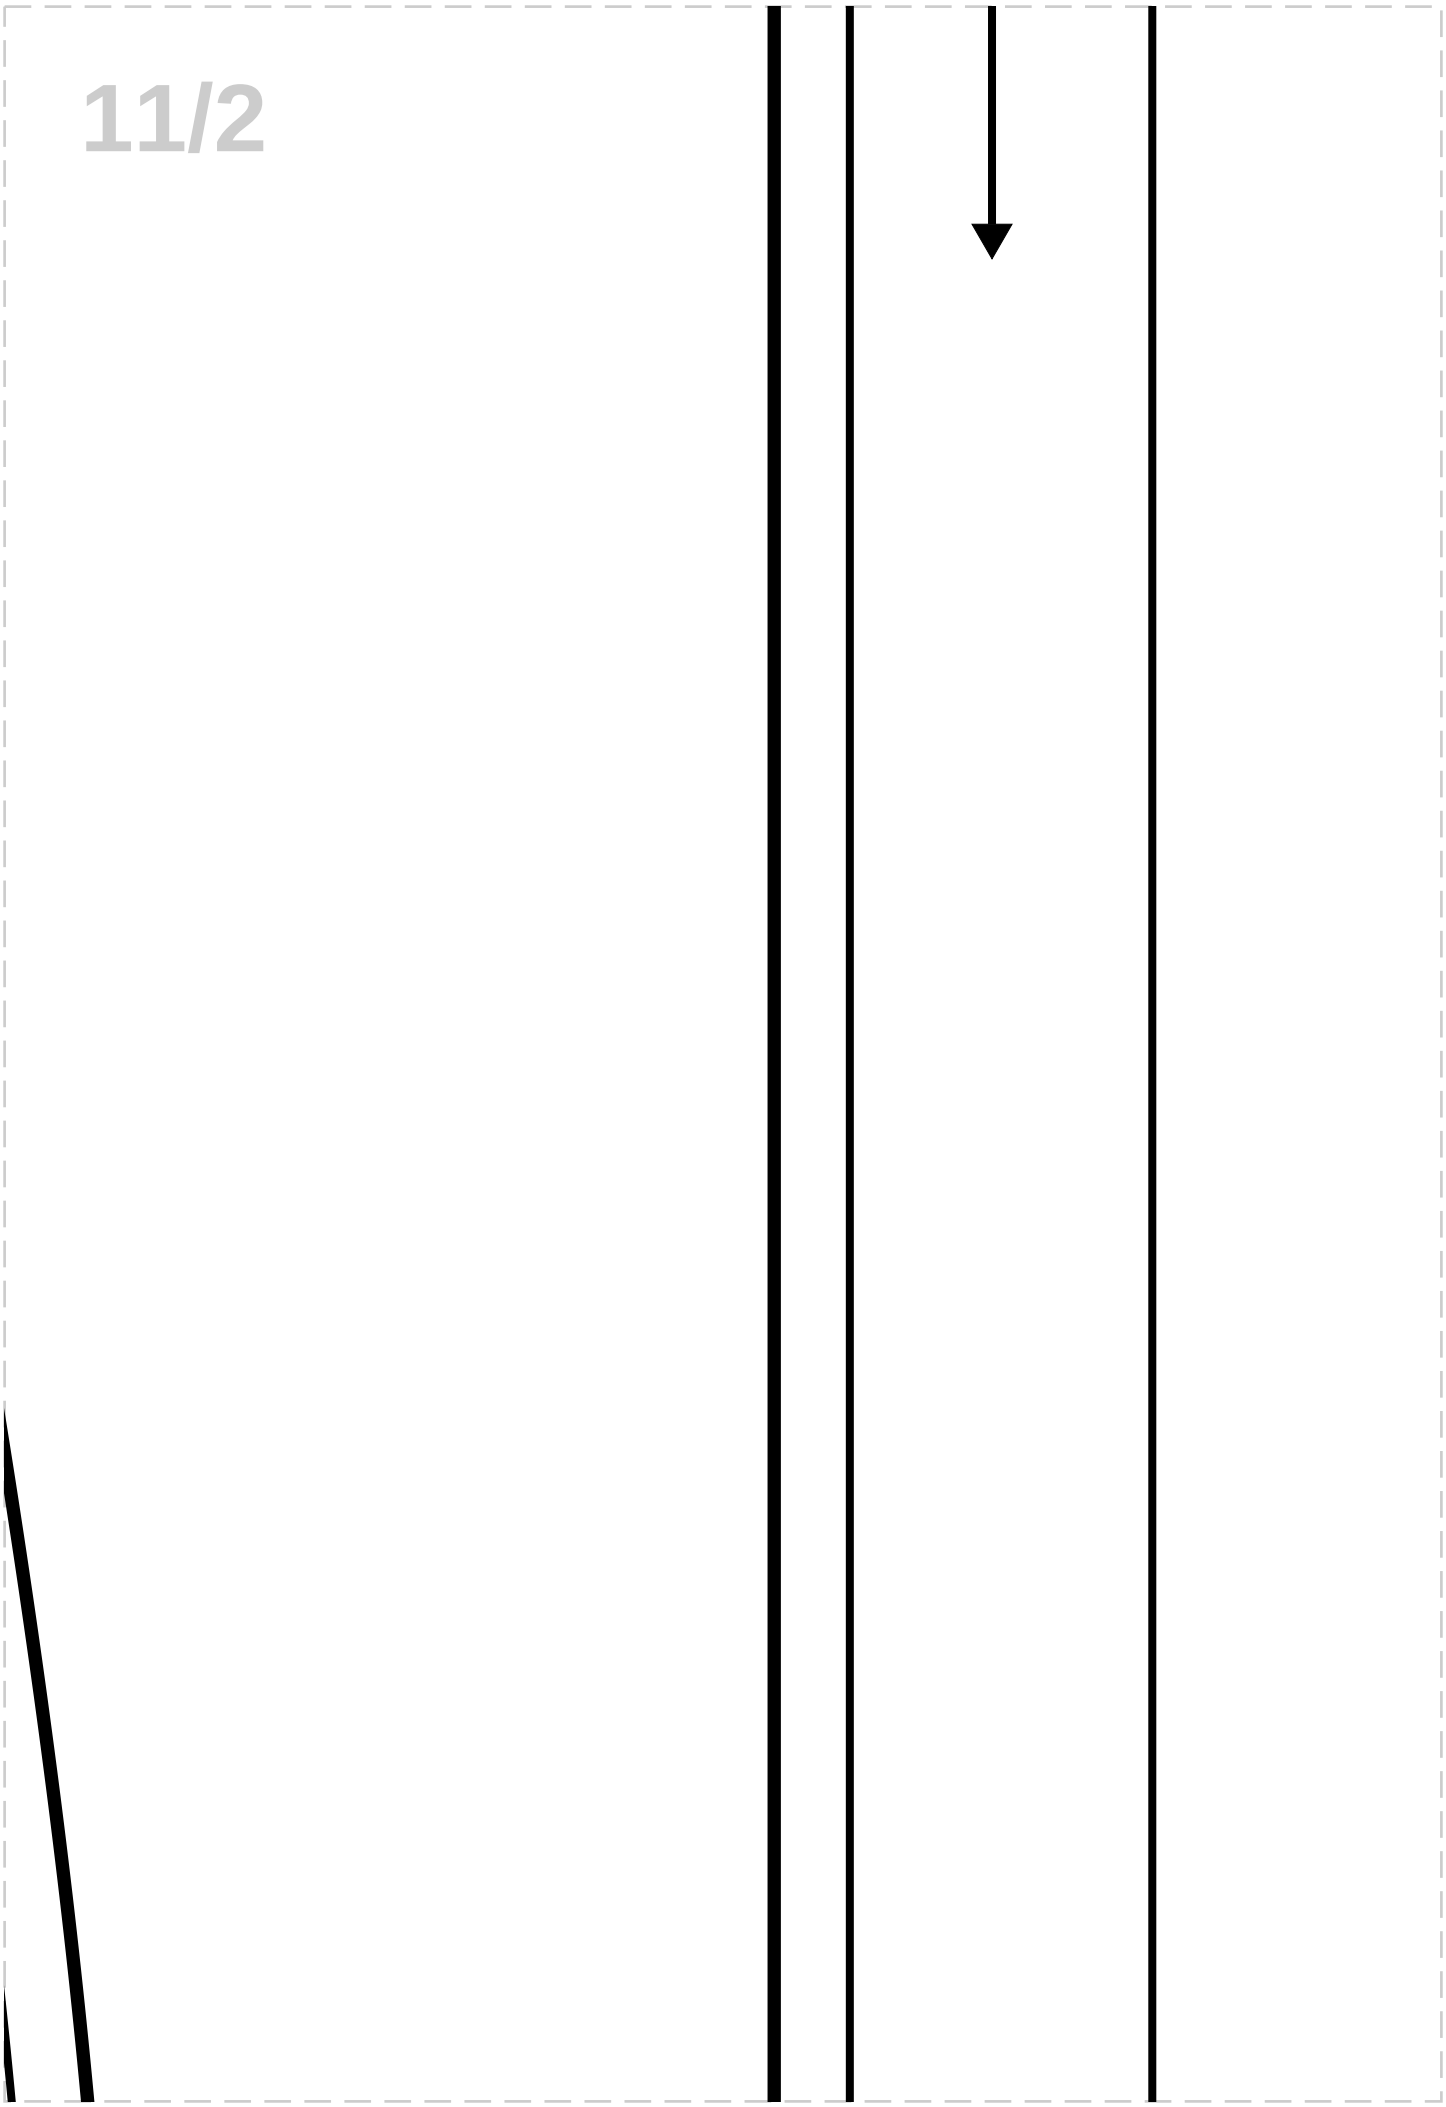


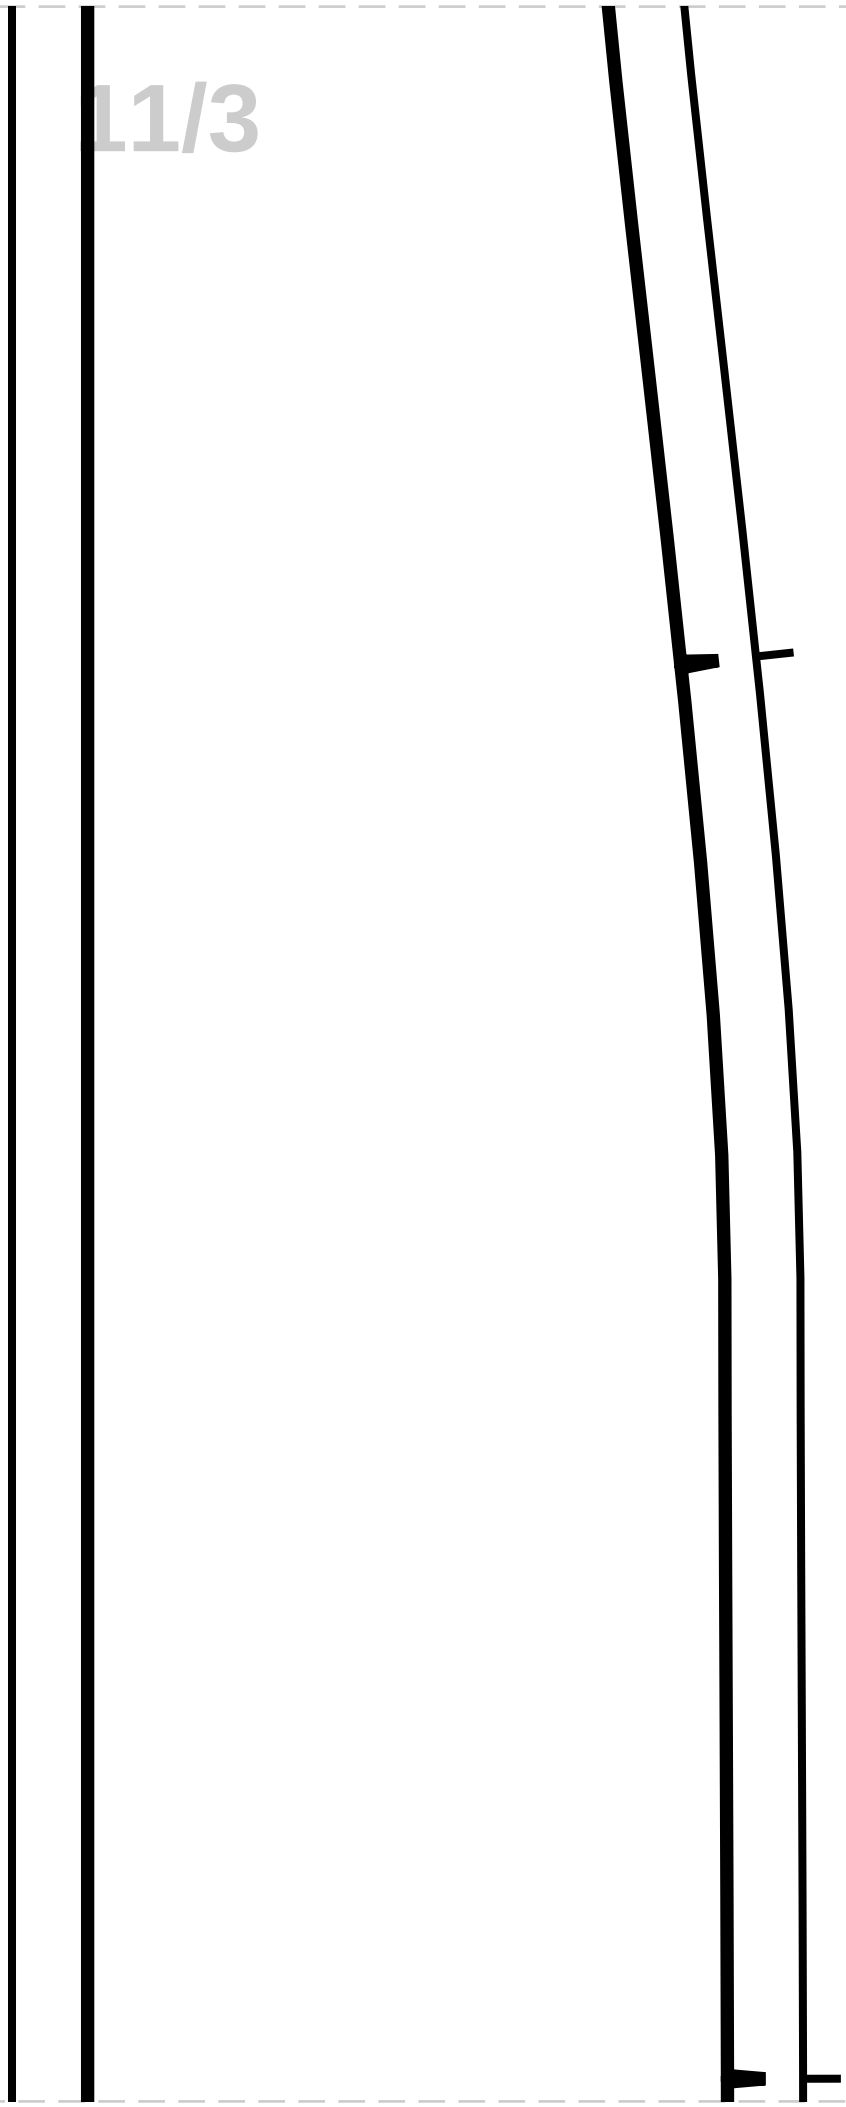


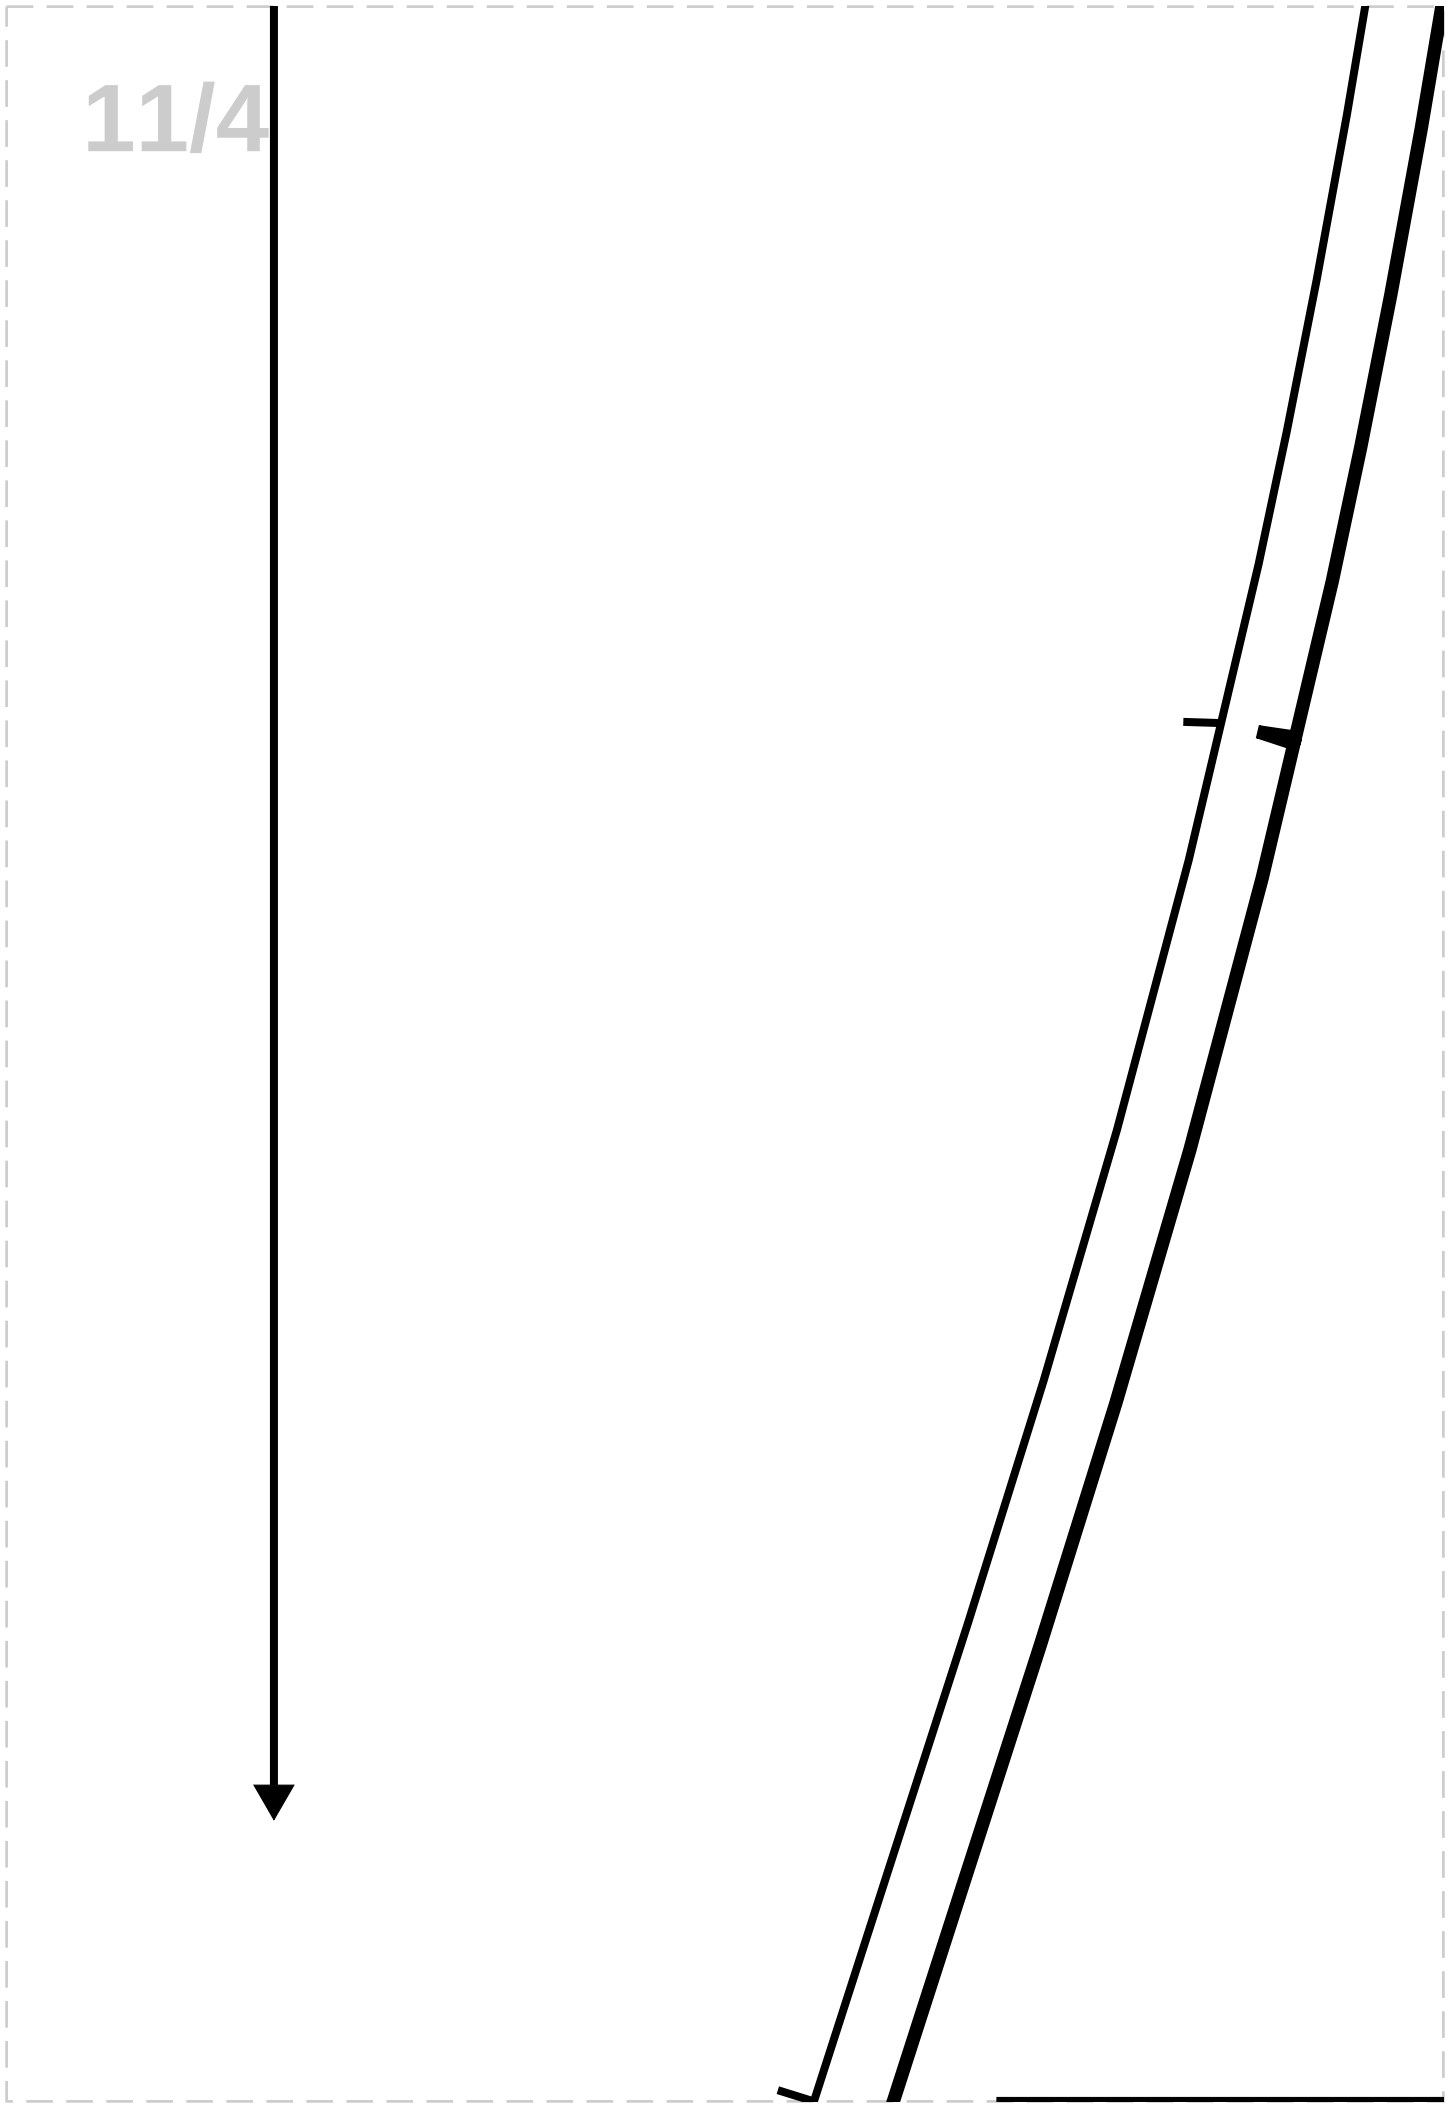


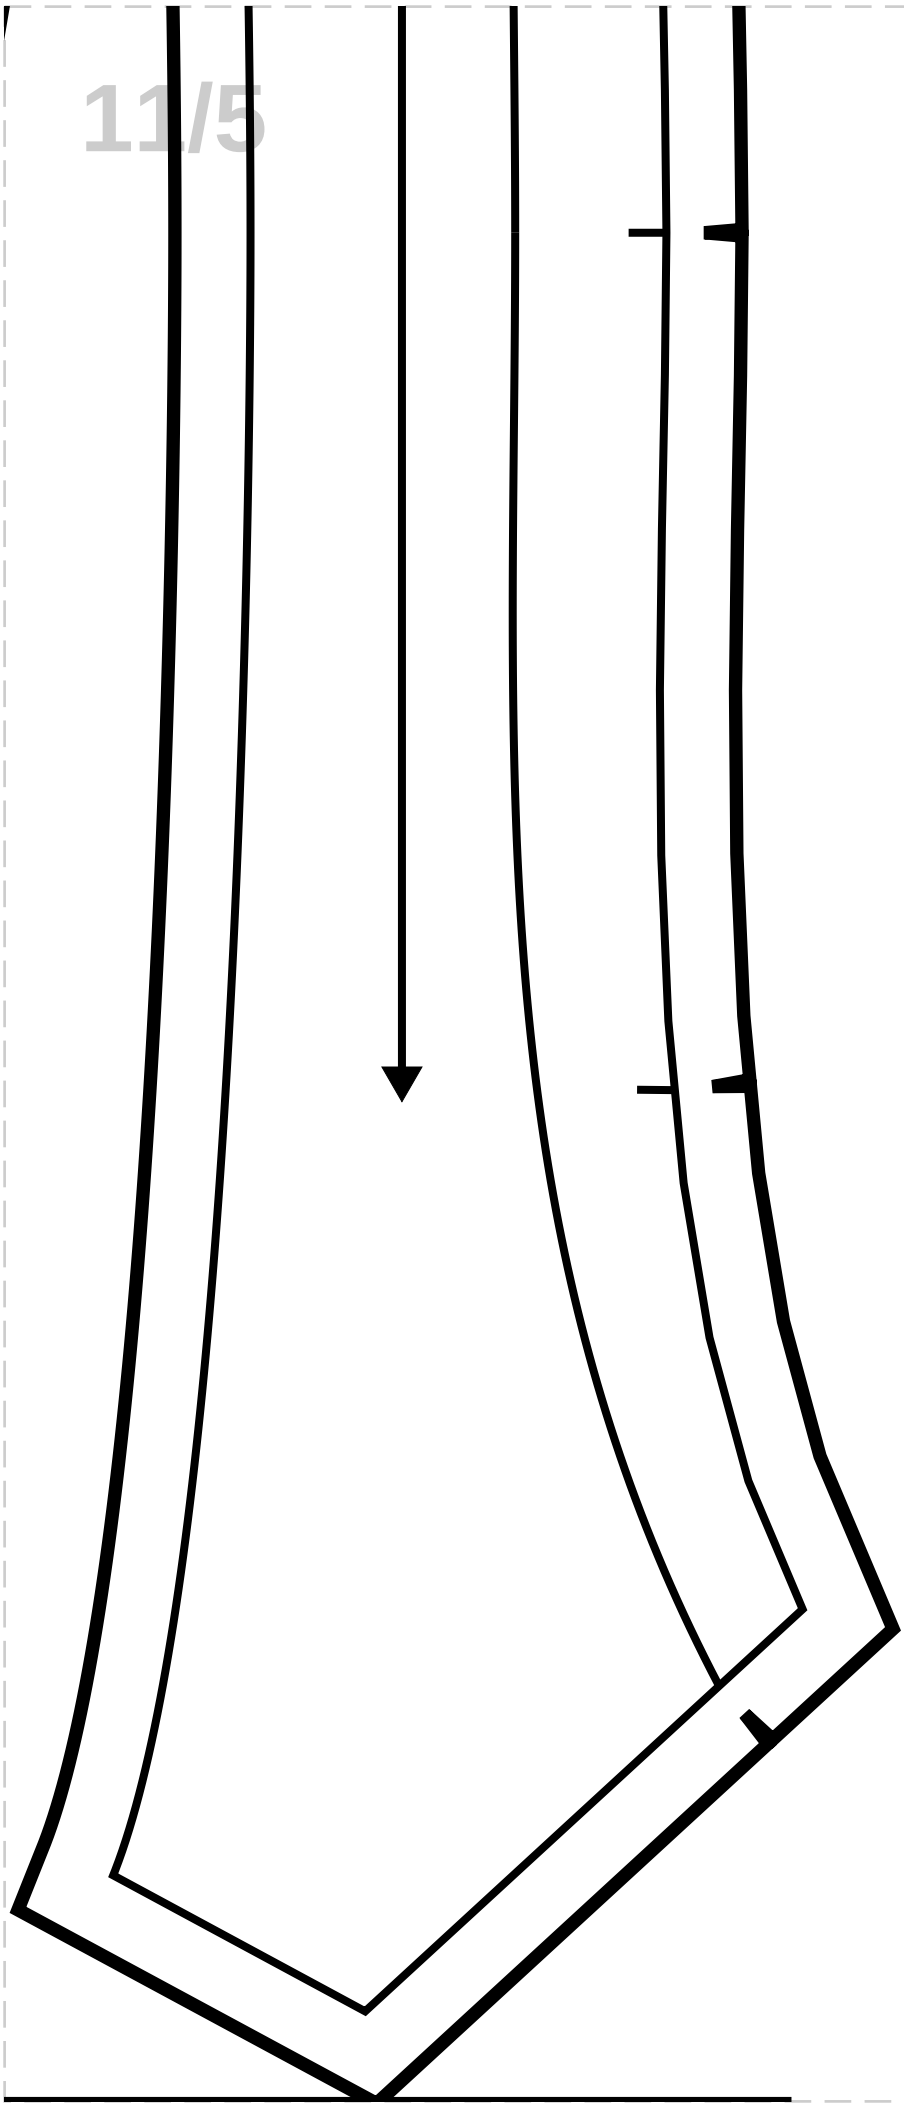


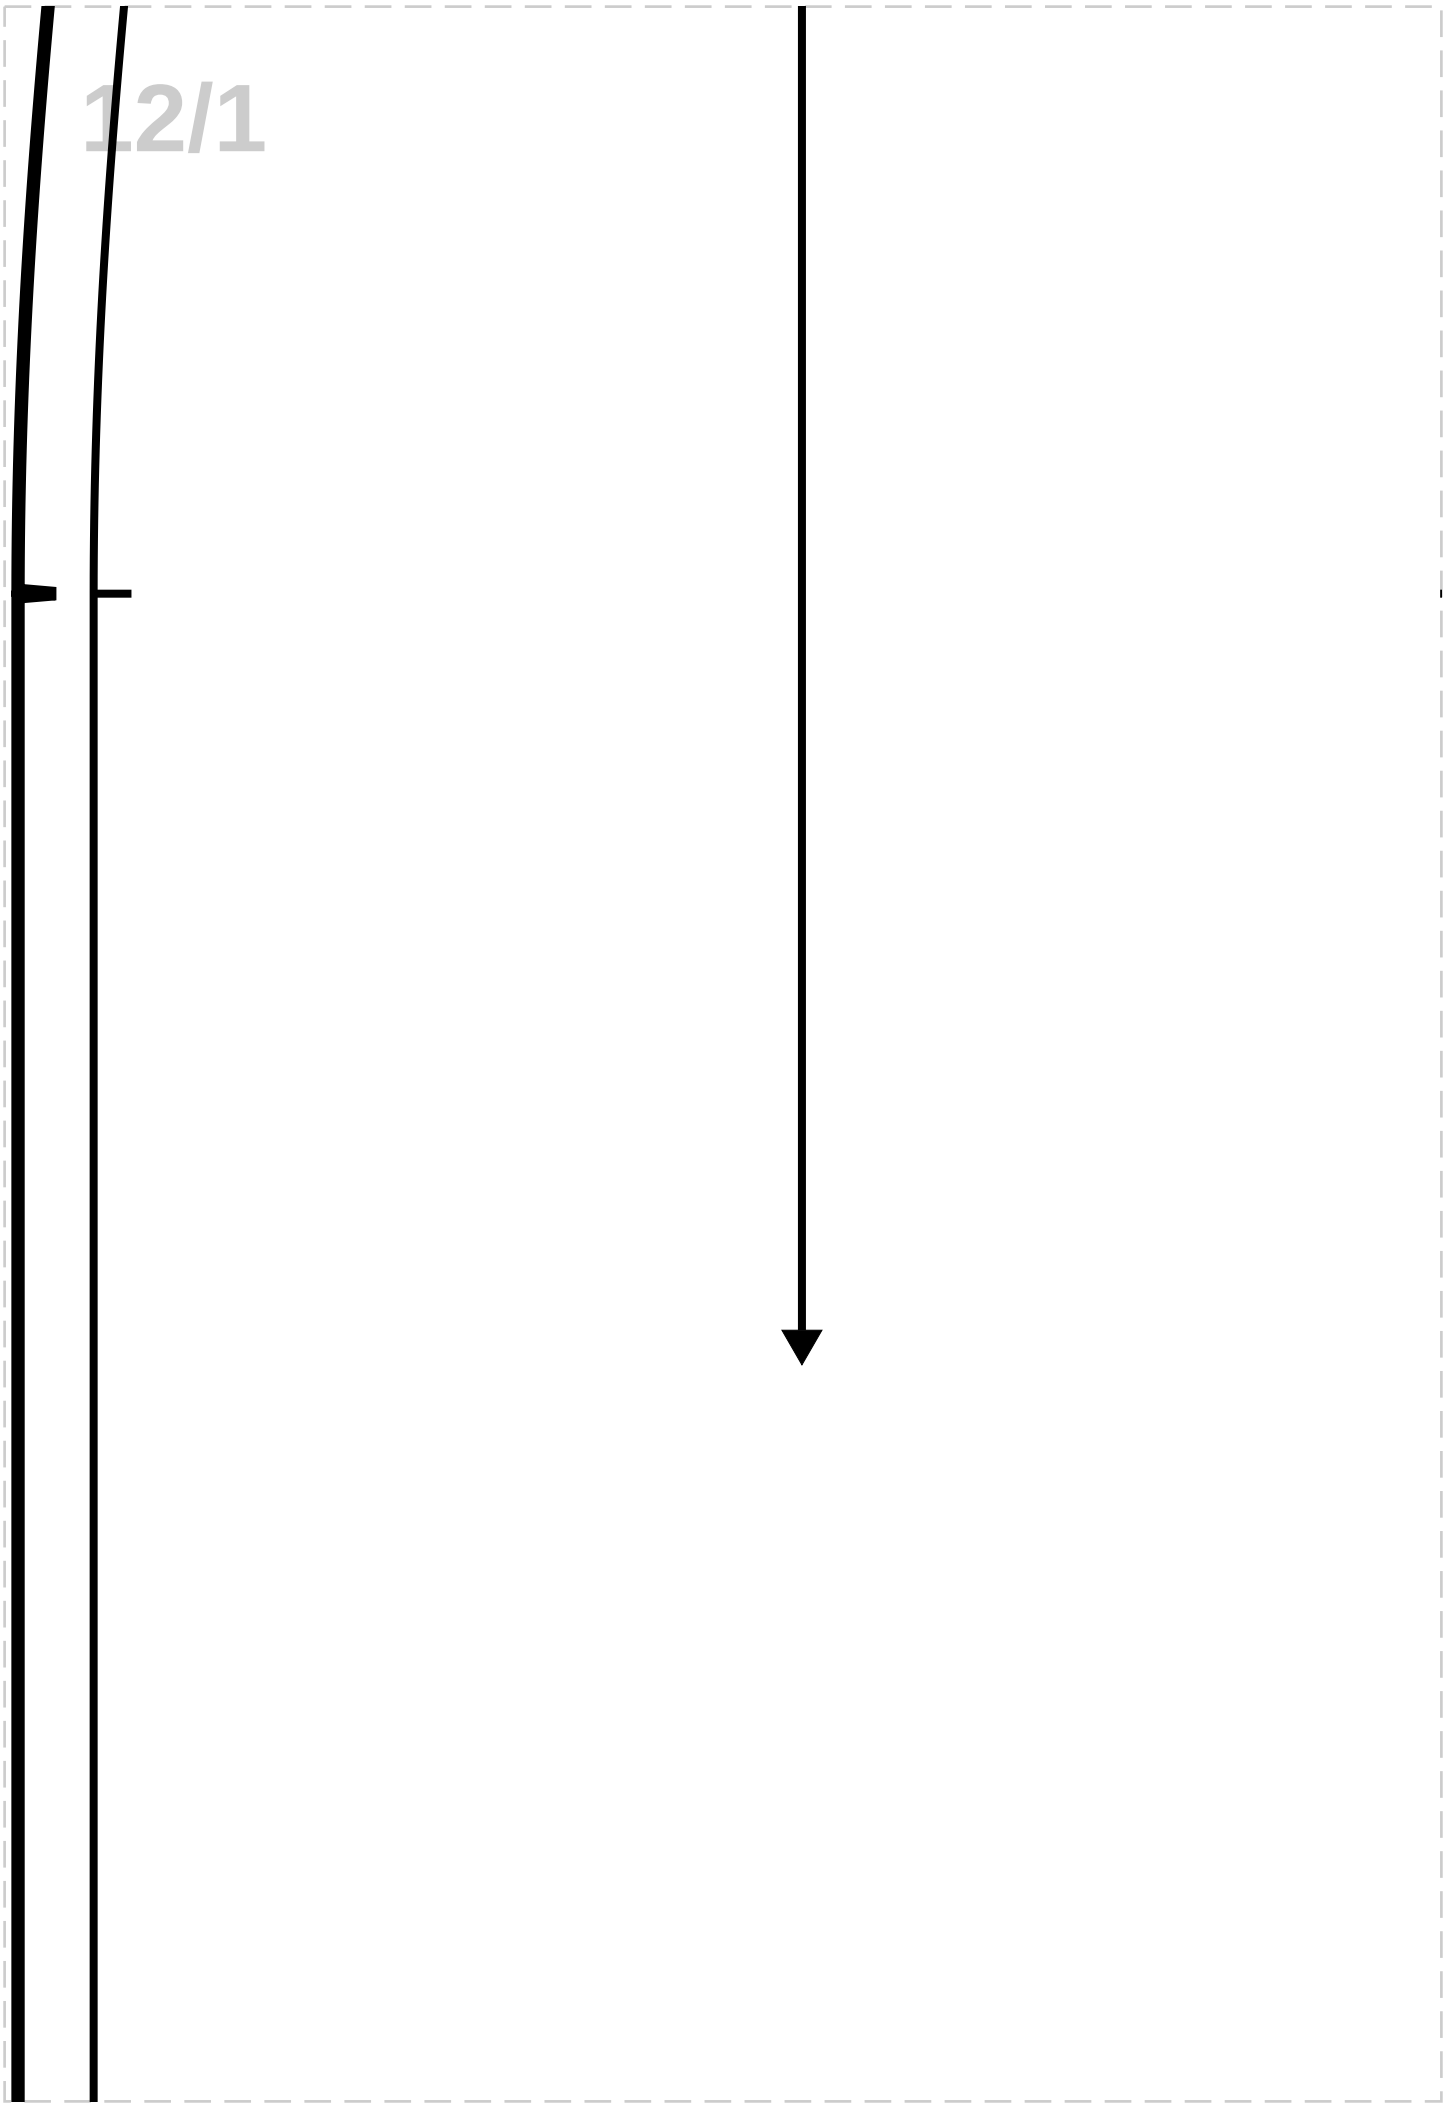

12/1

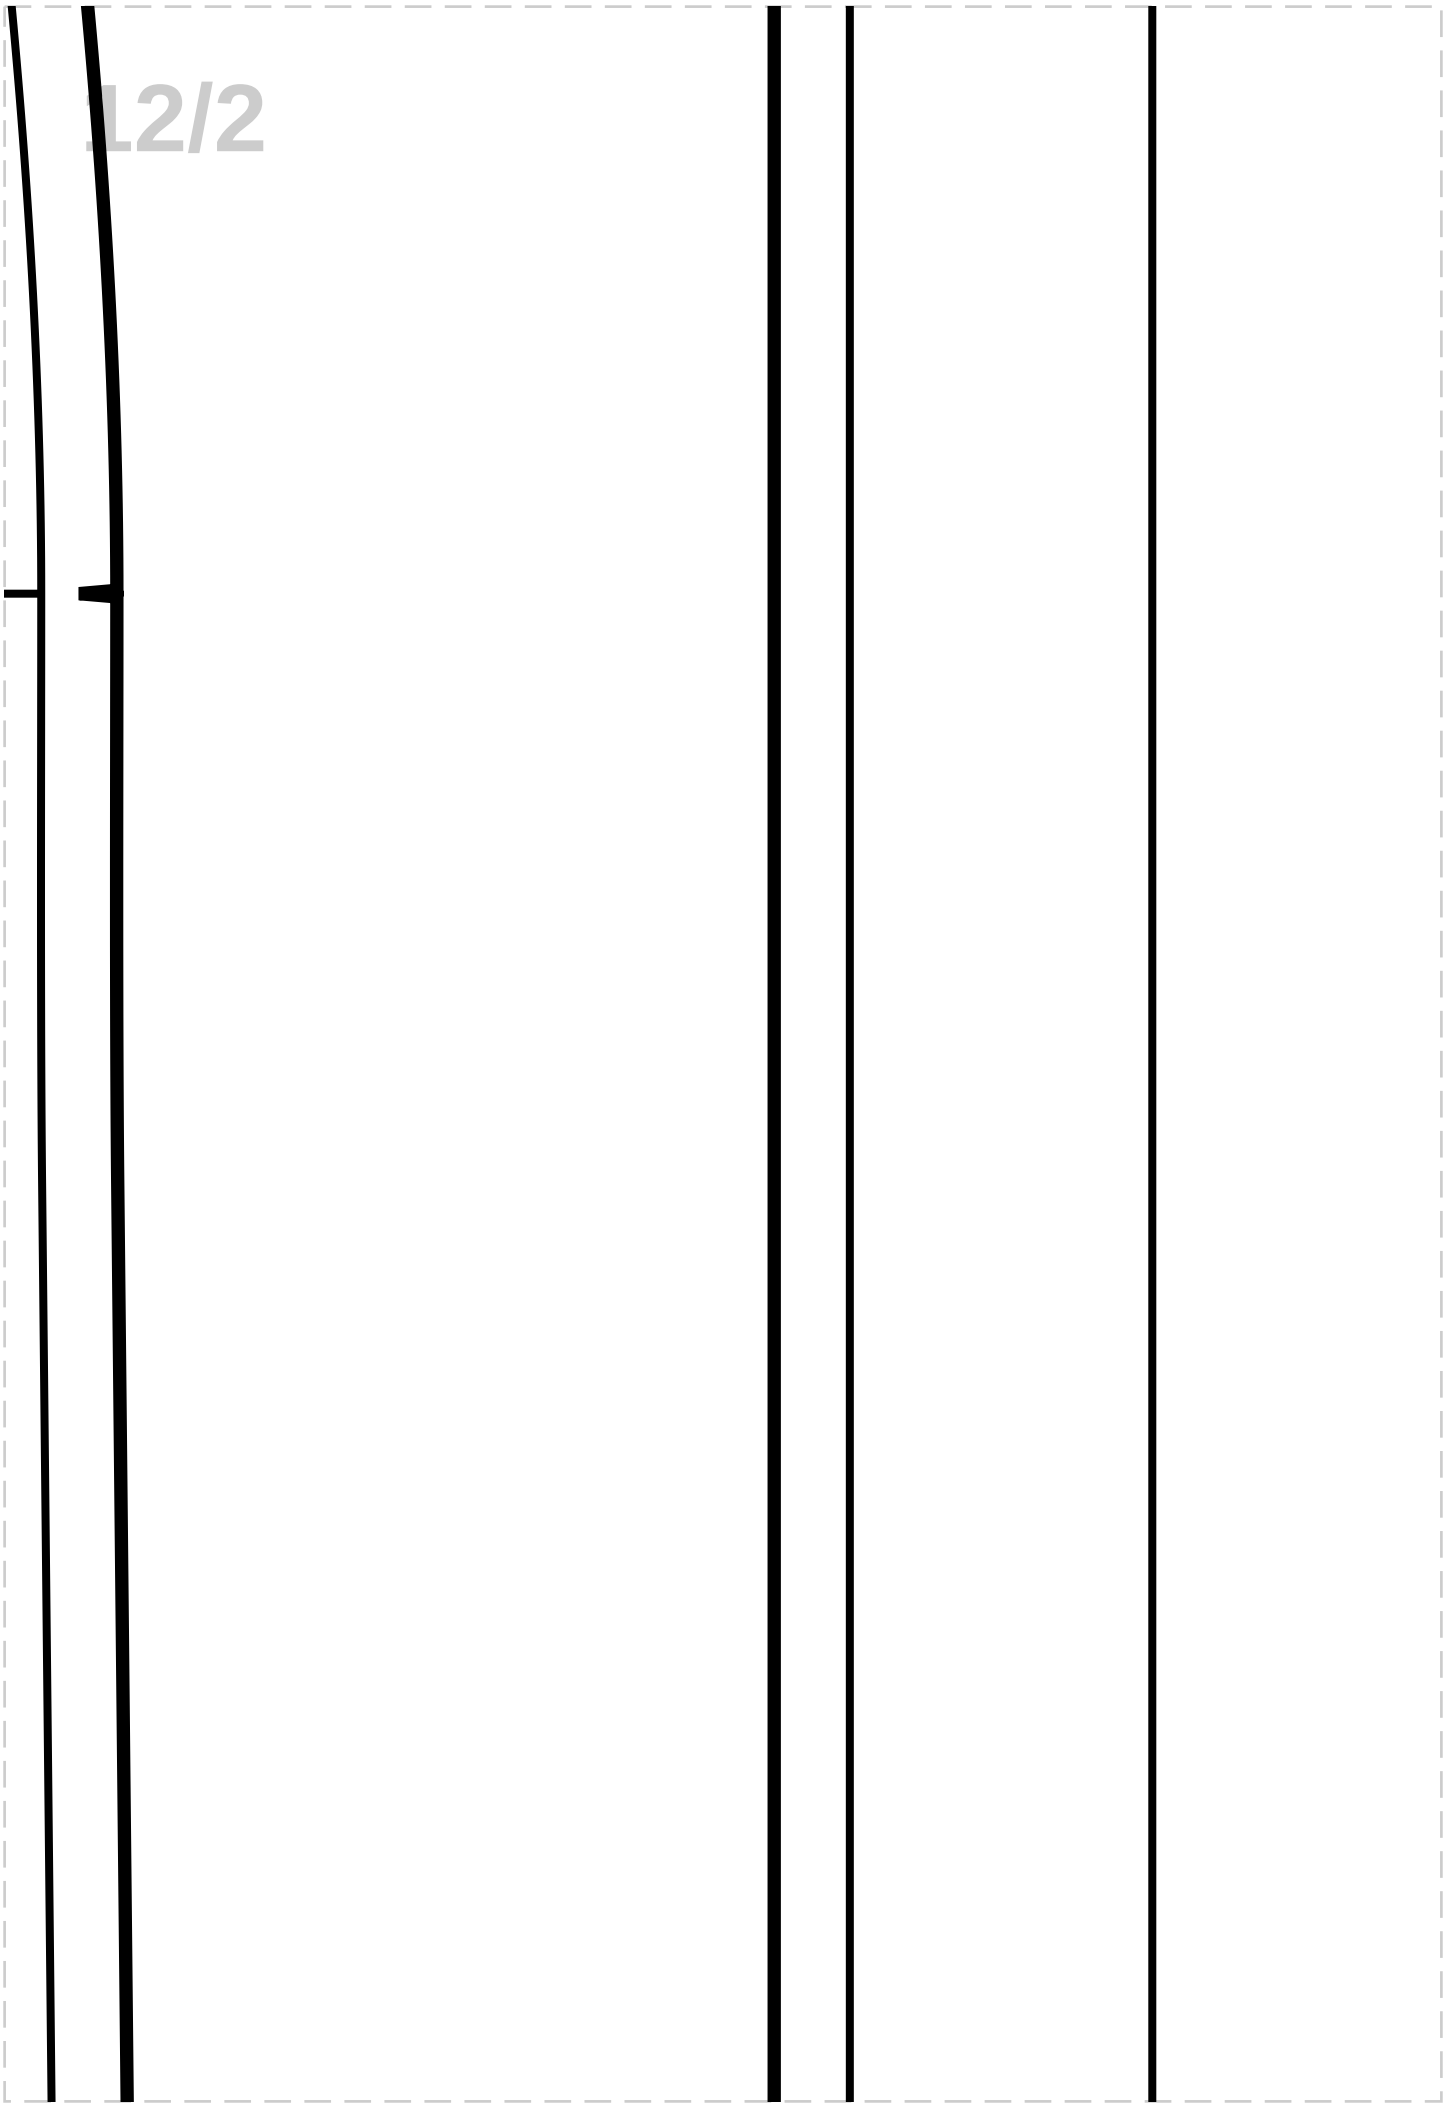

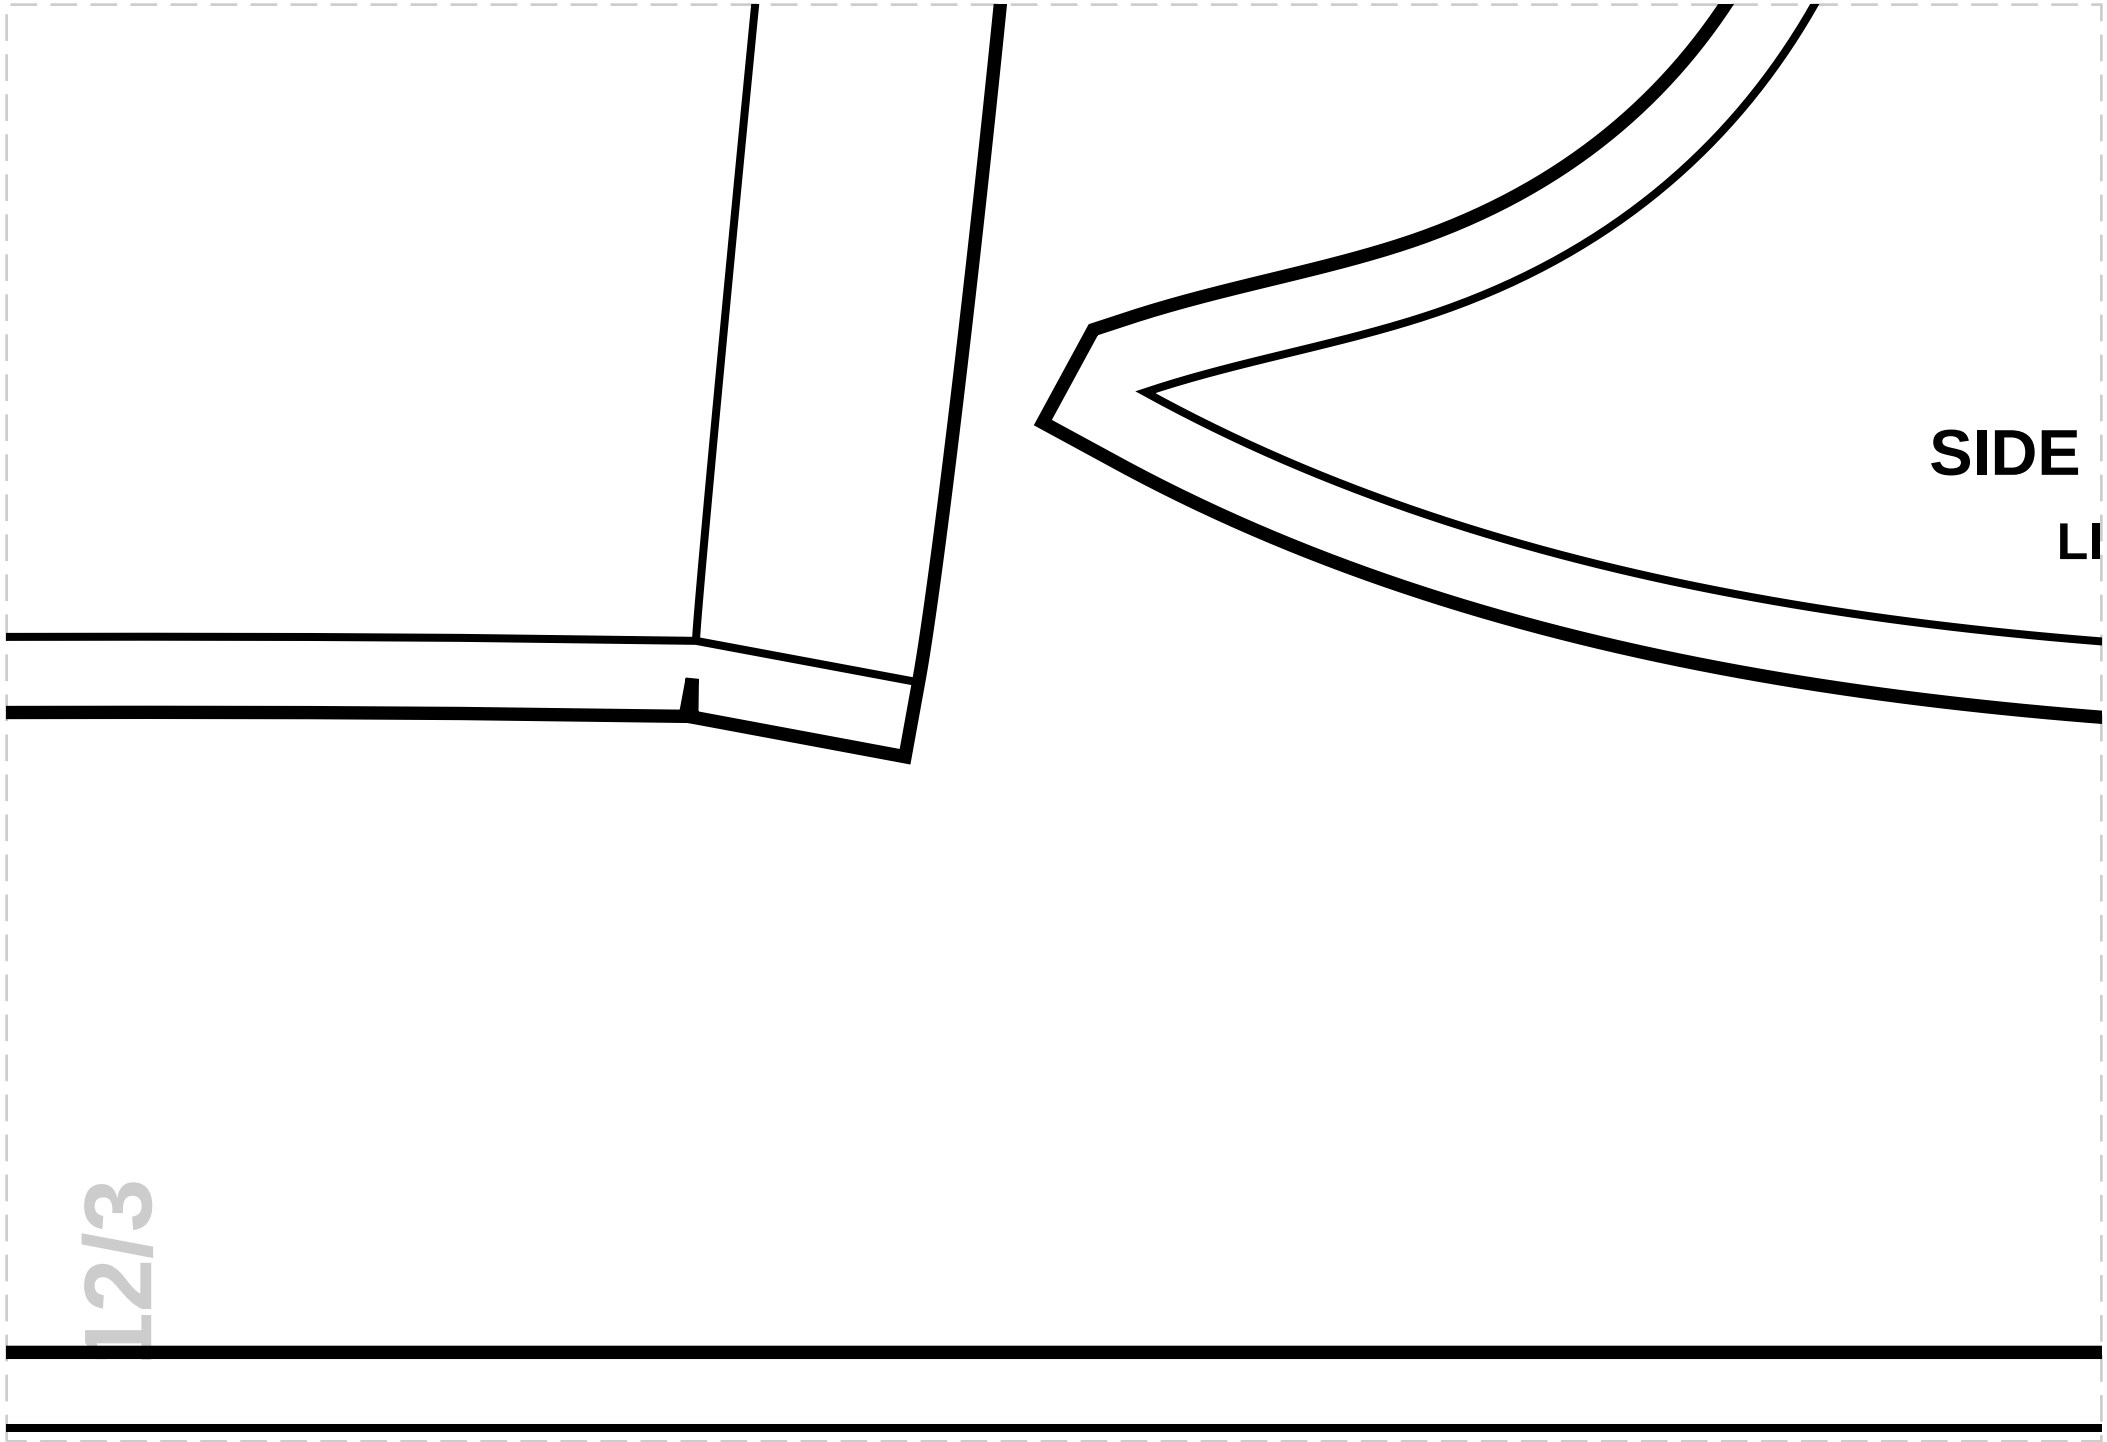

SIDE
LI
L2/3

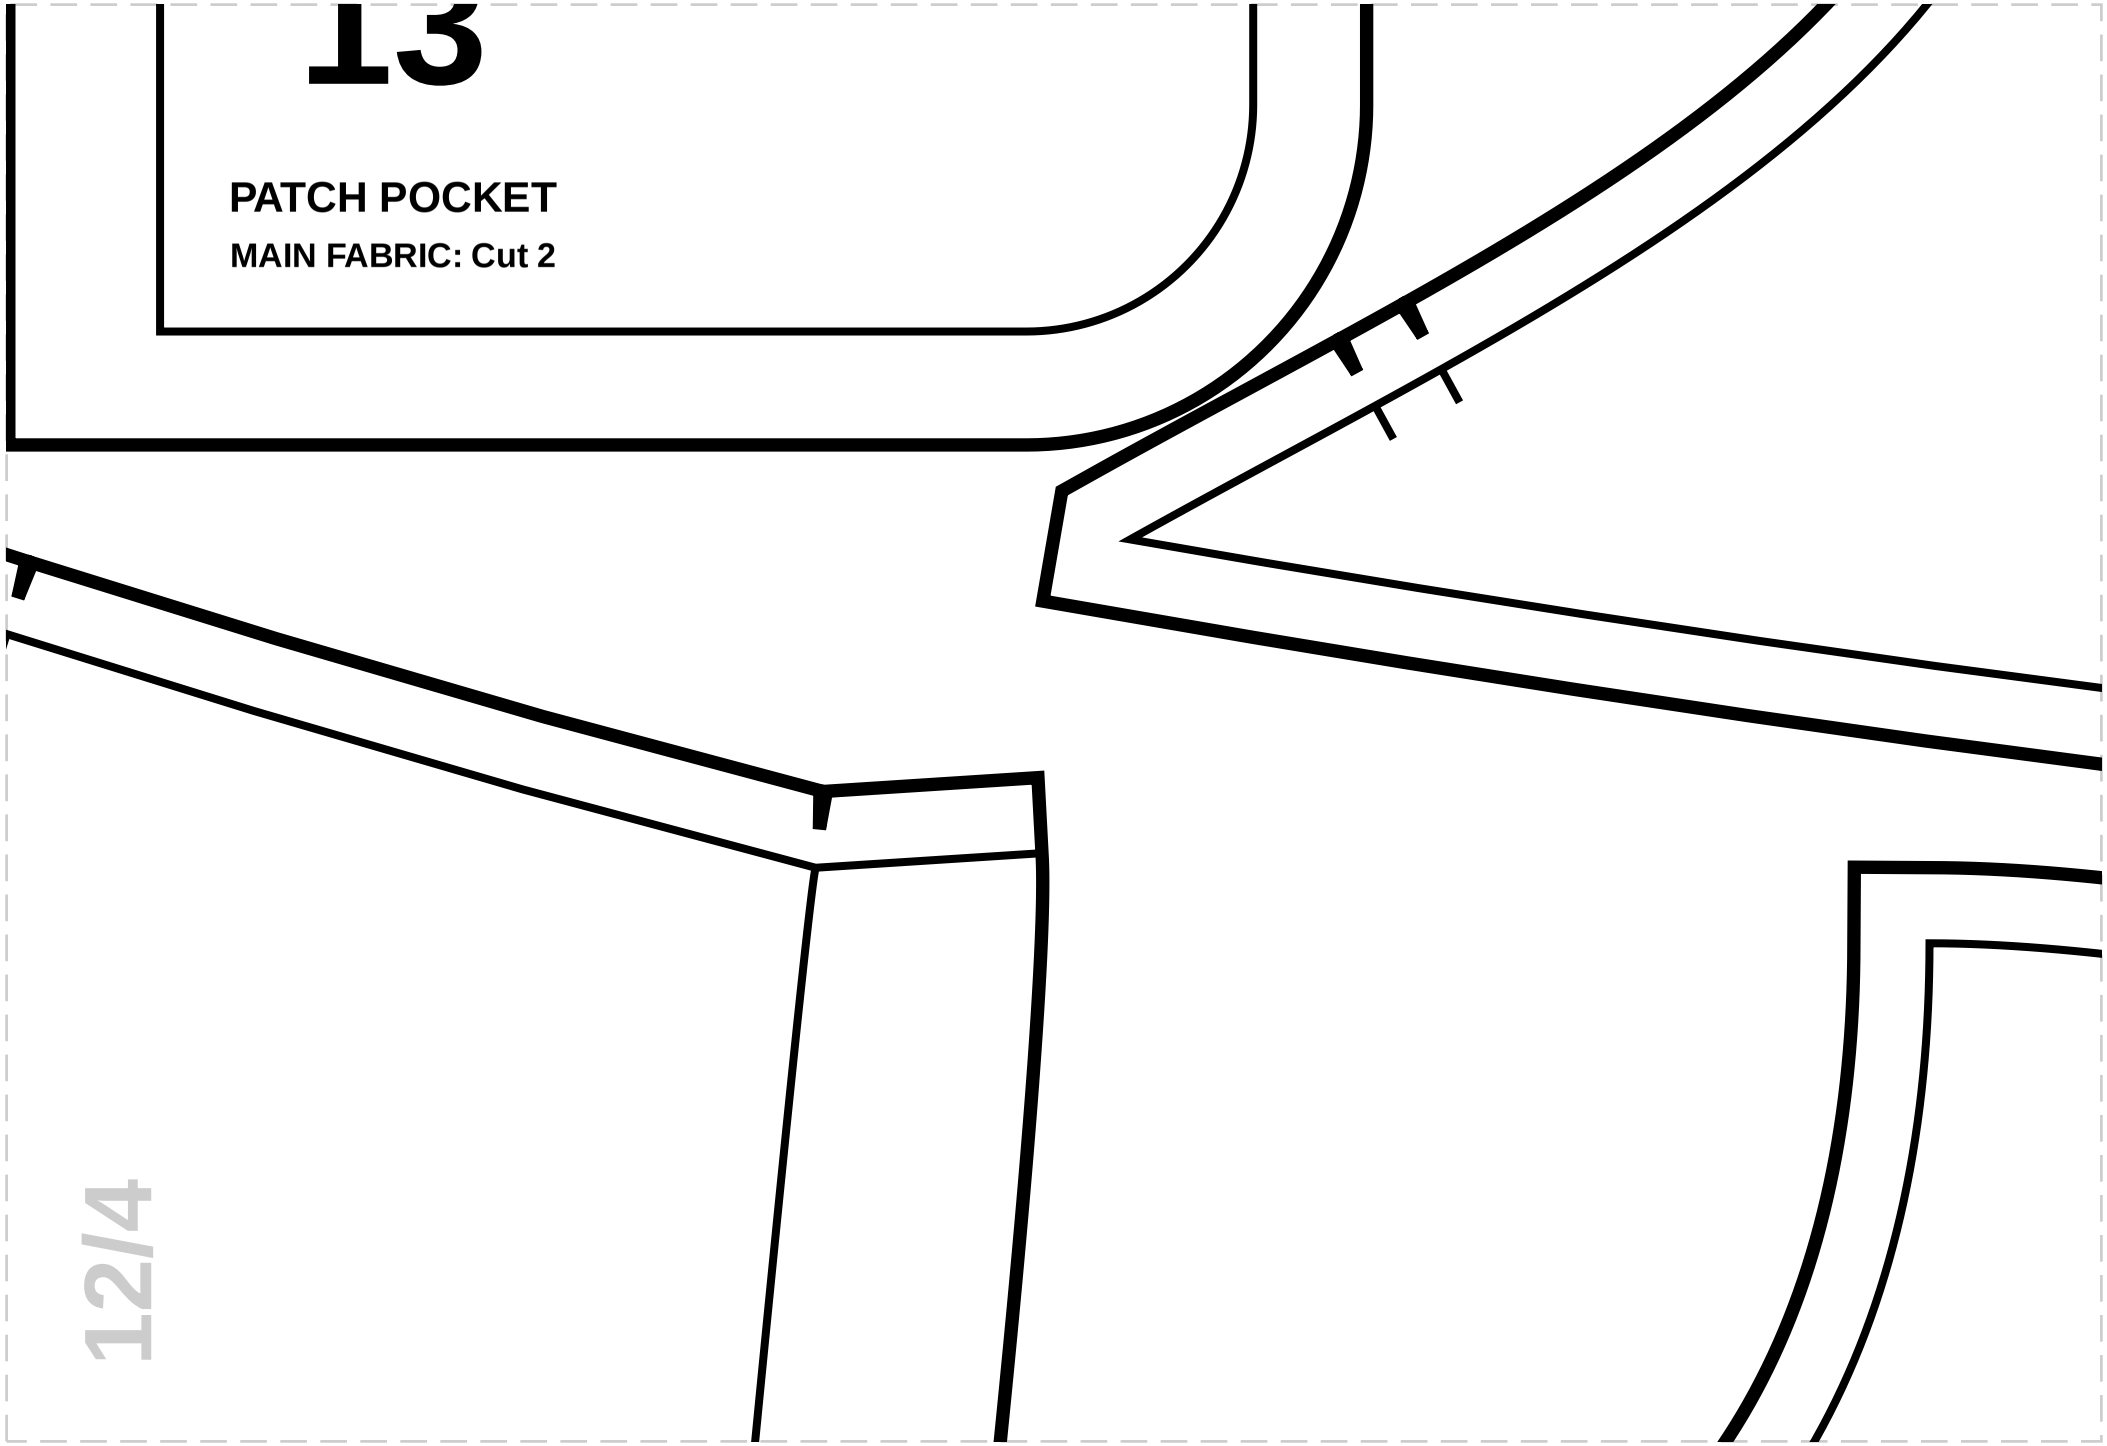
13
PATCH POCKET
MAIN FABRIC: Cut 2

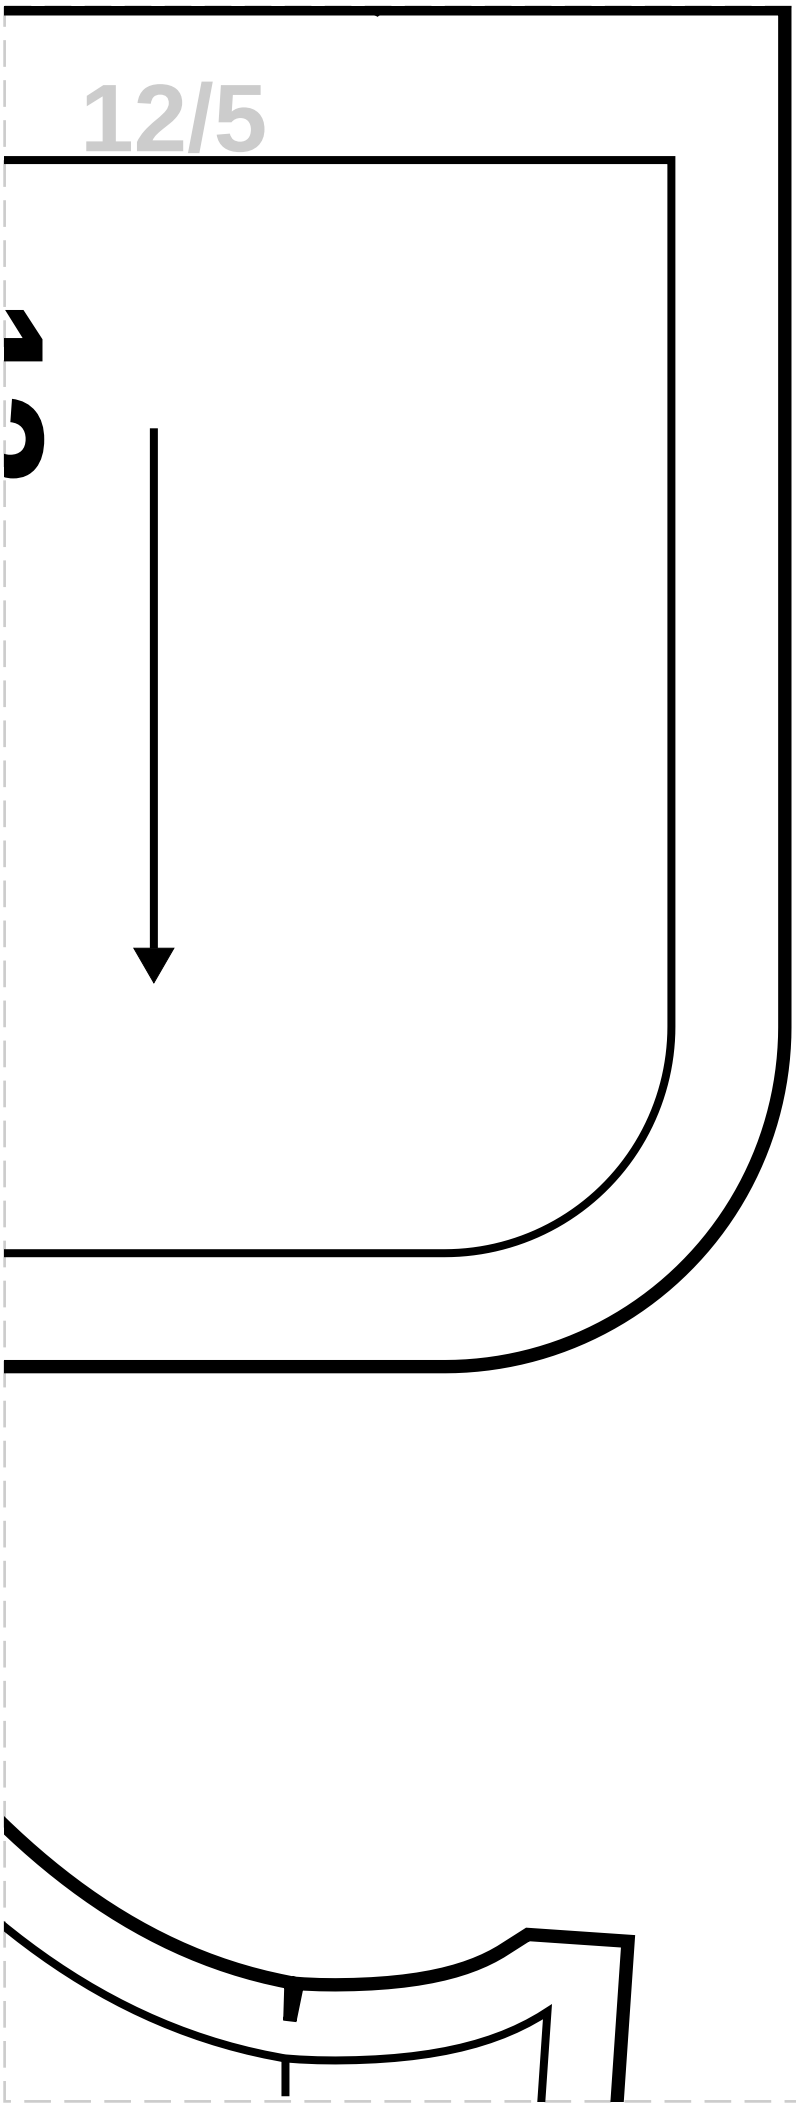

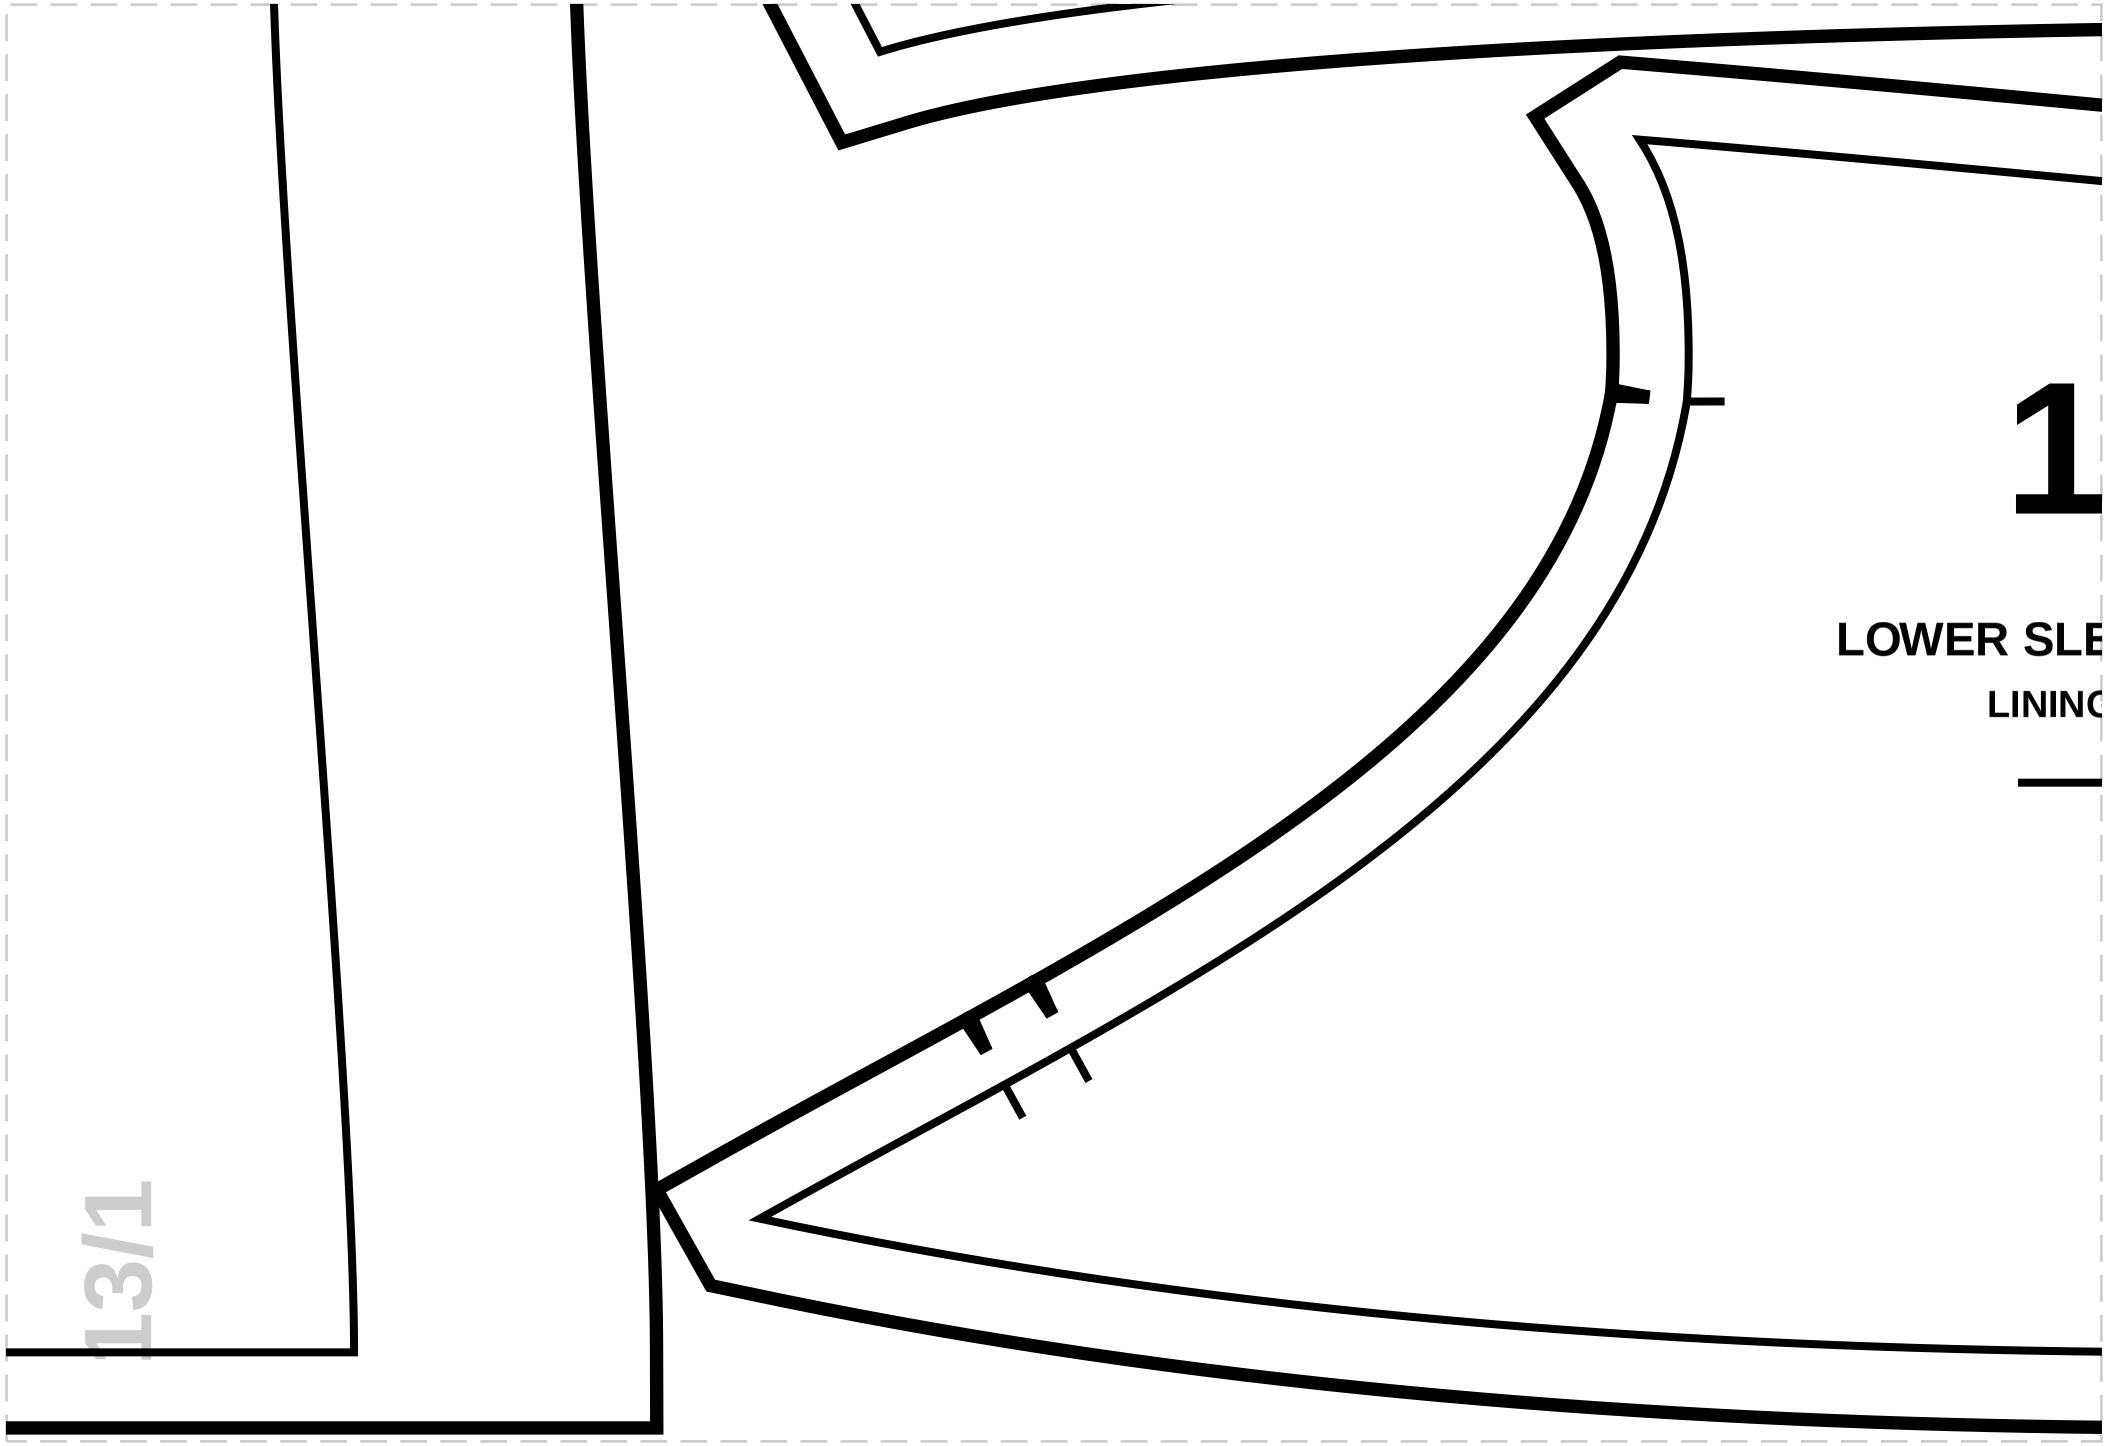

L3/1

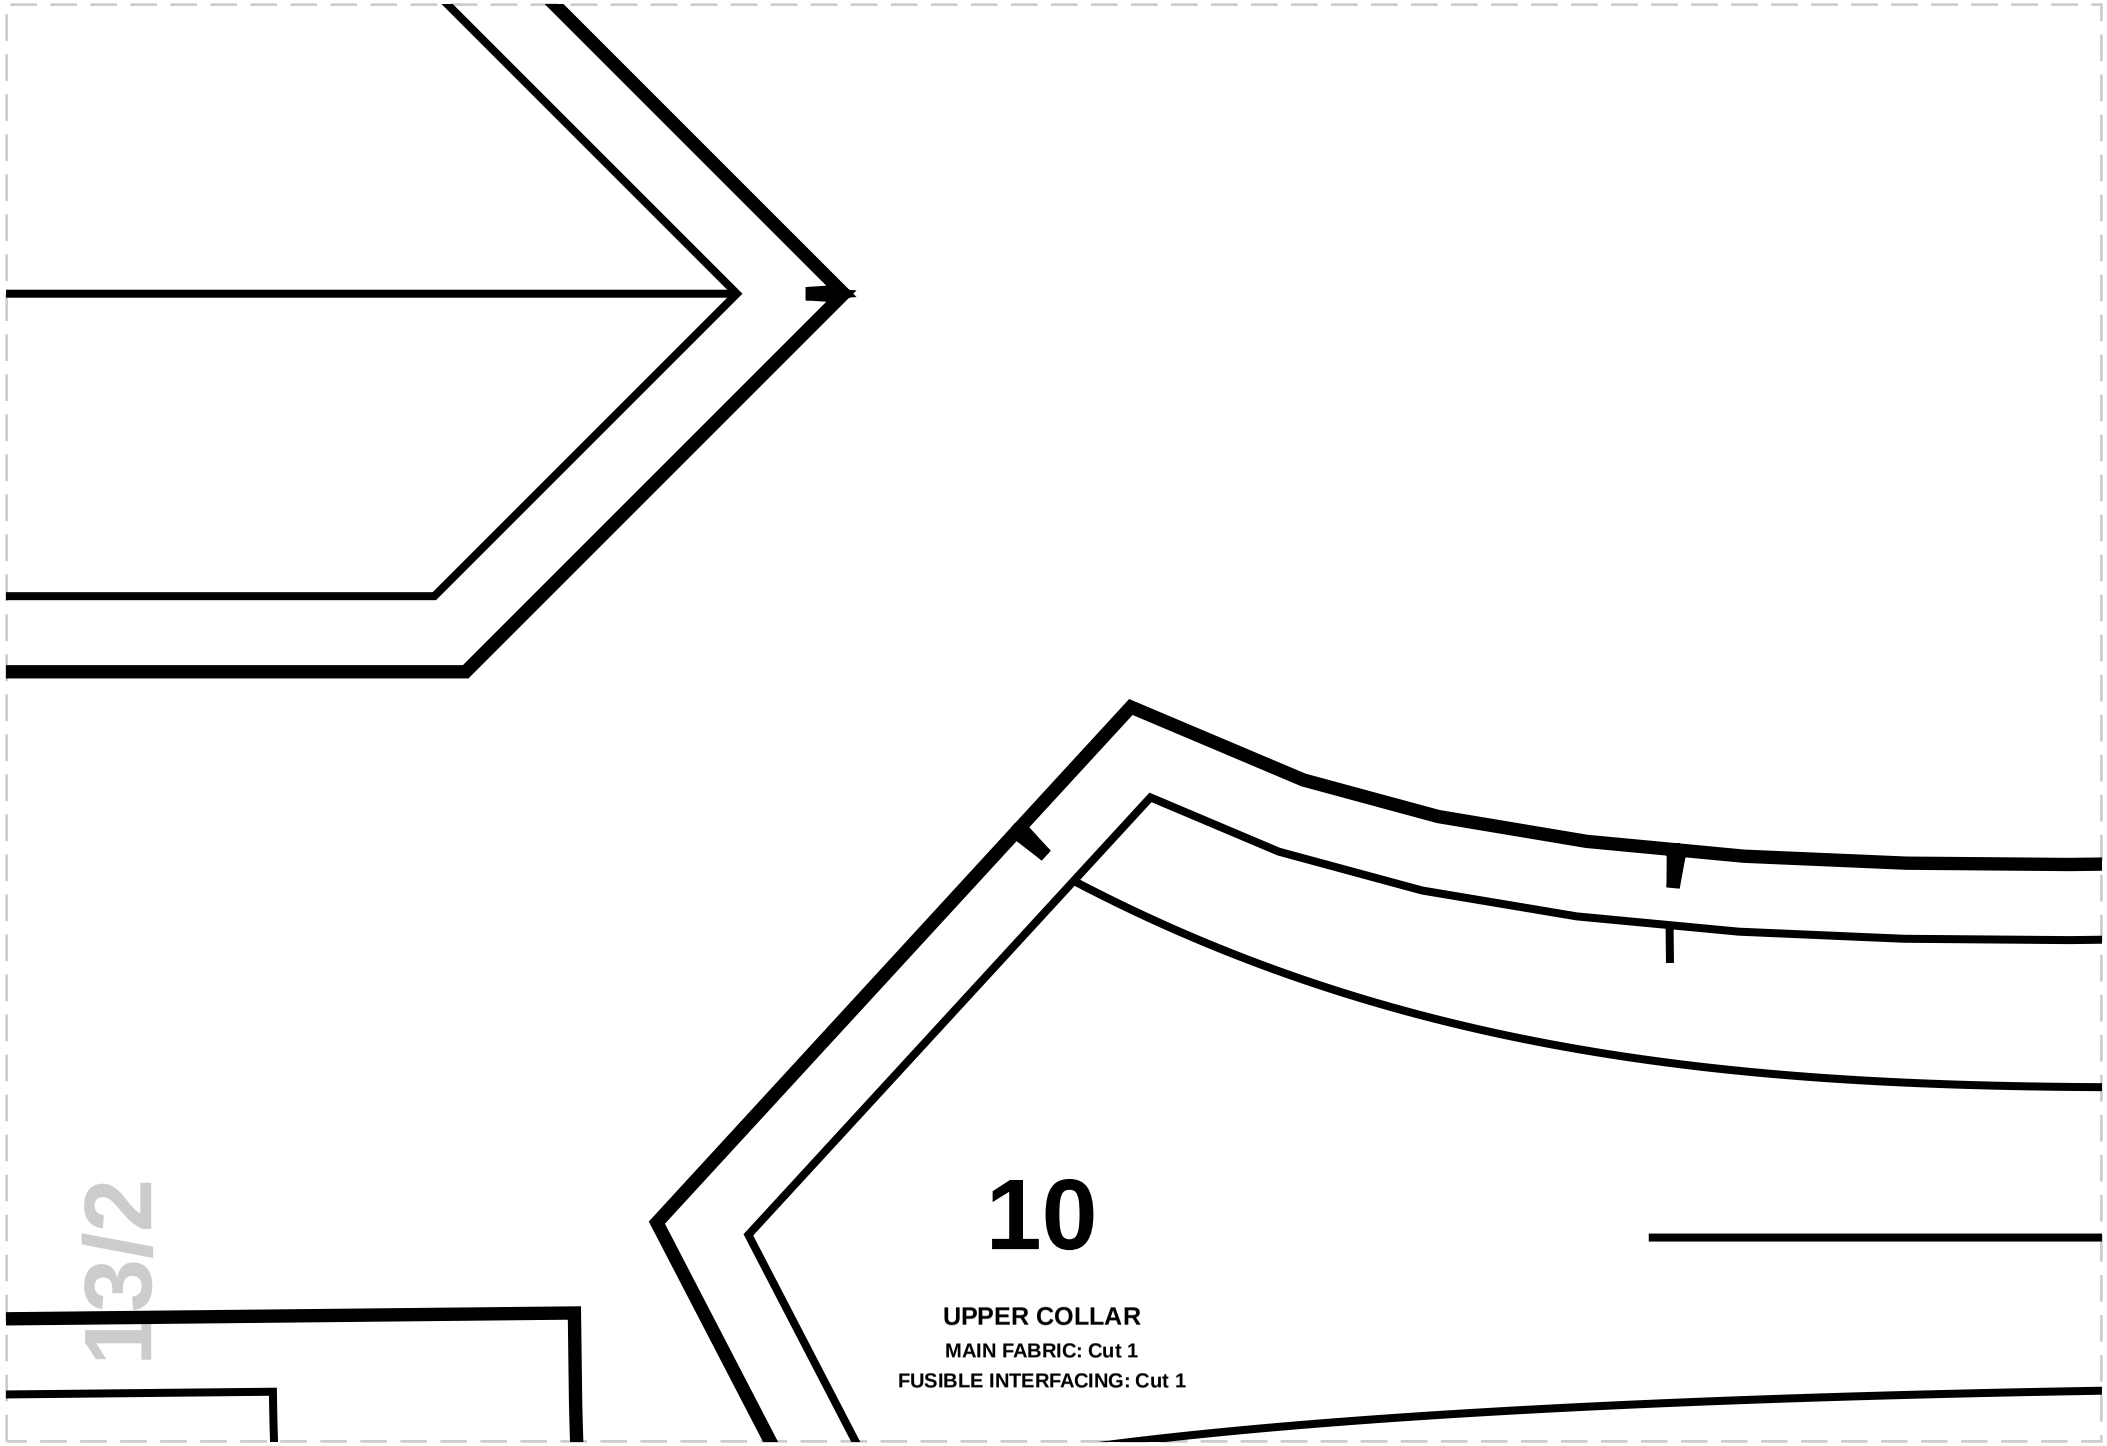

13/2

10

UPPER COLLAR


MAIN FABRIC: Cut 1

FUSIBLE INTERFACING: Cut 1

7

BACK LINING


NING: Cut 2

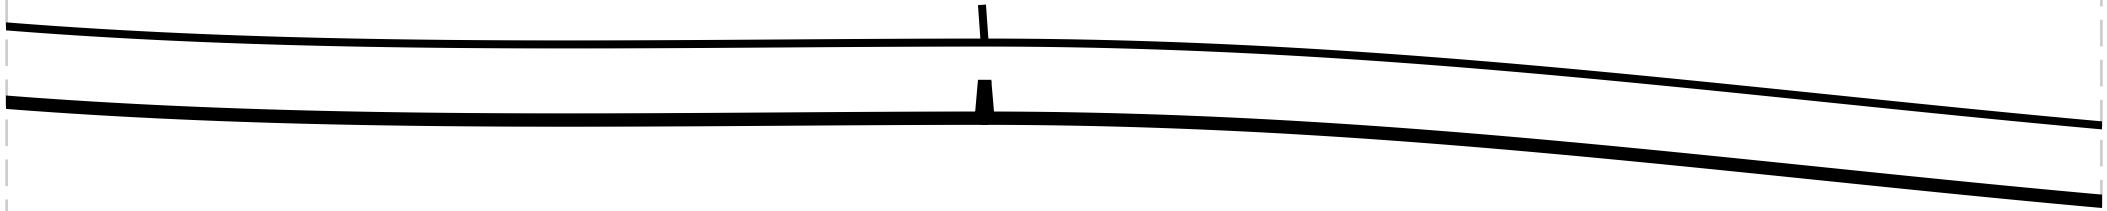


L3/3



MAIN FABRIC: Cut 2

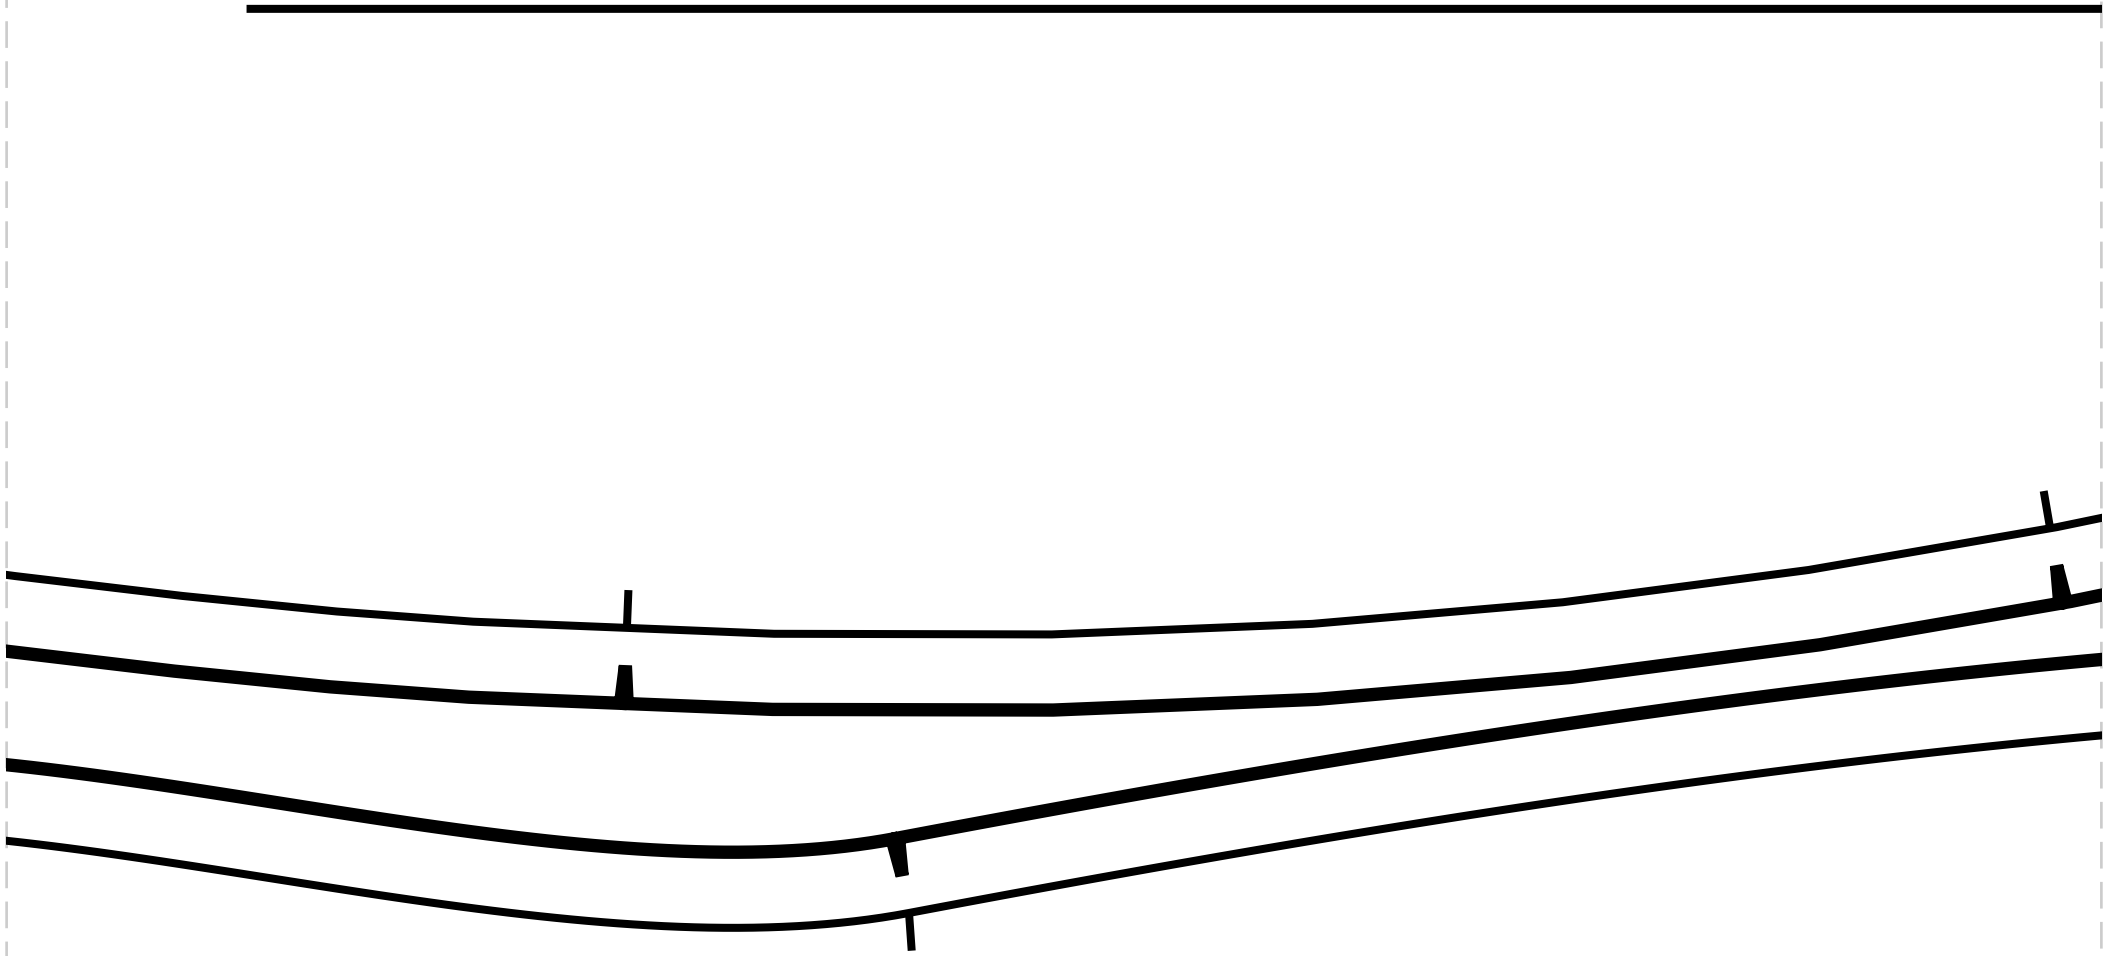

13/4

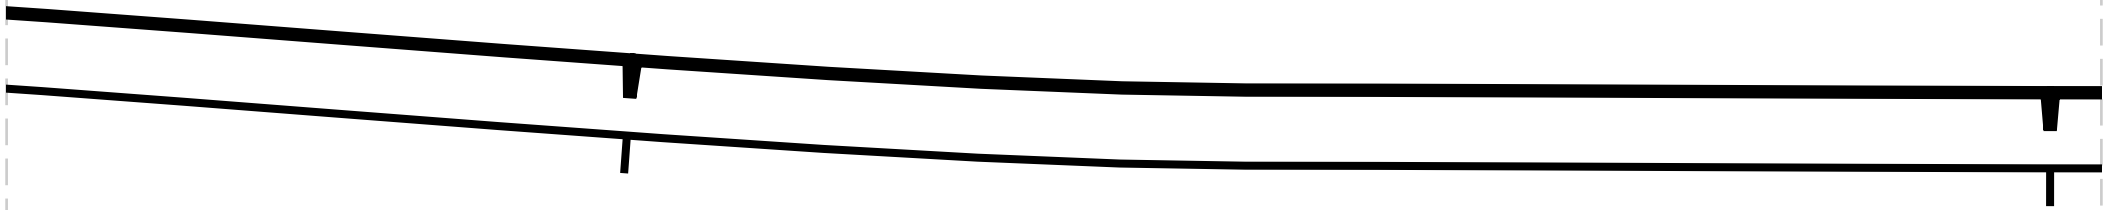

13/5

16

LOWER SLEEVE


8

EEVE LINING


G: Cut 2





14/1

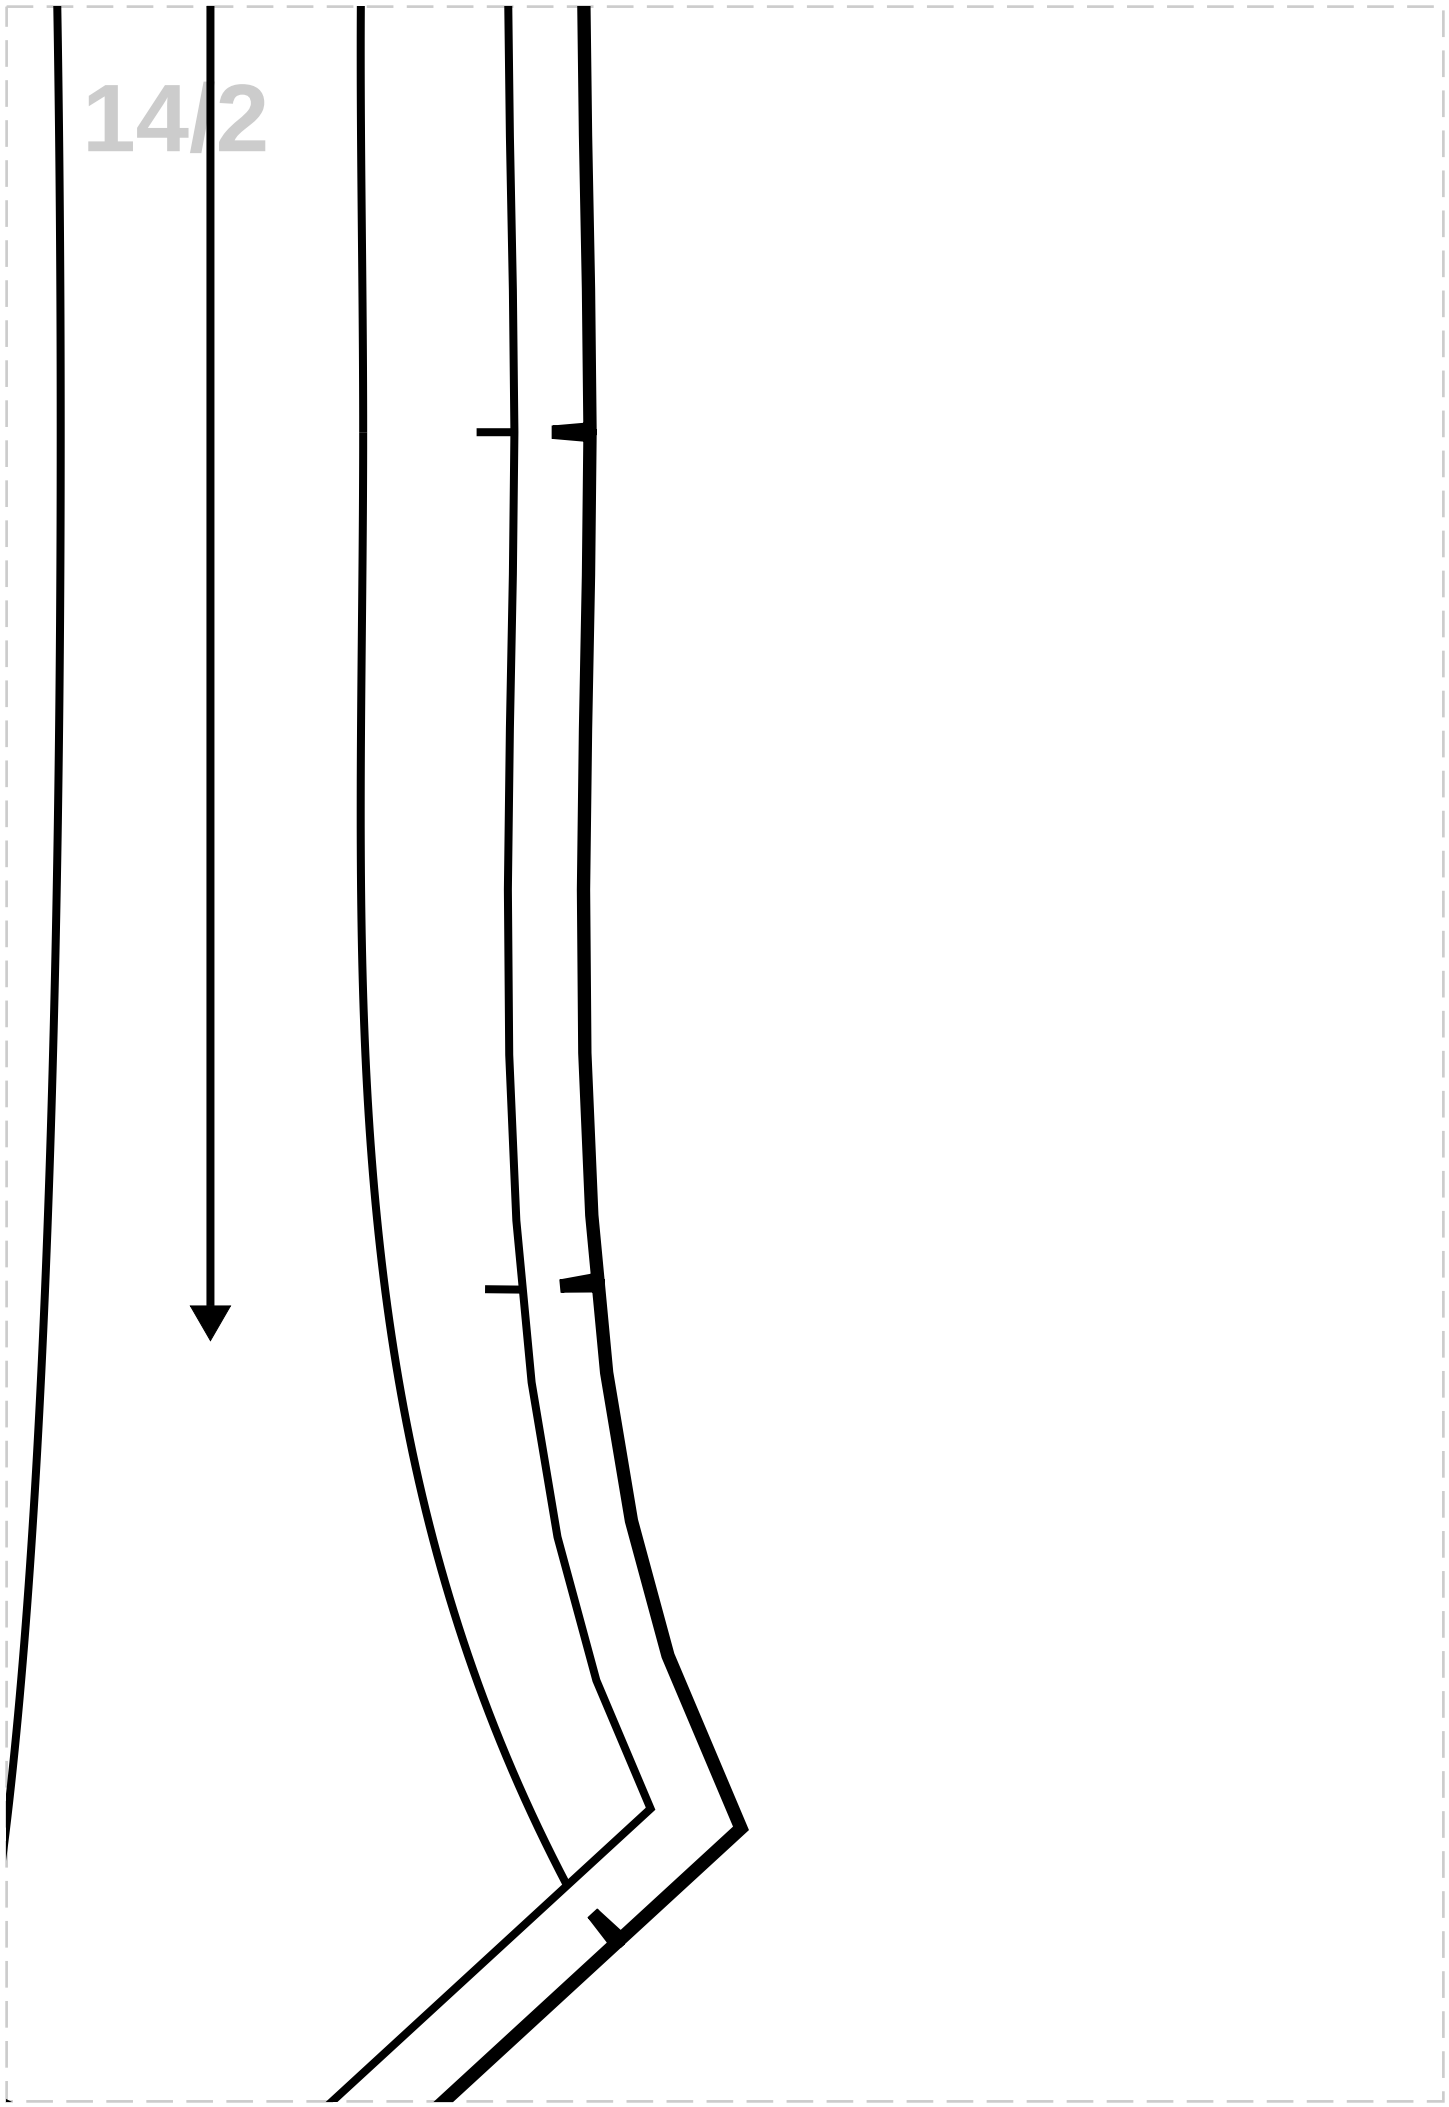
14/2

14/3

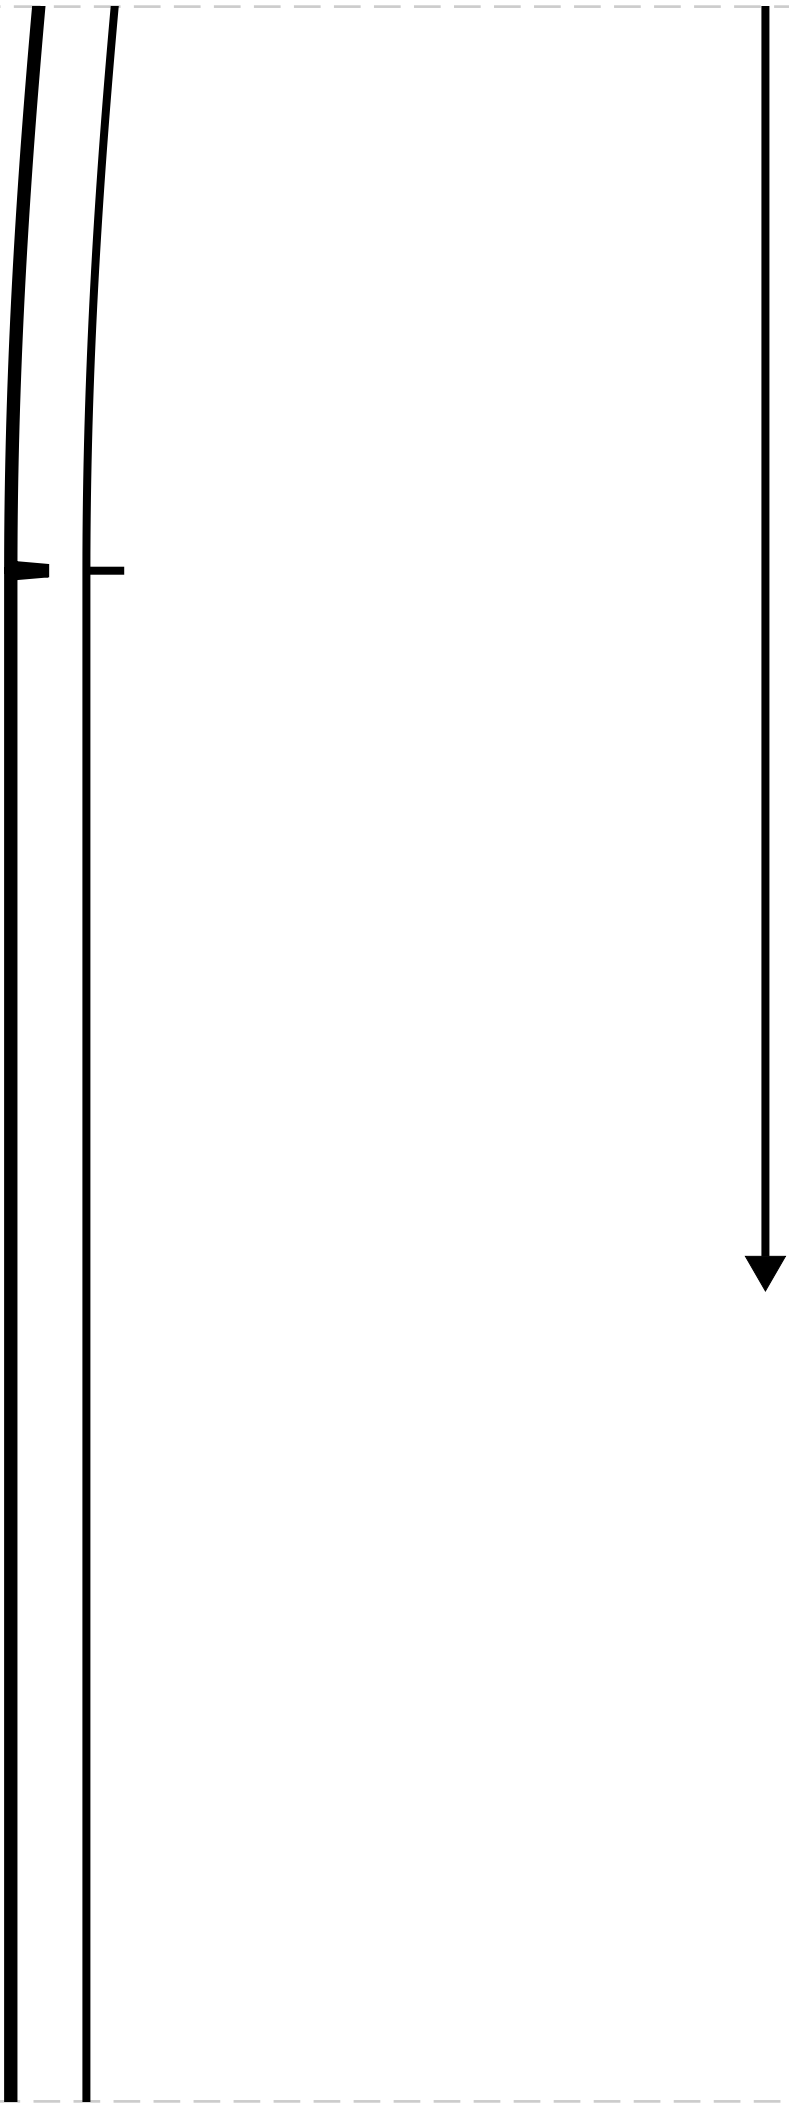


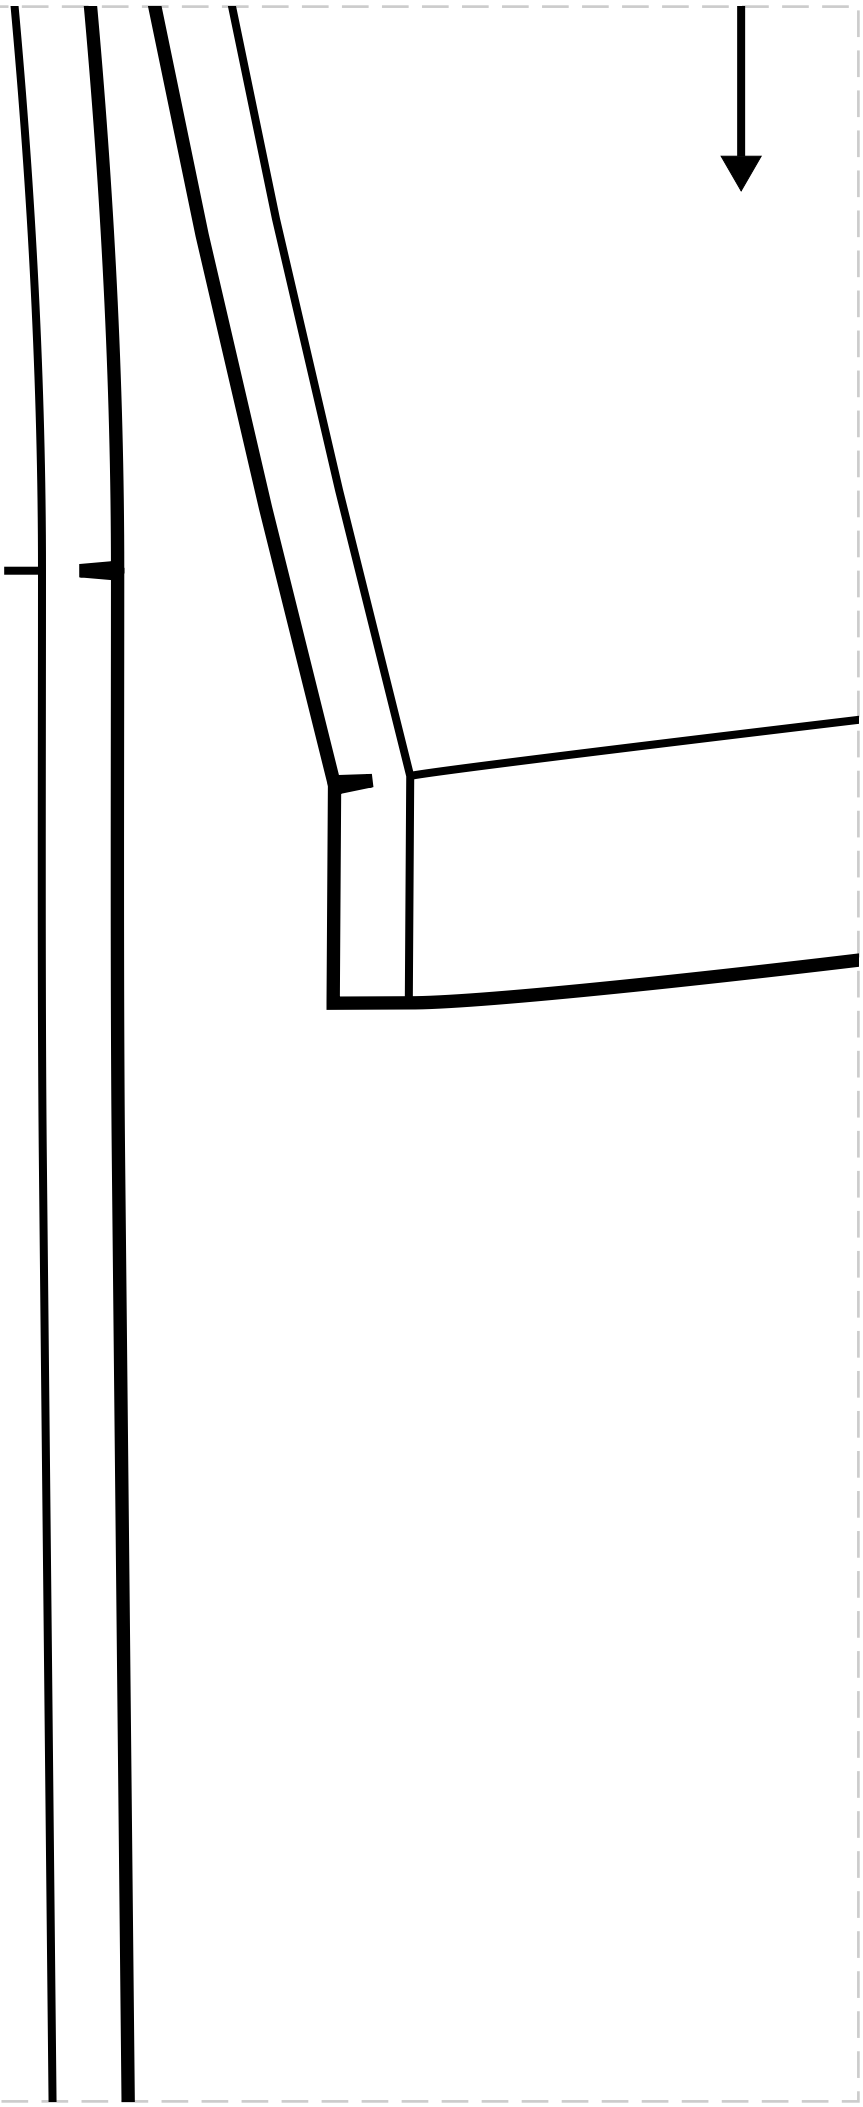


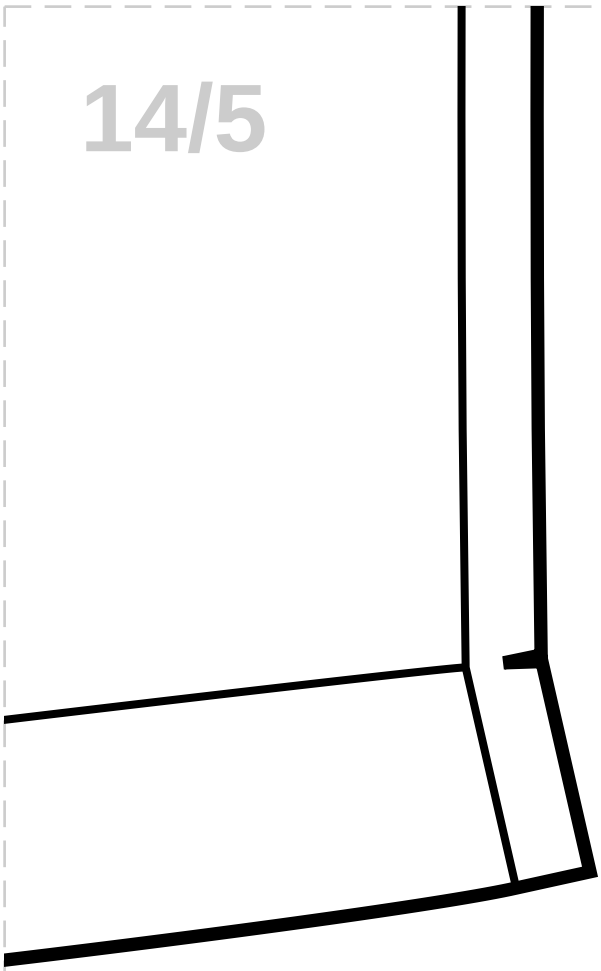

15/1

9
BACK NECK FACING
MAIN FABRIC: Cut 1
FUSIBLE INTERFACING: Cut 1

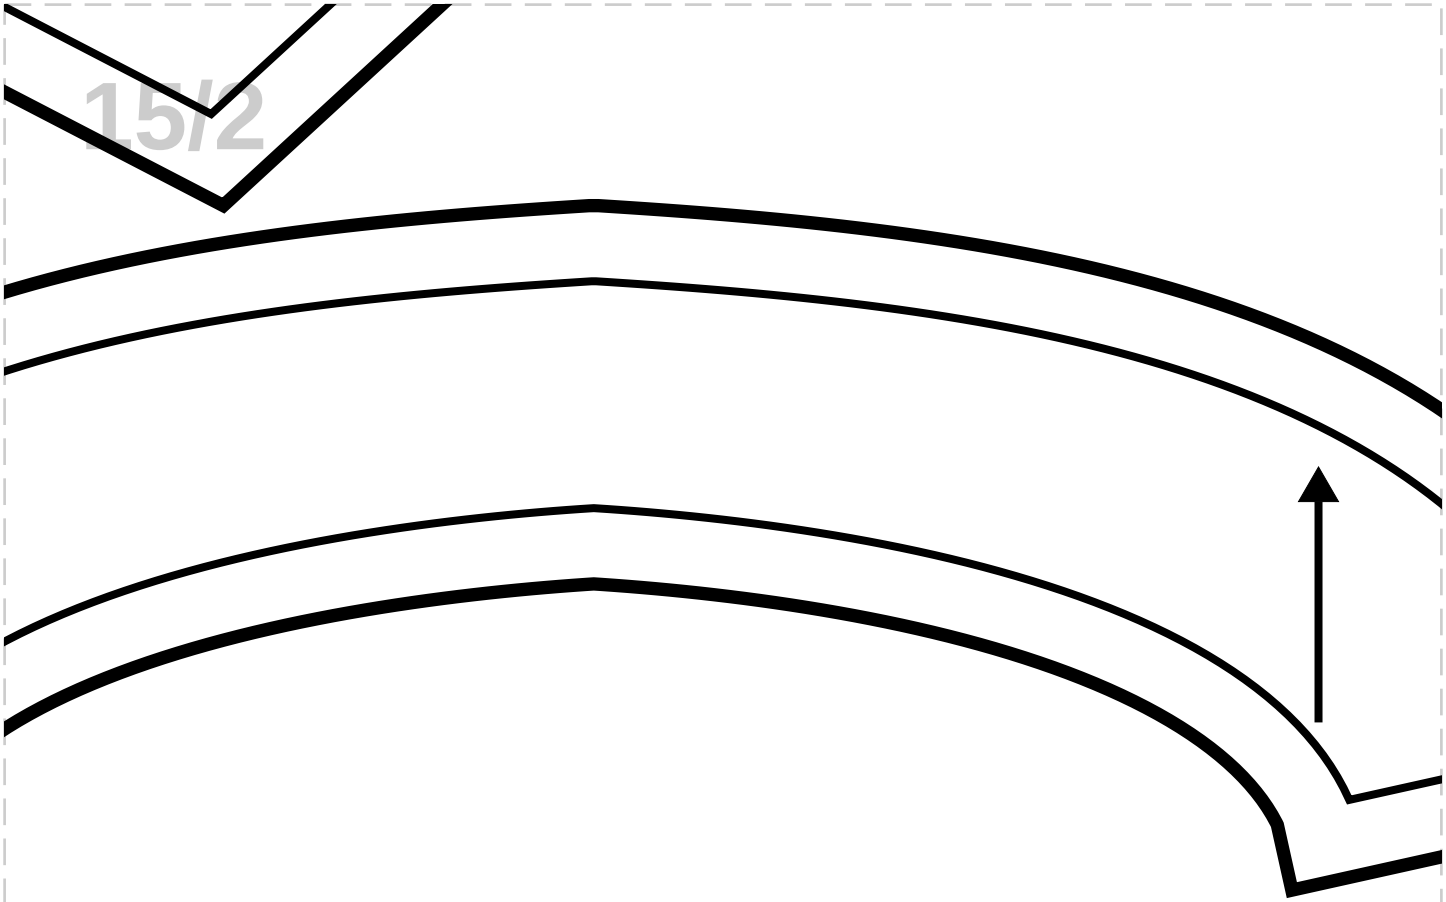

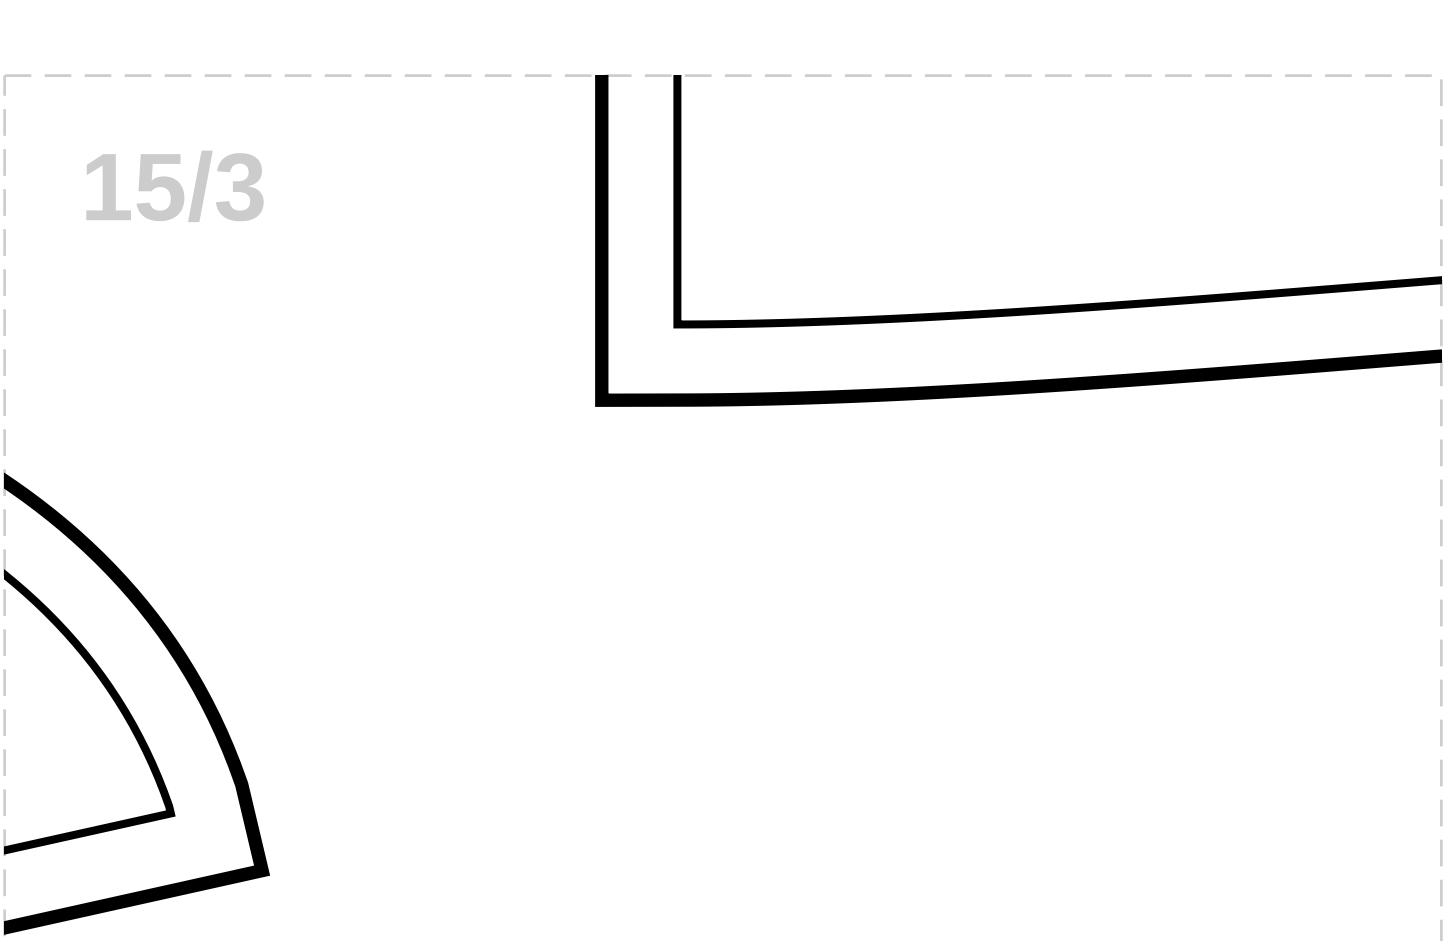

15/4

15/5