**cozysewpatterns**

# Print this Calibration Test page first!

Size: Height: 167.75, Bust: 95.25, Waist: 78.75, Hips: 102.75
SIZE 10

## Notes

## How to print

### Printing


Once your Calibration Test Page has been printed, measure the 4”x 4” (10cm) scale box with a ruler. If the lengths match, you can confidently print your pattern. If the rulers do not match, set your print settings to 100% or Actual and retry.

### Cutting

Your printouts will always have a dashed border to perfectly match your sheets. Cut off the right edge of each page. Be careful not to cut beyond the dashed mark, otherwise your patterns will not align accurately.

### Tapping

Group each sheet by the second number marked on each pate i.e. in a group 1, there are: 1/1, 2/1, 3/1, 4/1, etc. In a group 2: 1/2, 2/2 etc. 2. Place page 1/1 on top of the page 2/1, overlapping the right side edge. Match corners and crosses and secure with a pin or tape. Then use a scotch tape to permanently attach the sheets together.

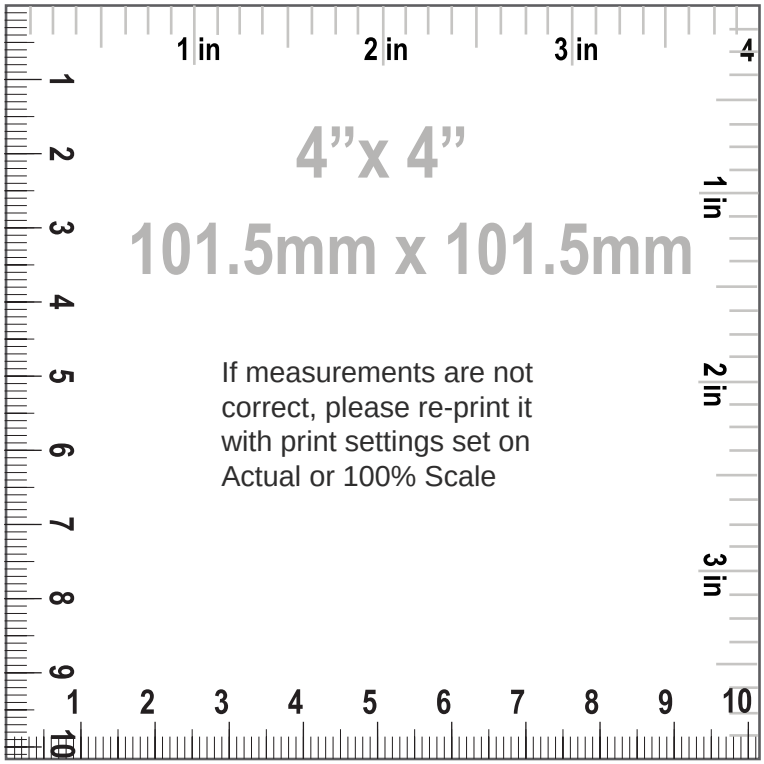

SIZE 10
Seam Allowance: 1 (3/8 in)

## Pattern pieces:

1. "FRONT LINING", LINING: Cut 2
2. "CENTER FRONT", MAIN FABRIC, FUSIBLE INTERFACING: Cut 2
3. "SIDE FRONT", MAIN FABRIC, FUSIBLE INTERFACING: Cut 2
4. "CENTER BACK", MAIN FABRIC, FUSIBLE INTERFACING: Cut 2
5. "CENTER BACK LINING", LINING: Cut 1
6. "SIDE BACK", MAIN FABRIC, FUSIBLE INTERFACING: Cut 2
7. "SIDE BACK LINING", LINING: Cut 2
8. "FRONT NECK FACING", MAIN FABRIC, FUSIBLE INTERFACING: Cut 2
9. "BACK NECK FACING", MAIN FABRIC, FUSIBLE INTERFACING: Cut 1
10. "UPPER COLLAR", MAIN FABRIC, FUSIBLE INTERFACING: Cut 1
11. "LOWER COLLAR", MAIN FABRIC, FUSIBLE INTERFACING: Cut 1
12. "BELT", MAIN FABRIC, FUSIBLE INTERFACING: Cut 1
13. "PATCH POCKET", MAIN FABRIC: Cut 2
14. "TWO BELT LOOPS", MAIN FABRIC: Cut 1
15. "UPPER SLEEVE", MAIN FABRIC: Cut 2
16. "LOWER SLEEVE", MAIN FABRIC: Cut 2
17. "UPPER SLEEVE LINING", LINING: Cut 2
18. "LOWER SLEEVE LINING", LINING: Cut 2


## Pattern Specs (Circumferences are divided by 2):


1. Hem max 4.60 none (1 3/4 in)
2. Seam allowance max 2.00 none (3/4 in)
3. Seam allowance p max 1.50 none (5/8 in)
4. Stretch factor 1.00 none (3/8 in)
5. Shoulder pads thickness 1.00 none (3/8 in)
6. Pocket entry length 11.95 cm (4 3/4 in)
7. Waist to pocket length 9.90 cm (3 7/8 in)
8. Side seam pocket position 5.54 cm (2 1/8 in)
9. Button diameter 1.50 cm (5/8 in)
10. Front buttons quantity 12.00 pc
11. Front length from HPS to hem 90.59 cm (35 5/8 in)
12. Across chest 54.05 cm (21 1/4 in)
13. Center front length to hem 80.95 cm (31 7/8 in)

14. Center back length to hem 87.83 cm (34 5/8 in)
15. Across front 37.25 cm (14 5/8 in)
16. Across back 39.82 cm (15 5/8 in)
17. Across shoulders 39.90 cm (15 3/4 in)
18. Side seam 61.94 cm (24 3/8 in)
19. Waist 46.54 cm (18 3/8 in)
20. Low hips 58.87 cm (23 1/8 in)
21. Blazer hemline sweep 63.81 cm (25 1/8 in)
22. Armhole length 56.17 cm (22 1/8 in)
23. Neck opening 18.13 cm (7 1/8 in)
24. Front neck drop 18.83 cm (7 3/8 in)
25. Back neck drop 3.80 cm (1 1/2 in)
26. Shoulder width 12.61 cm (5 in)
27. Apex to apex 20.05 cm (7 7/8 in)
28. Seam allowance poc max 3.00 none (1 1/8 in)
29. Hem poc max 6.00 none (2 3/8 in)
30. Pocket height 13.15 cm (5 1/8 in)
31. Stretch factor horizontal 1.00 none (3/8 in)
32. Stretch factor vertical 1.00 none (3/8 in)
33. Sleeve length 58.88 none (23 1/8 in)
34. Sleeve cap length 57.65 none (22 3/4 in)
35. Armhole length 56.17 none (22 1/8 in)
36. Sleeve upper arm width 35.12 none (13 7/8 in)
37. Sleeve opening 26.30 none (10 3/8 in)

# cozysewpatterns

Paper Size: LETTER;
Print Actual Size (100% Scale);

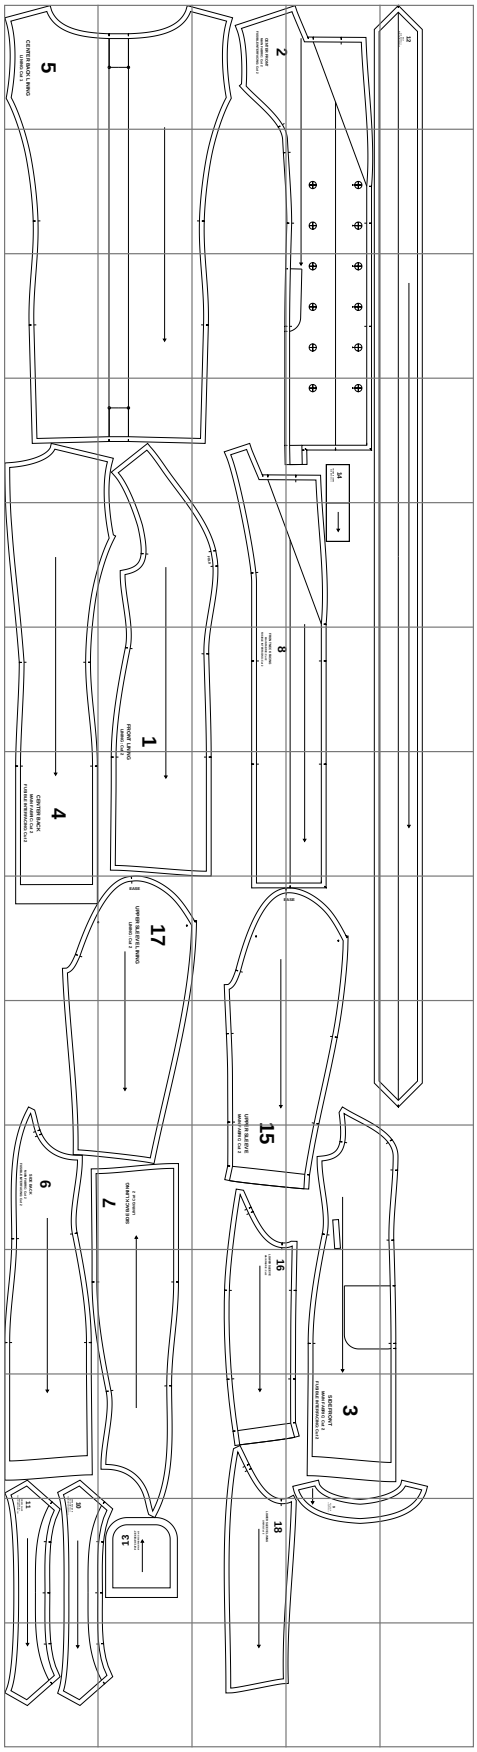

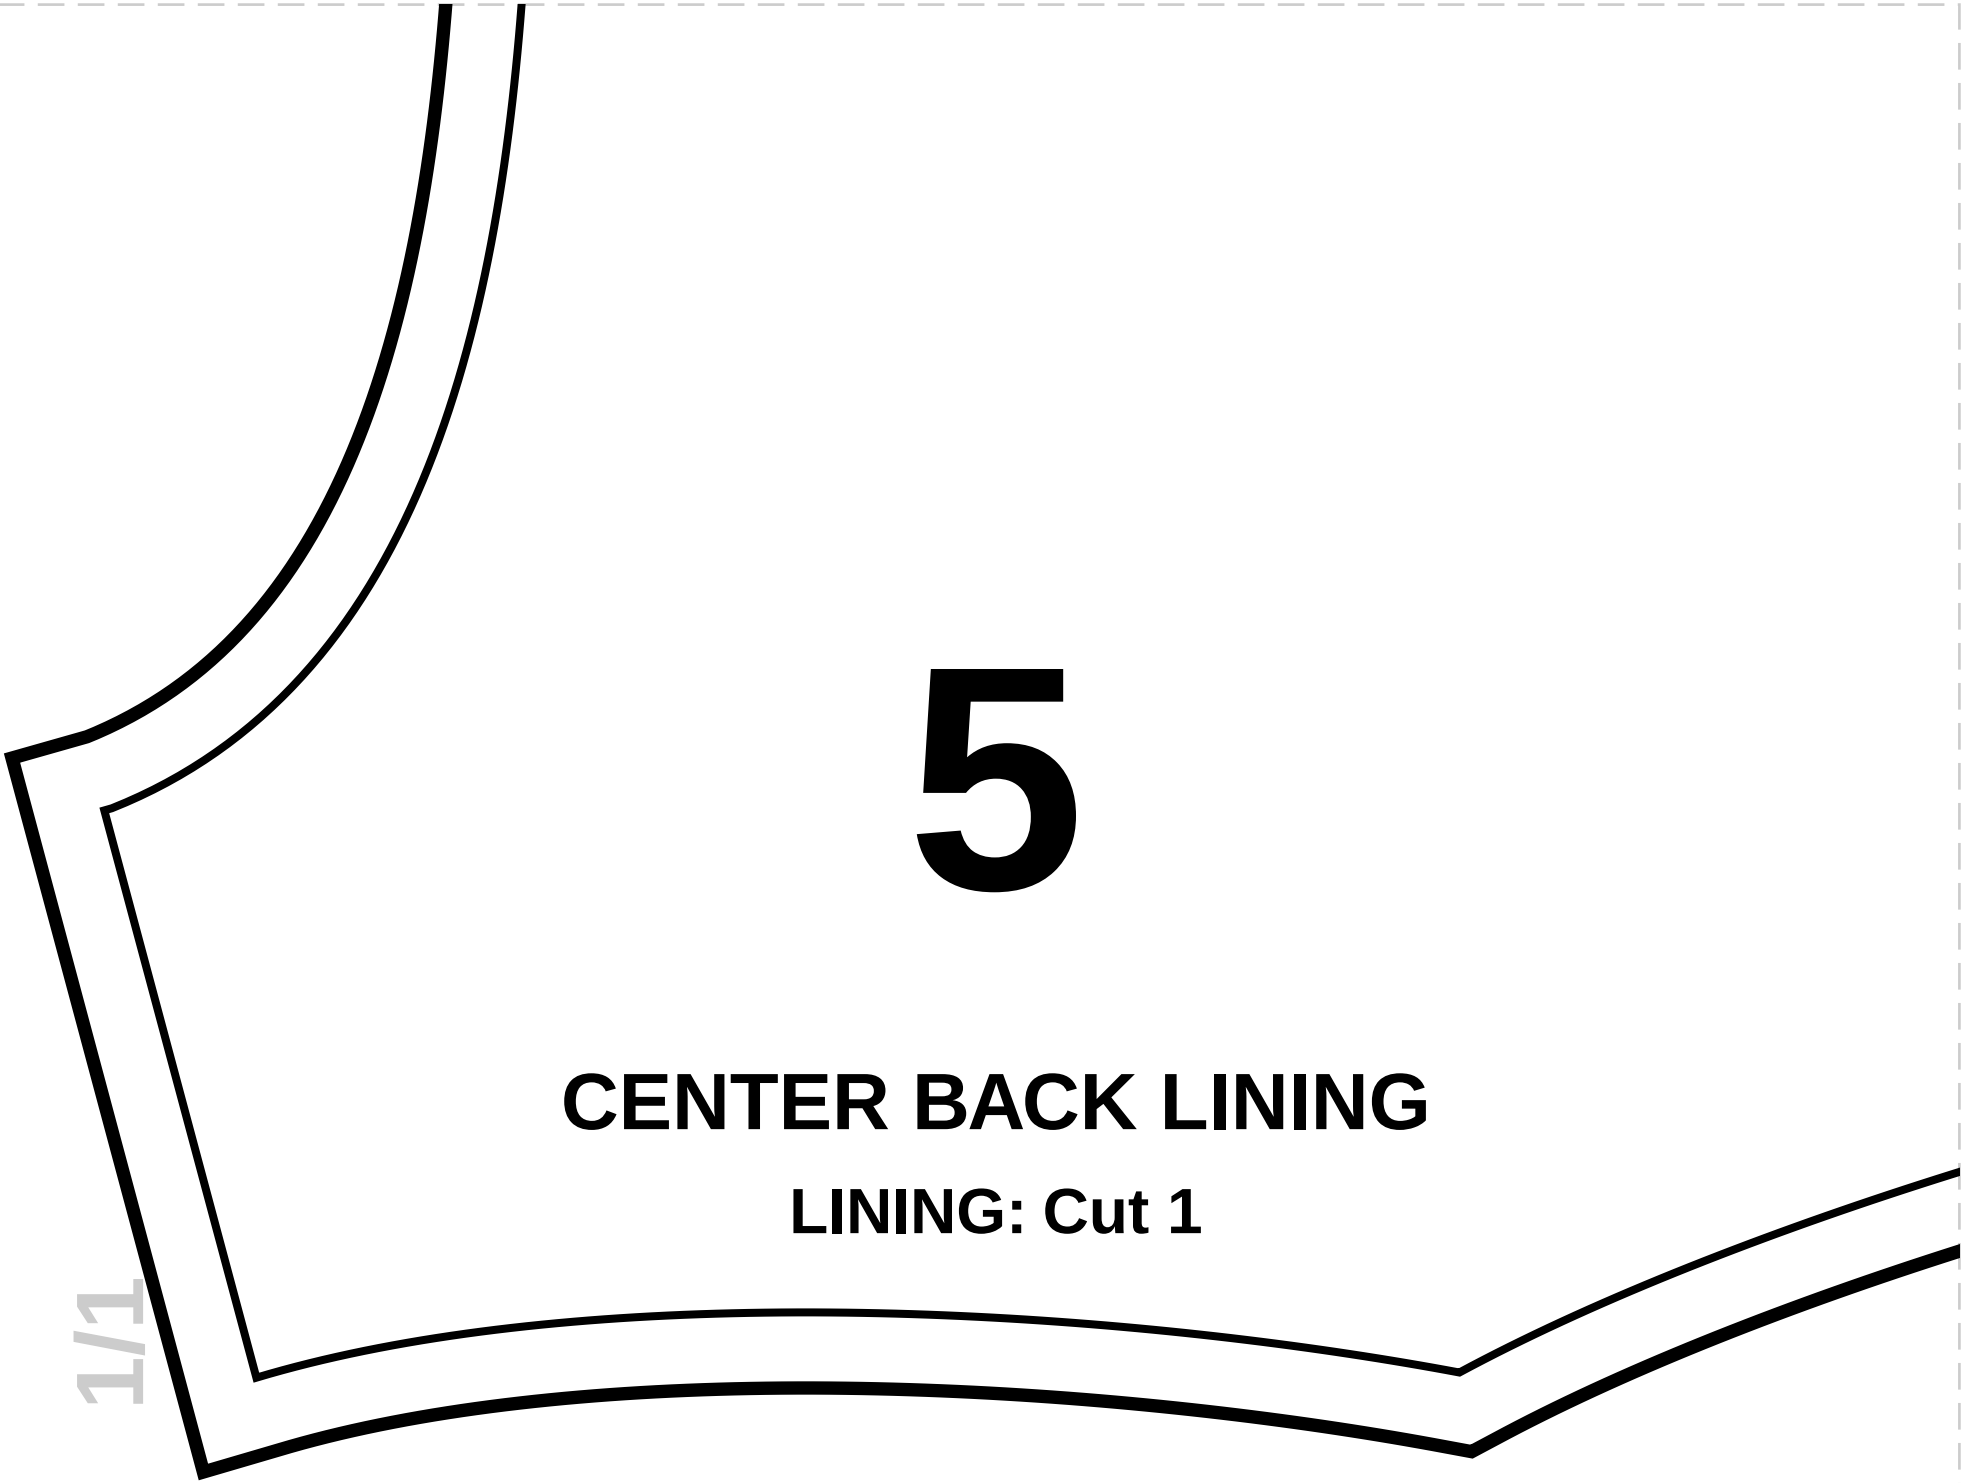


# 5

## CENTER BACK LINING

### LINING: Cut 1

1/1

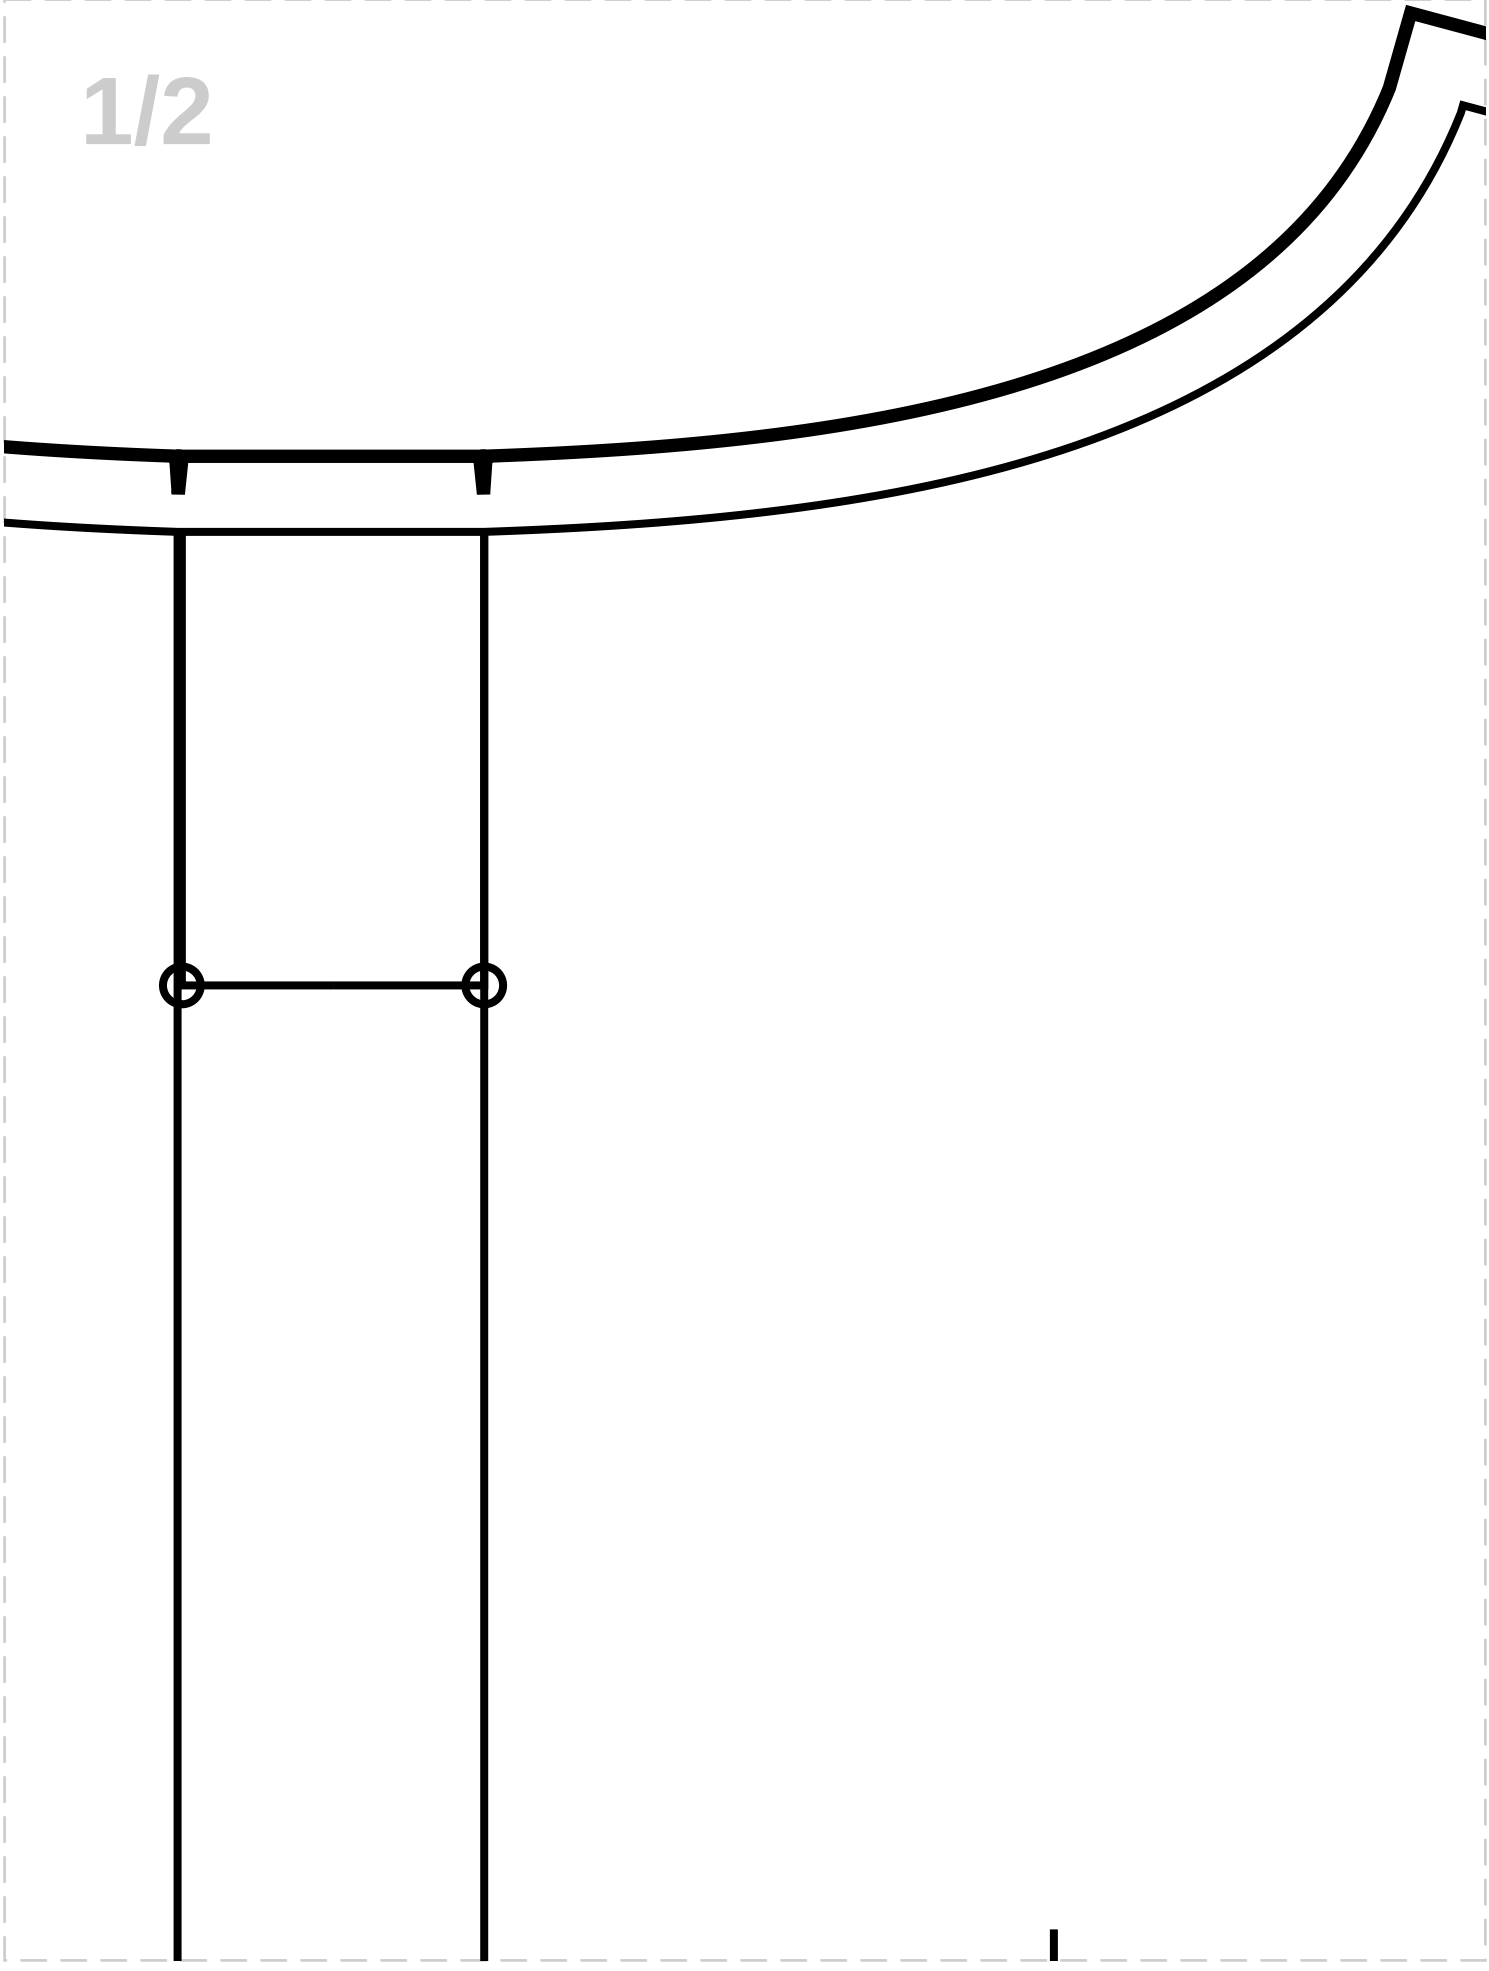



# 2

## CENTER FRONT

**MAIN FABRIC: Cut 2**

**FUSIBLE INTERFACING: Cut 2**

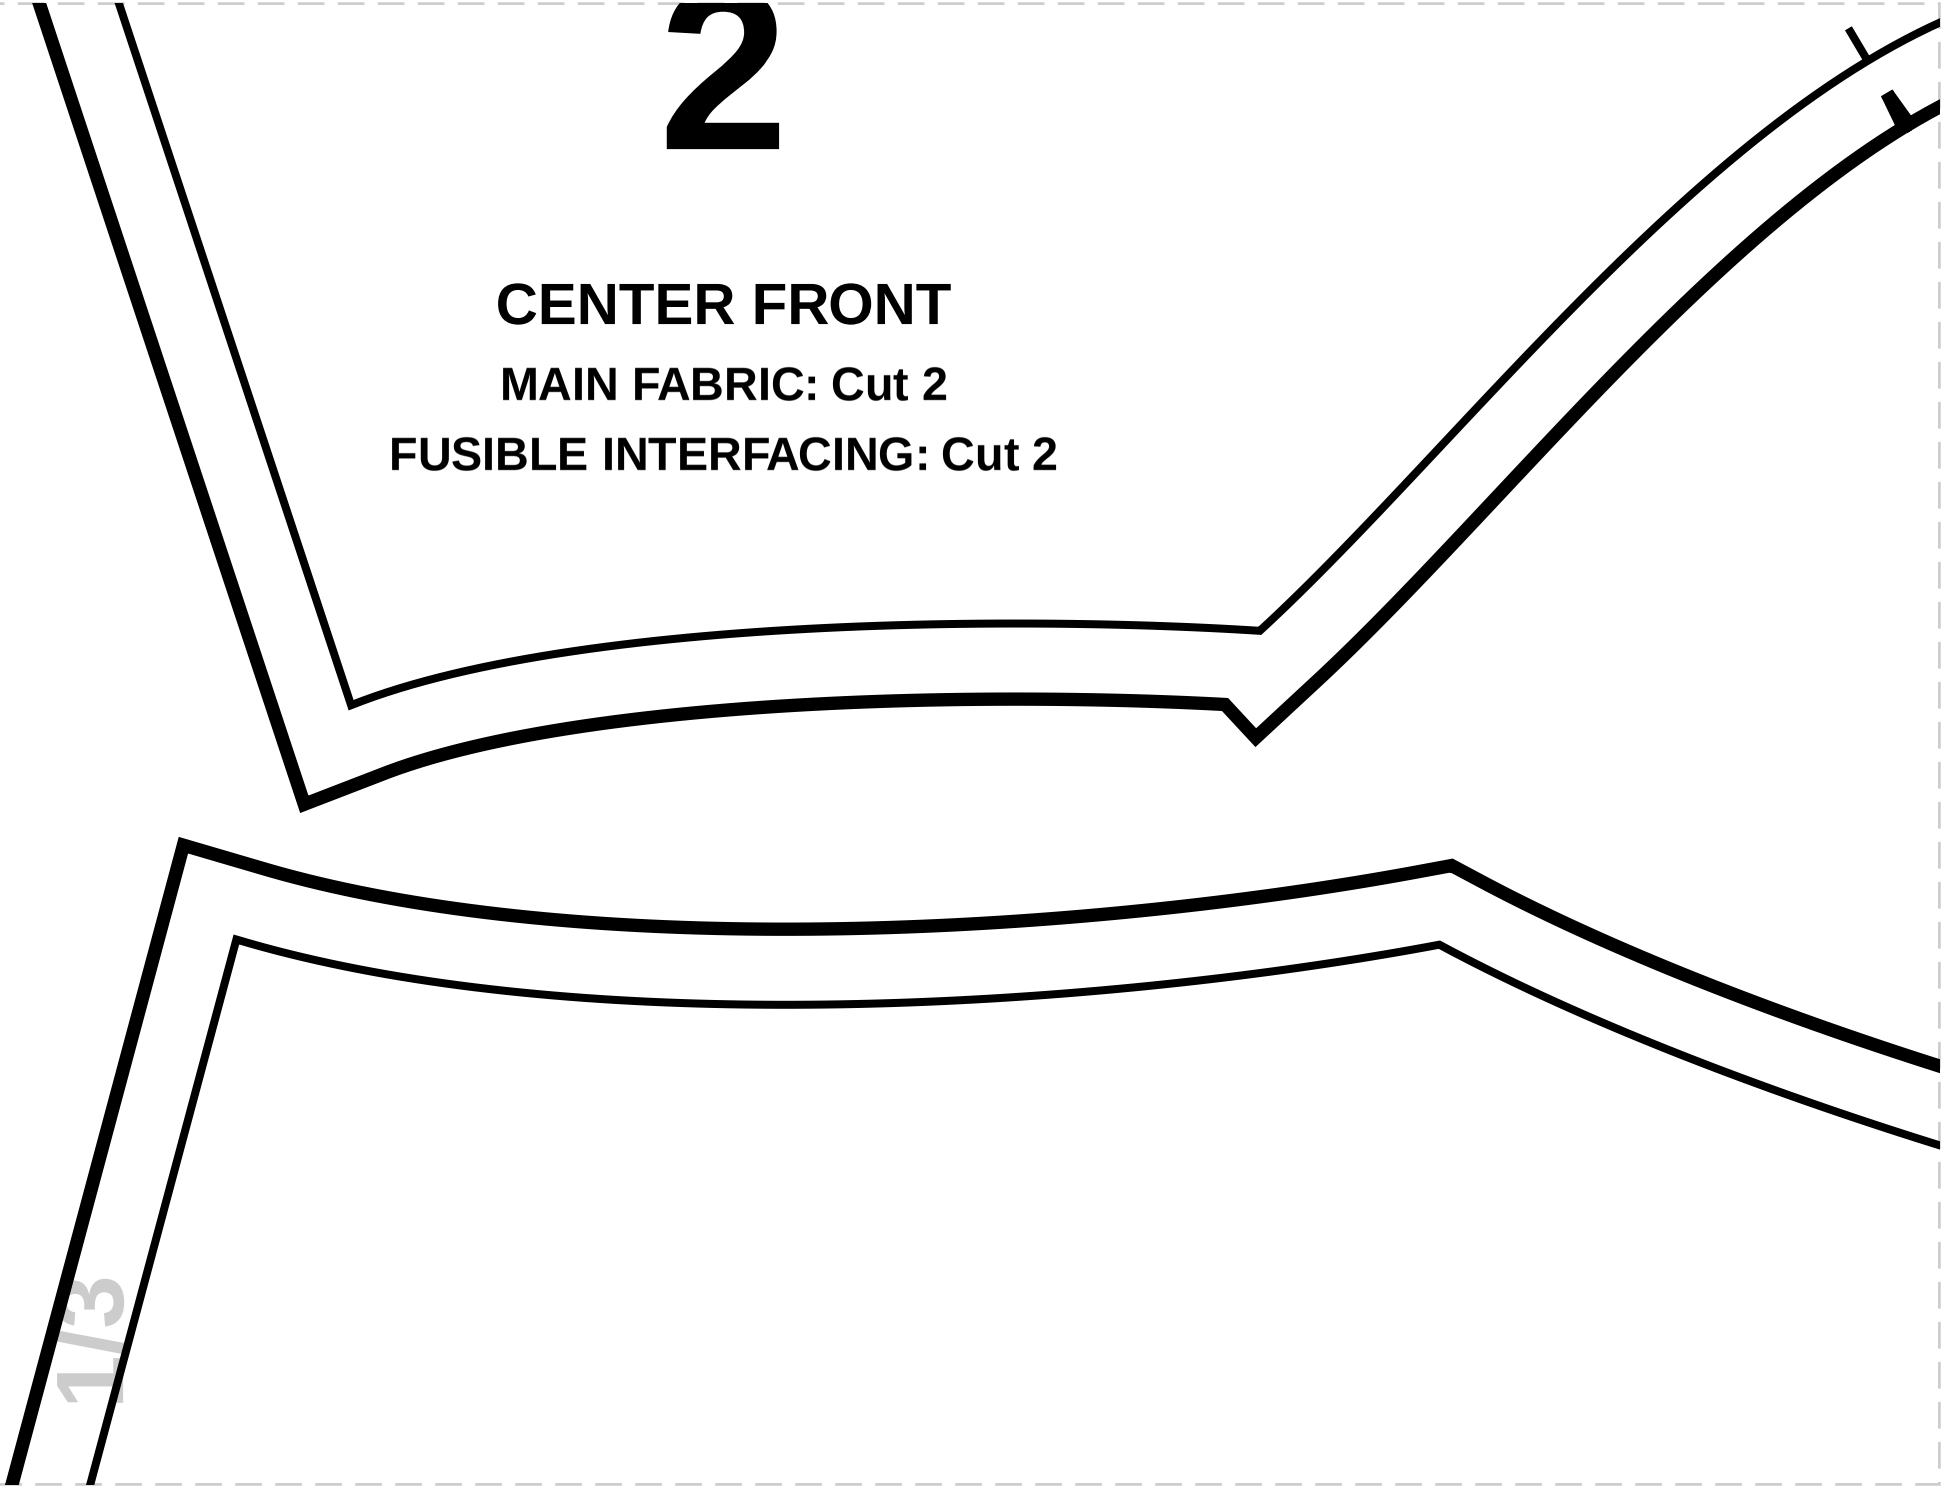

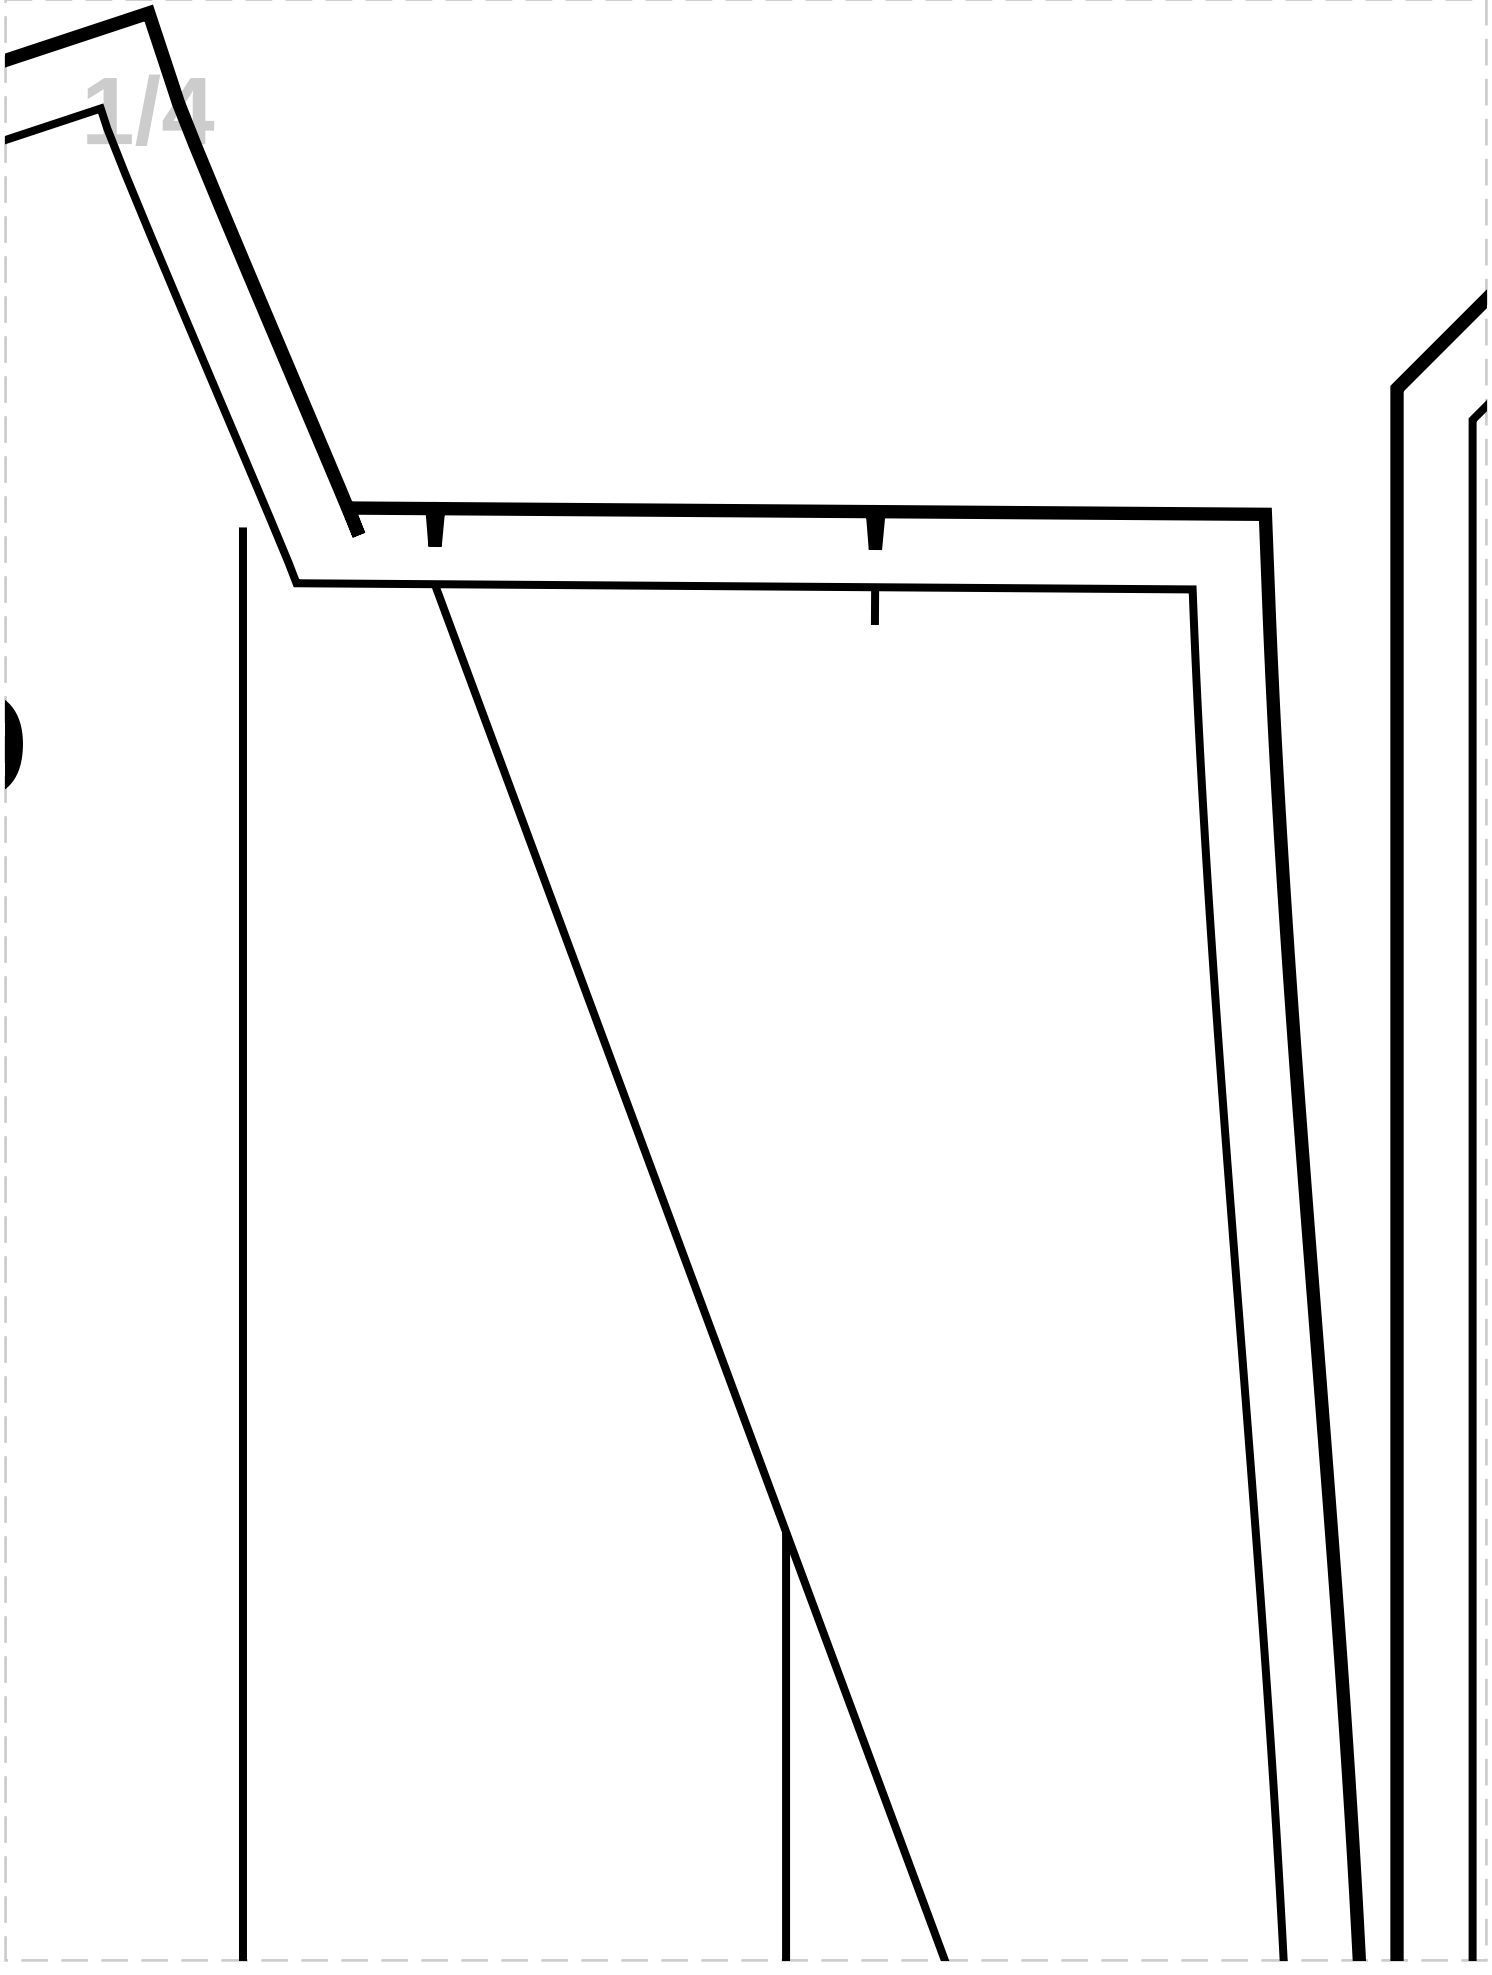



# 12


**BELT**


**MAIN FABRIC: Cut 1**


**FUSIBLE INTERFACING: Cut 1**

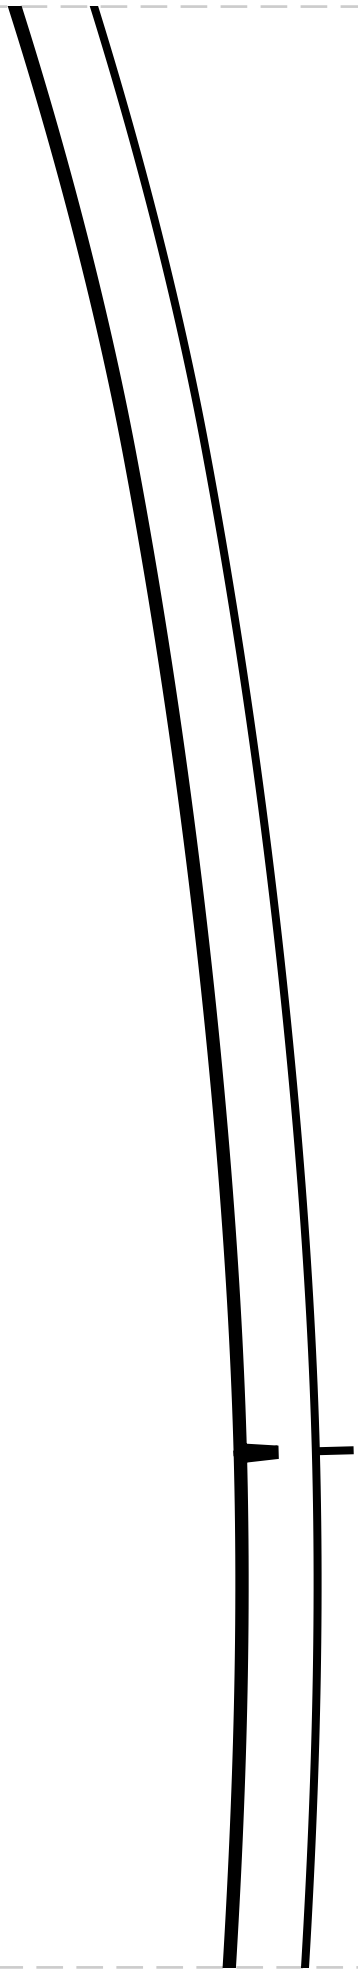


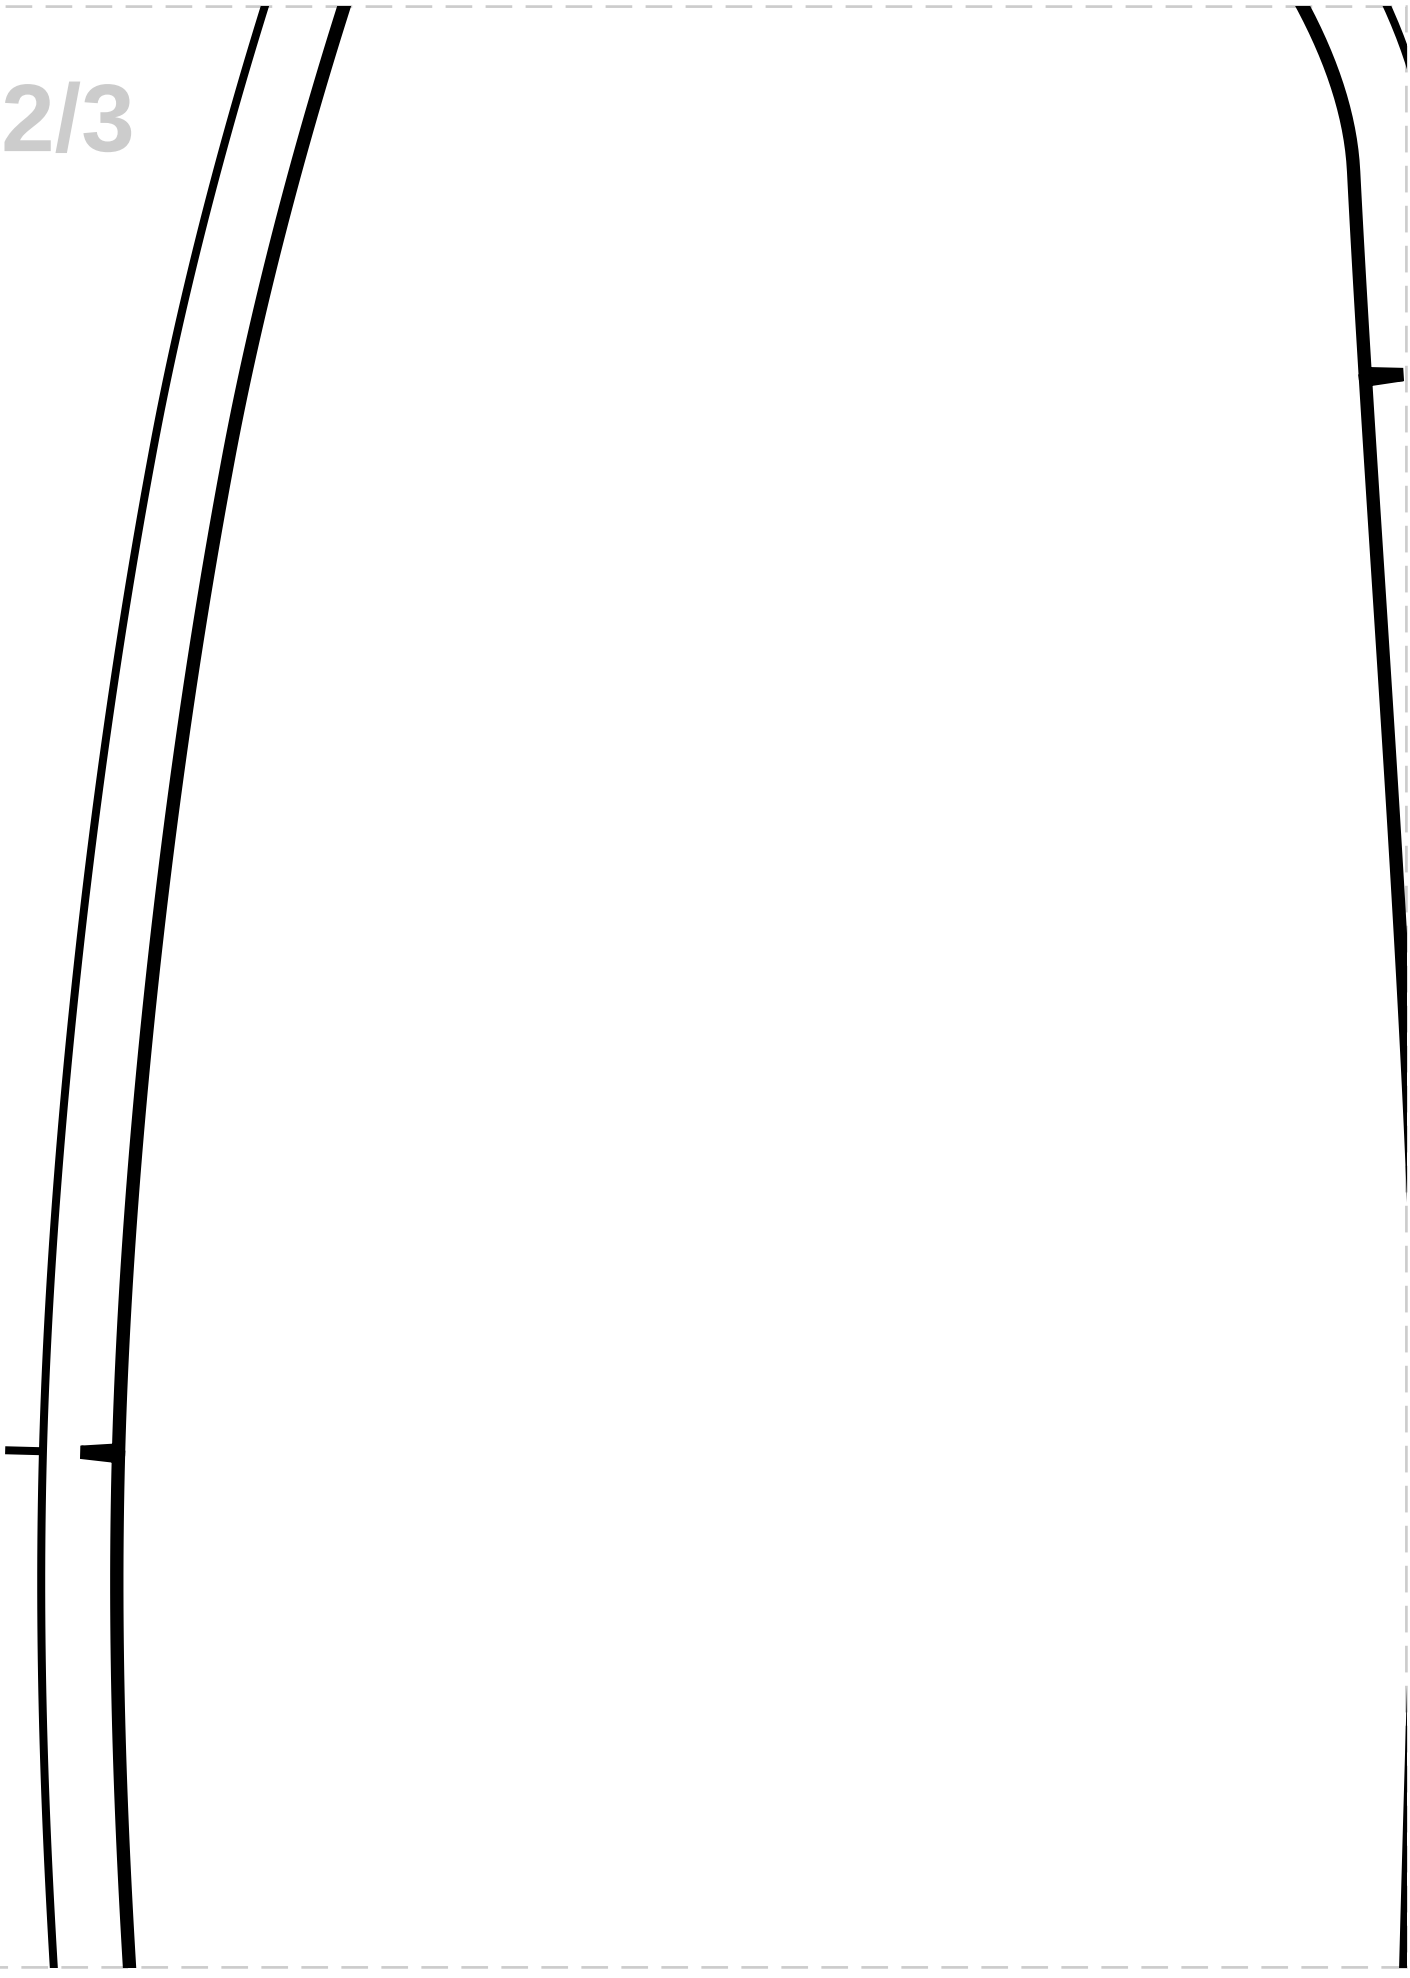


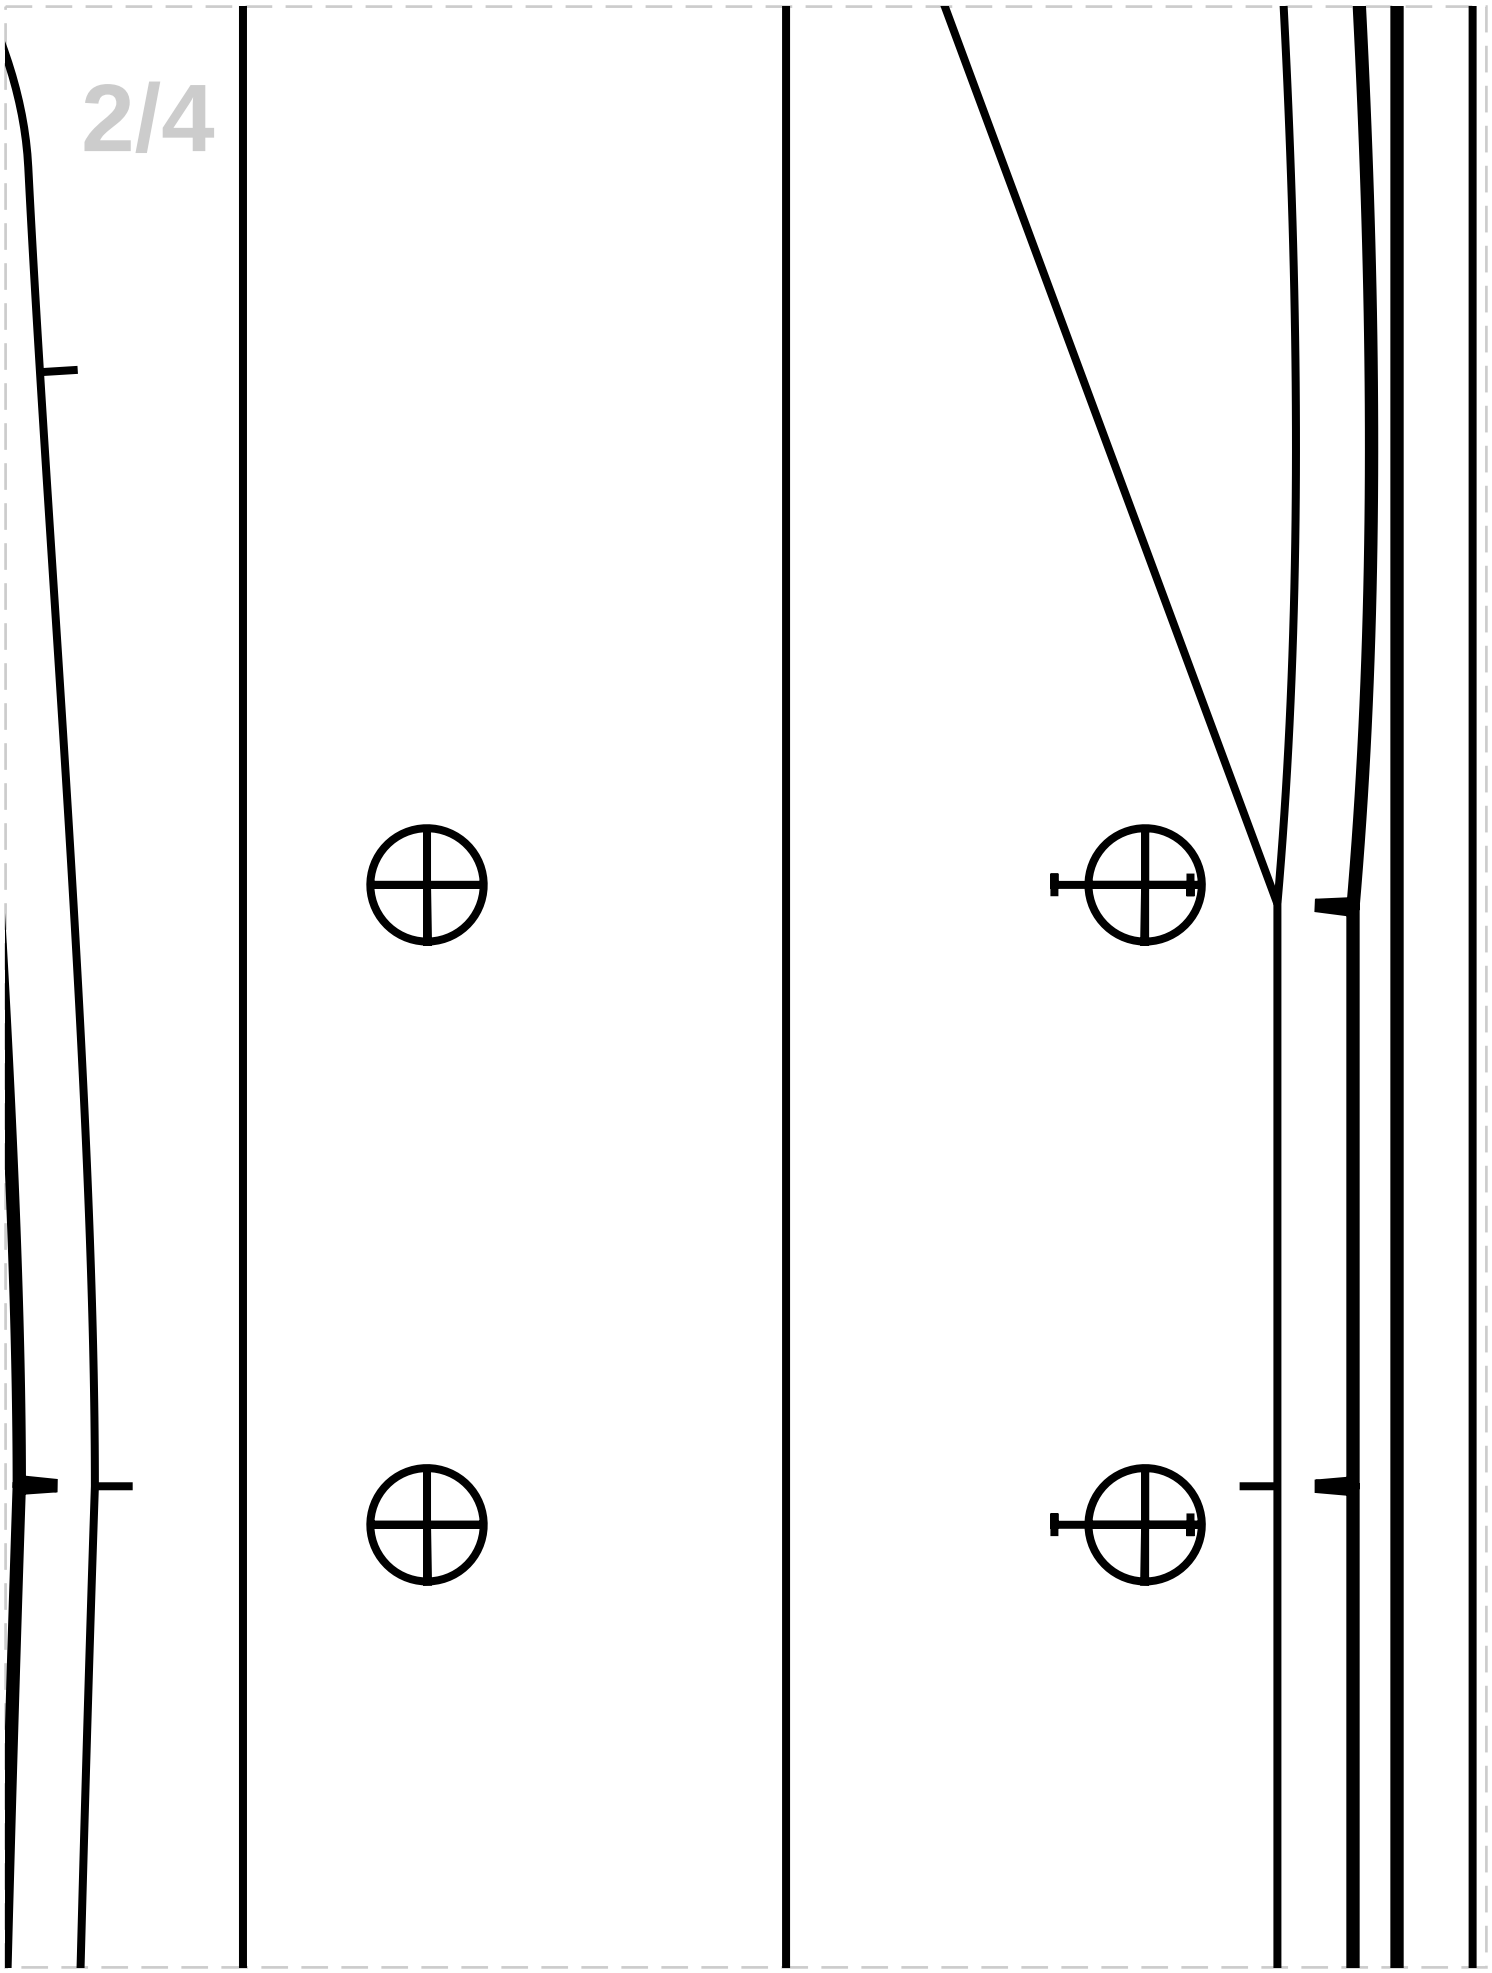


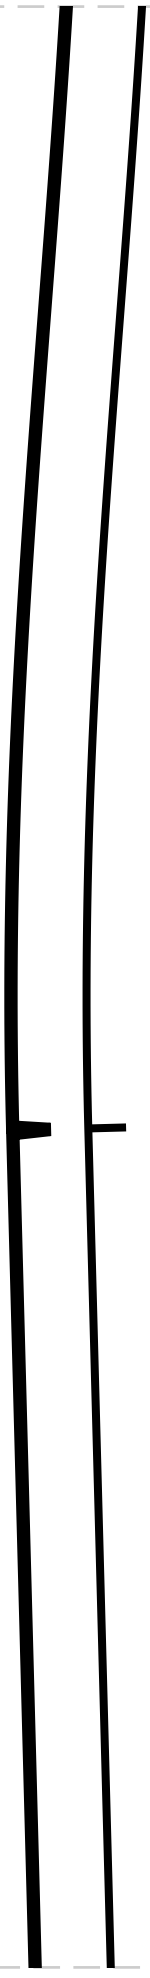





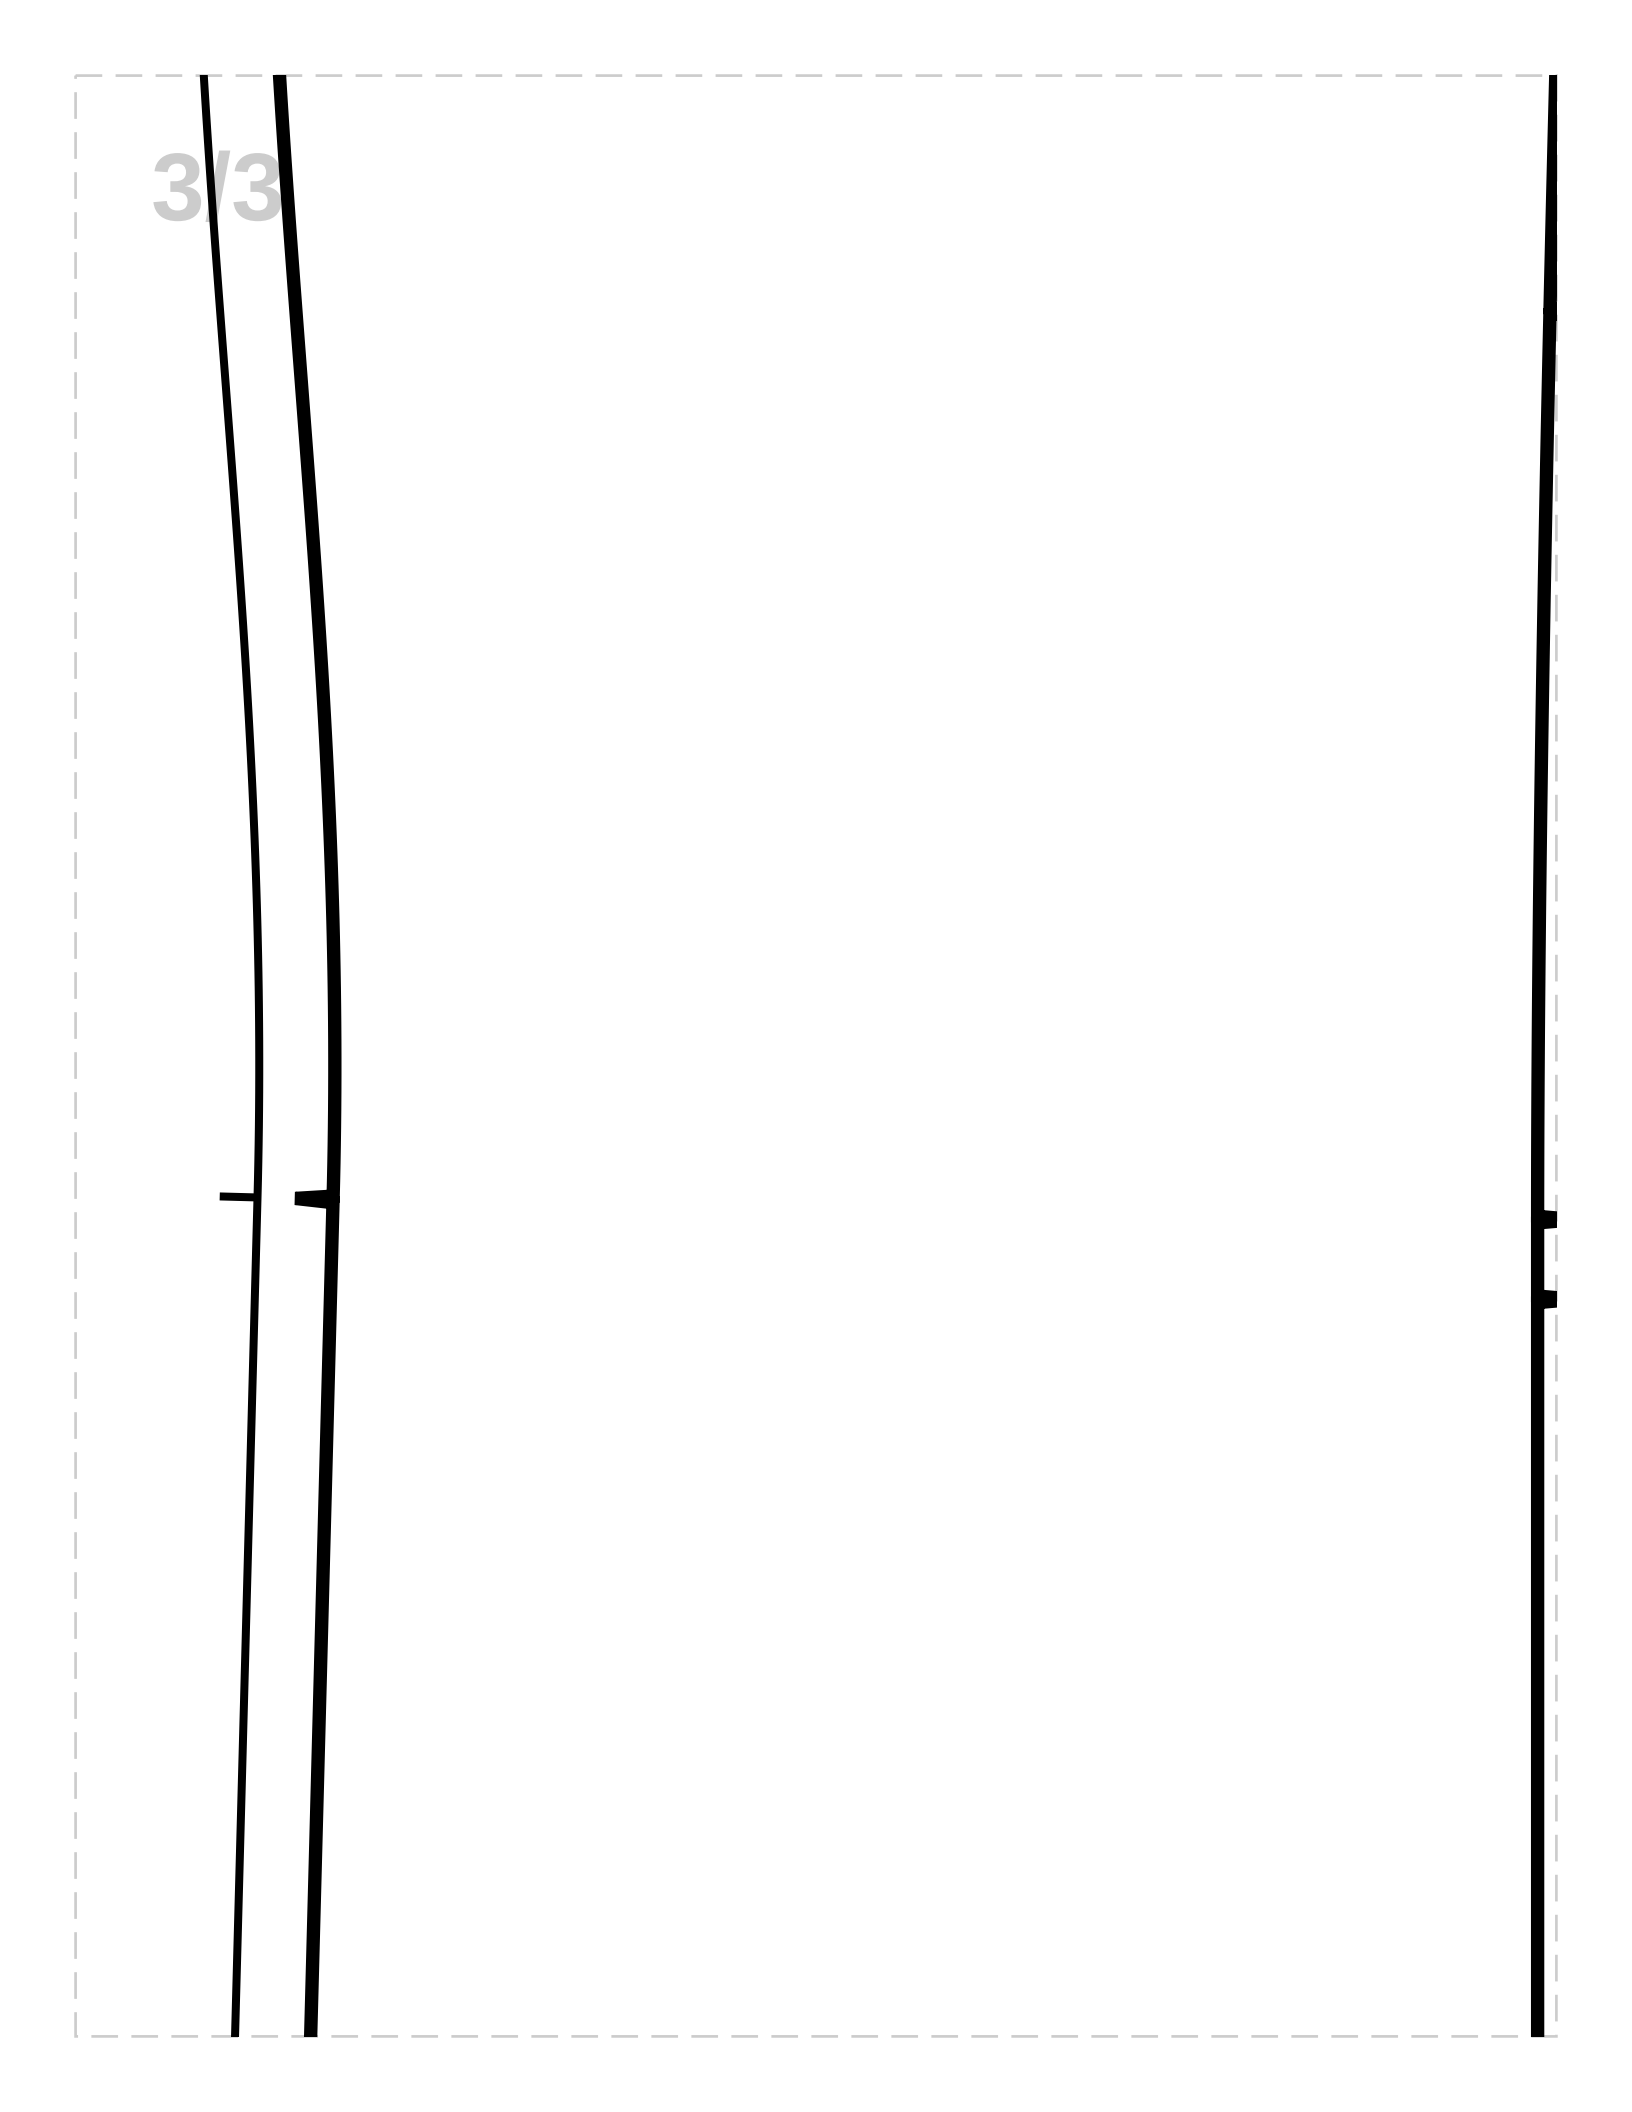


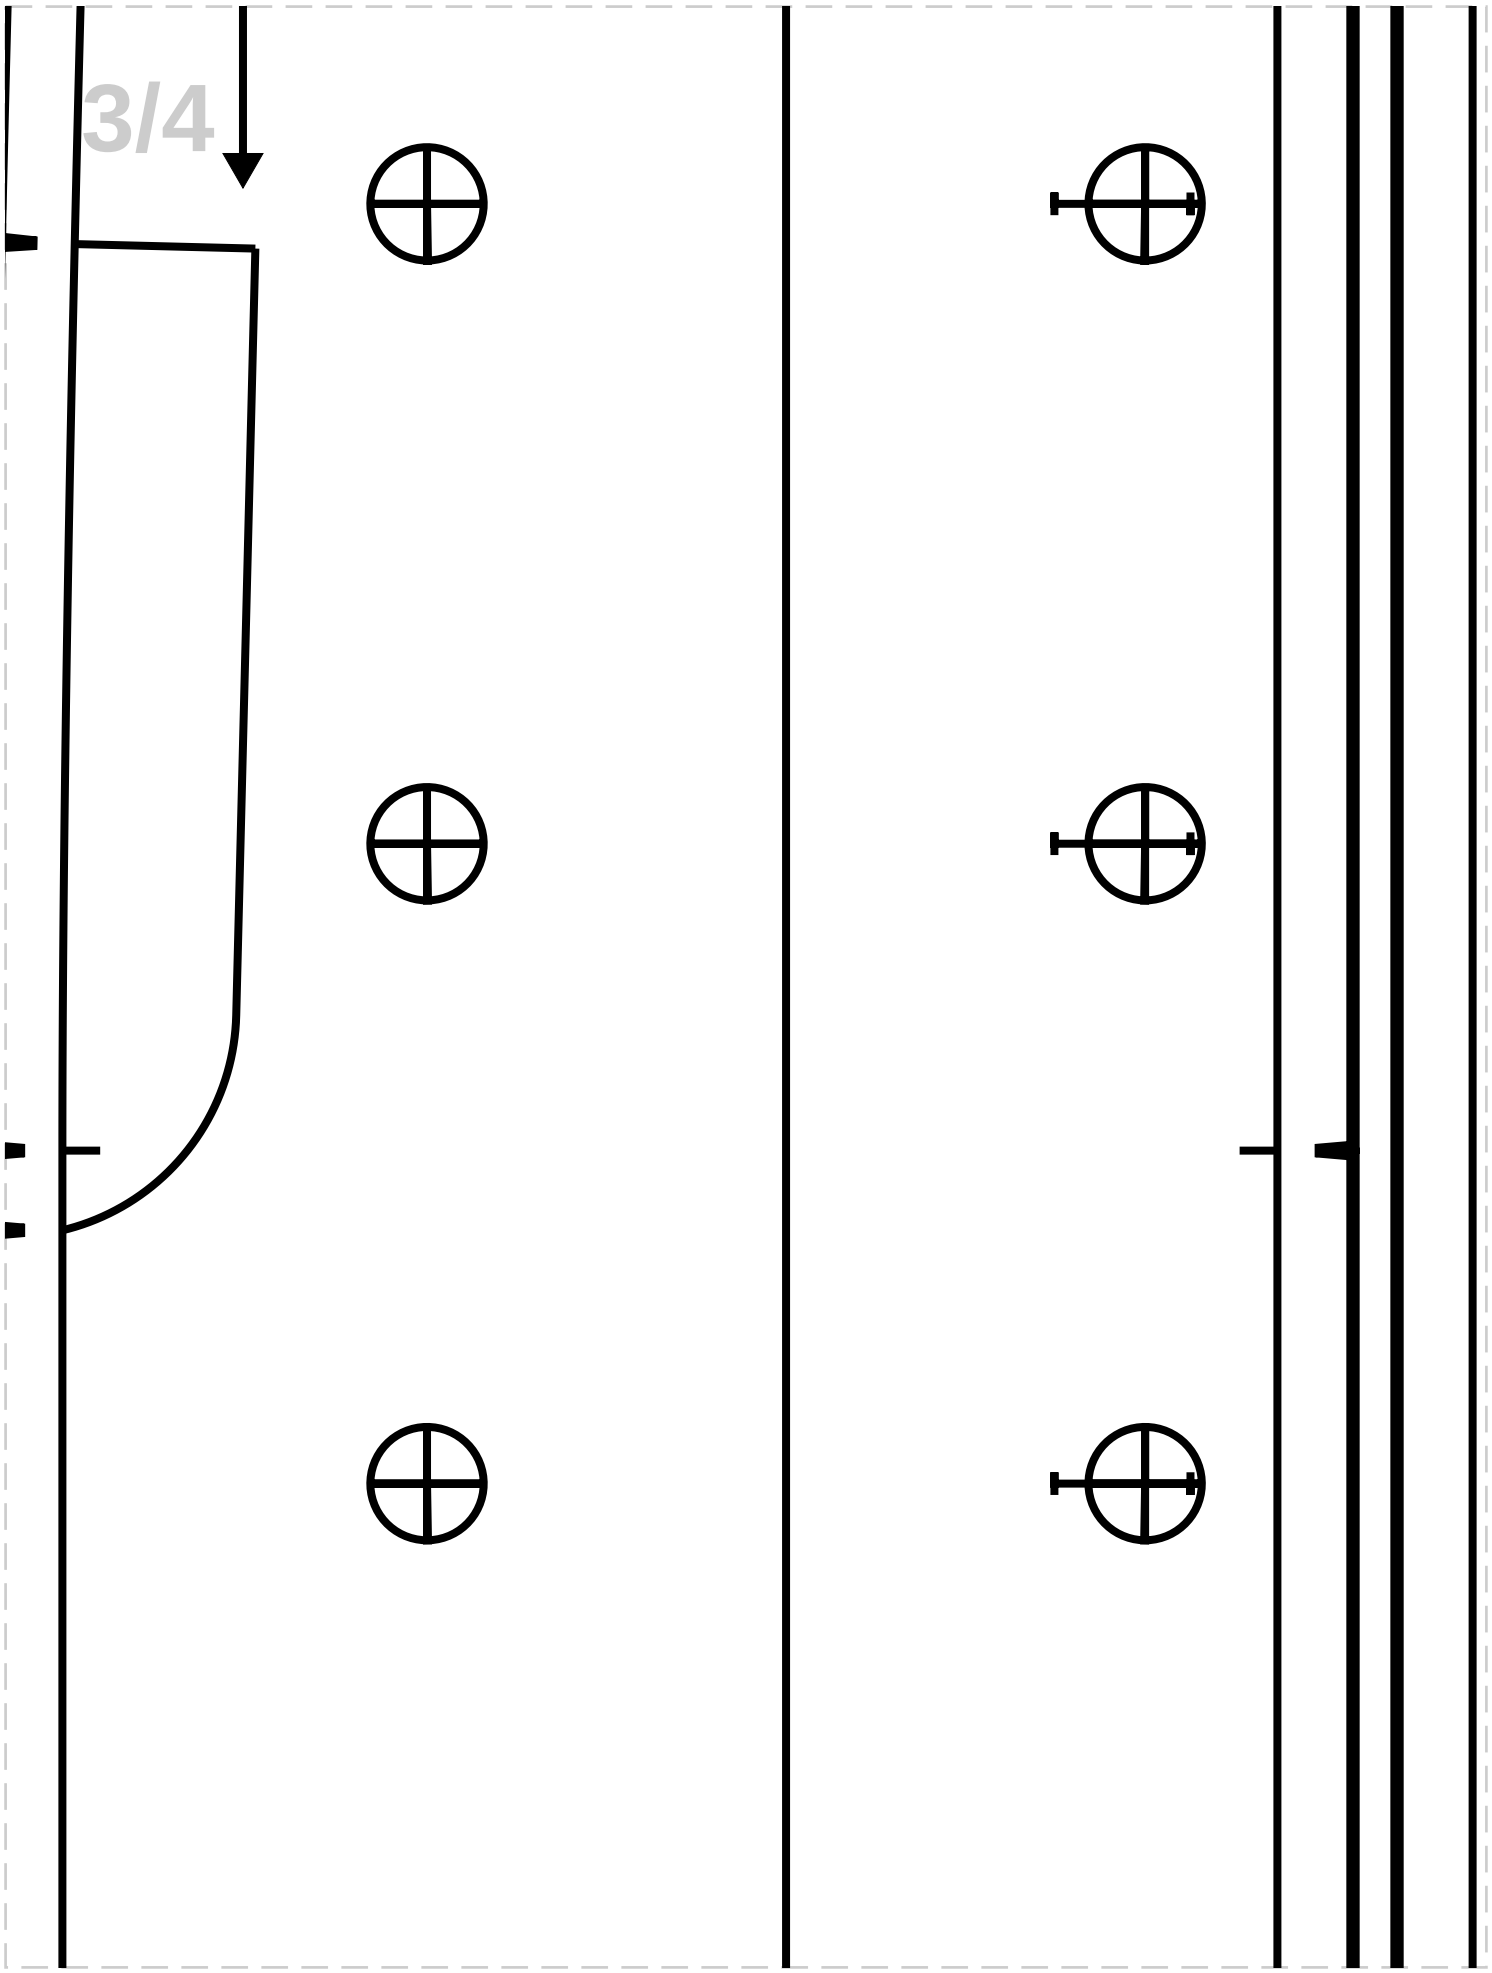

3/4




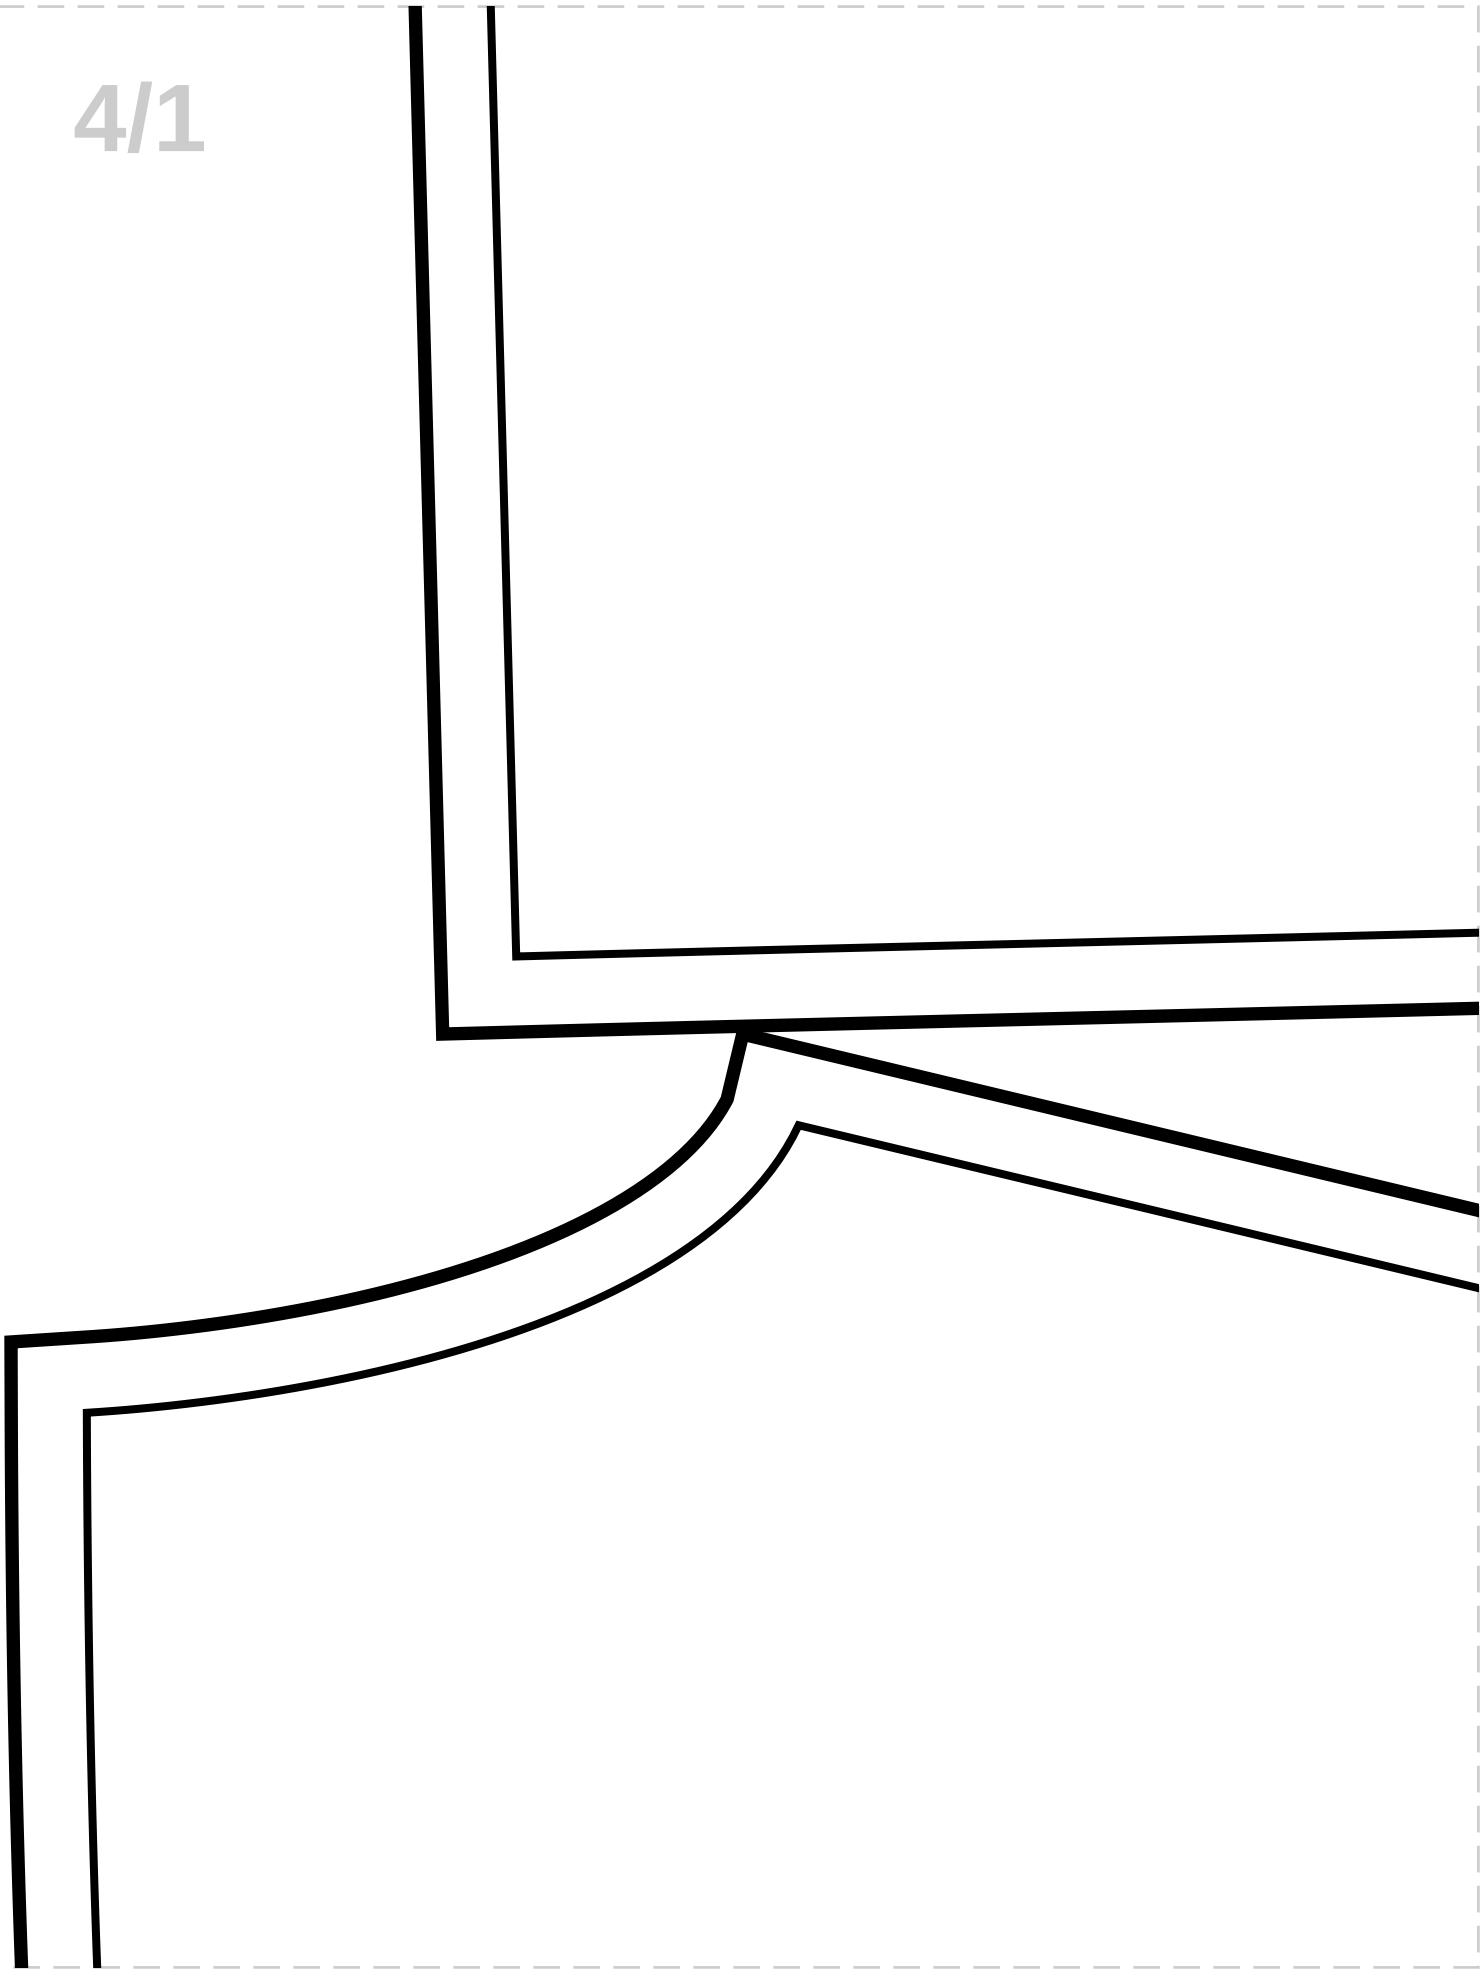


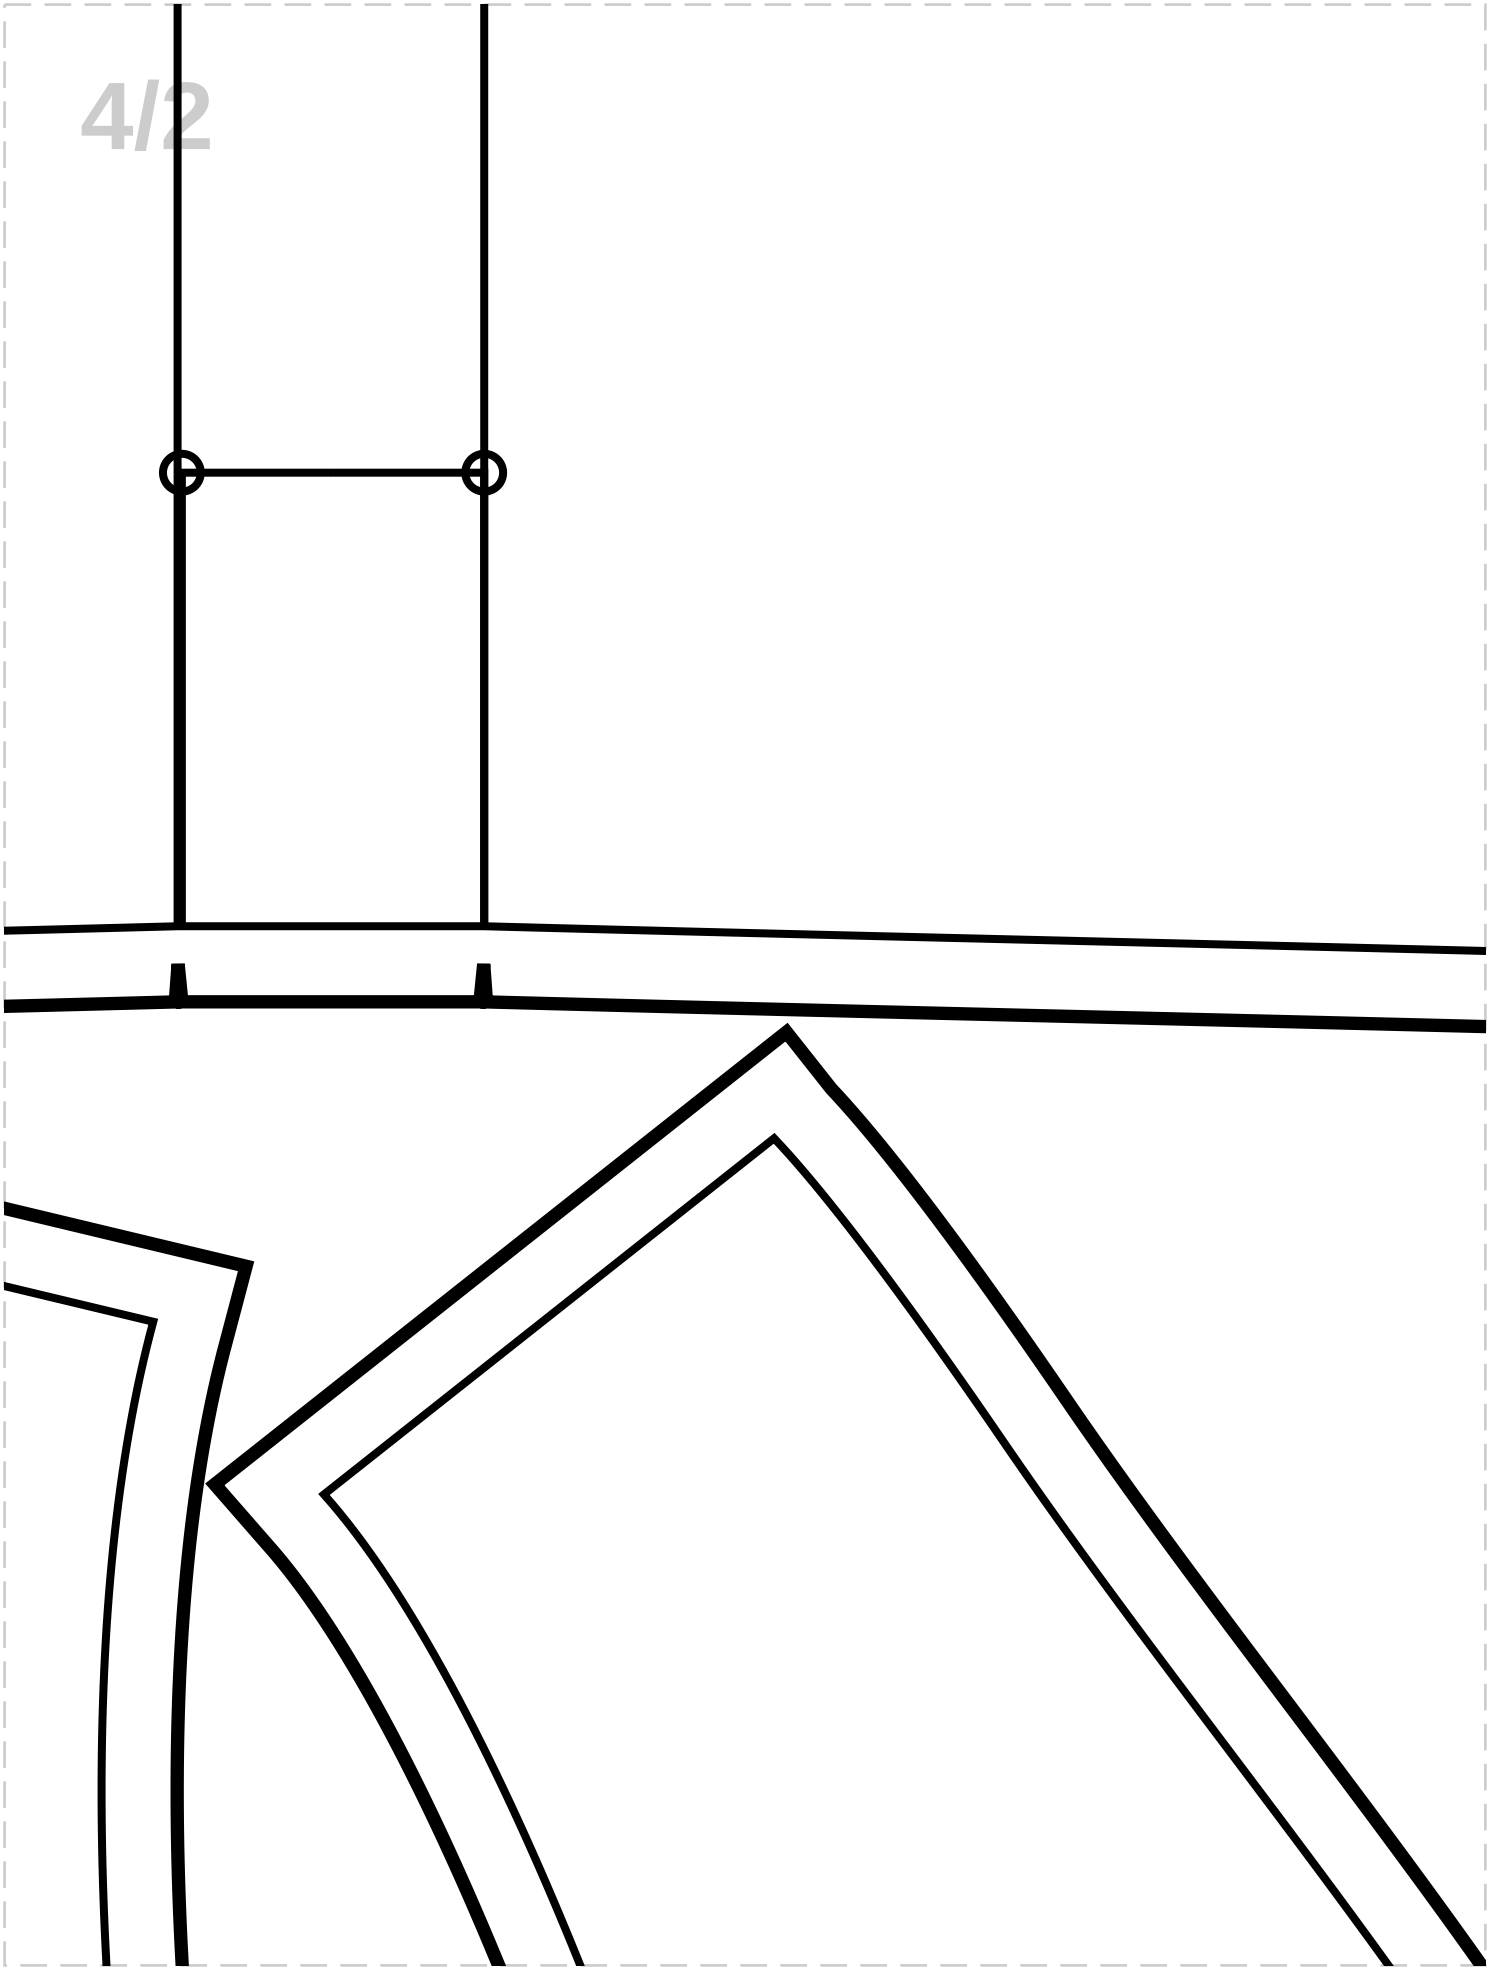


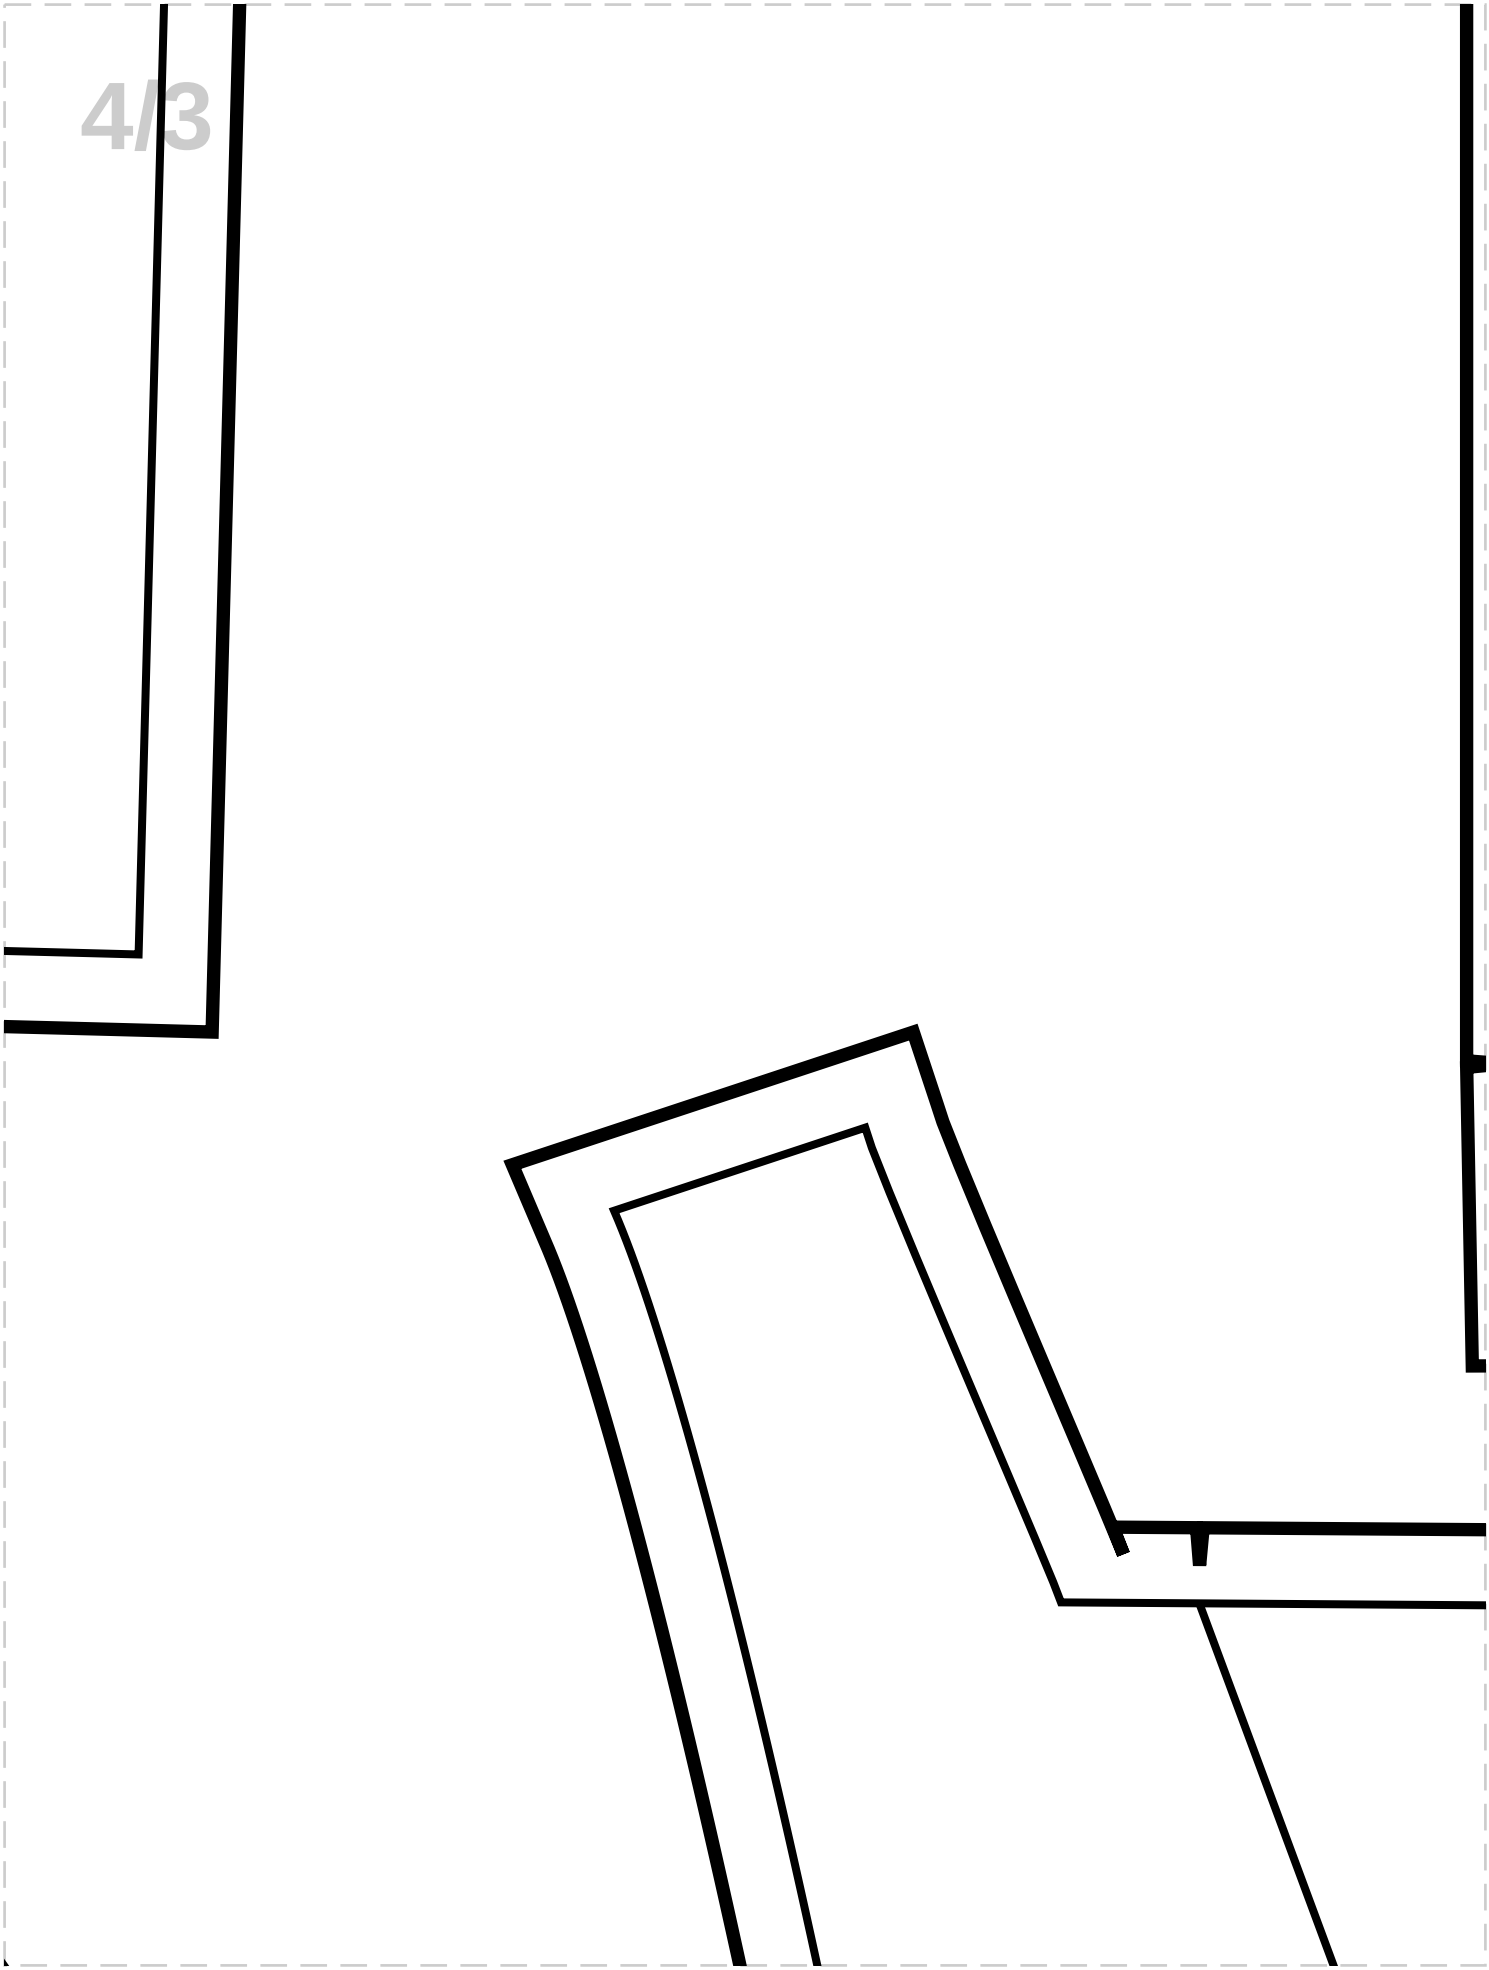


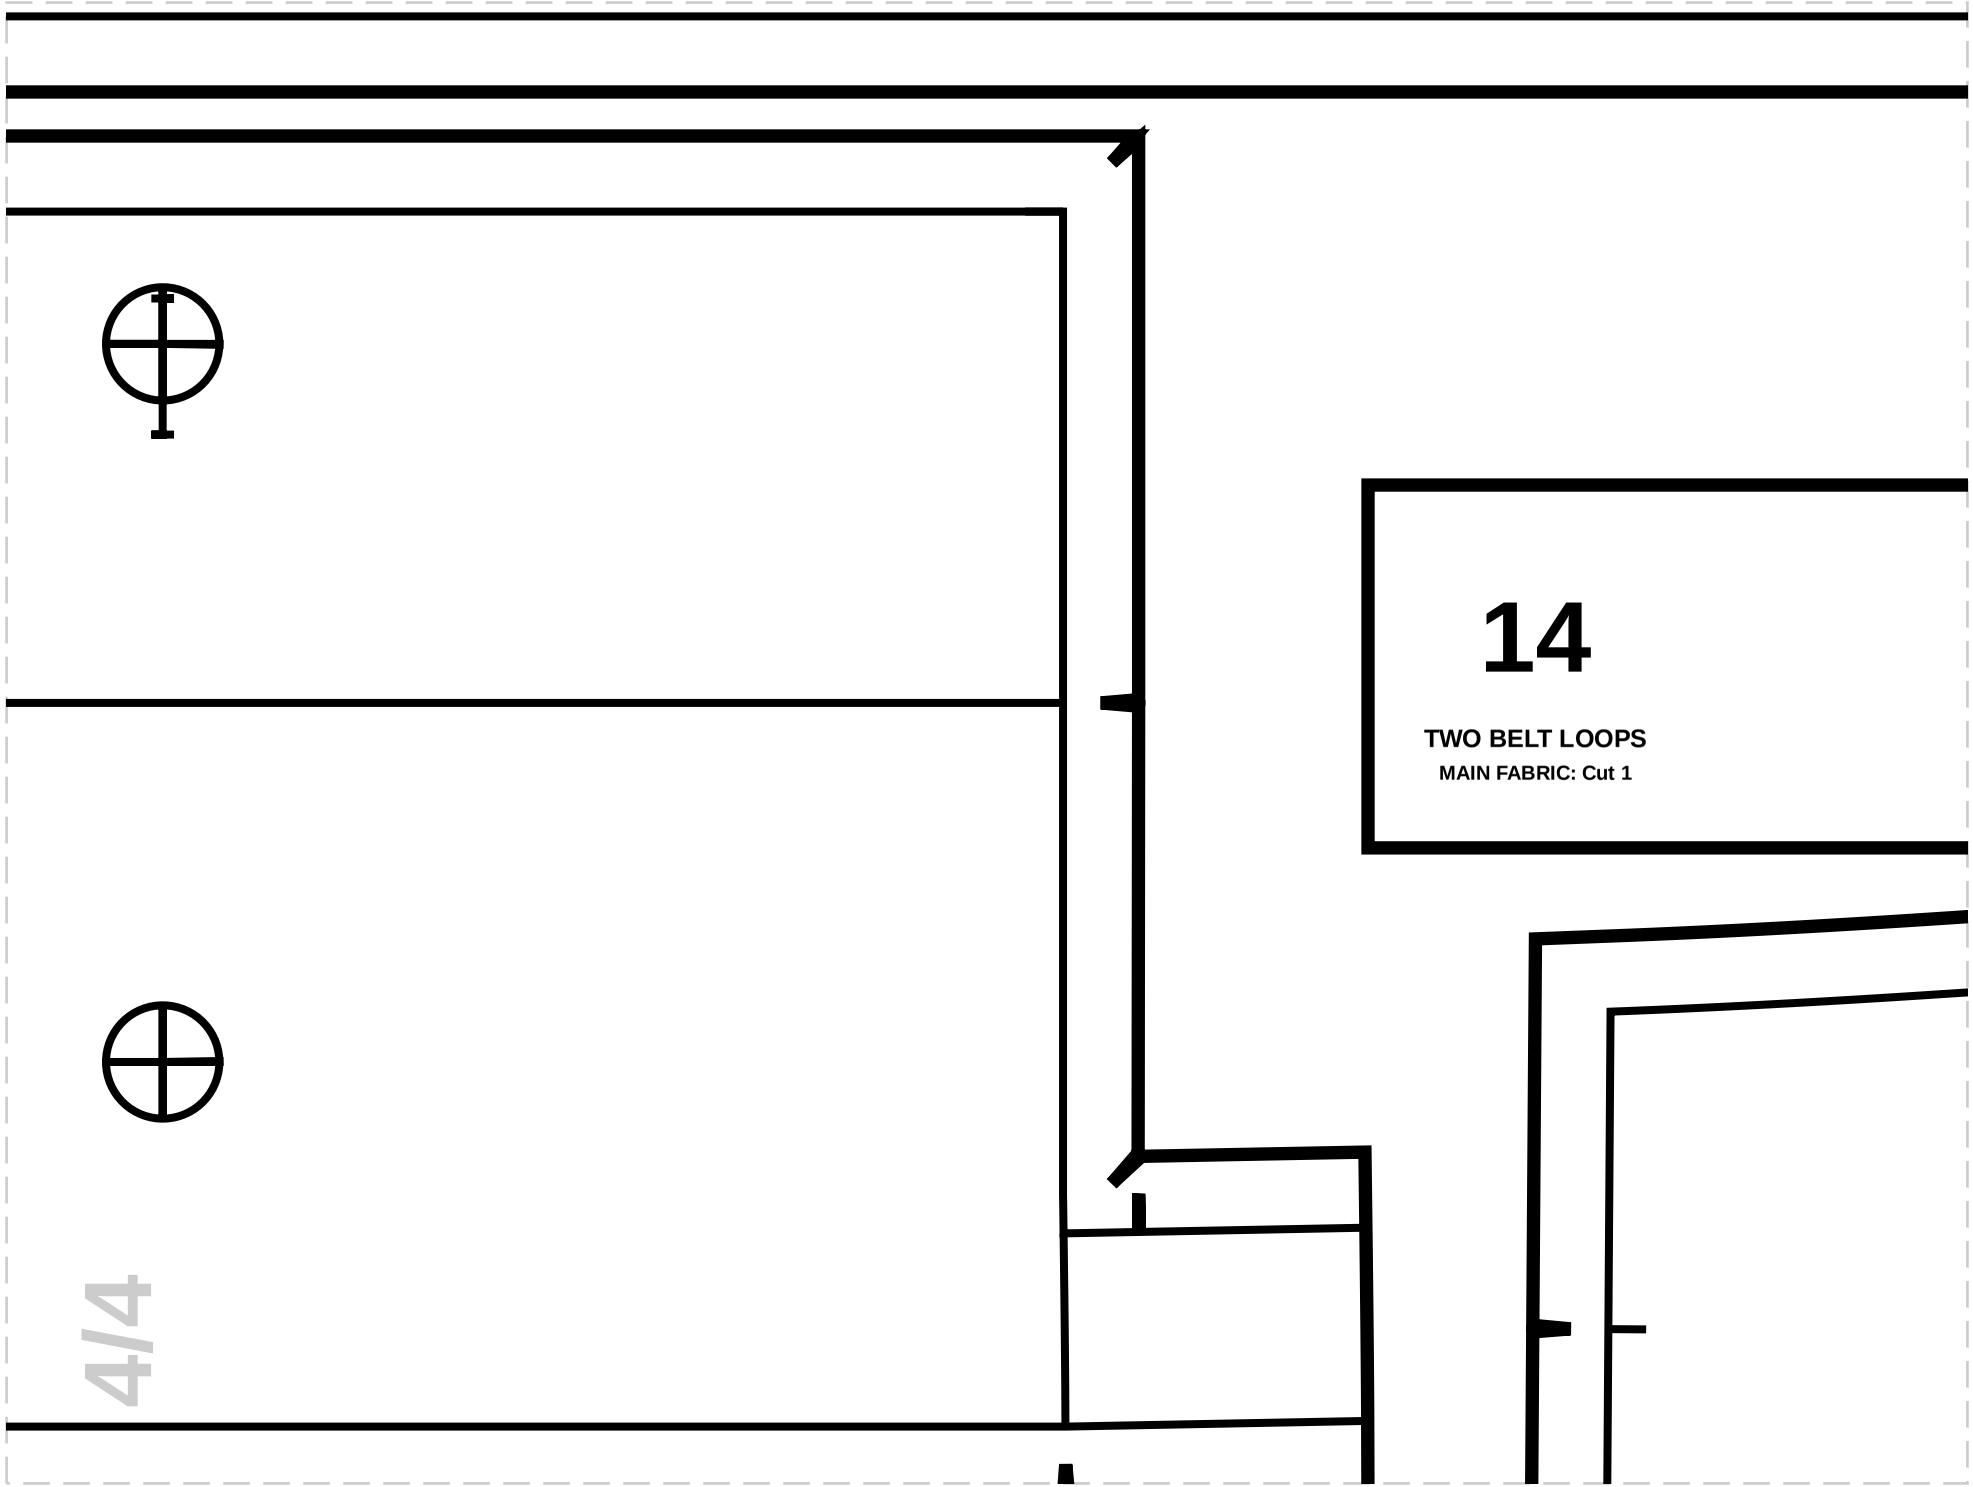

14
TWO BELT LOOPS
MAIN FABRIC: Cut 1
4/4

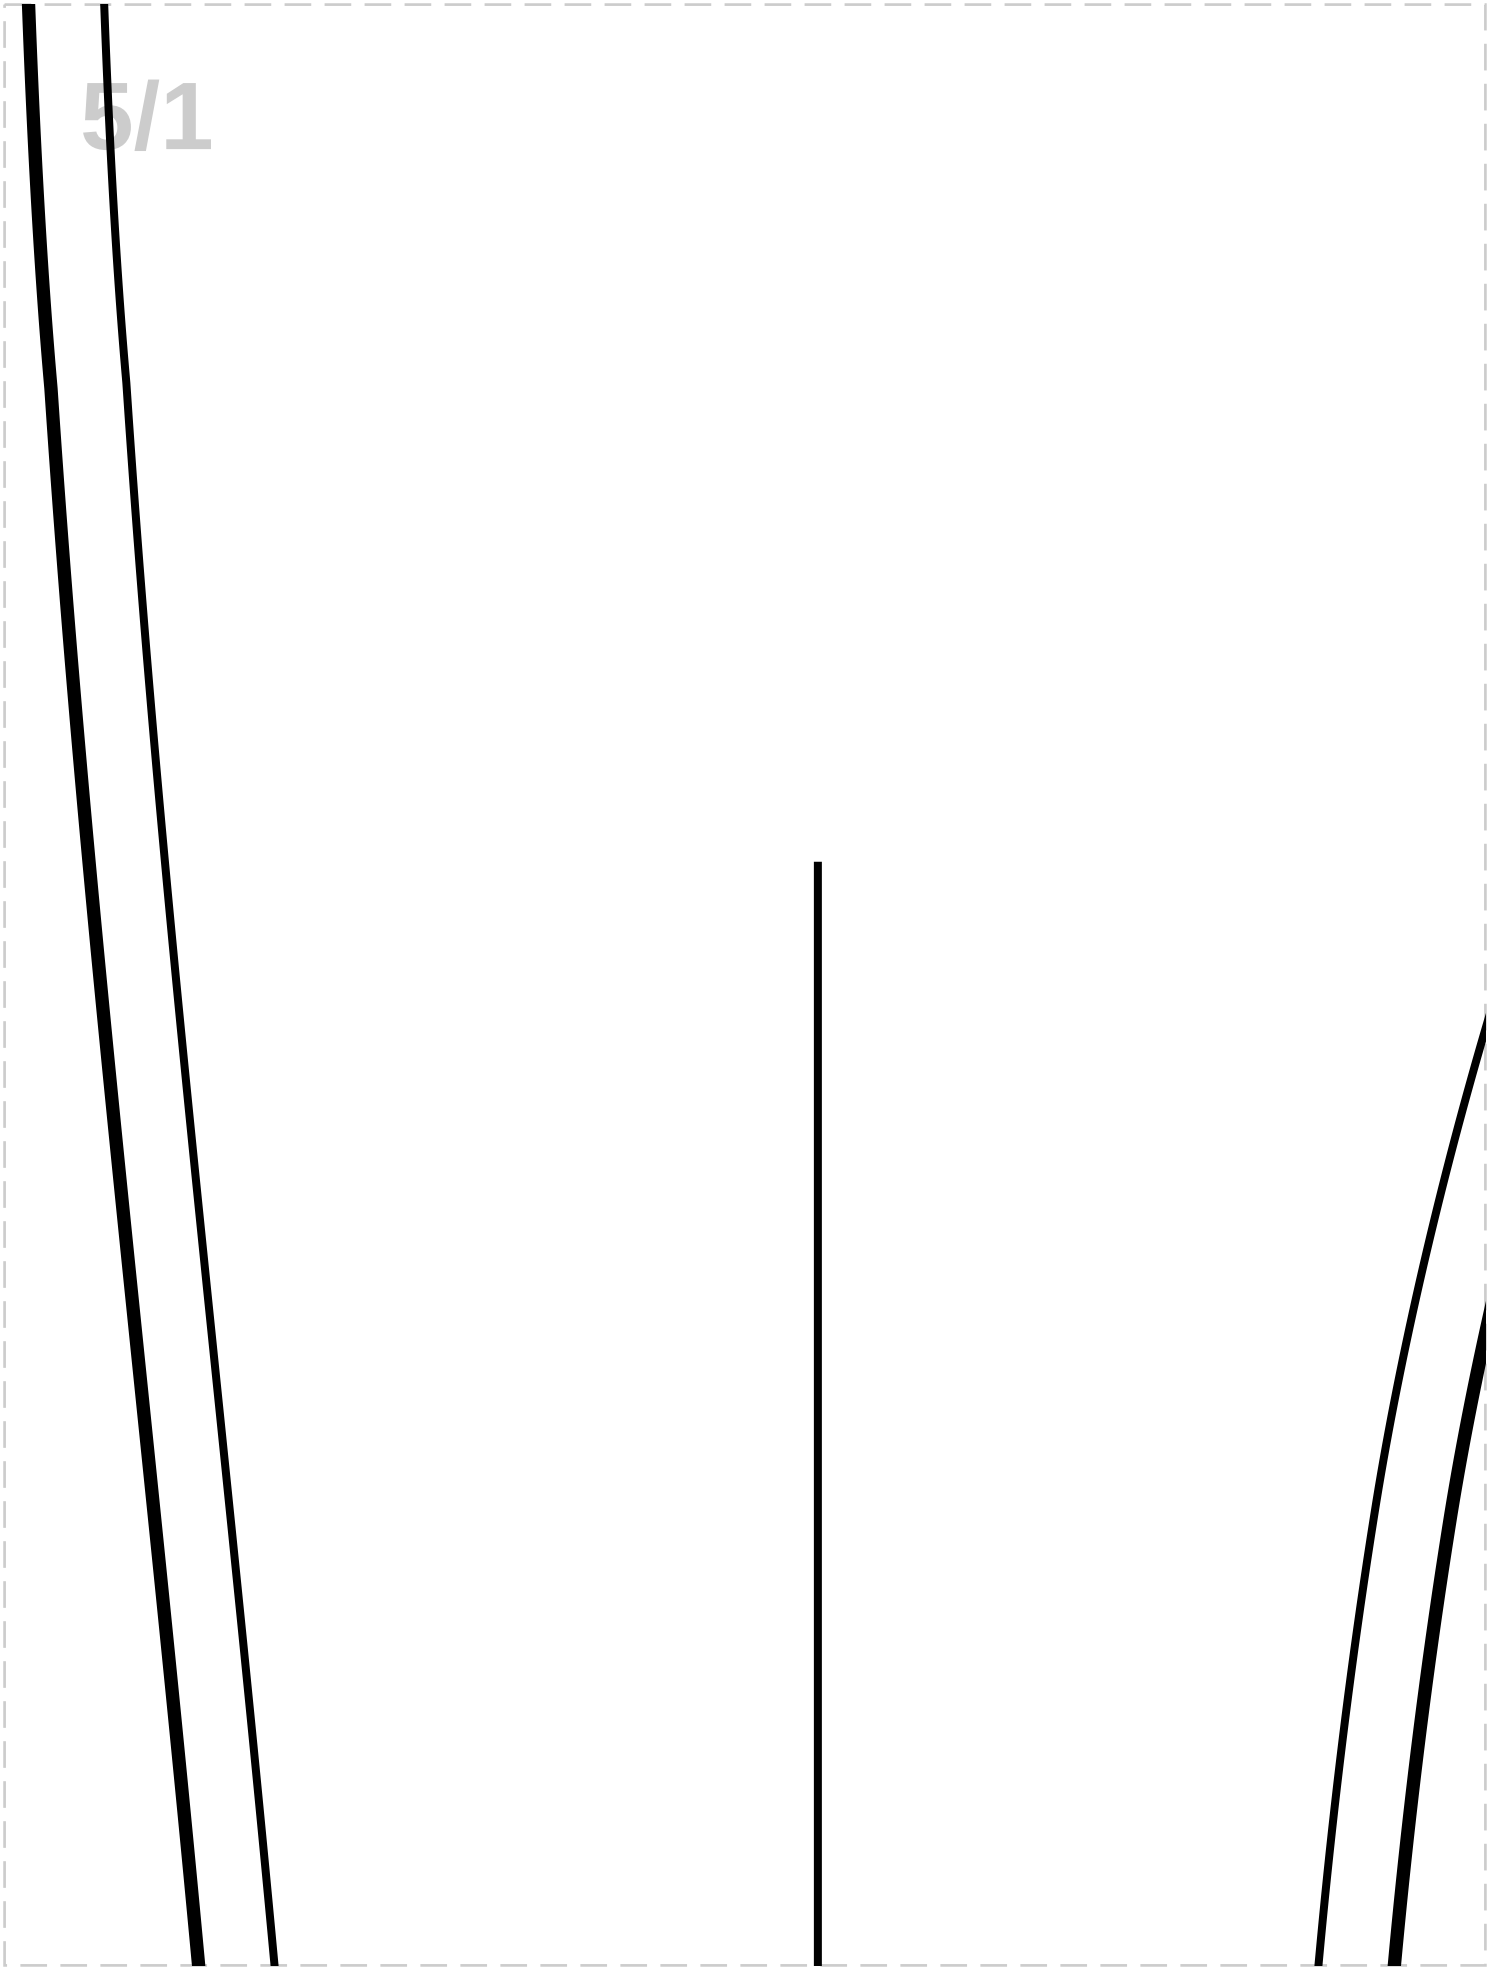

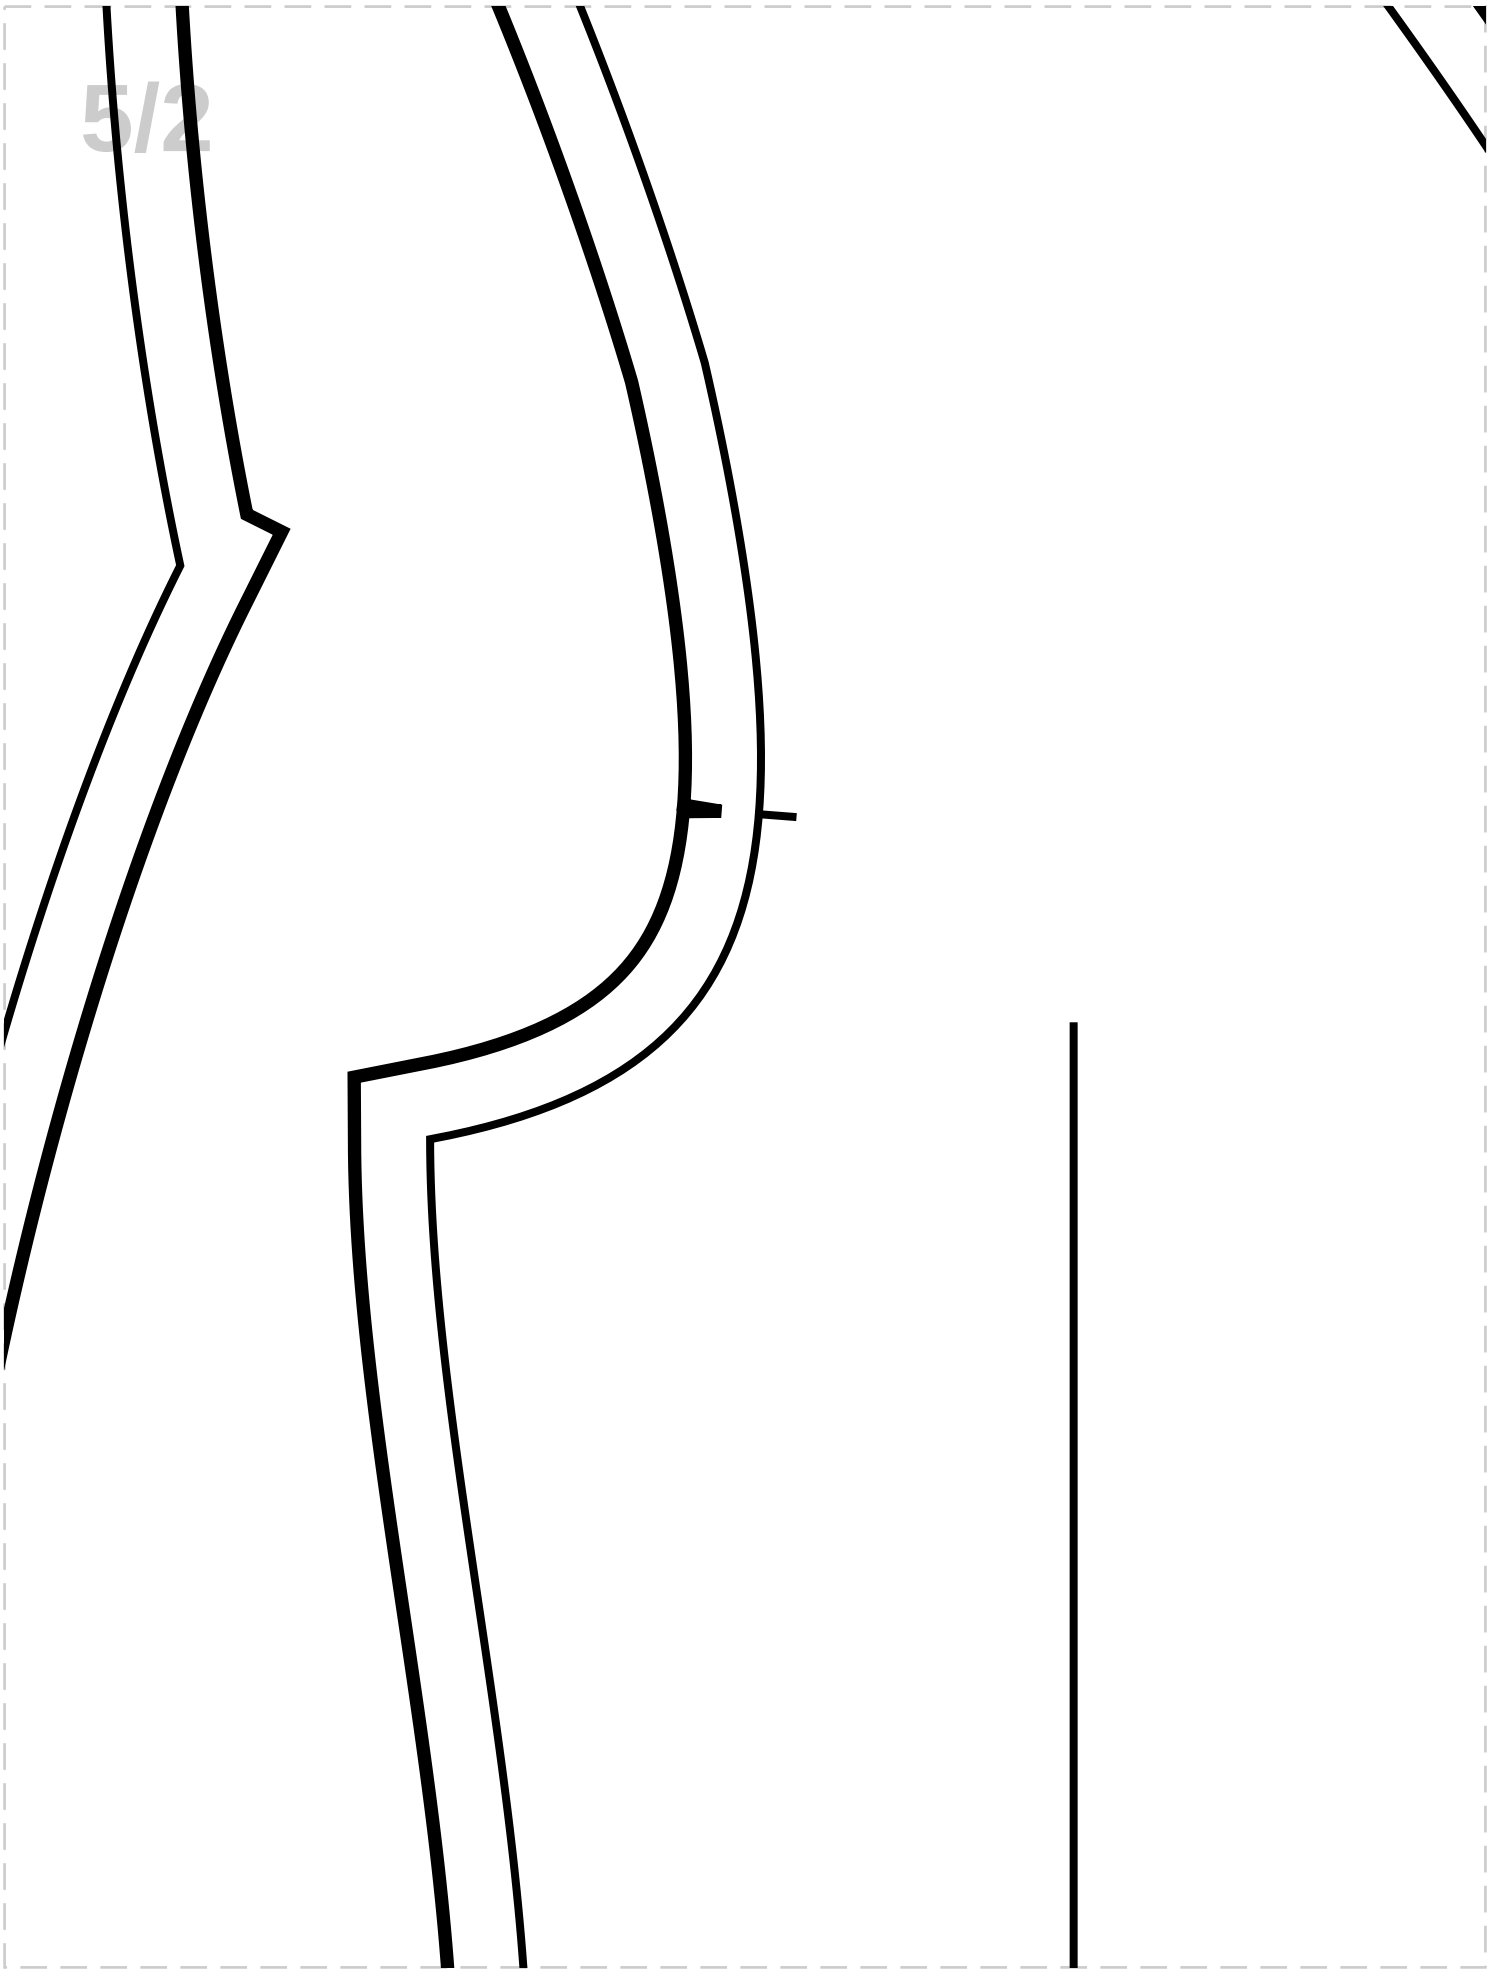


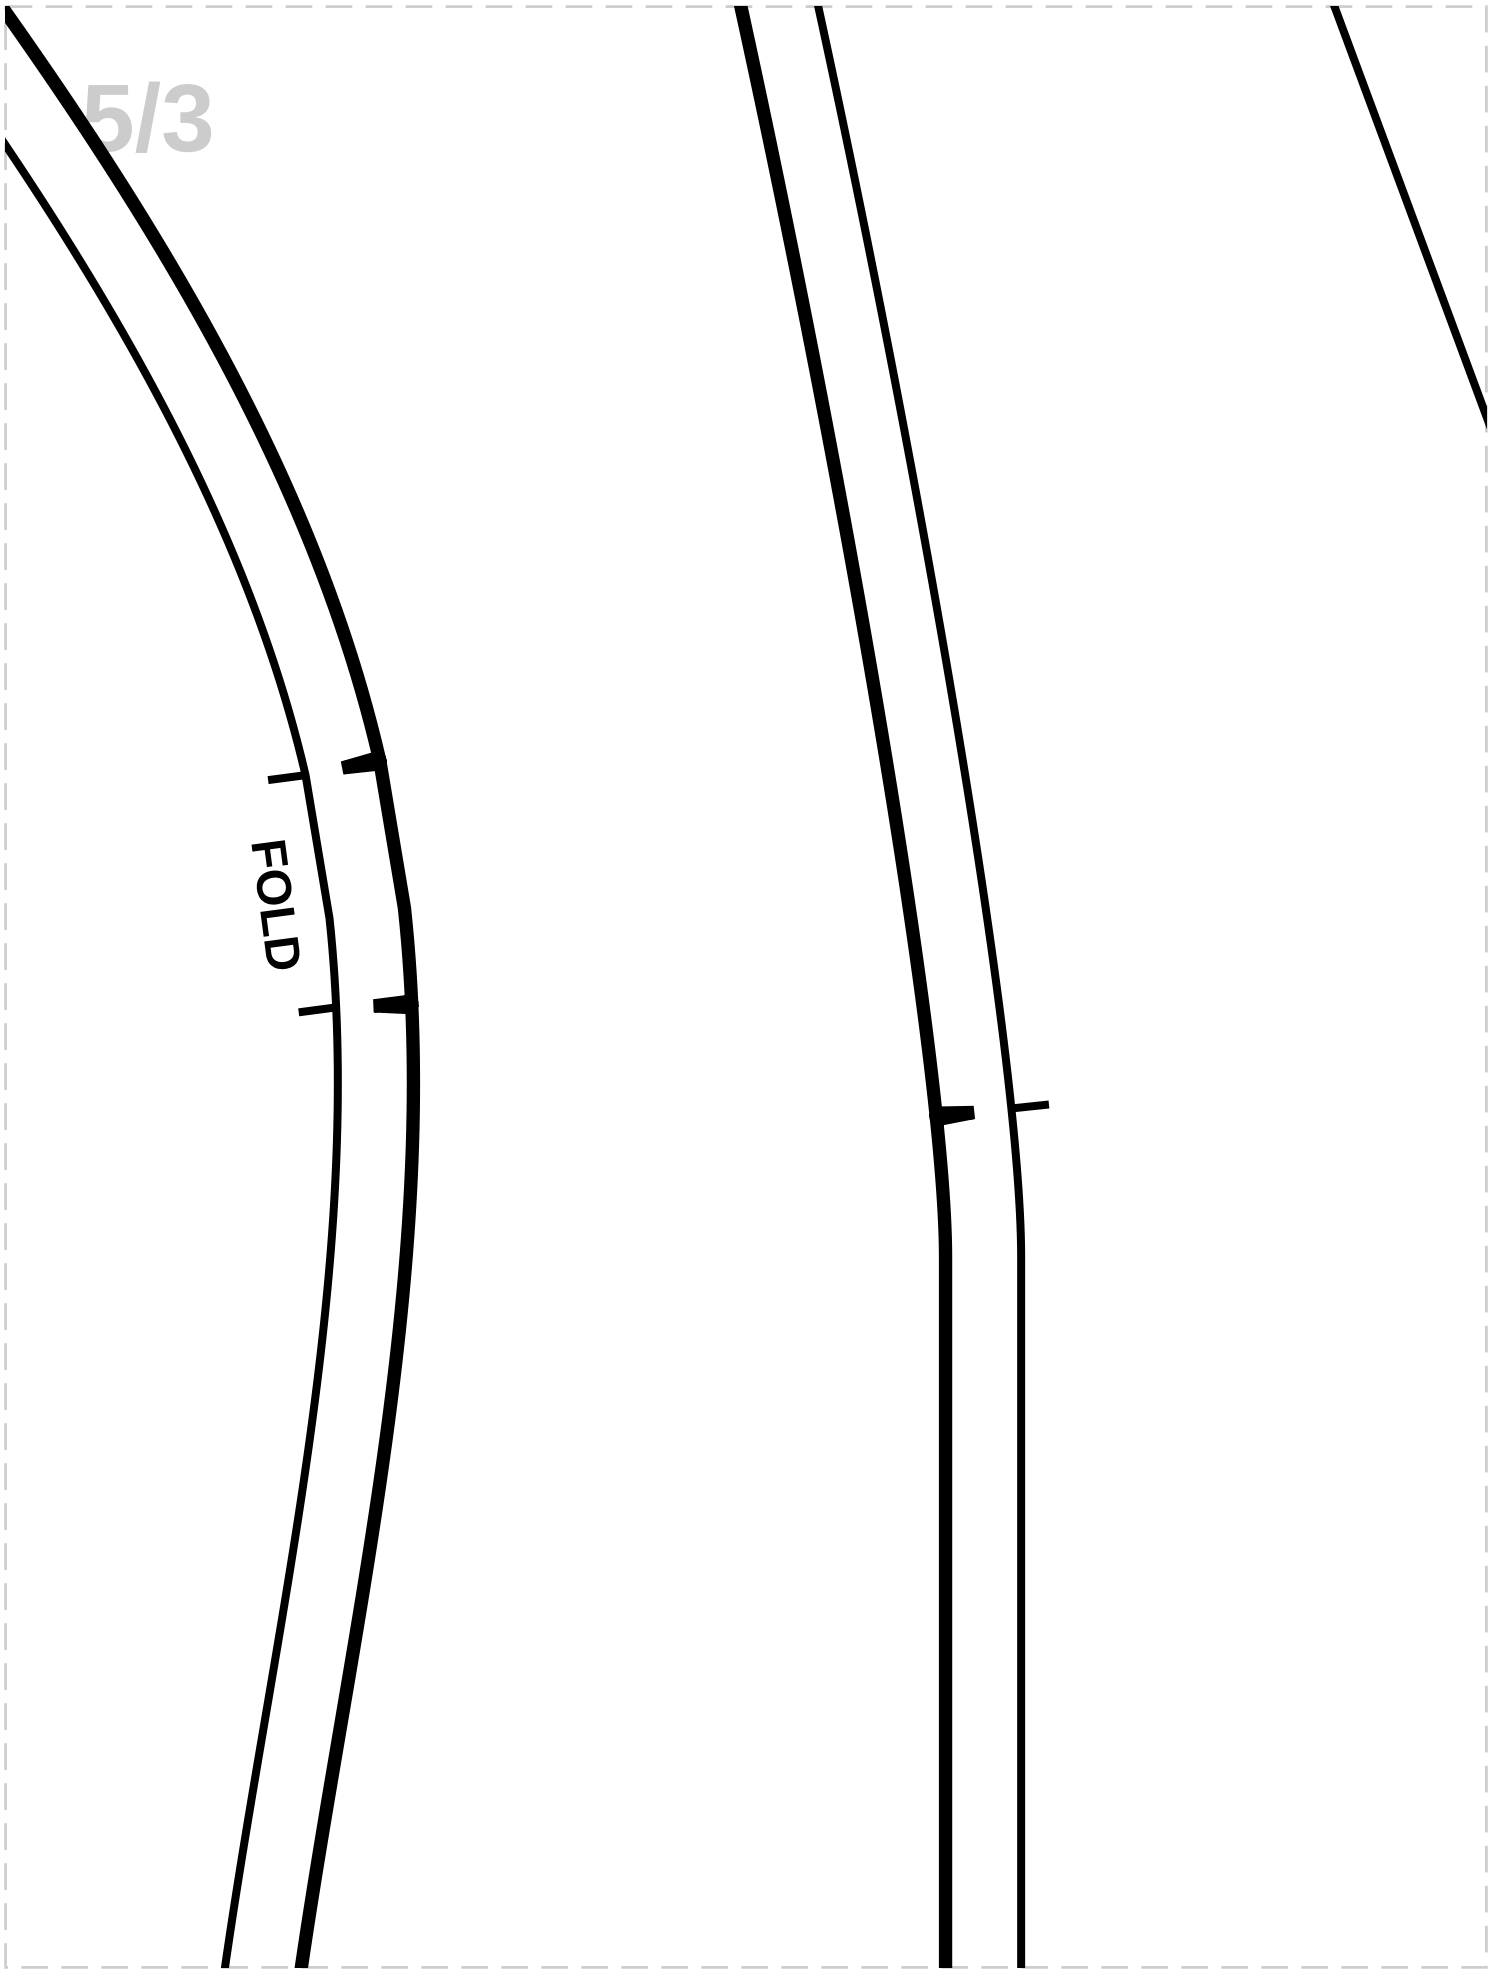
FOLD

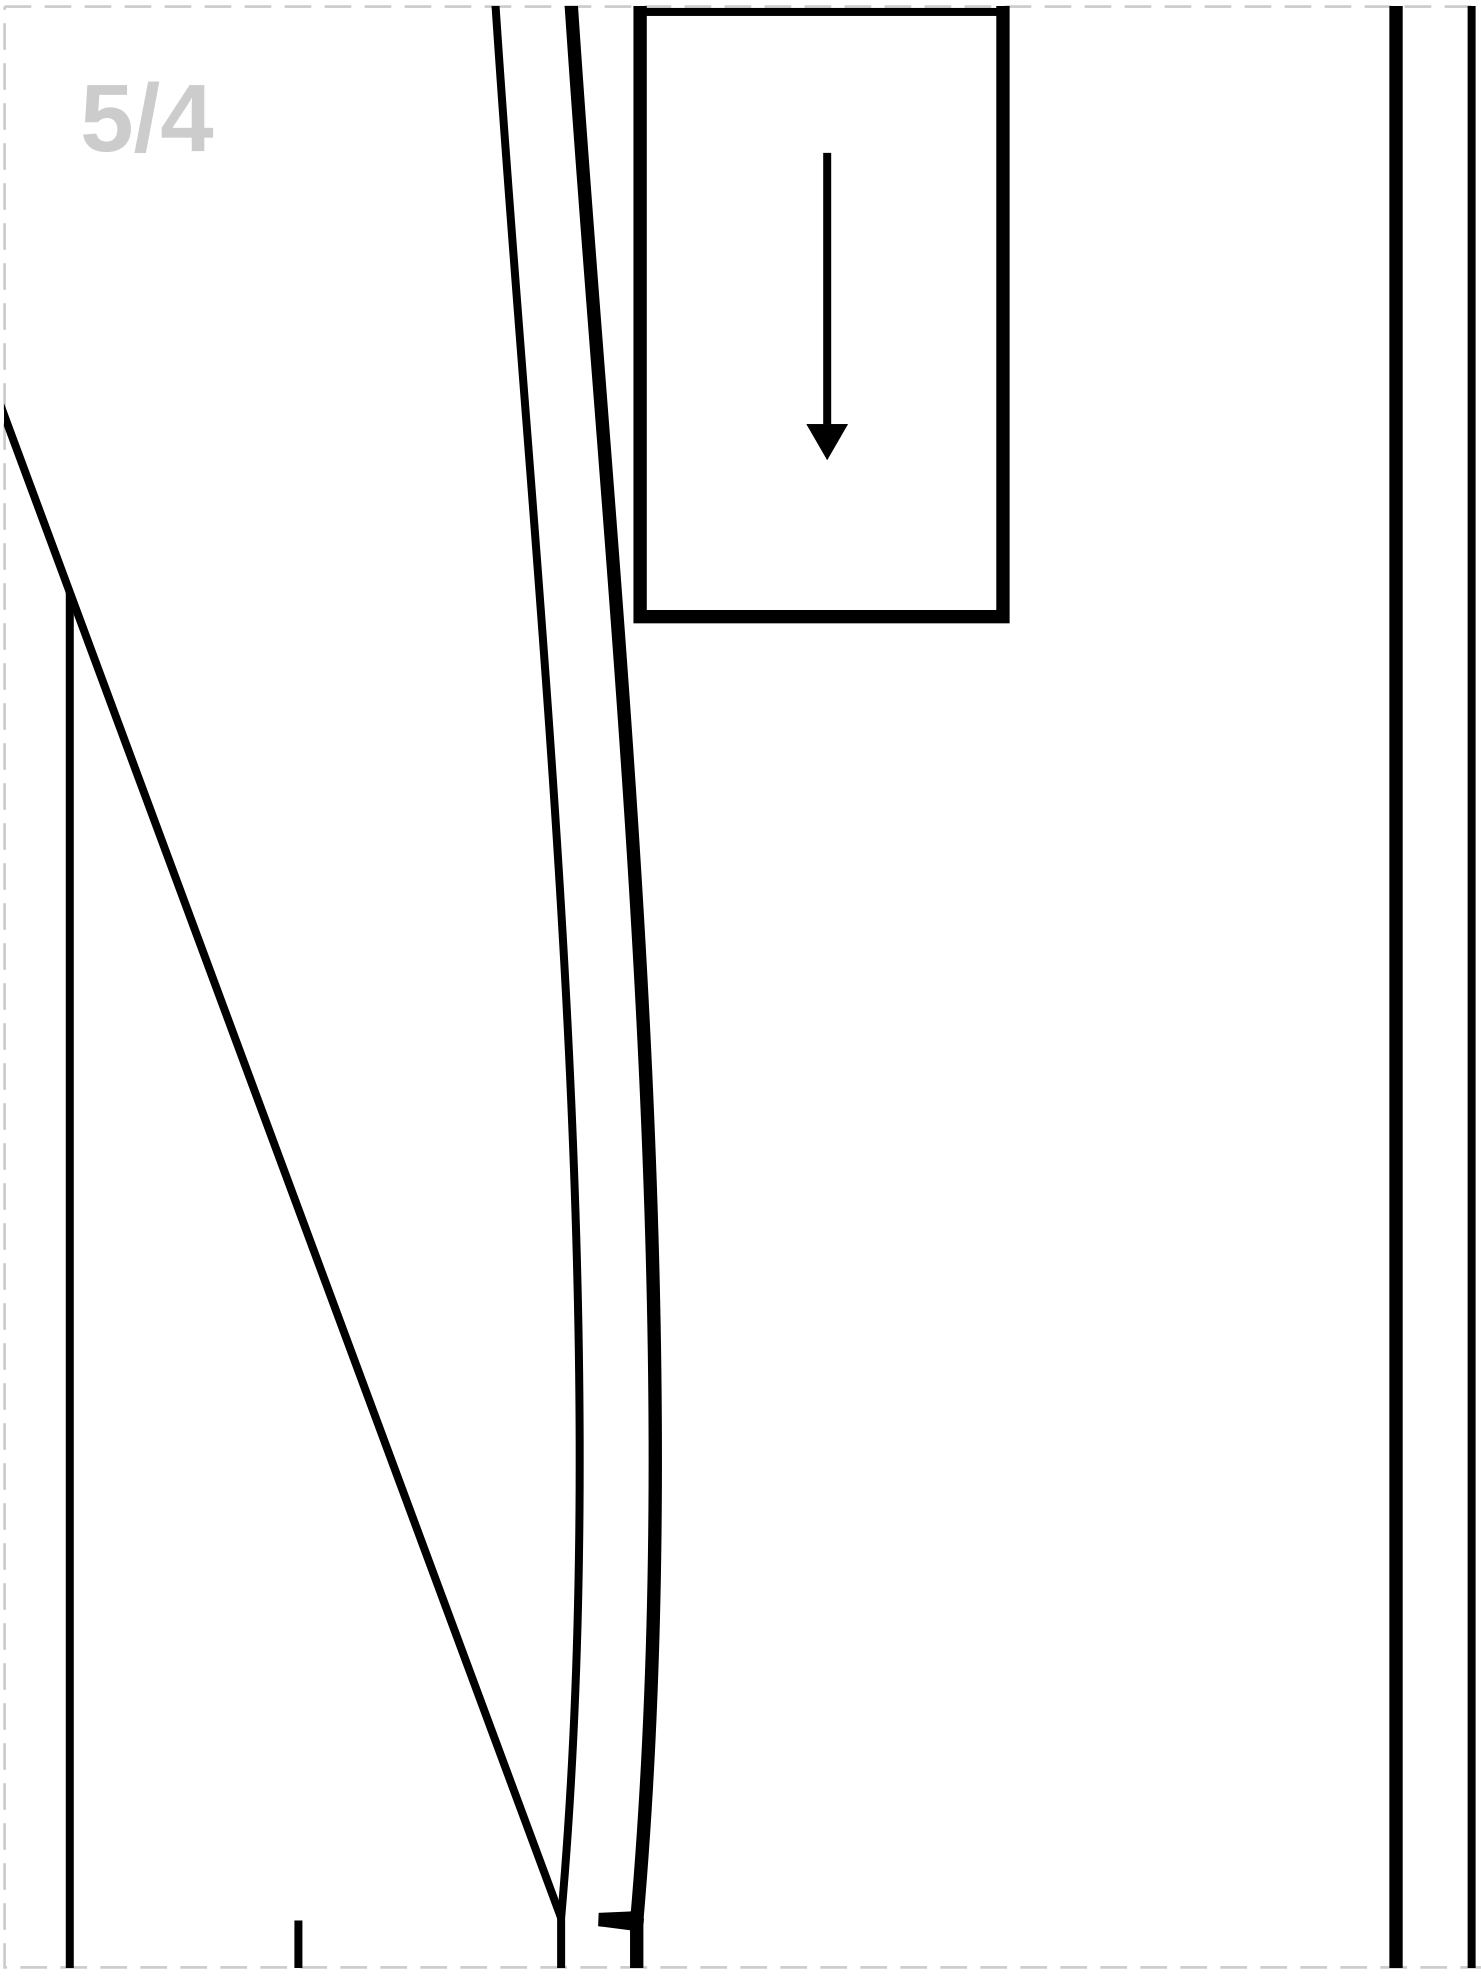

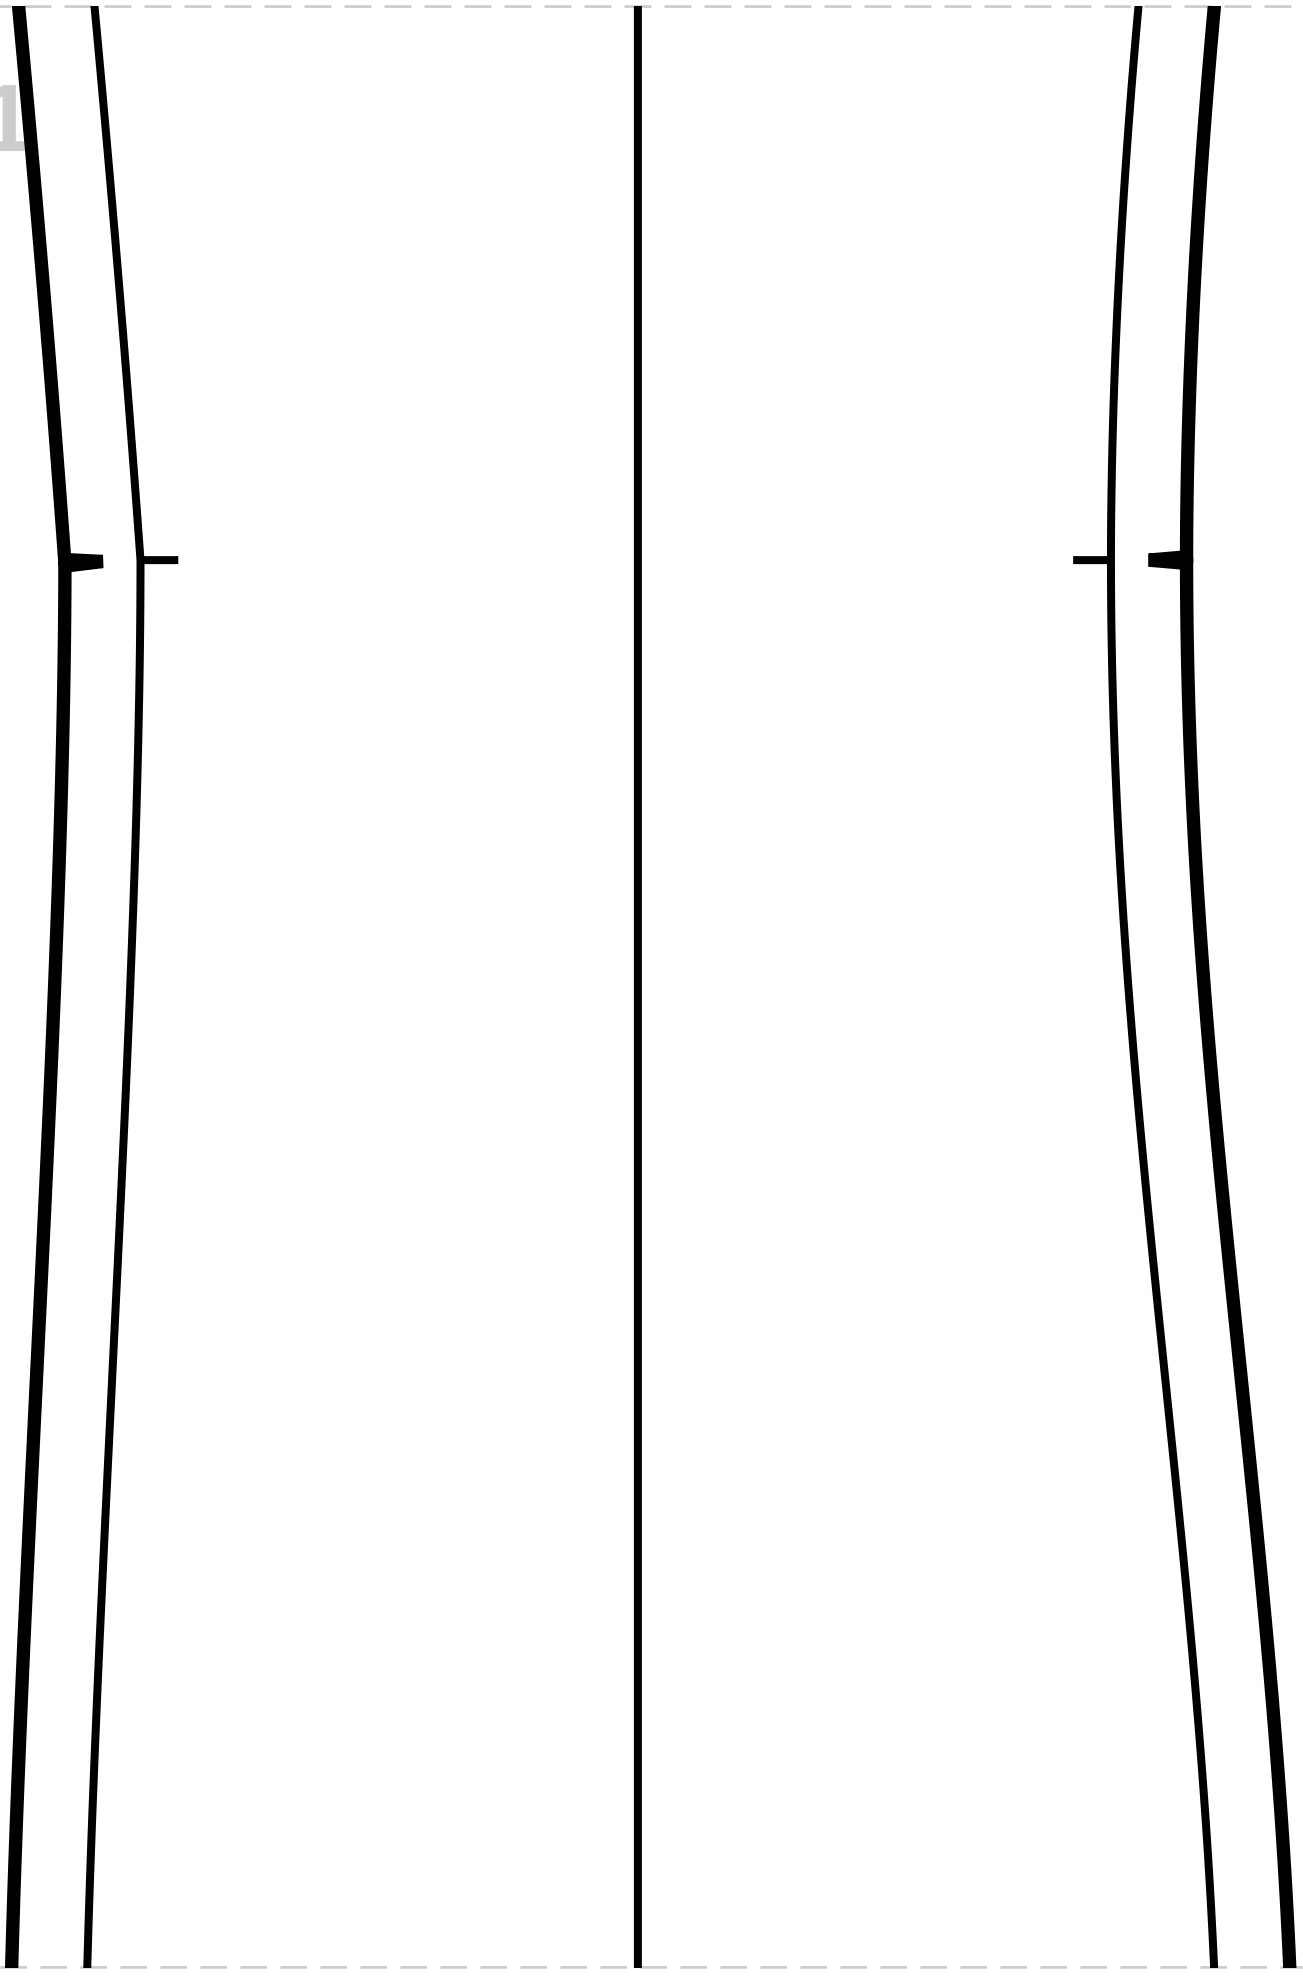

# 1

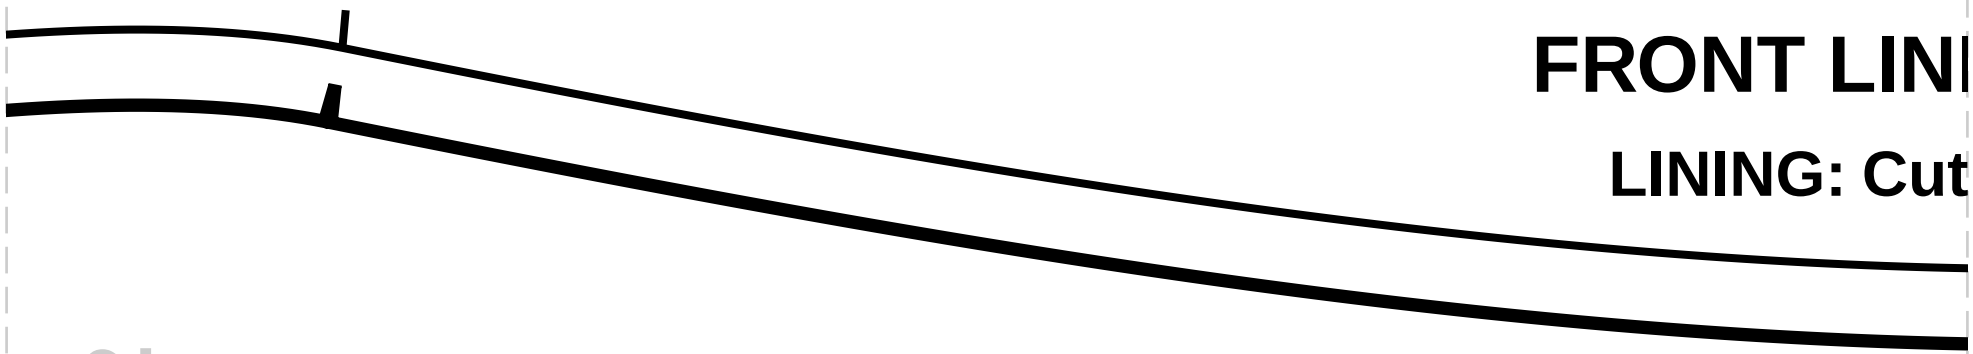

## FRONT LIN


### LINING: Cut

# 8


## FRONT NECK FACING


**MAIN FABRIC: Cut 2**


**FUSIBLE INTERFACING: Cut 2**

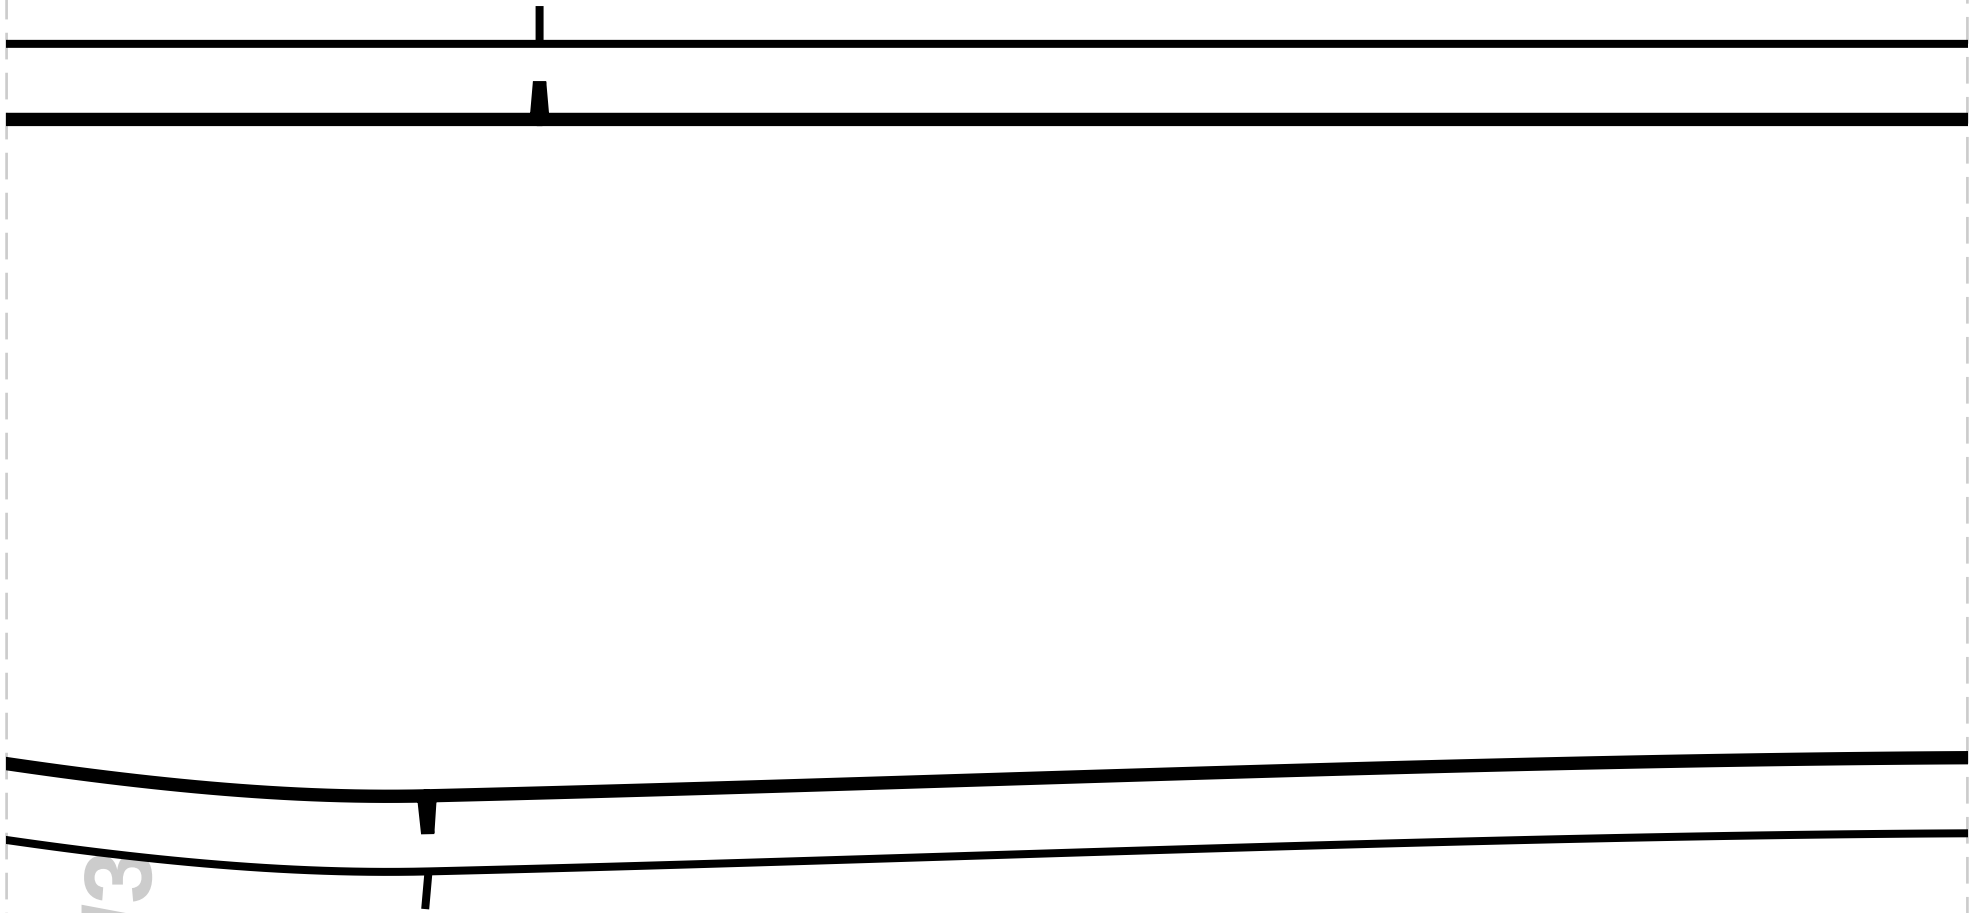


6/3

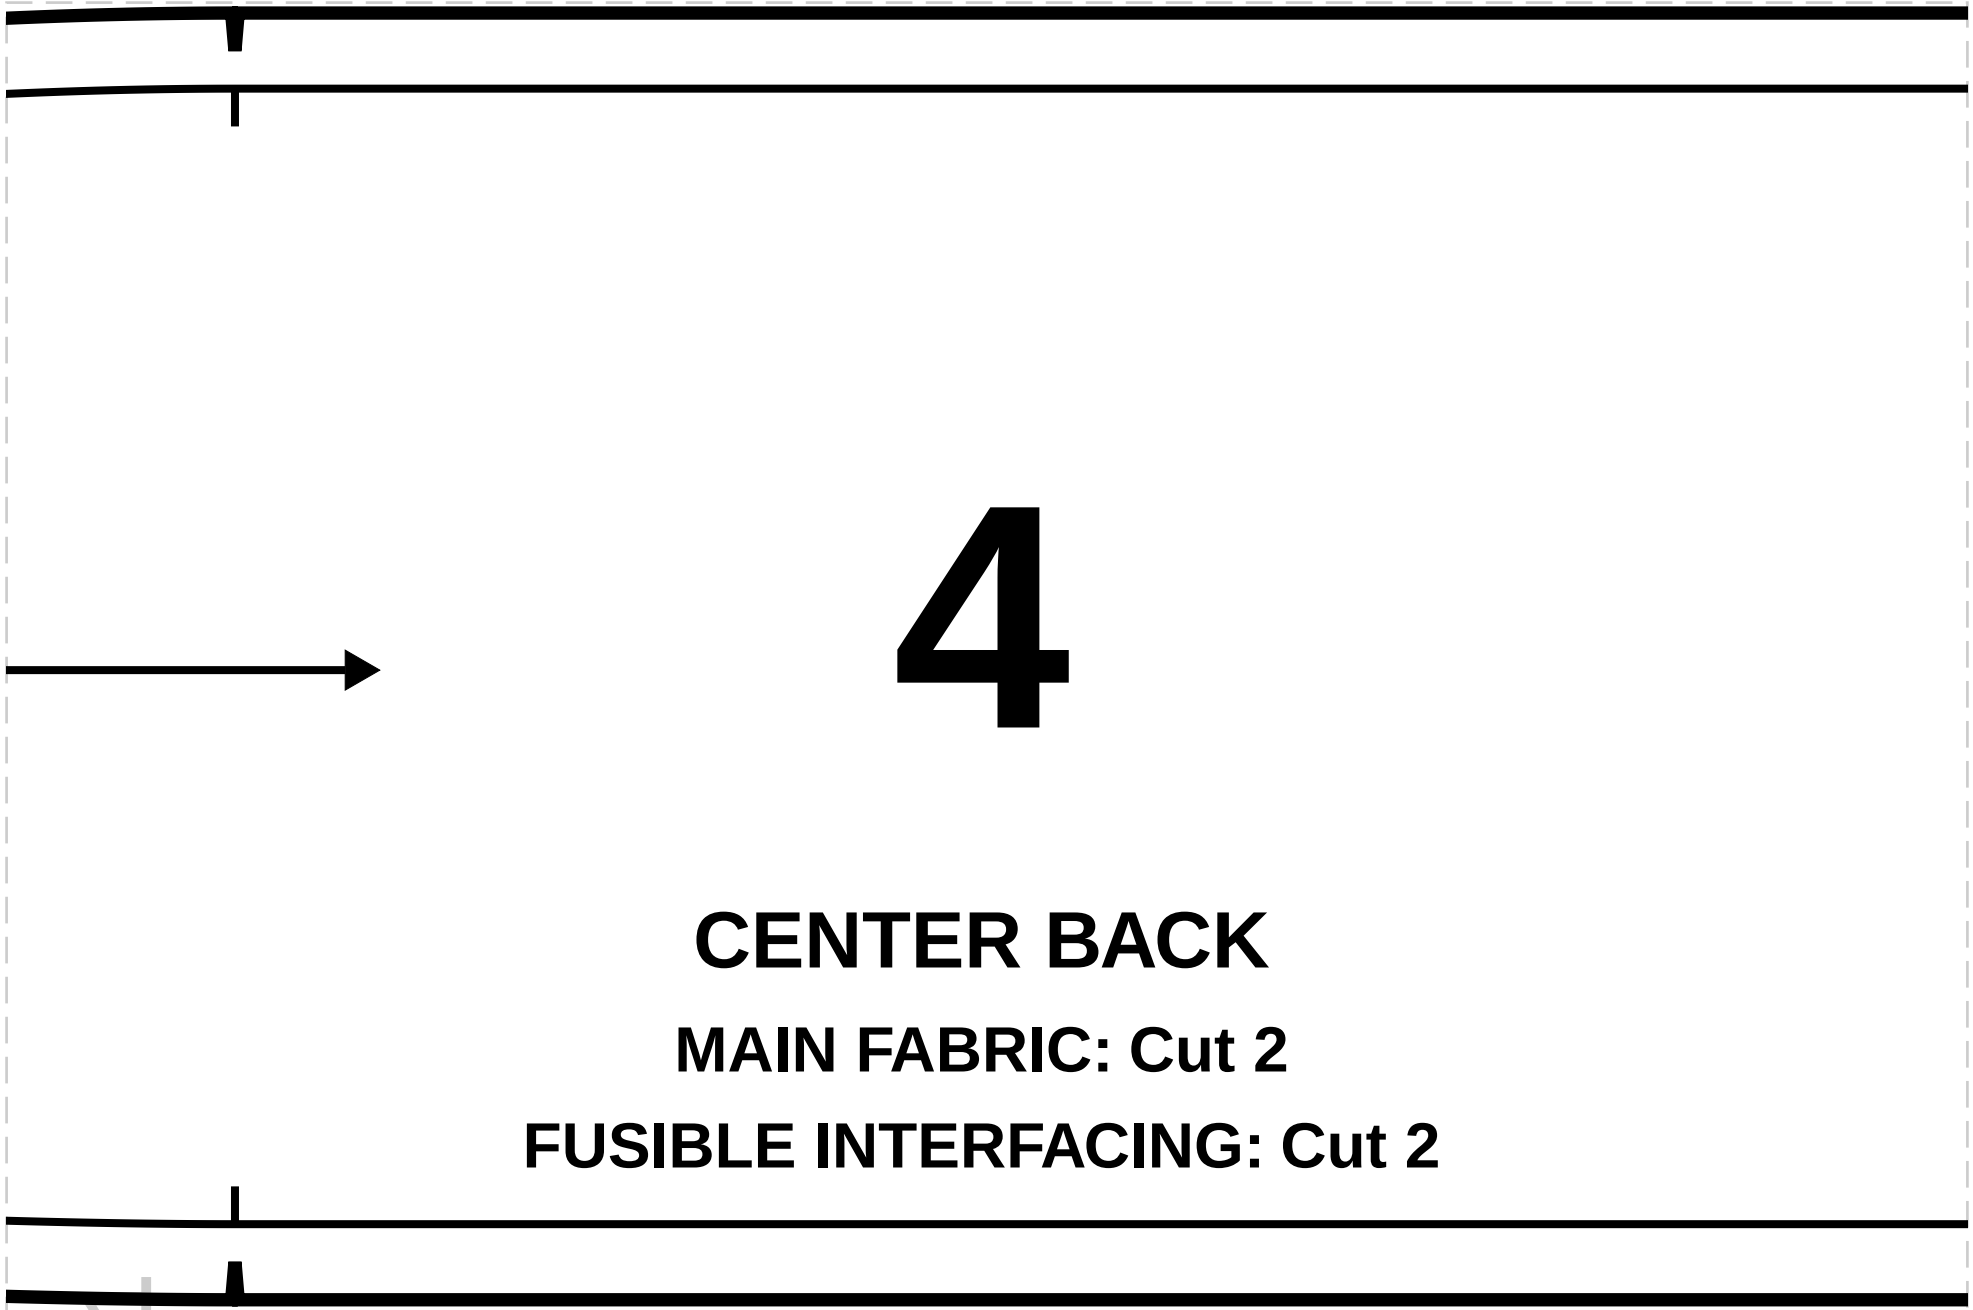

4
CENTER BACK
MAIN FABRIC: Cut 2
FUSIBLE INTERFACING: Cut 2

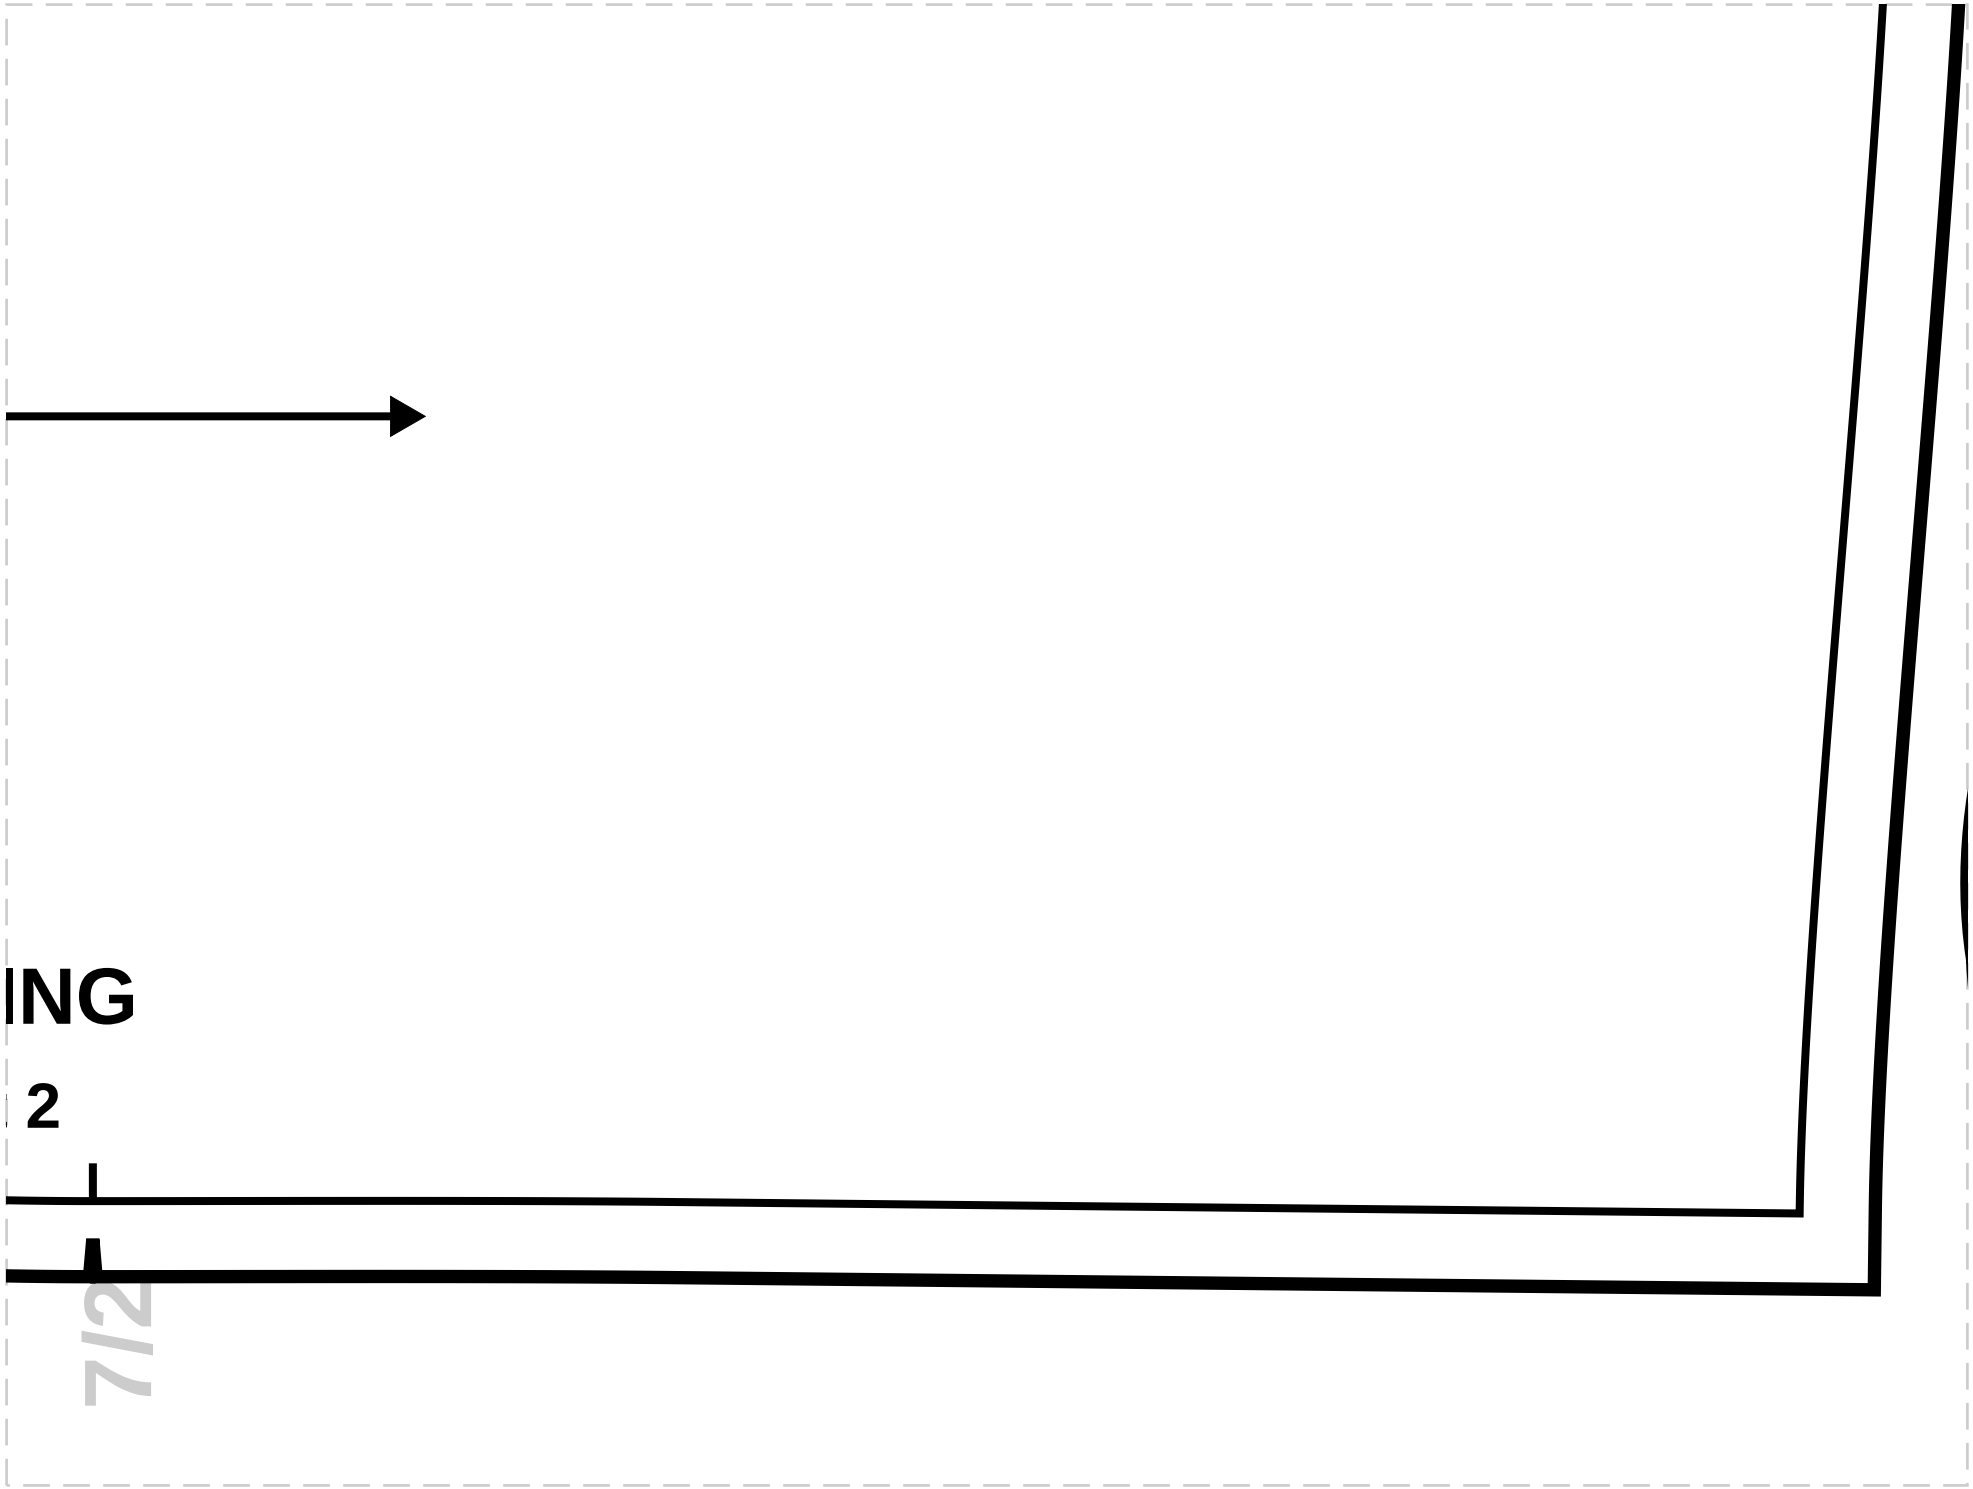

ING
2
7/2

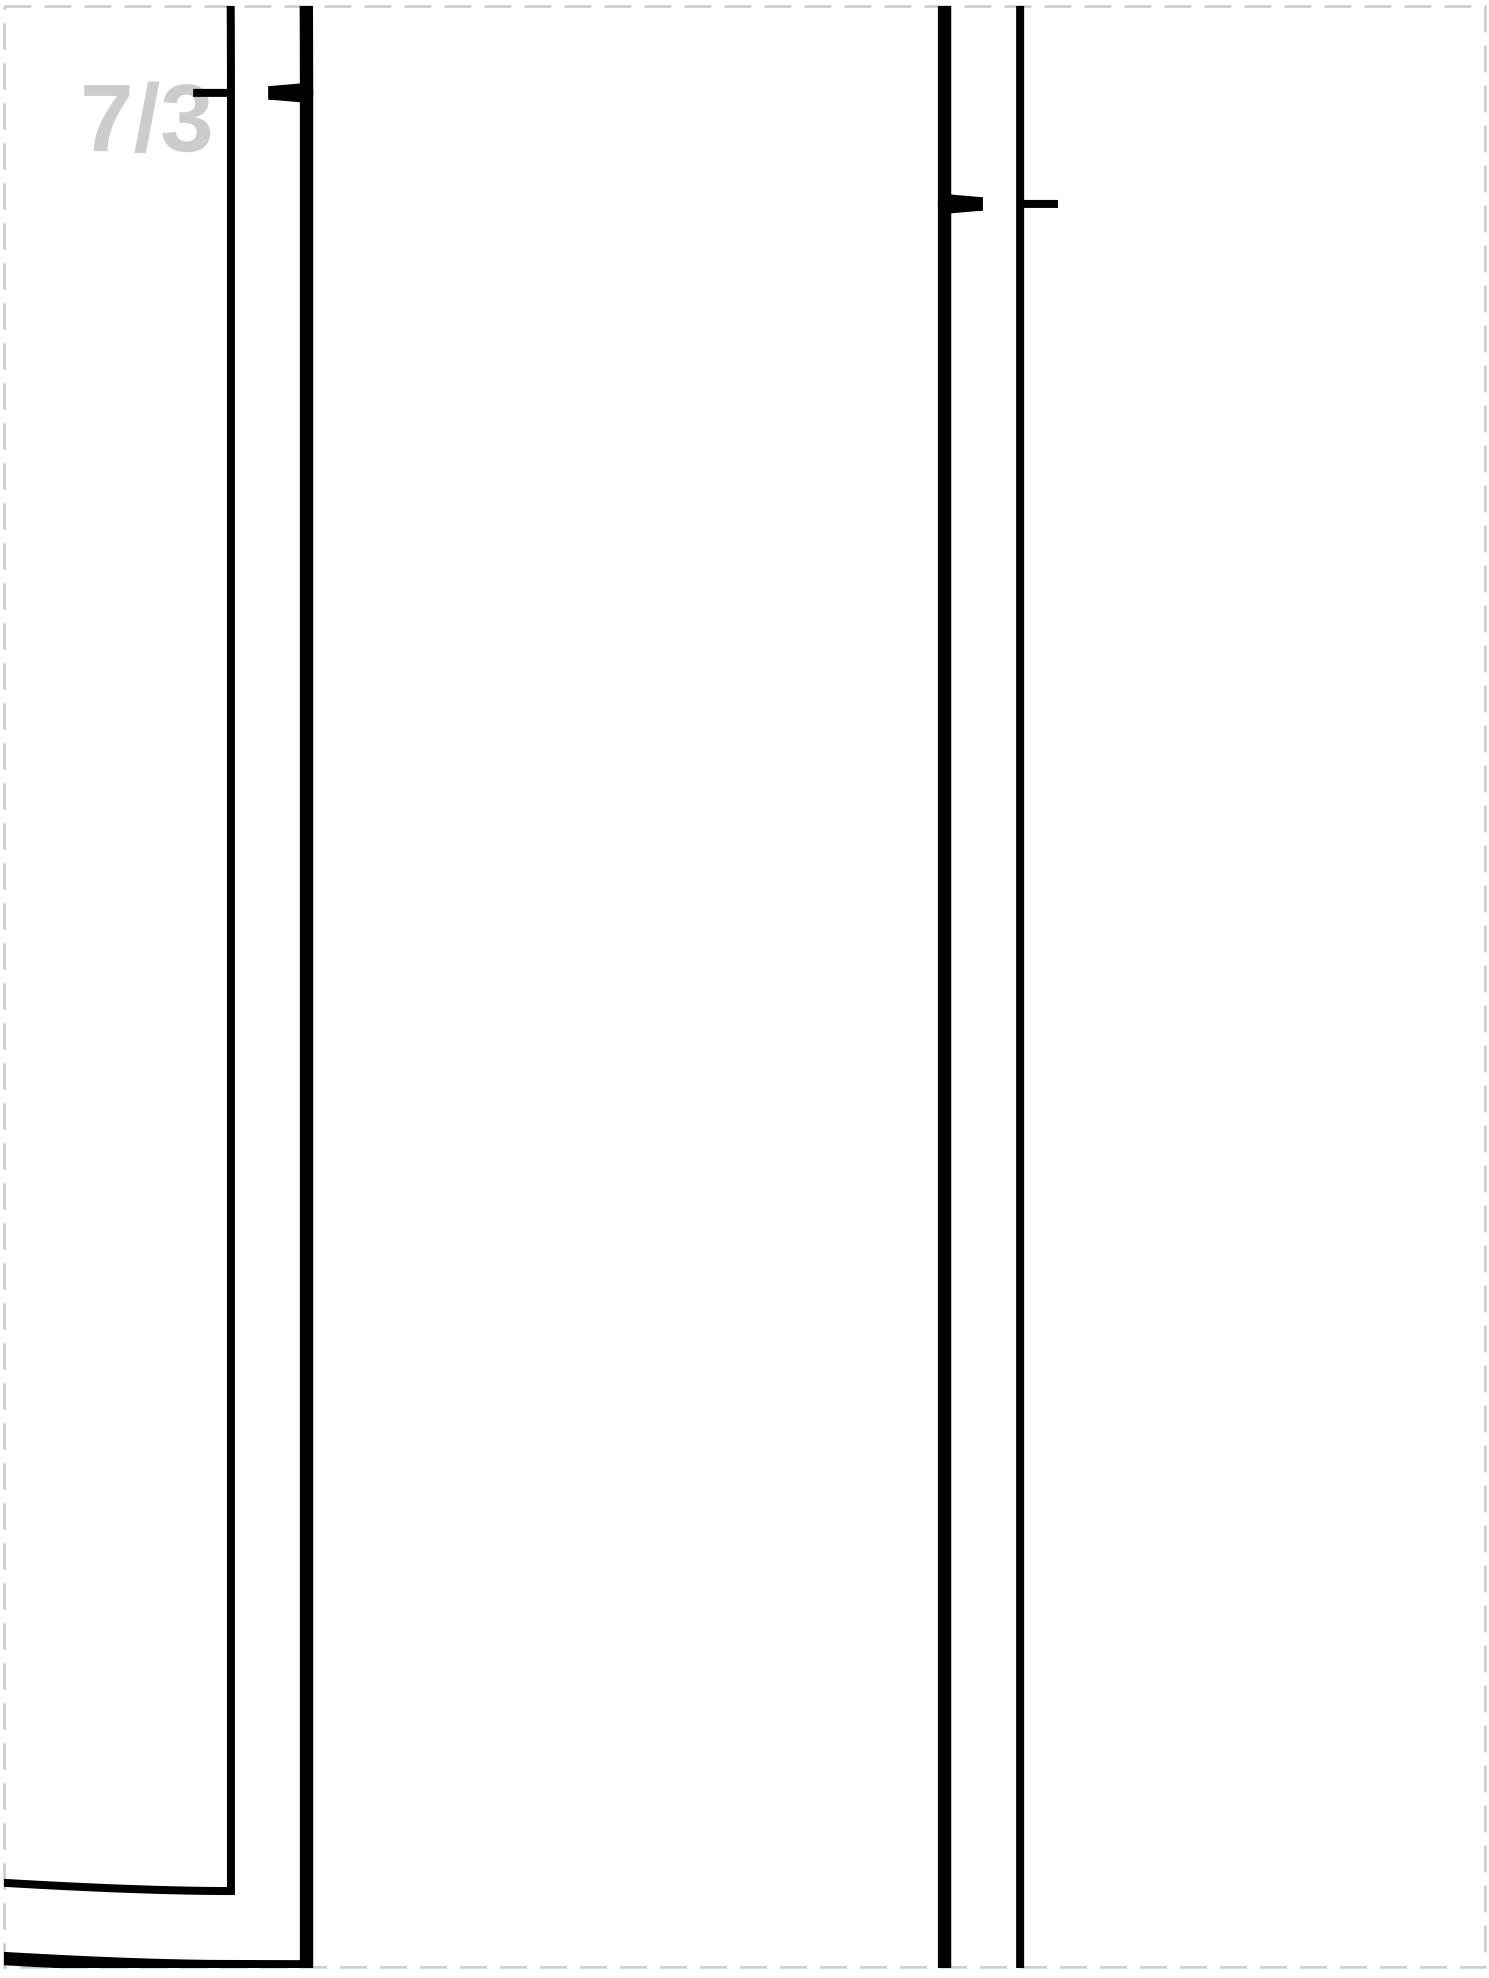

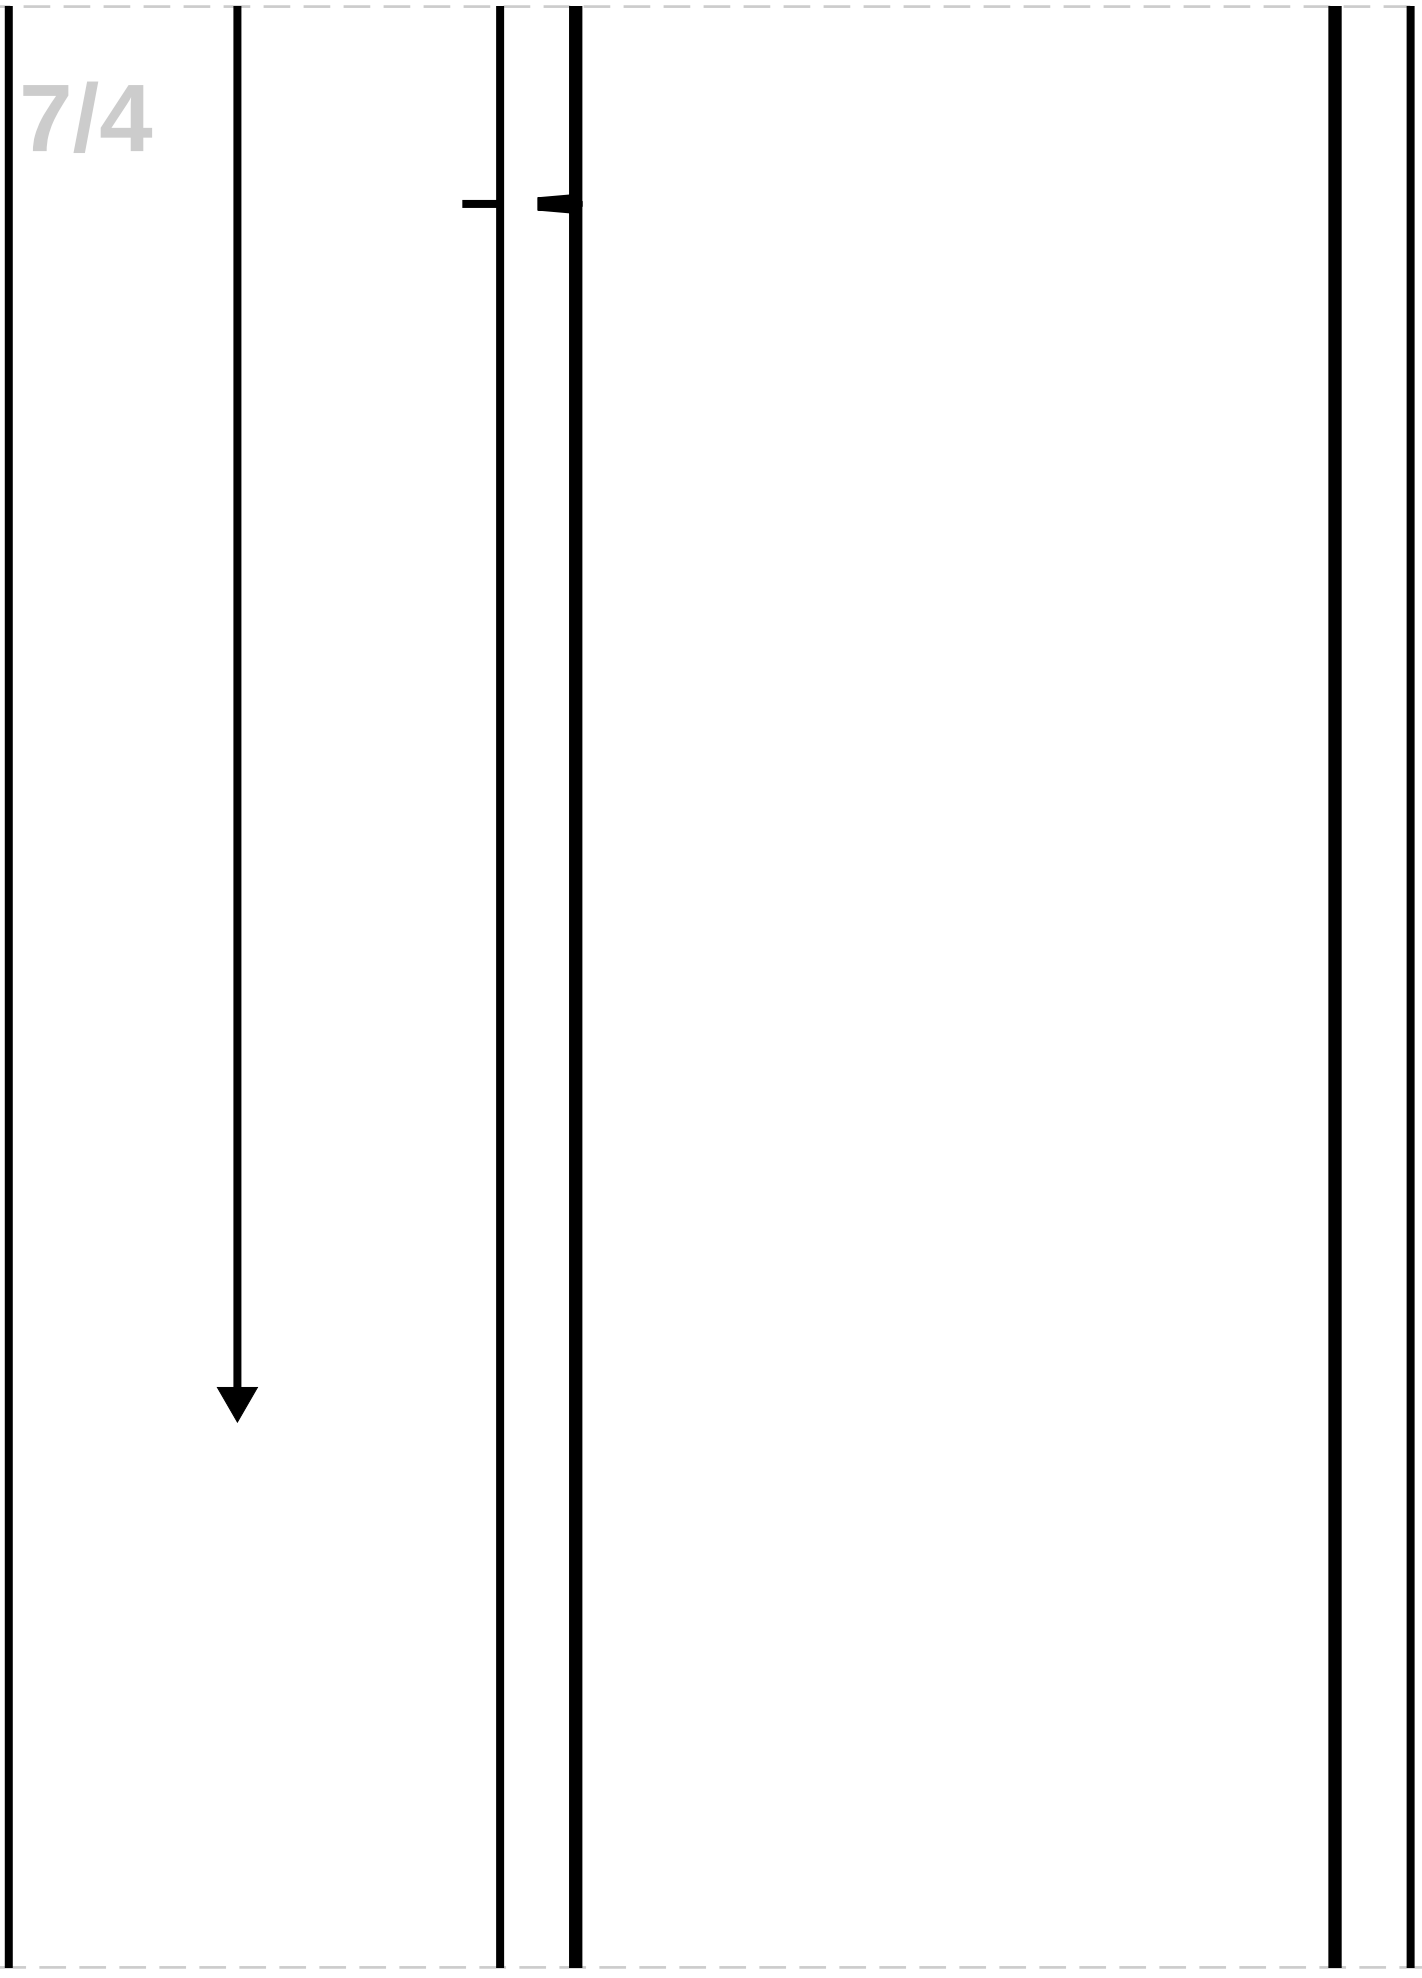

7/5



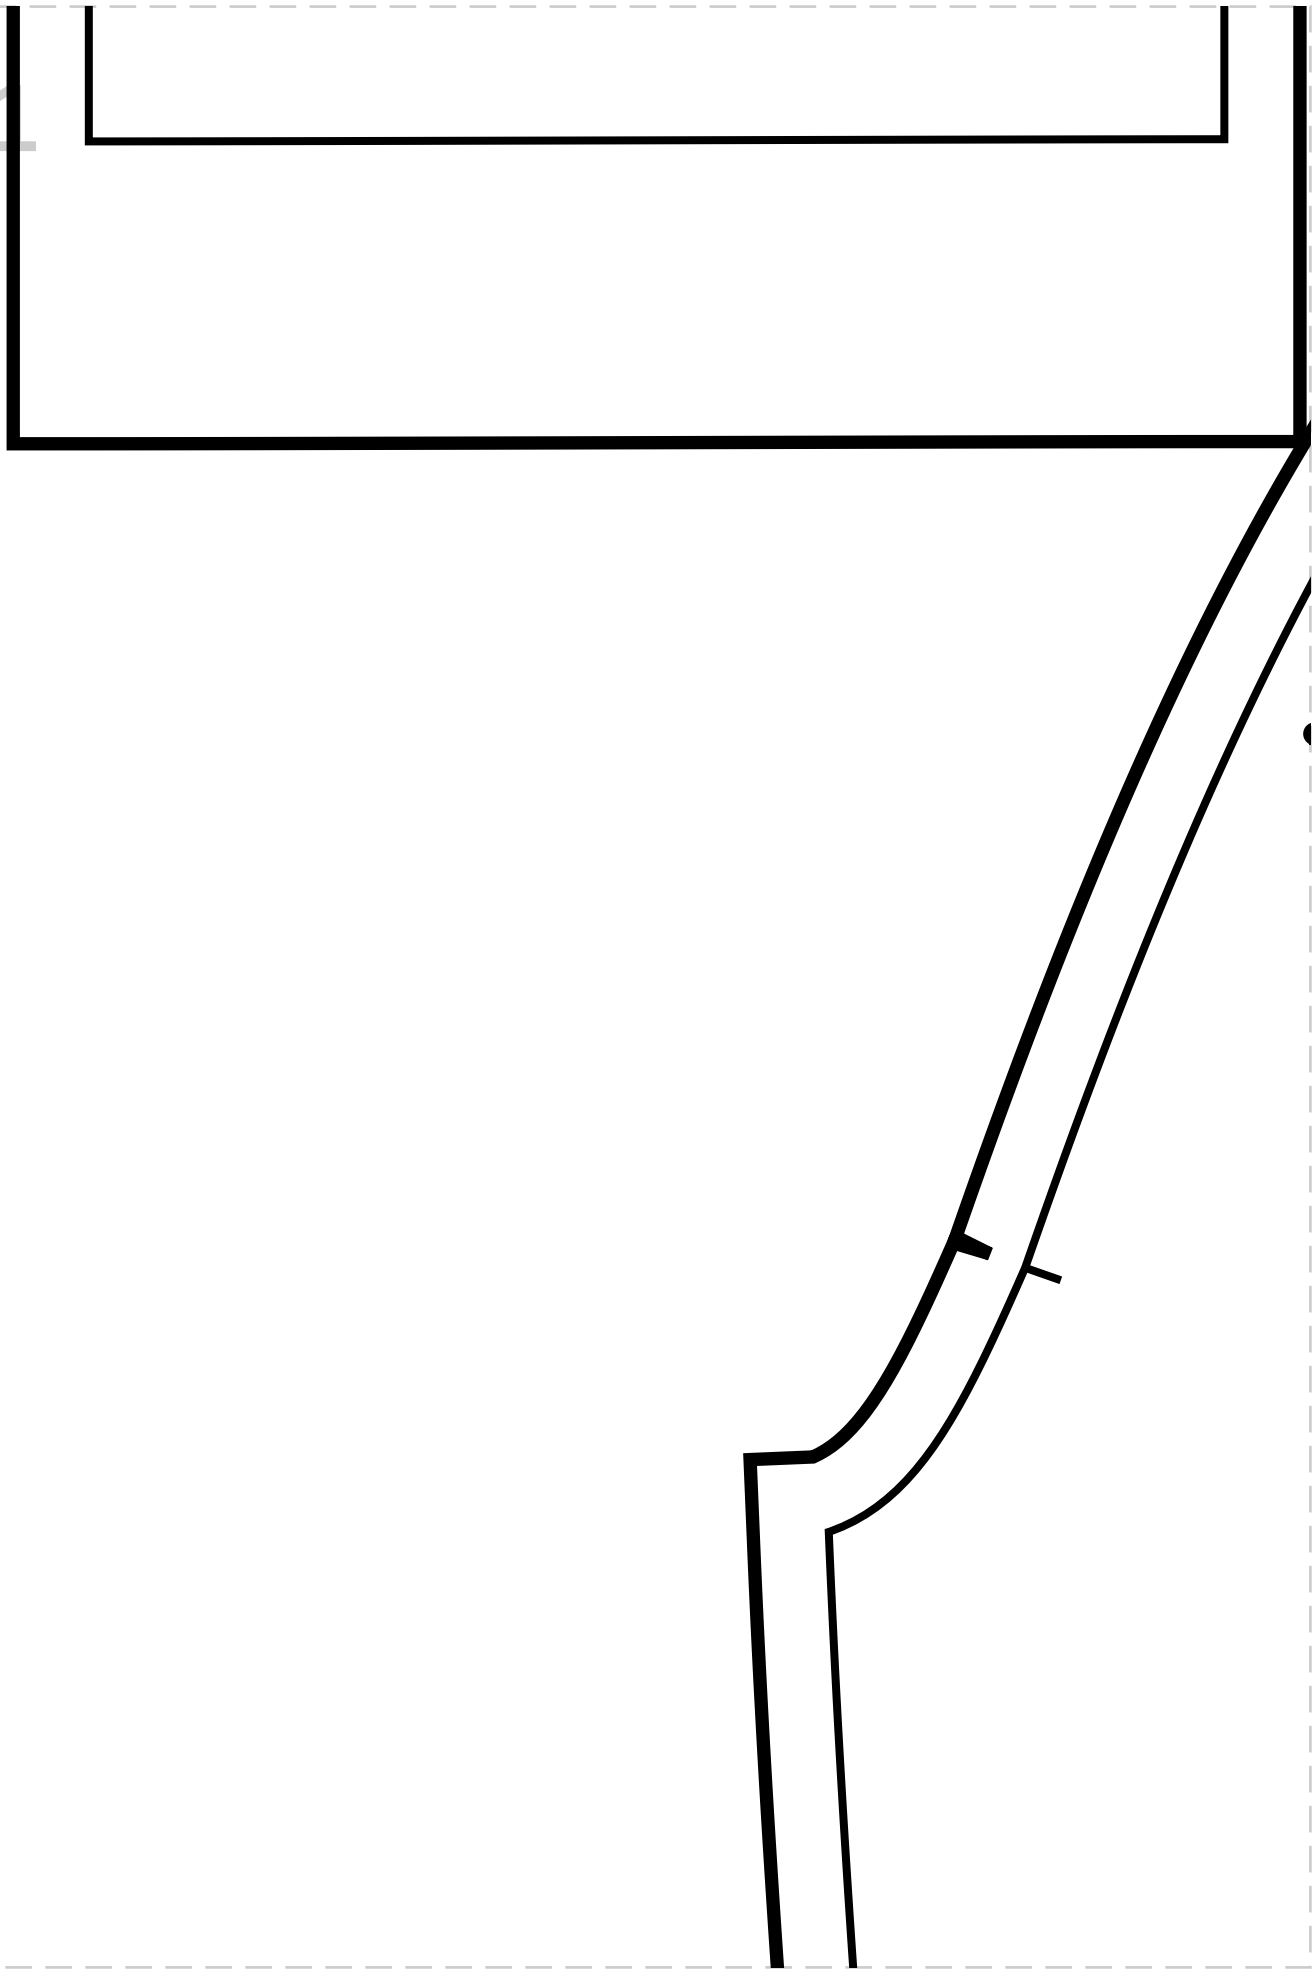


# 17


## UPPER SLEEVE LINING

**LINING: Cut 2**


EASE


8/2

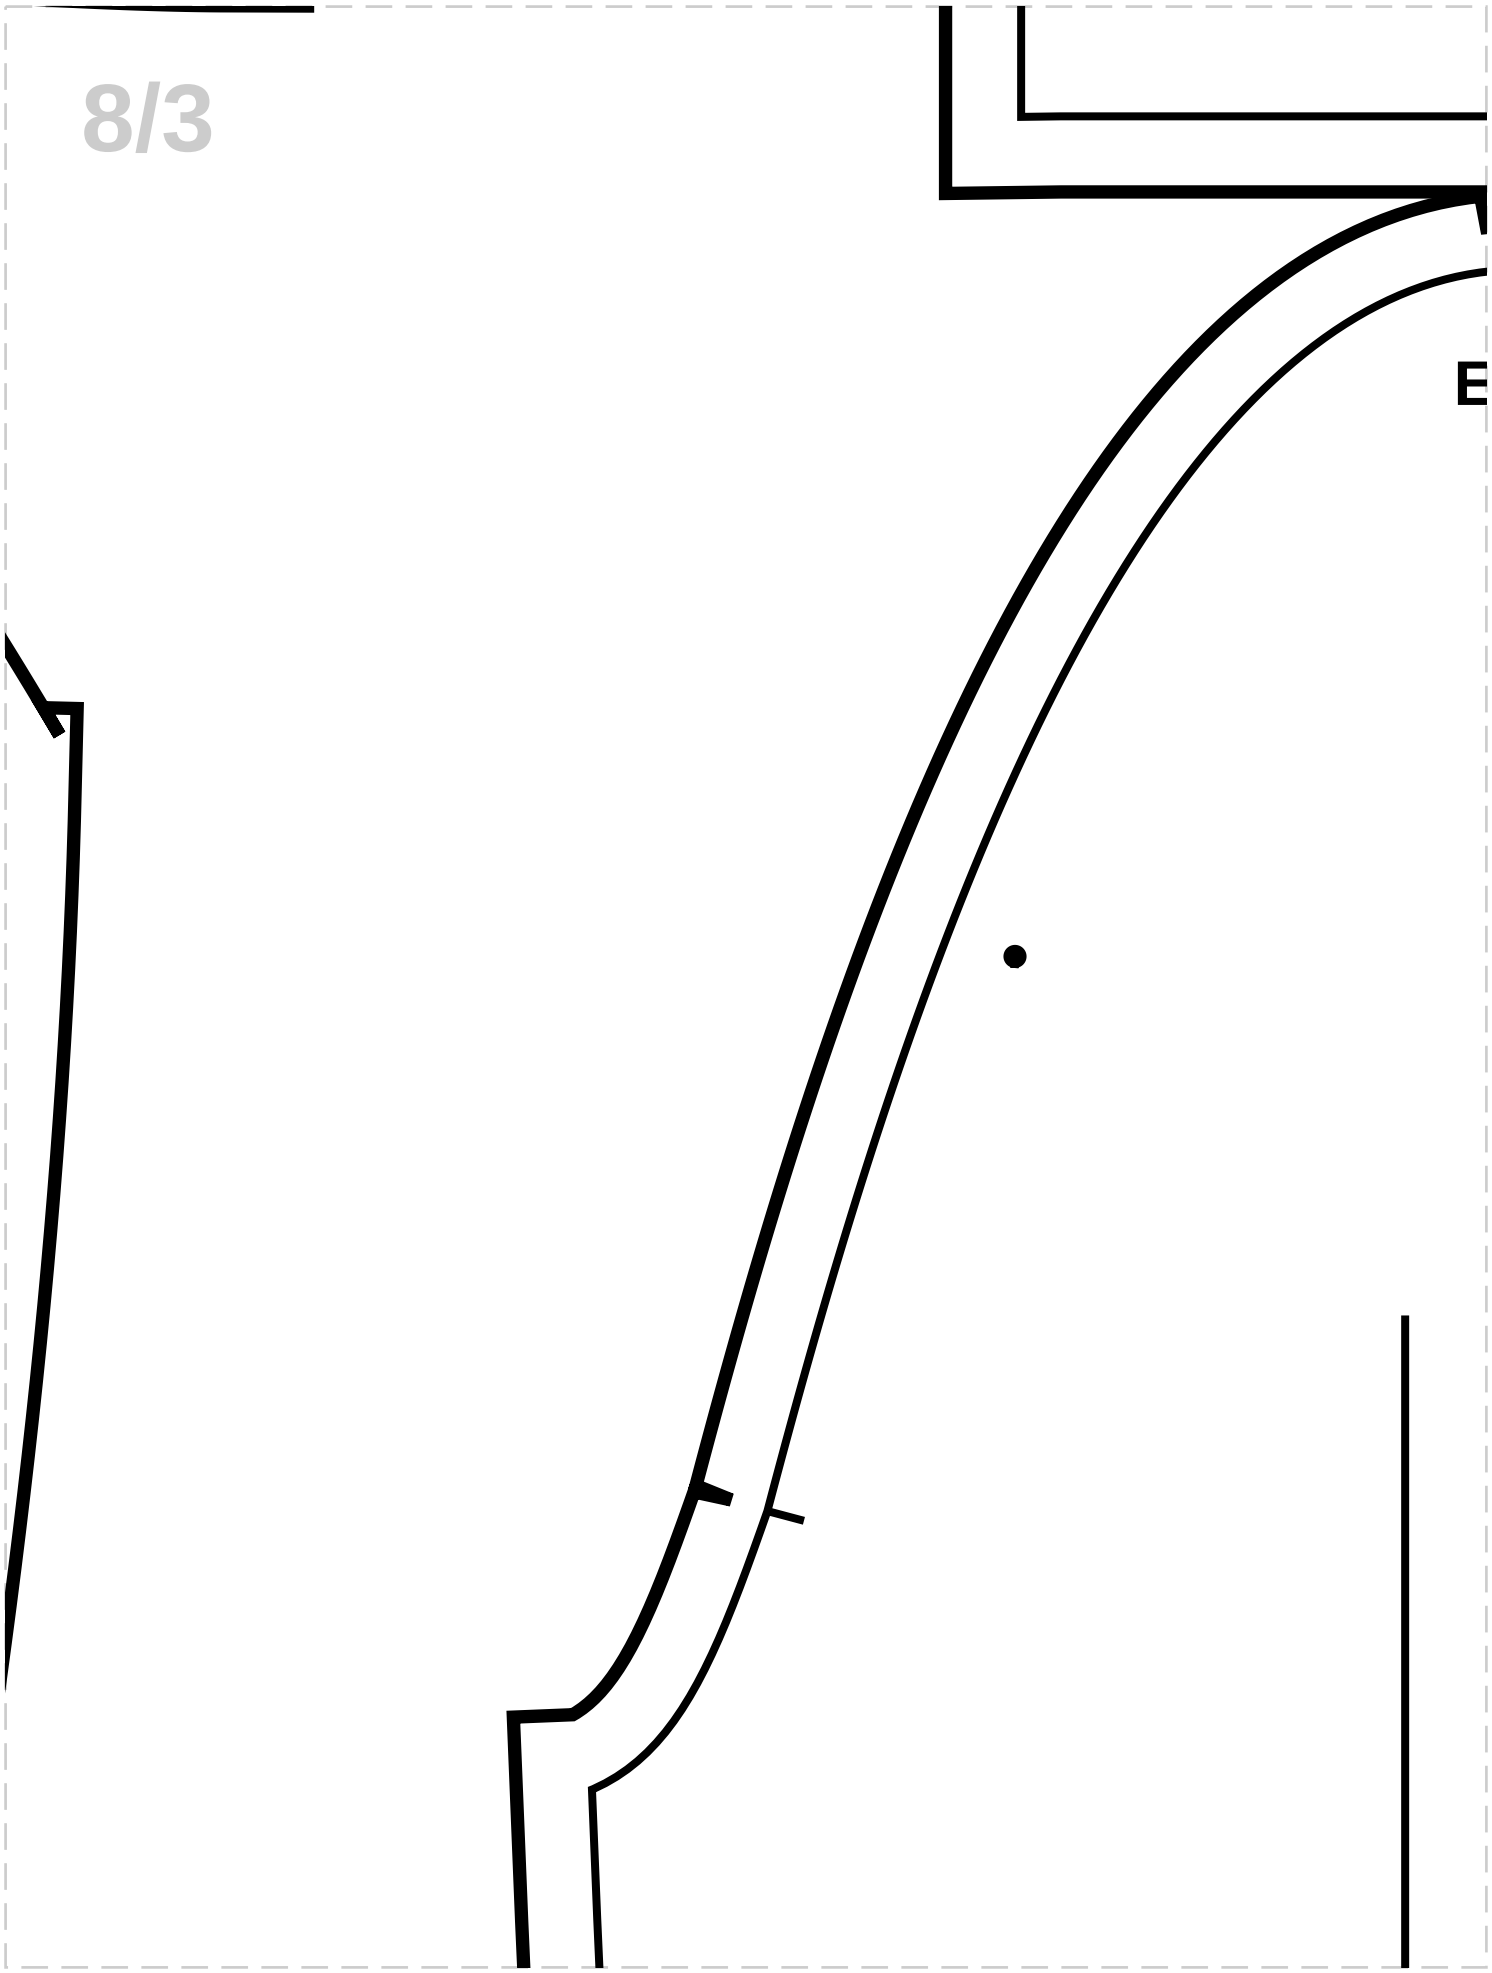

E

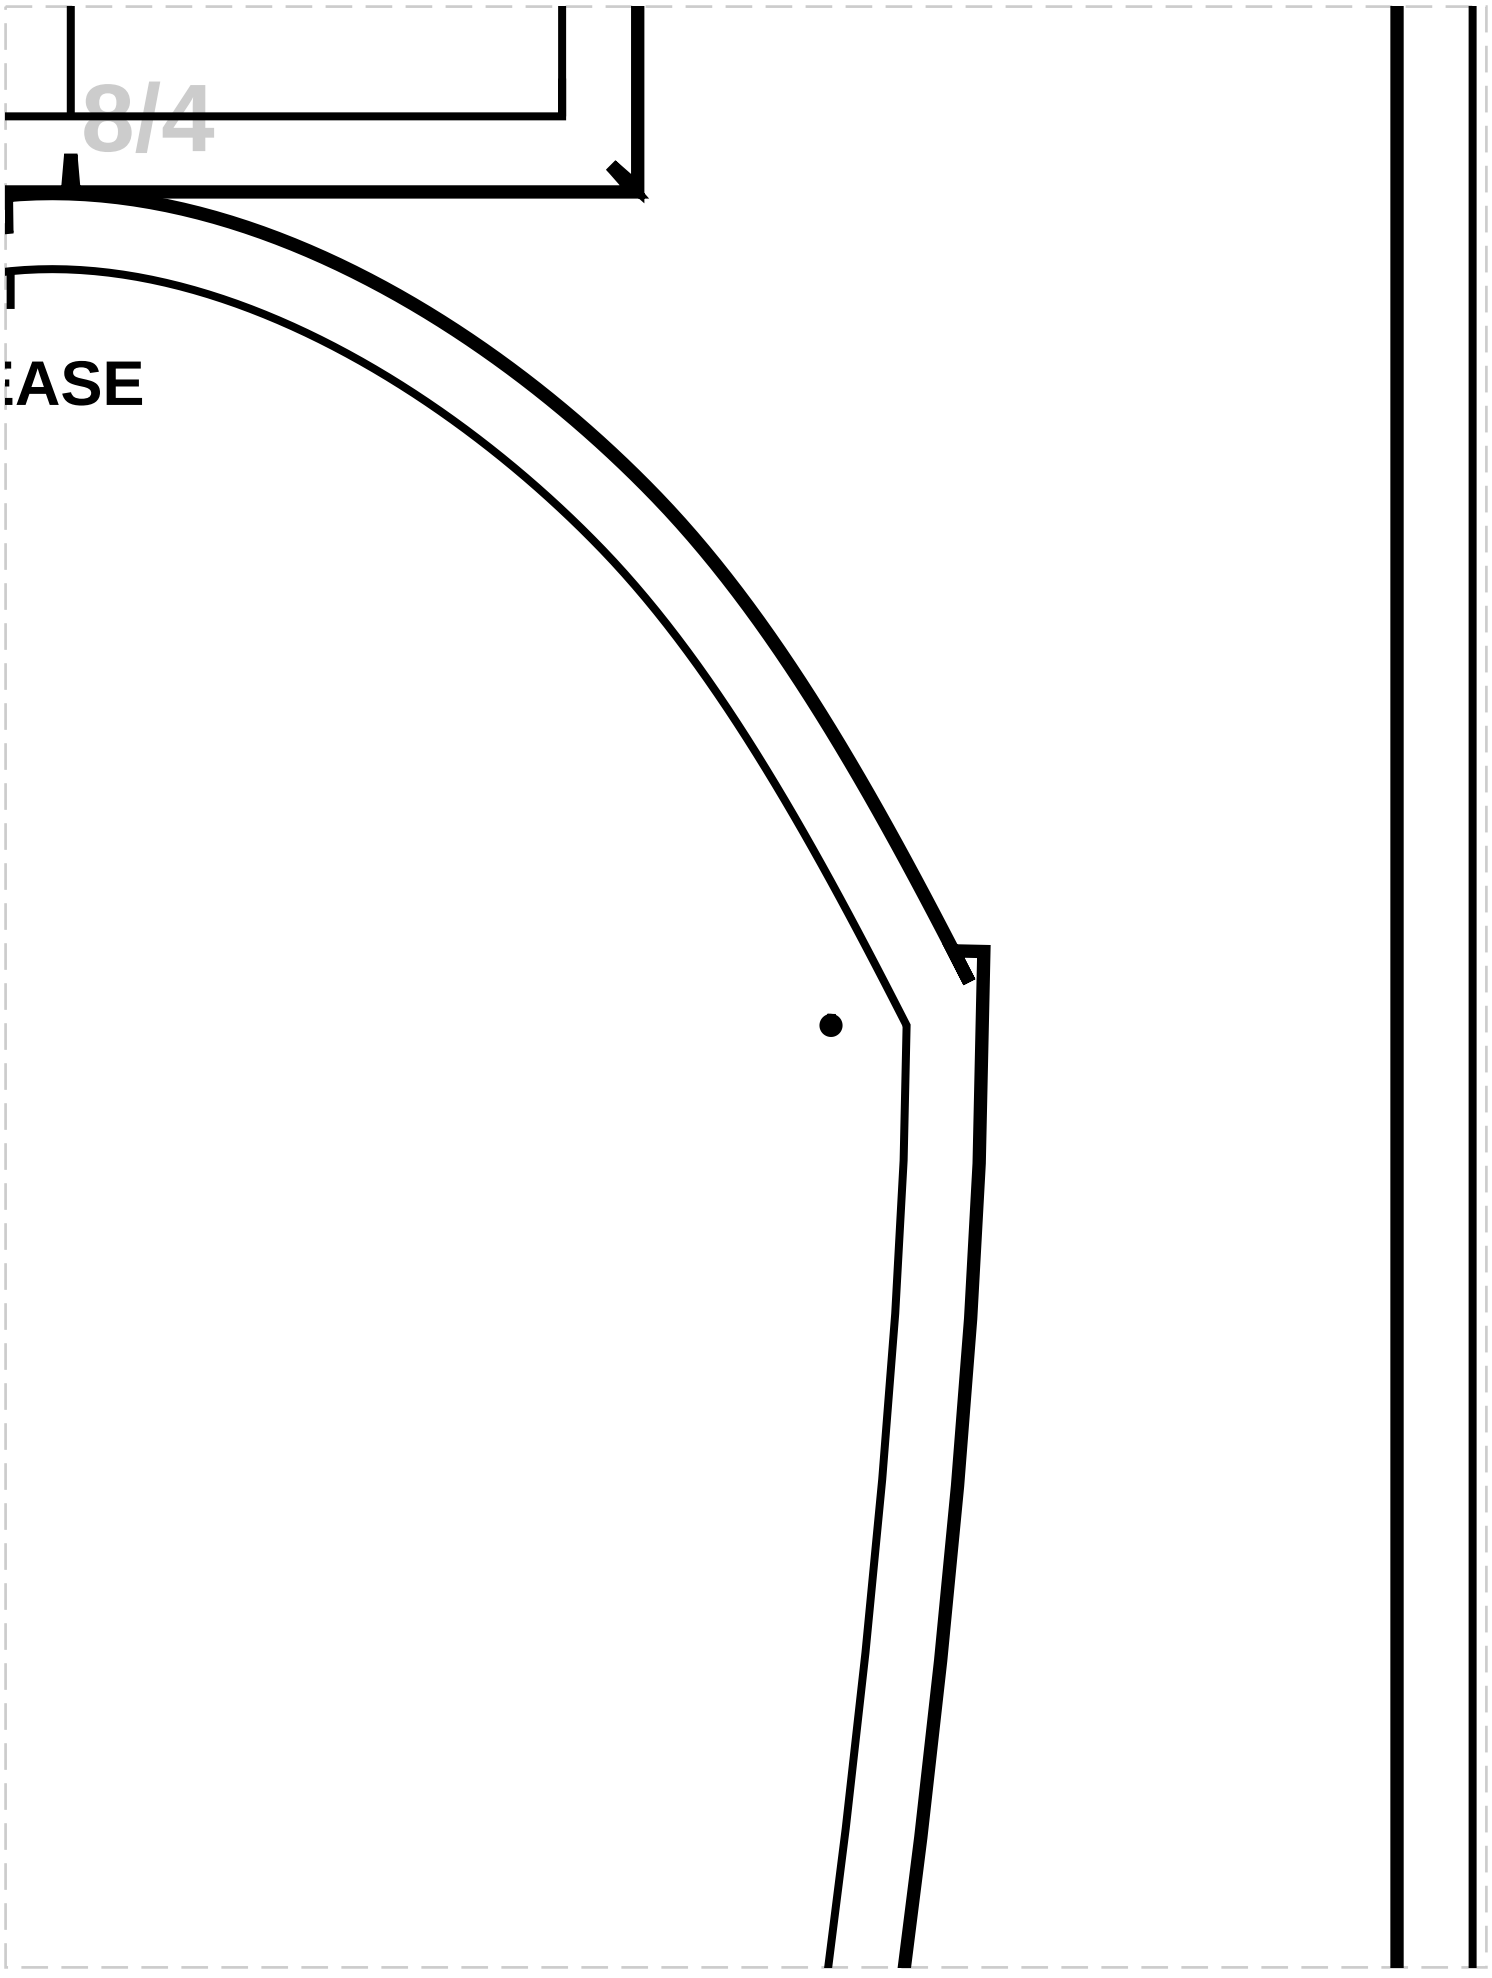

8/4
EASE


8/5

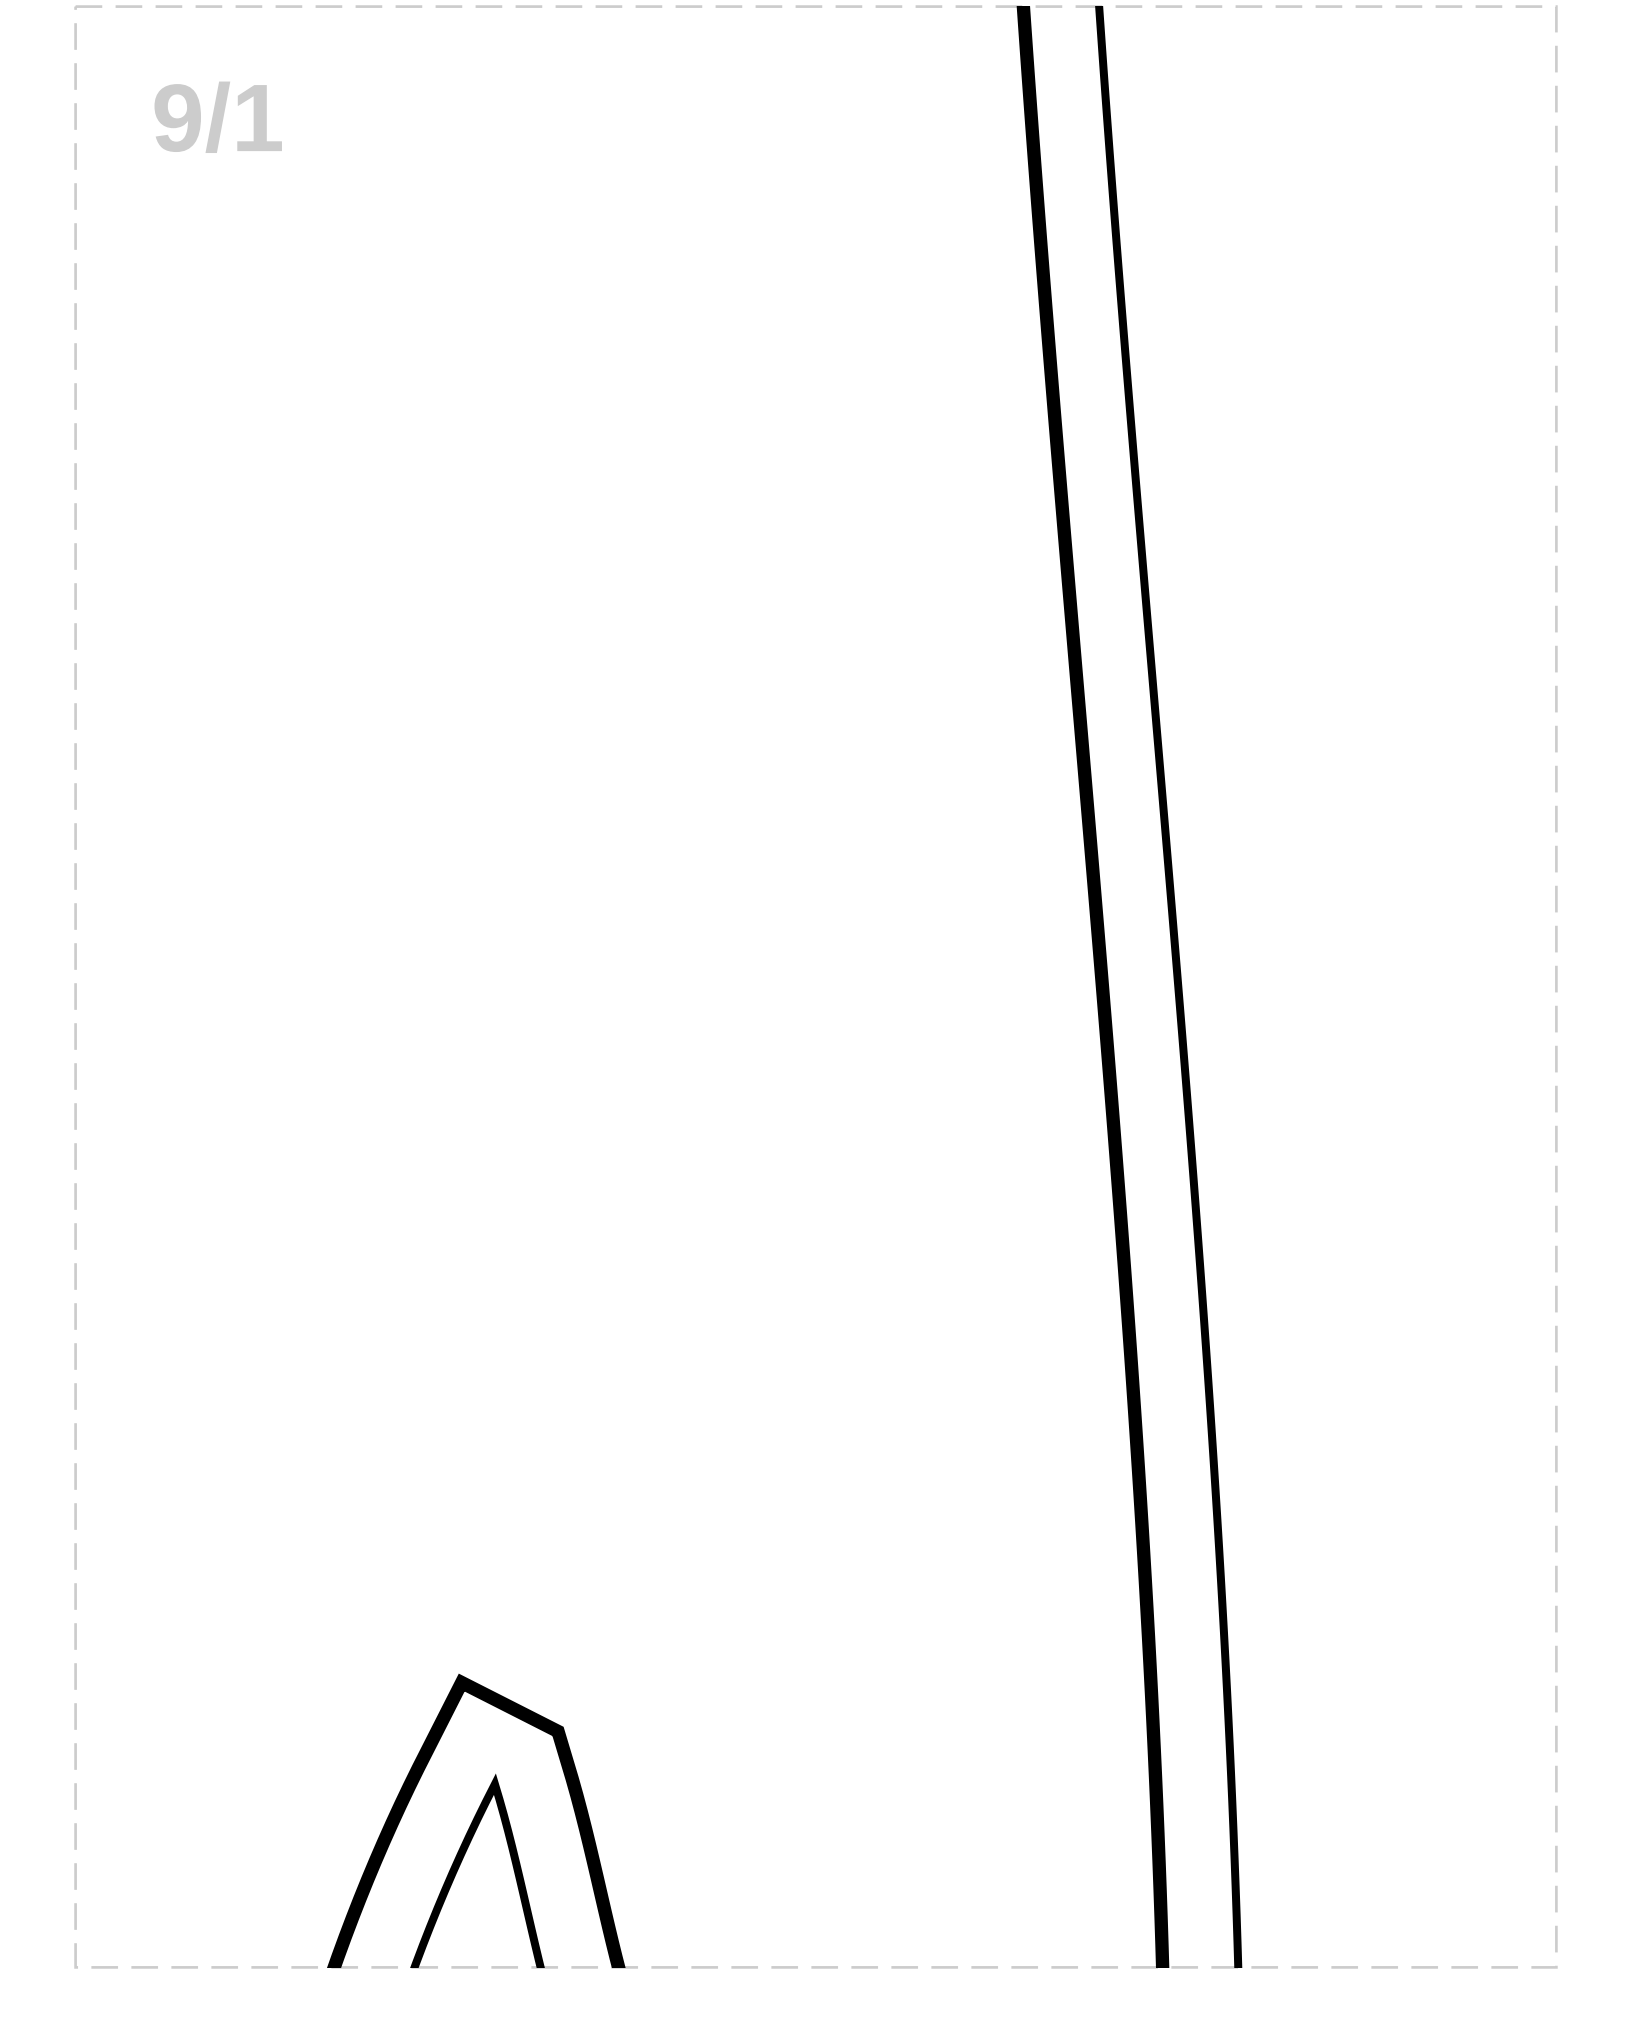


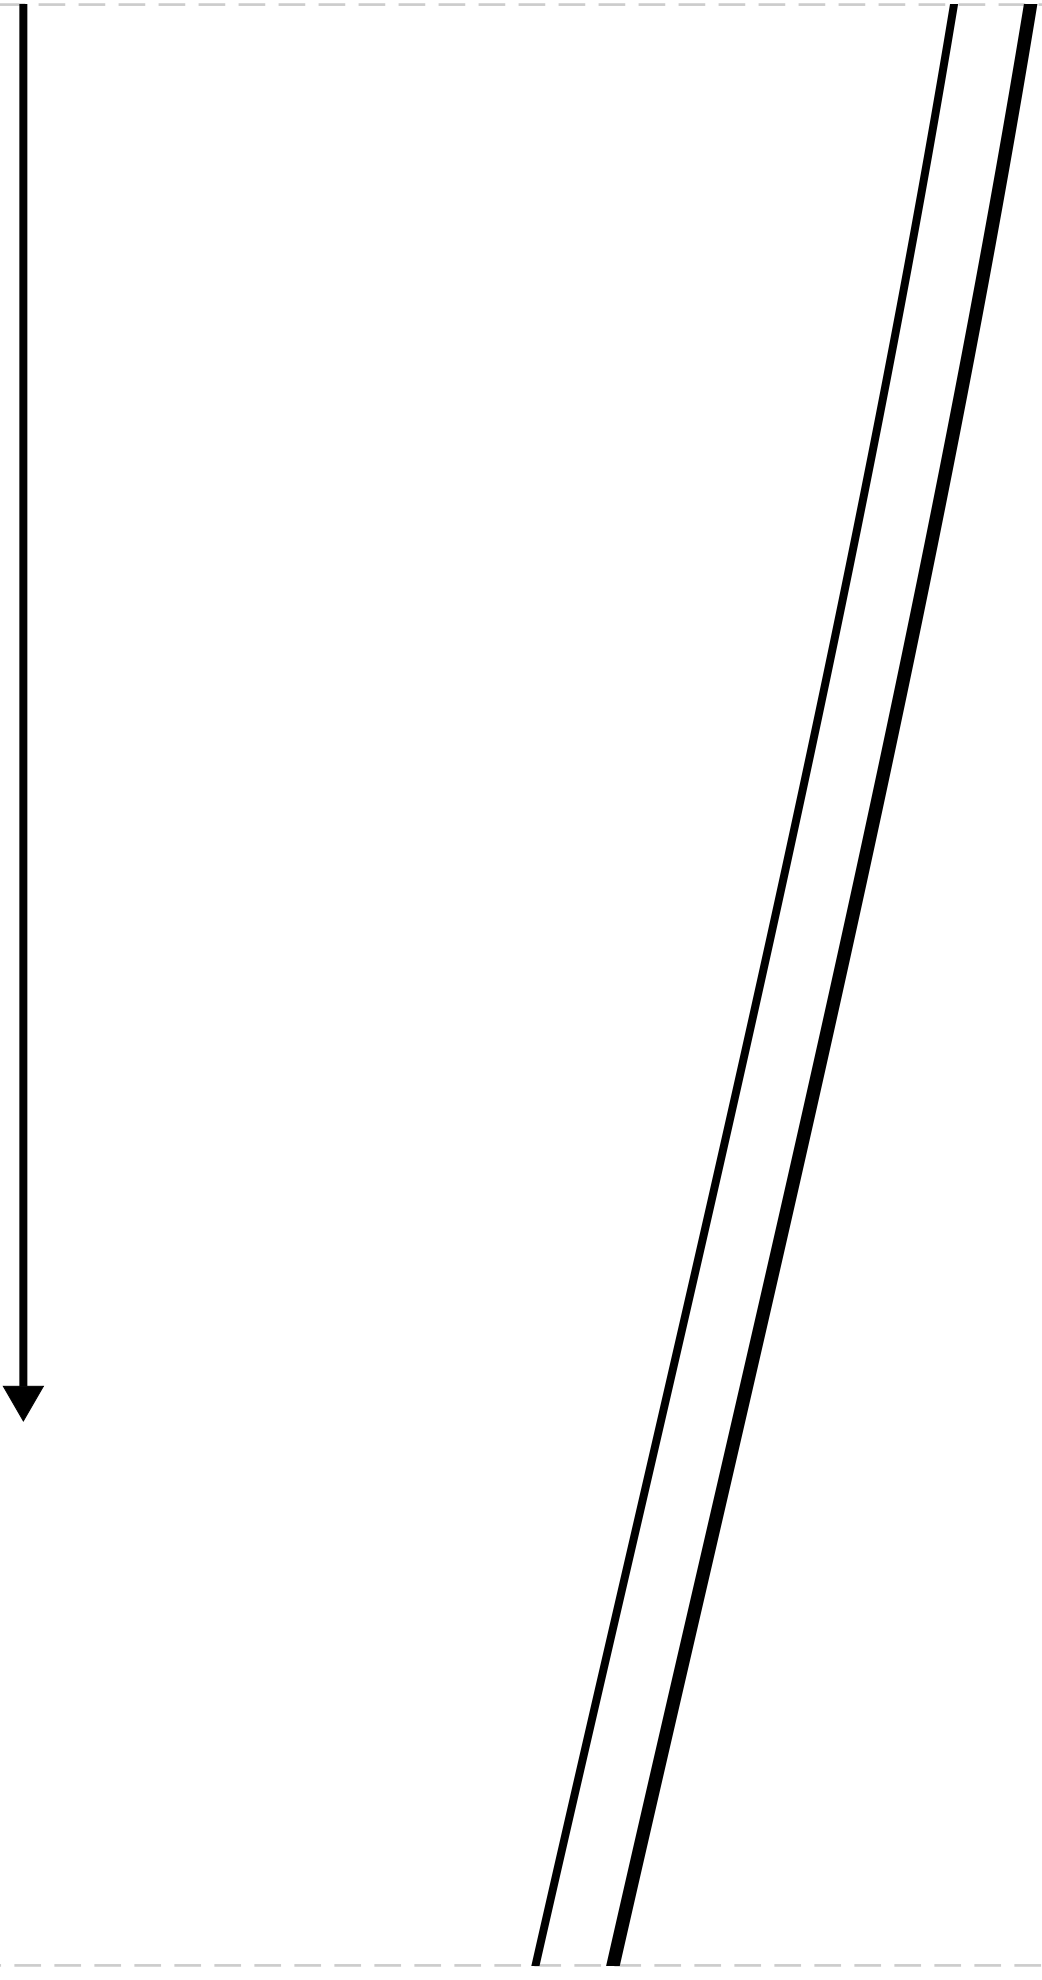

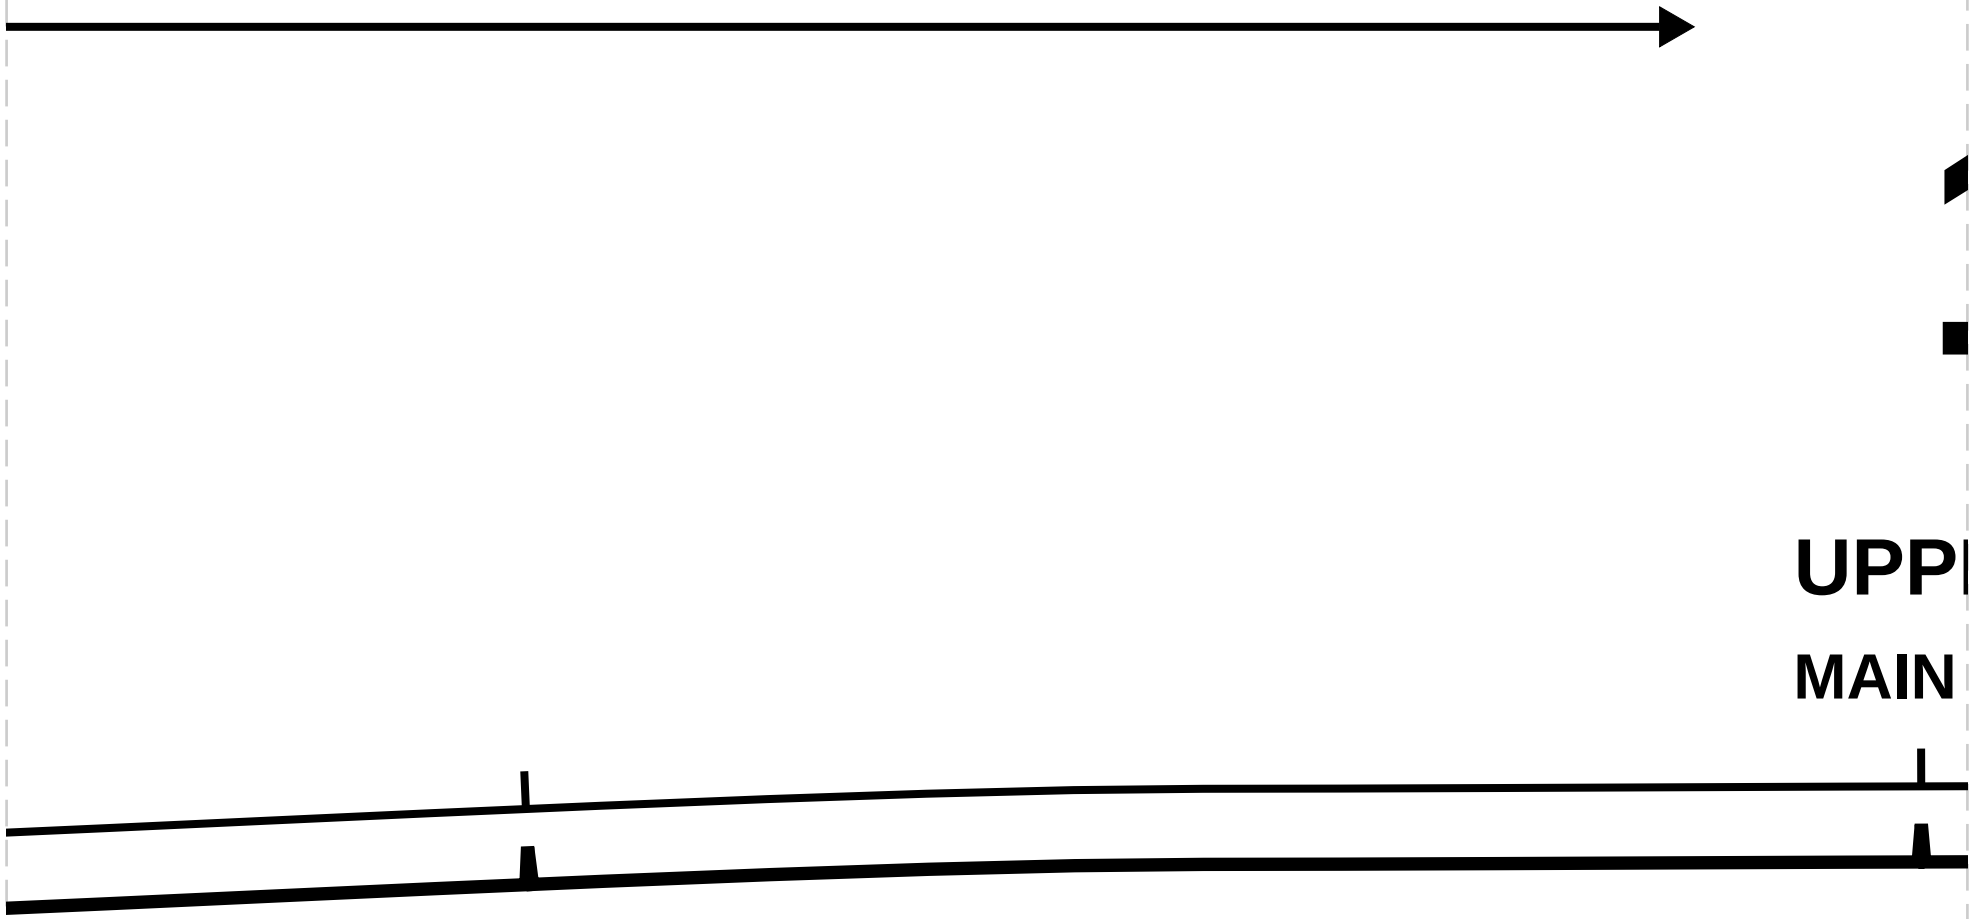
UPP
MAIN

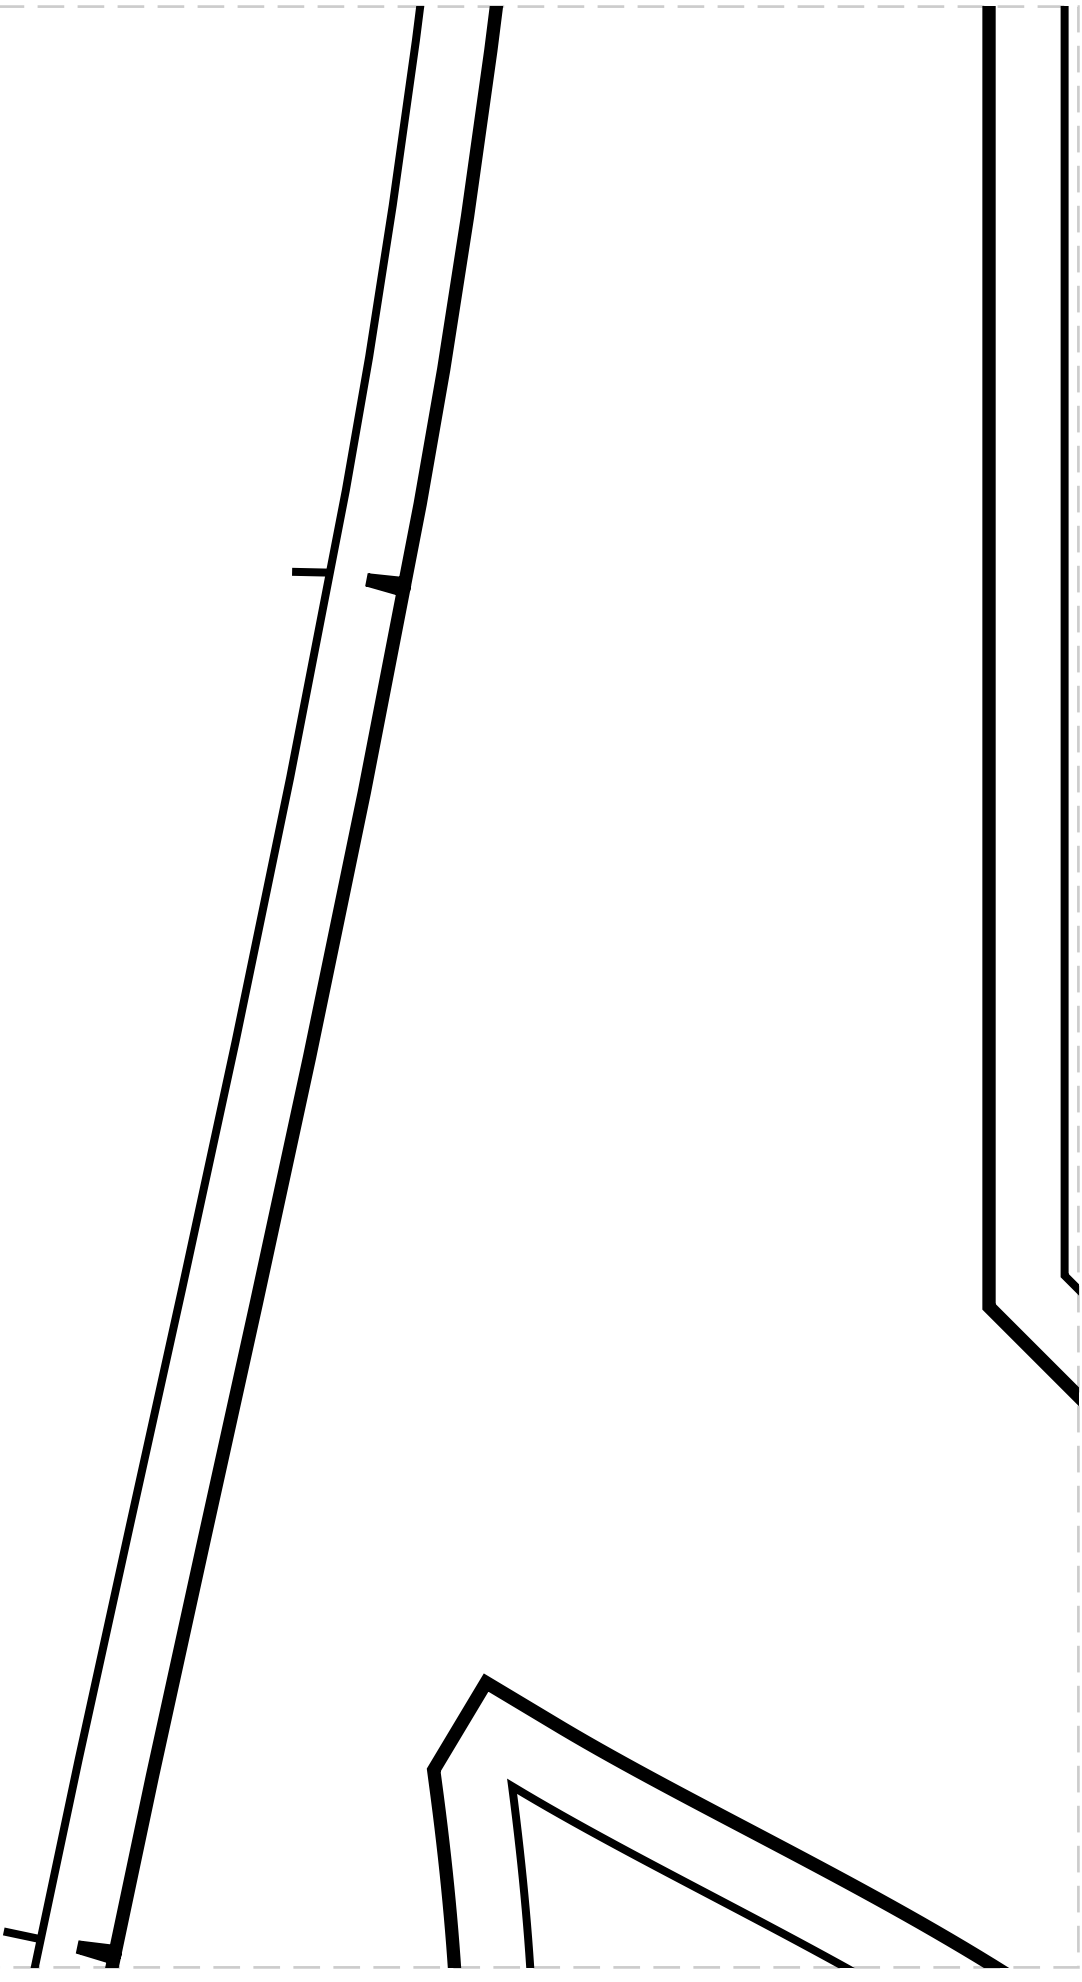

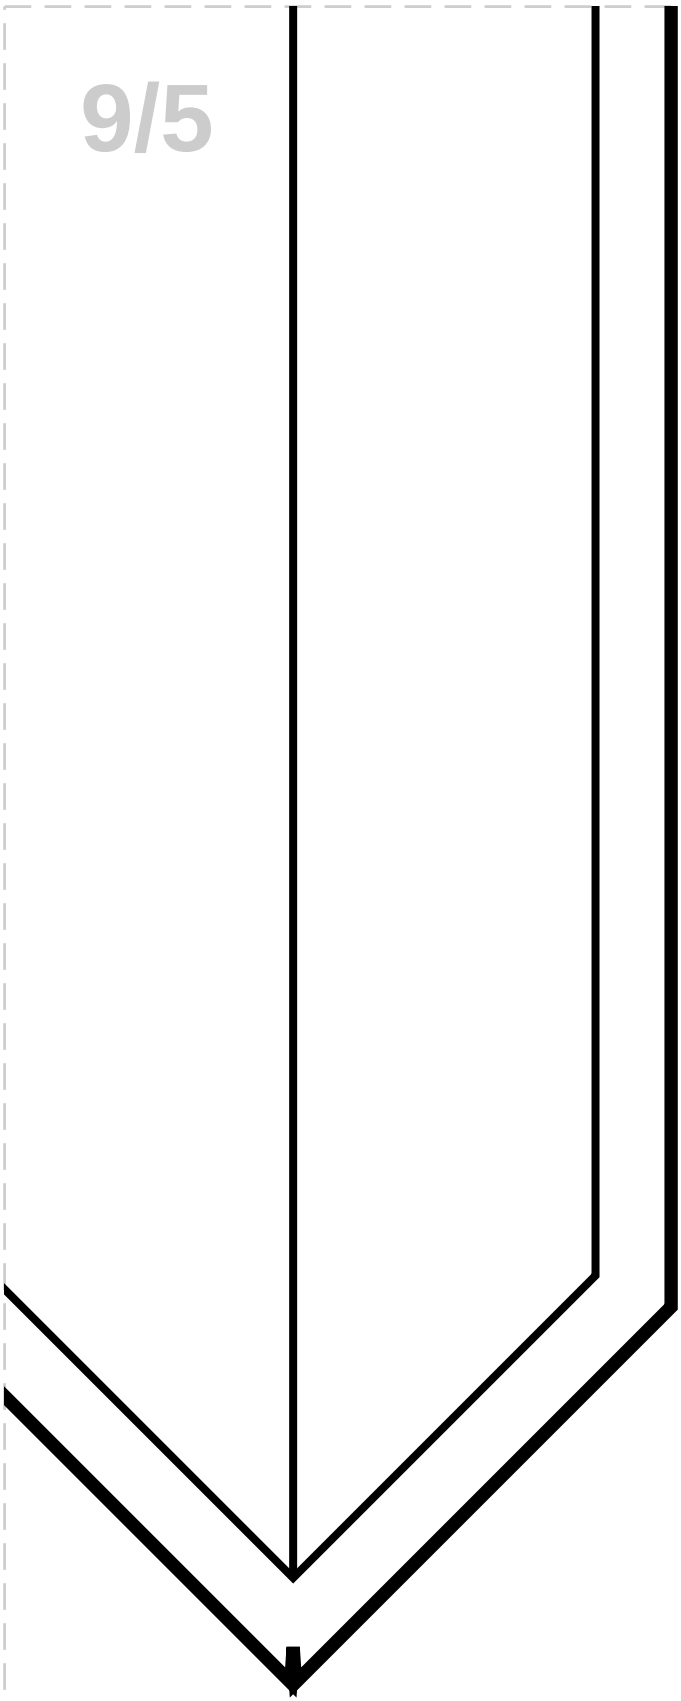

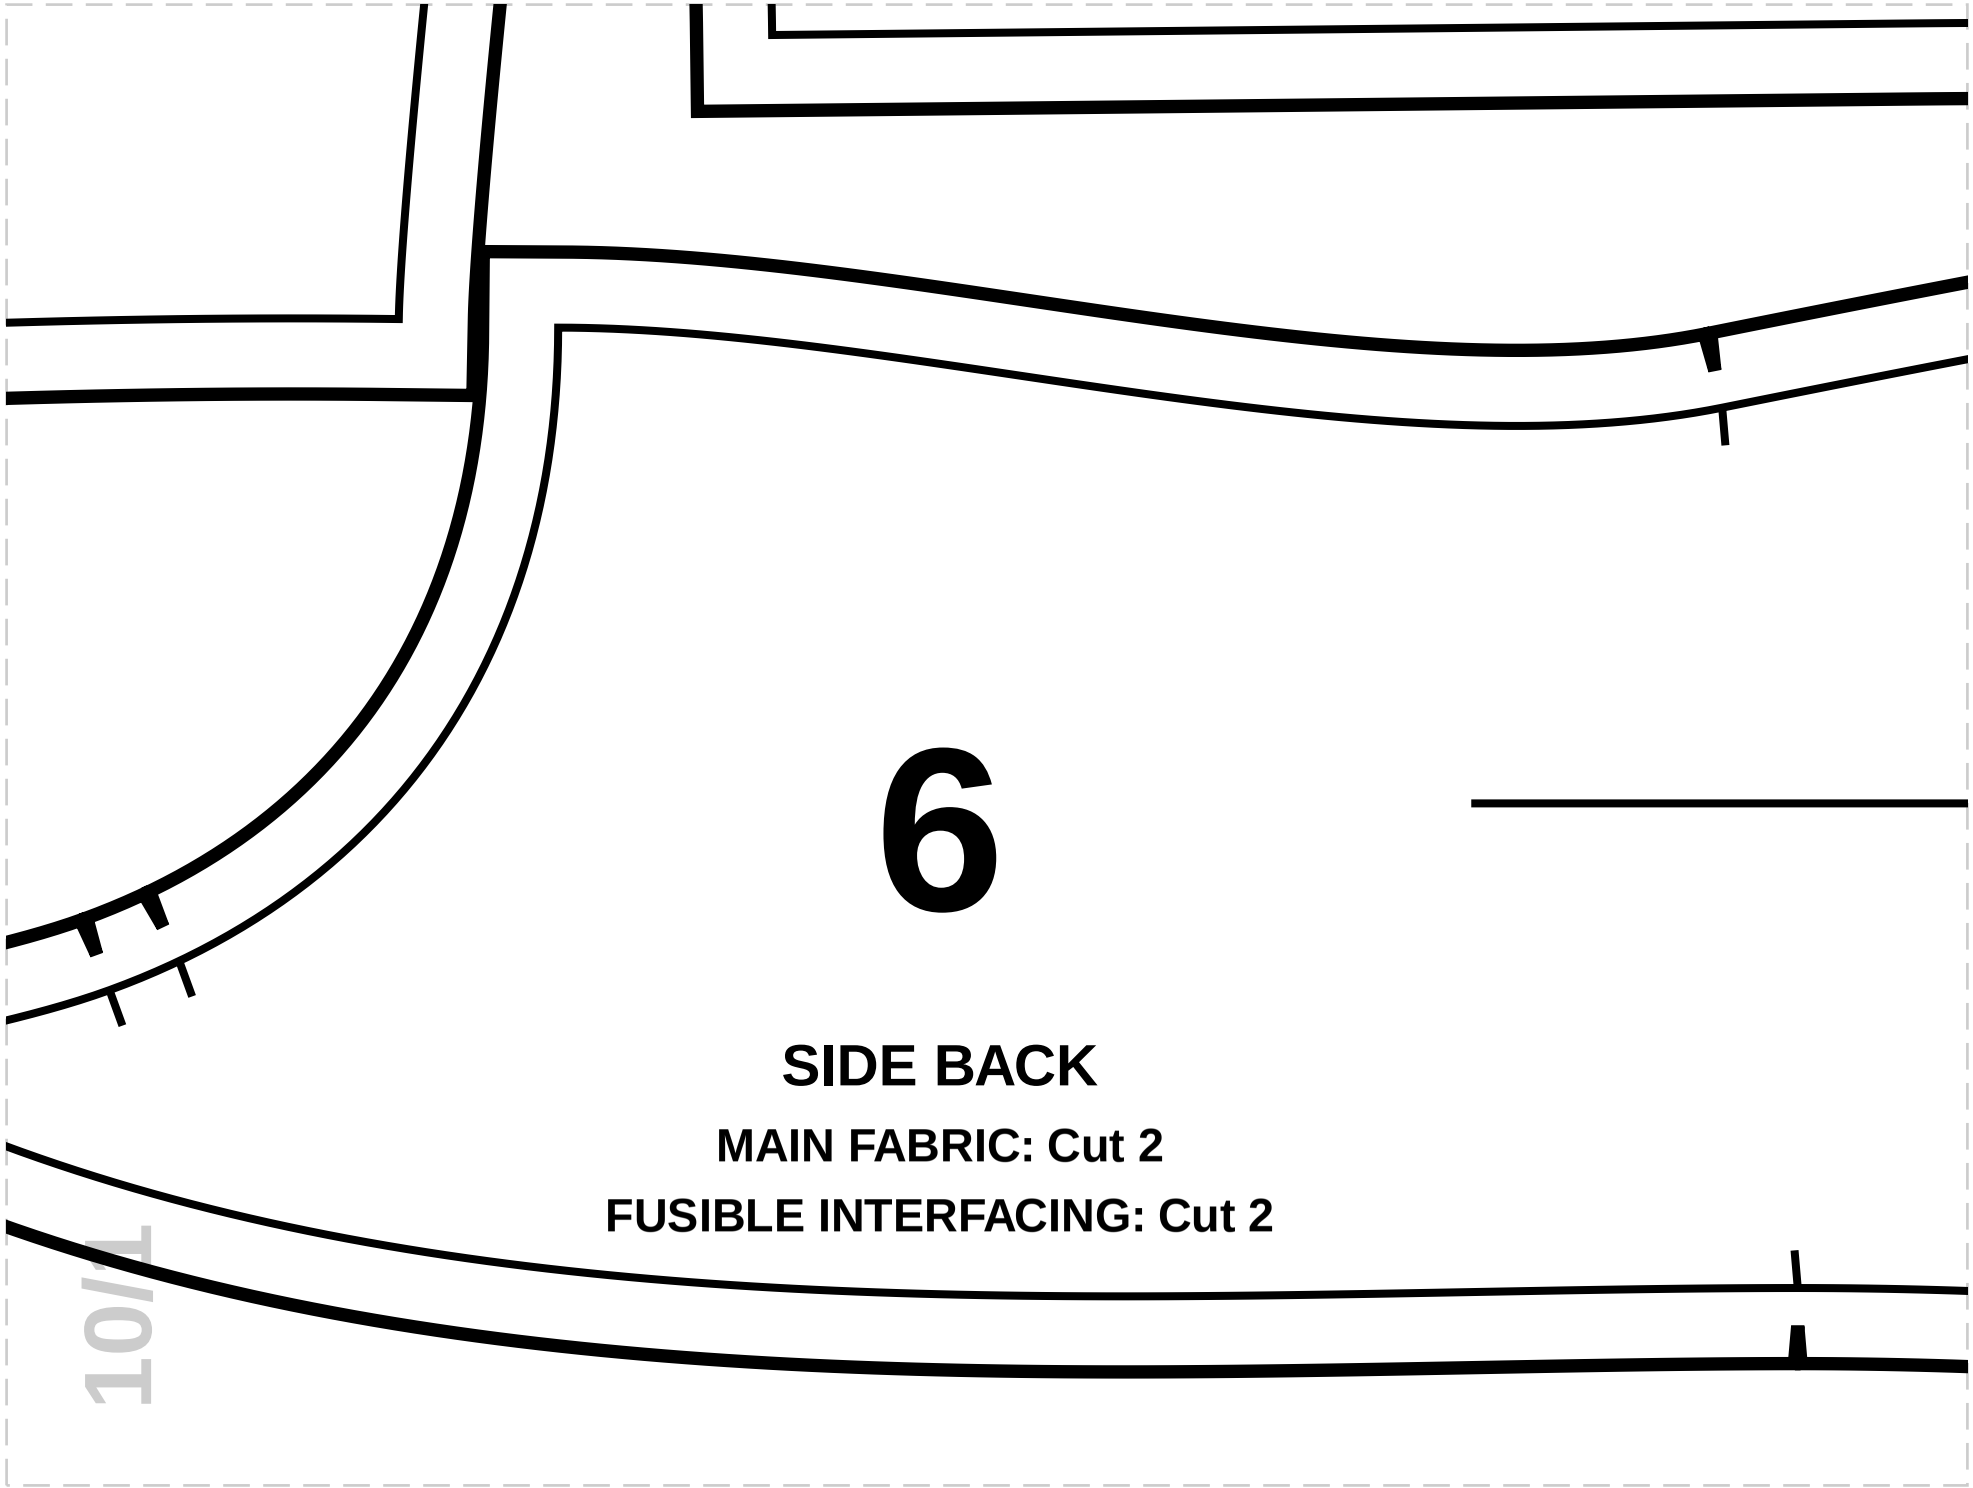

# 6

## SIDE BACK


**MAIN FABRIC: Cut 2**

**FUSIBLE INTERFACING: Cut 2**

# 7

## SIDE BACK LINING

**LINING: Cut 2**

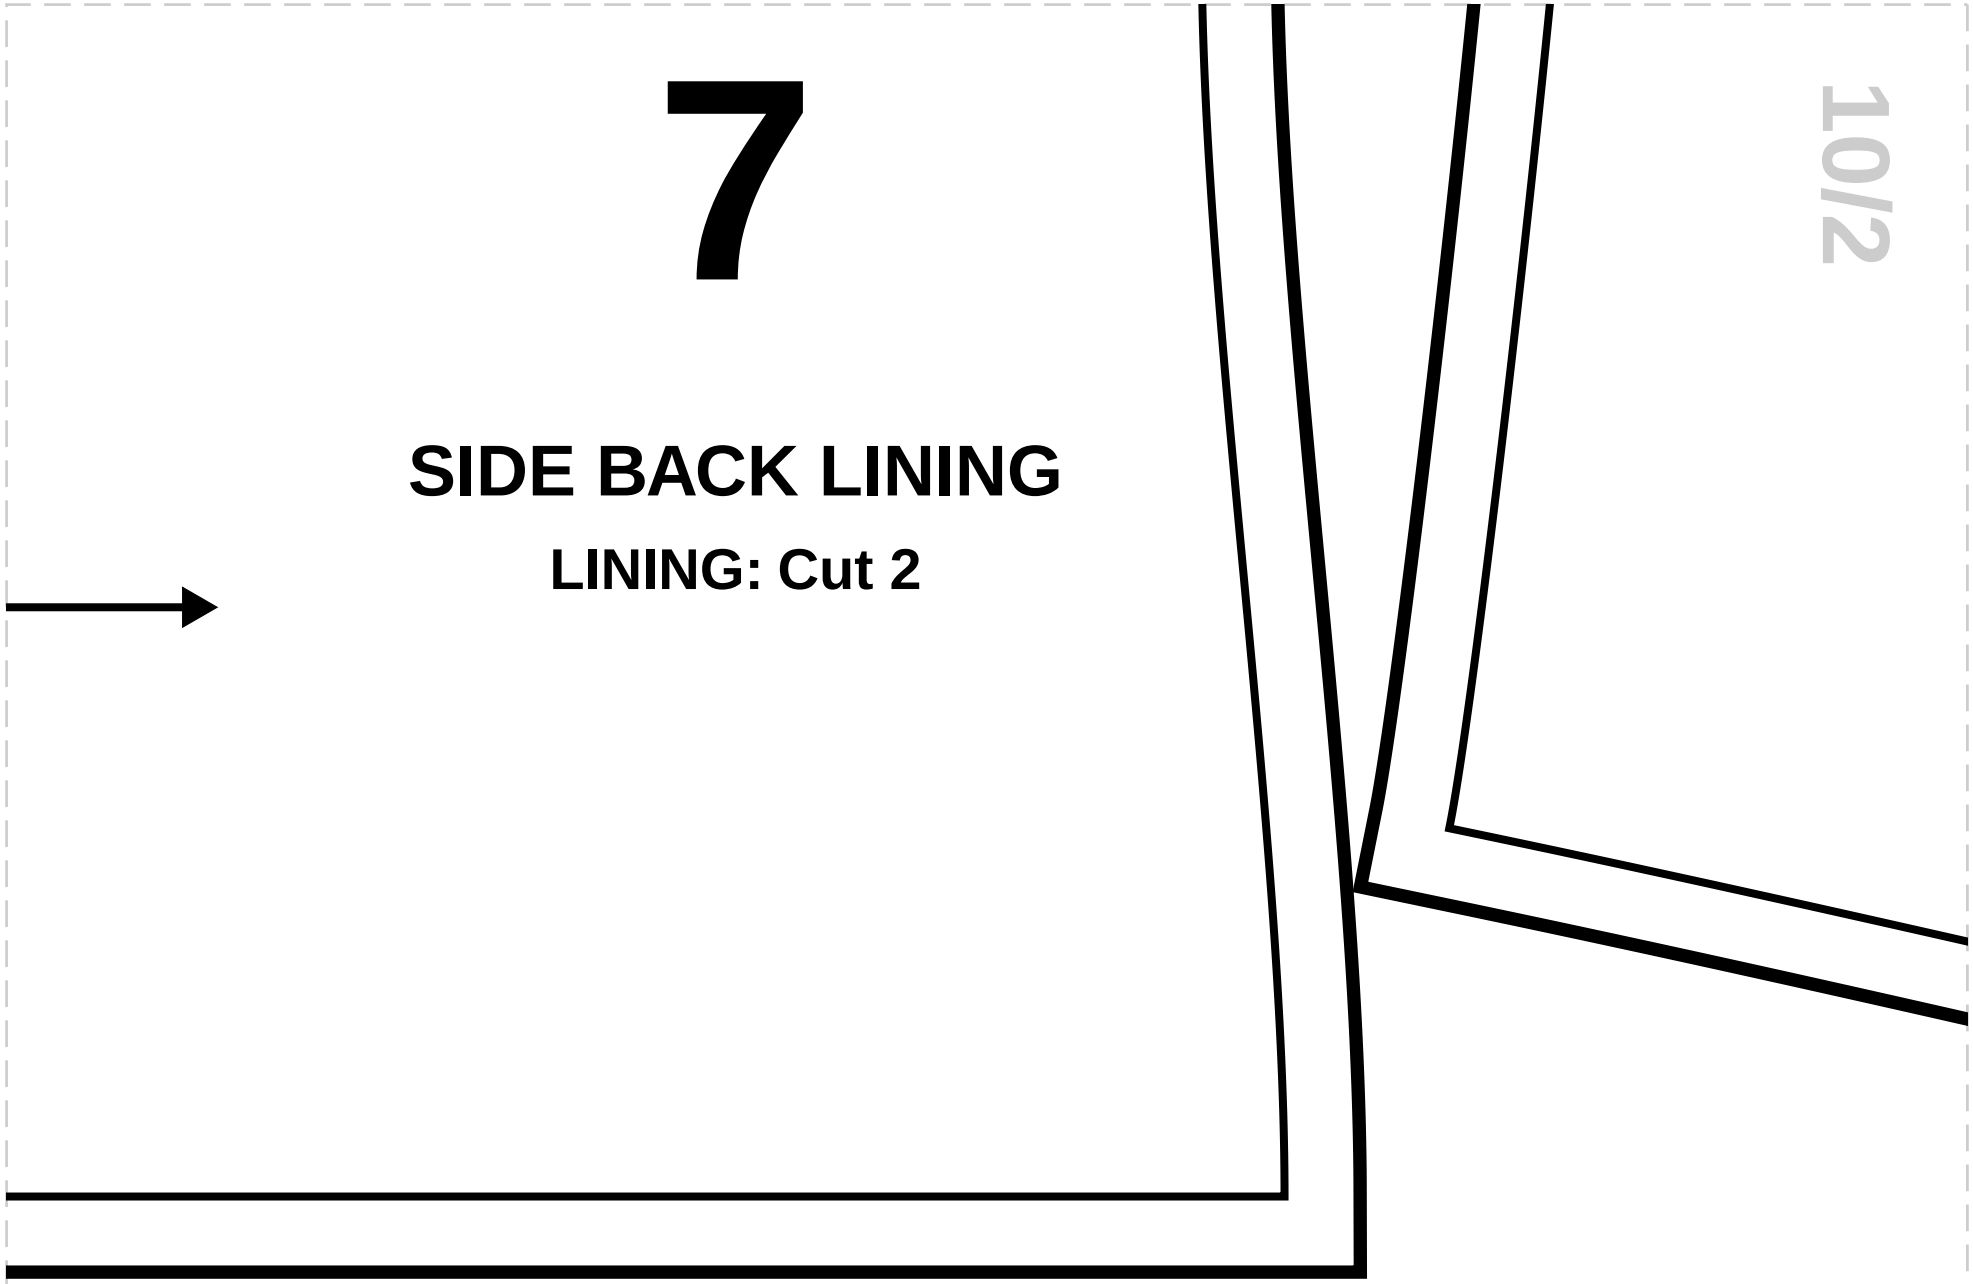



10/2


# 15


## ER SLEEVE


**FABRIC: Cut 2**

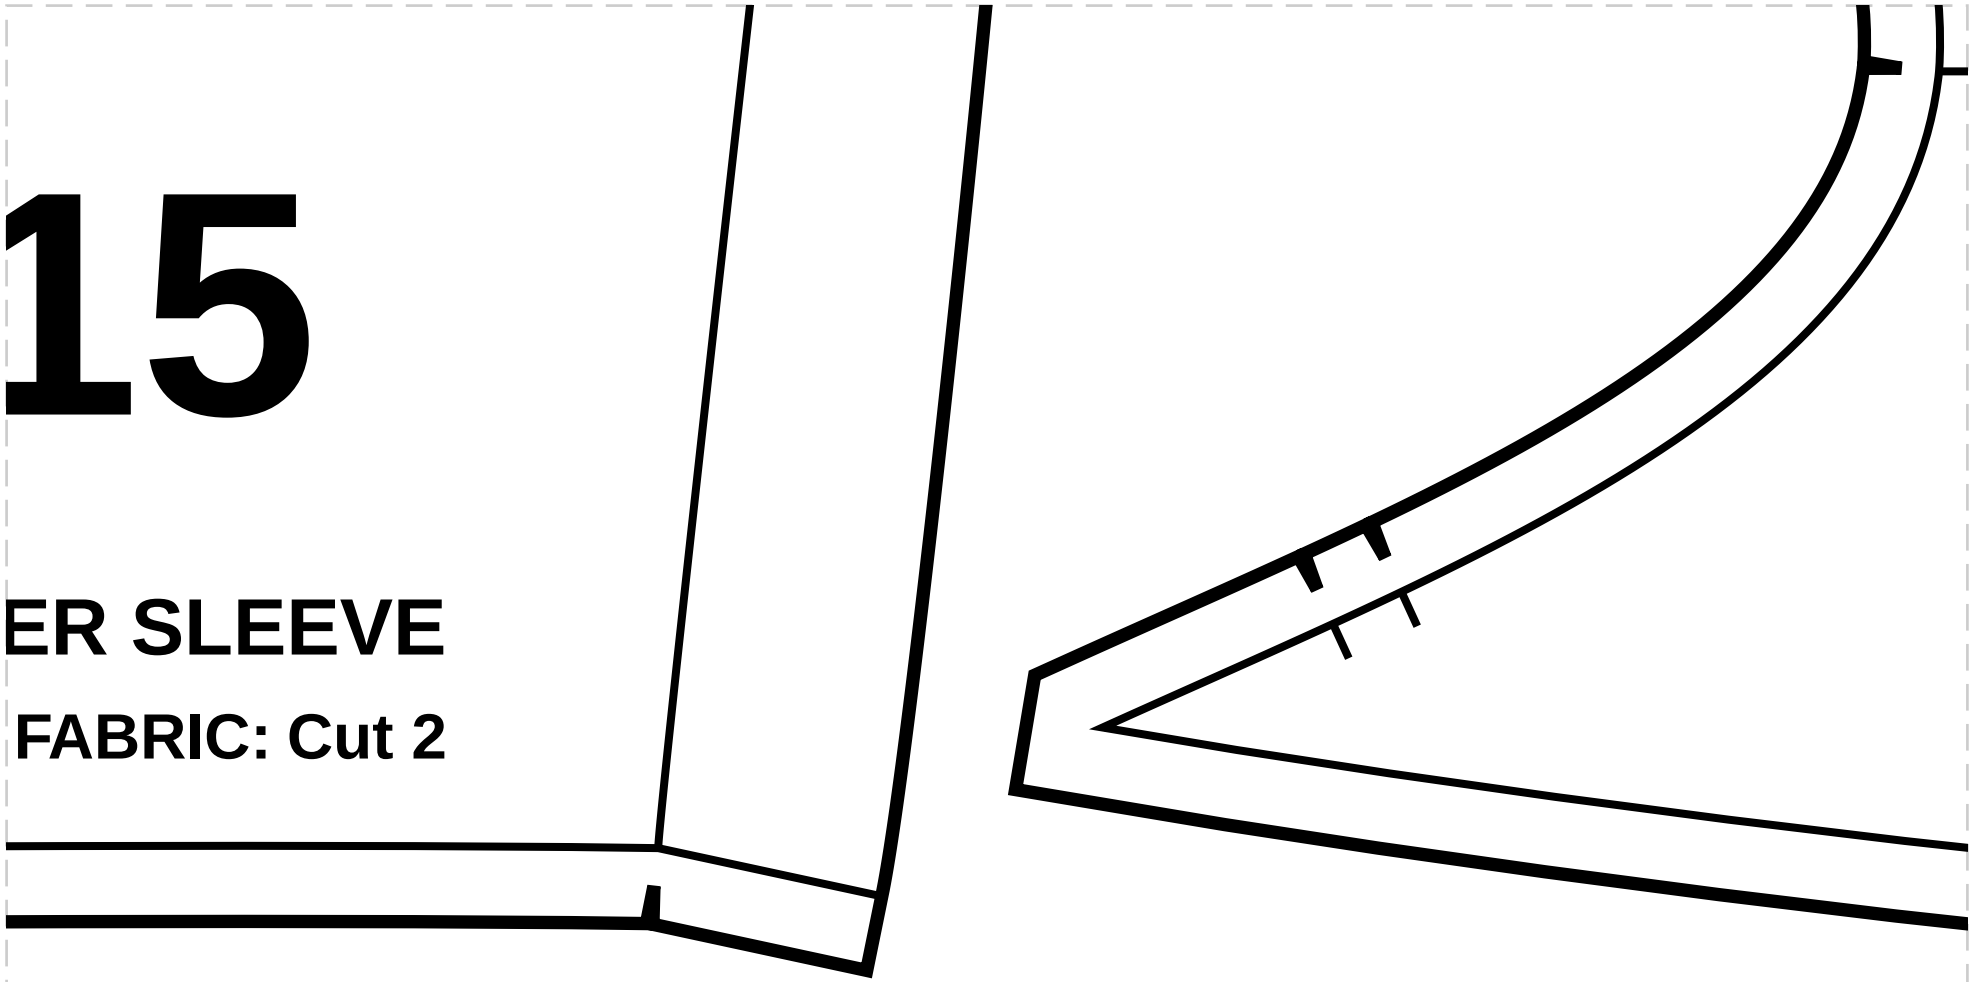

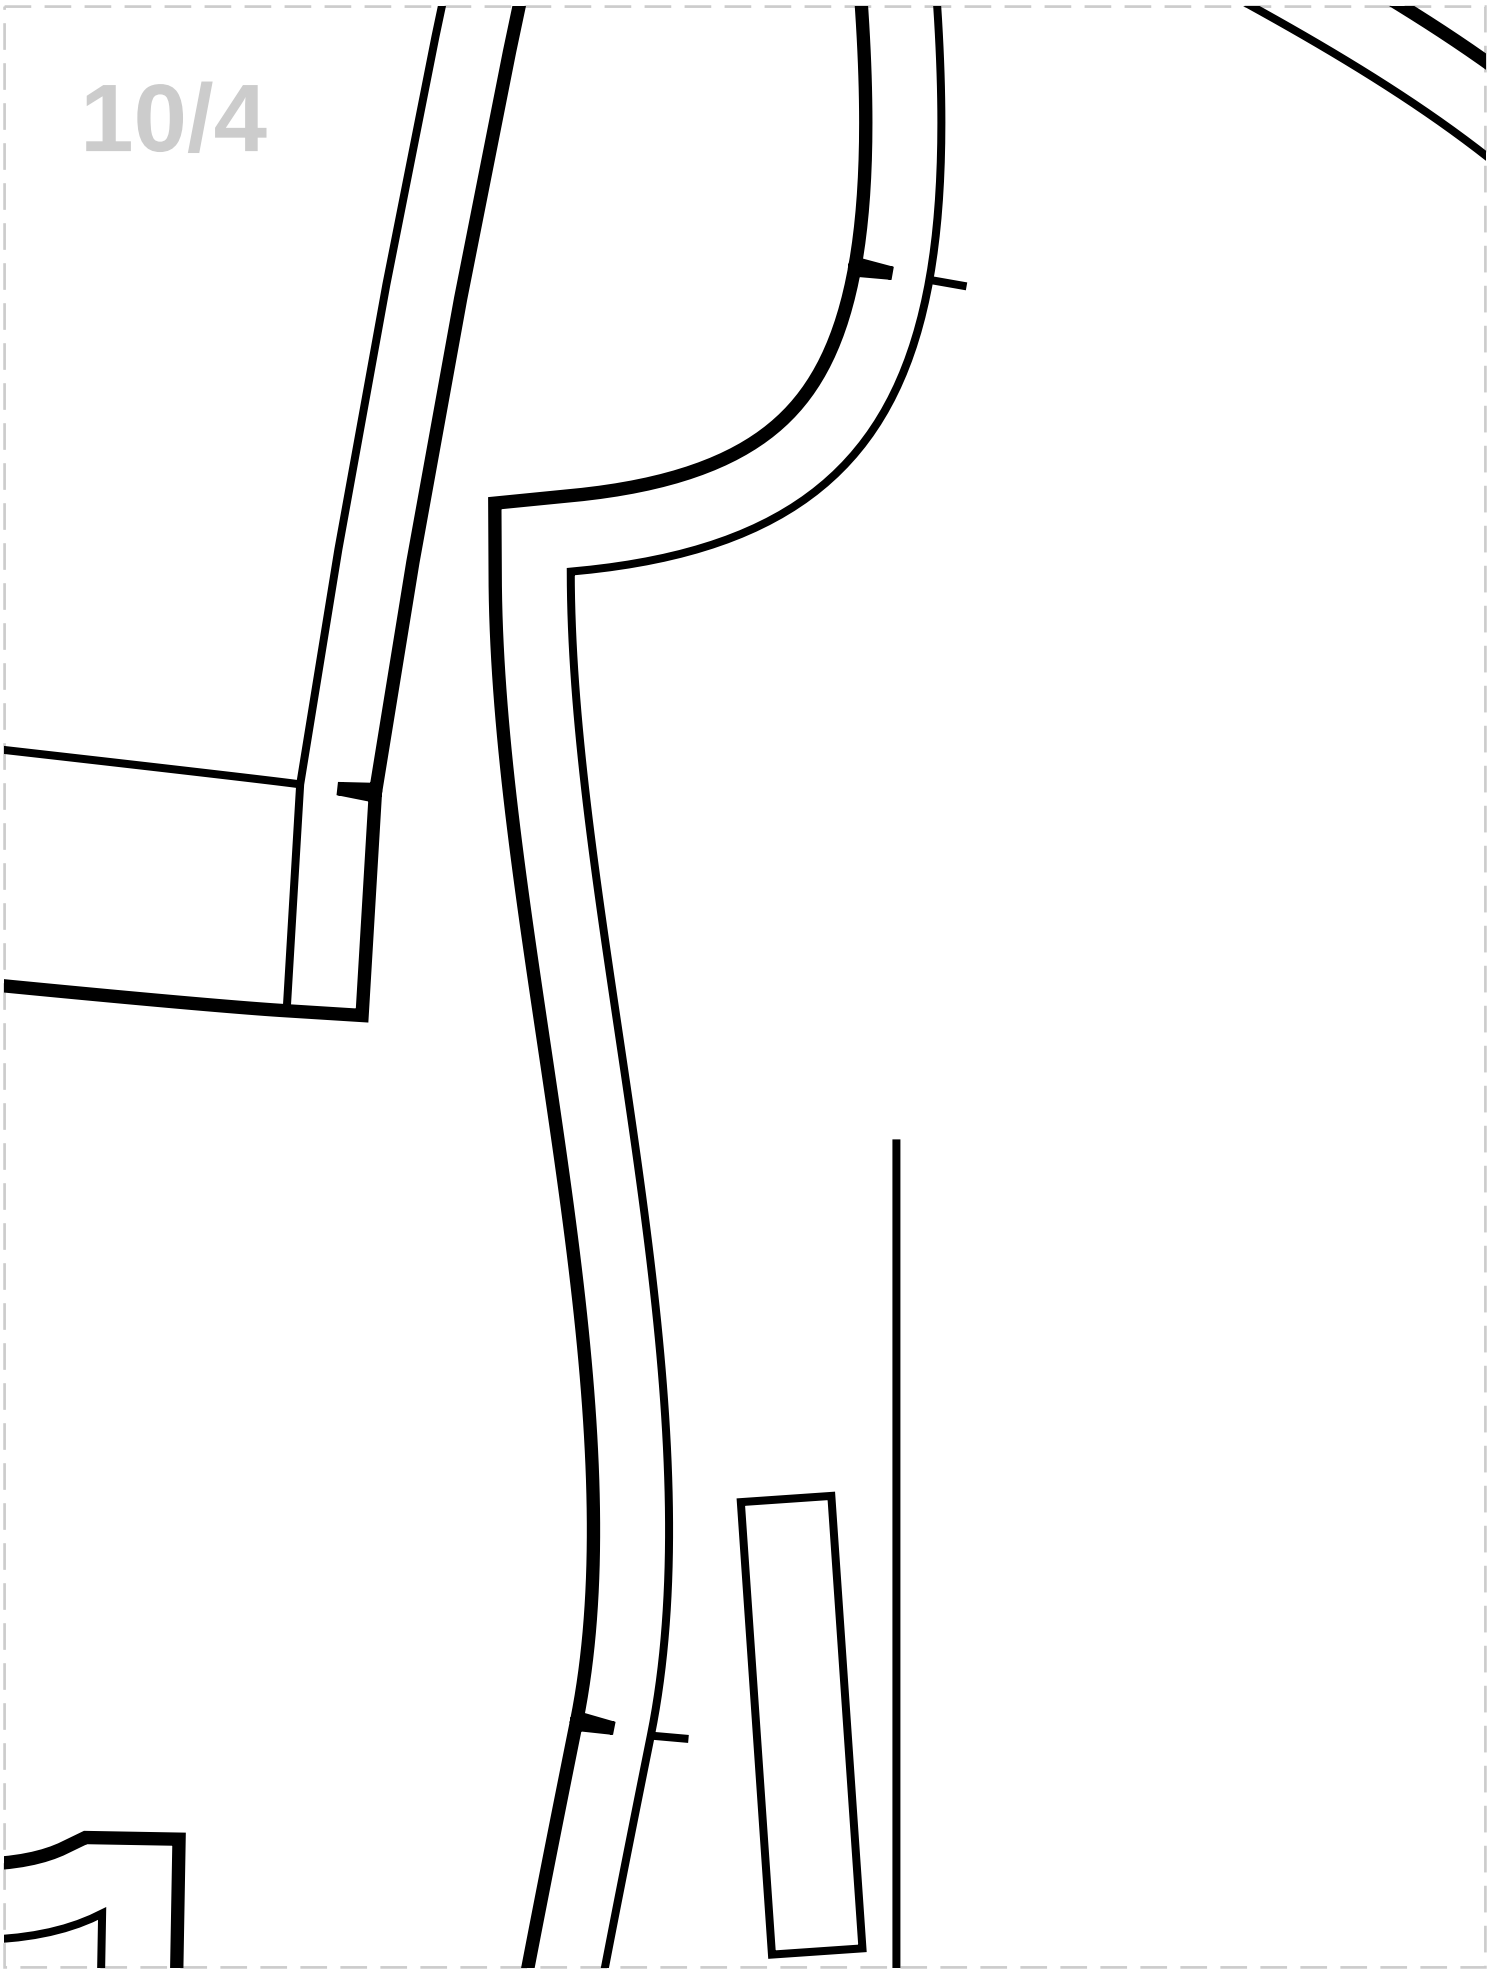

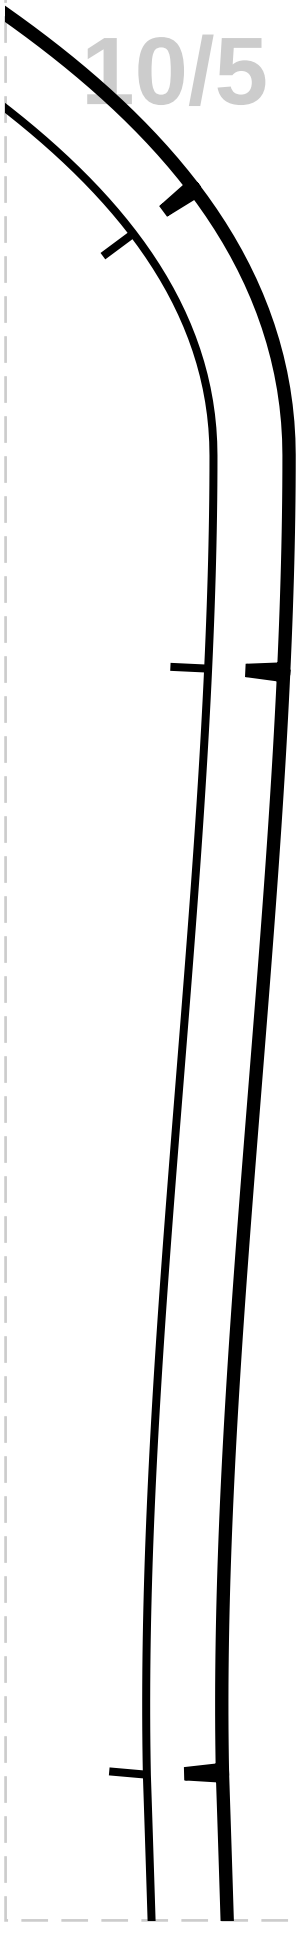

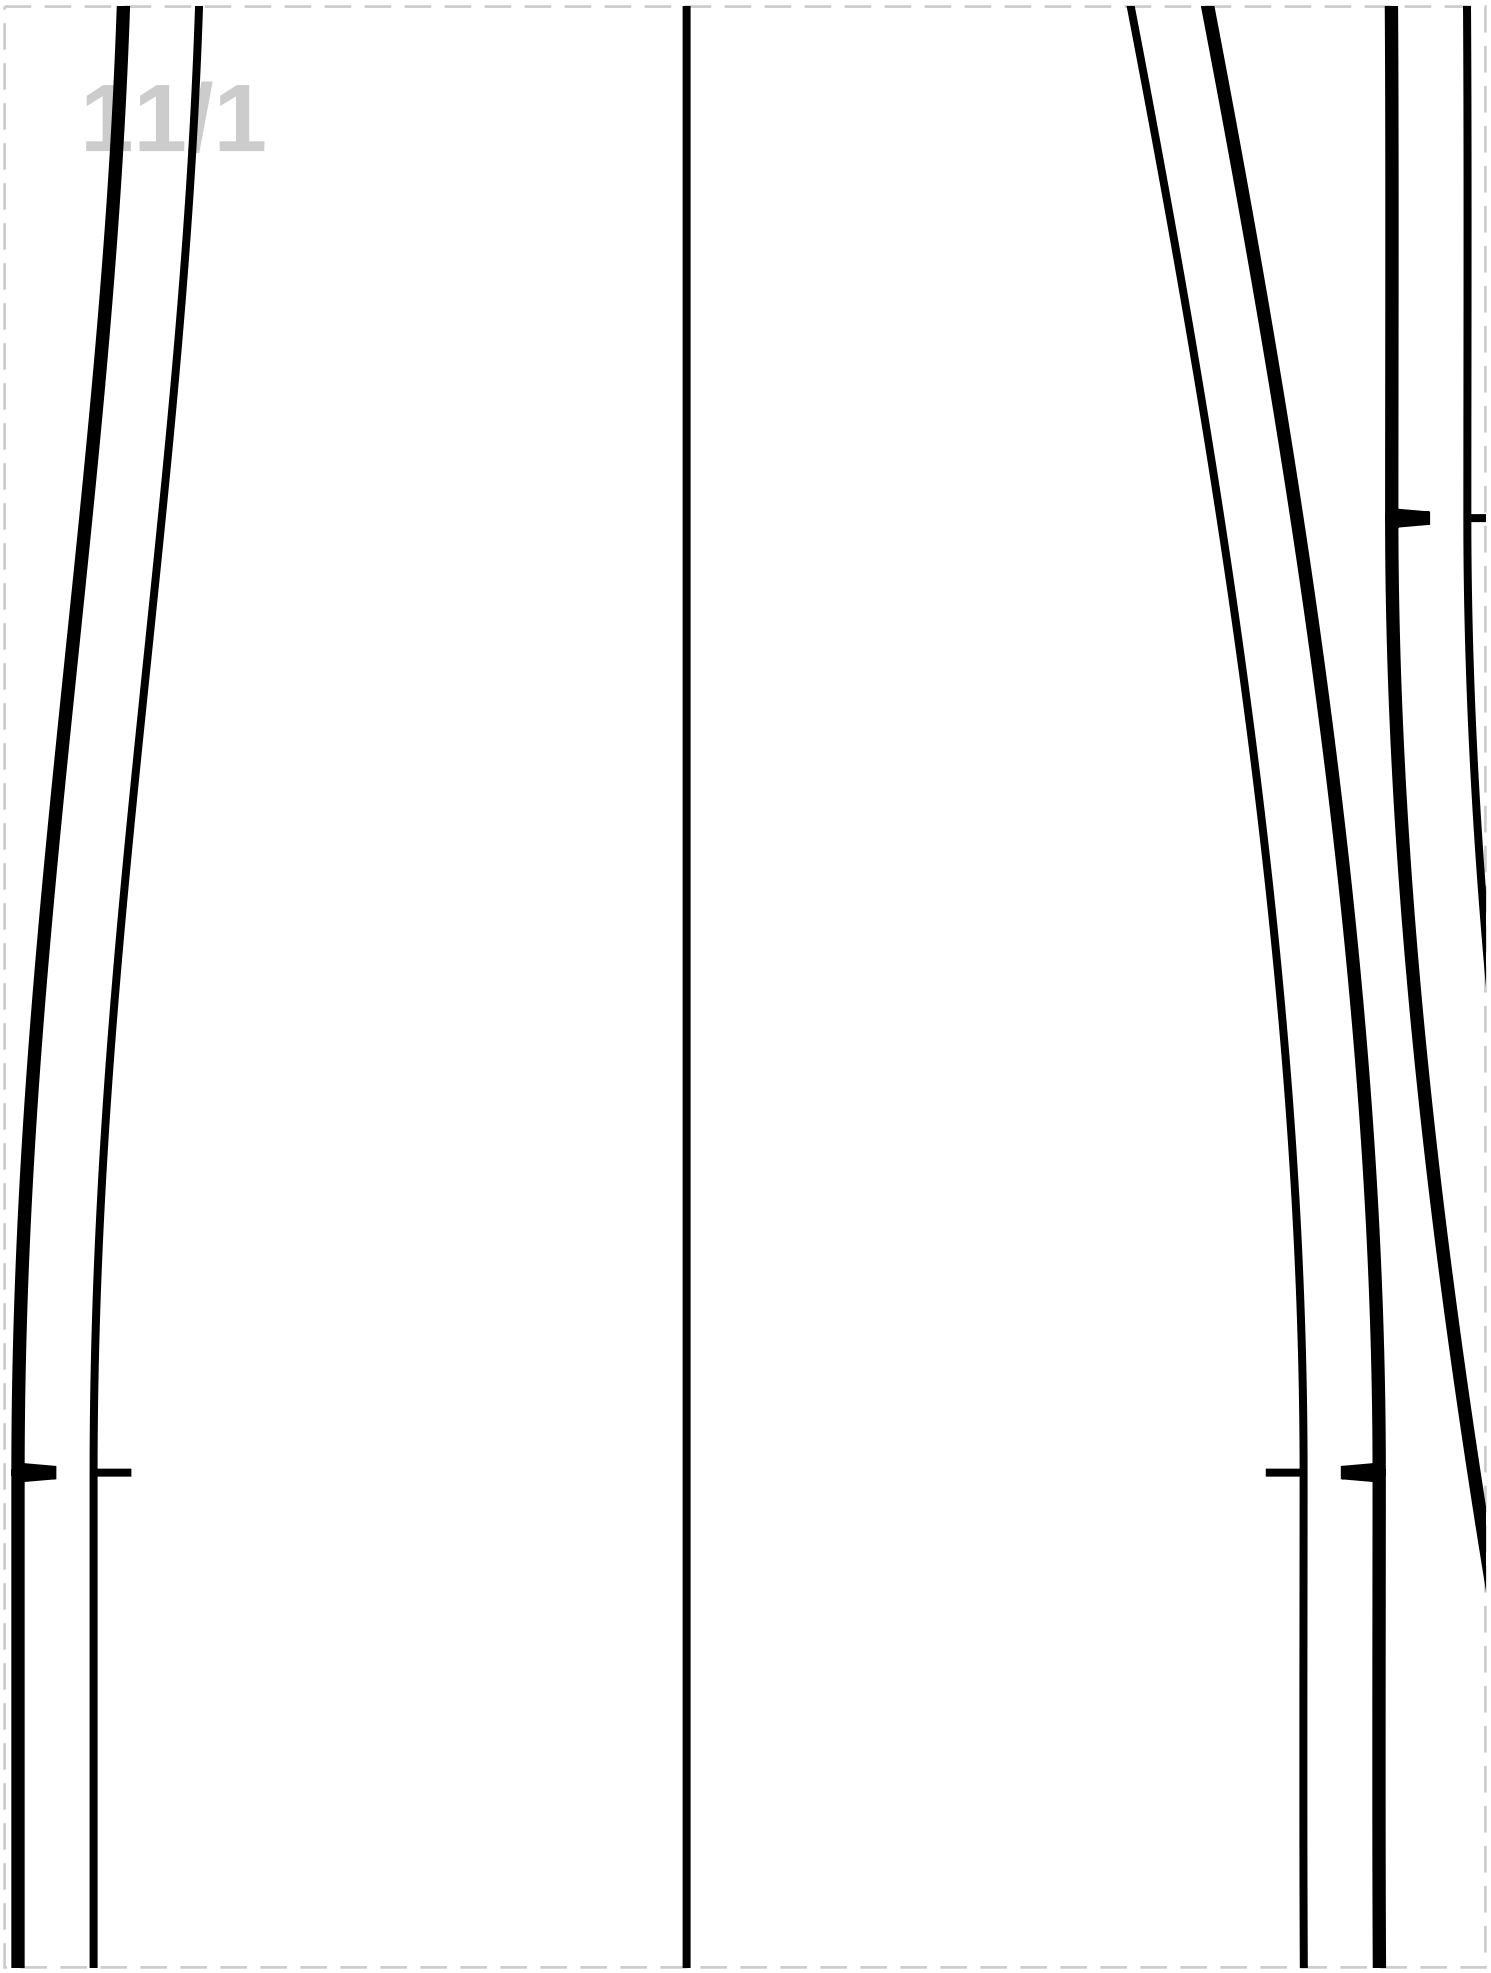


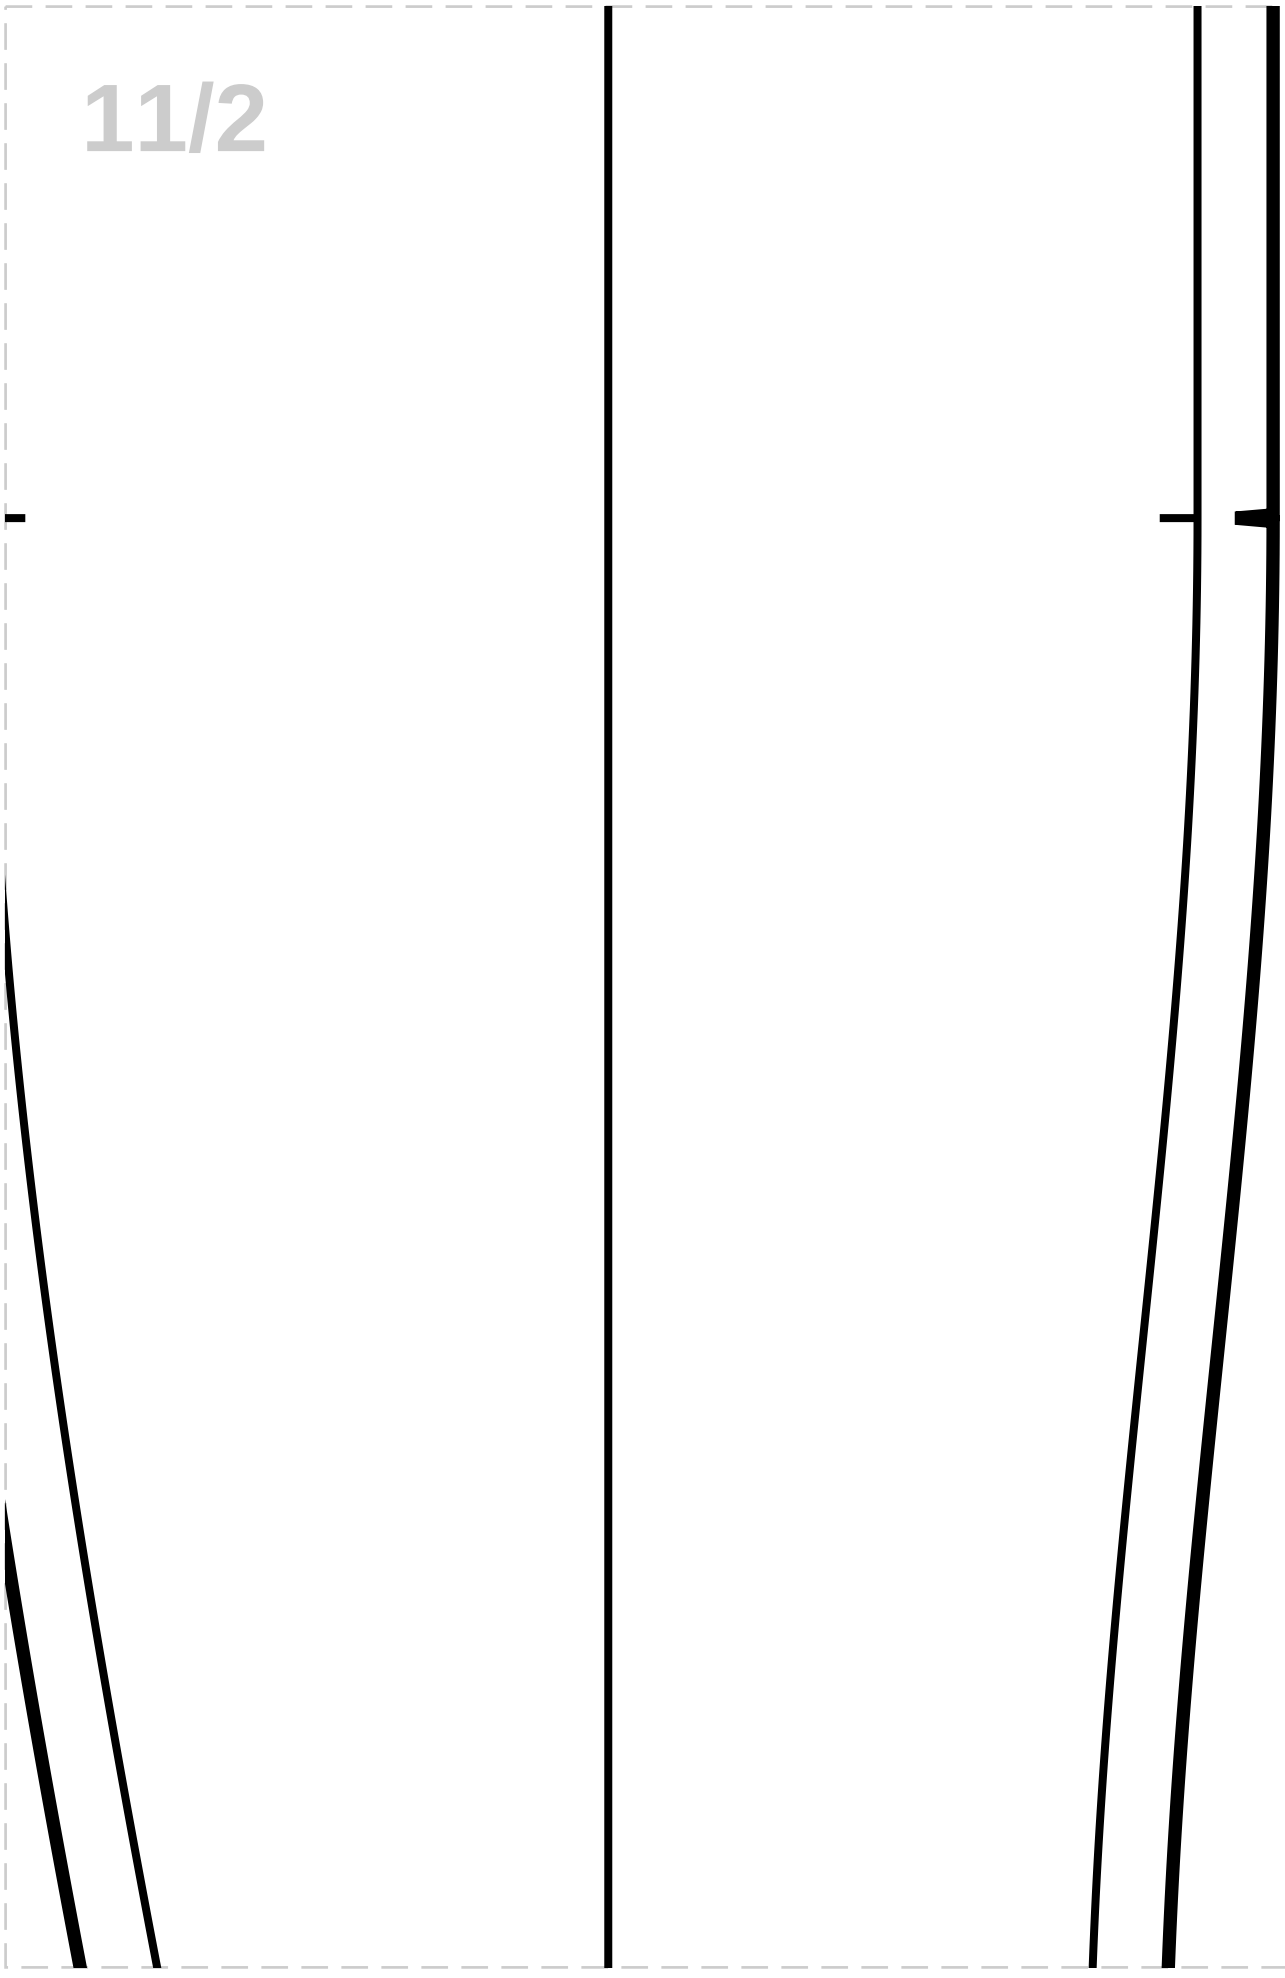


# 16


## LOWER SLEEVE


**MAIN FABRIC: Cut 2**

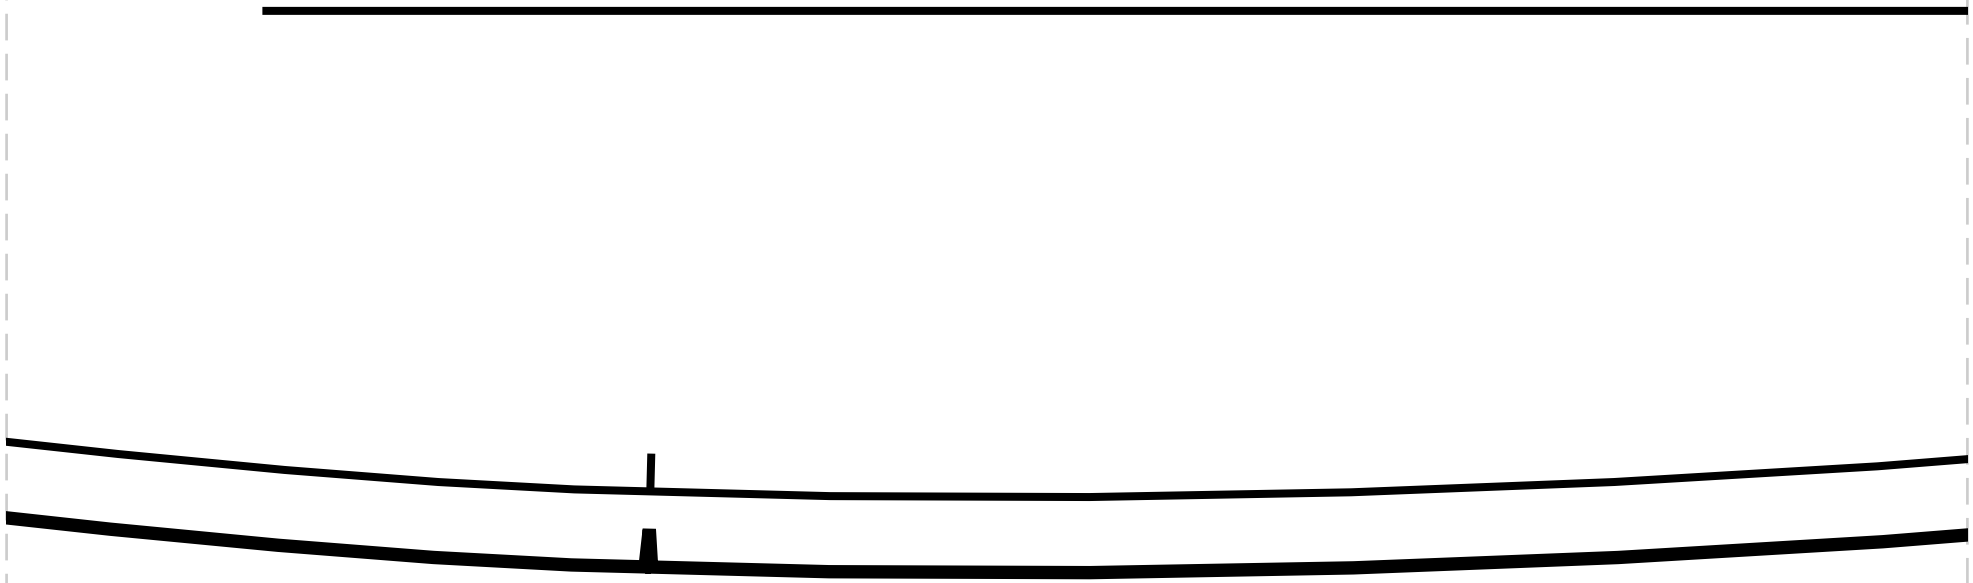



11/3

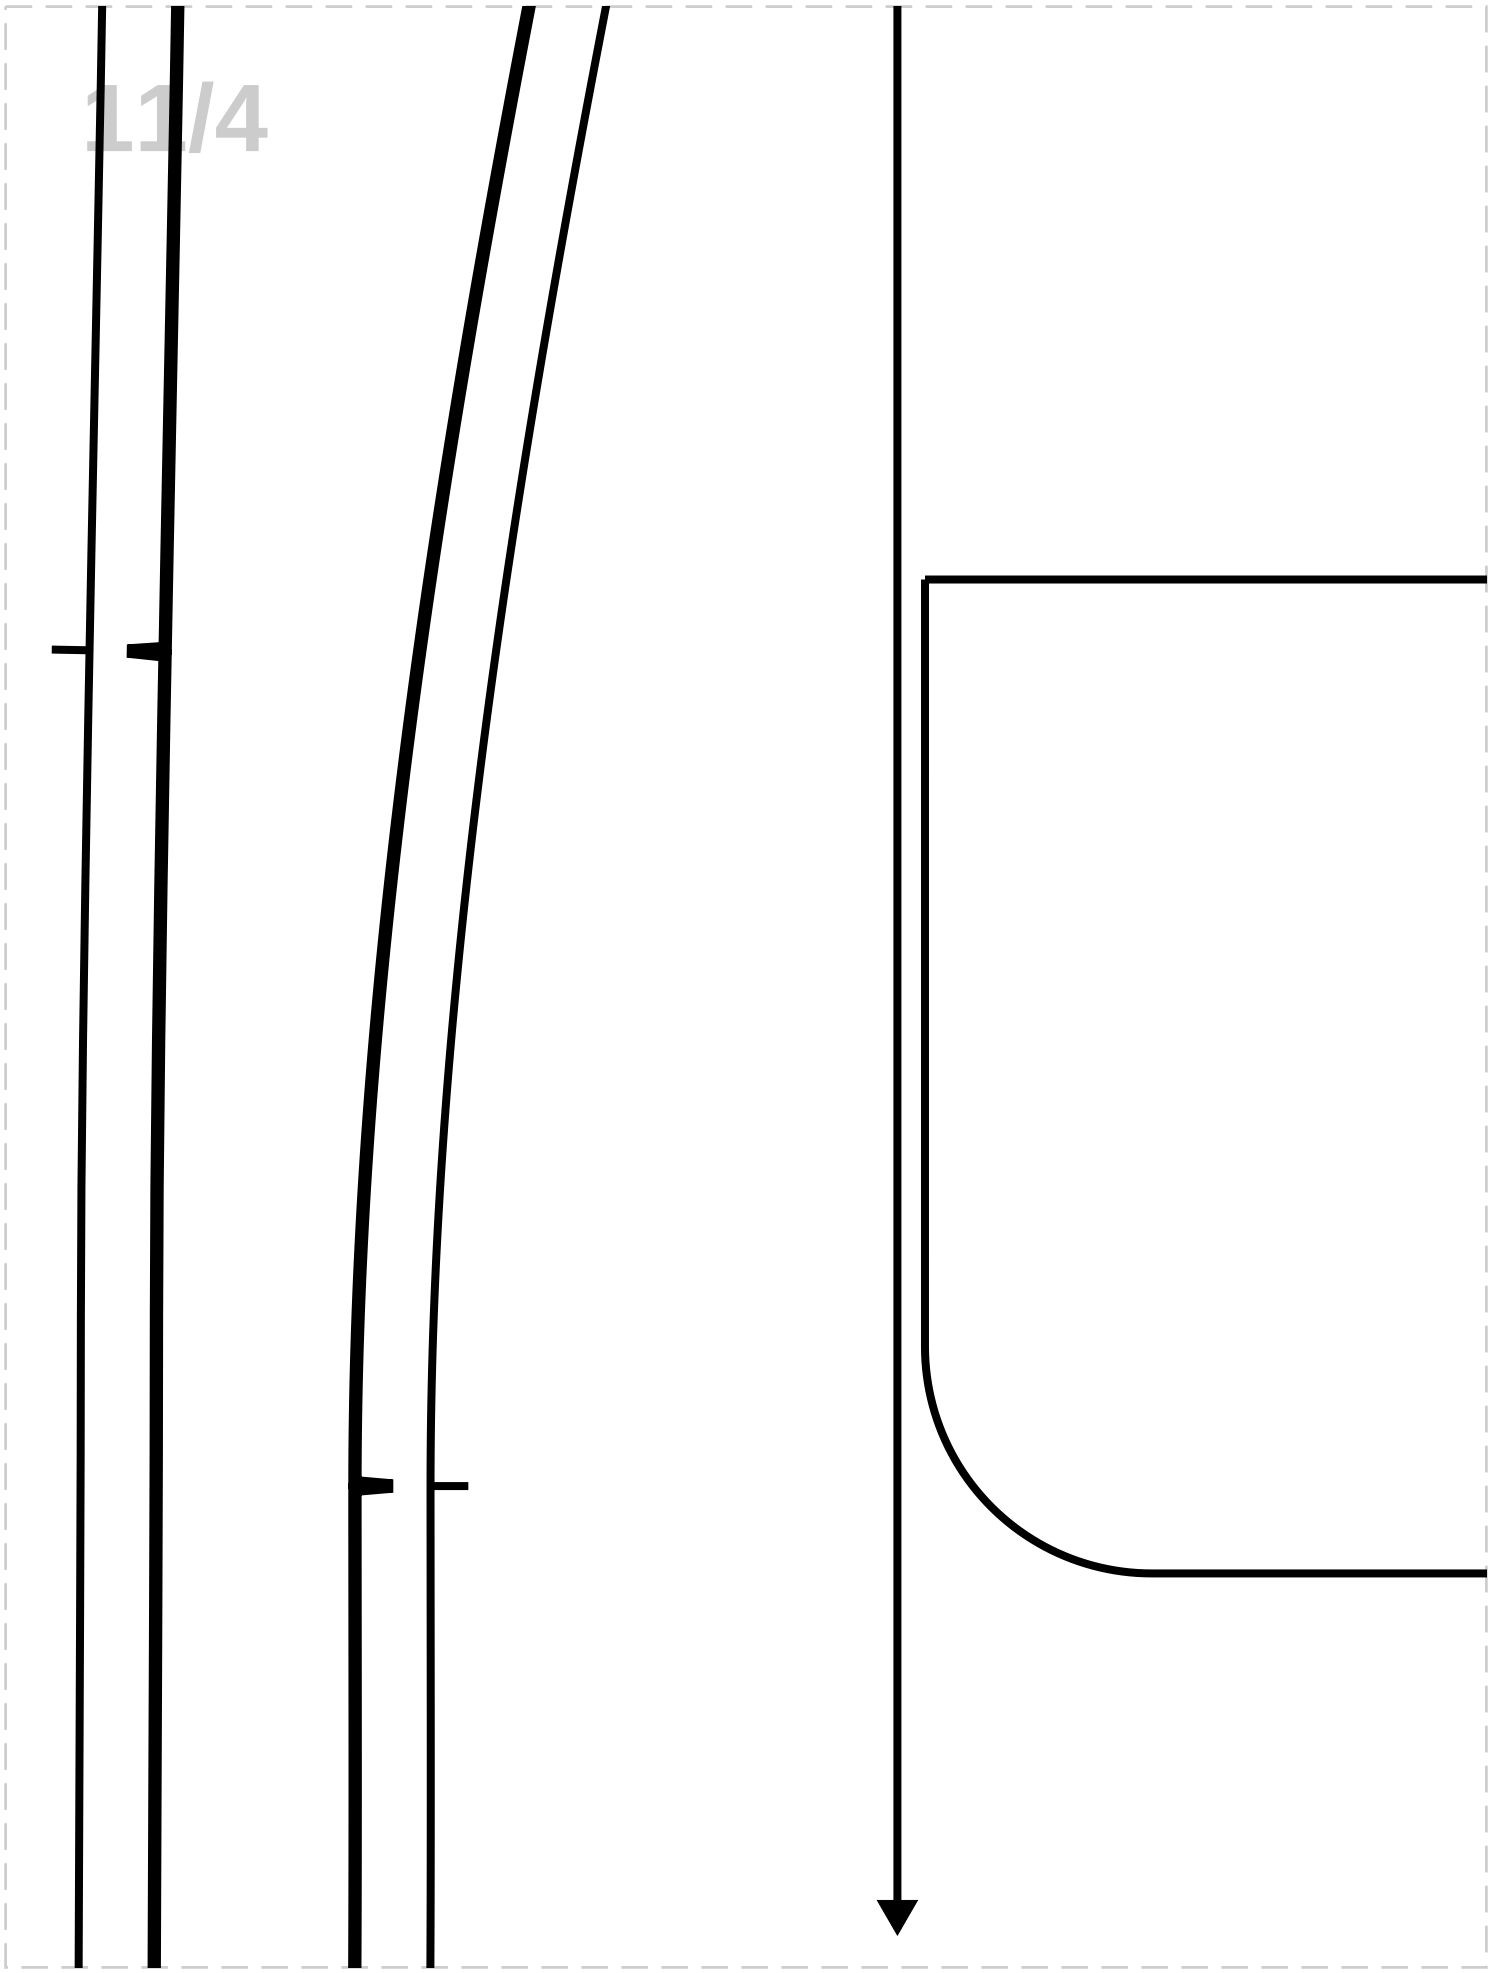

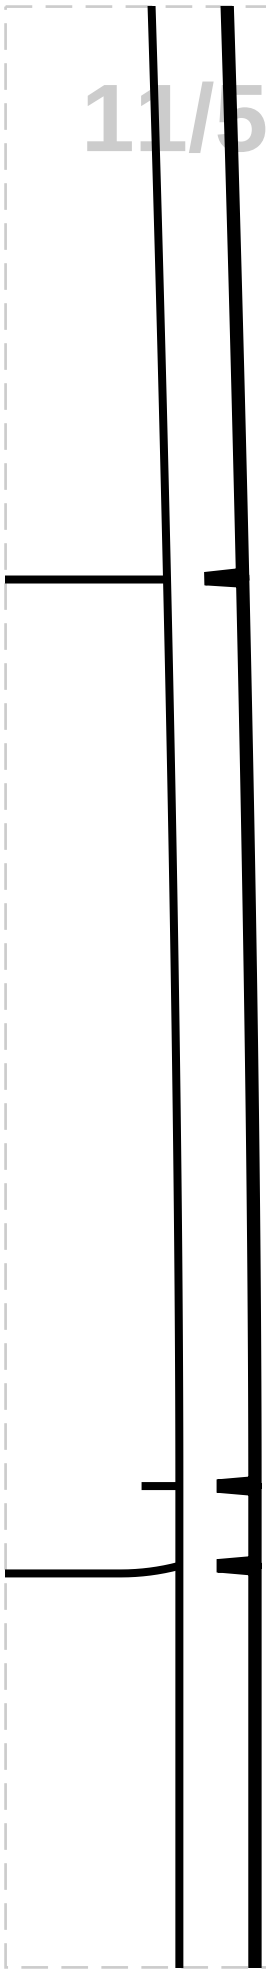

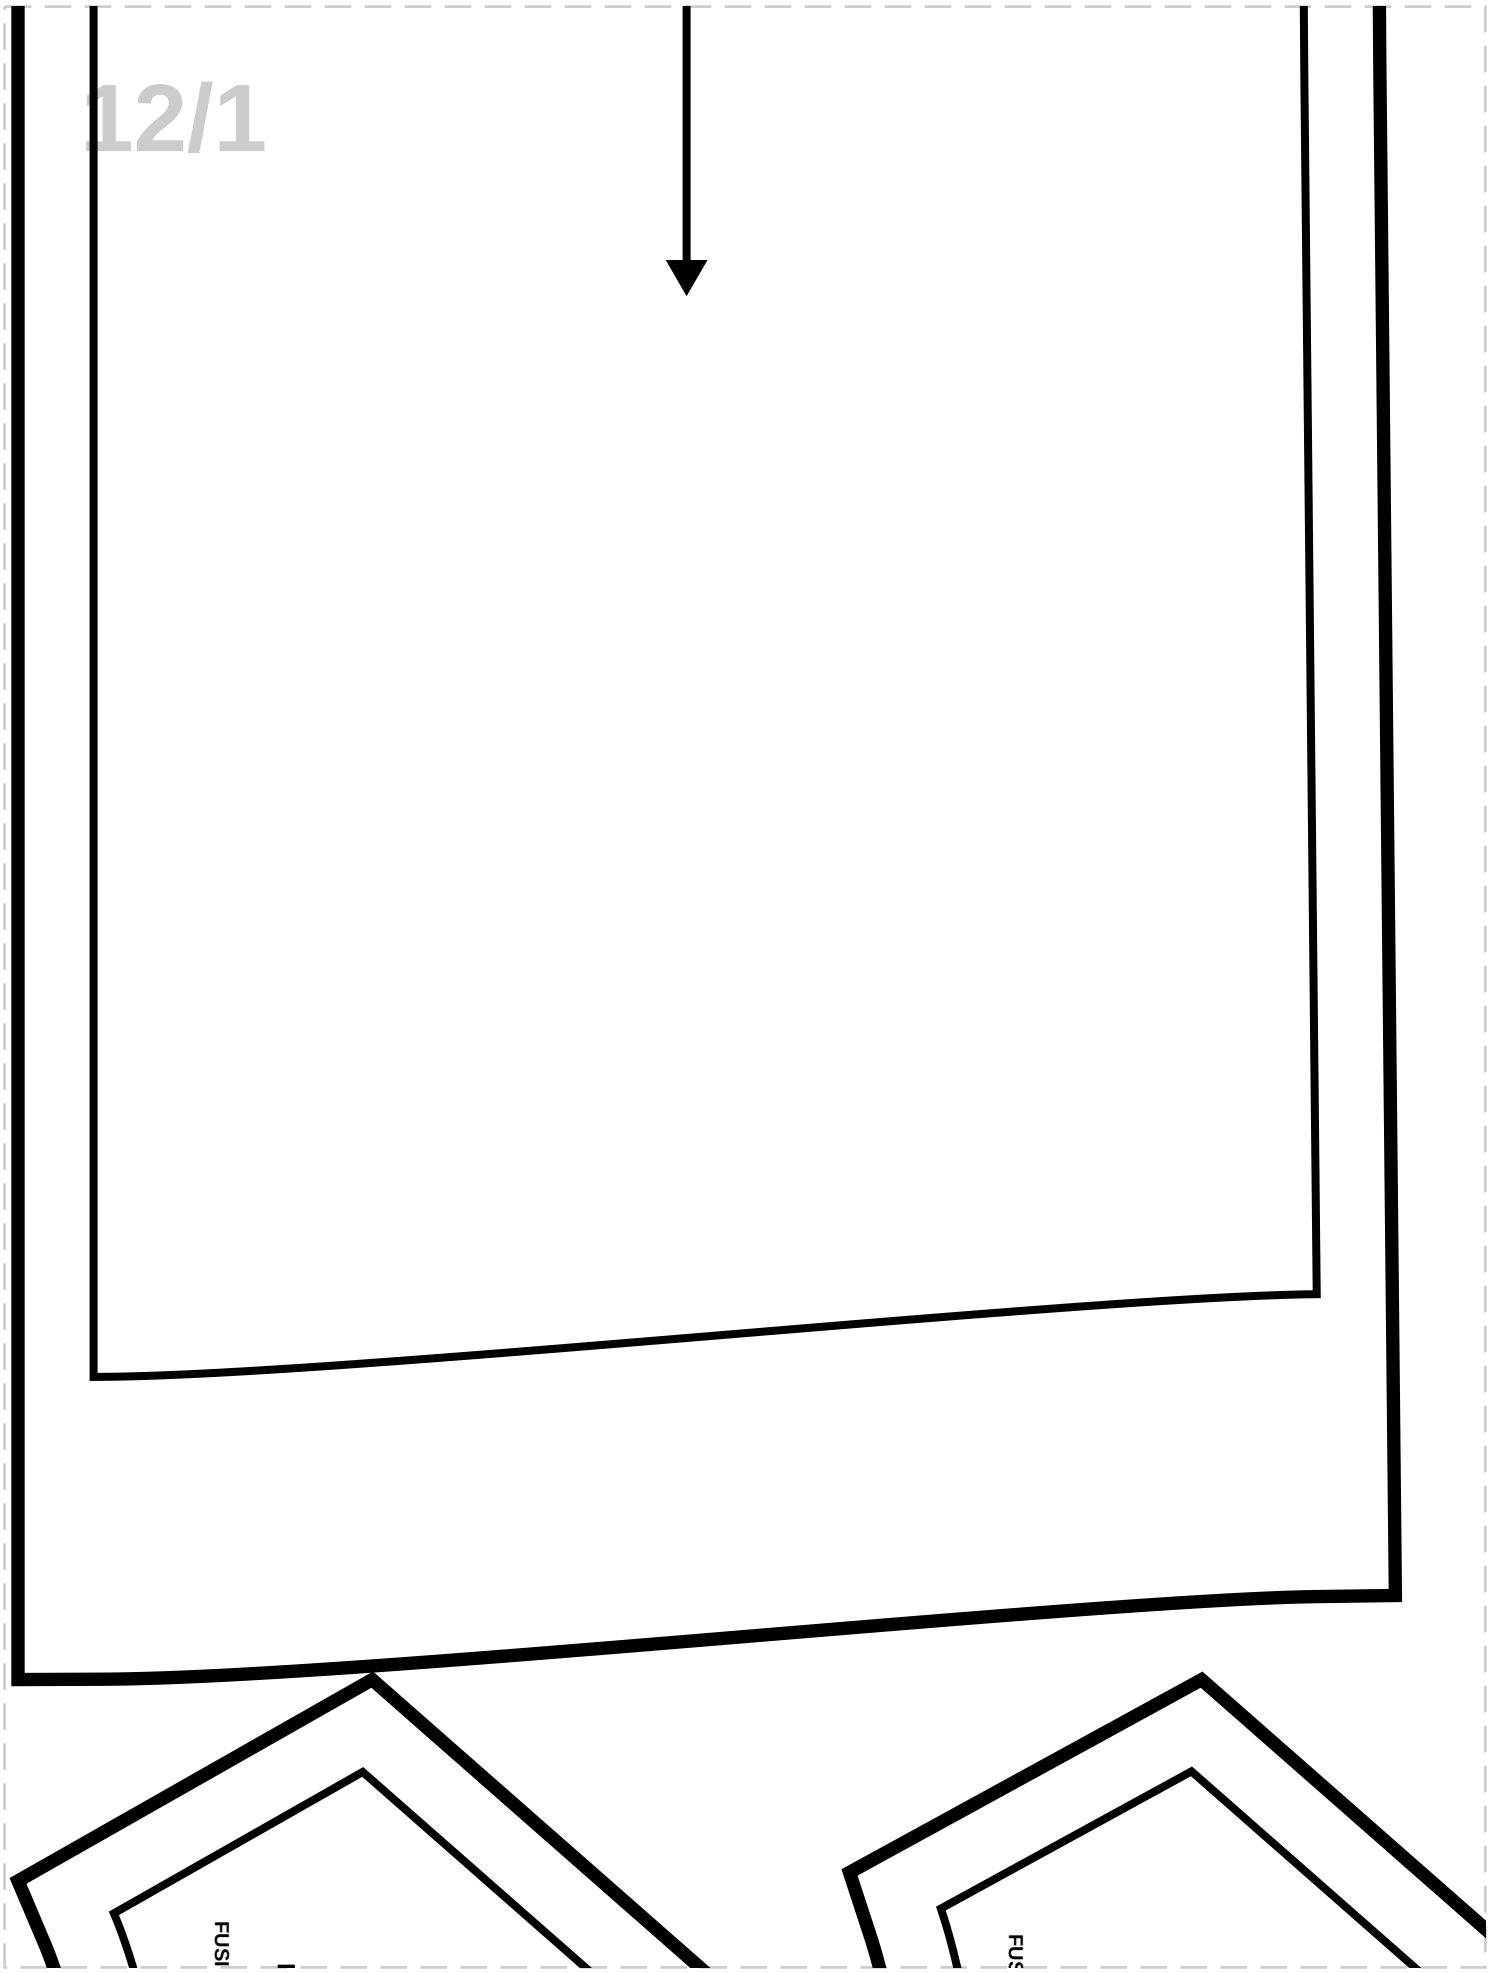

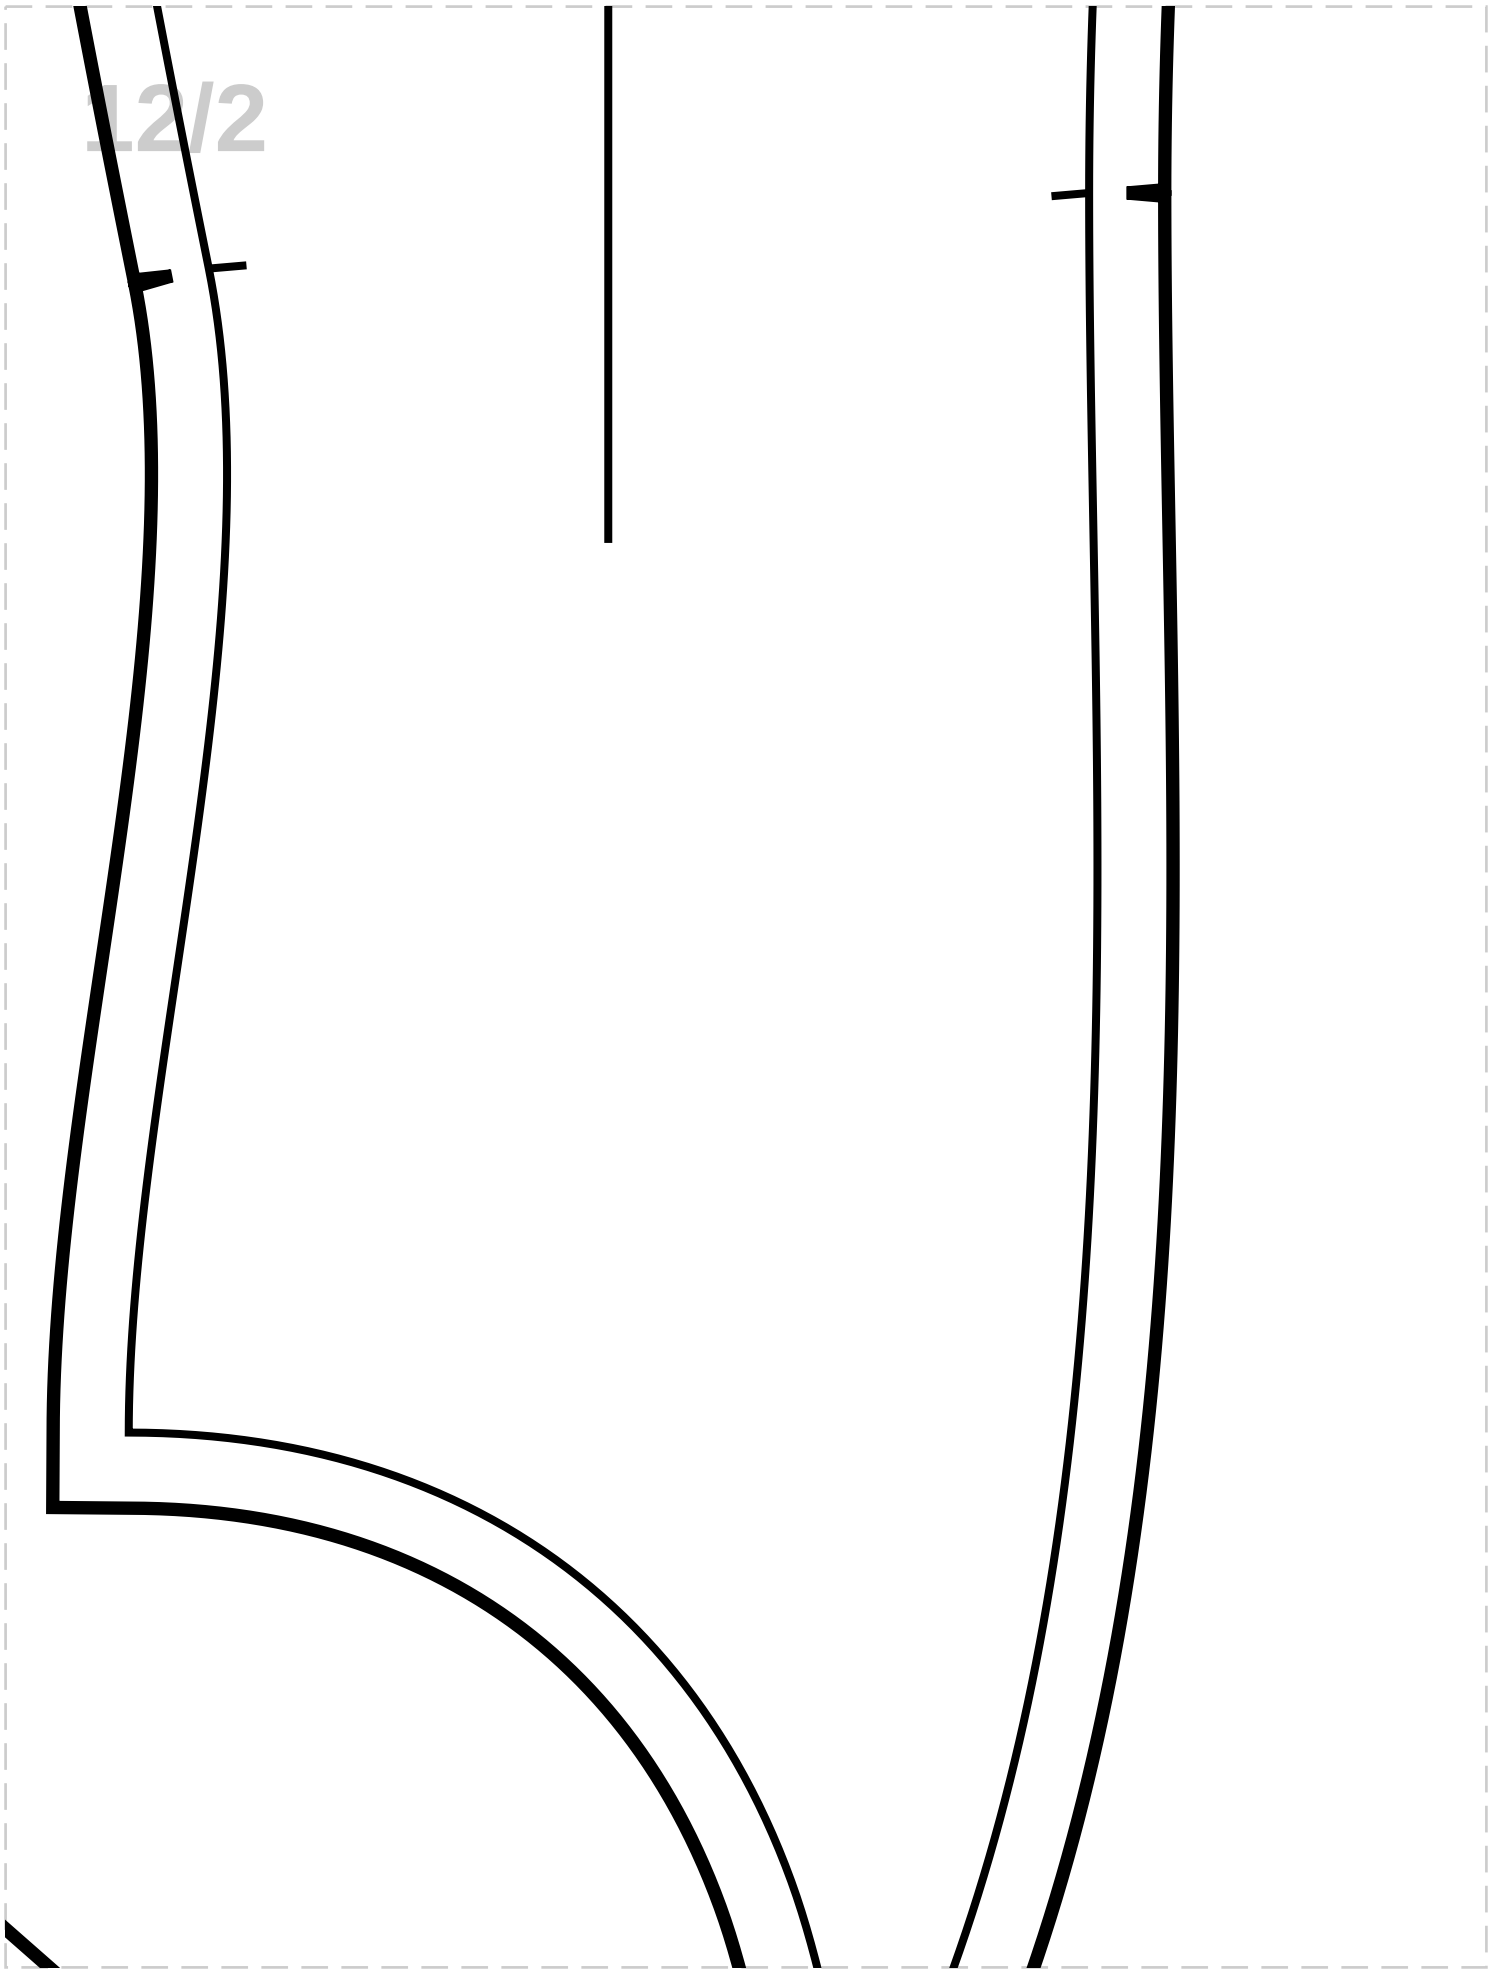

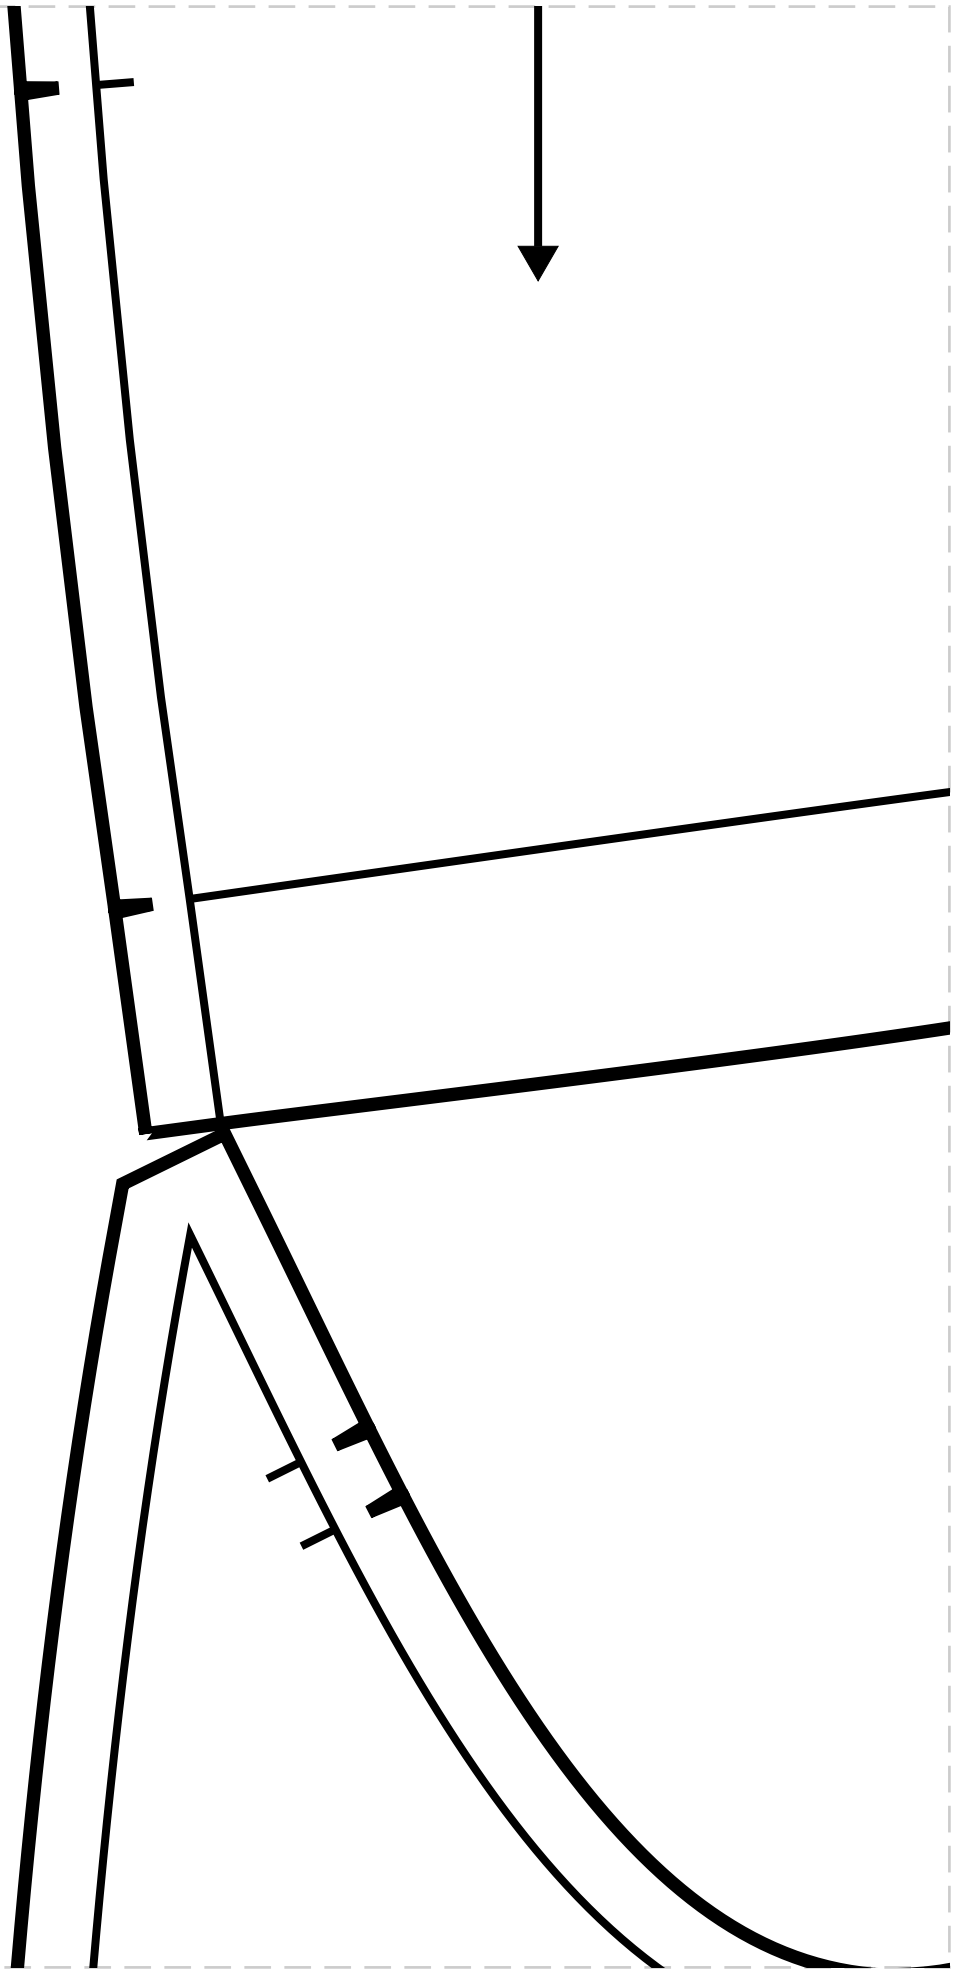



# 3


## SIDE FRONT


**MAIN FABRIC: Cut 2**

**FUSIBLE INTERFACING: Cut 2**

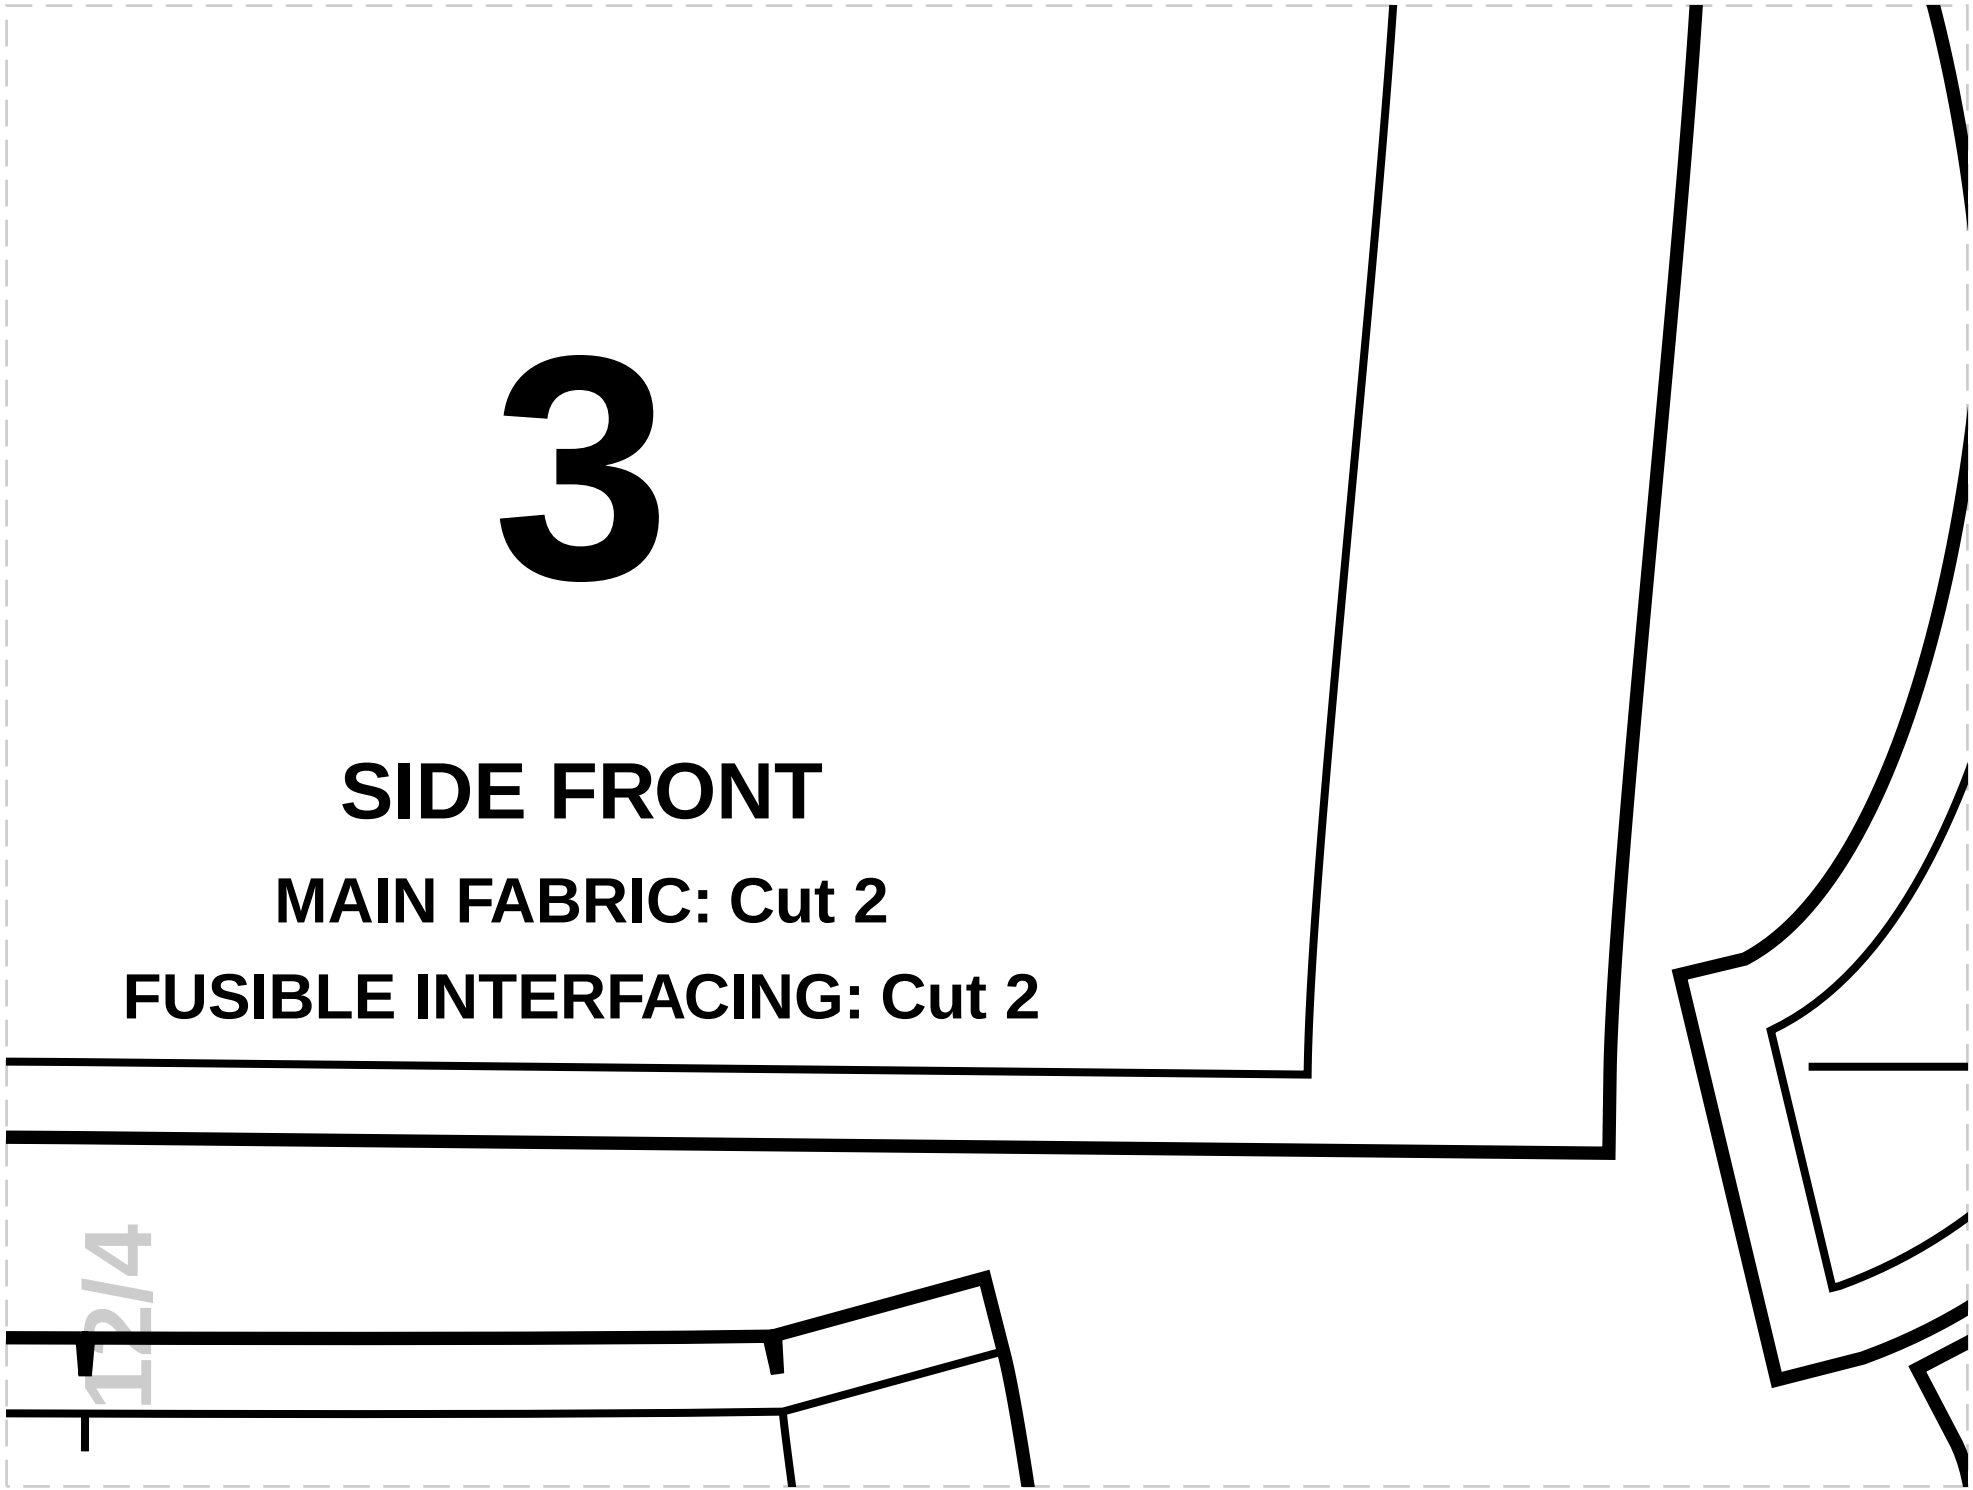

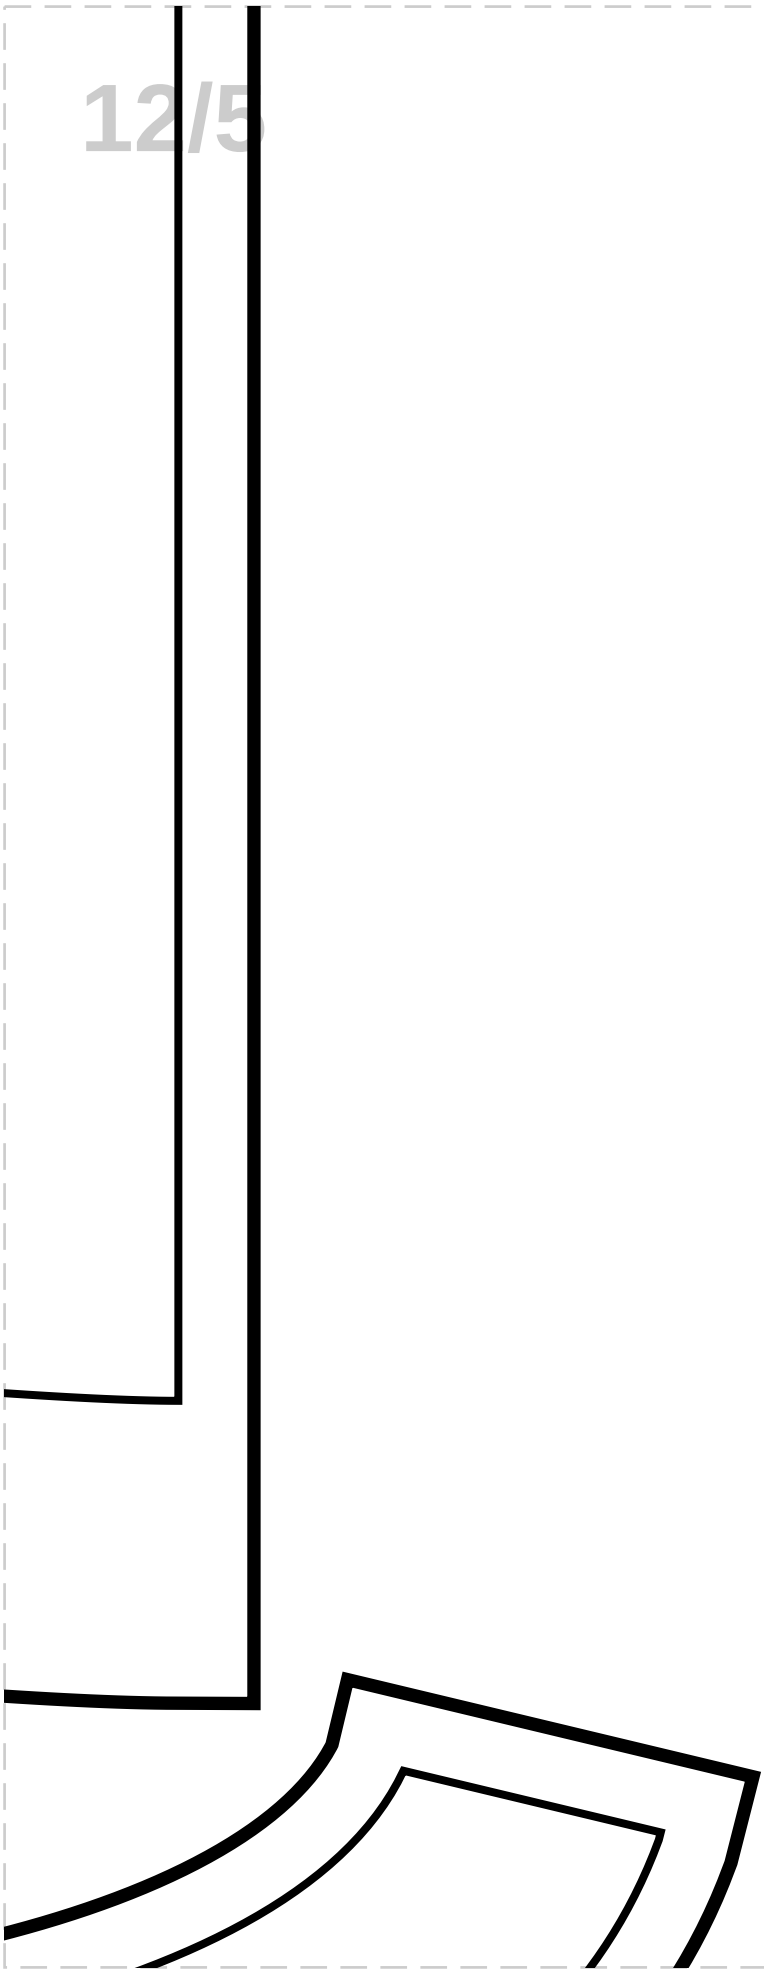

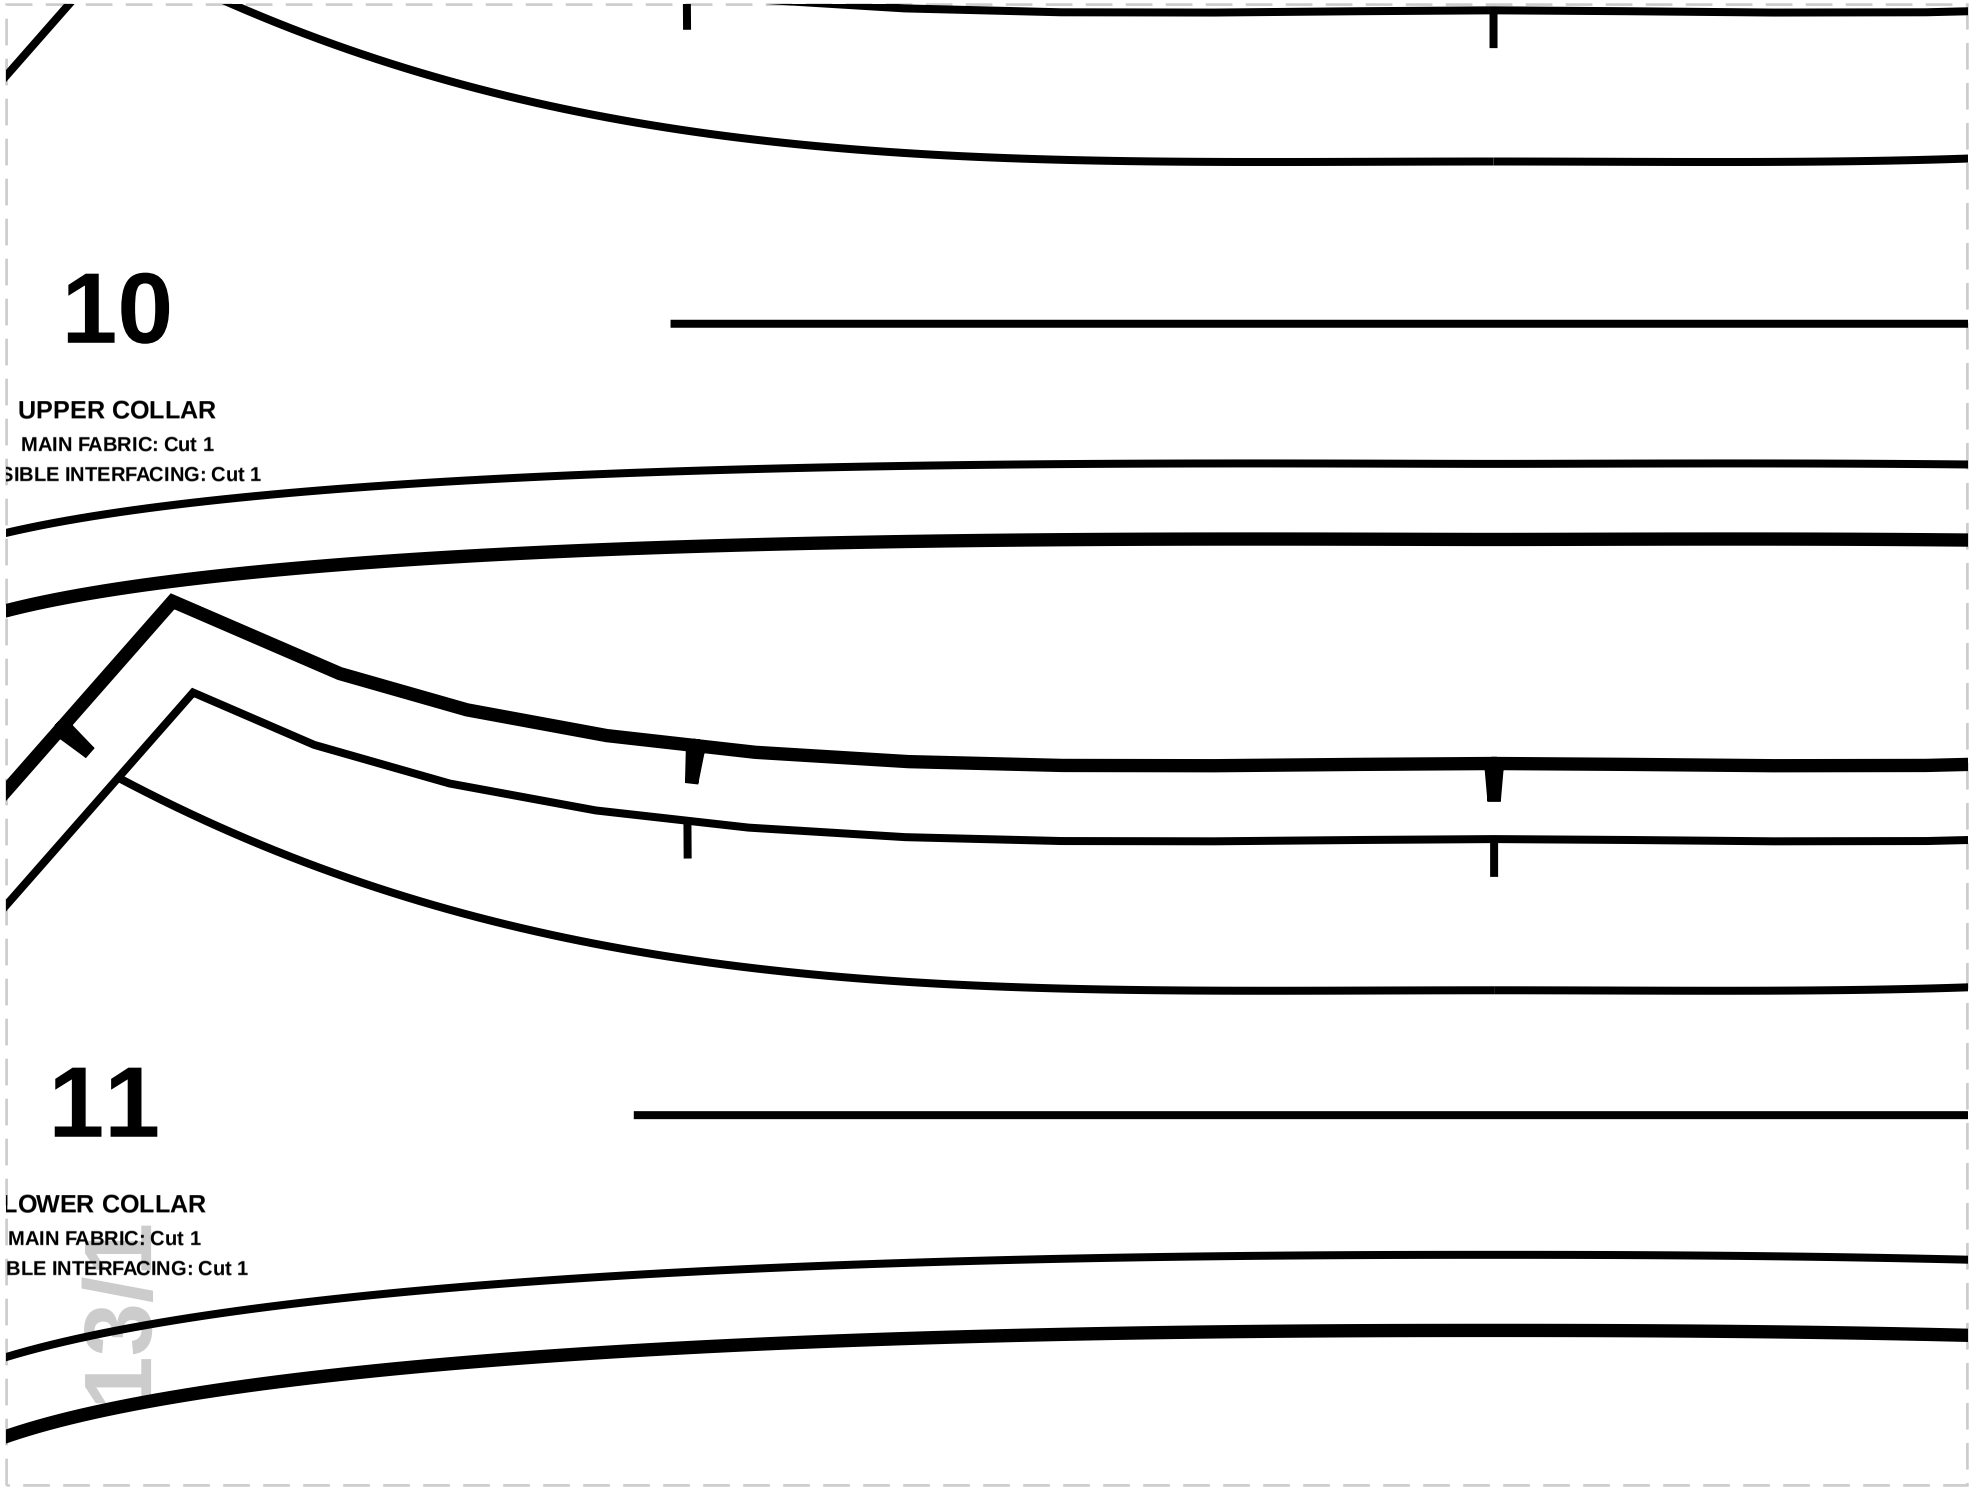

10
UPPER COLLAR
MAIN FABRIC: Cut 1
SIBLE INTERFACING: Cut 1
11
LOWER COLLAR
MAIN FABRIC: Cut 1
BLE INTERFACING: Cut 1
13/1

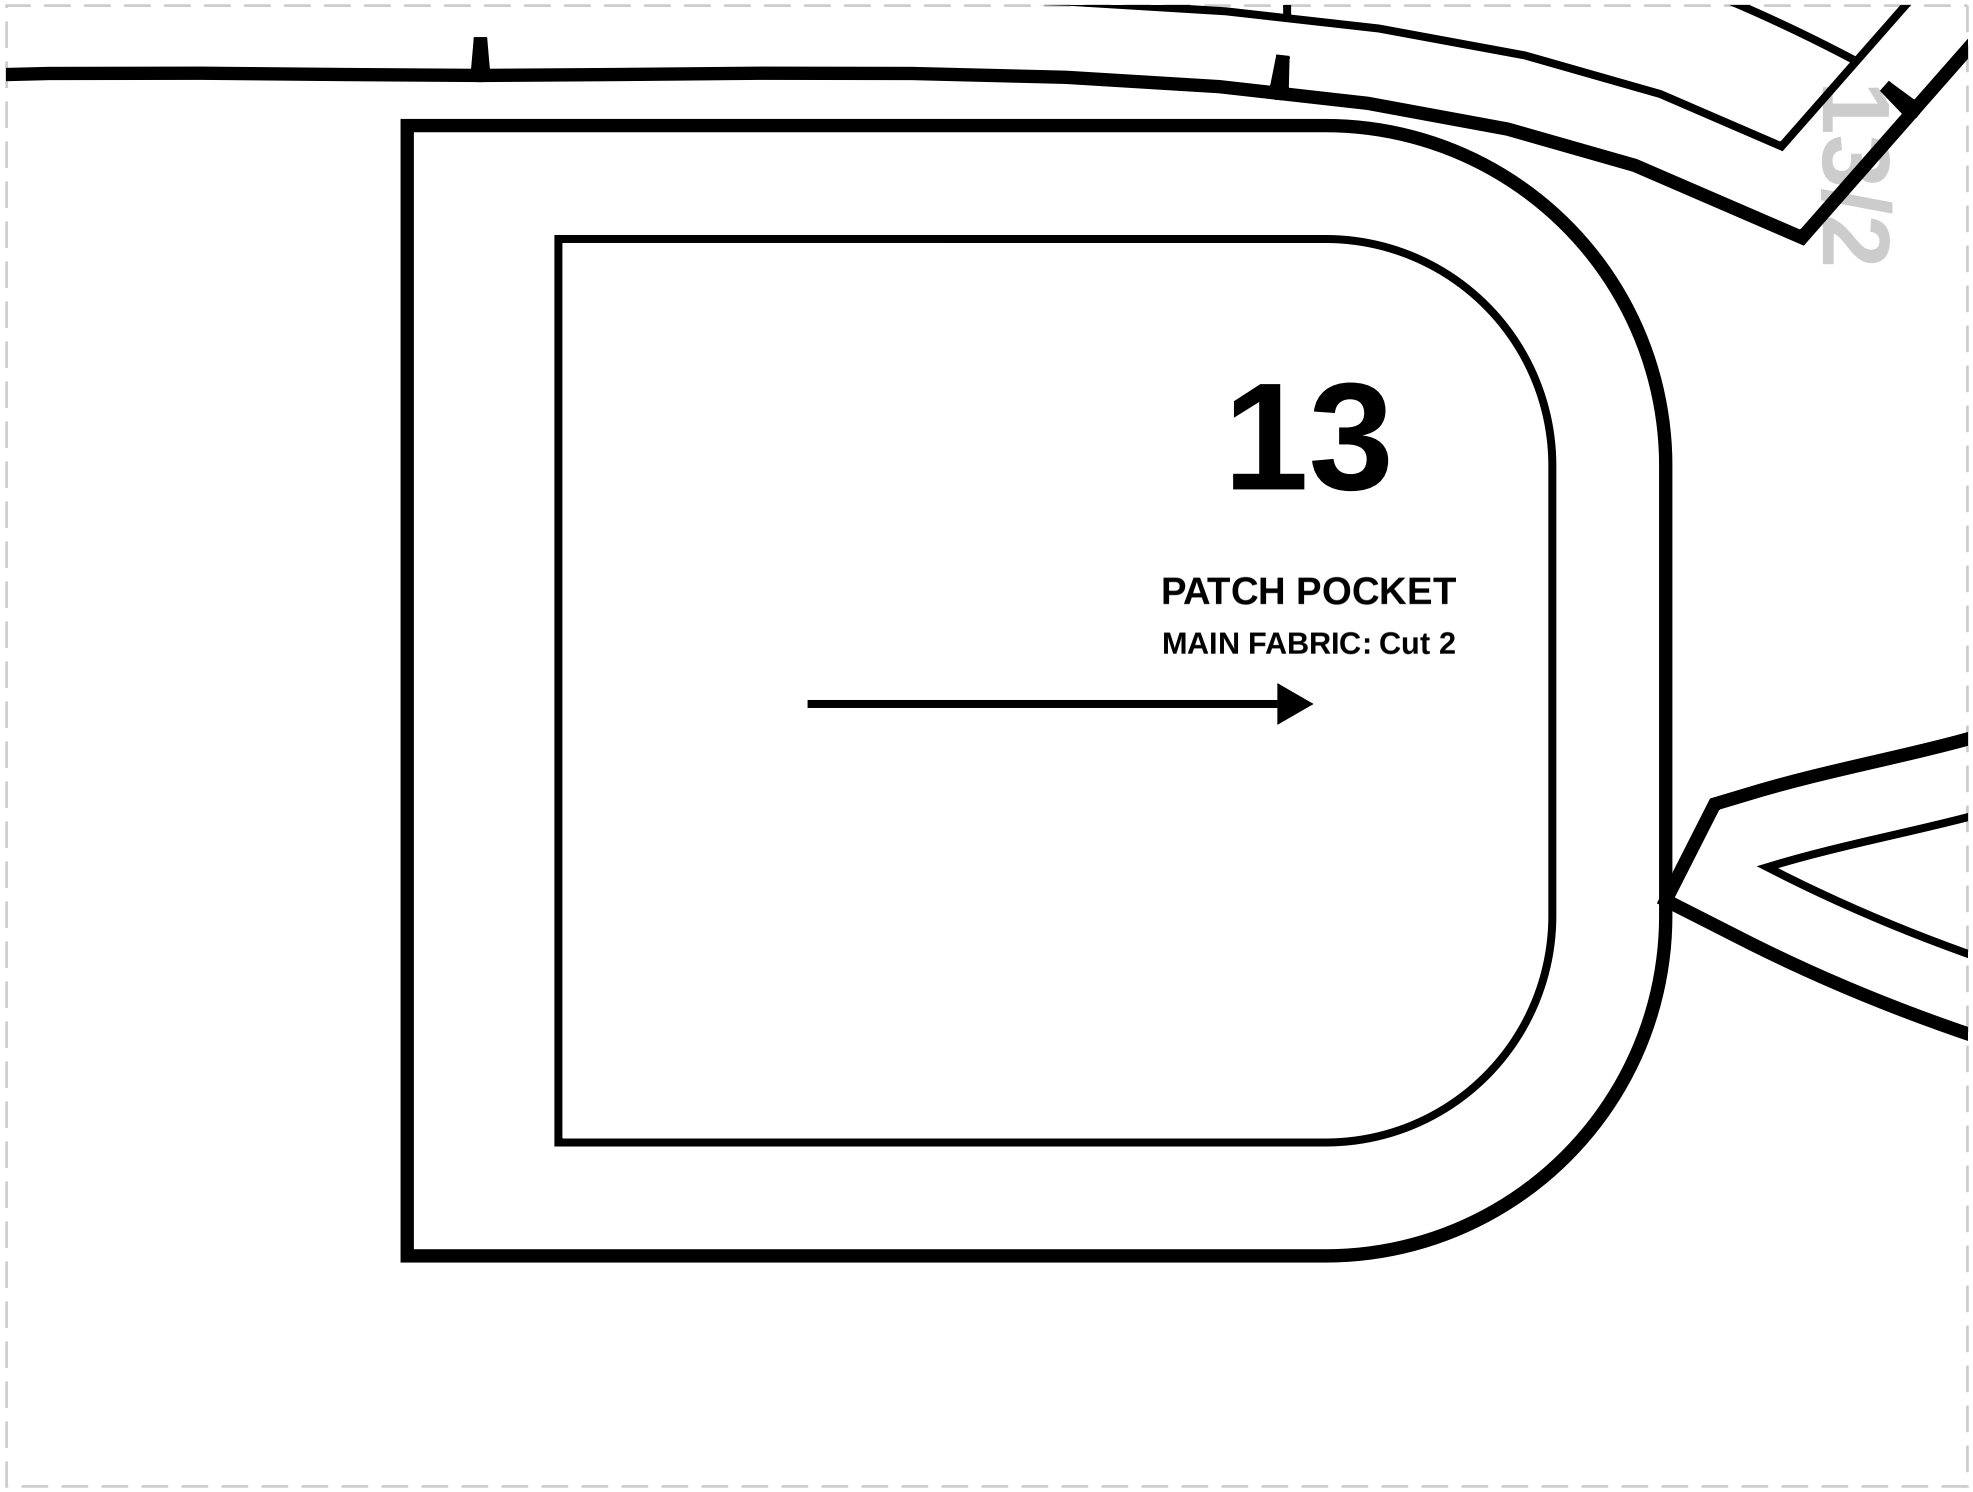

13/2
13
PATCH POCKET
MAIN FABRIC: Cut 2

# 18


## LOWER SLEEVE LINING


**LINING: Cut 2**

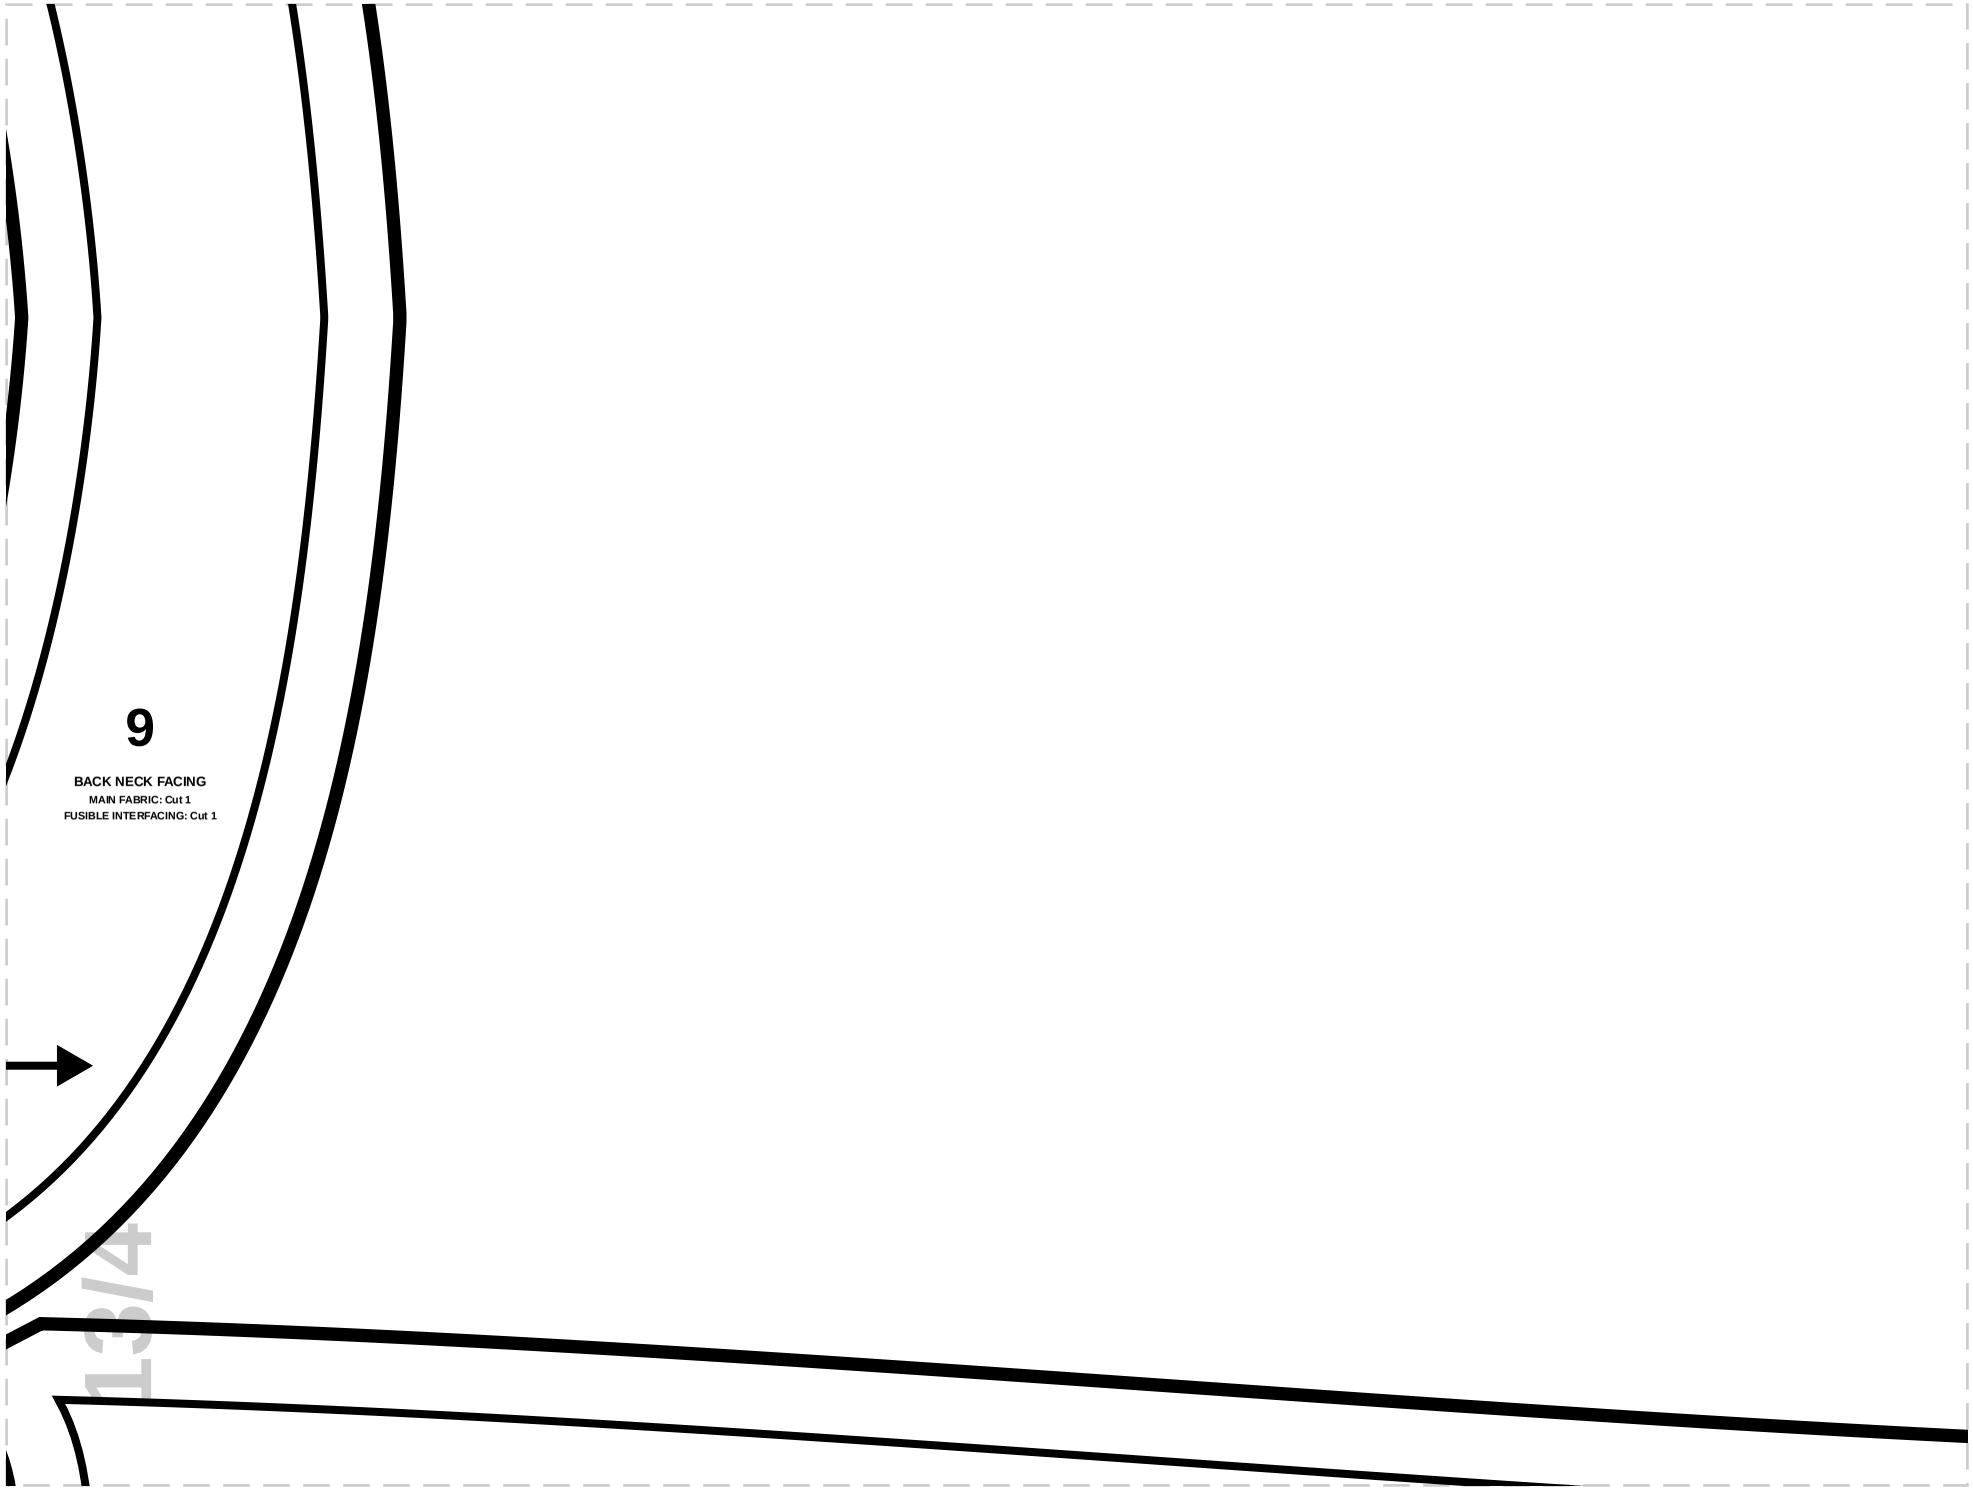
9
BACK NECK FACING
MAIN FABRIC: Cut 1
FUSIBLE INTERFACING: Cut 1
1 3/4

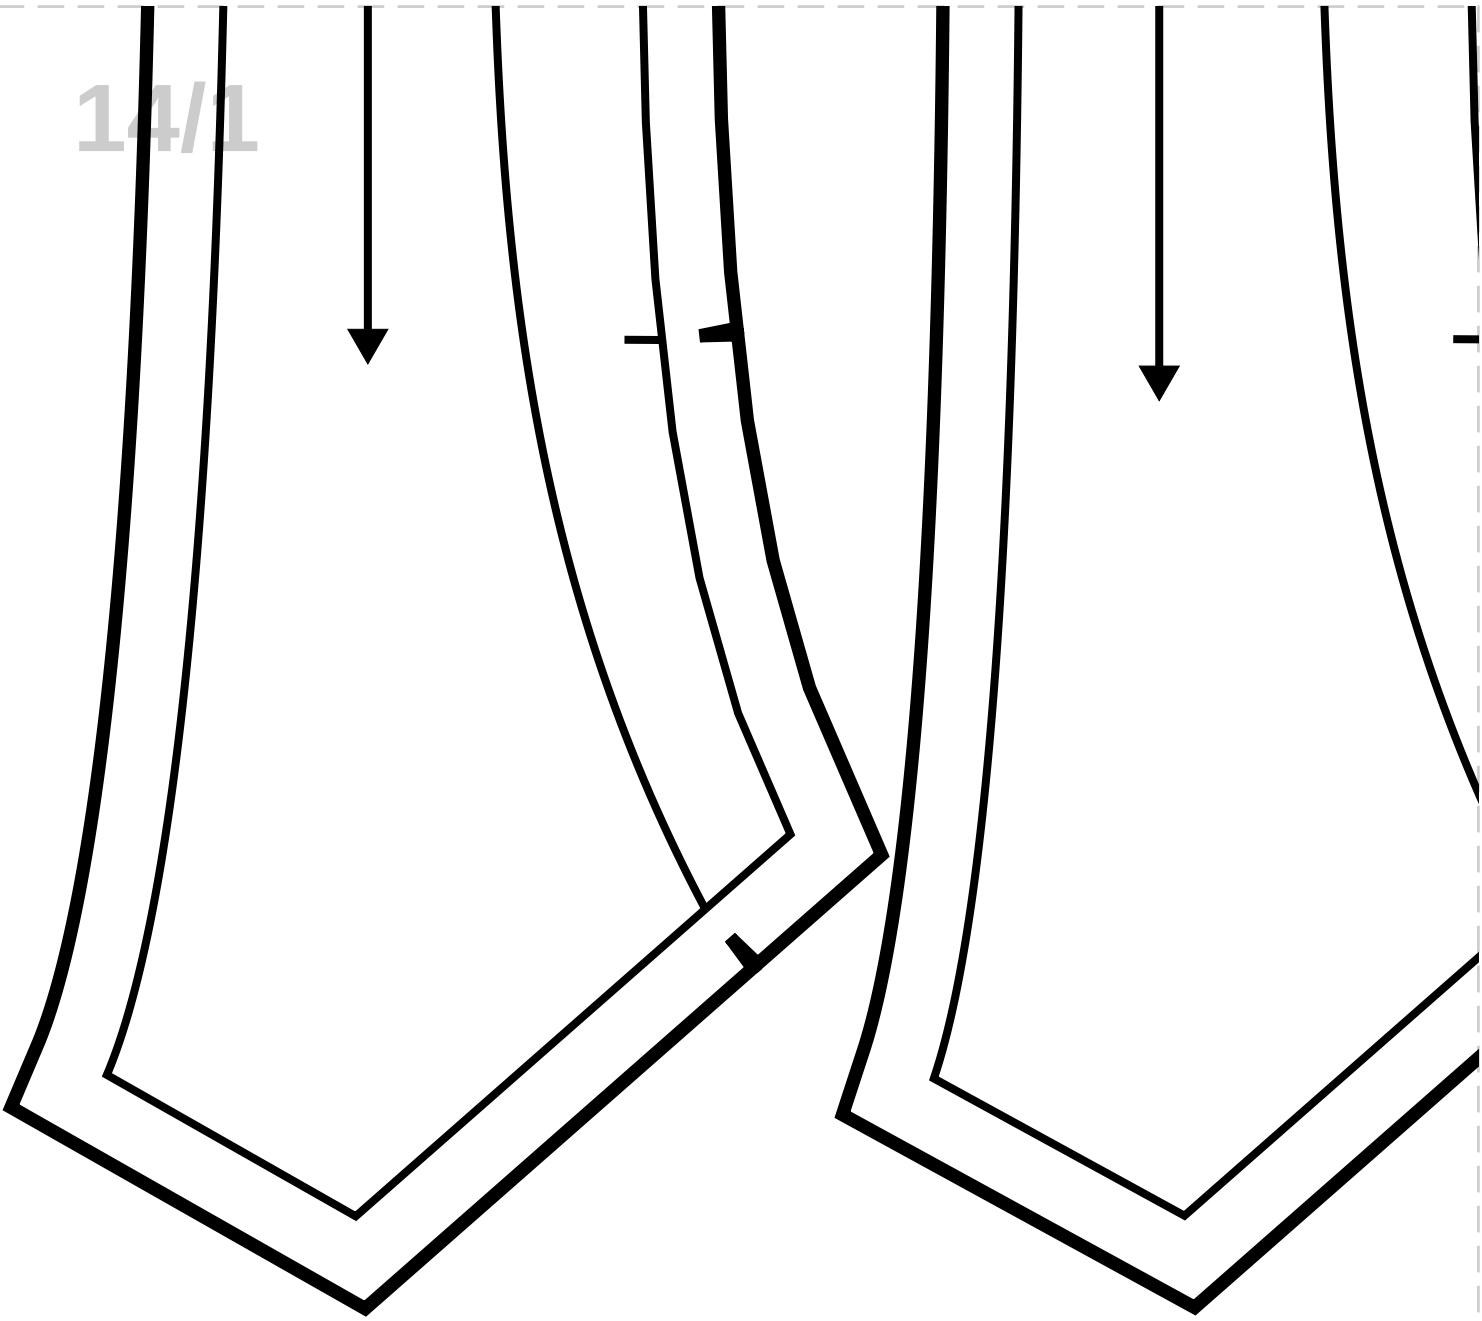

14/2

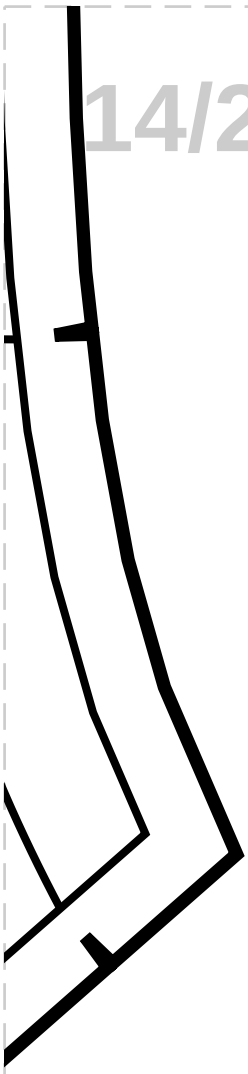

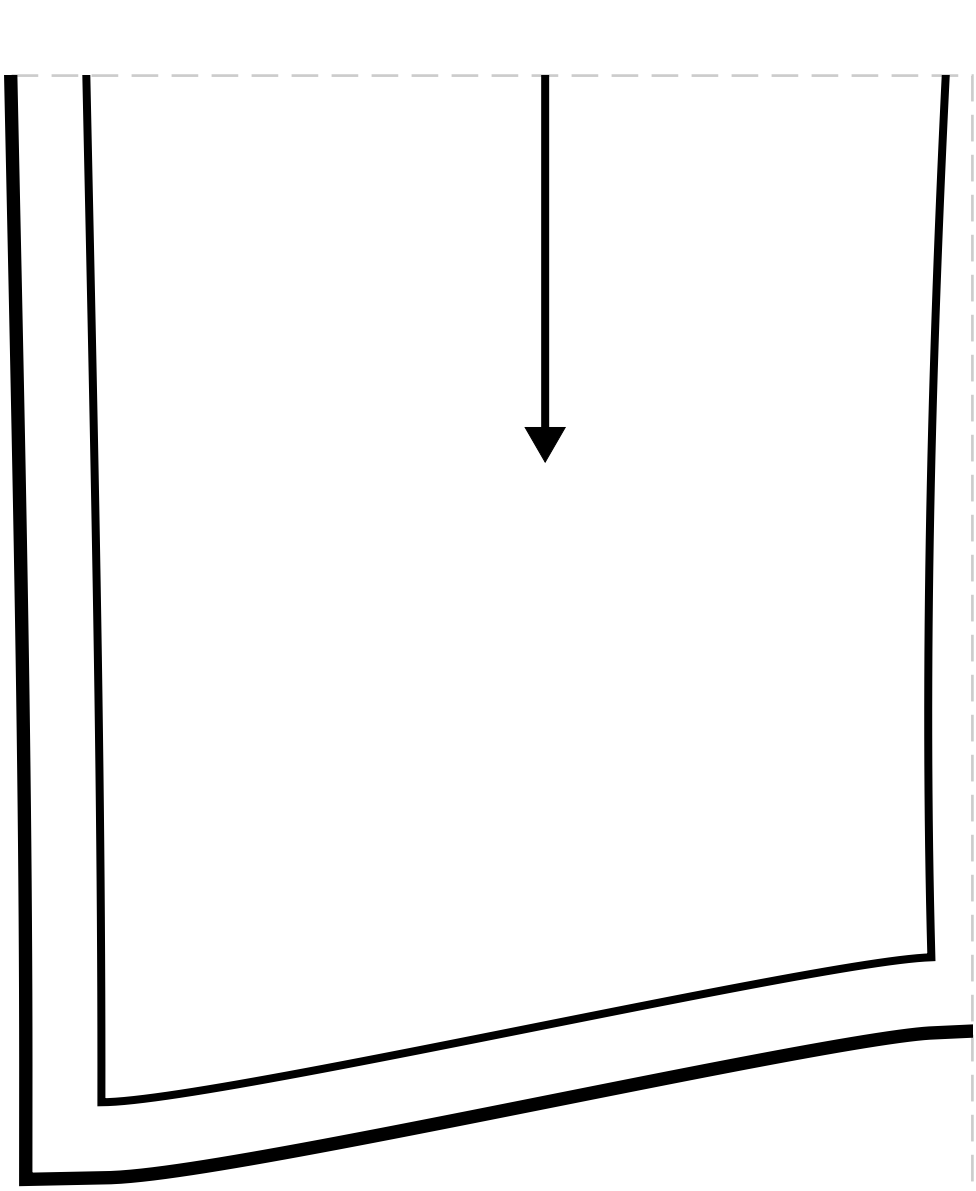

14/4



14/5