cozysewpatterns

Print this Calibration Test page first!

Size: Height: 167.75, Bust: 109.25, Waist: 93.25, Hips: 115.5
SIZE 16

Notes

How to print

Printing


Once your Calibration Test Page has been printed, measure the 4”x 4” (10cm) scale box with a ruler. If the lengths match, you can confidently print your pattern. If the rulers do not match, set your print settings to 100% or Actual and retry.

Cutting

Your printouts will always have a dashed border to perfectly match your sheets. Cut off the right edge of each page. Be careful not to cut beyond the dashed mark, otherwise your patterns will not align accurately.

Tapping

Group each sheet by the second number marked on each pate i.e. in a group 1, there are: 1/1, 2/1, 3/1, 4/1, etc. In a group 2: 1/2, 2/2 etc. 2. Place page 1/1 on top of the page 2/1, overlapping the right side edge. Match corners and crosses and secure with a pin or tape. Then use a scotch tape to permanently attach the sheets together.

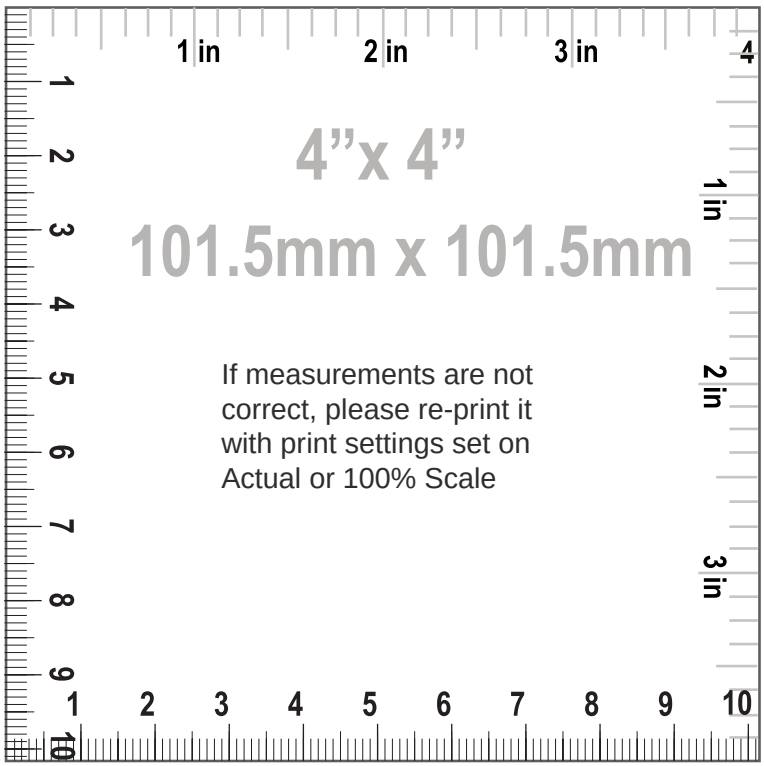

SIZE 16
Seam Allowance: 1 (3/8 in)

Pattern pieces:

1. "FRONT LINING", LINING: Cut 2
2. "CENTER FRONT", MAIN FABRIC, FUSIBLE INTERFACING: Cut 2
3. "SIDE FRONT", MAIN FABRIC, FUSIBLE INTERFACING: Cut 2
4. "CENTER BACK", MAIN FABRIC, FUSIBLE INTERFACING: Cut 2
5. "CENTER BACK LINING", LINING: Cut 1
6. "SIDE BACK", MAIN FABRIC, FUSIBLE INTERFACING: Cut 2
7. "SIDE BACK LINING", LINING: Cut 2
8. "FRONT NECK FACING", MAIN FABRIC, FUSIBLE INTERFACING: Cut 2
9. "BACK NECK FACING", MAIN FABRIC, FUSIBLE INTERFACING: Cut 1
10. "UPPER COLLAR", MAIN FABRIC, FUSIBLE INTERFACING: Cut 1
11. "LOWER COLLAR", MAIN FABRIC, FUSIBLE INTERFACING: Cut 1
12. "BELT", MAIN FABRIC, FUSIBLE INTERFACING: Cut 1
13. "PATCH POCKET", MAIN FABRIC: Cut 2
14. "TWO BELT LOOPS", MAIN FABRIC: Cut 1
15. "UPPER SLEEVE", MAIN FABRIC: Cut 2
16. "LOWER SLEEVE", MAIN FABRIC: Cut 2
17. "UPPER SLEEVE LINING", LINING: Cut 2
18. "LOWER SLEEVE LINING", LINING: Cut 2


Pattern Specs (Circumferences are divided by 2):


1. Hem max 4.60 none (1 3/4 in)
2. Seam allowance max 2.00 none (3/4 in)
3. Seam allowance p max 1.50 none (5/8 in)
4. Stretch factor 1.00 none (3/8 in)
5. Shoulder pads thickness 1.00 none (3/8 in)
6. Pocket entry length 12.83 cm (5 in)
7. Waist to pocket length 10.02 cm (4 in)
8. Side seam pocket position 8.40 cm (3 1/4 in)
9. Button diameter 1.50 cm (5/8 in)
10. Front buttons quantity 12.00 pc
11. Front length from HPS to hem 92.89 cm (36 5/8 in)
12. Across chest 61.75 cm (24 1/4 in)
13. Center front length to hem 82.77 cm (32 5/8 in)

14. Center back length to hem 88.34 cm (34 3/4 in)
15. Across front 43.58 cm (17 1/8 in)
16. Across back 42.40 cm (16 3/4 in)
17. Across shoulders 42.14 cm (16 5/8 in)
18. Side seam 61.20 cm (24 1/8 in)
19. Waist 54.10 cm (21 1/4 in)
20. Low hips 66.23 cm (26 1/8 in)
21. Blazer hemline sweep 71.16 cm (28 in)
22. Armhole length 60.78 cm (23 7/8 in)
23. Neck opening 19.01 cm (7 1/2 in)
24. Front neck drop 20.09 cm (7 7/8 in)
25. Back neck drop 3.84 cm (1 1/2 in)
26. Shoulder width 13.29 cm (5 1/4 in)
27. Apex to apex 22.85 cm (9 in)
28. Seam allowance poc max 3.00 none (1 1/8 in)
29. Hem poc max 6.00 none (2 3/8 in)
30. Pocket height 14.11 cm (5 1/2 in)
31. Stretch factor horizontal 1.00 none (3/8 in)
32. Stretch factor vertical 1.00 none (3/8 in)
33. Sleeve length 59.21 none (23 1/4 in)
34. Sleeve cap length 62.63 none (24 5/8 in)
35. Armhole length 60.78 none (23 7/8 in)
36. Sleeve upper arm width 41.58 none (16 3/8 in)
37. Sleeve opening 27.38 none (10 3/4 in)

cozysewpatterns

Paper Size: LETTER;
Print Actual Size (100% Scale);

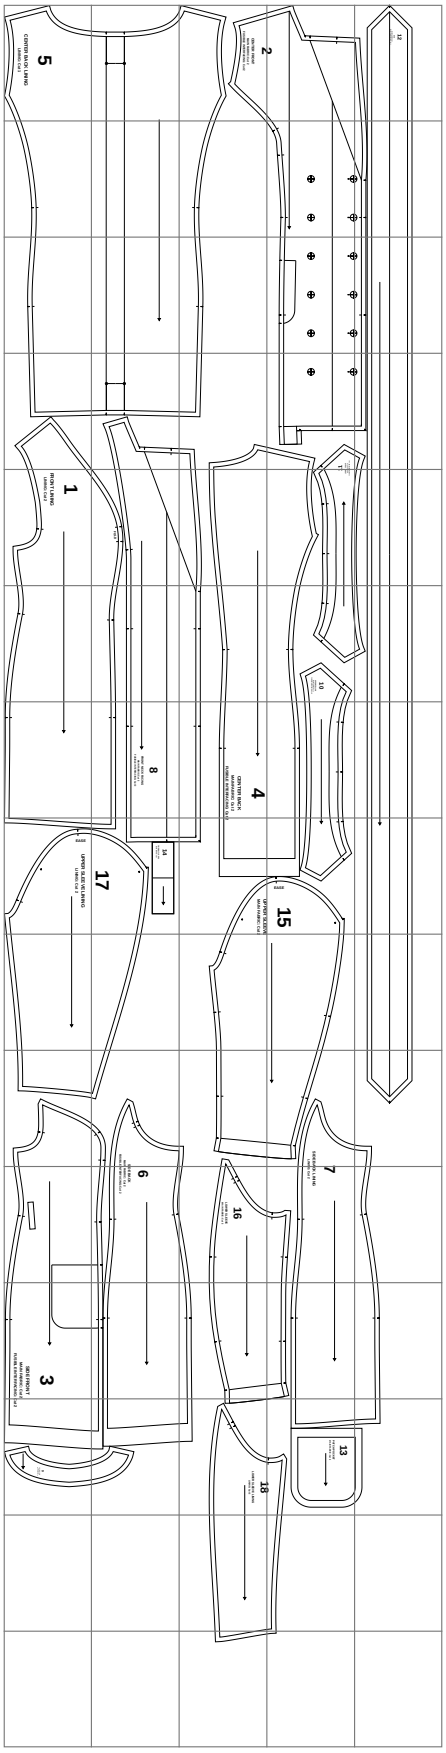

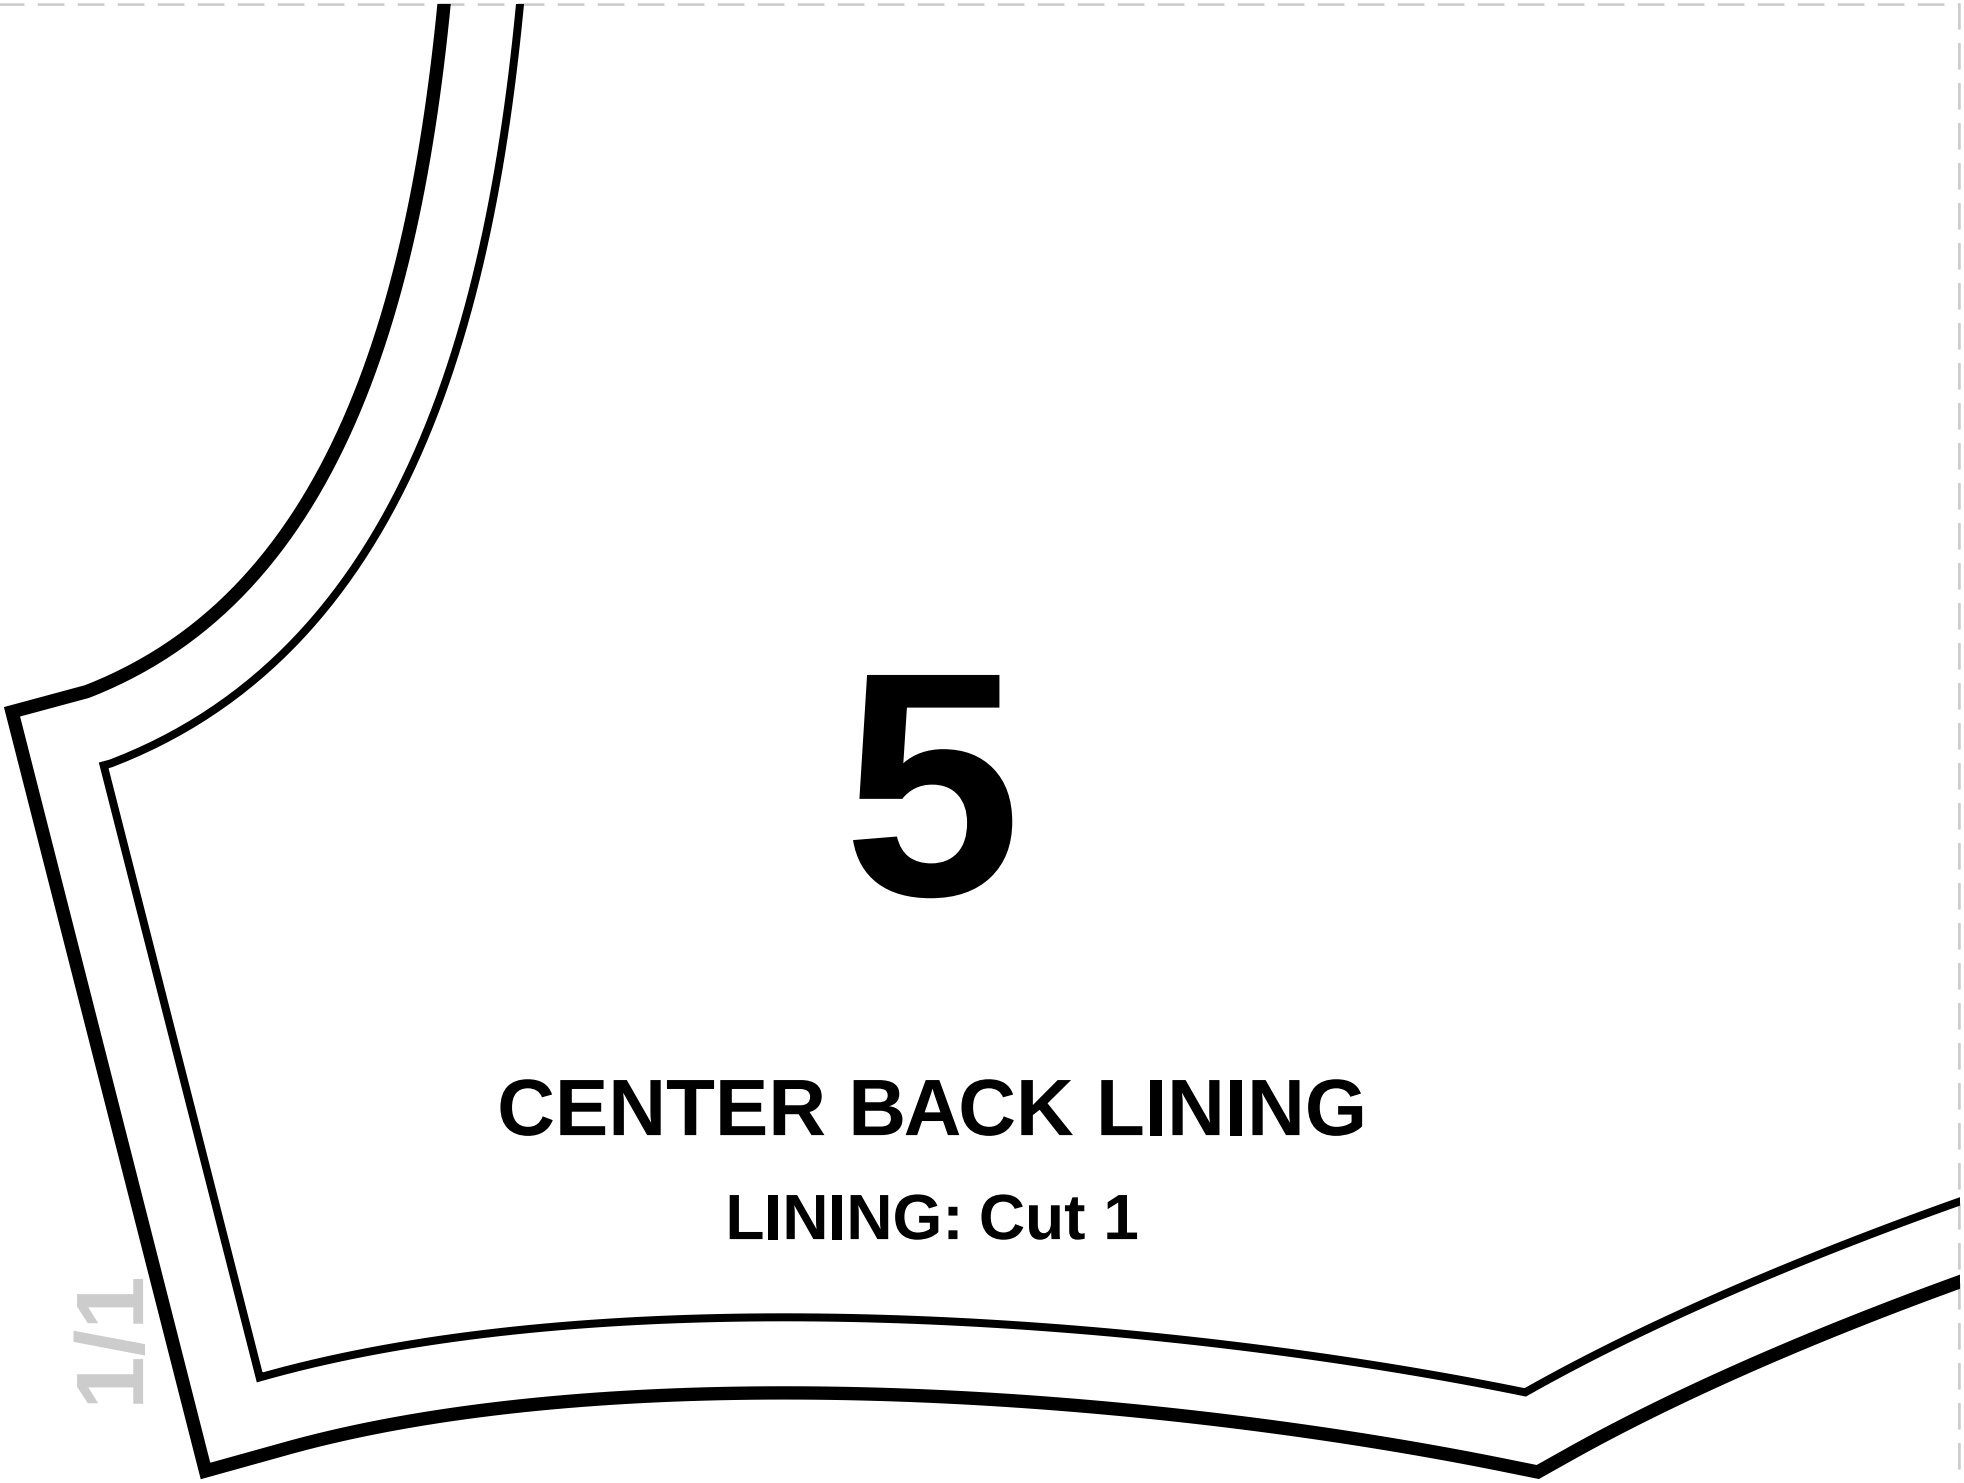



5


CENTER BACK LINING


LINING: Cut 1

1/1

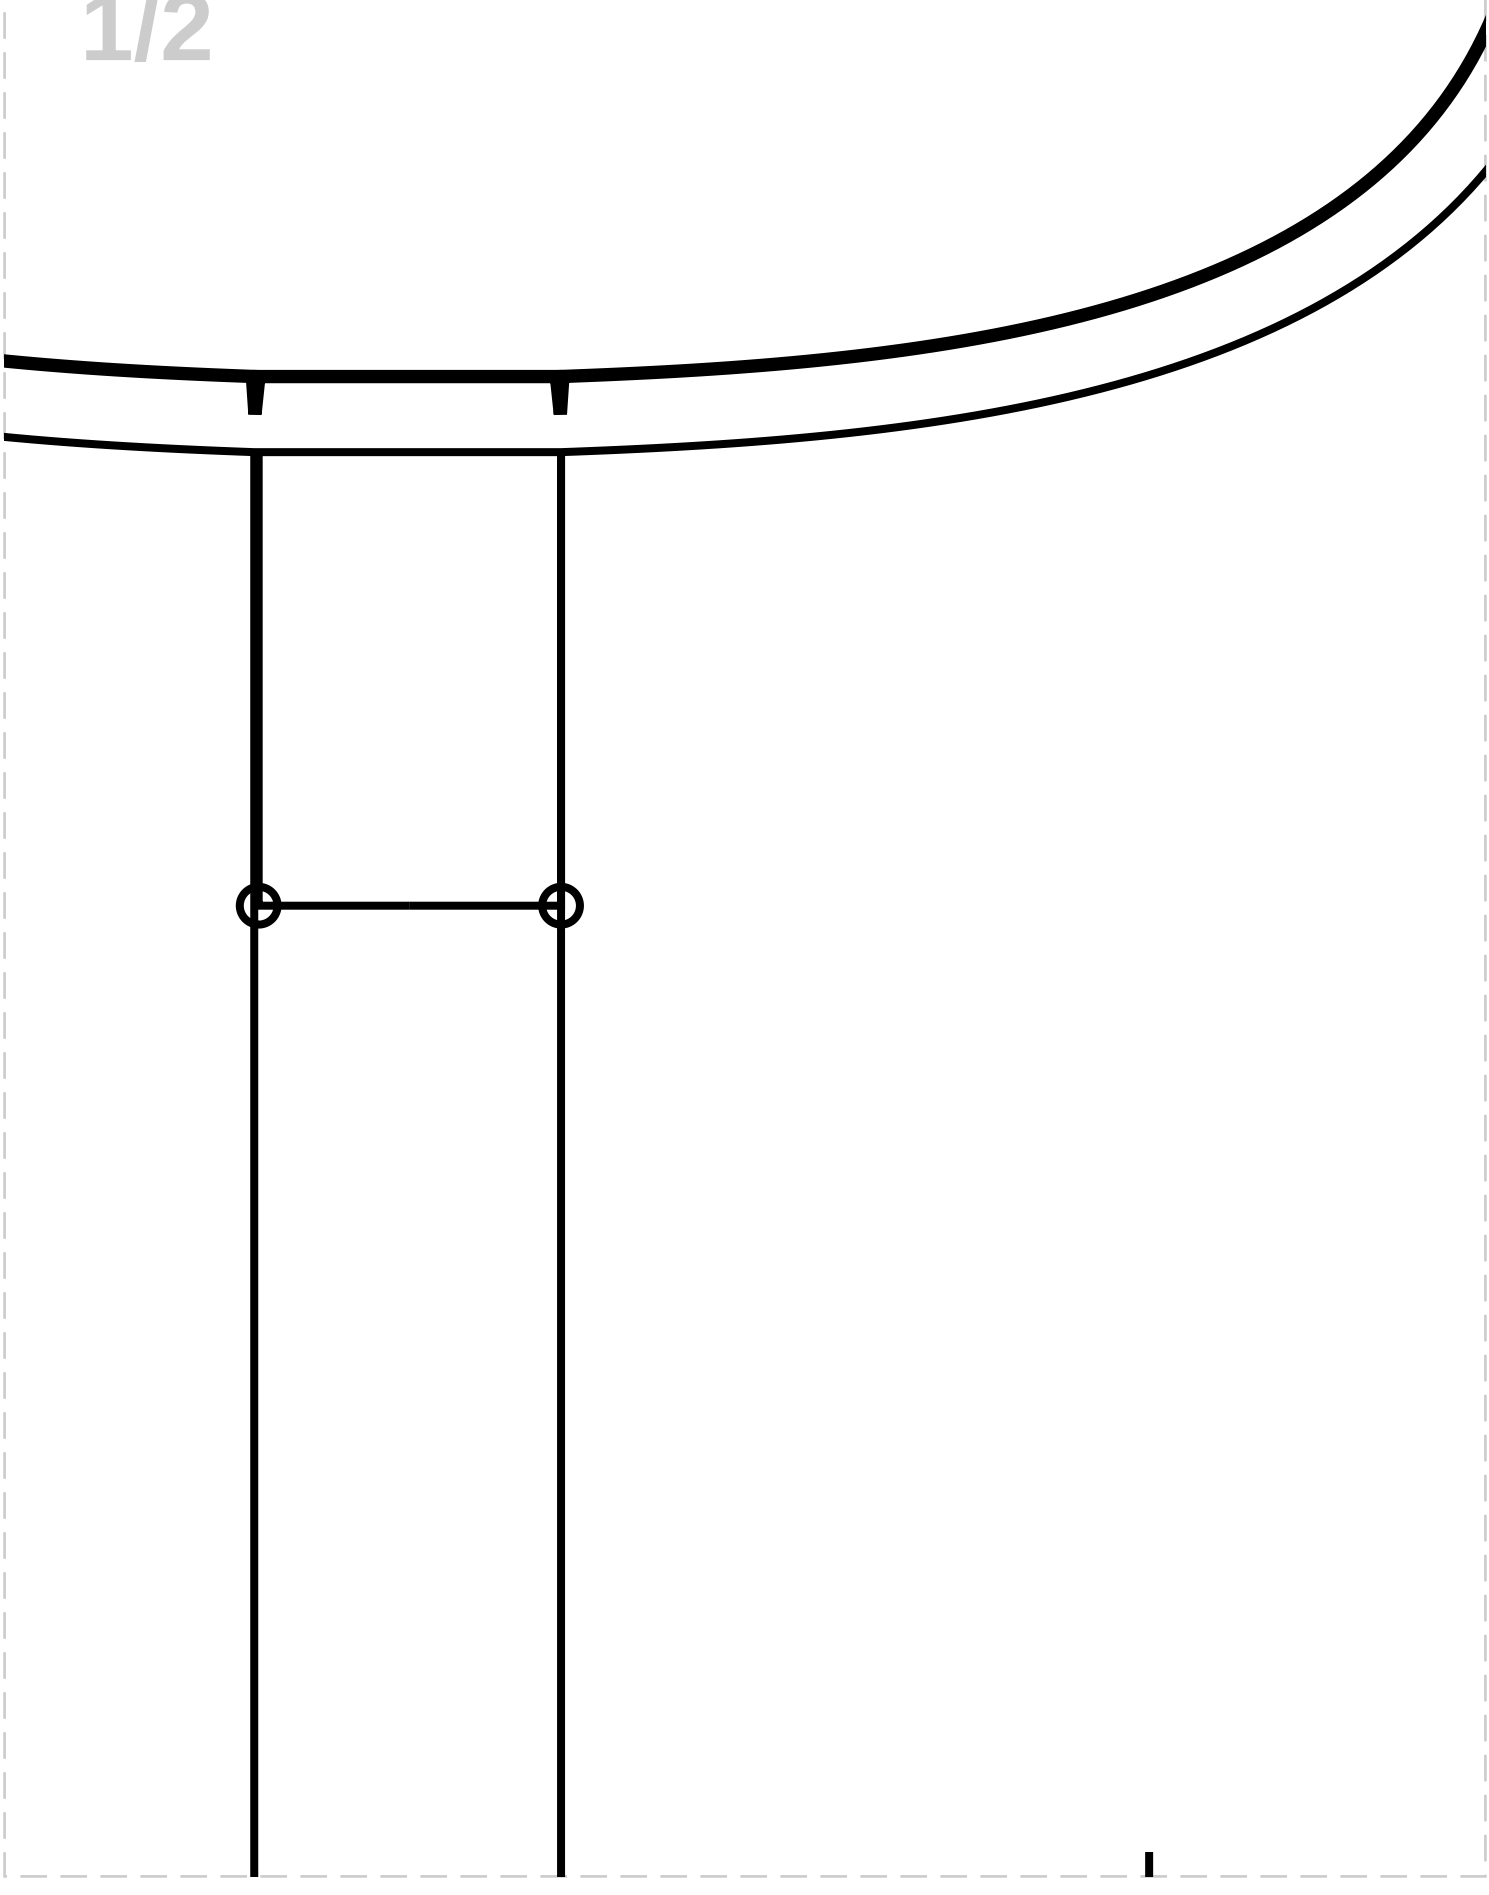

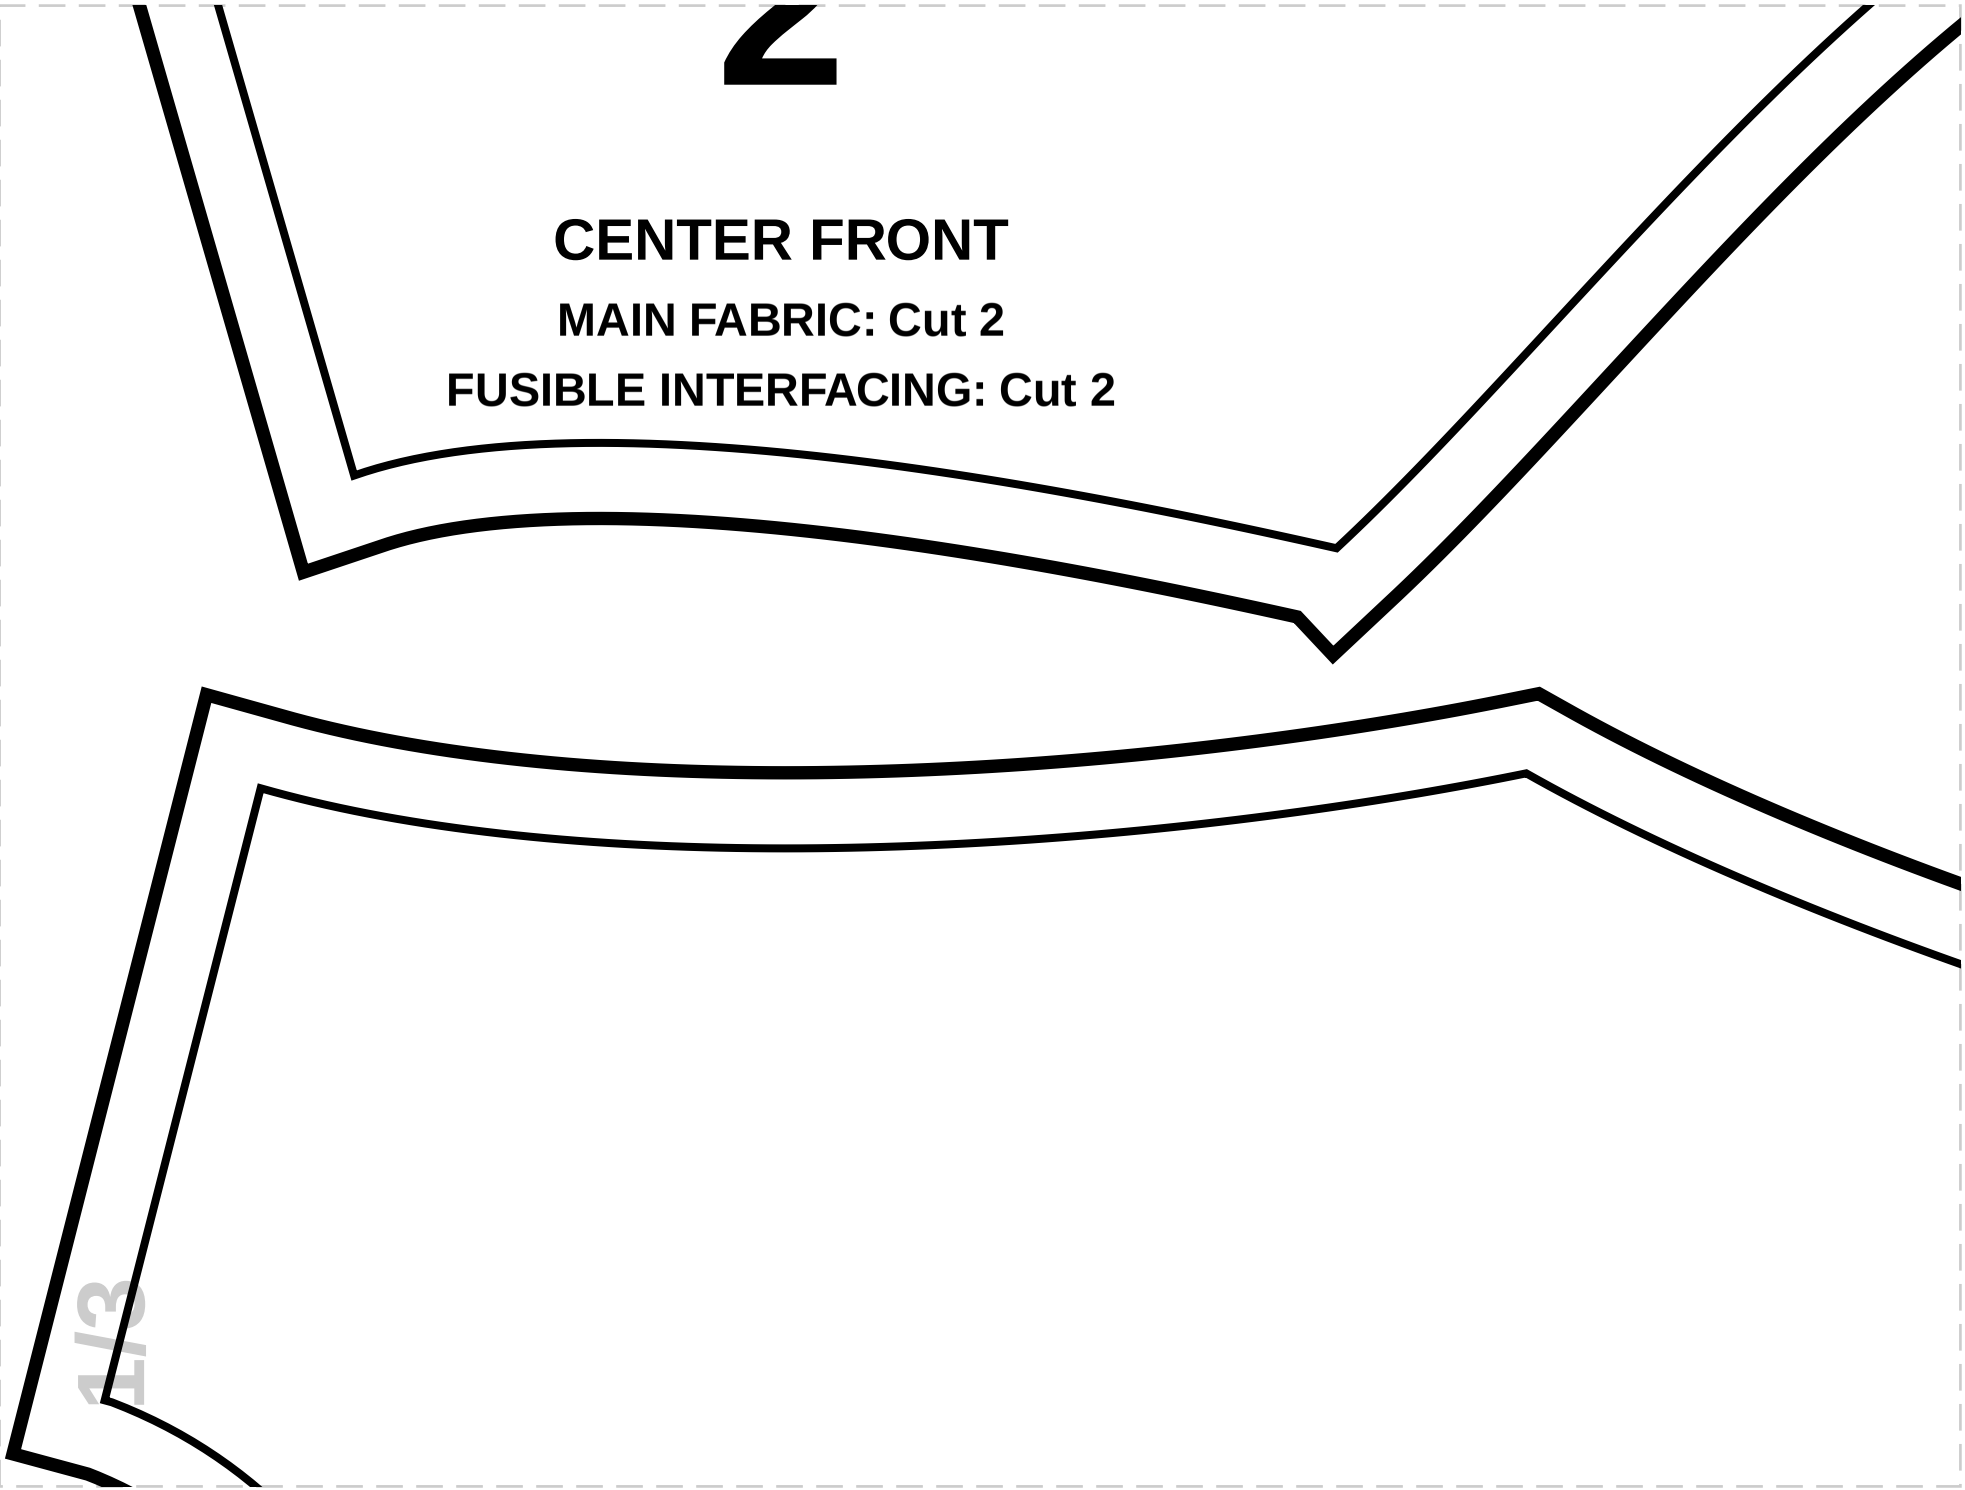
CENTER FRONT
MAIN FABRIC: Cut 2
FUSIBLE INTERFACING: Cut 2

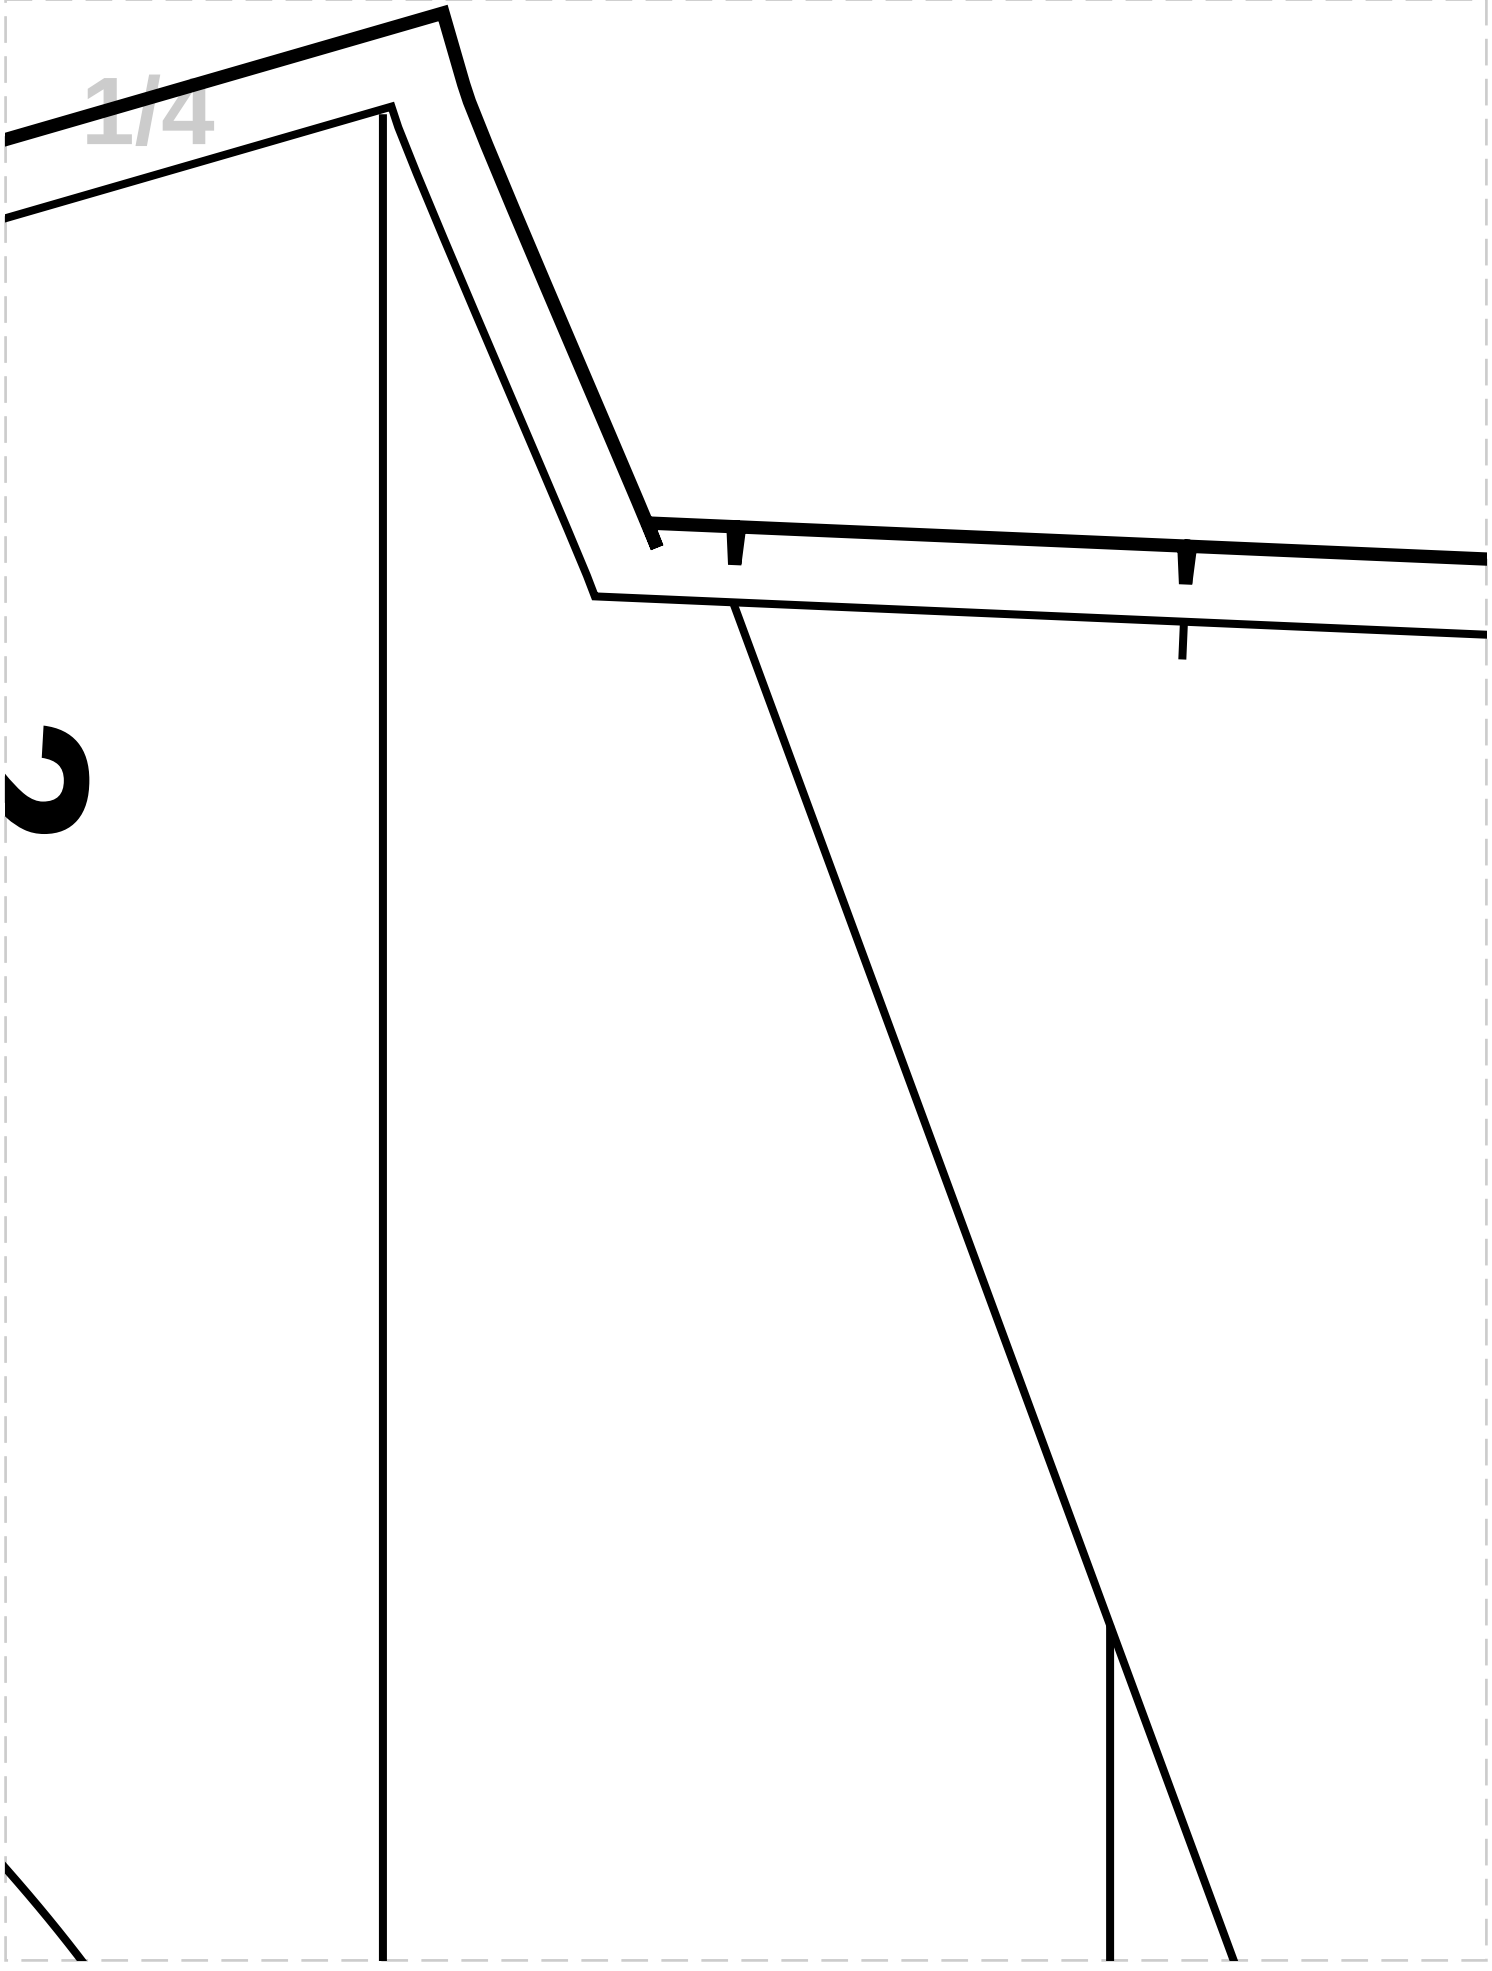

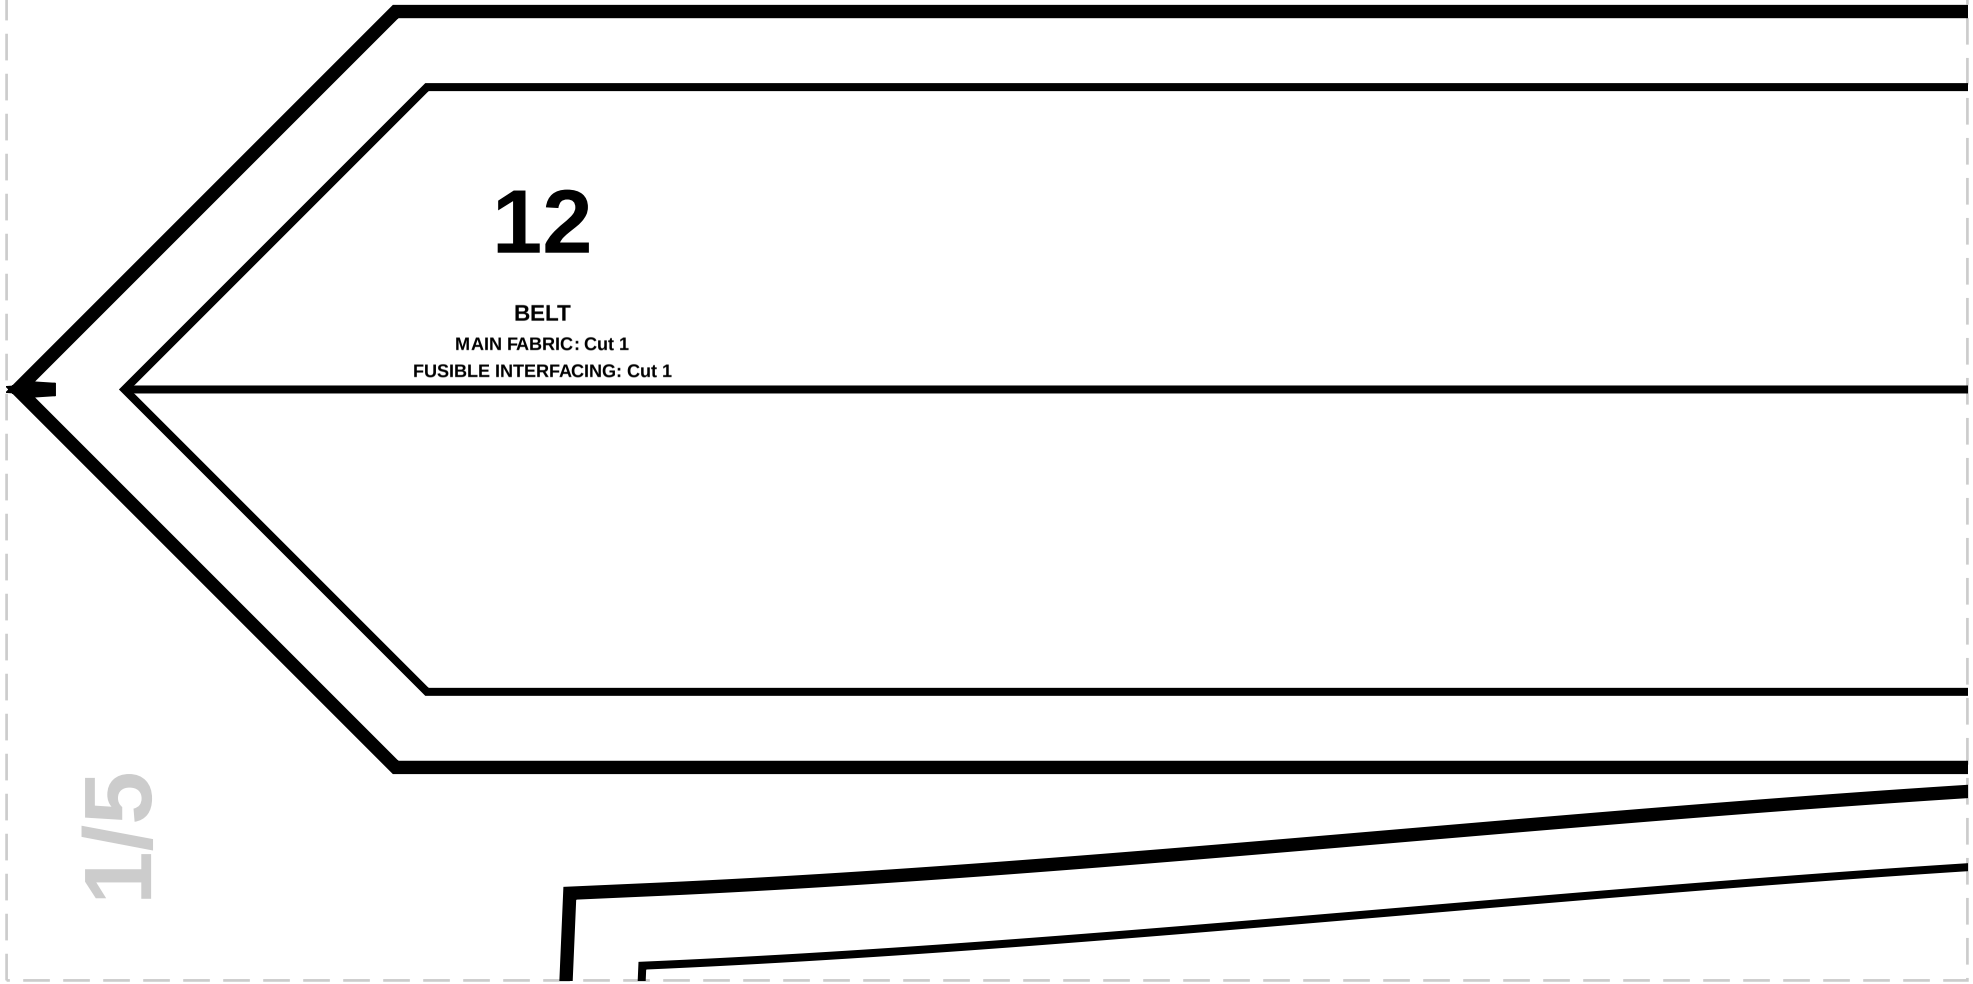


12


BELT


MAIN FABRIC: Cut 1


FUSIBLE INTERFACING: Cut 1


2/1

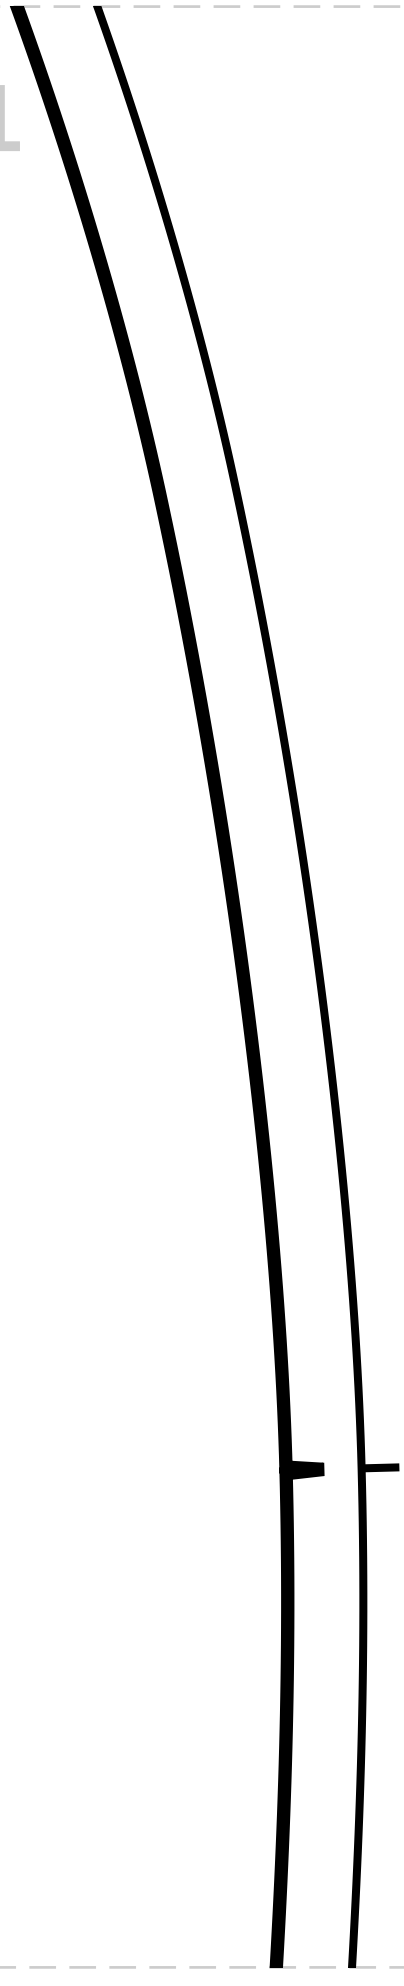

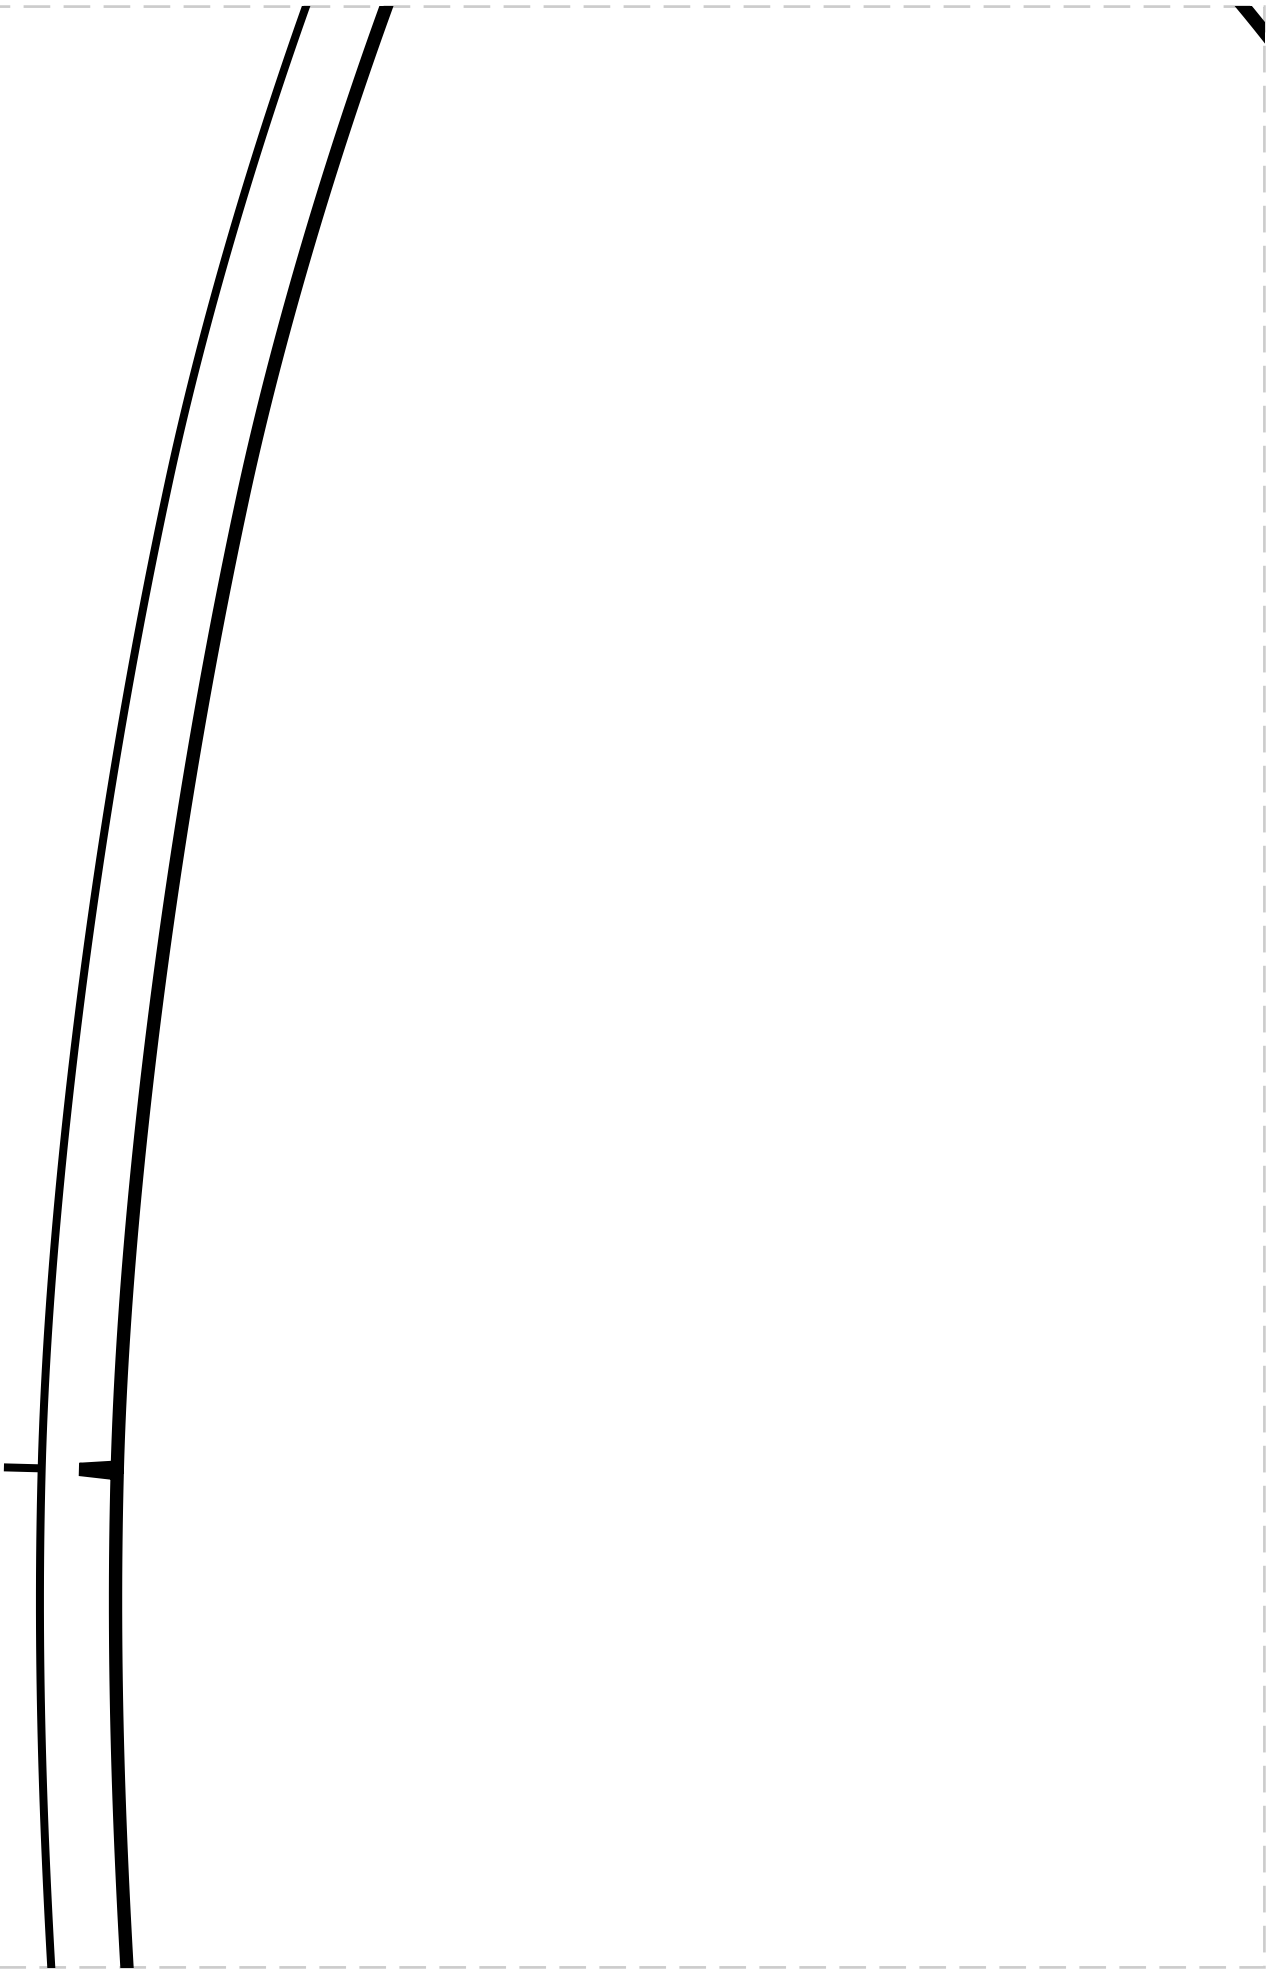


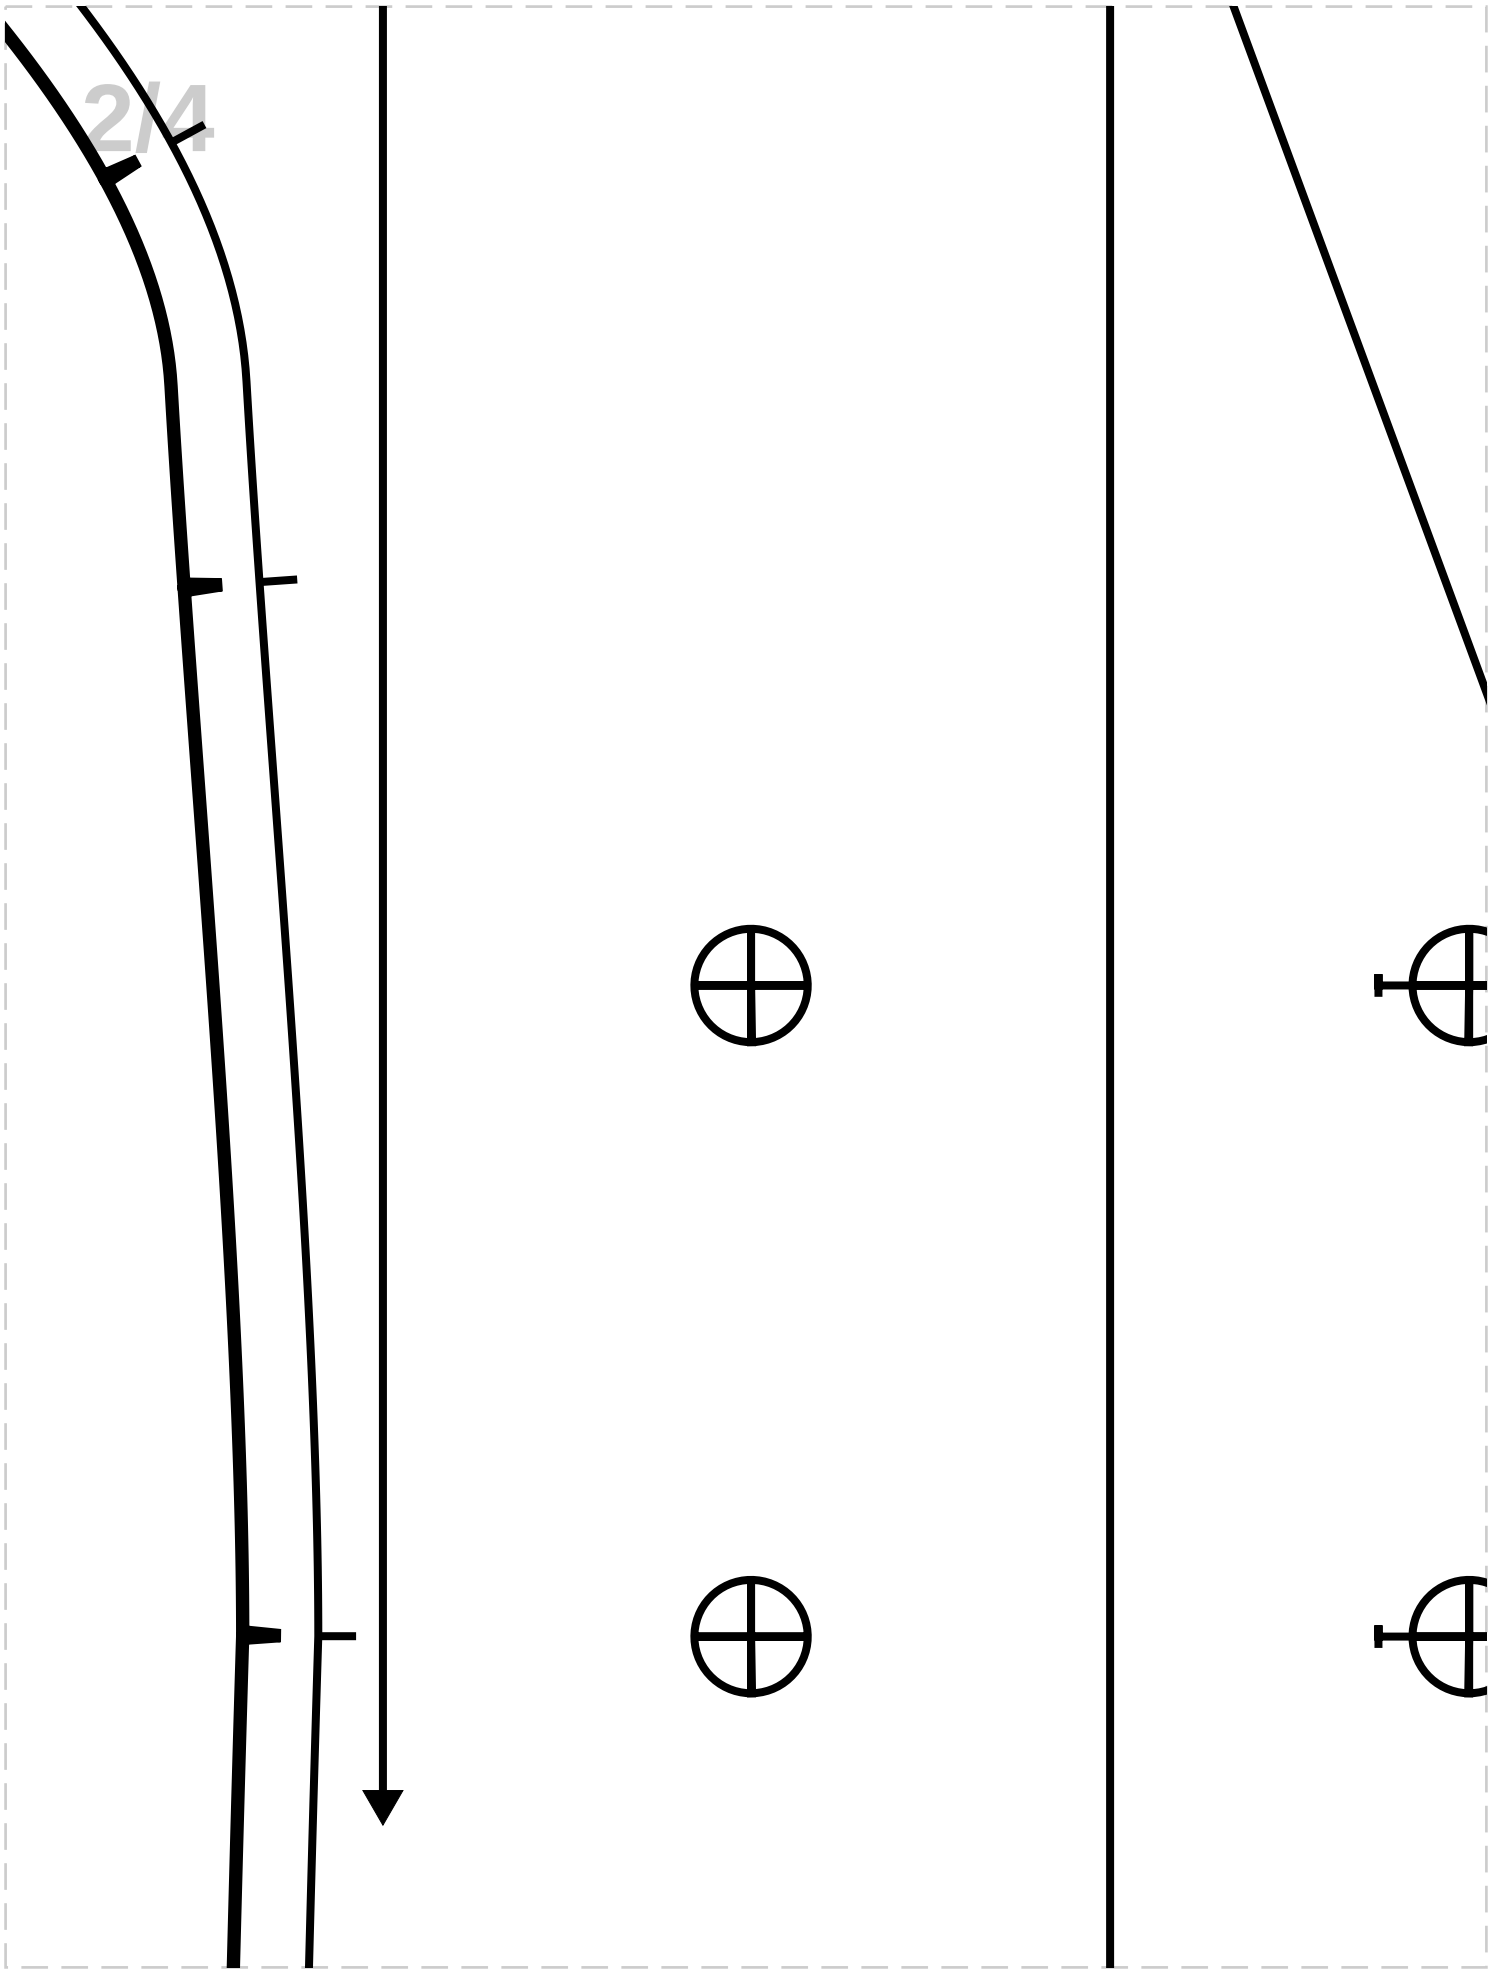


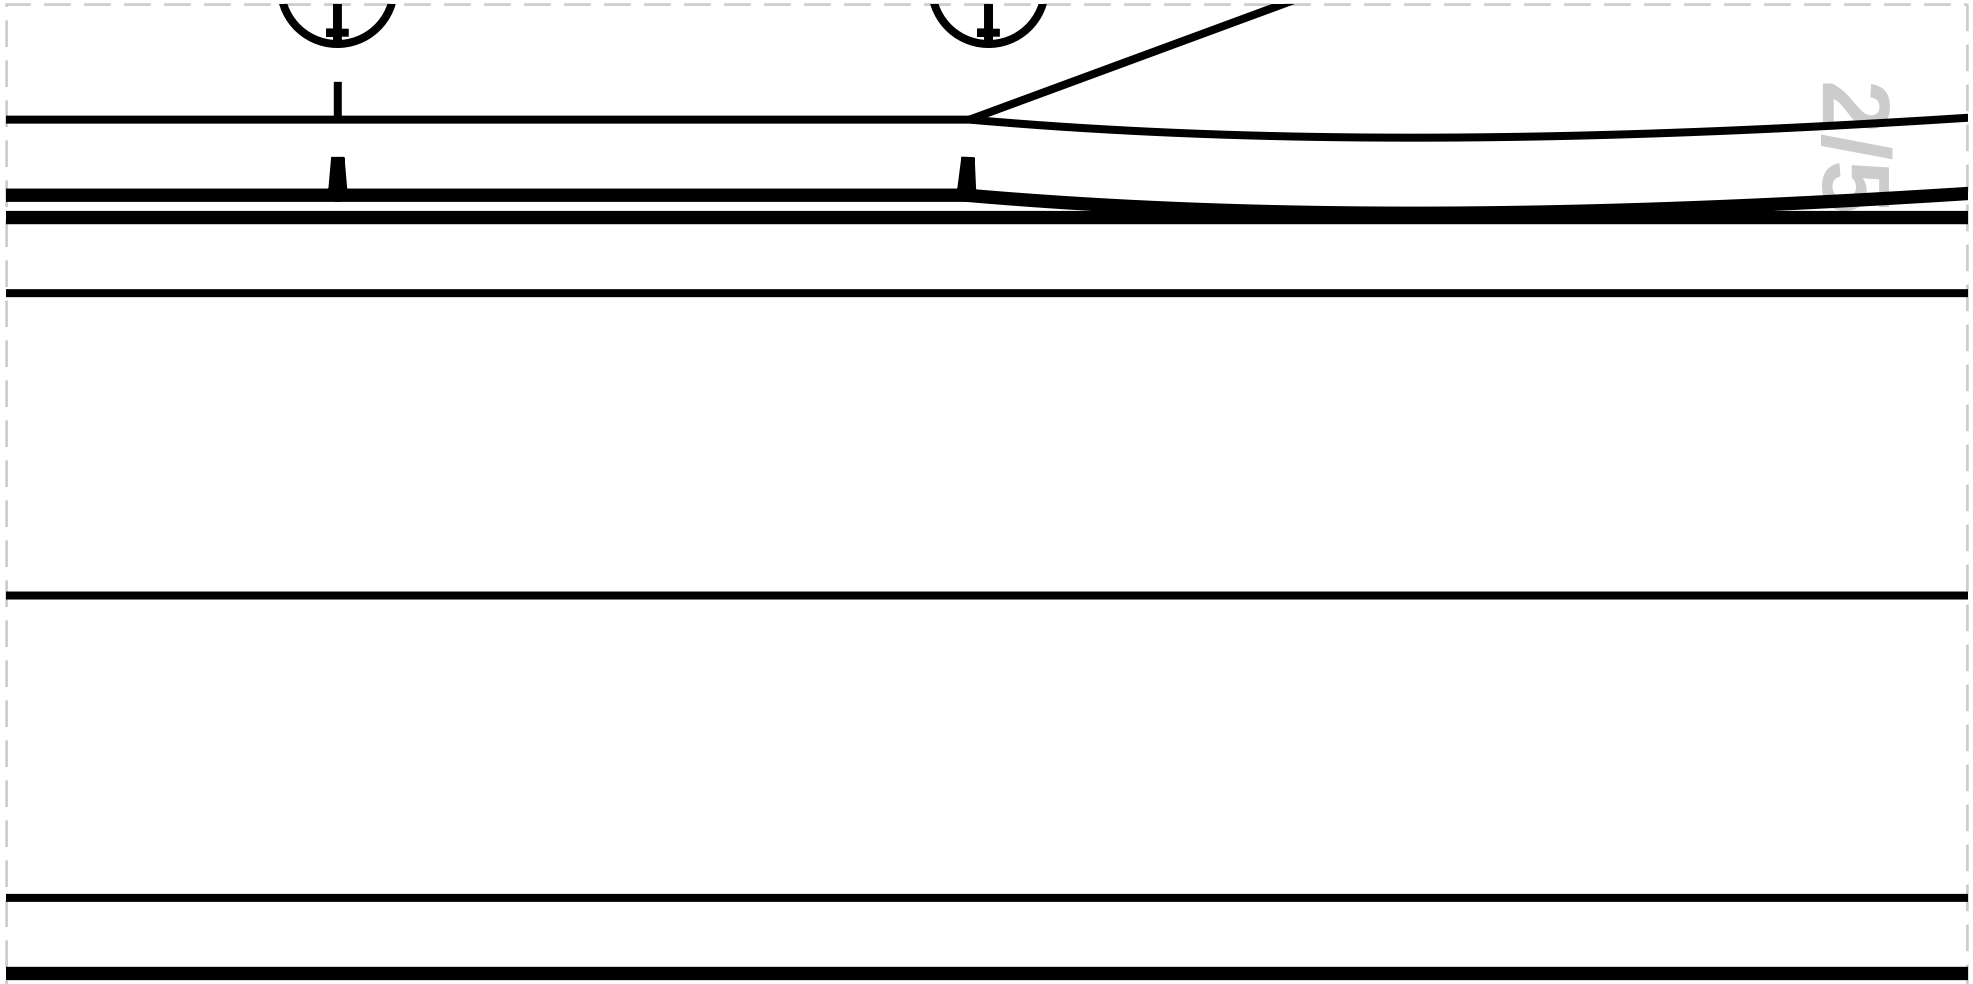


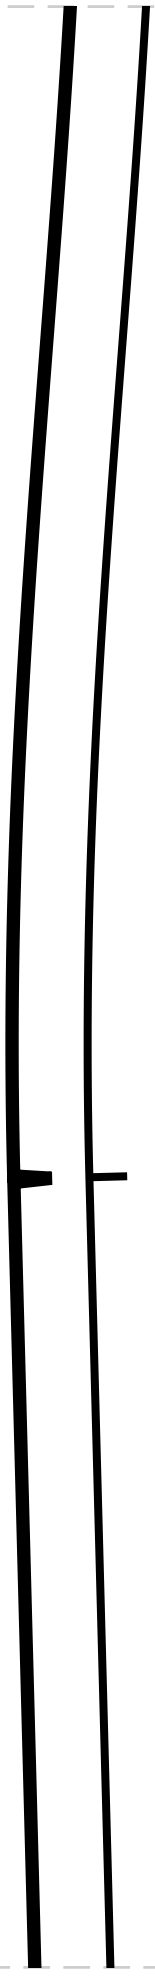



3/2




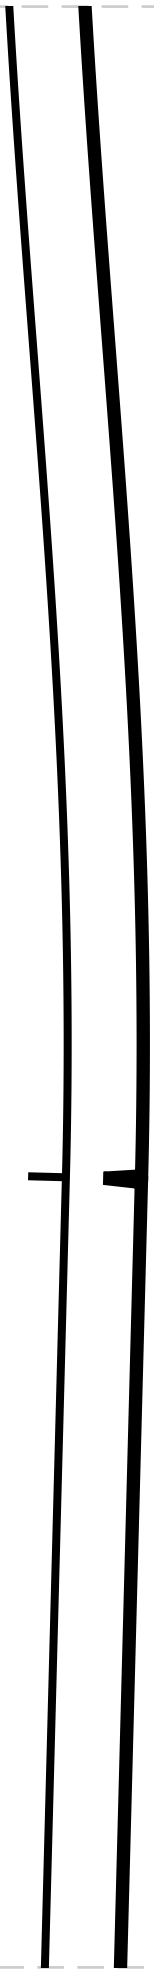

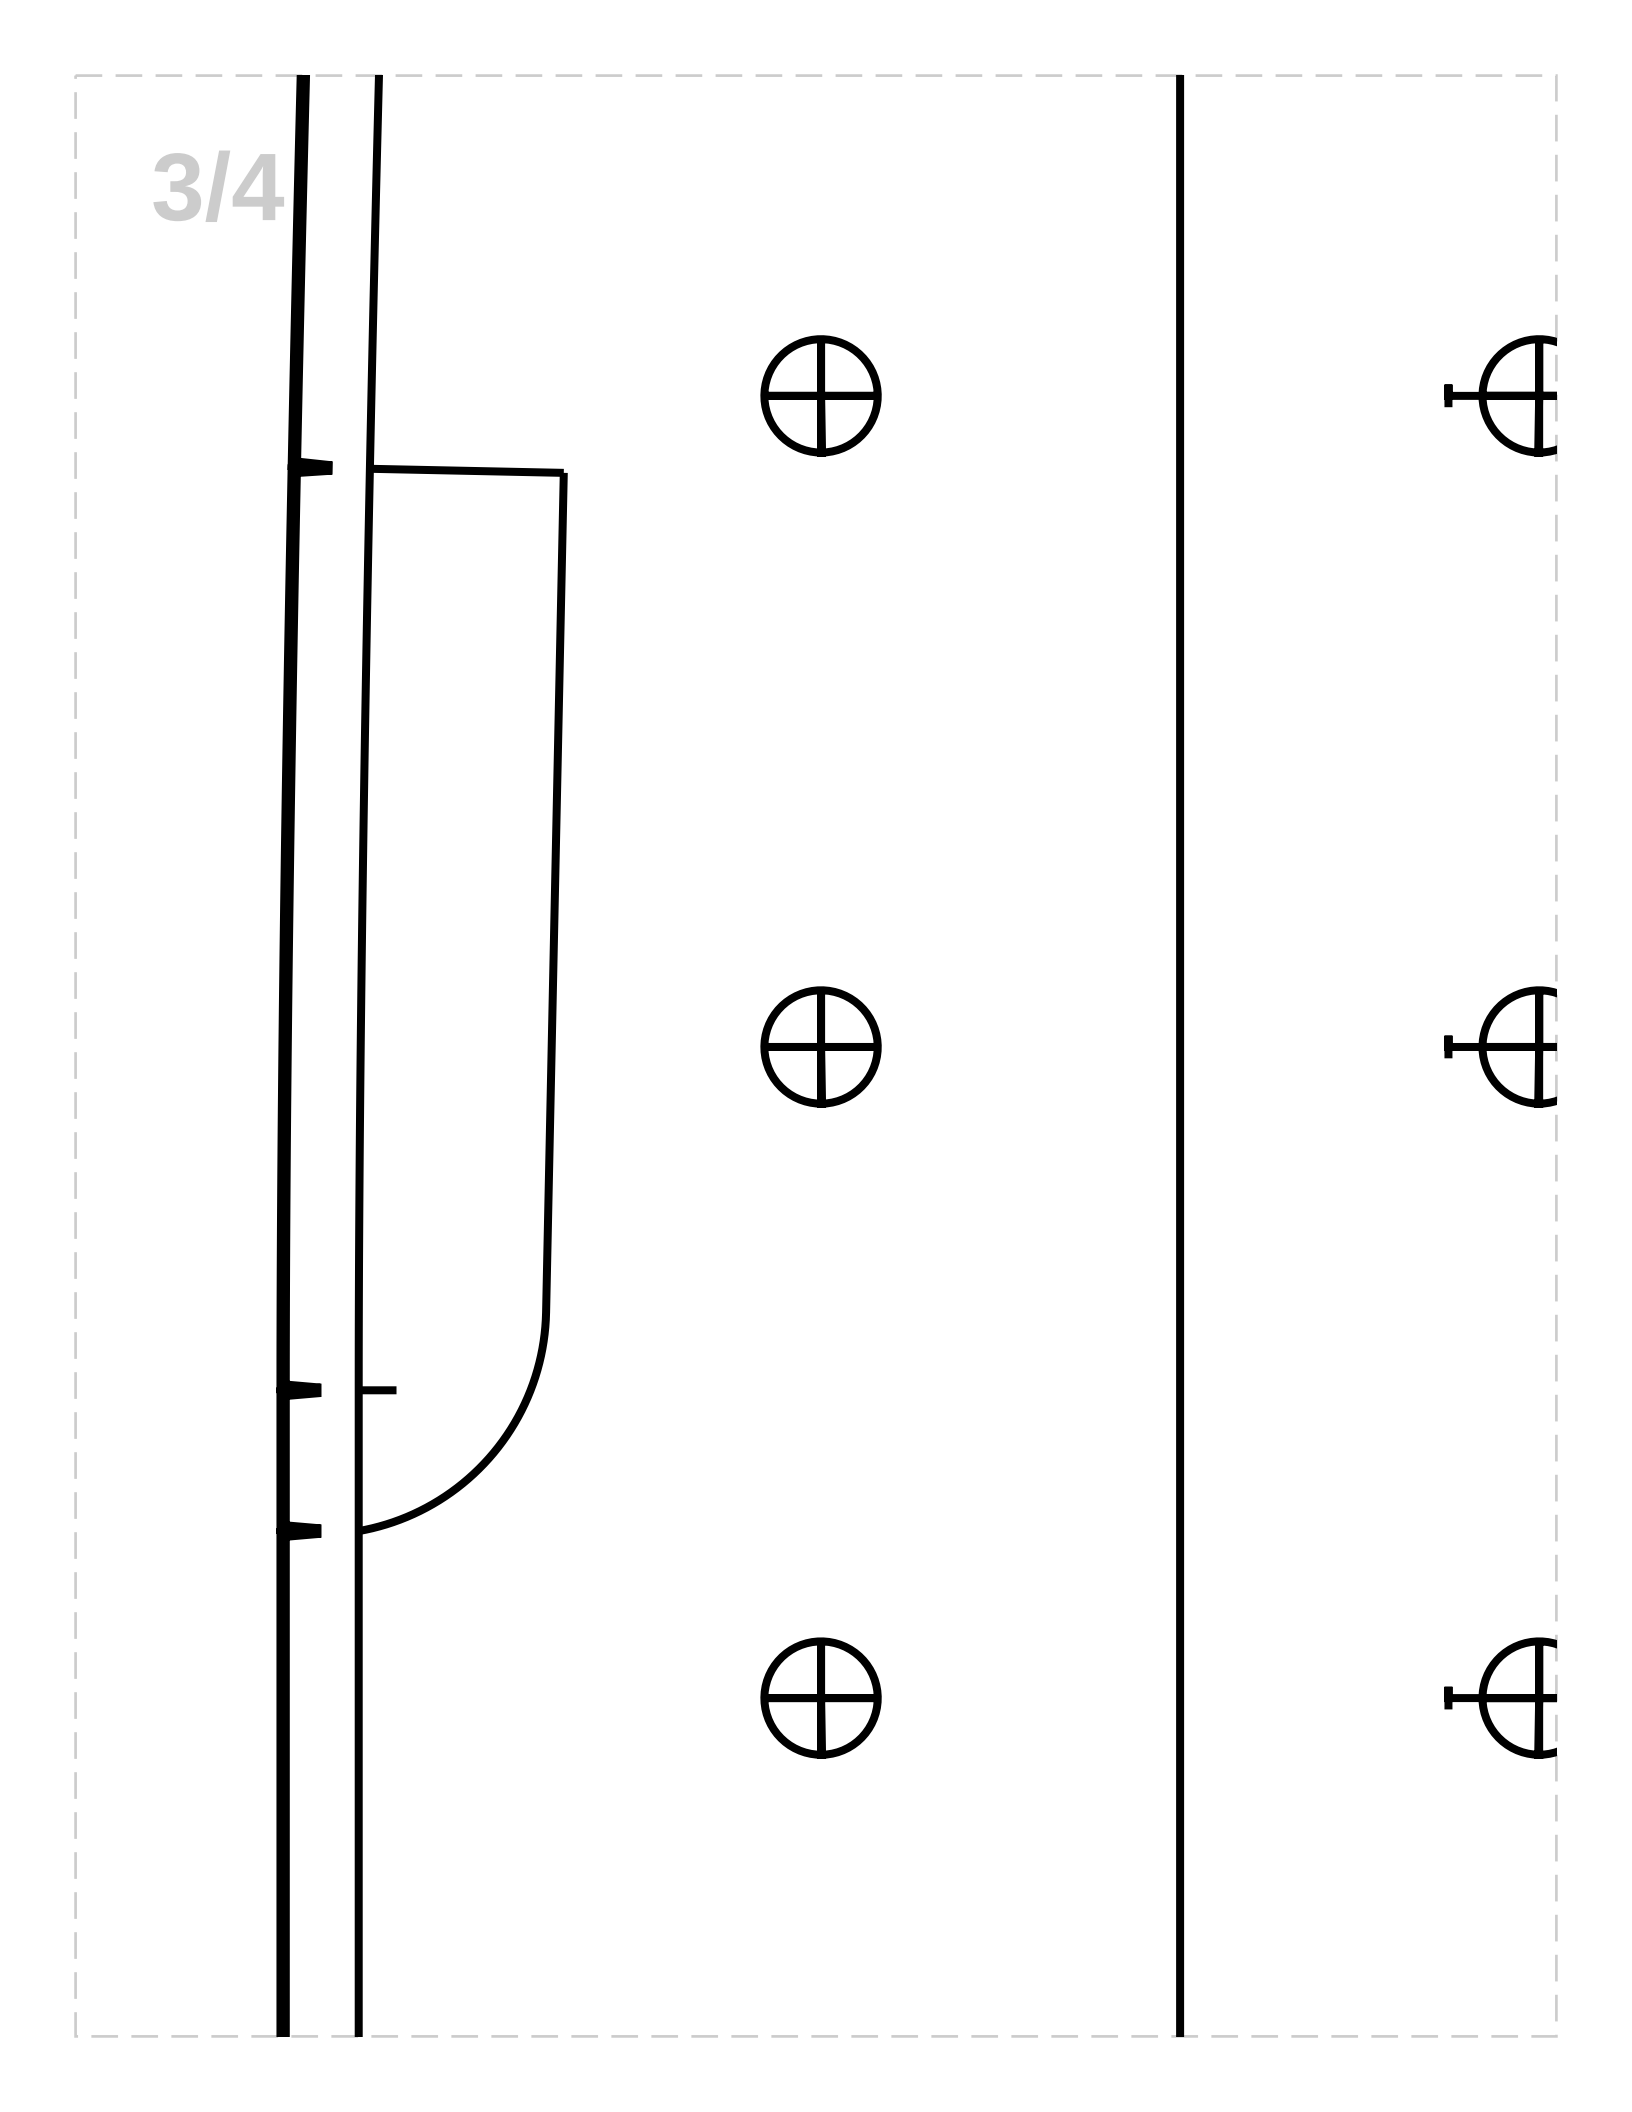


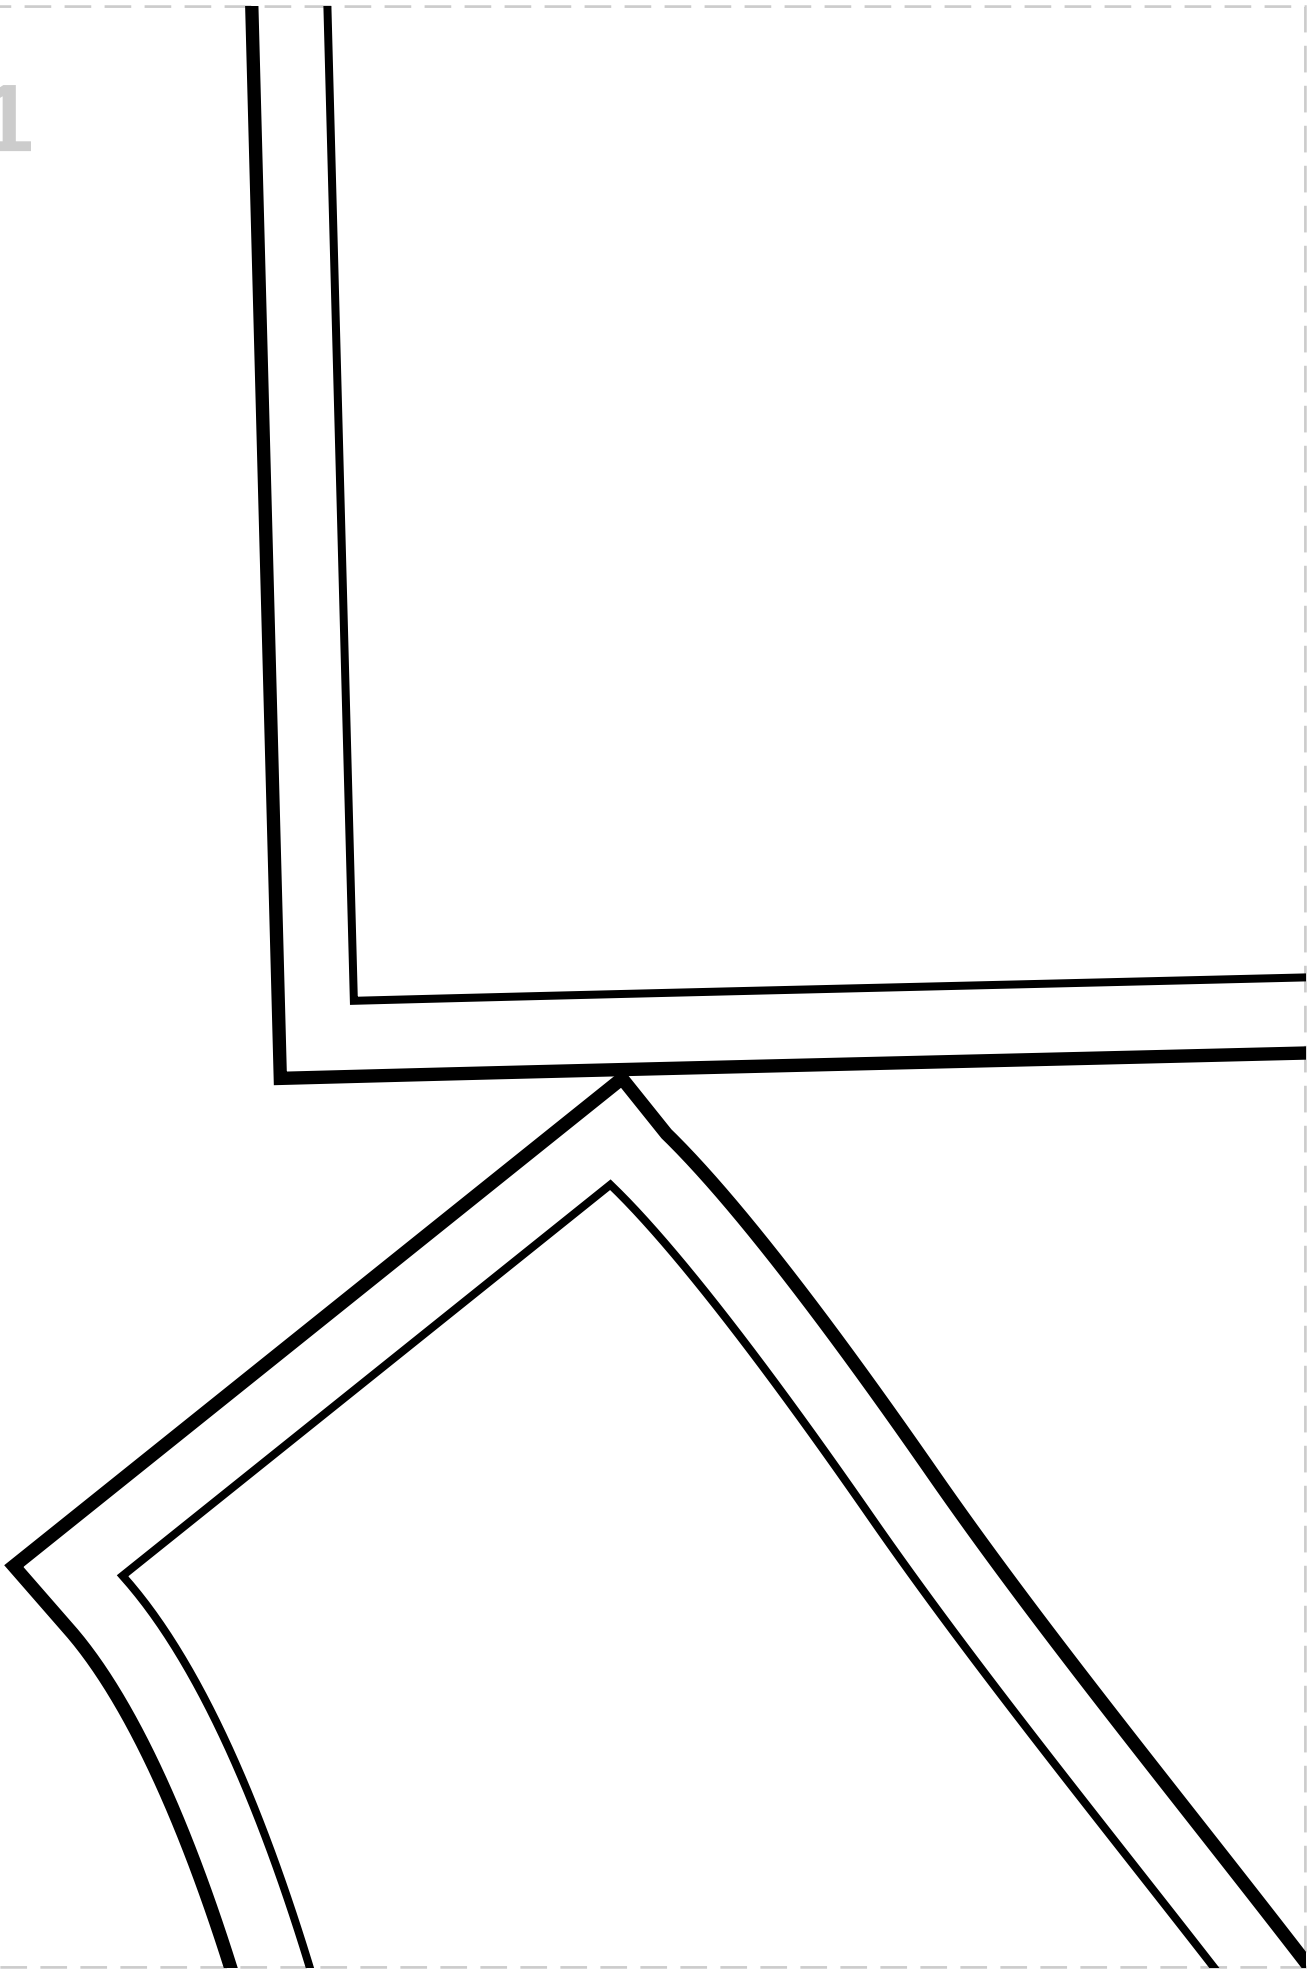

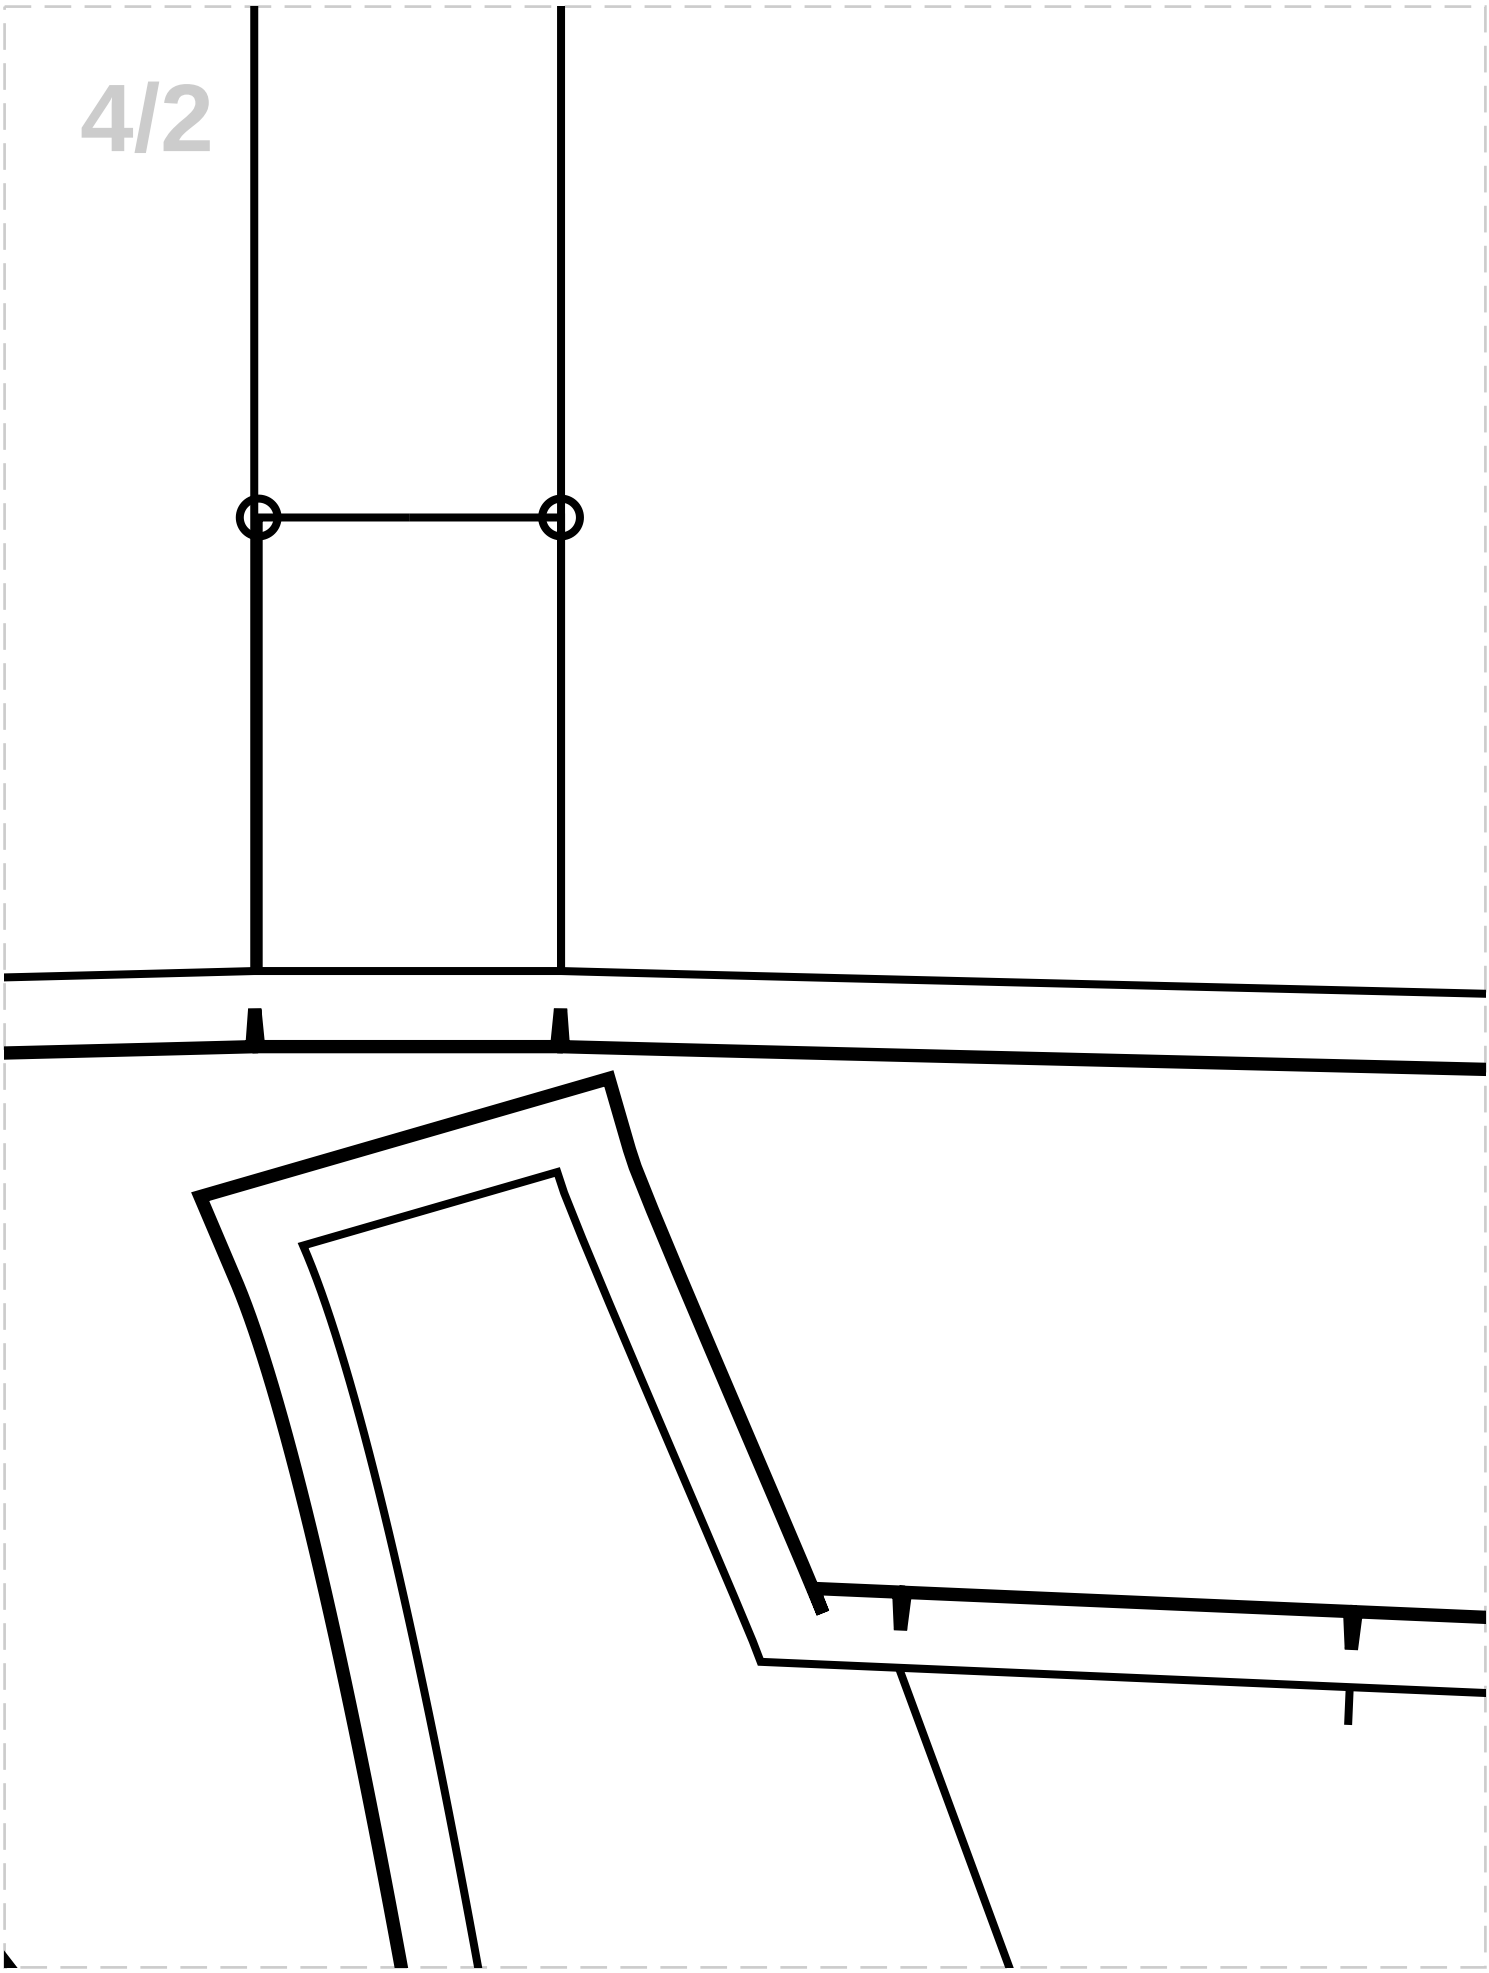

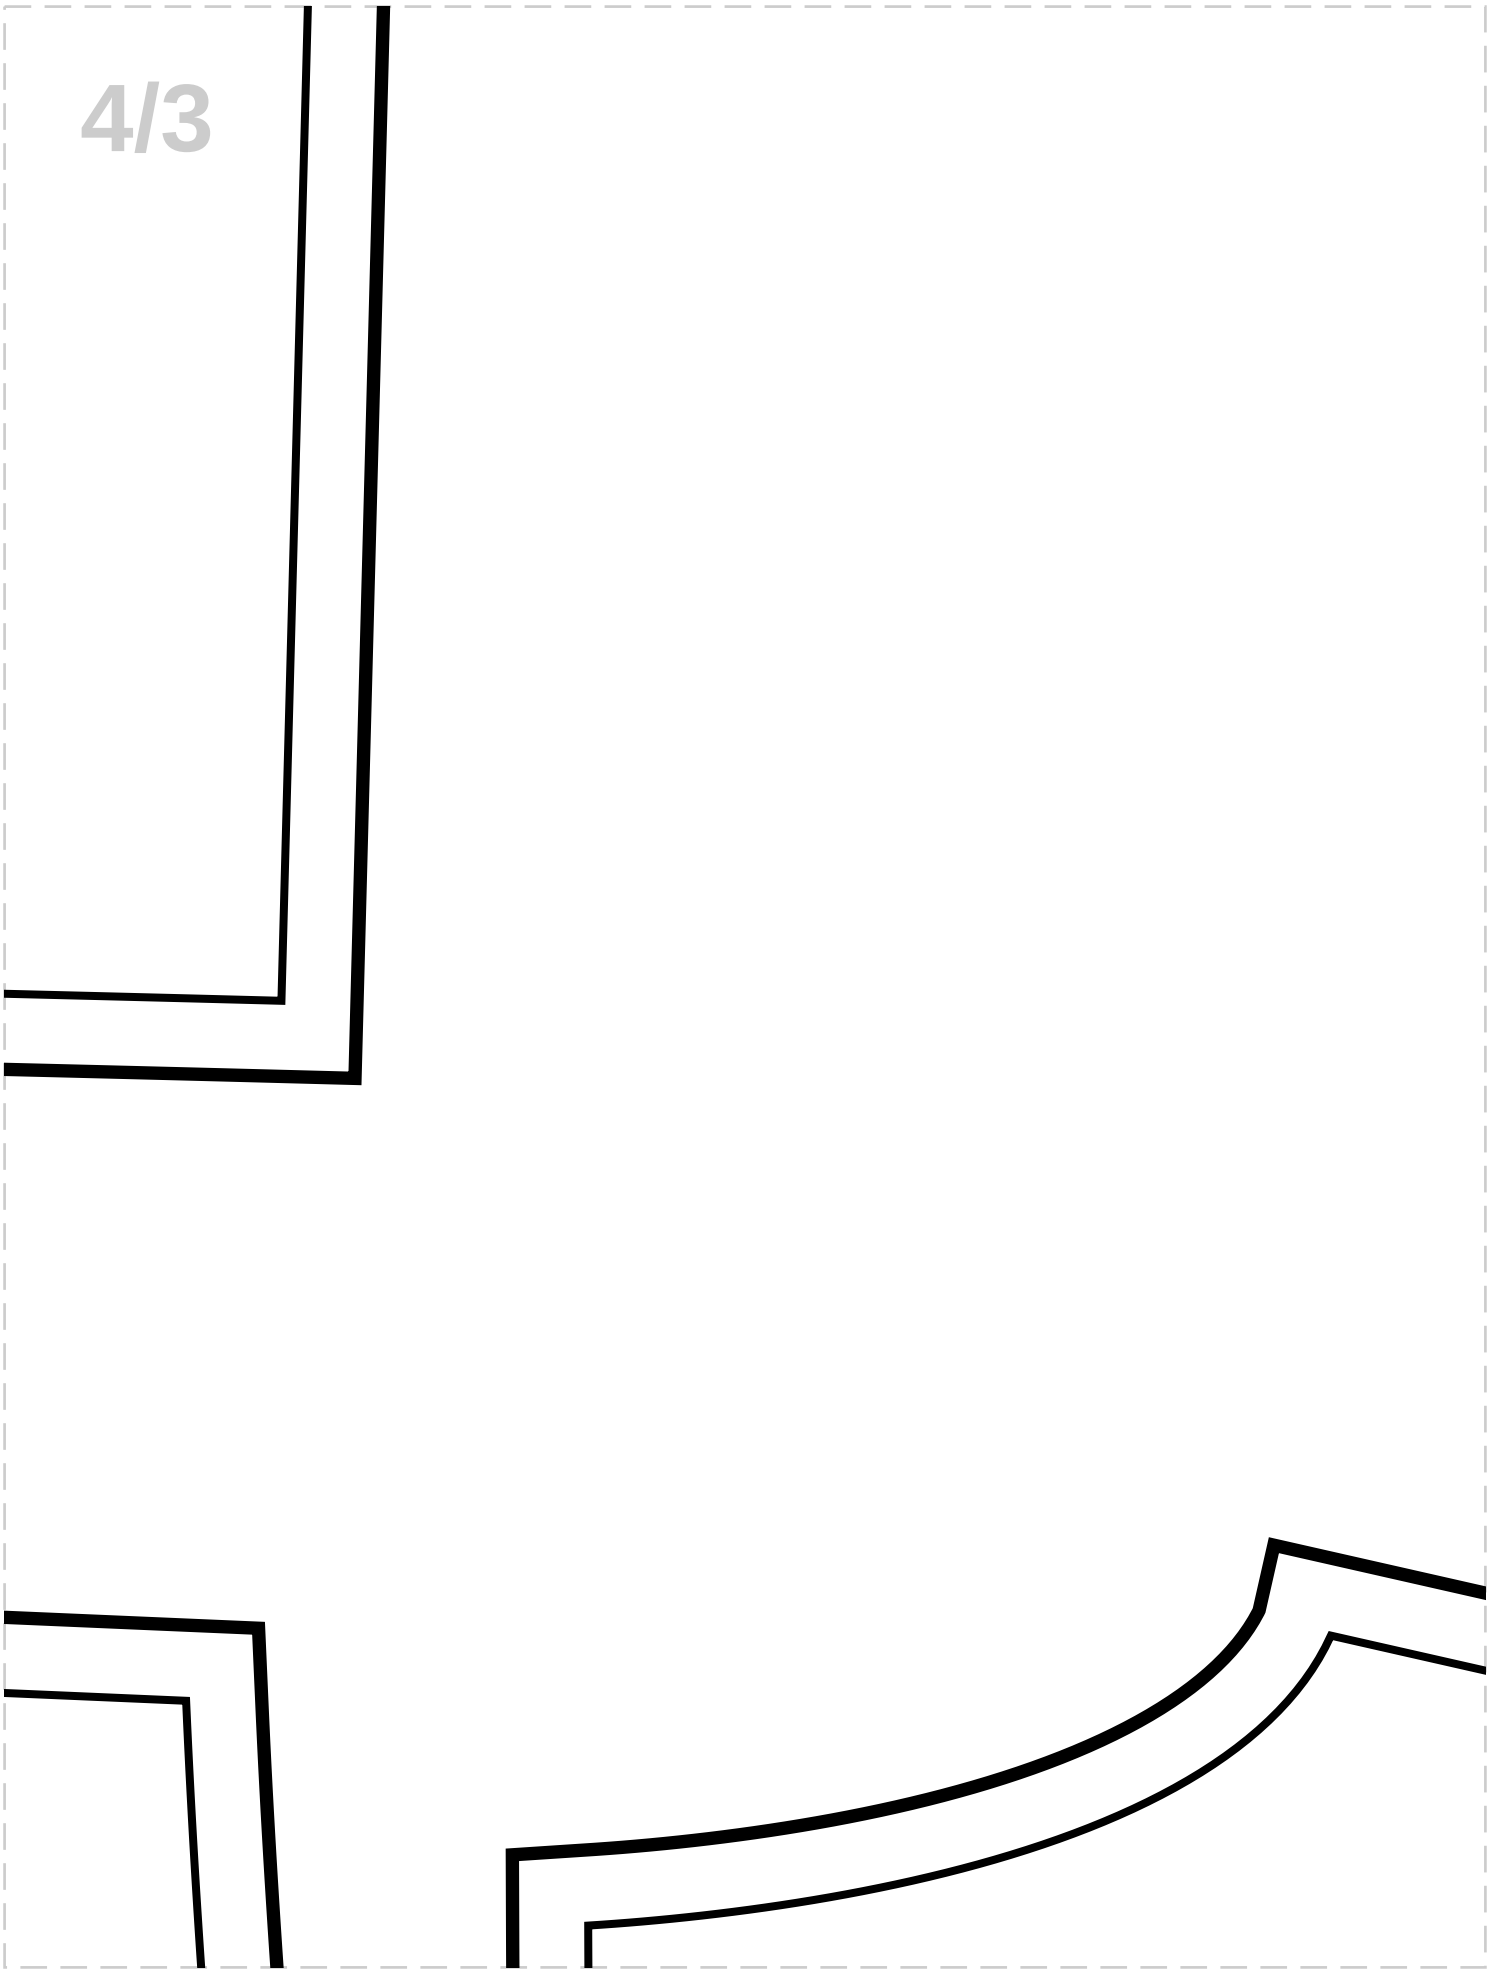

4/4

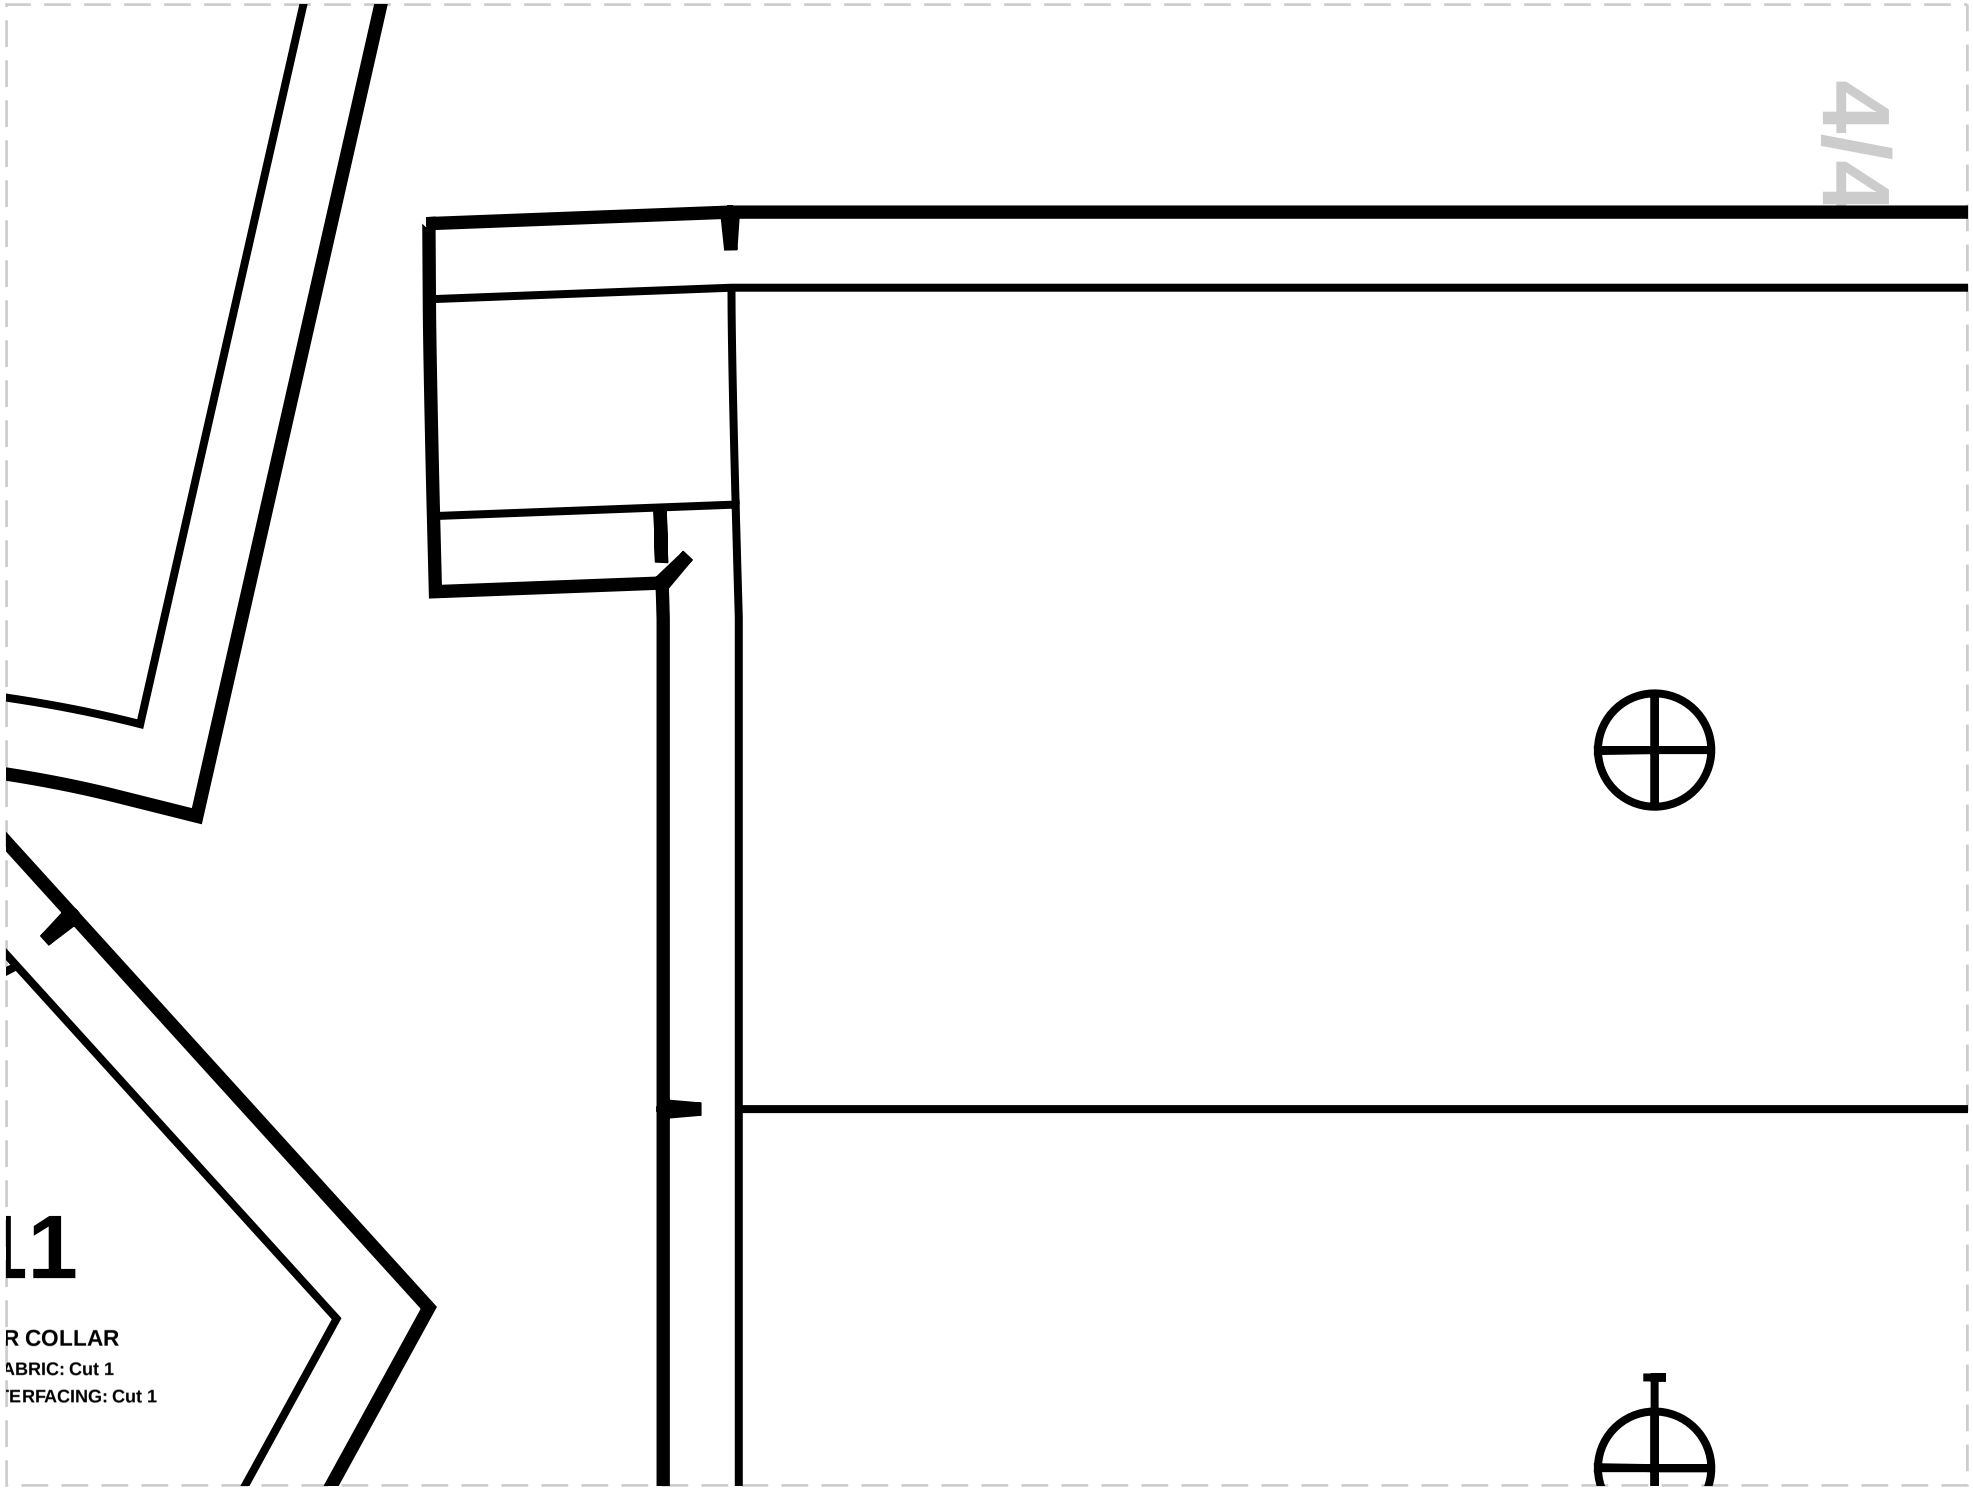

L1

R COLLAR


ABRIC: Cut 1


TERFACING: Cut 1


1

FRONT LINING


LINING: Cut 2

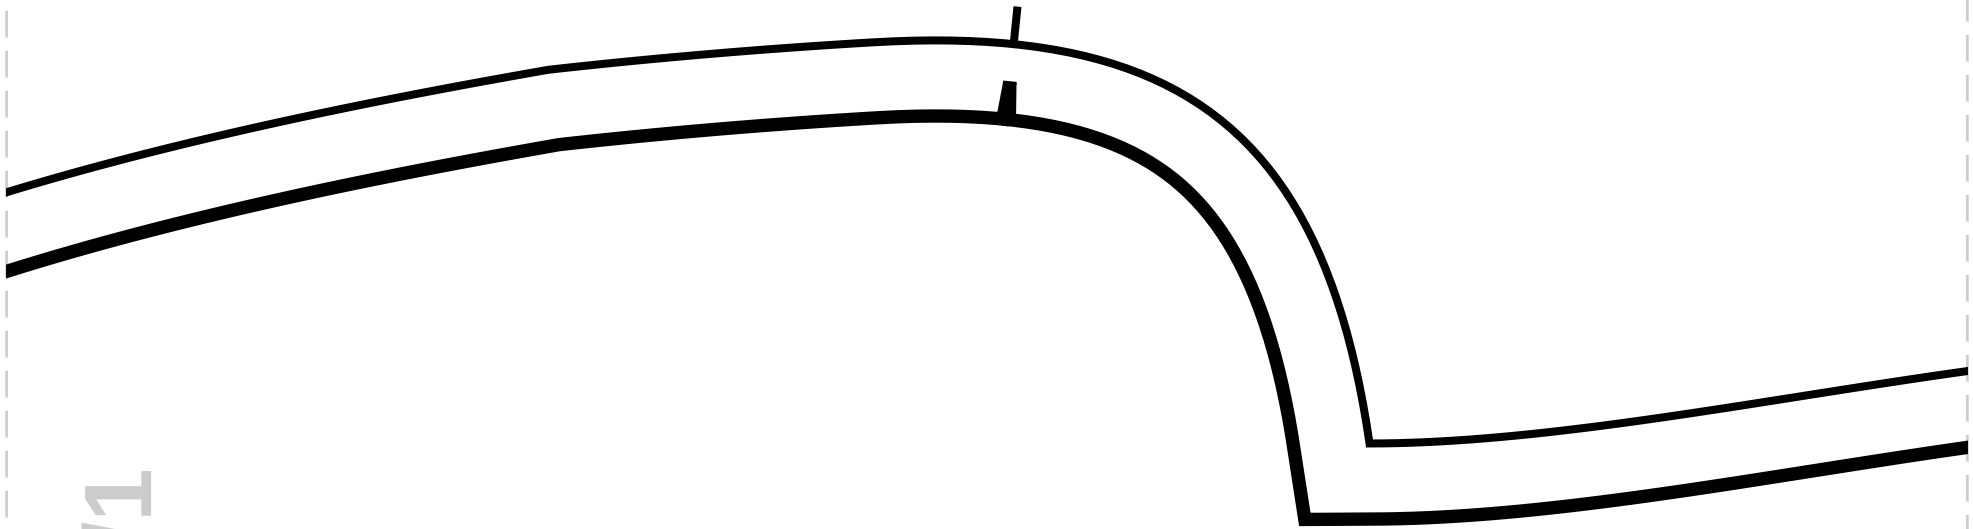


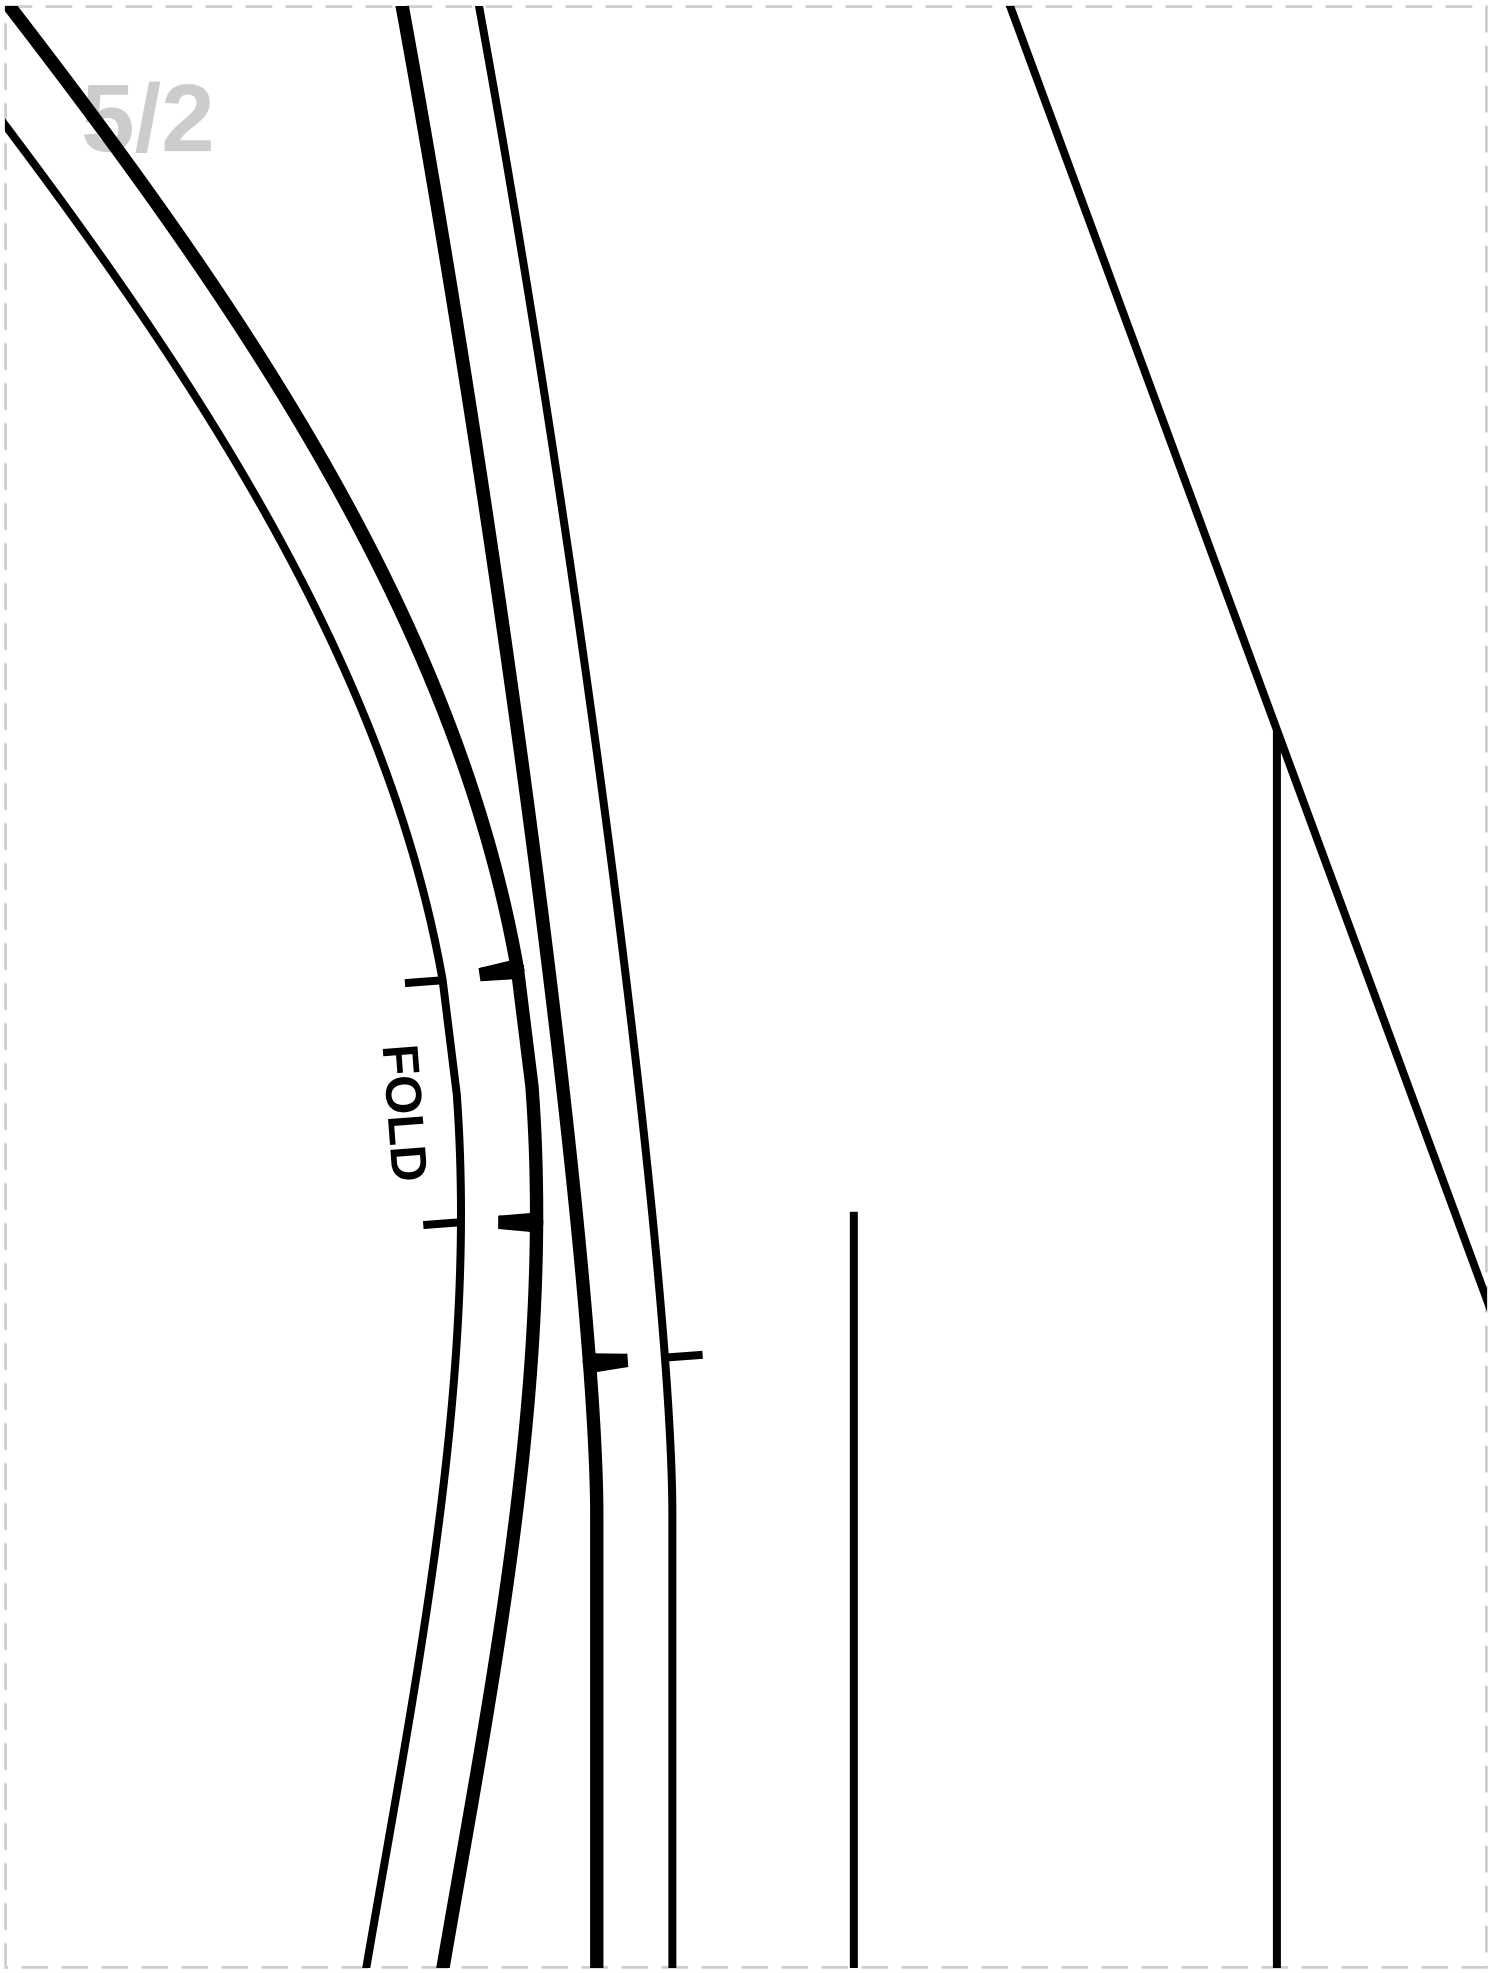
FOLD

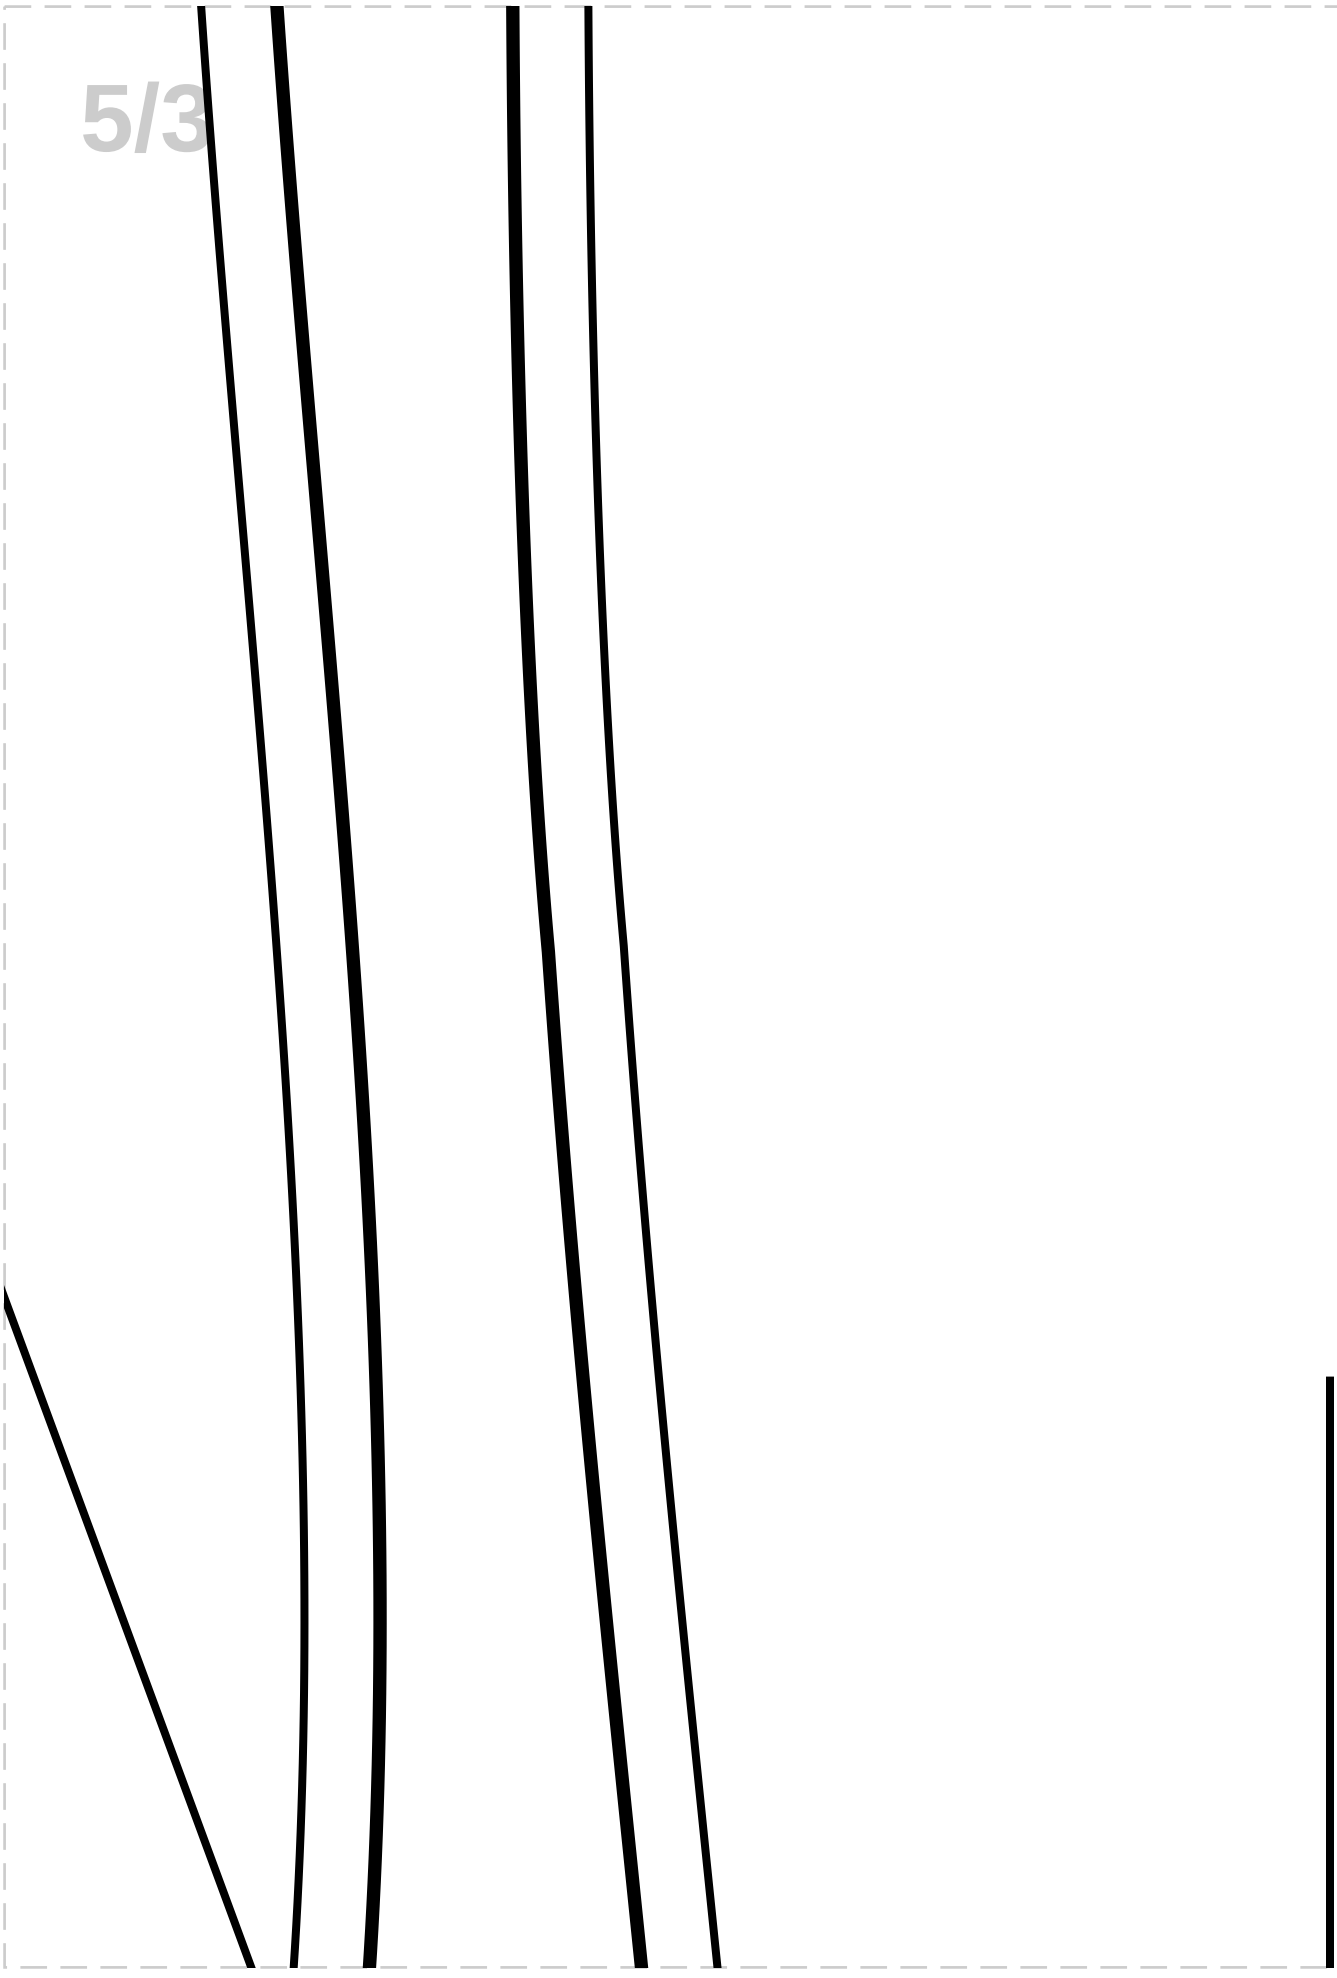



5/4

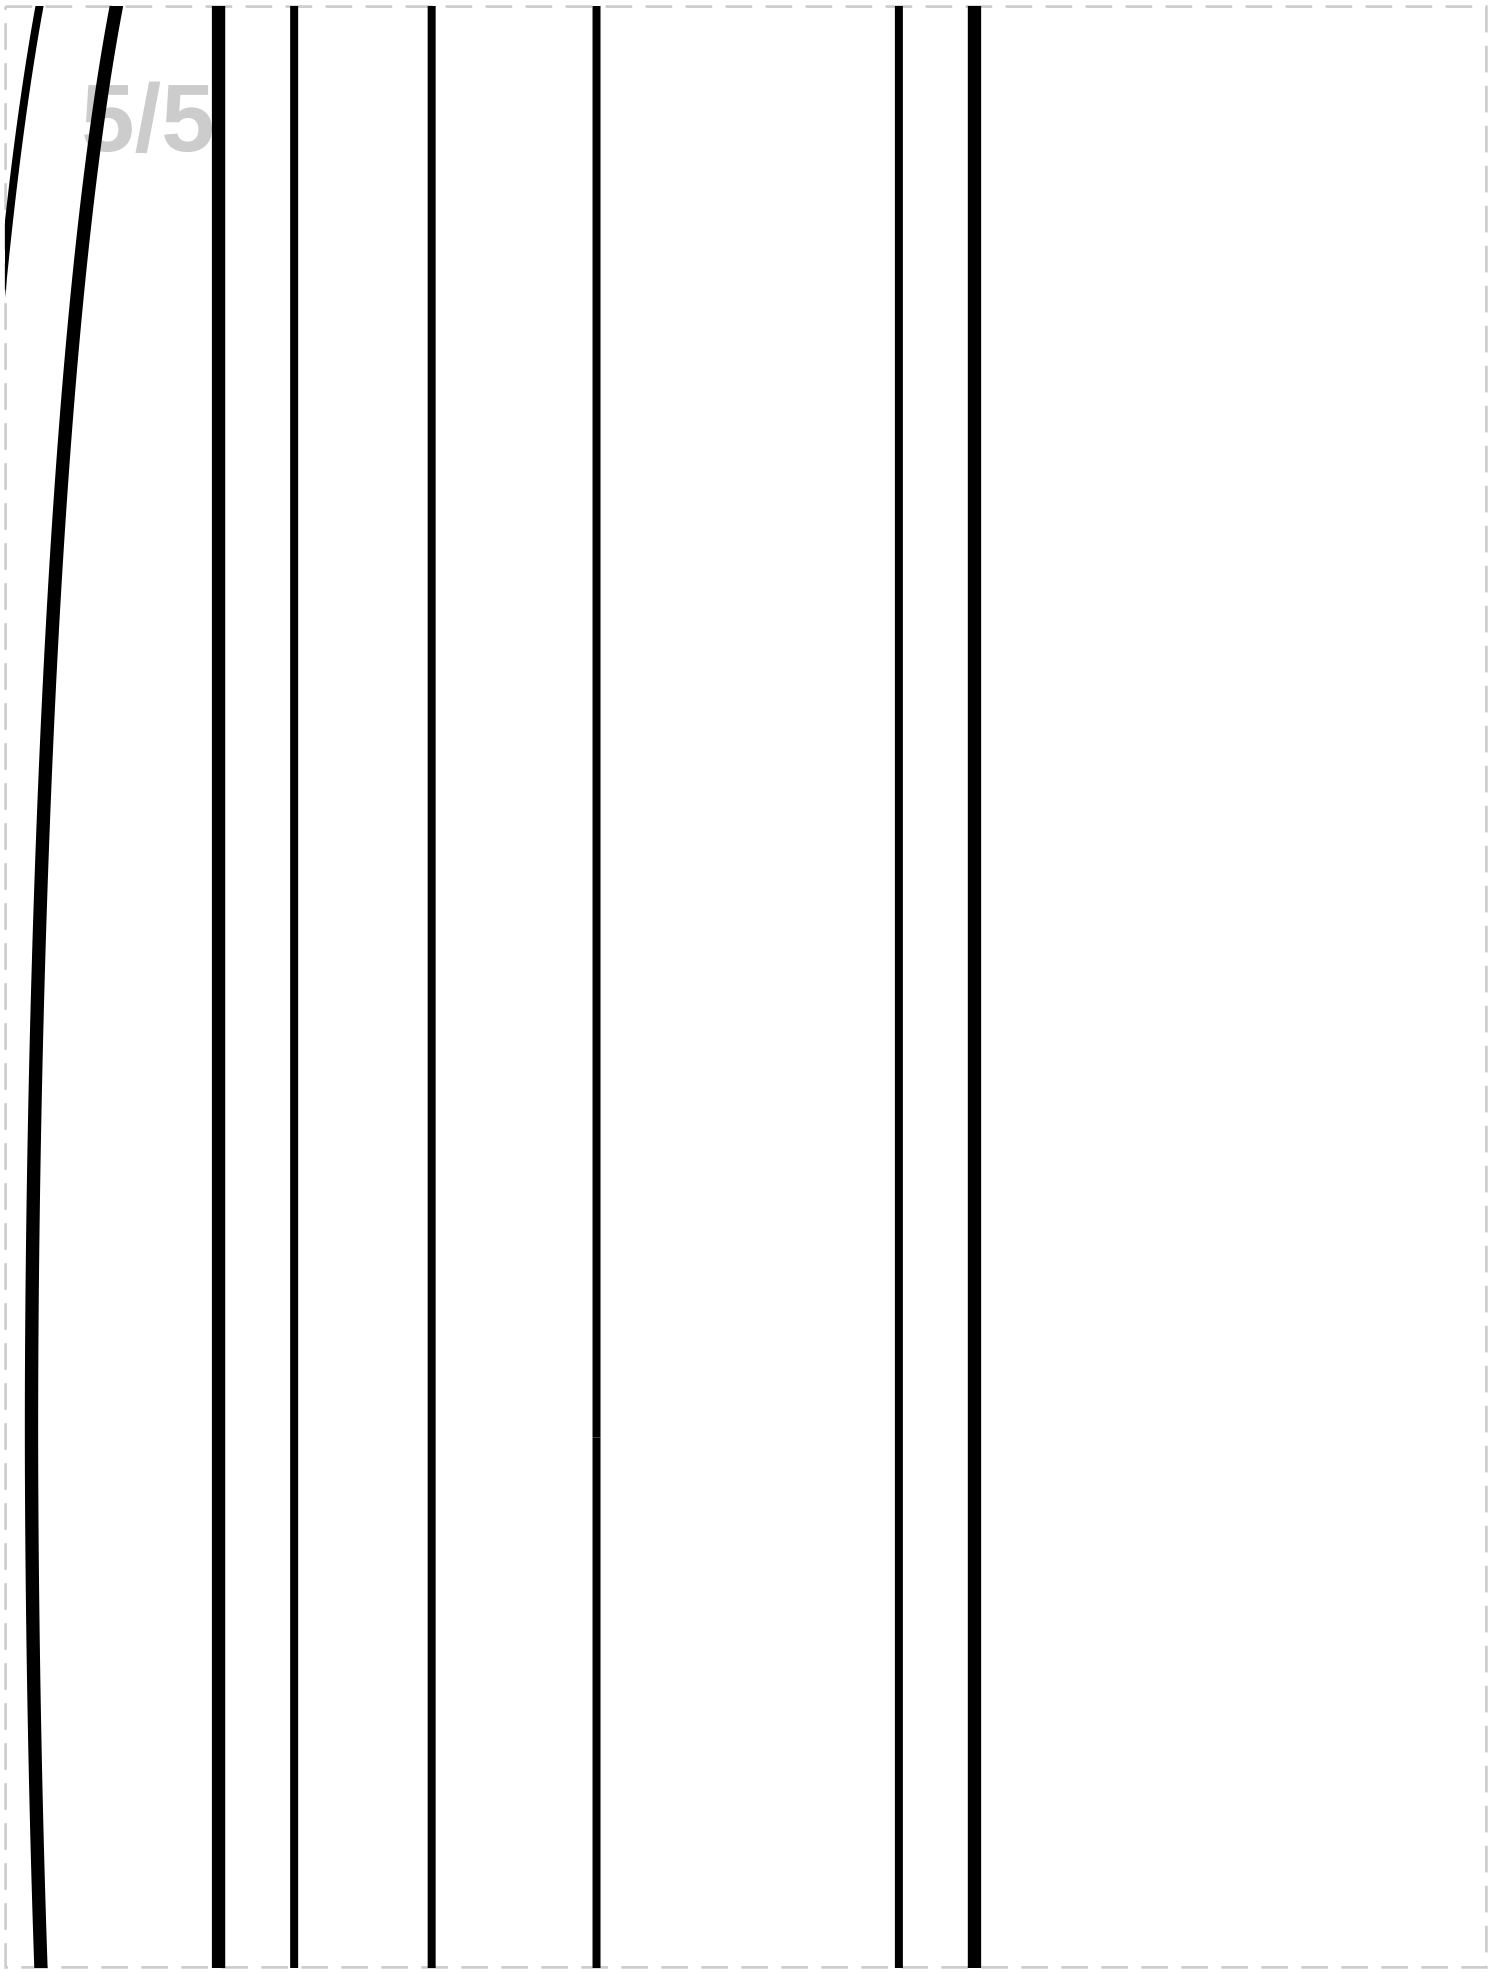


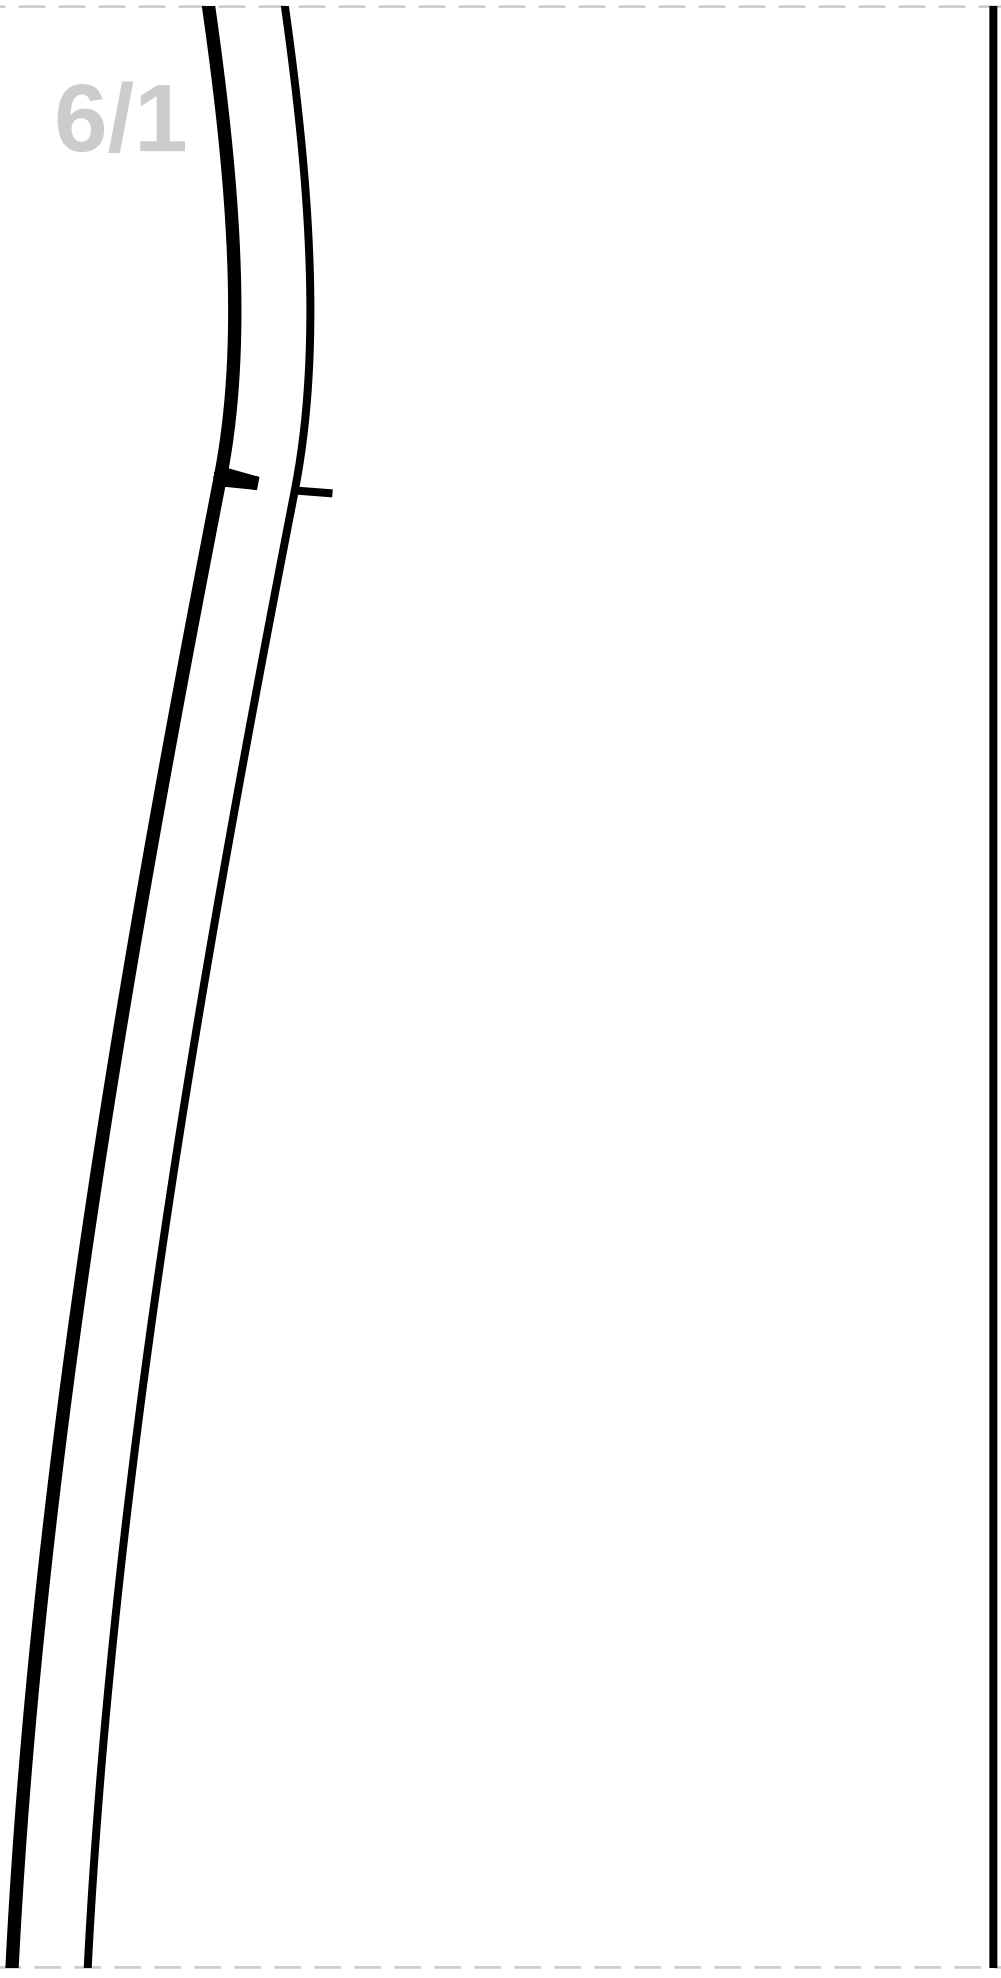

6/2

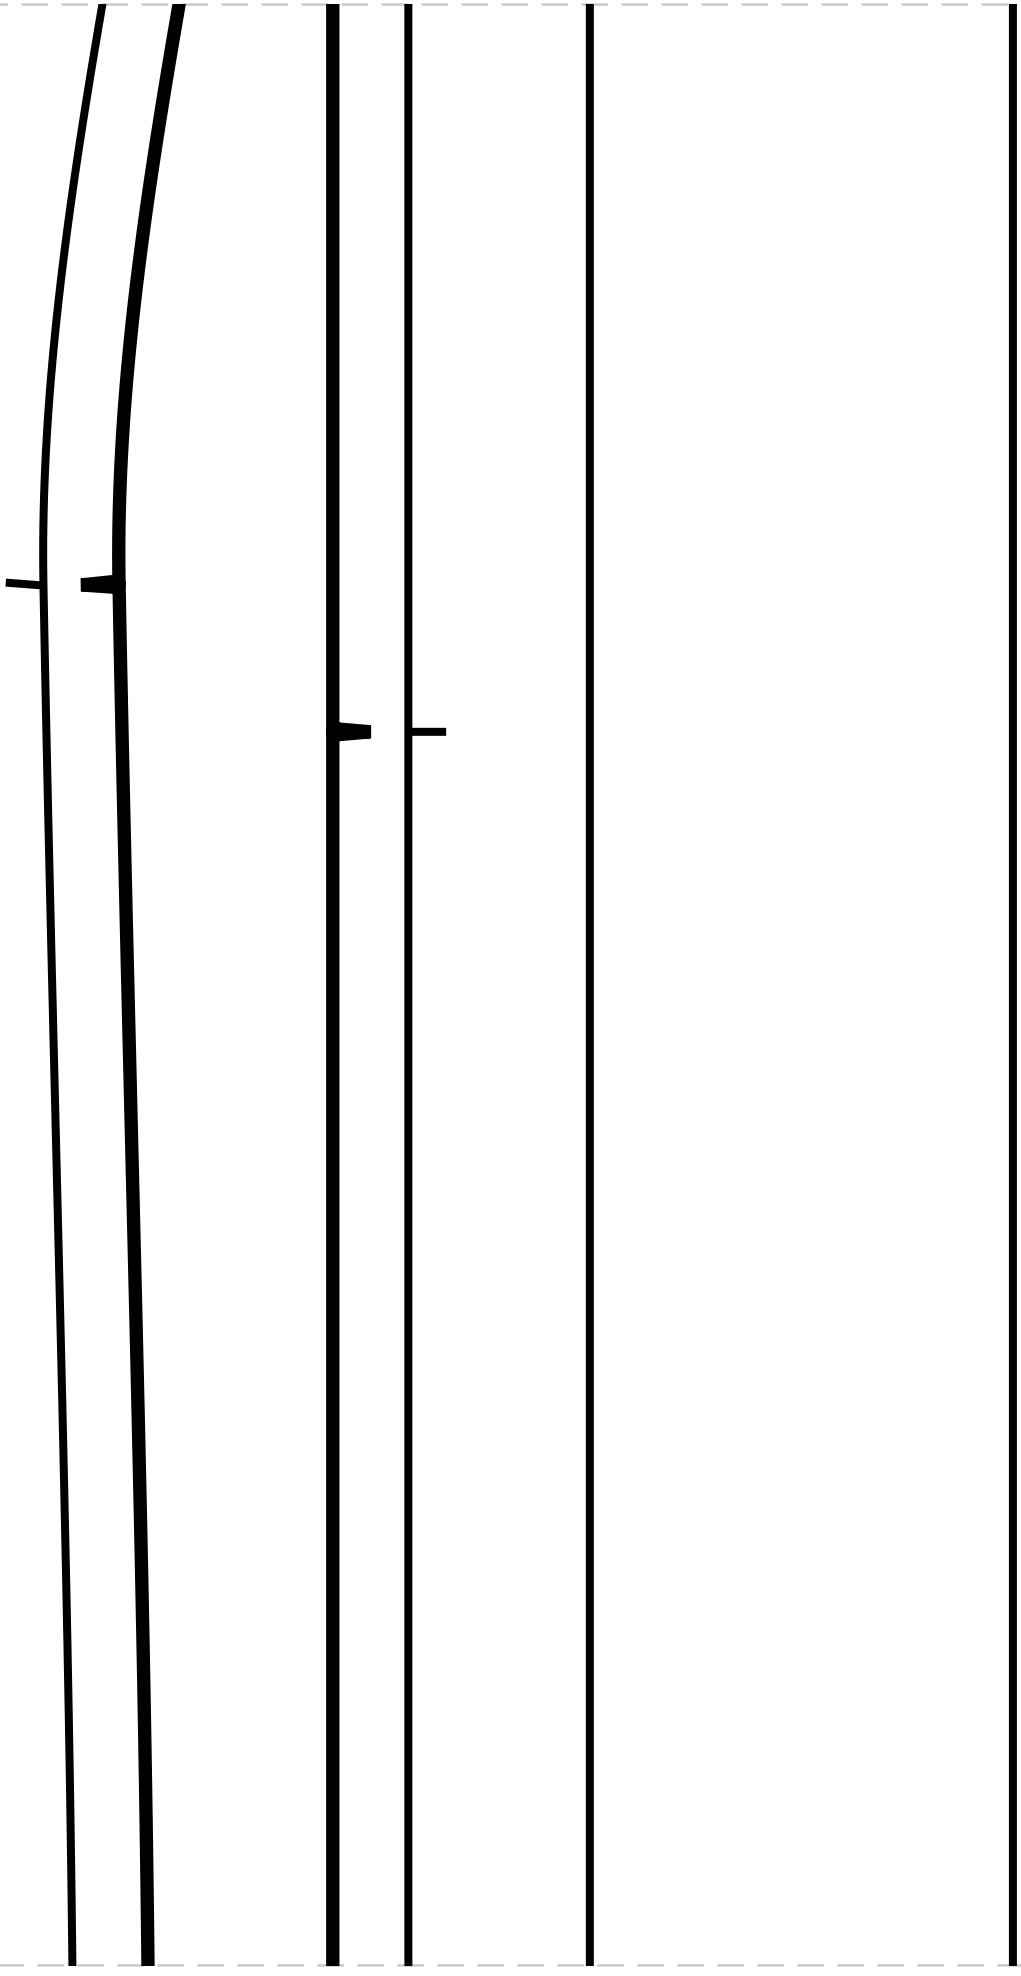

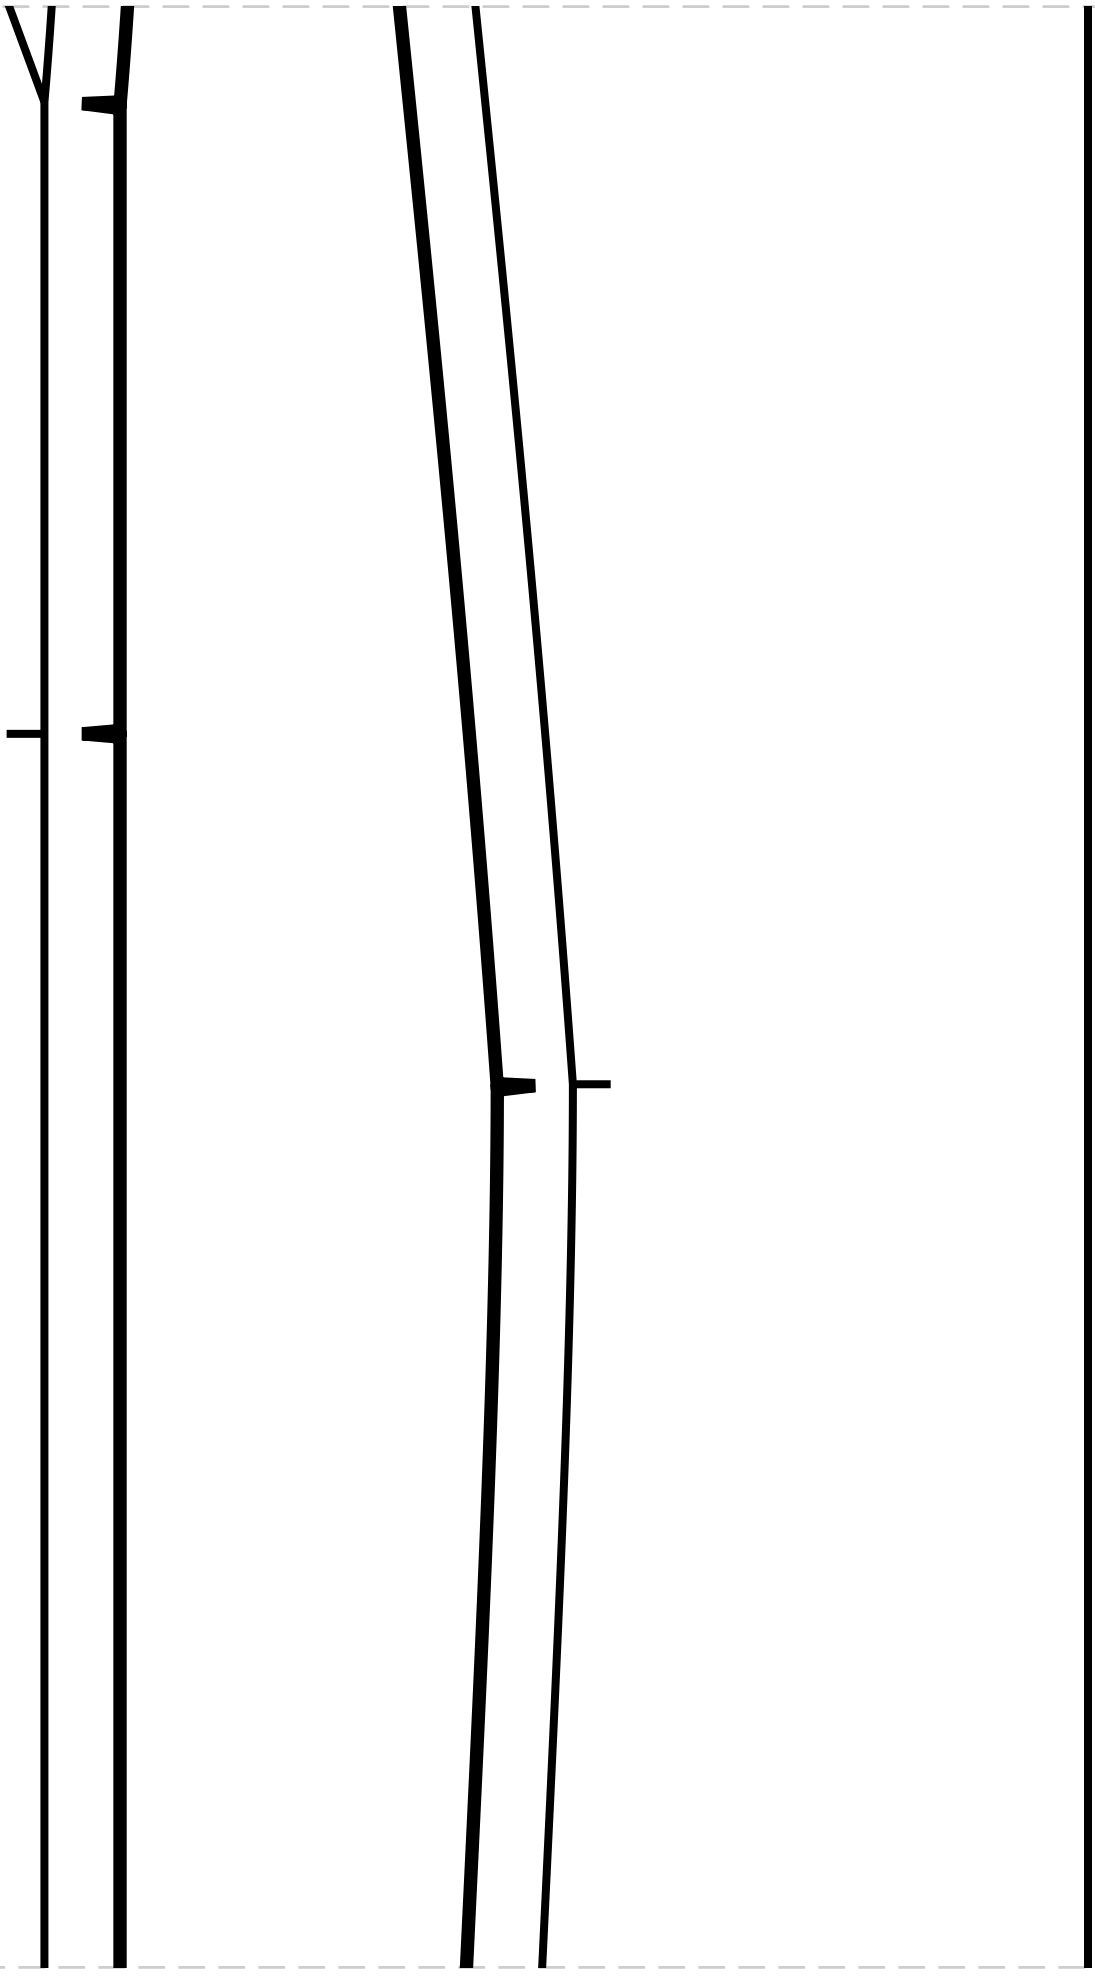

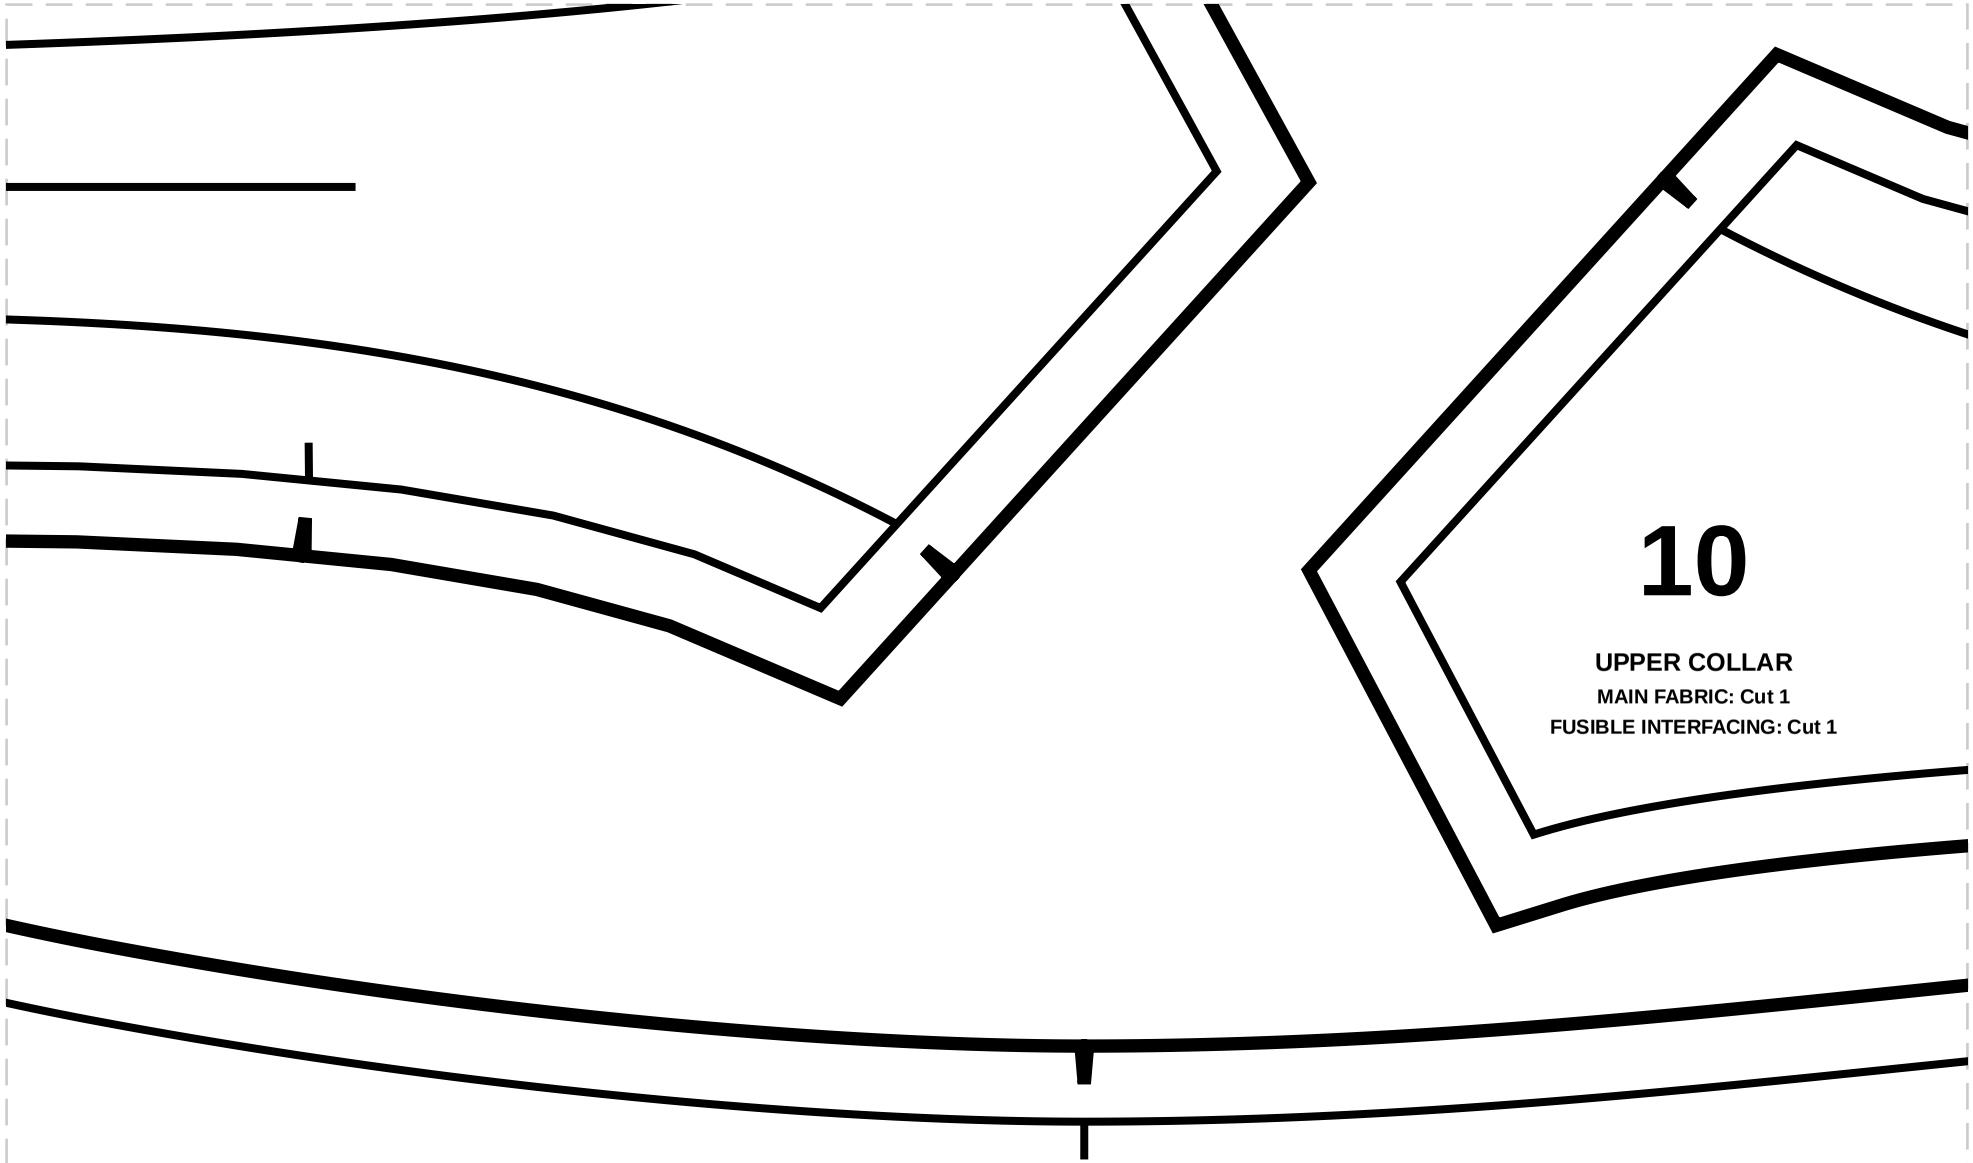



10

UPPER COLLAR

MAIN FABRIC: Cut 1

FUSIBLE INTERFACING: Cut 1

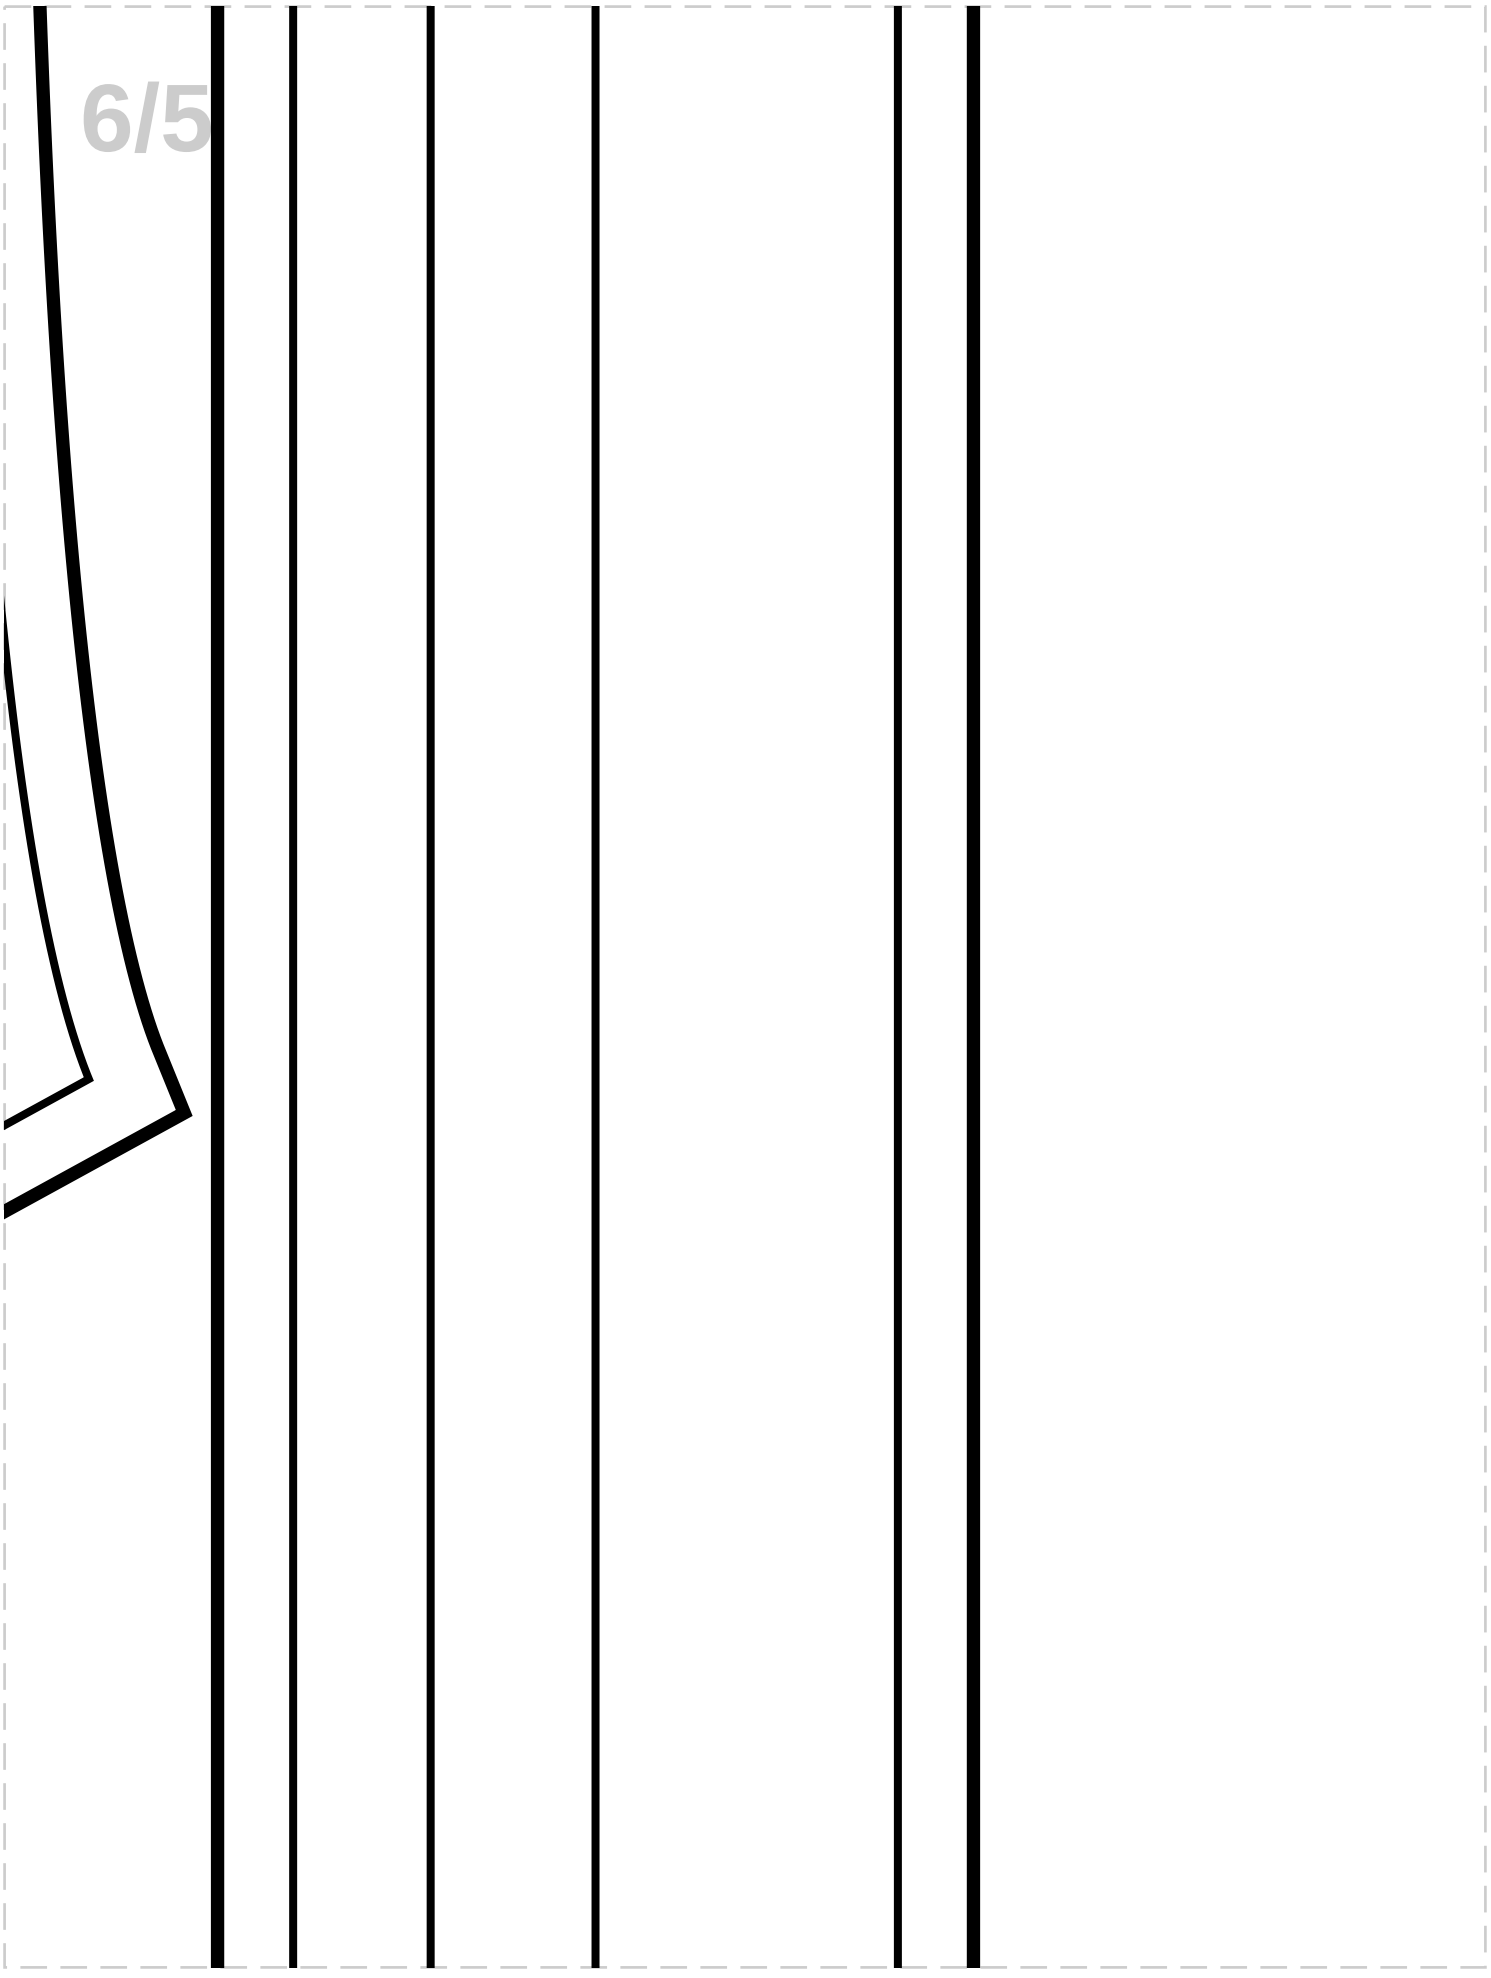

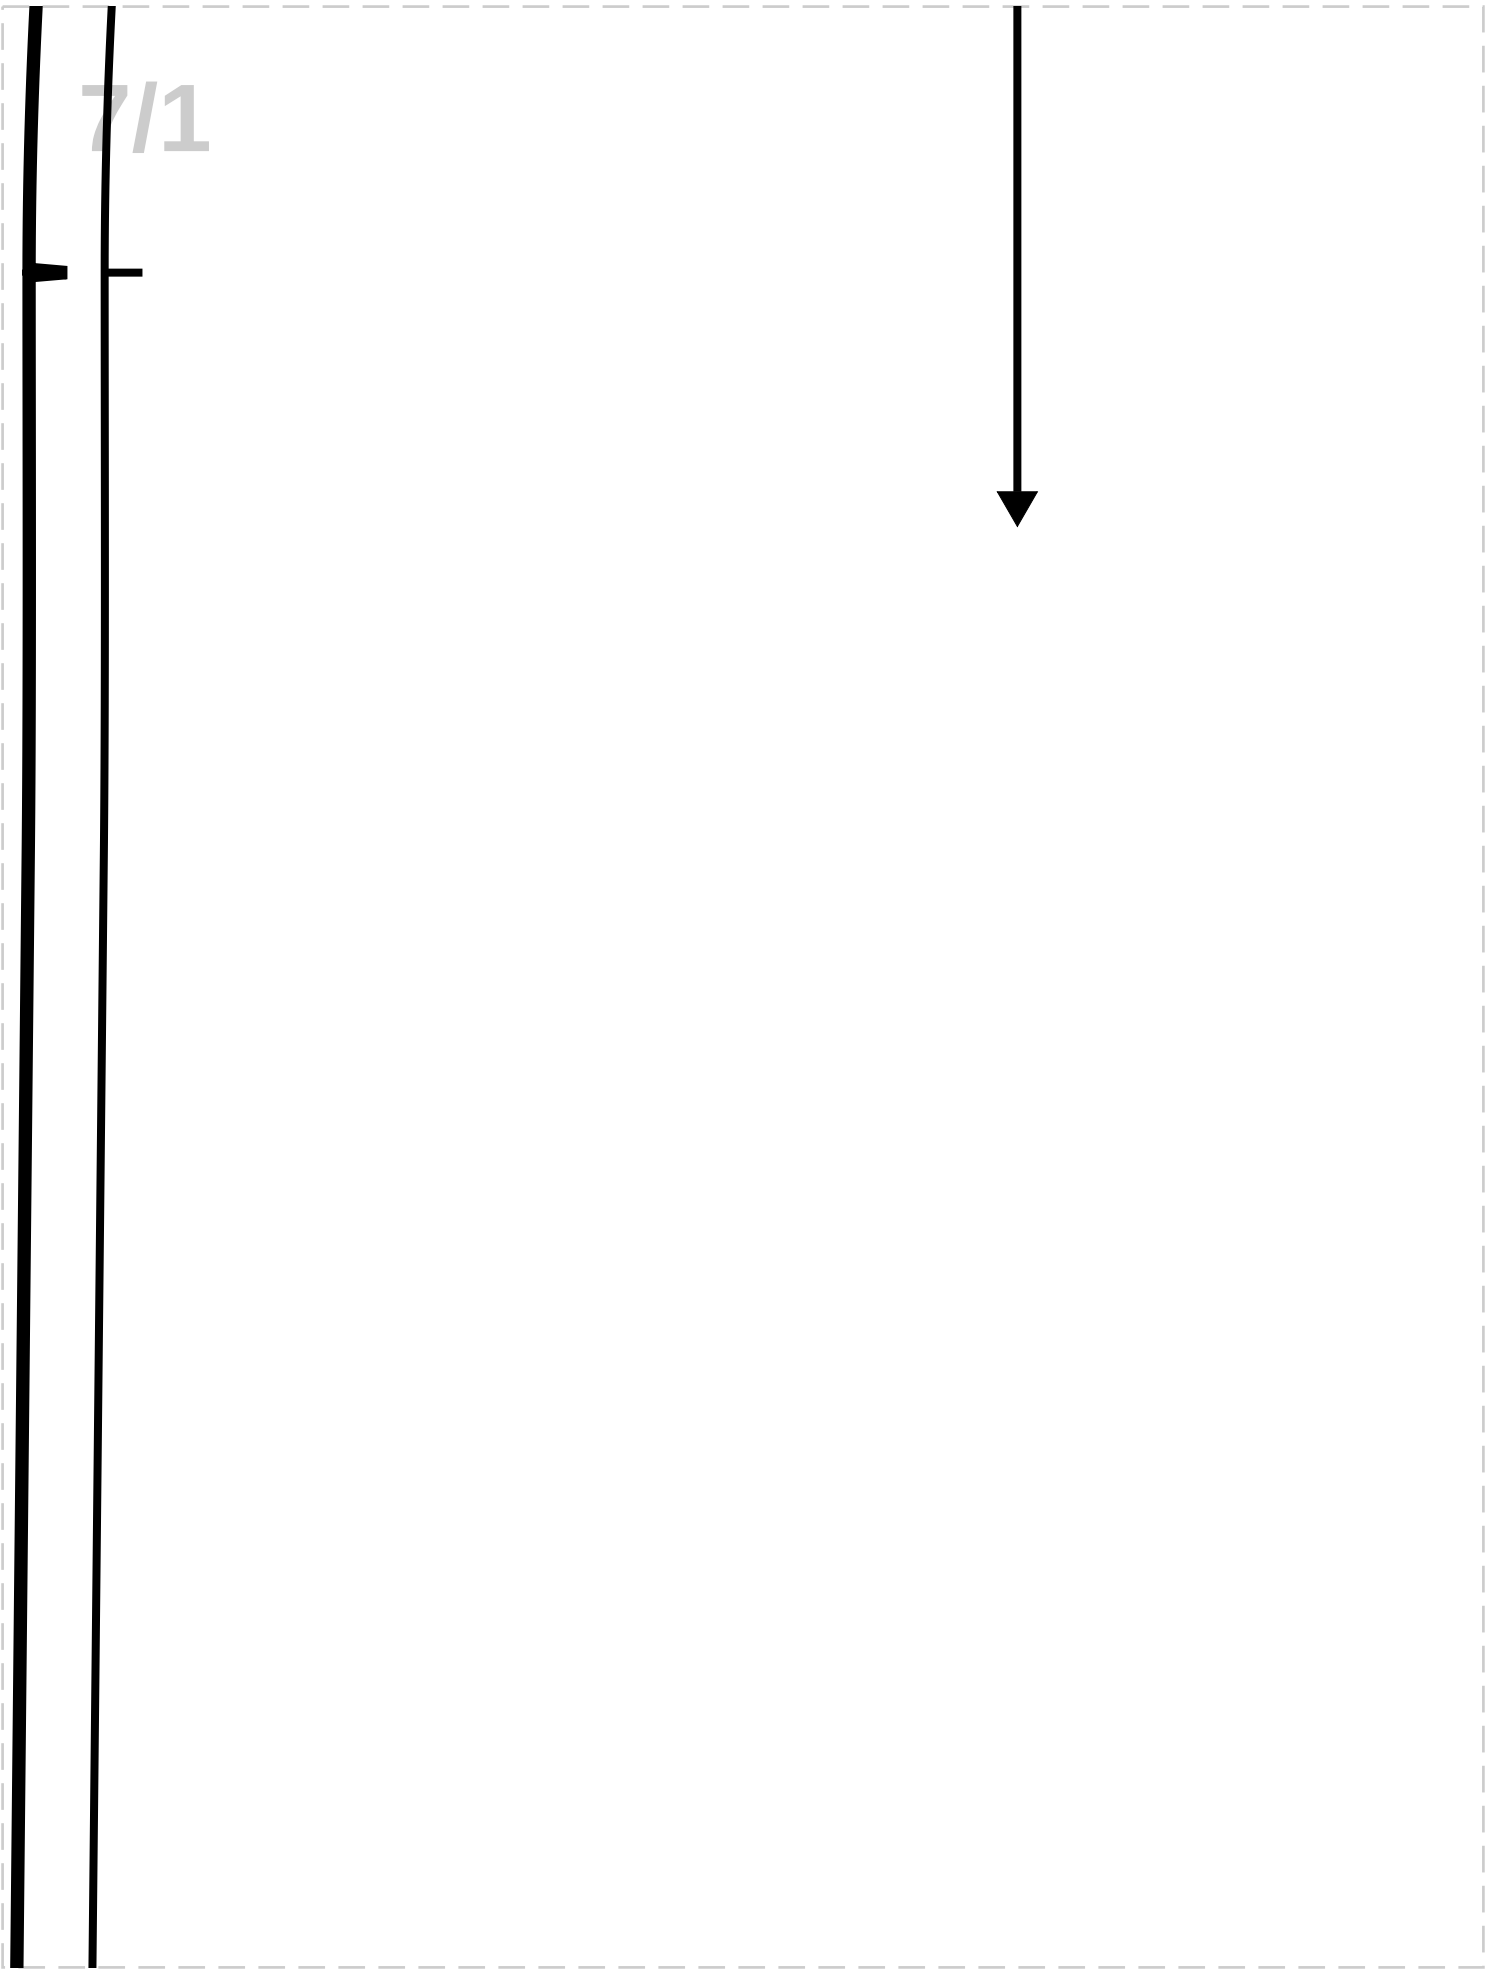

7/1

8

FRONT NECK FACING

MAIN FABRIC: Cut 2

FUSIBLE INTERFACING: Cut 2

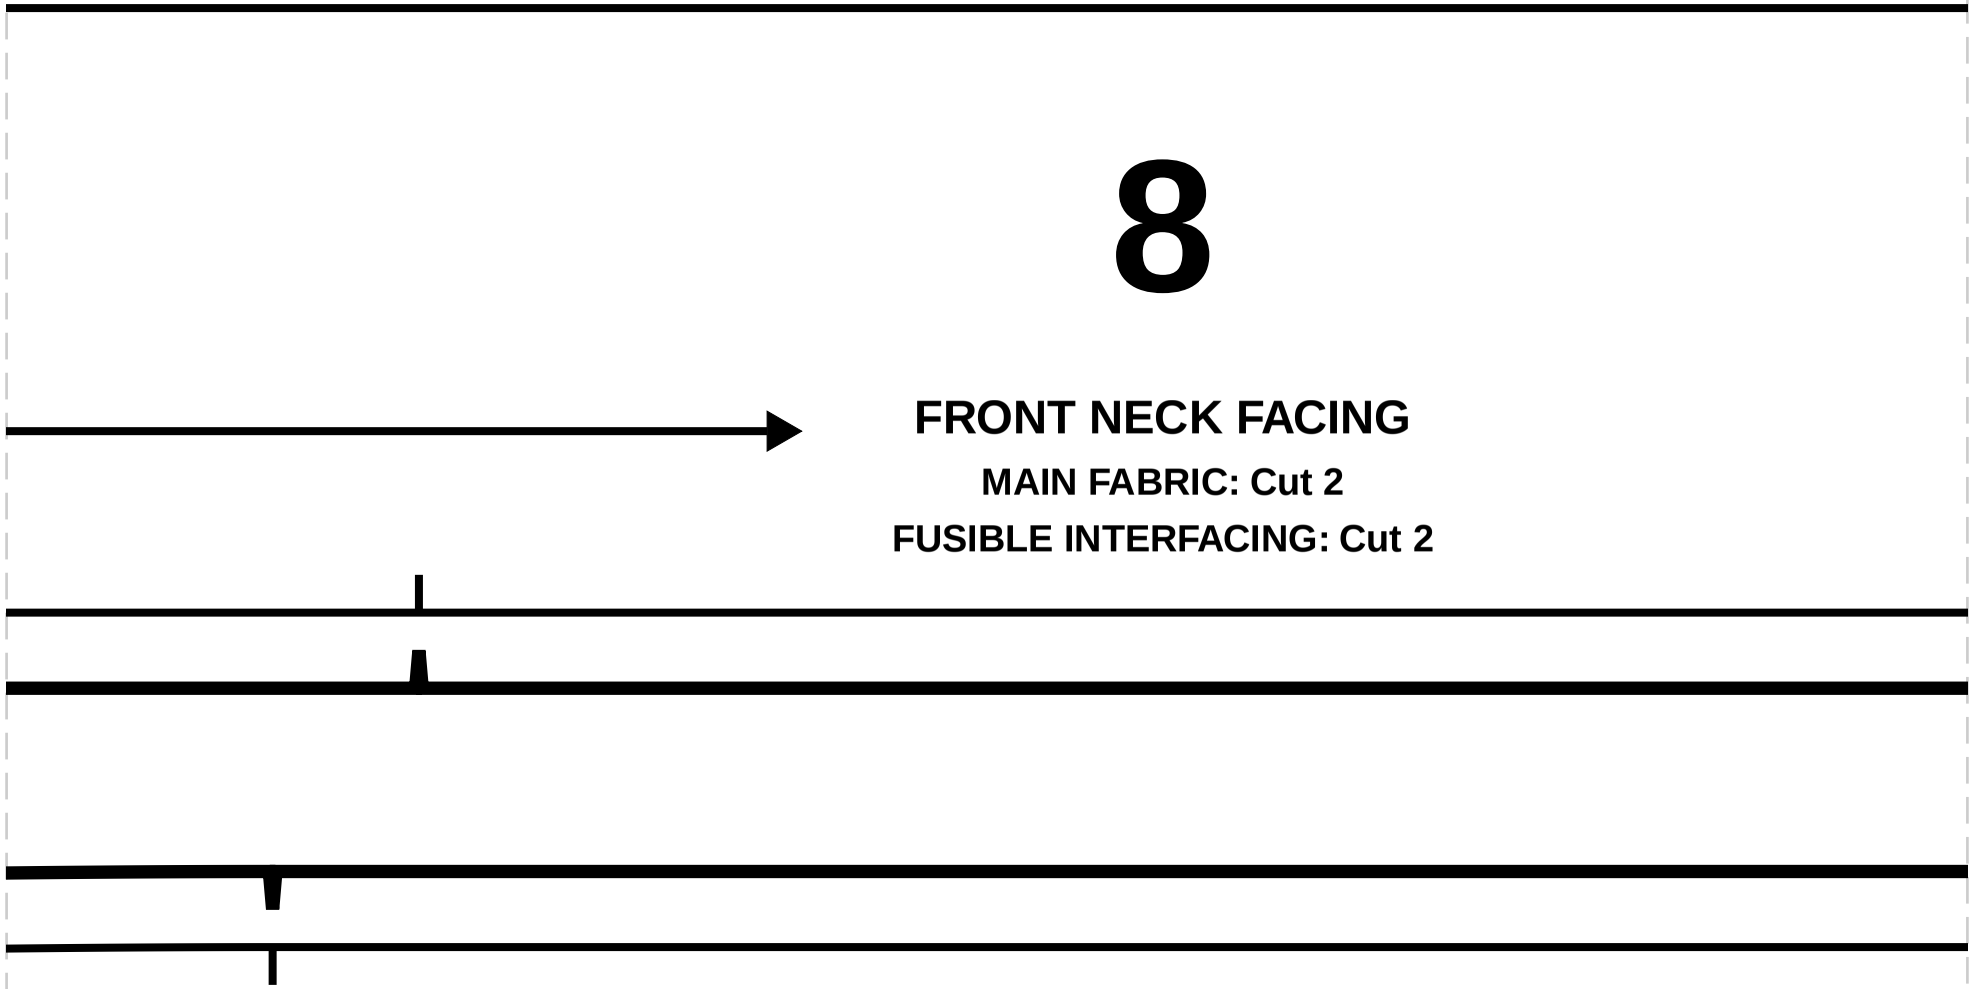



4


CENTER BACK


MAIN FABRIC: Cut 2


FUSIBLE INTERFACING: Cut

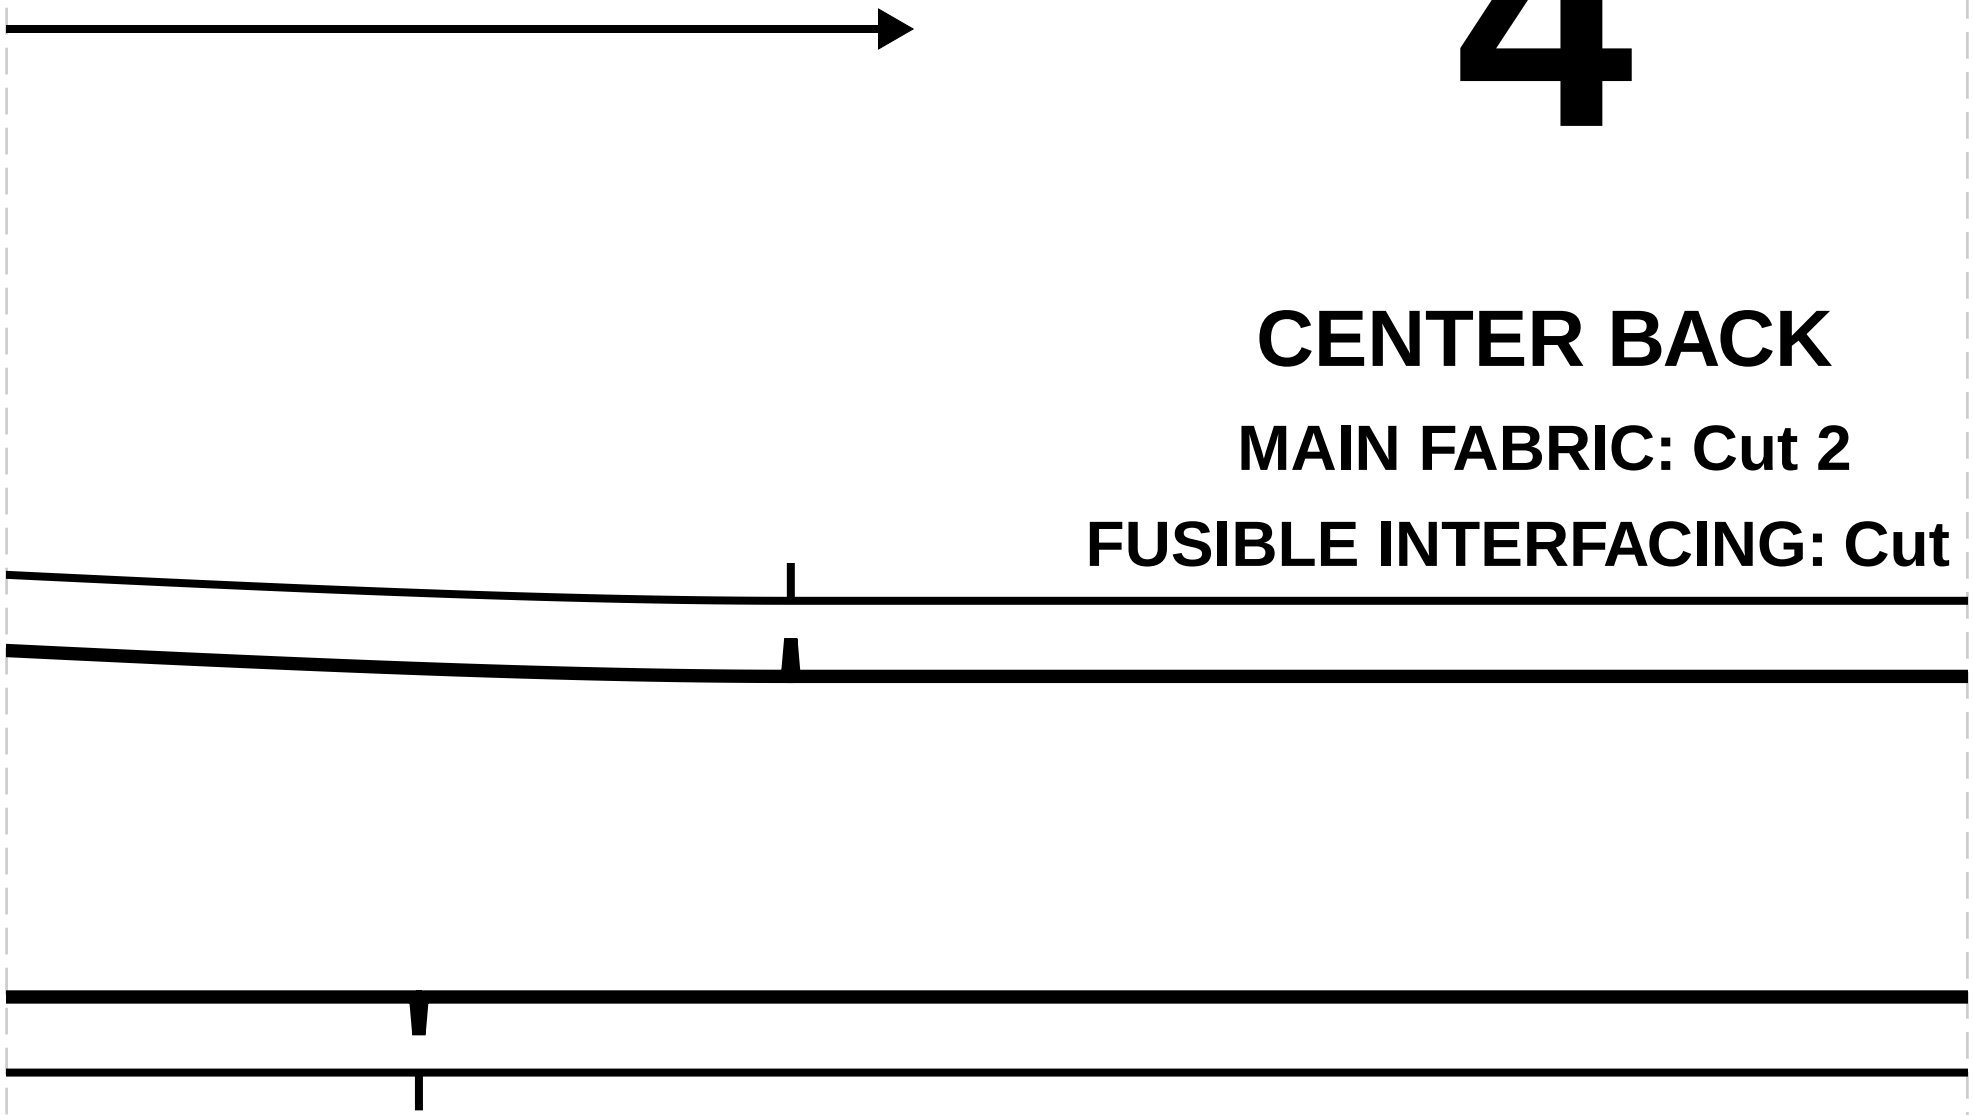


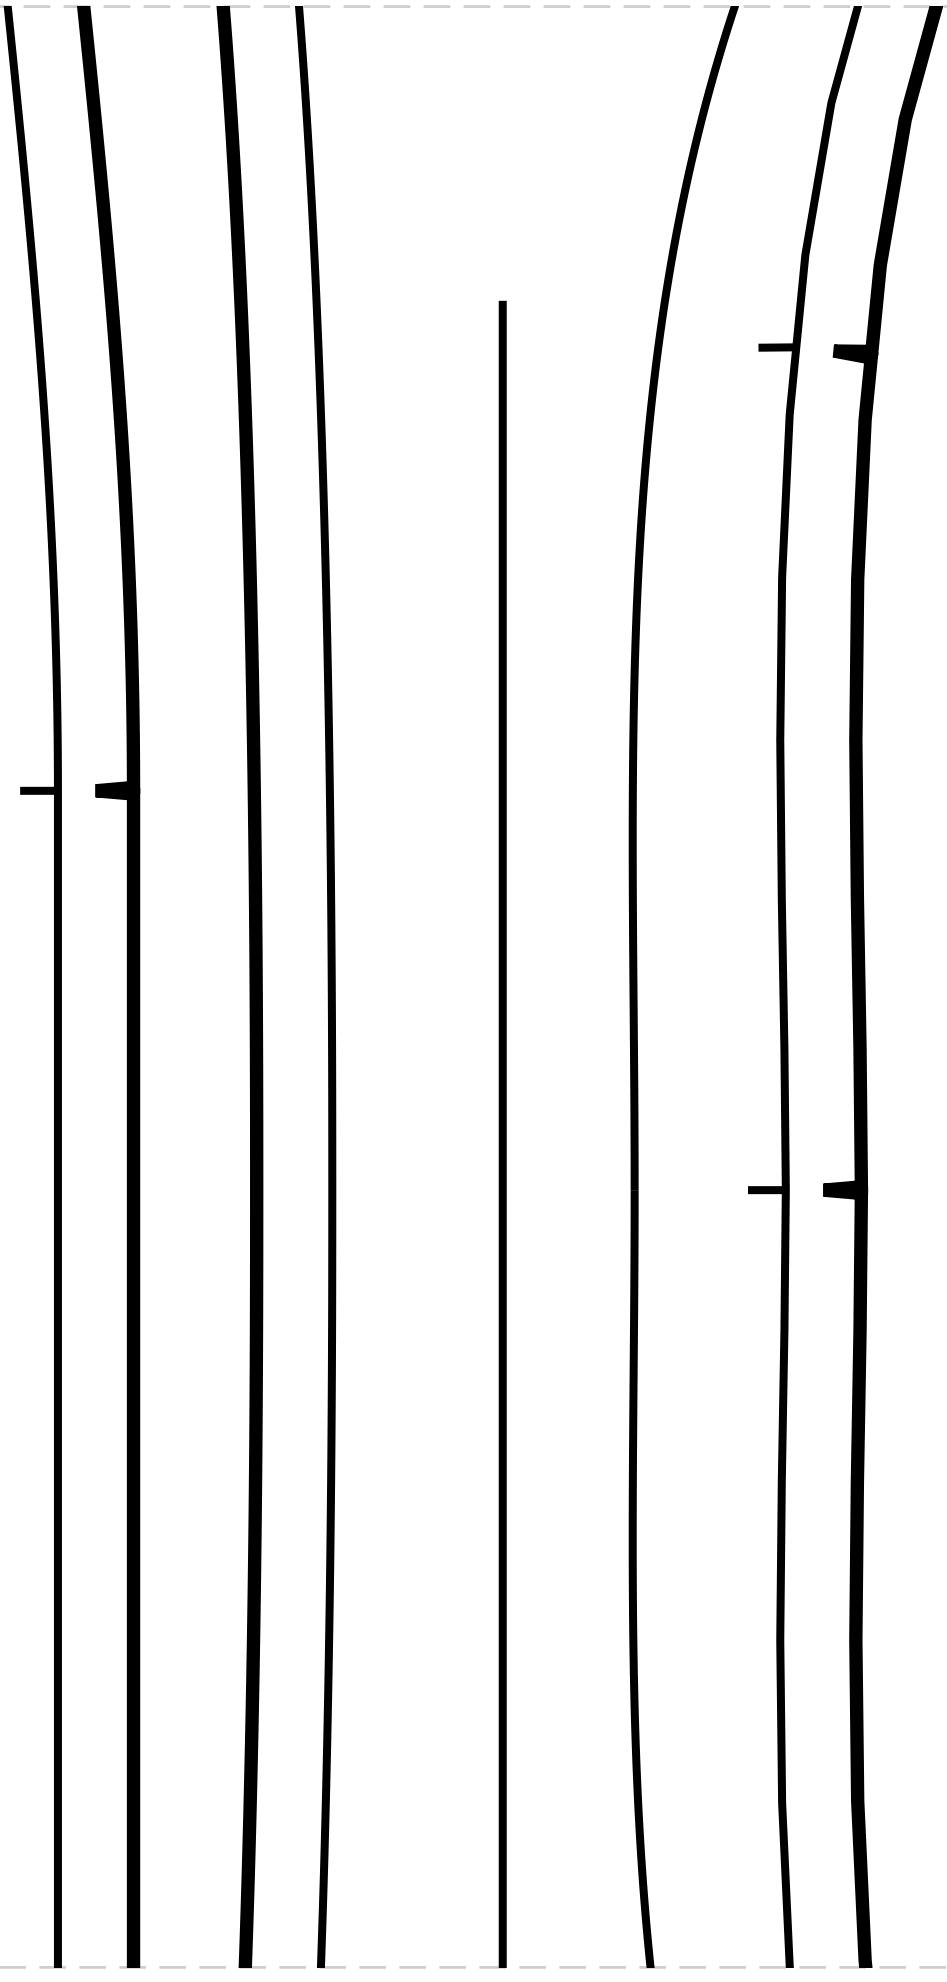


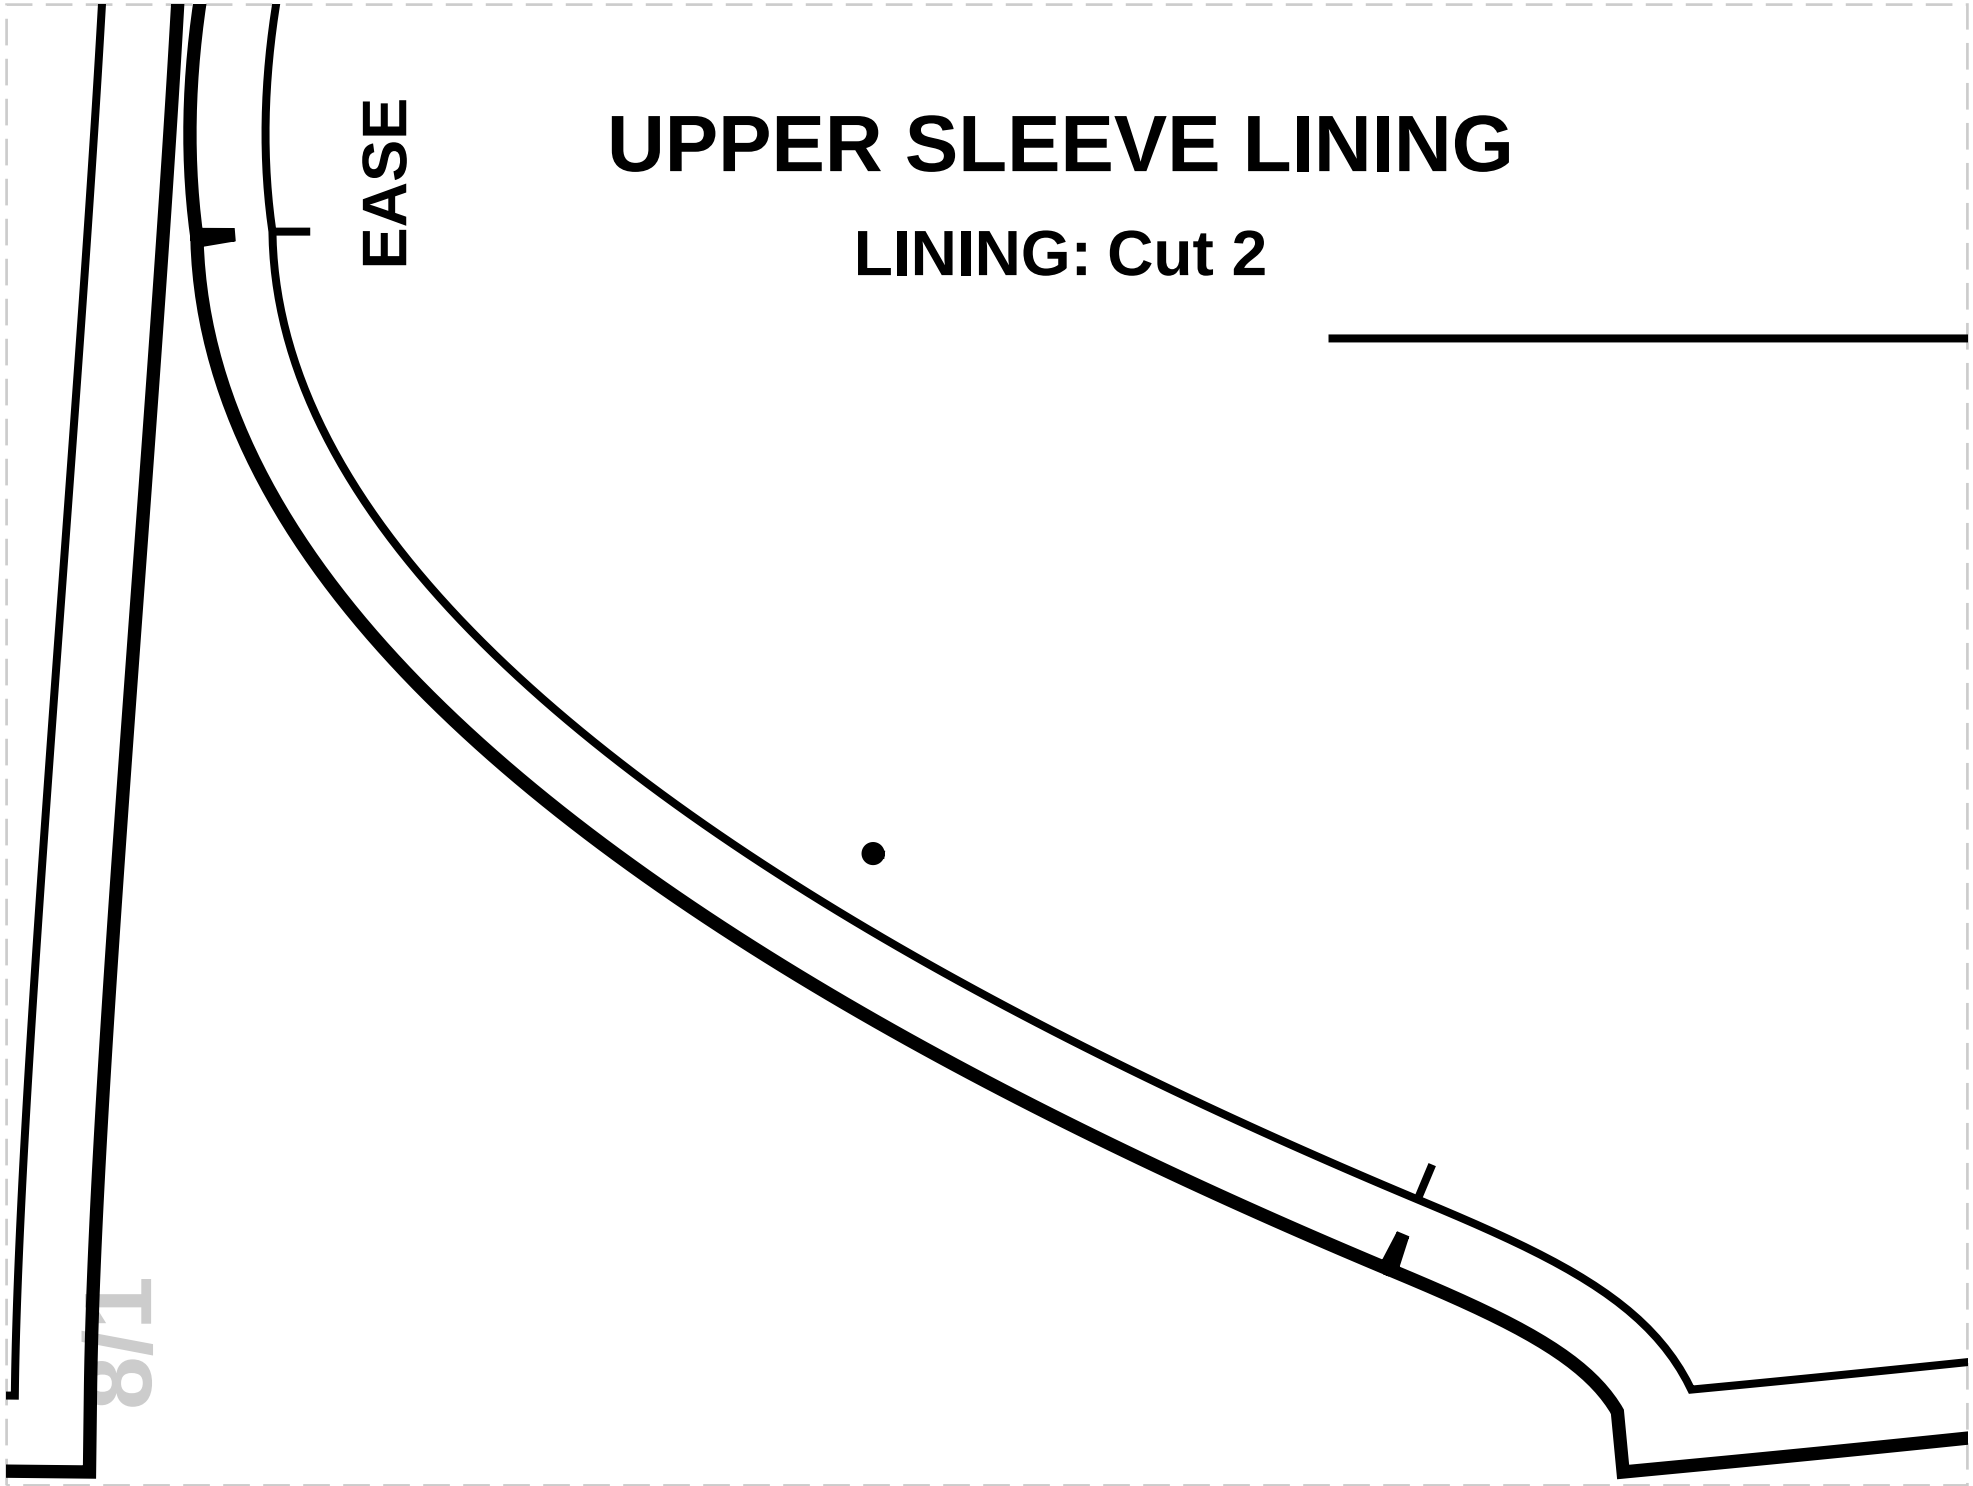

EASE
UPPER SLEEVE LINING
LINING: Cut 2
T/8

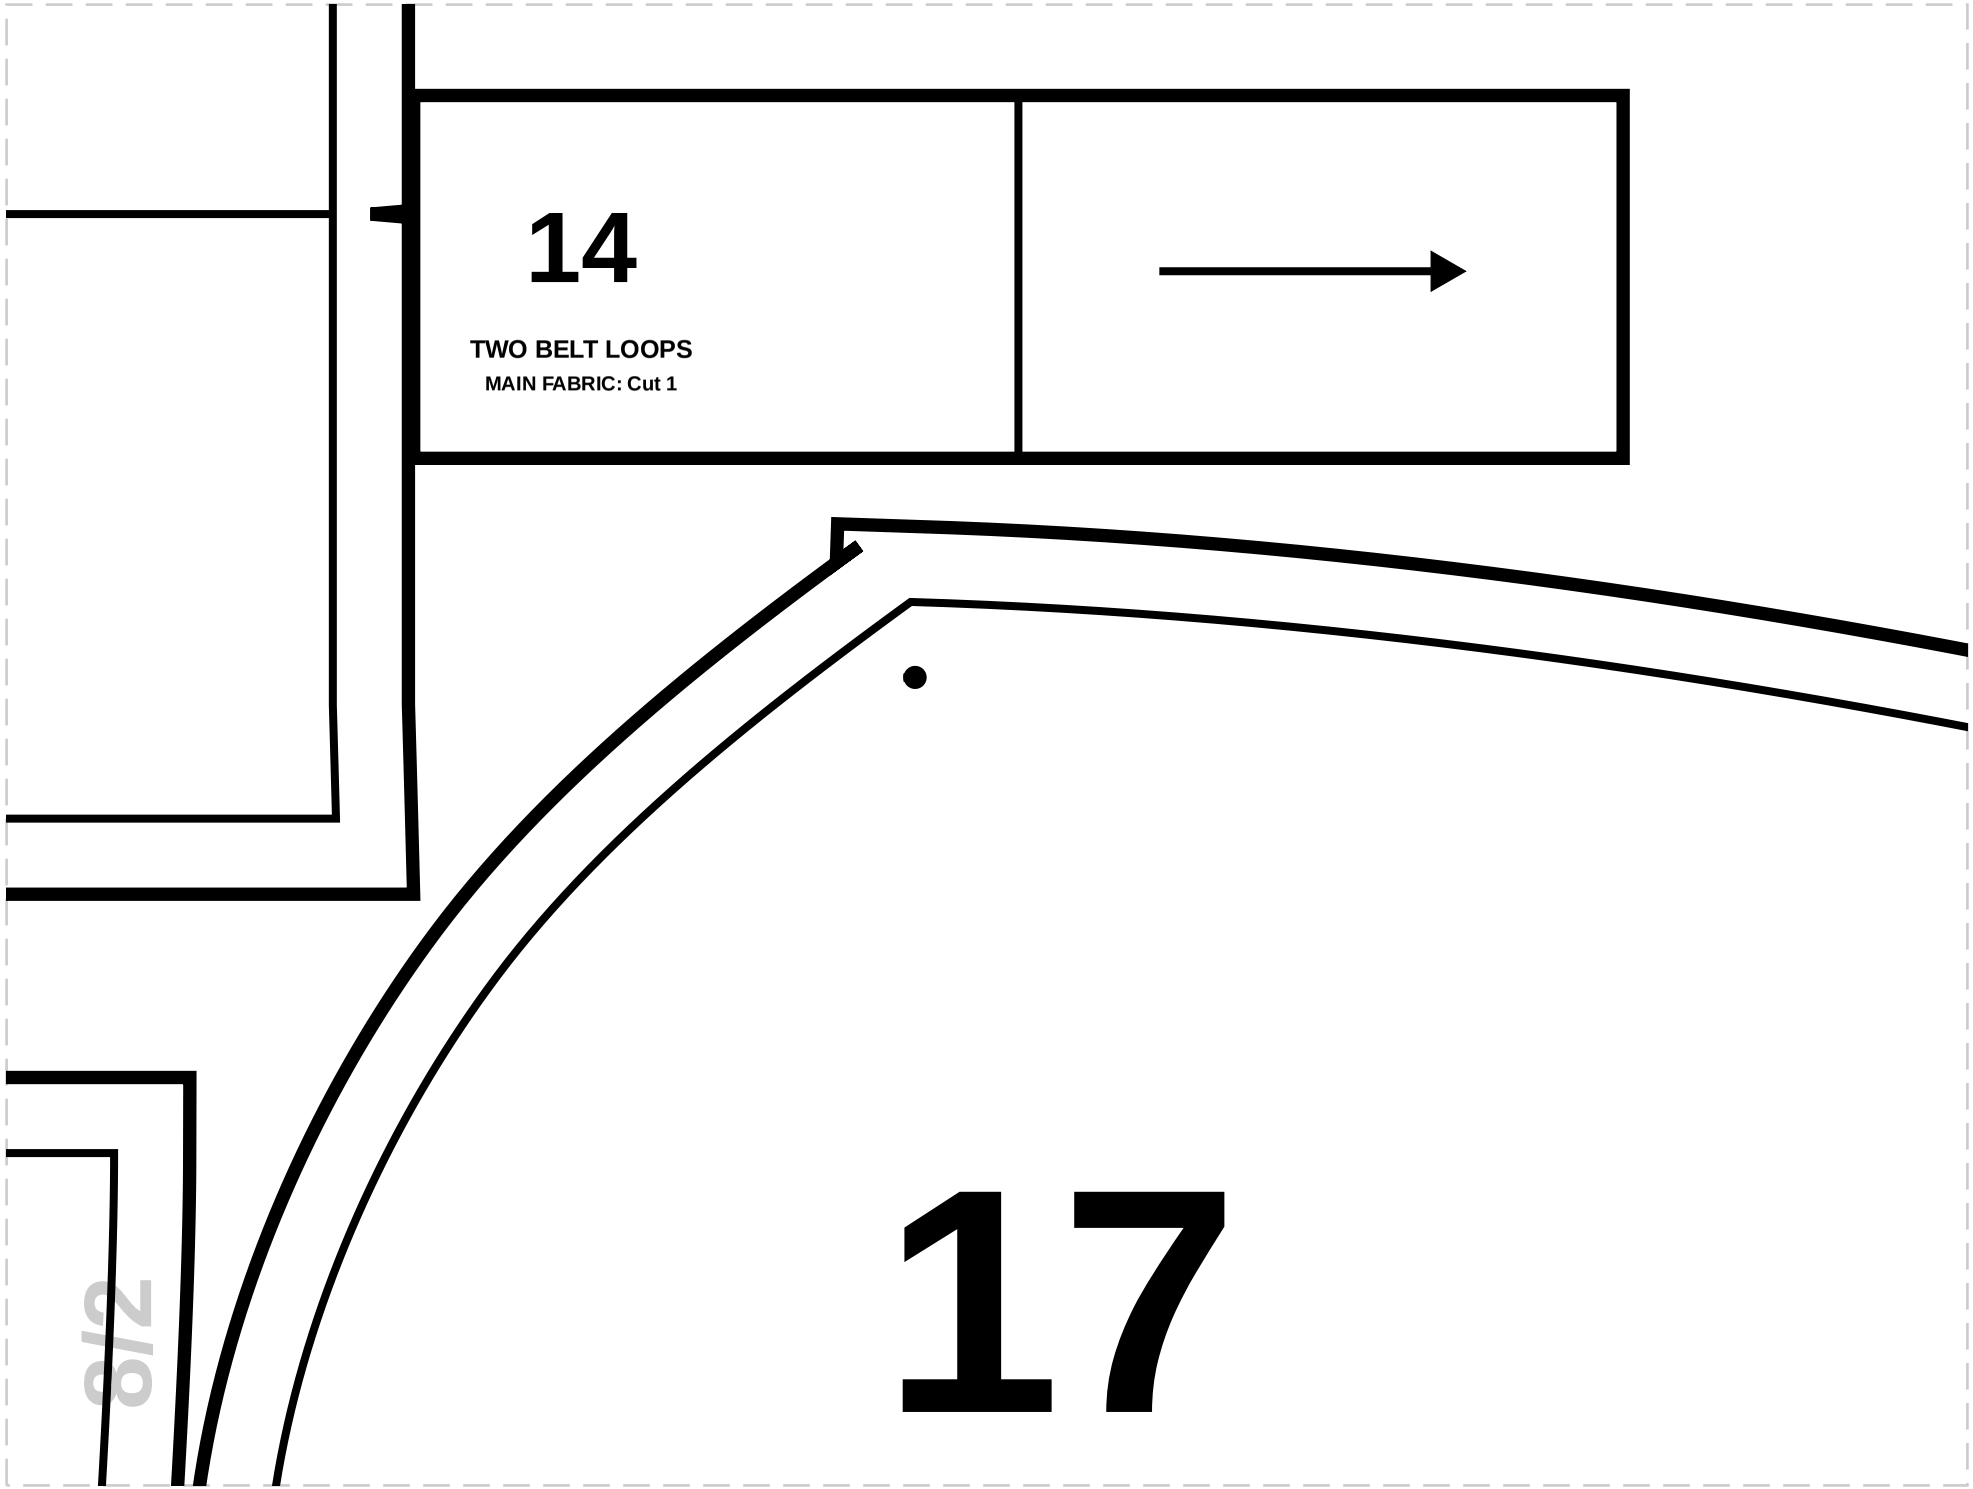

14
TWO BELT LOOPS
MAIN FABRIC: Cut 1
17
8/2

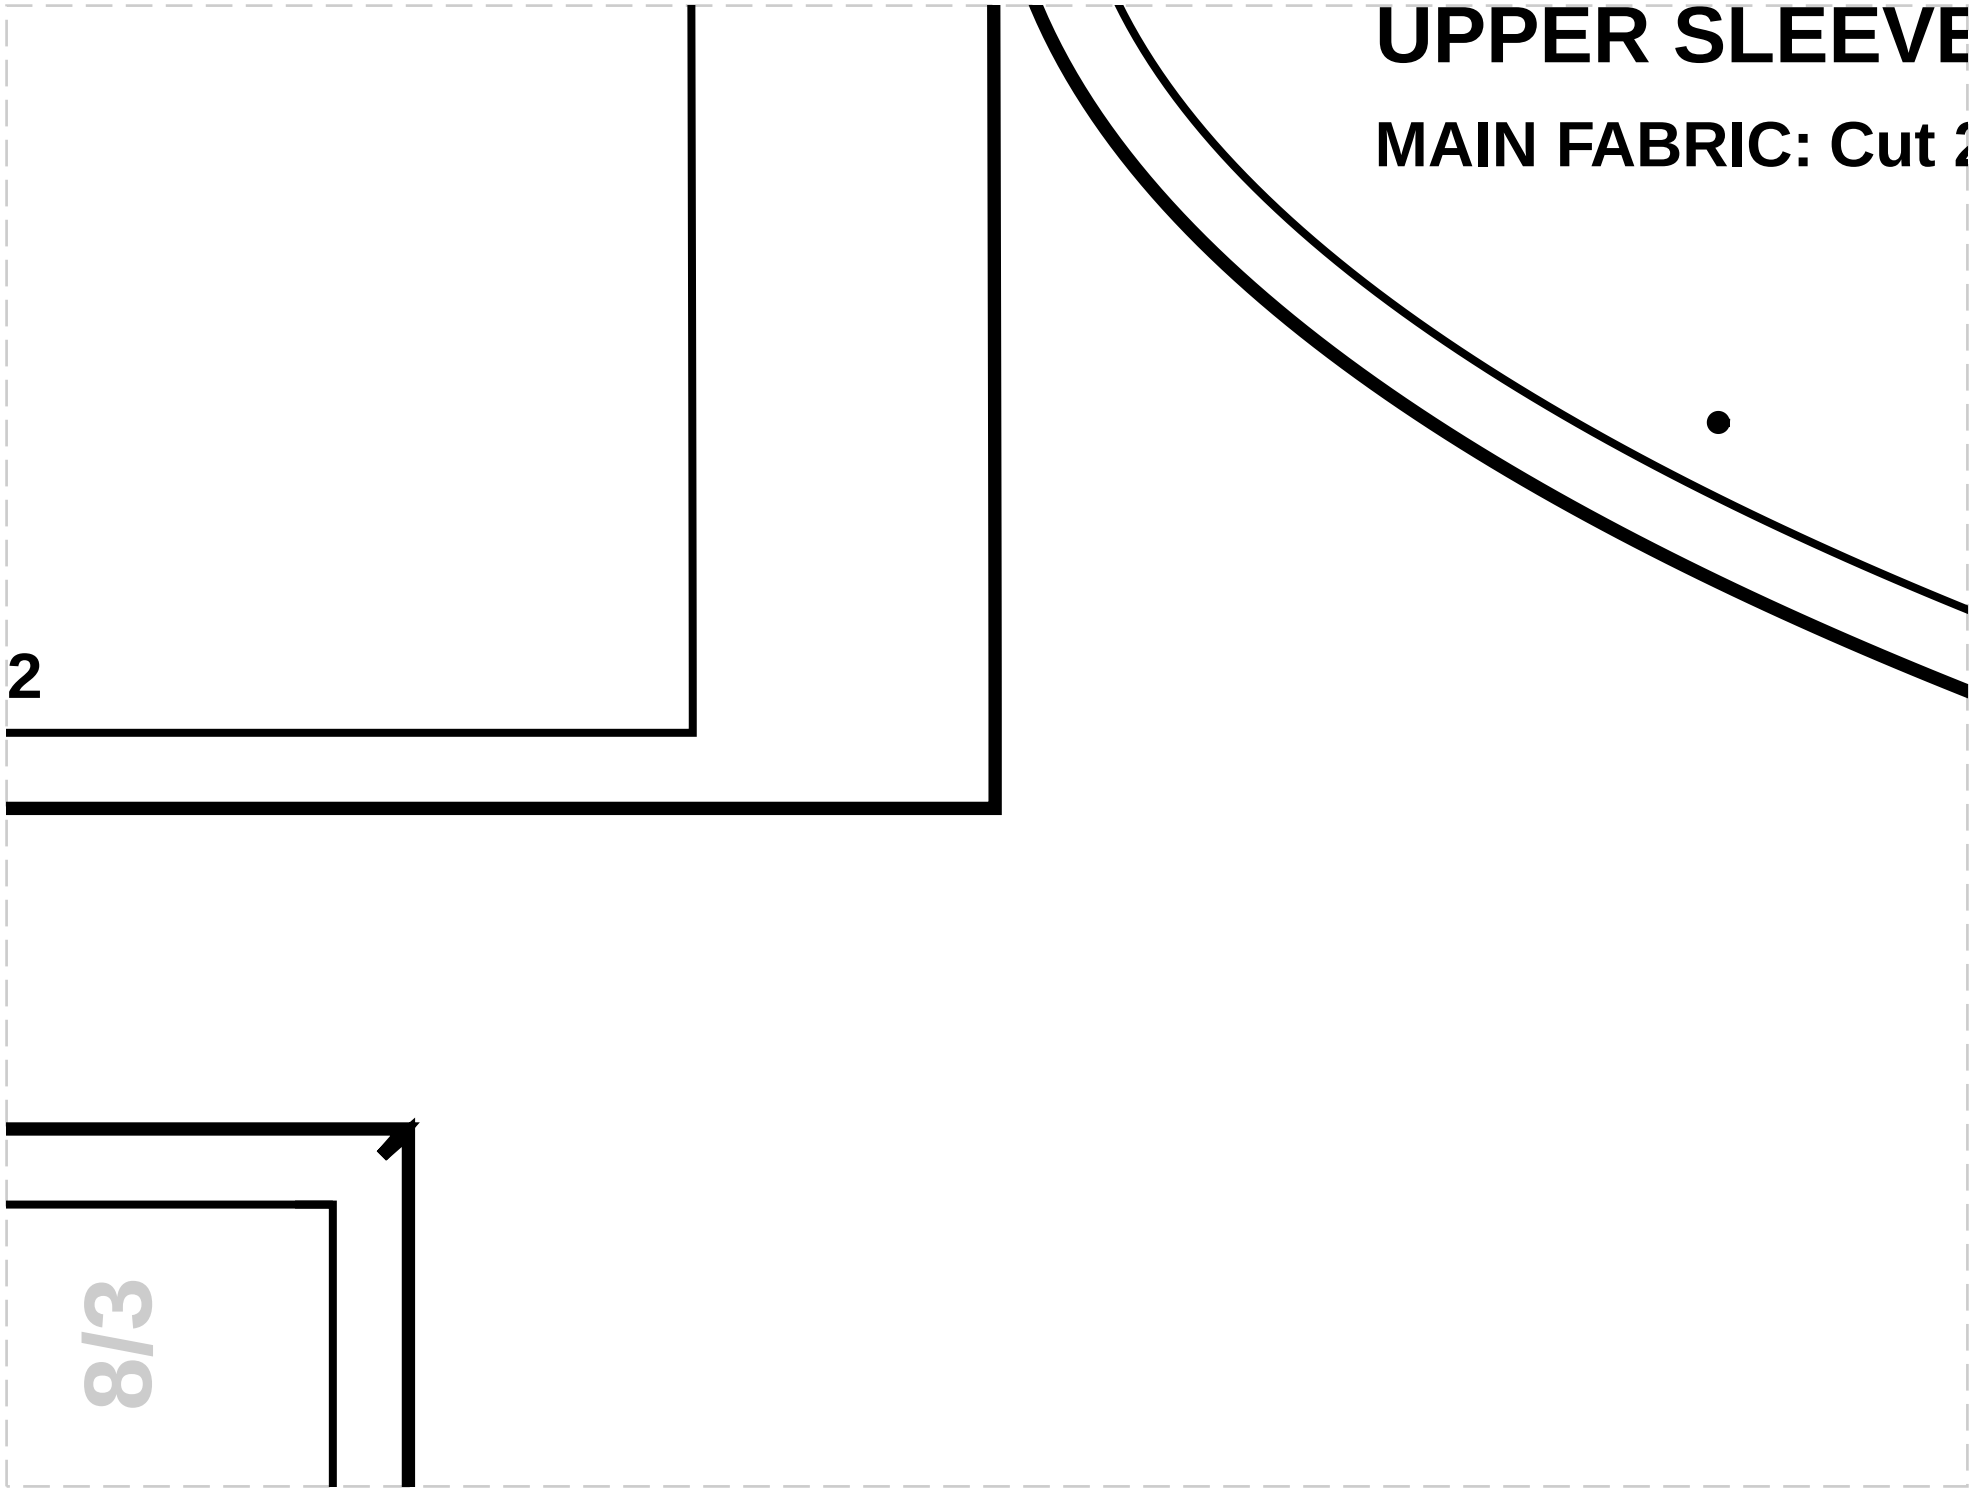

UPPER SLEEVE
MAIN FABRIC: Cut 2
2
8/3

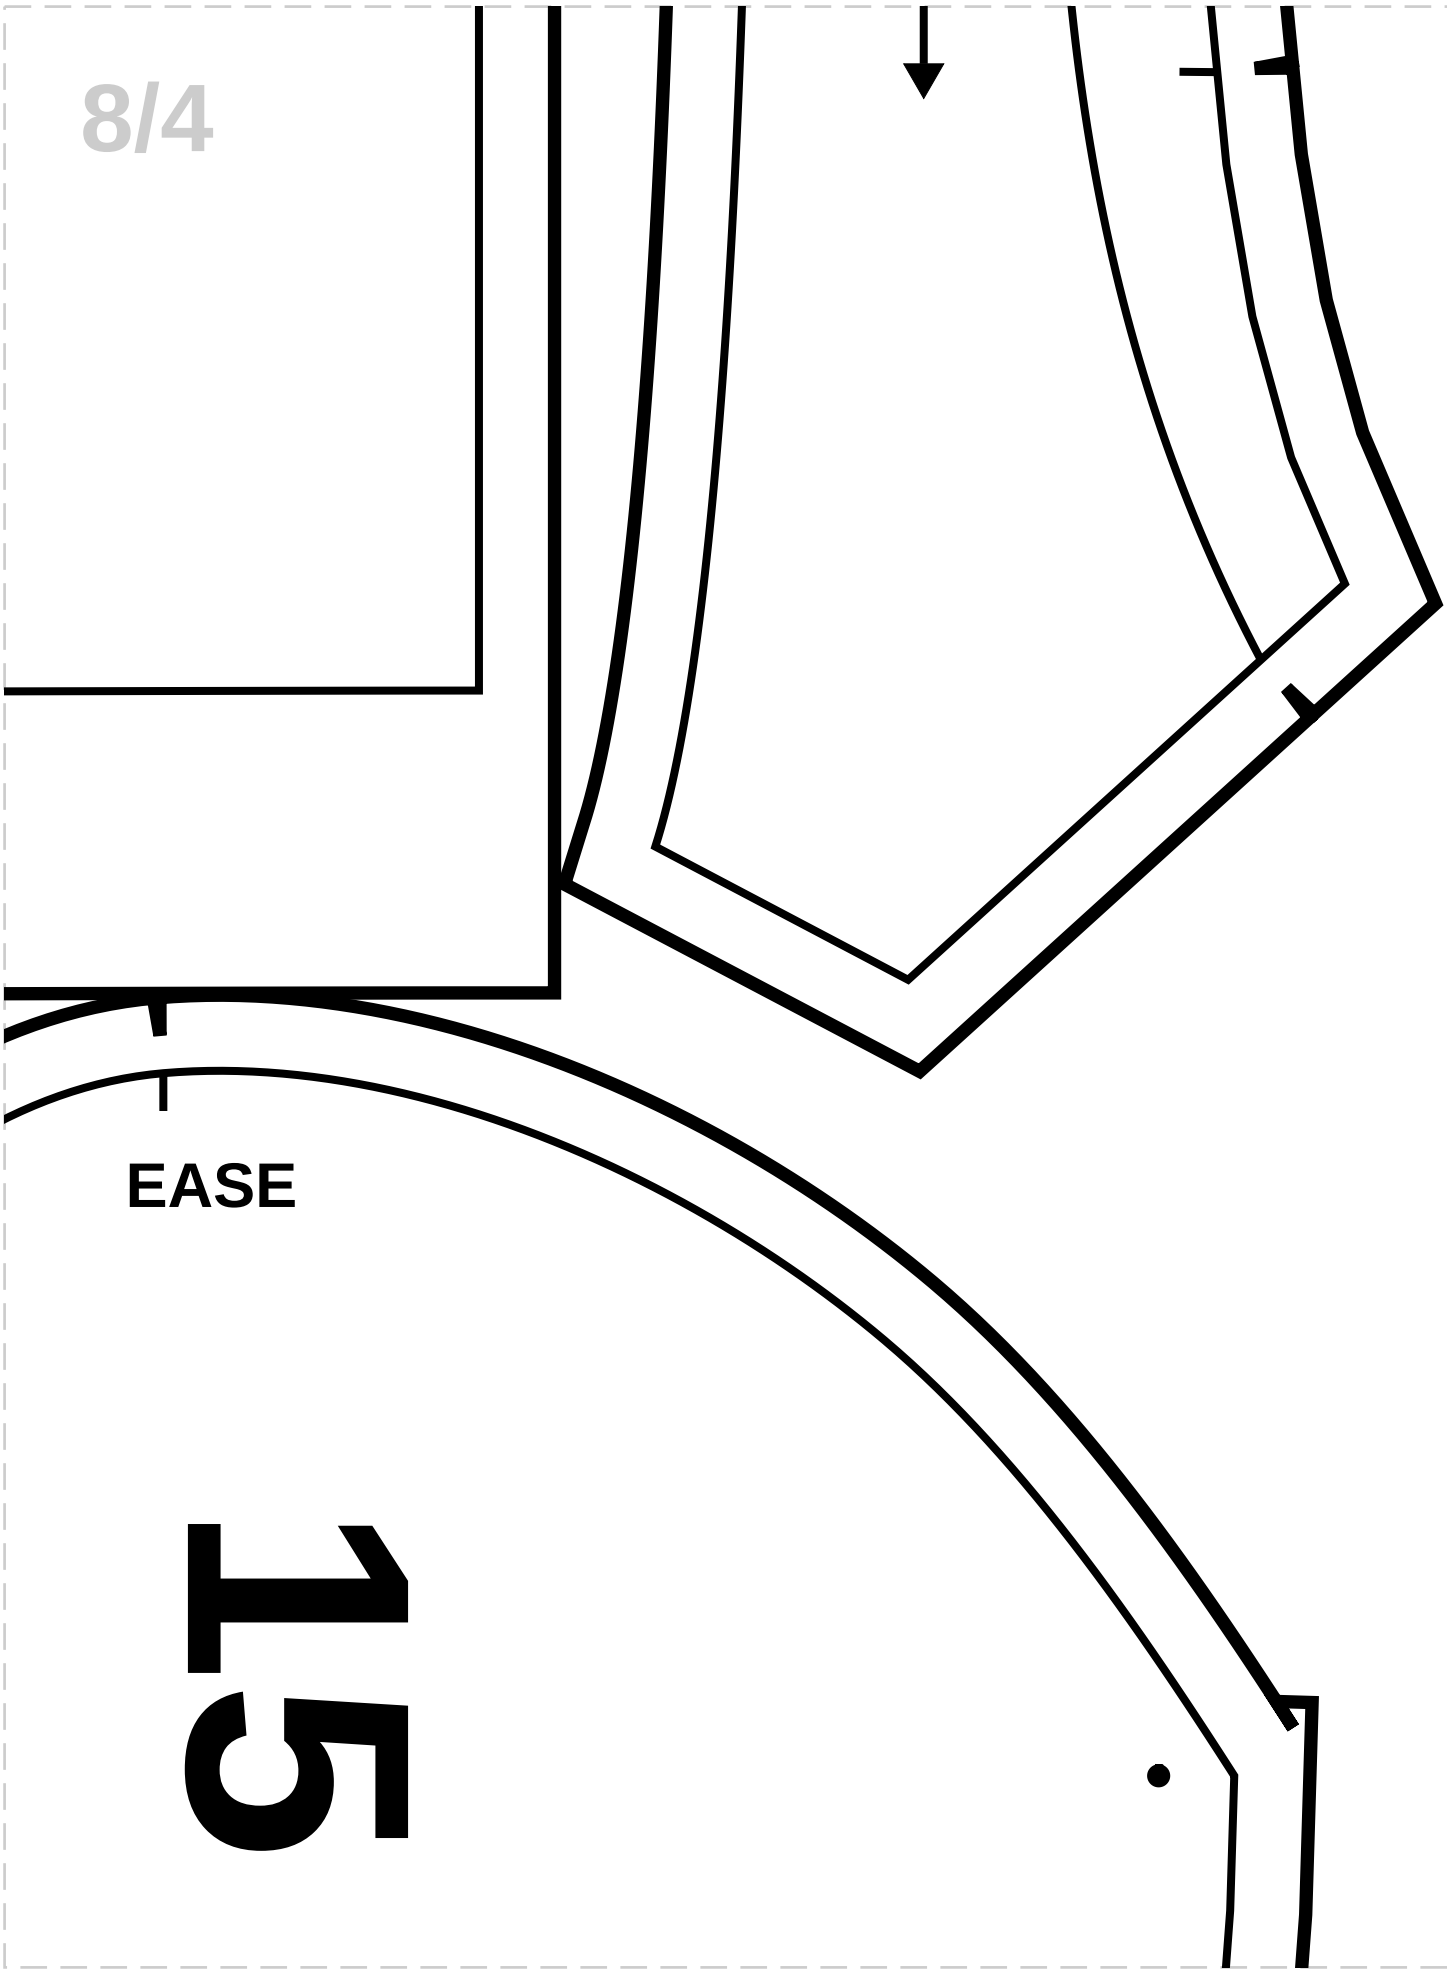

EASE
51

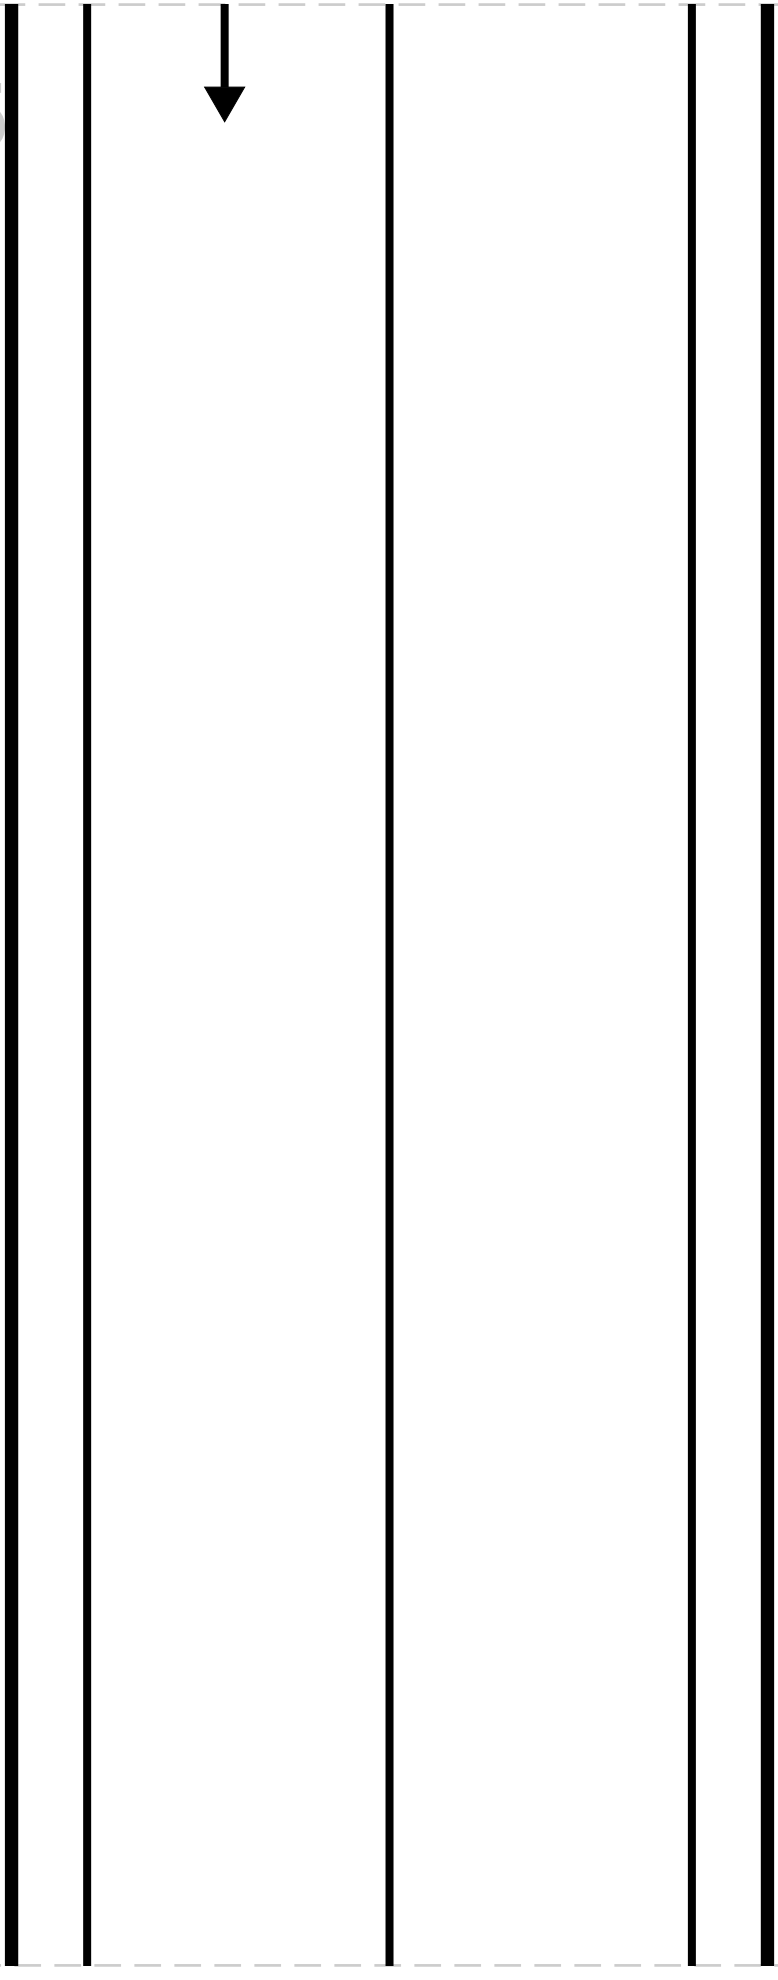

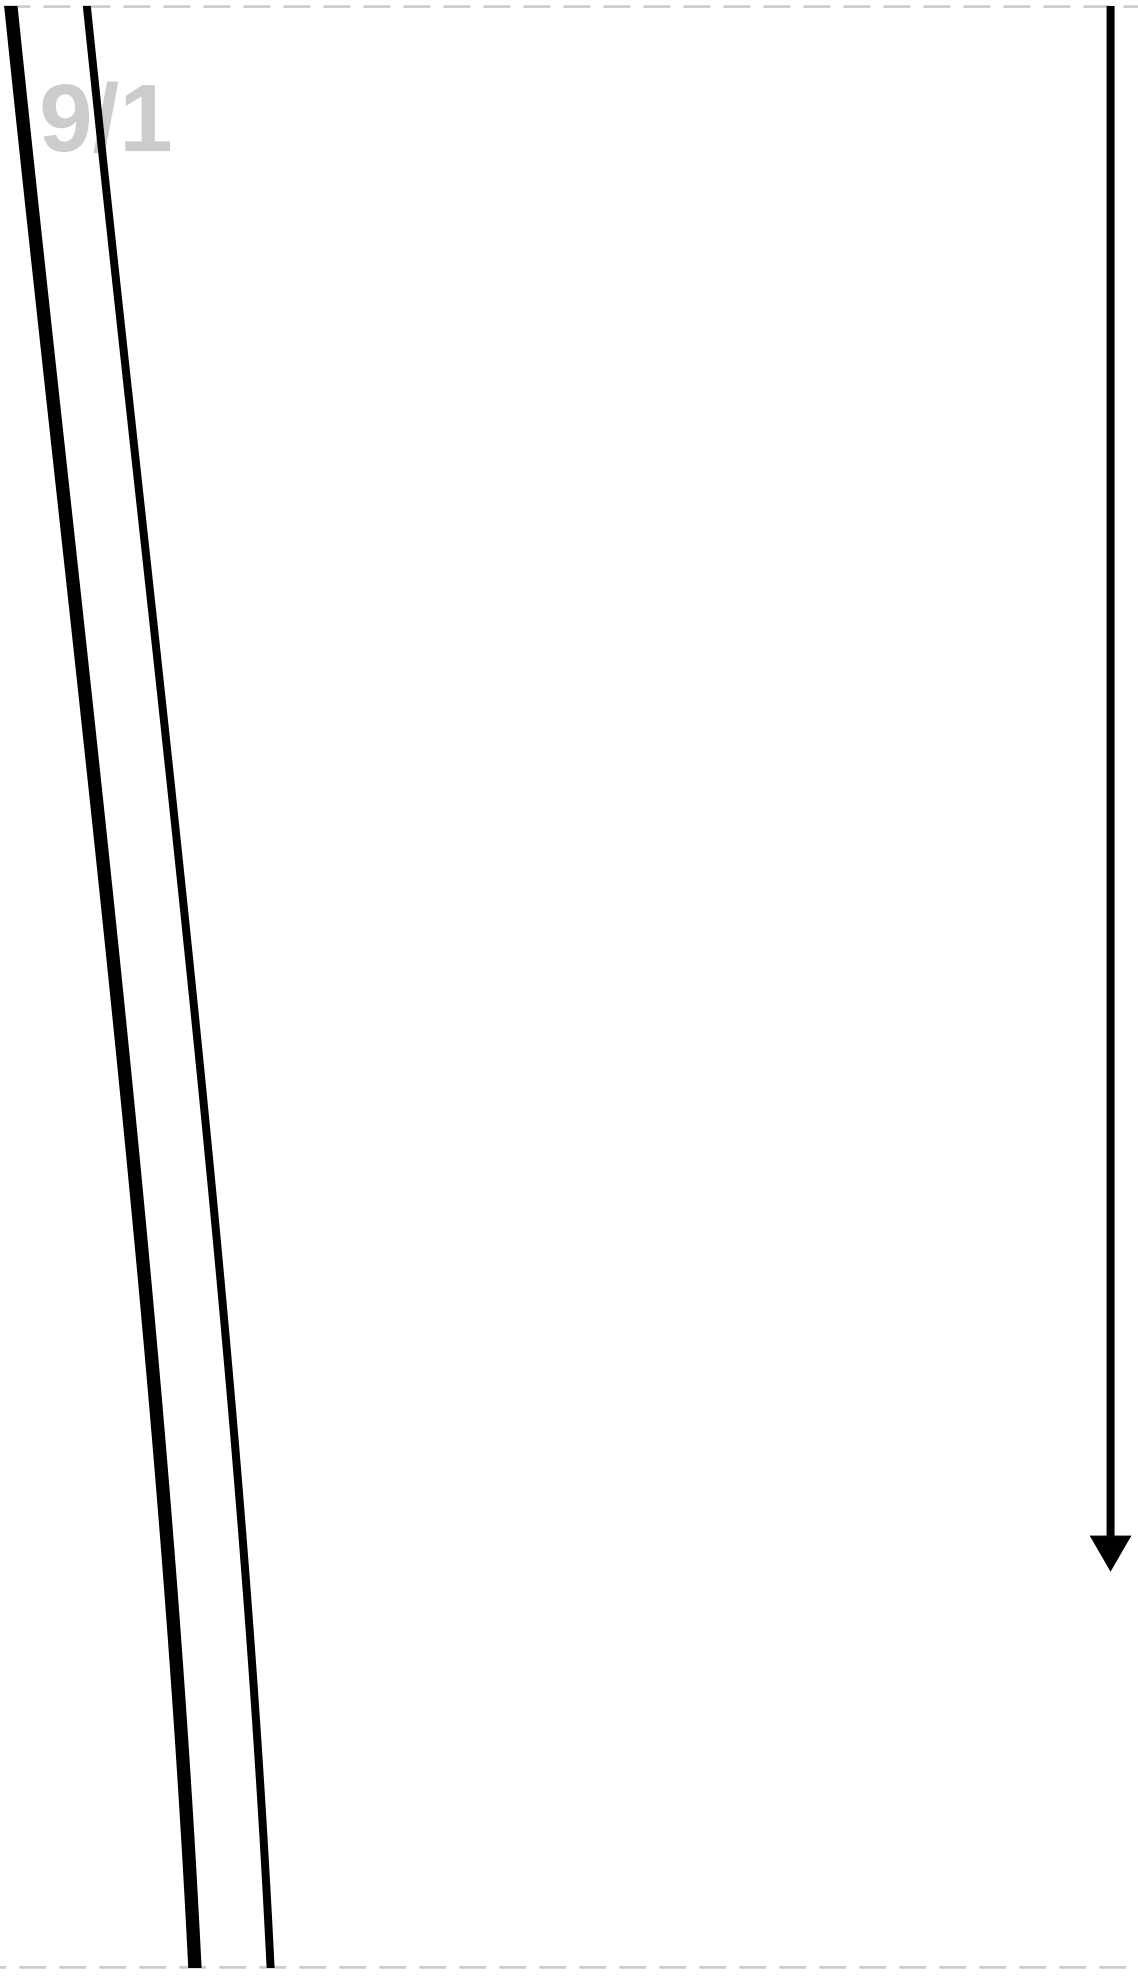


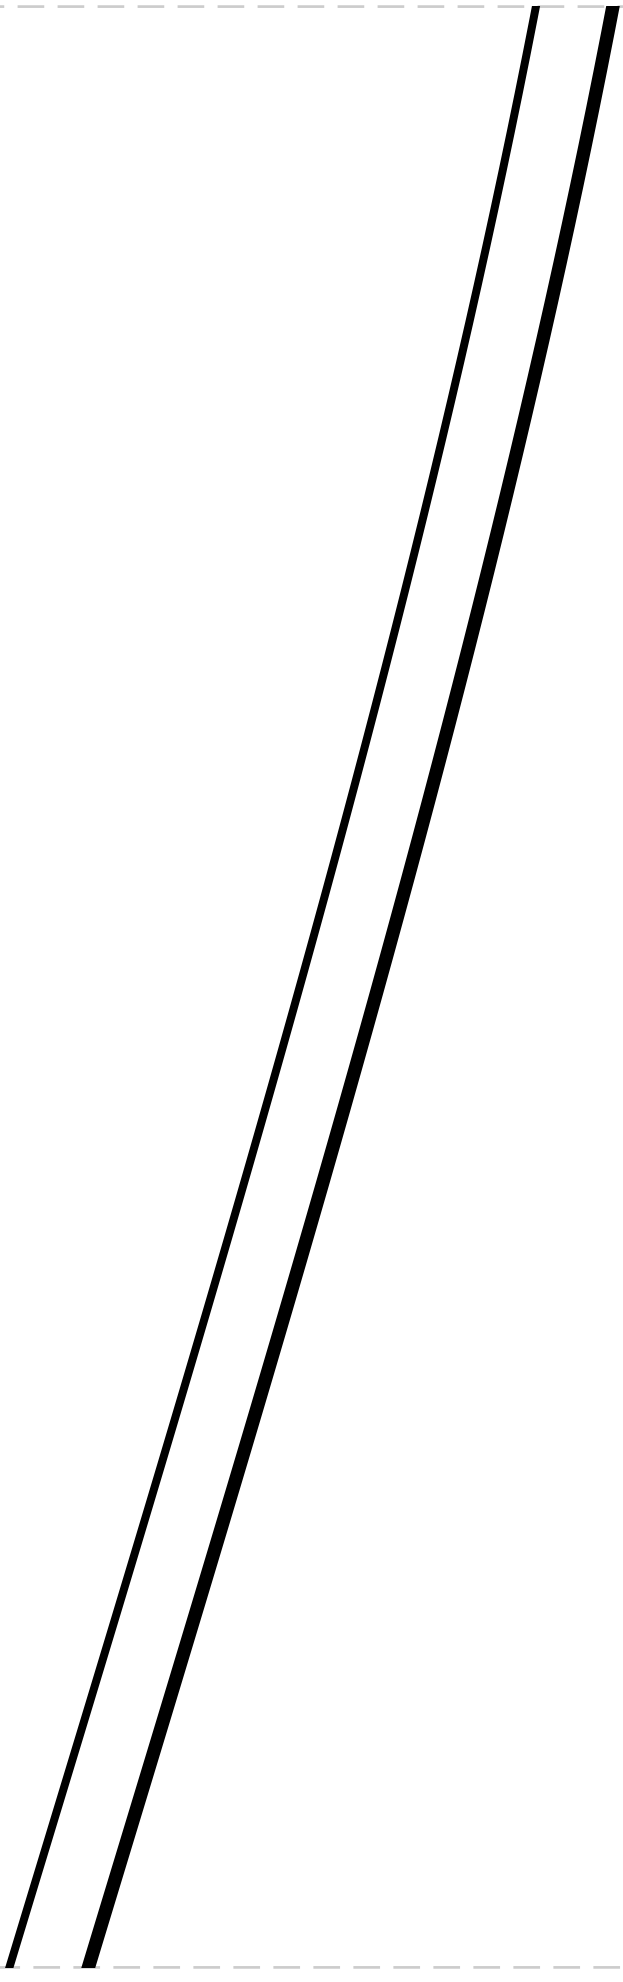


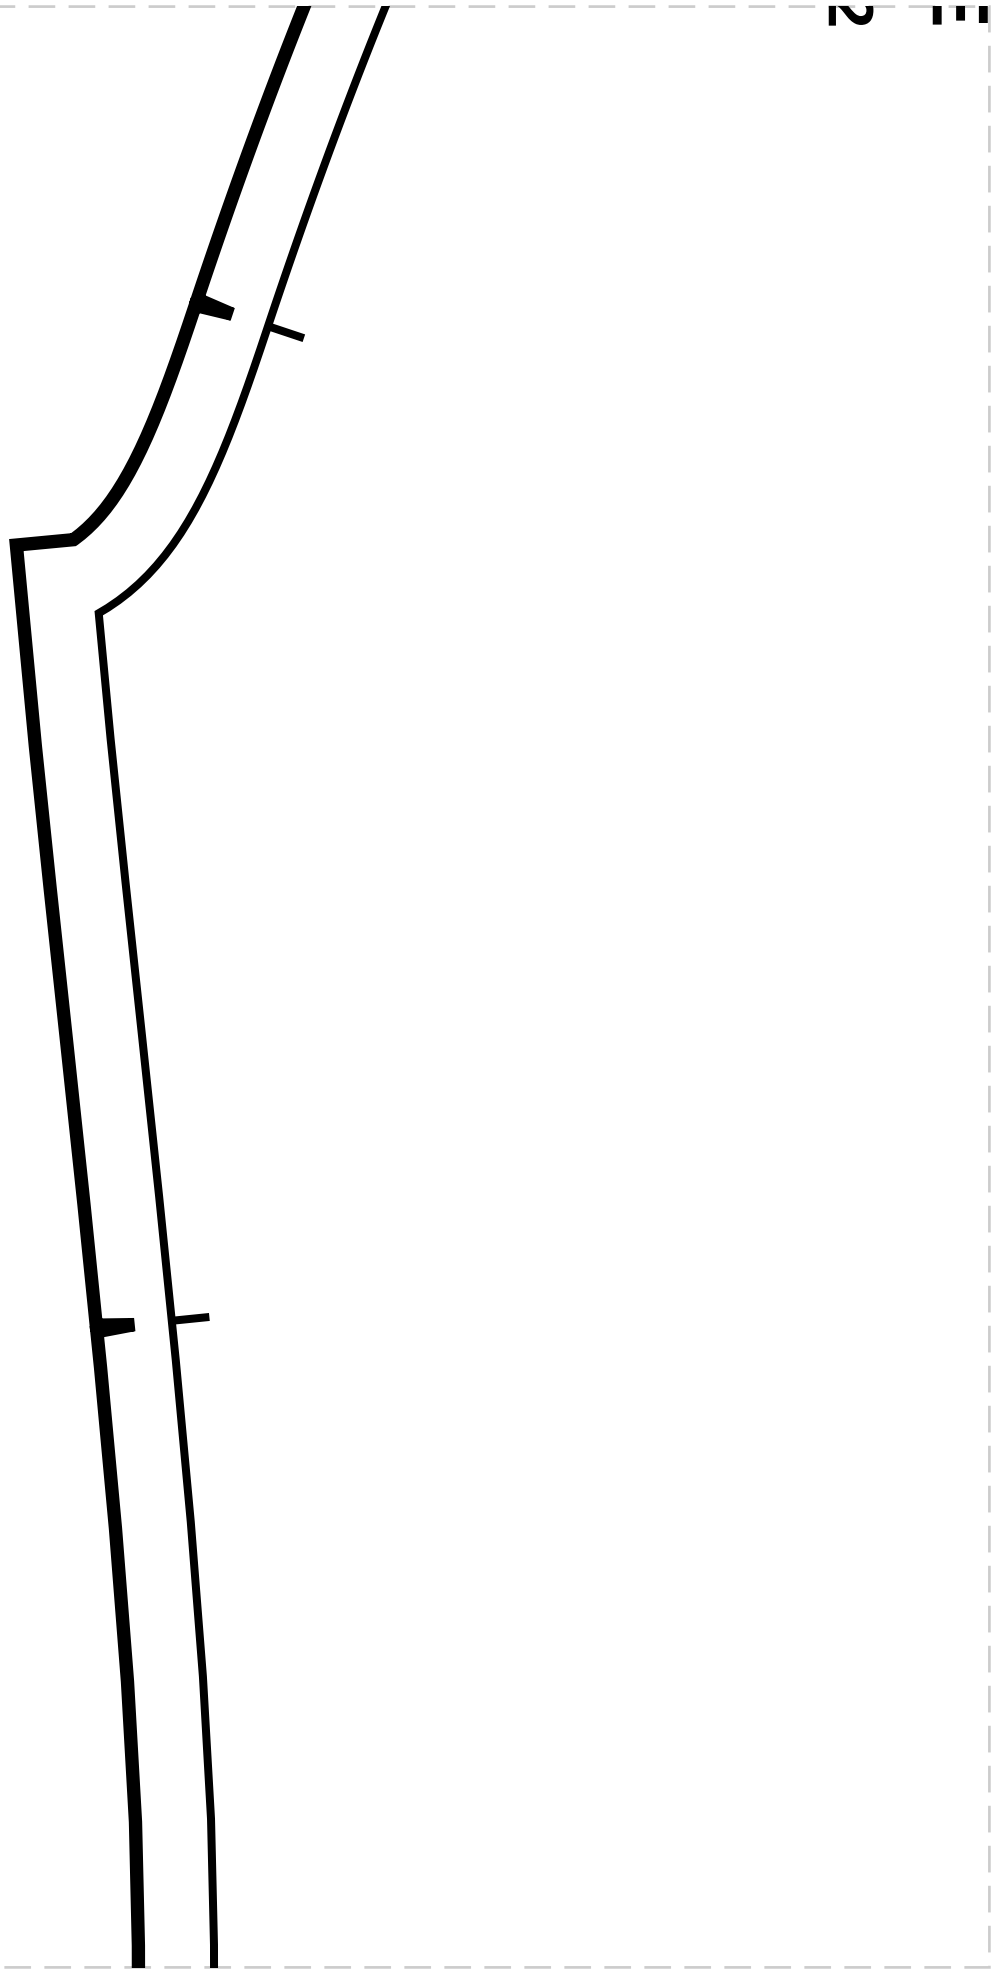


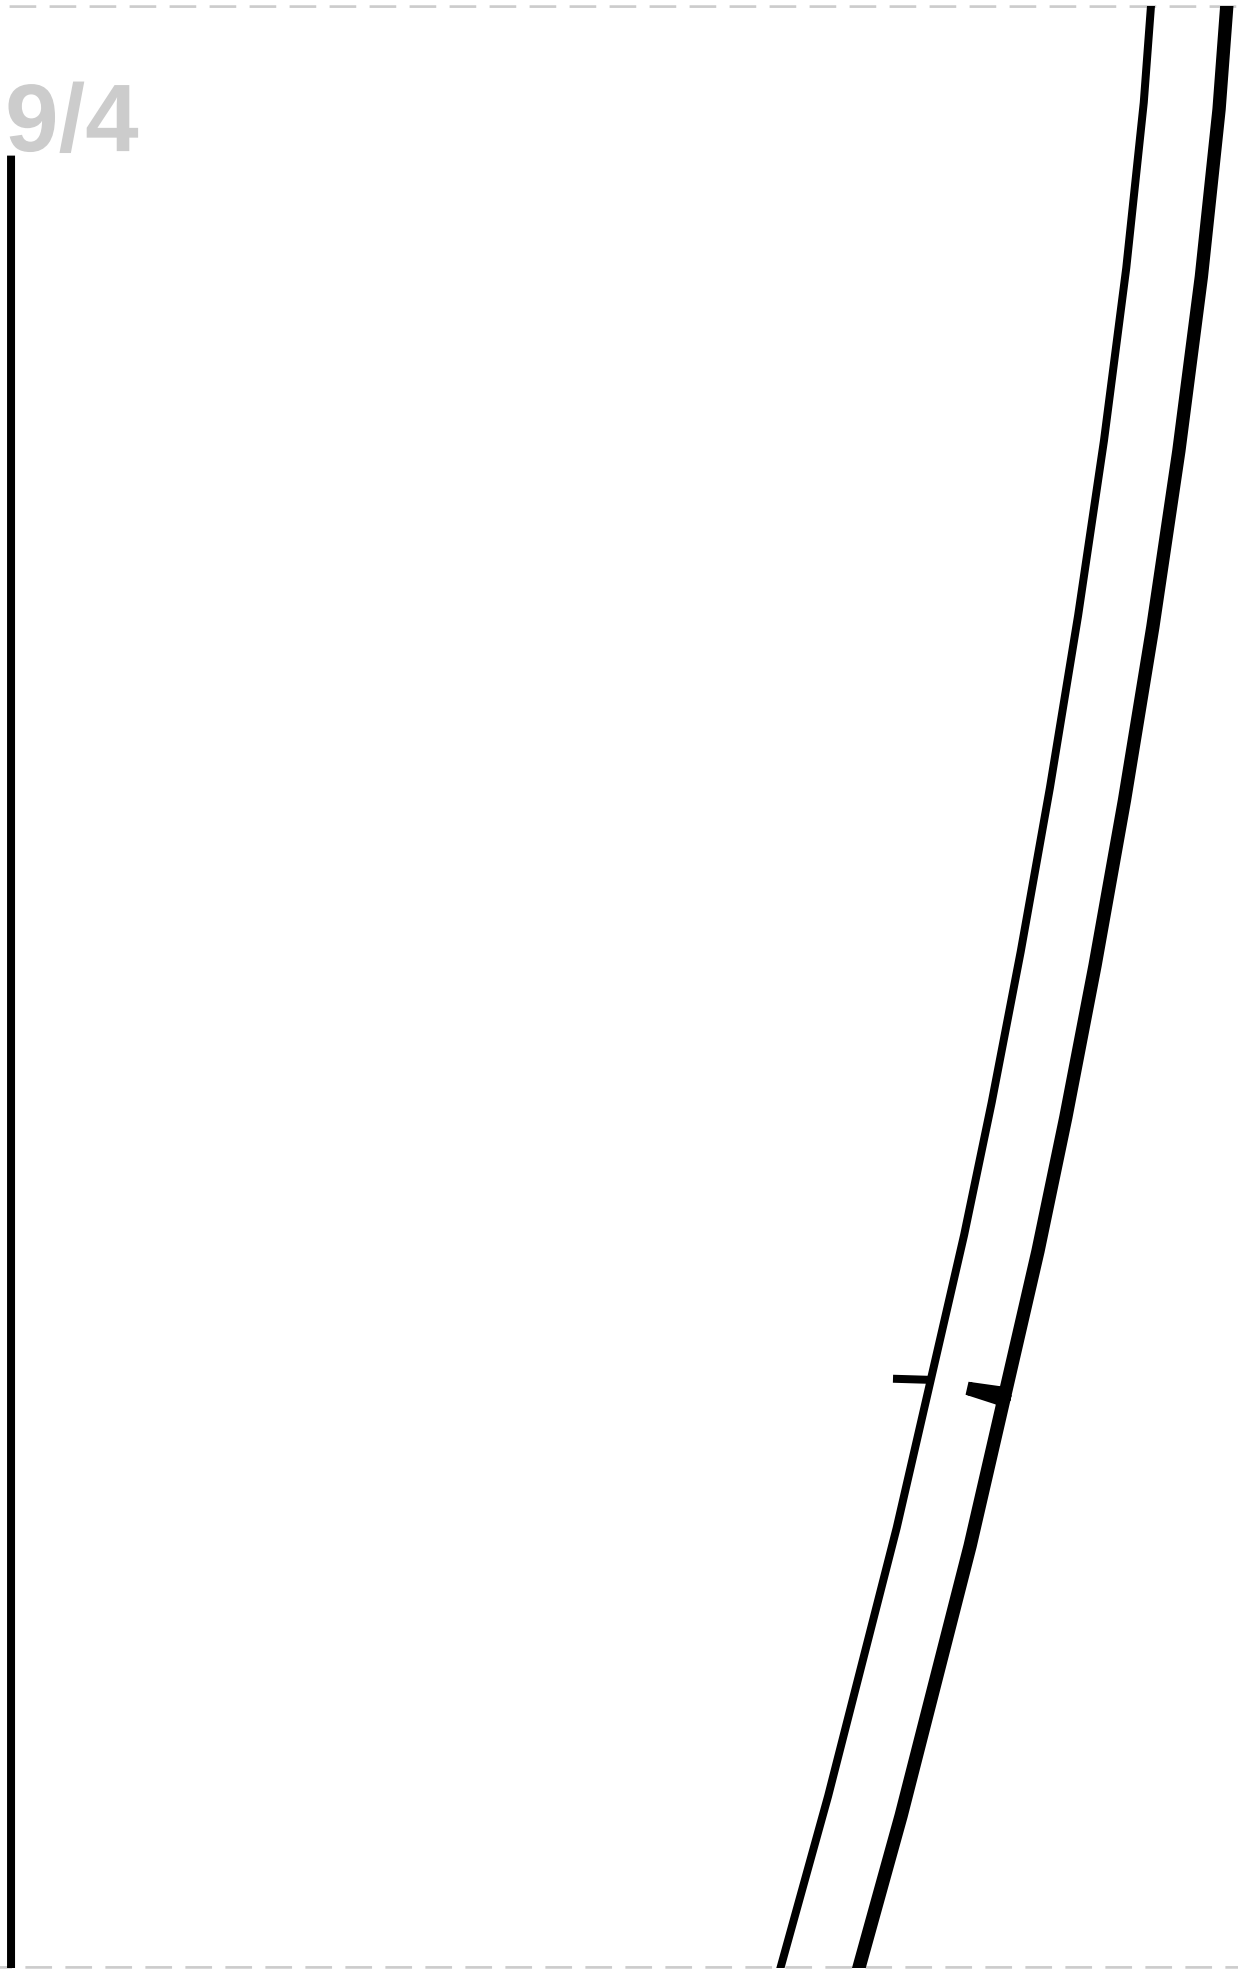



9/5

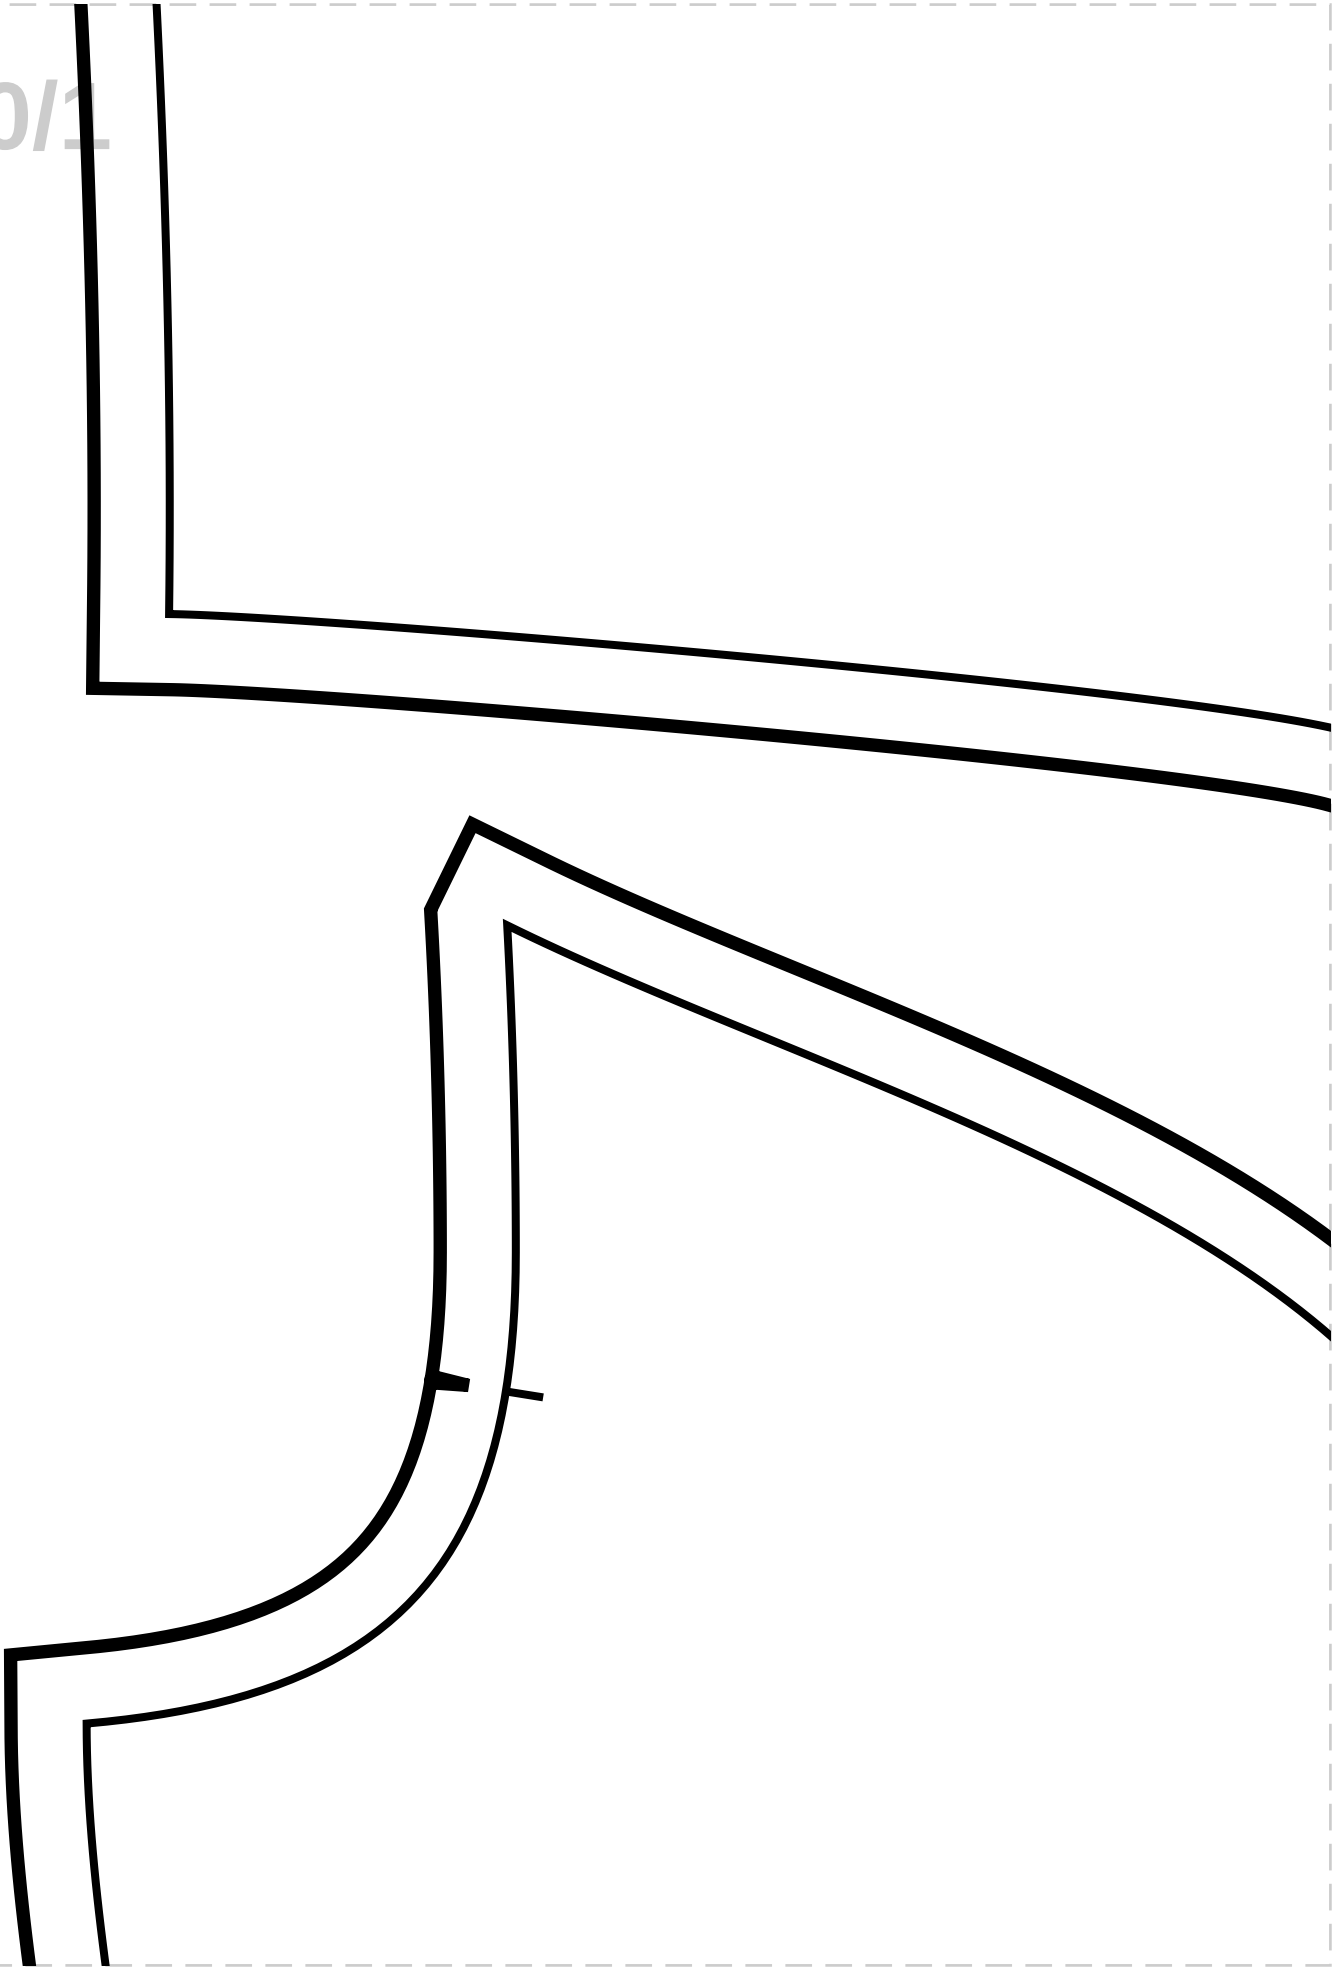


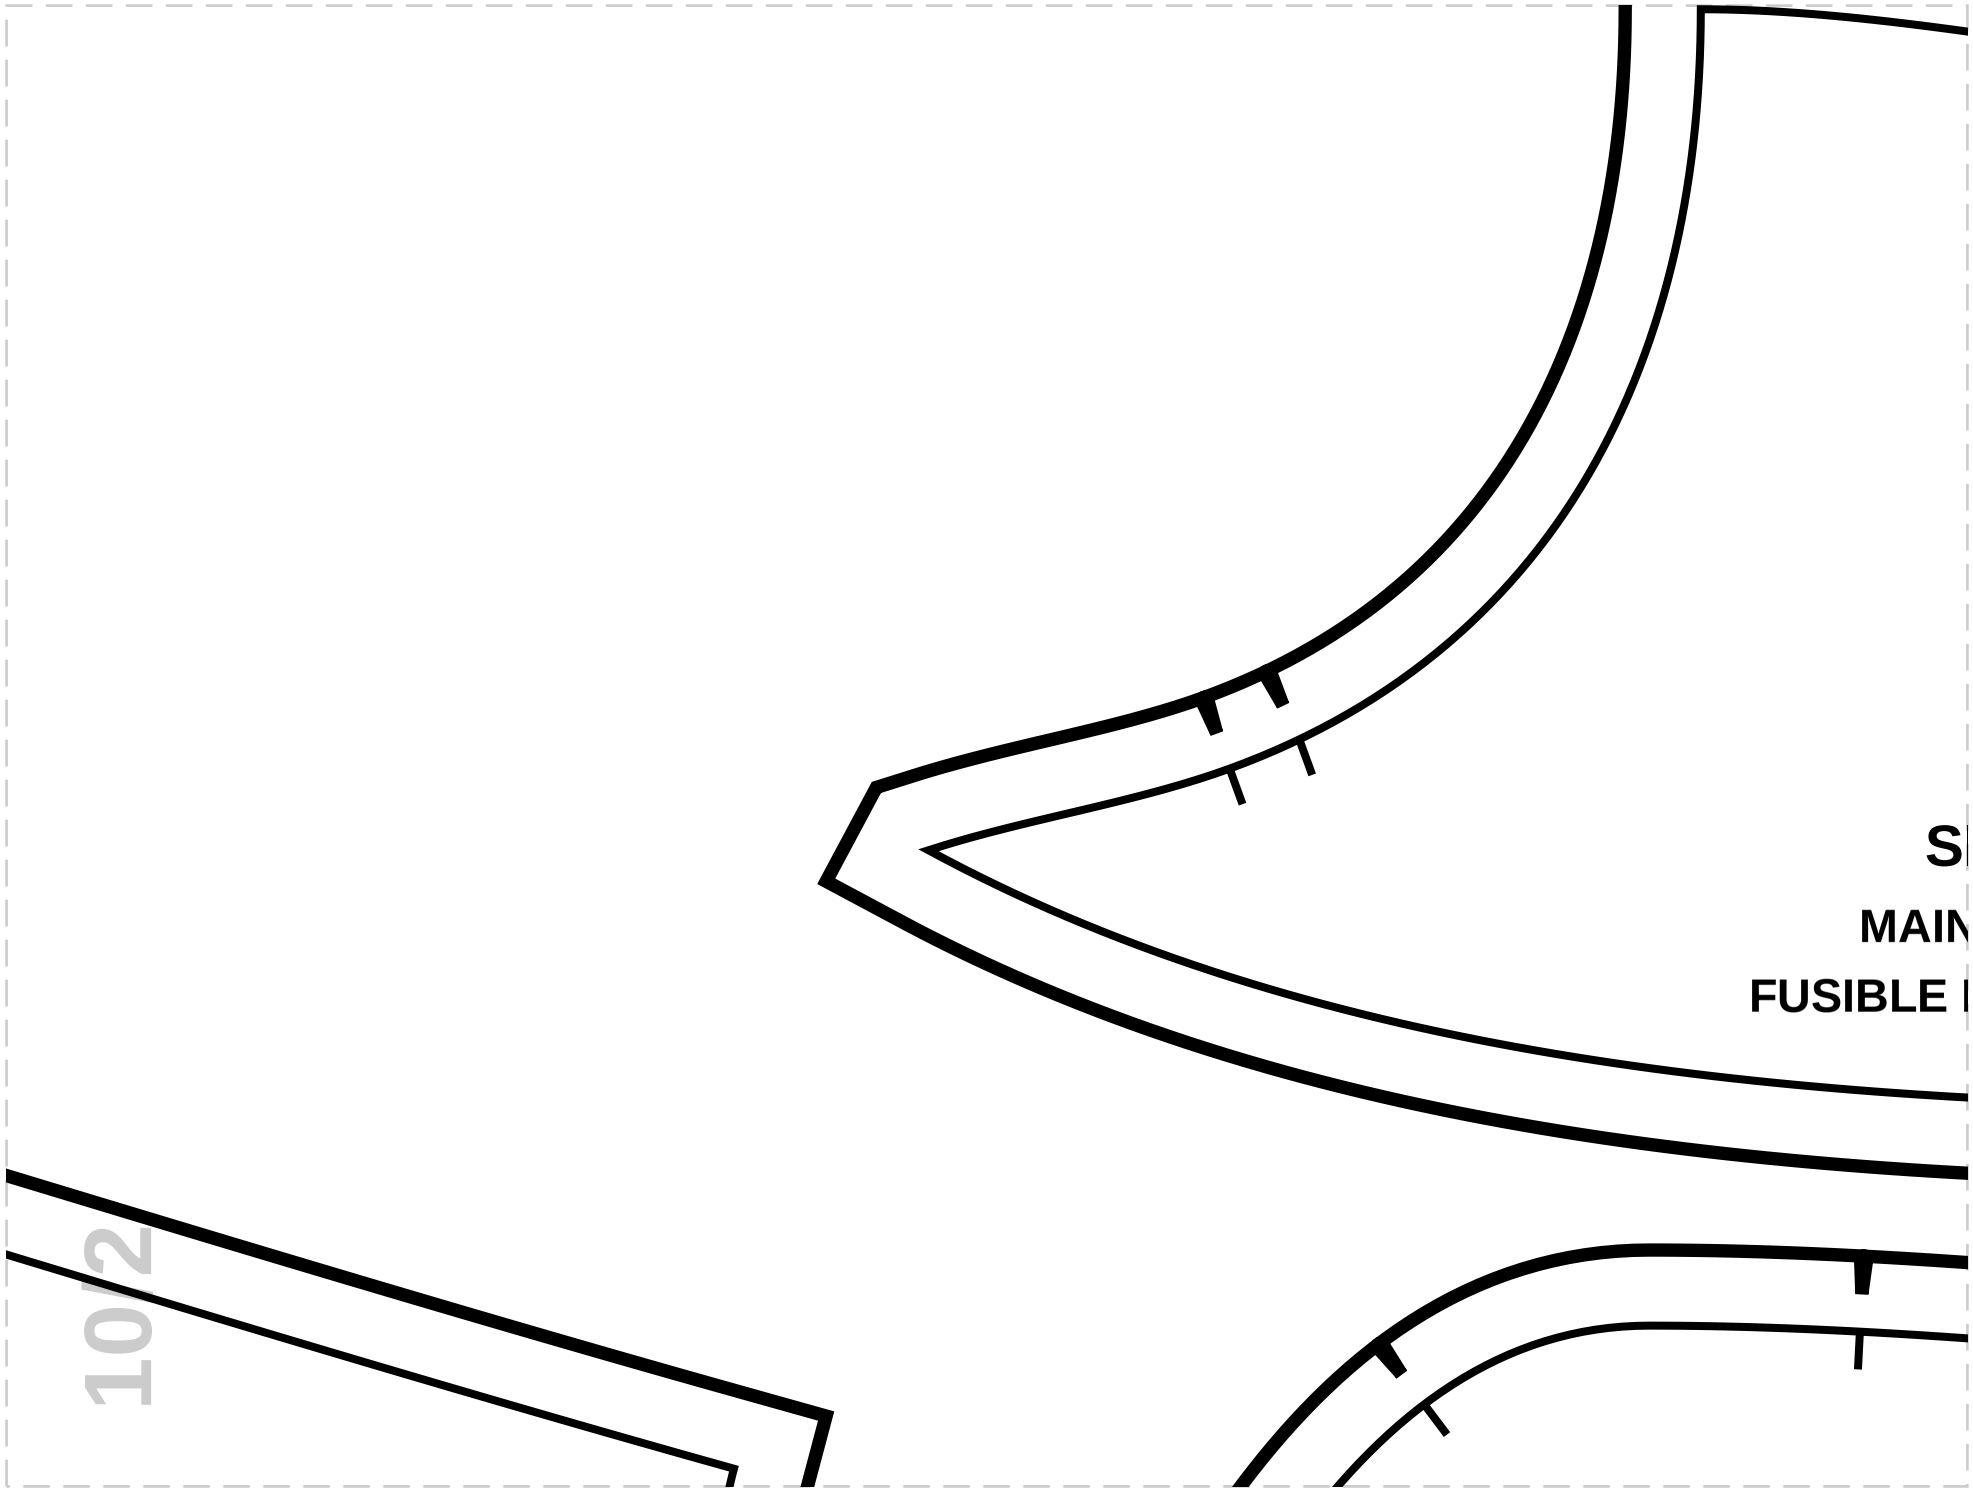

S
MAIN
FUSIBLE

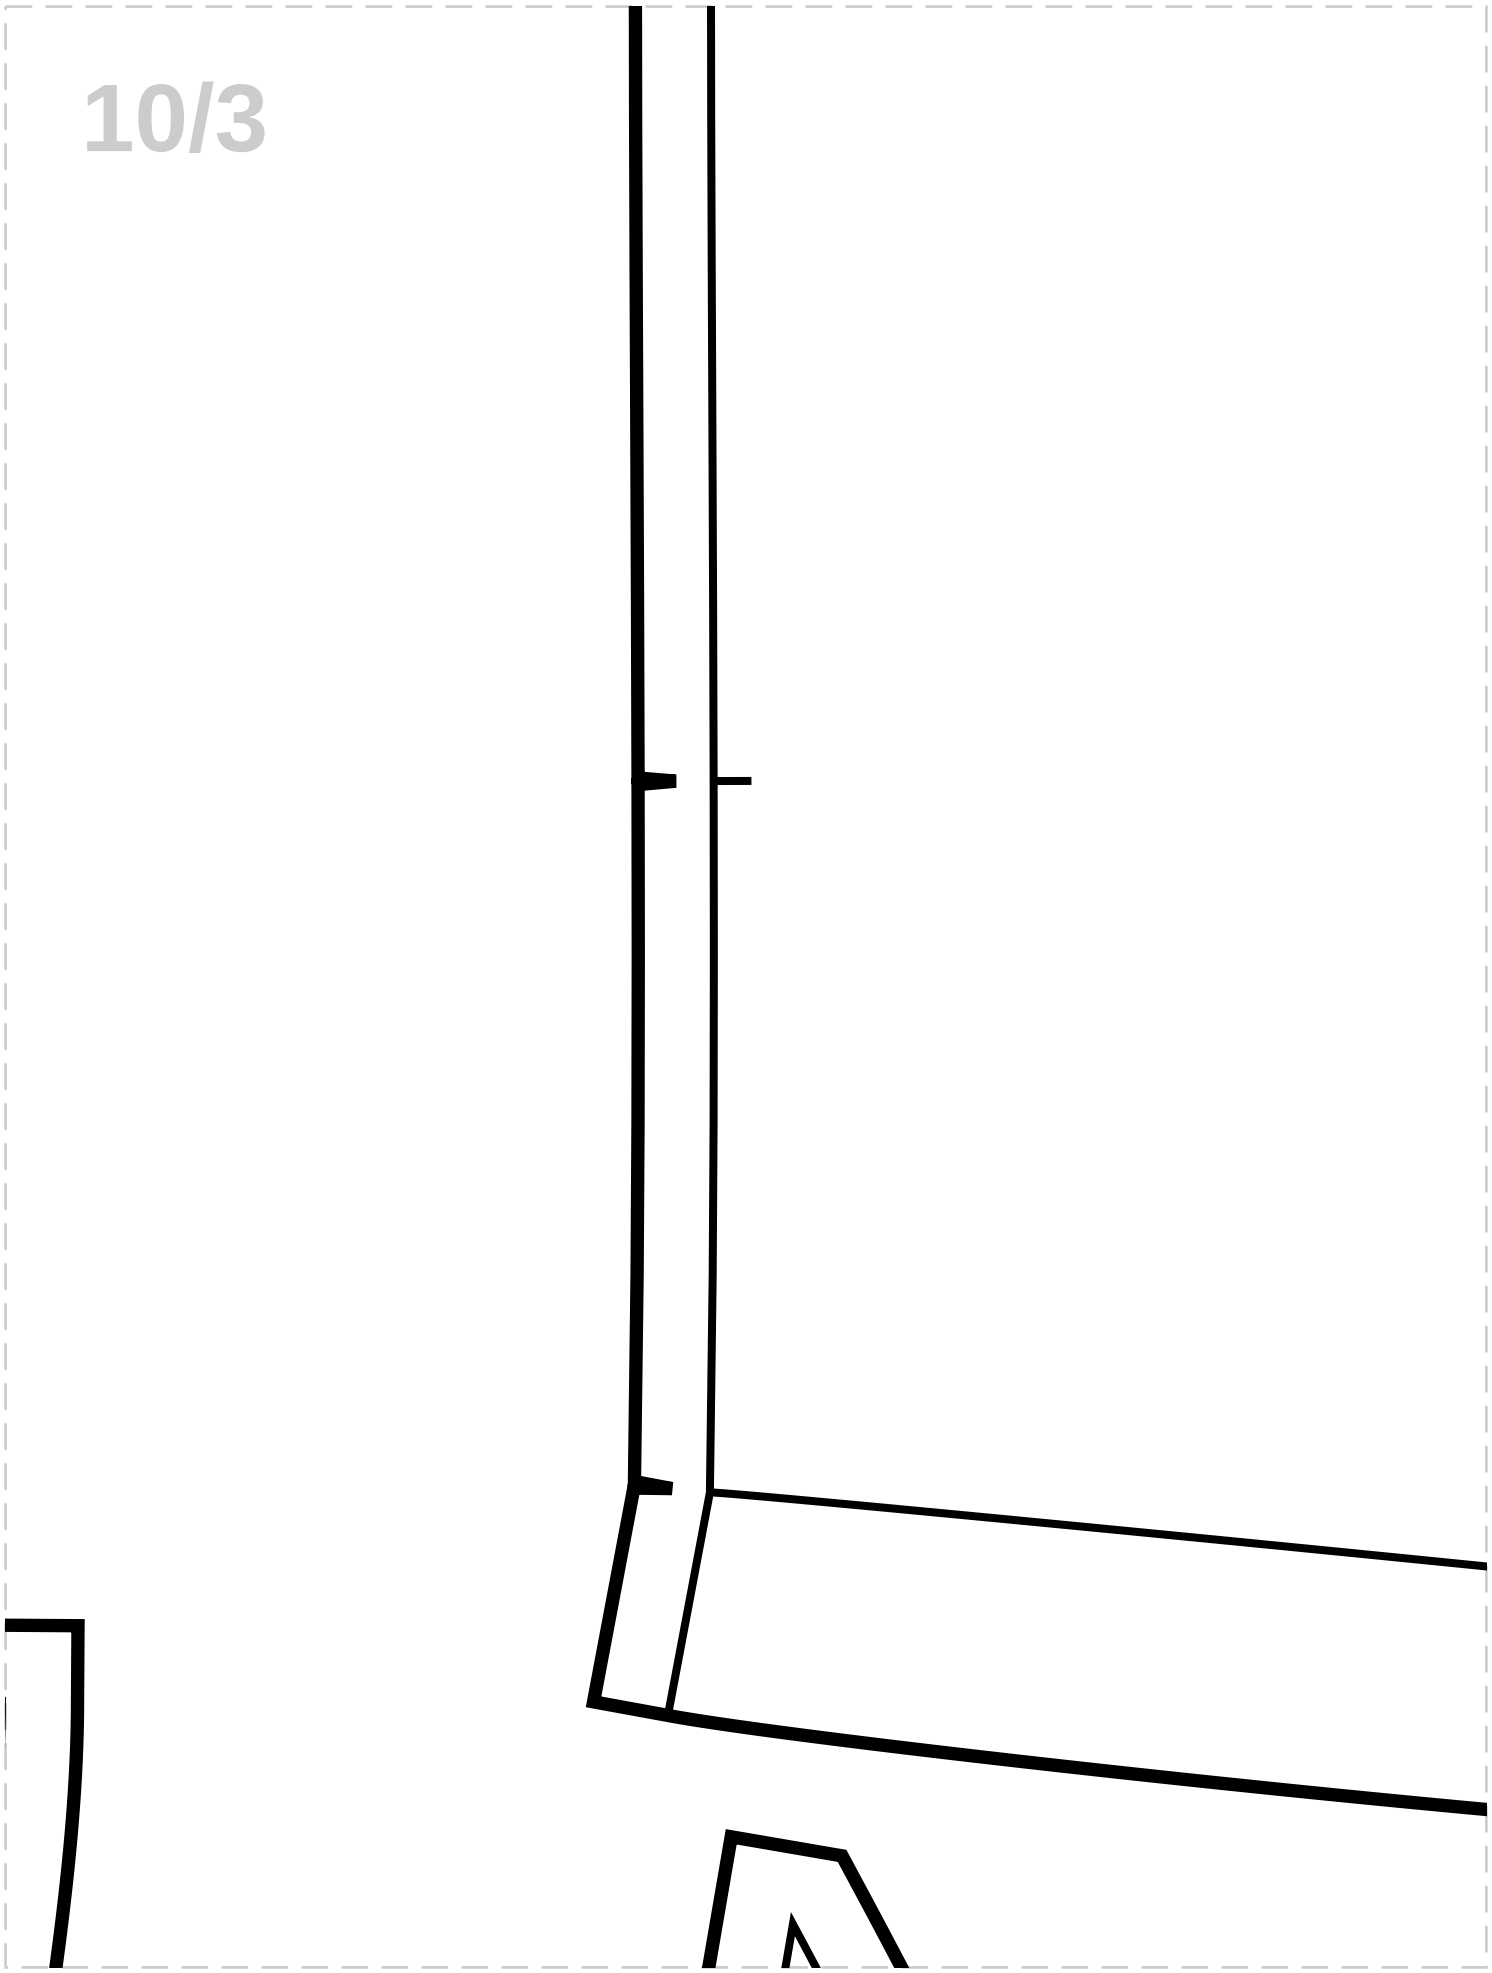

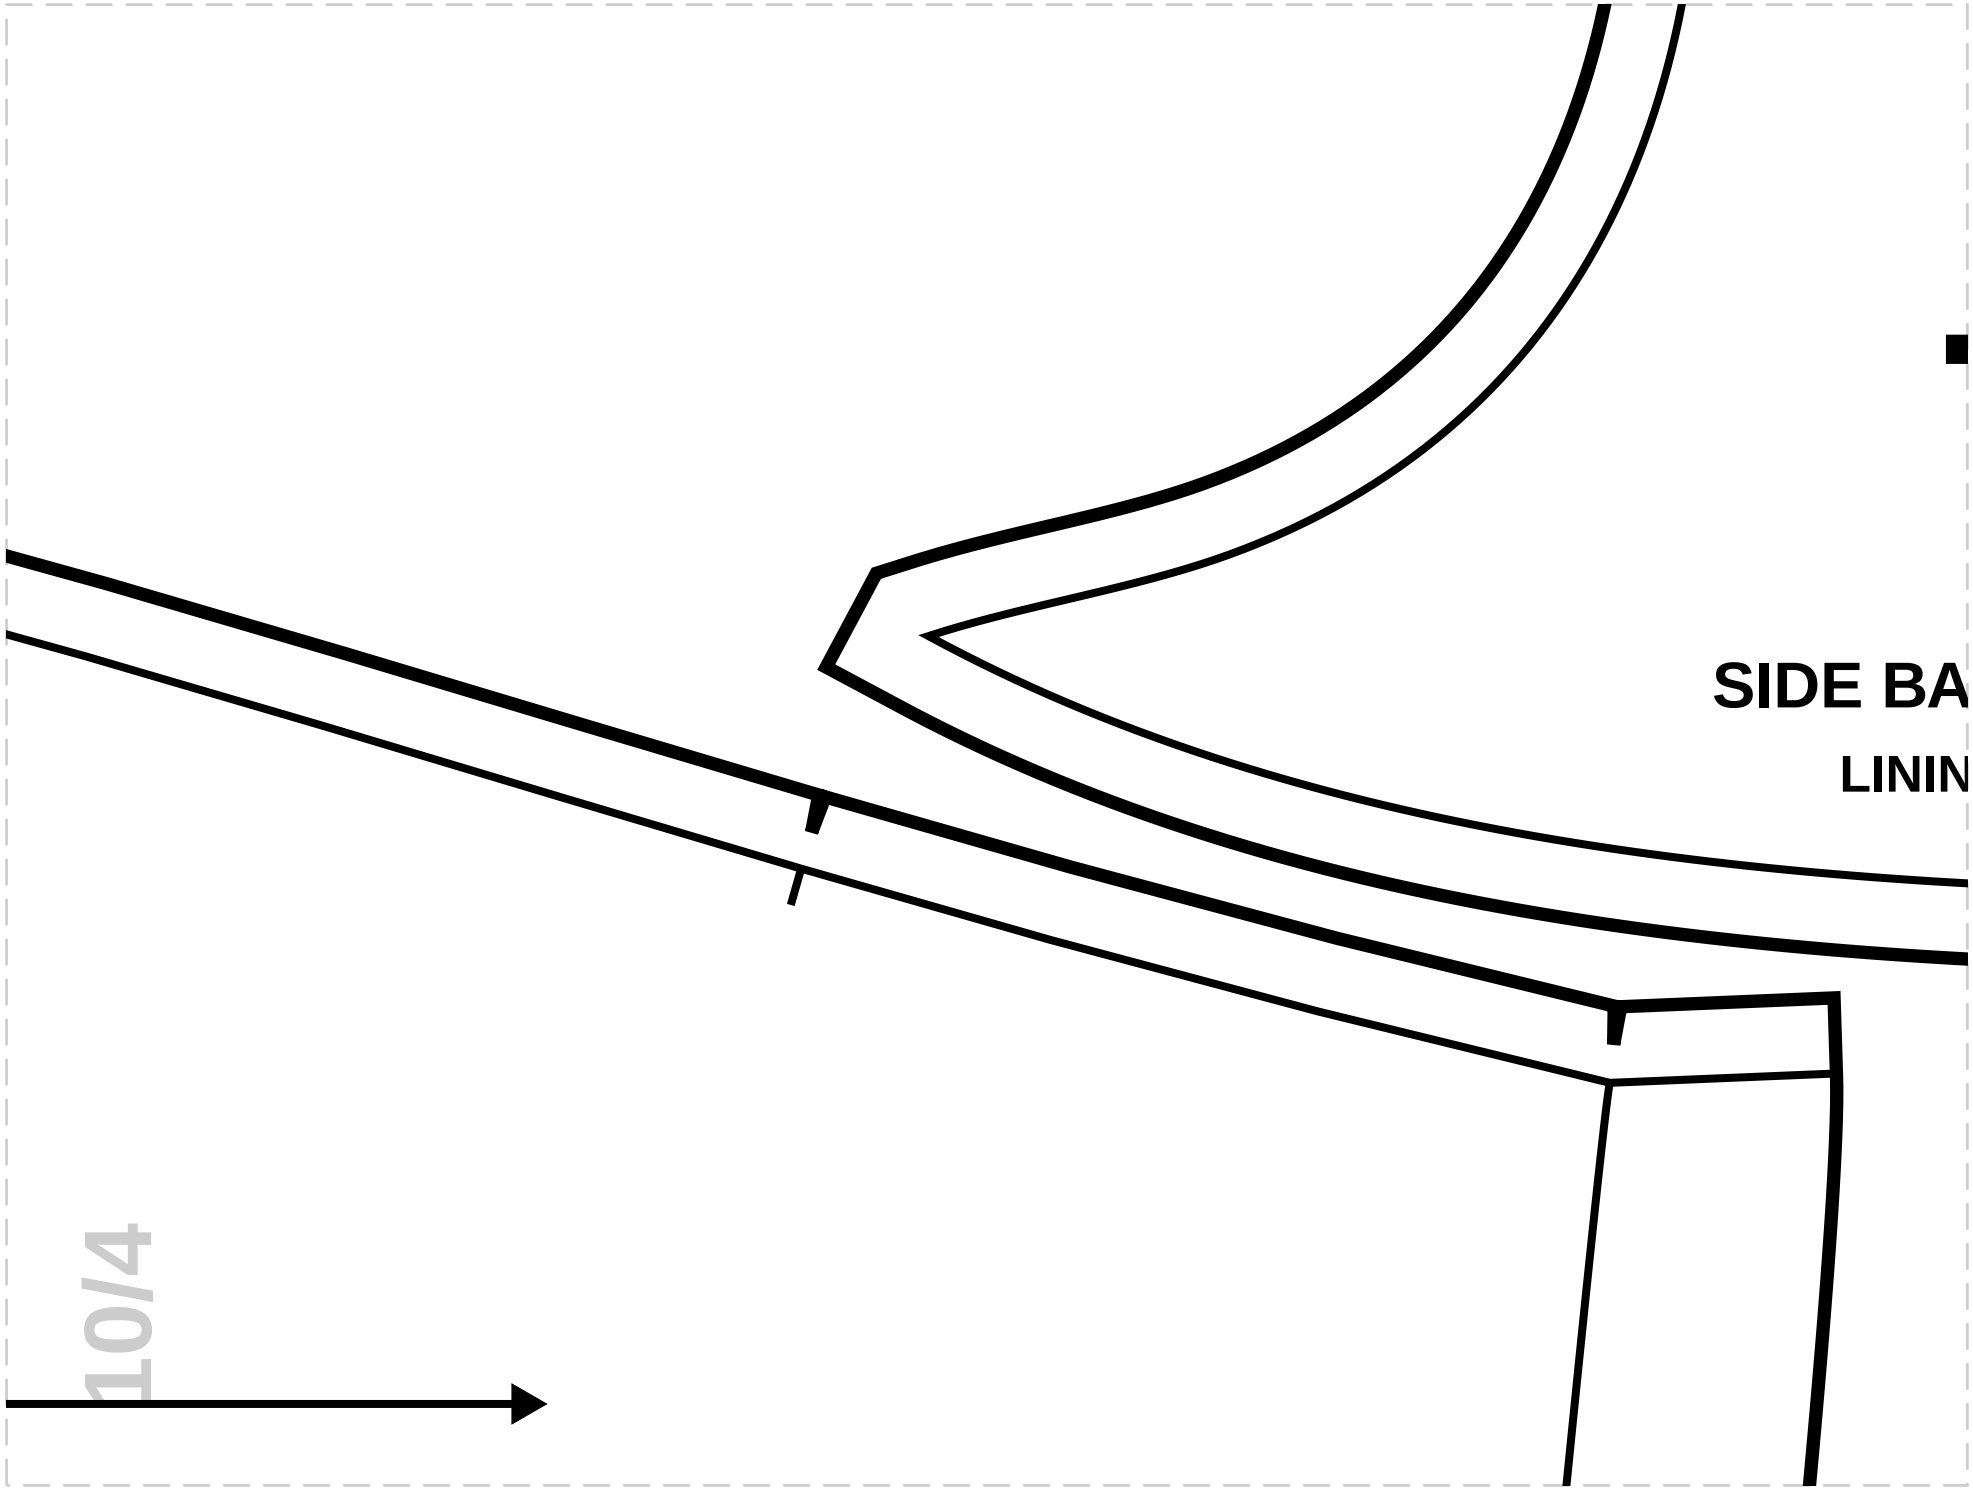
SIDE BA
LININ
10/4

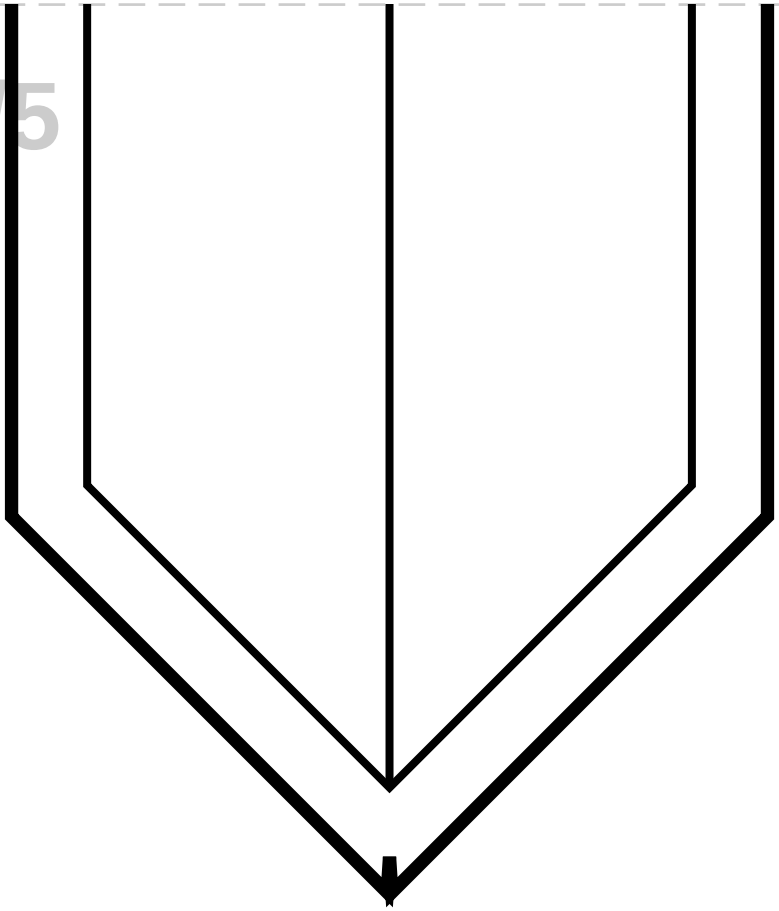

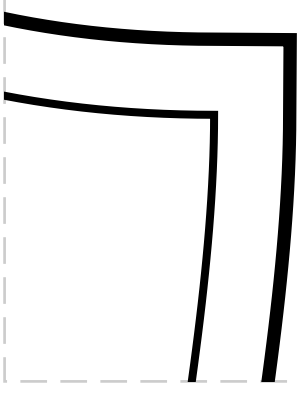

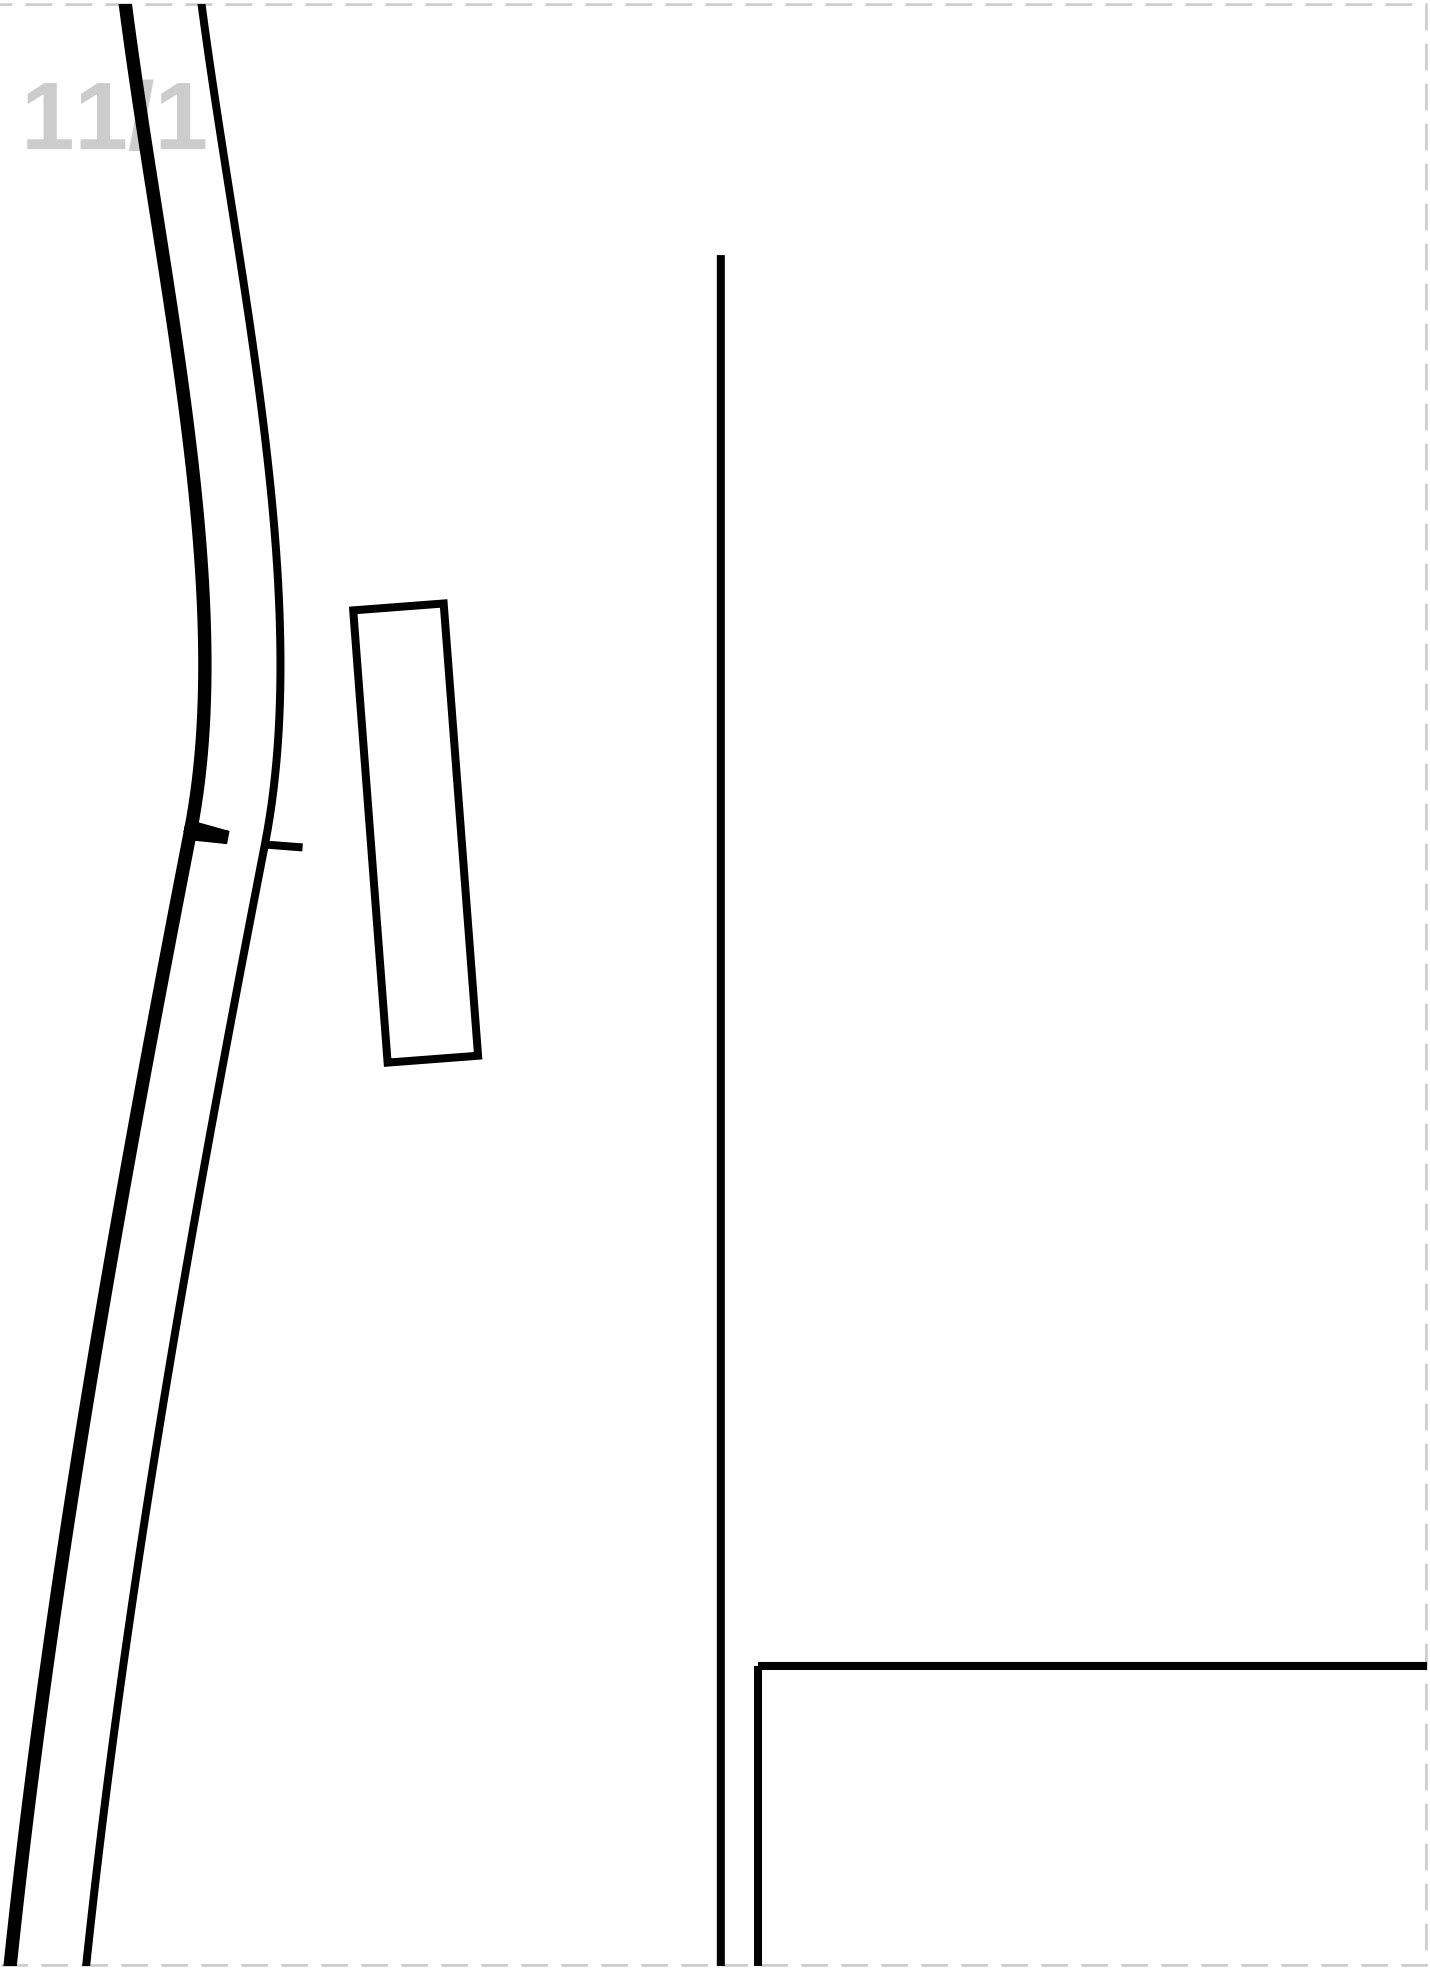




6

IDE BACK

I FABRIC: Cut 2

INTERFACING: Cut 2

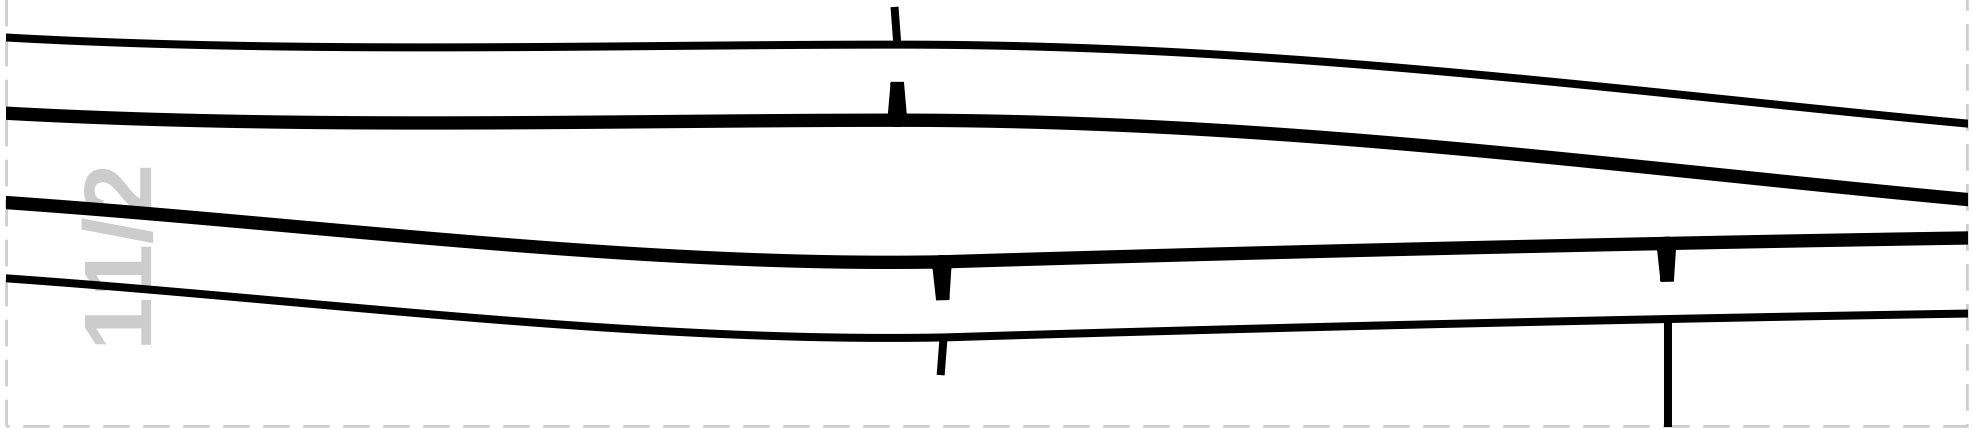

1 1/2

16


LOWER SLEEVE


MAIN FABRIC: Cut 2


7

CK LINING

G: Cut 2

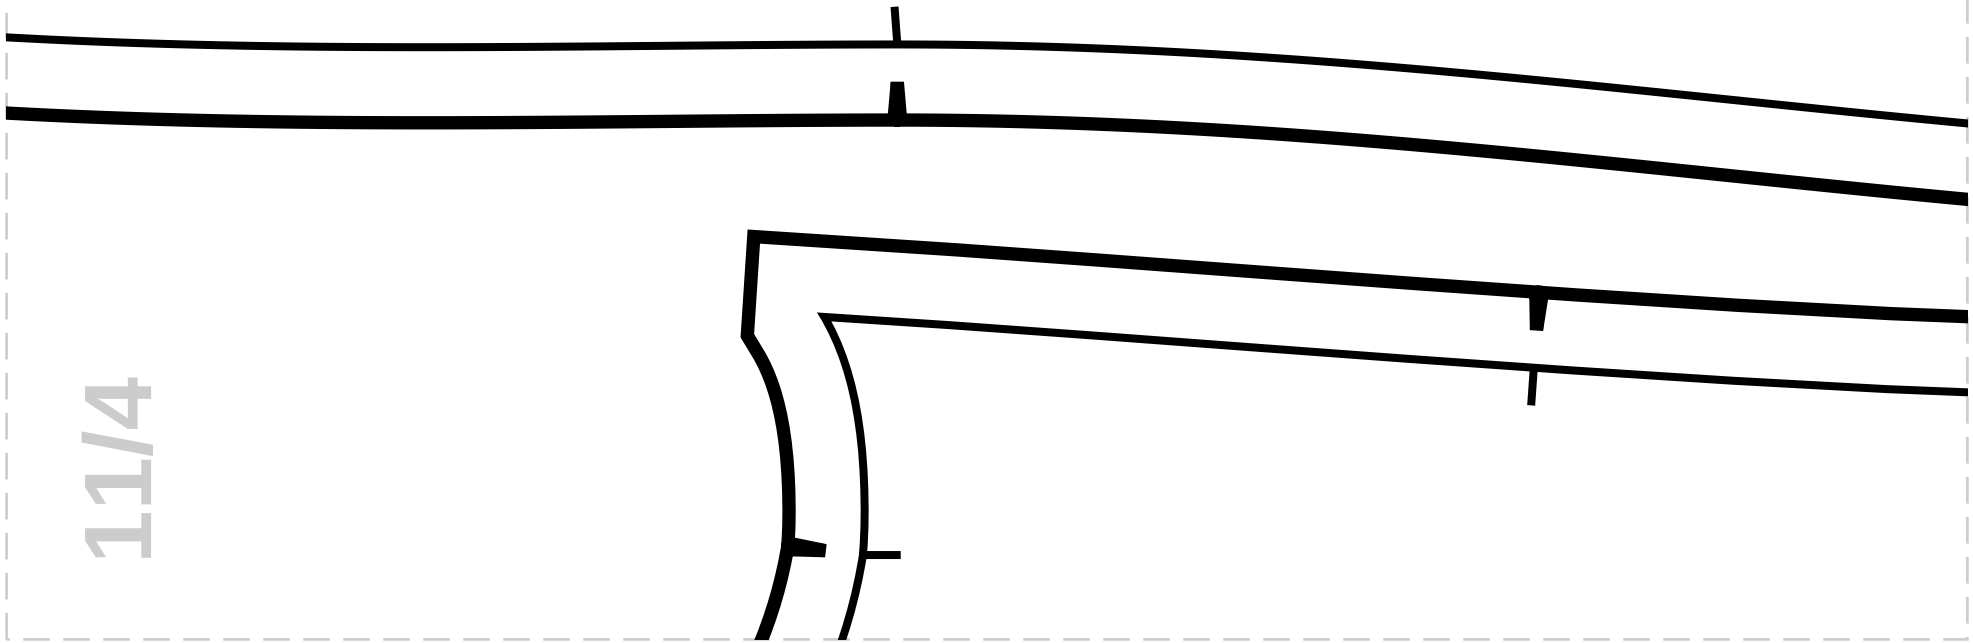

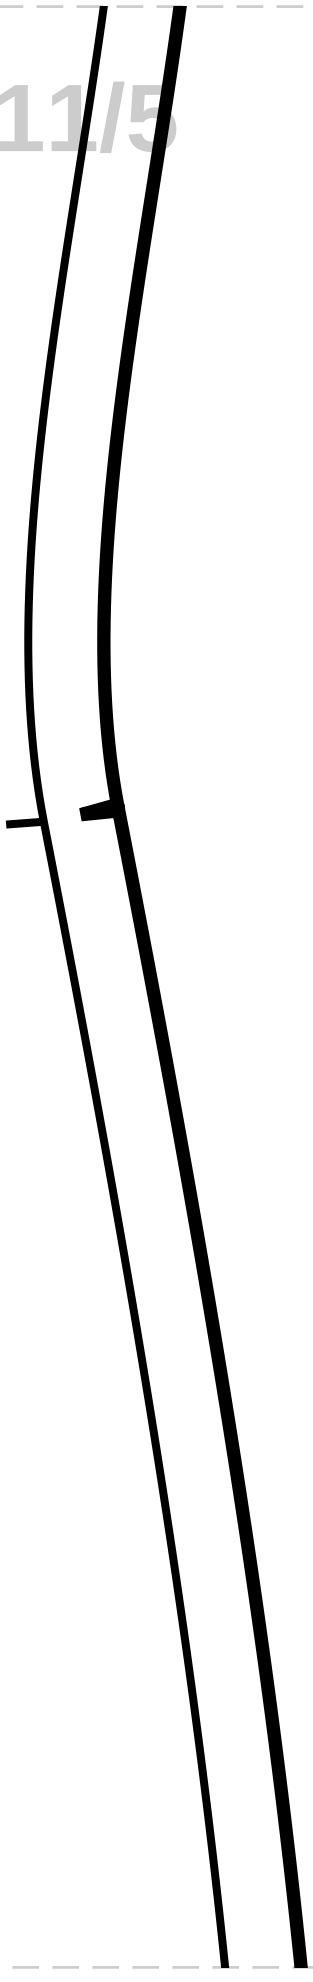

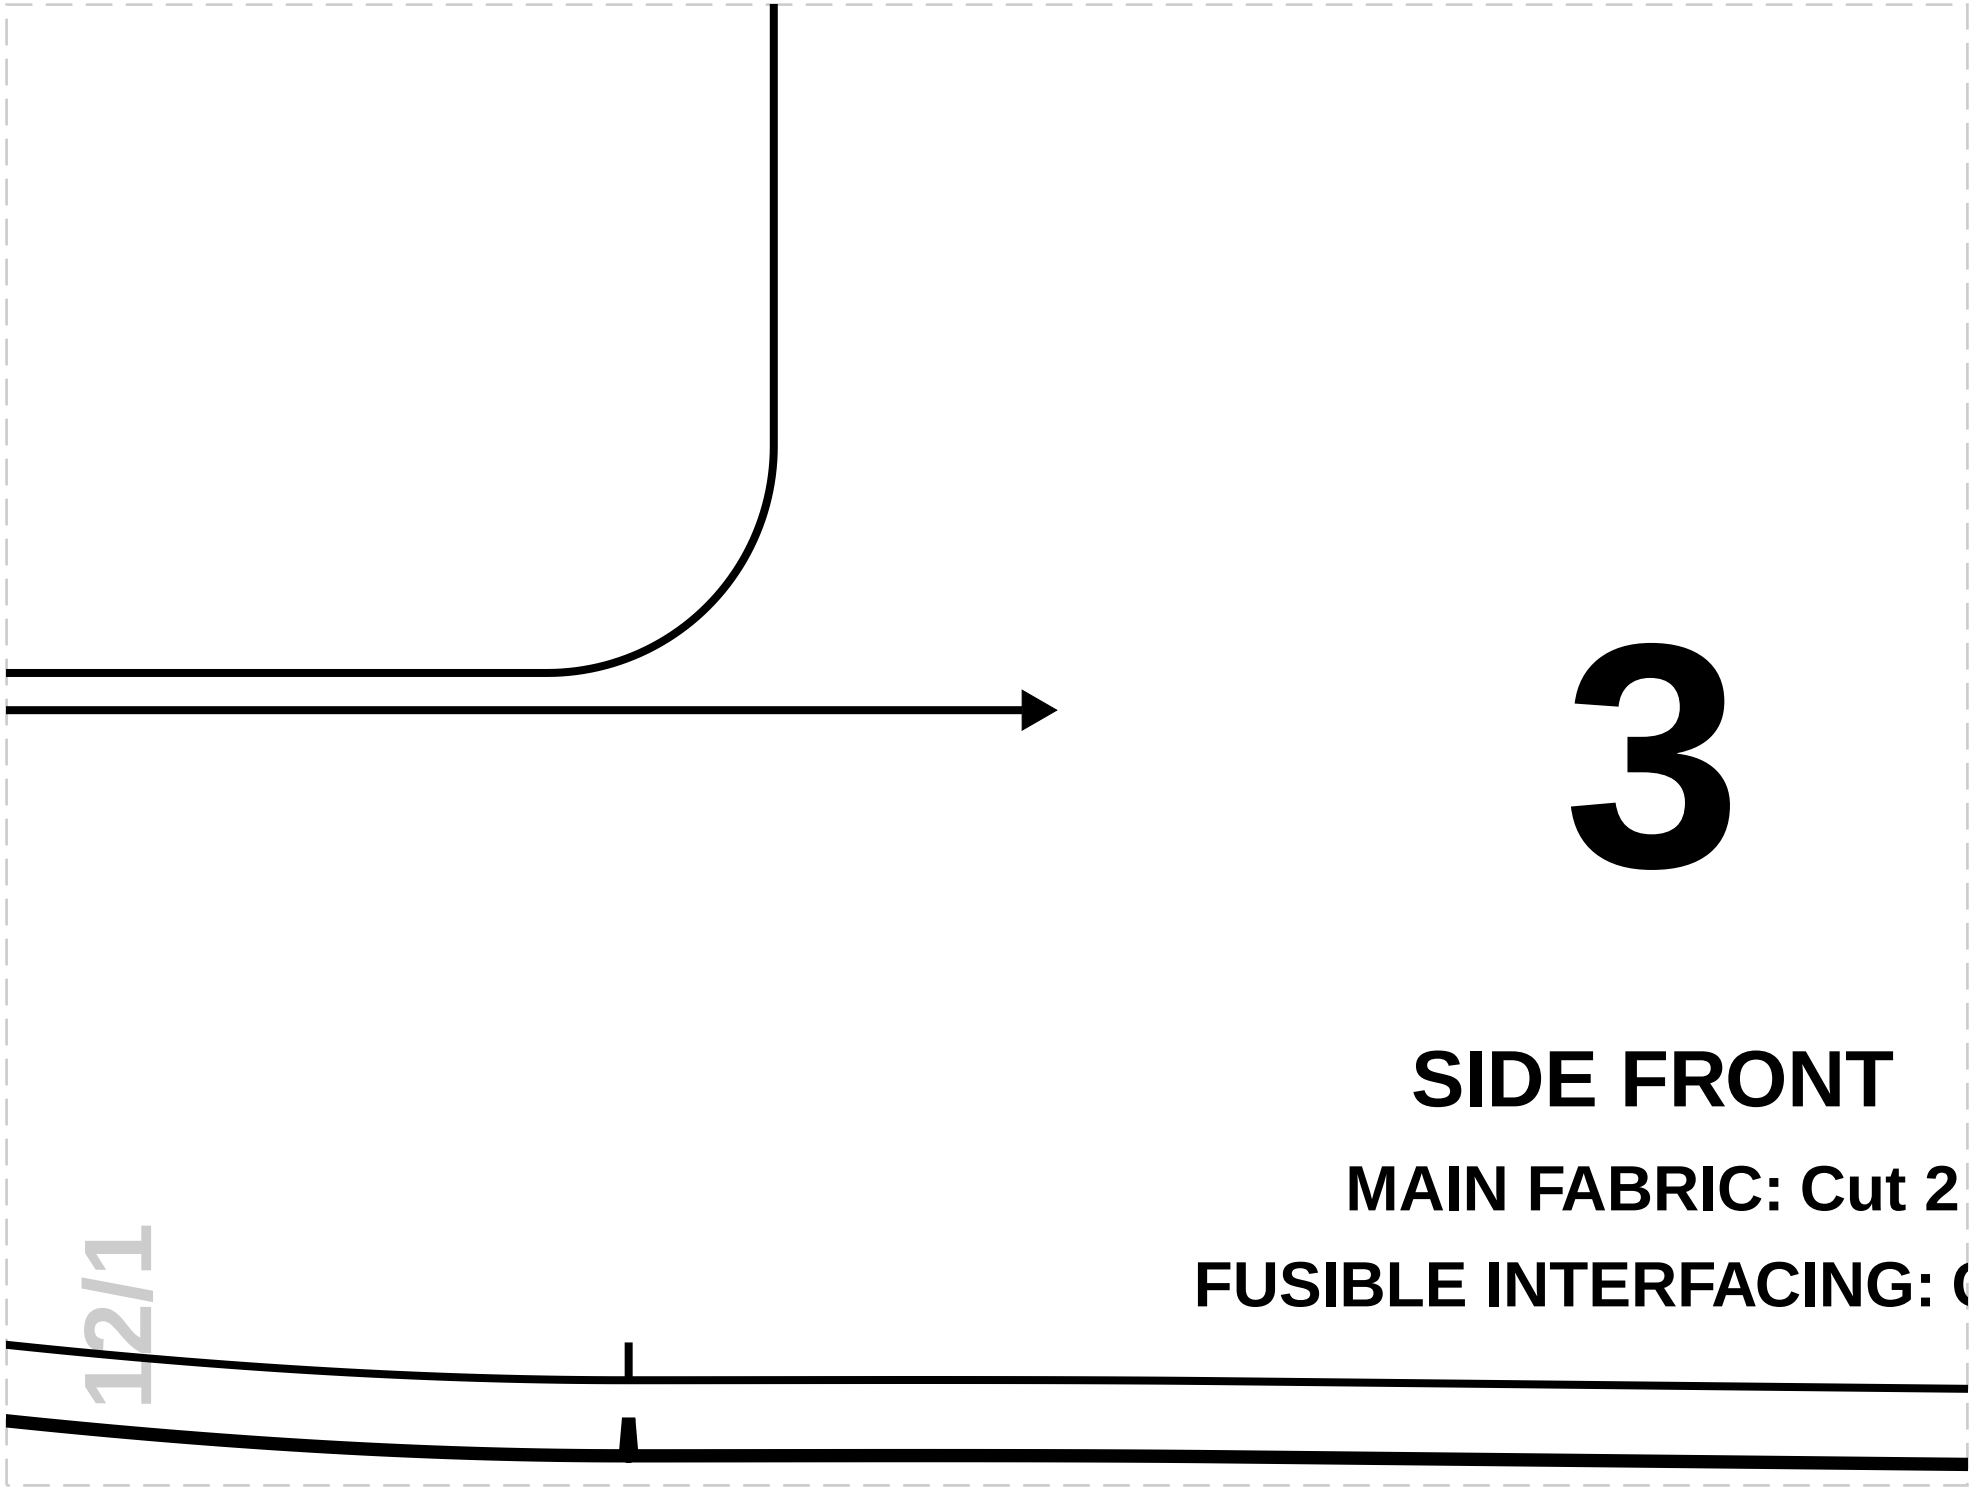


3


SIDE FRONT


MAIN FABRIC: Cut 2

FUSIBLE INTERFACING: C


12/1

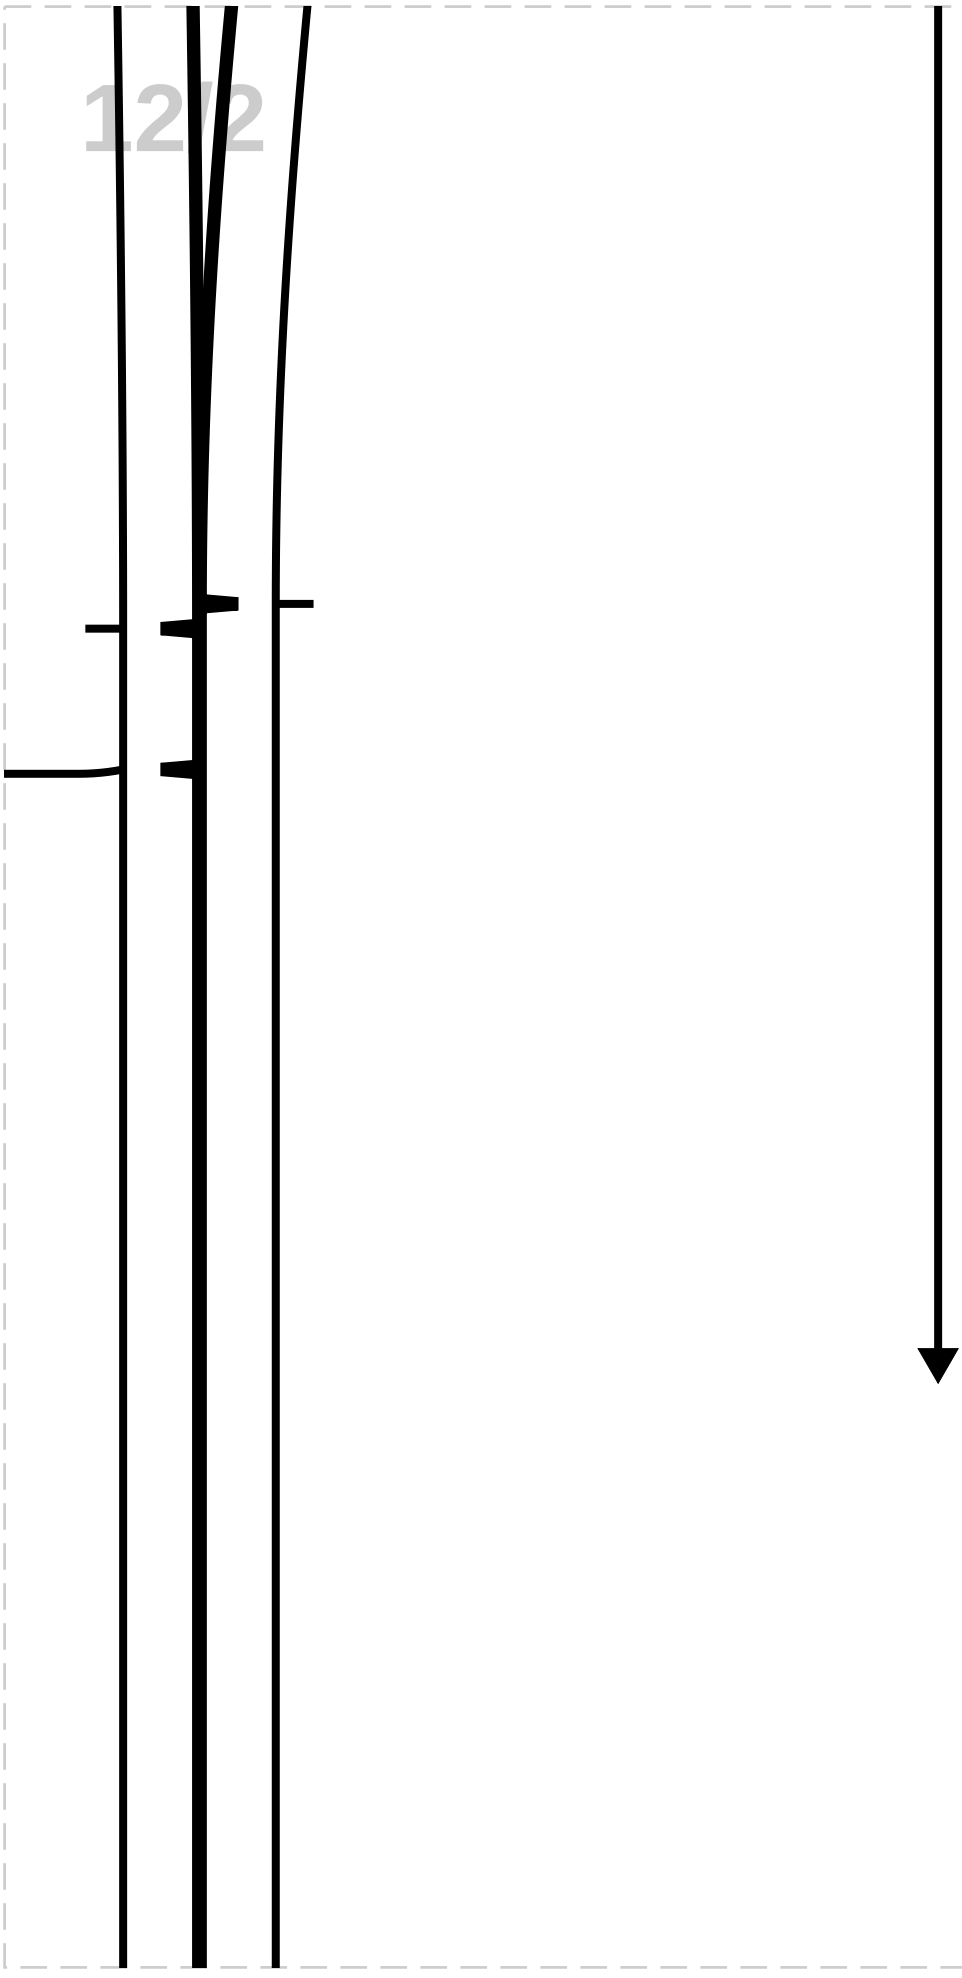


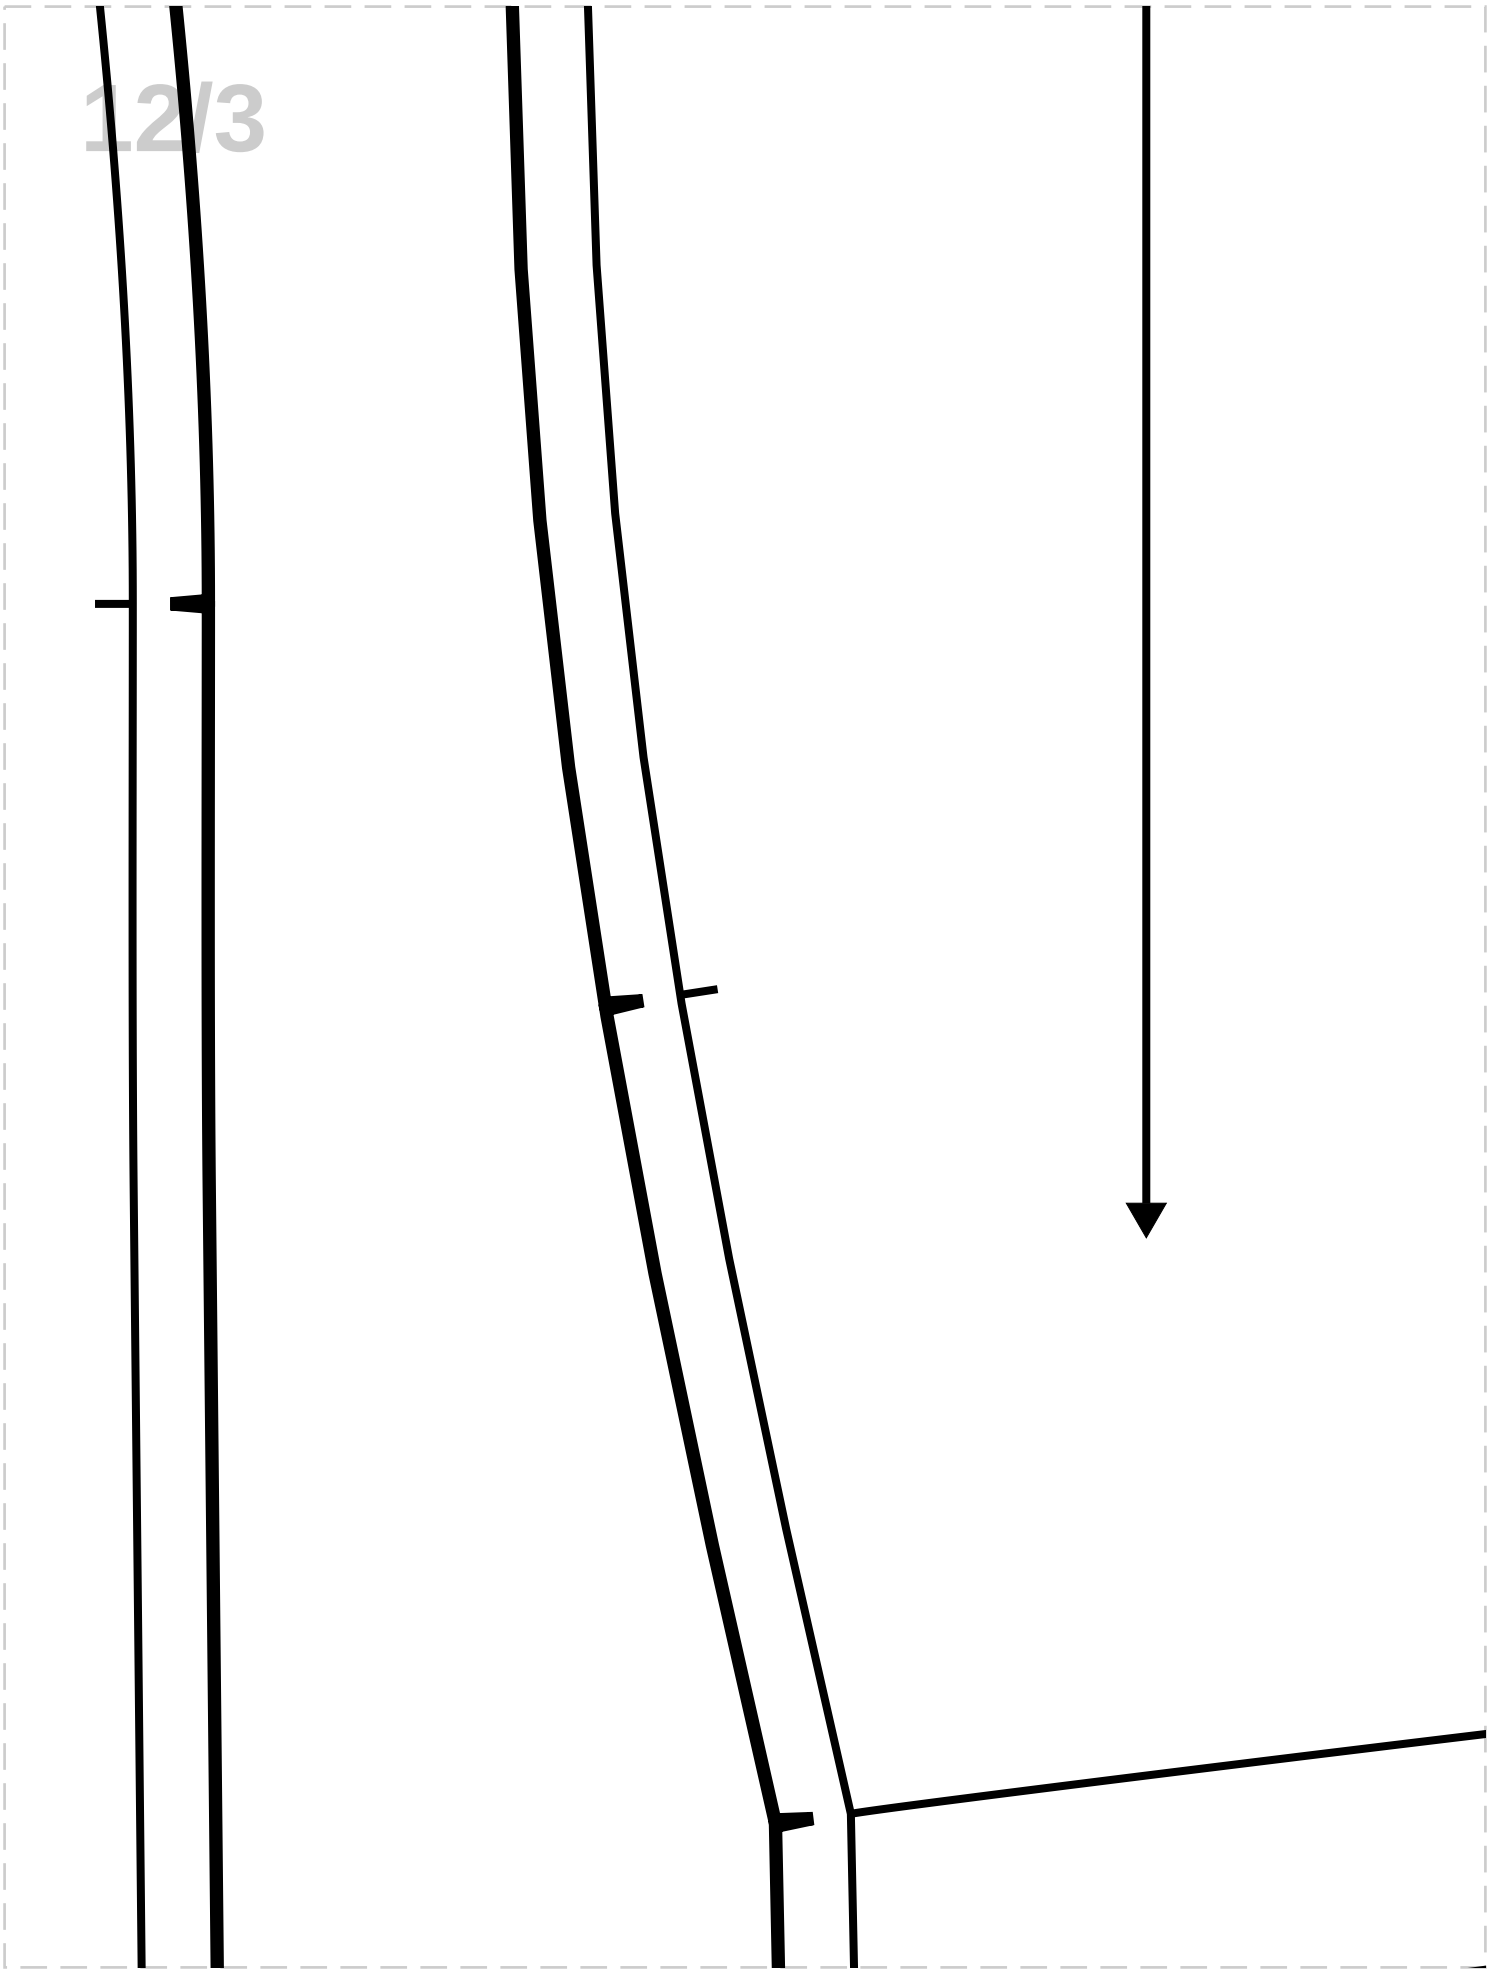

12/3

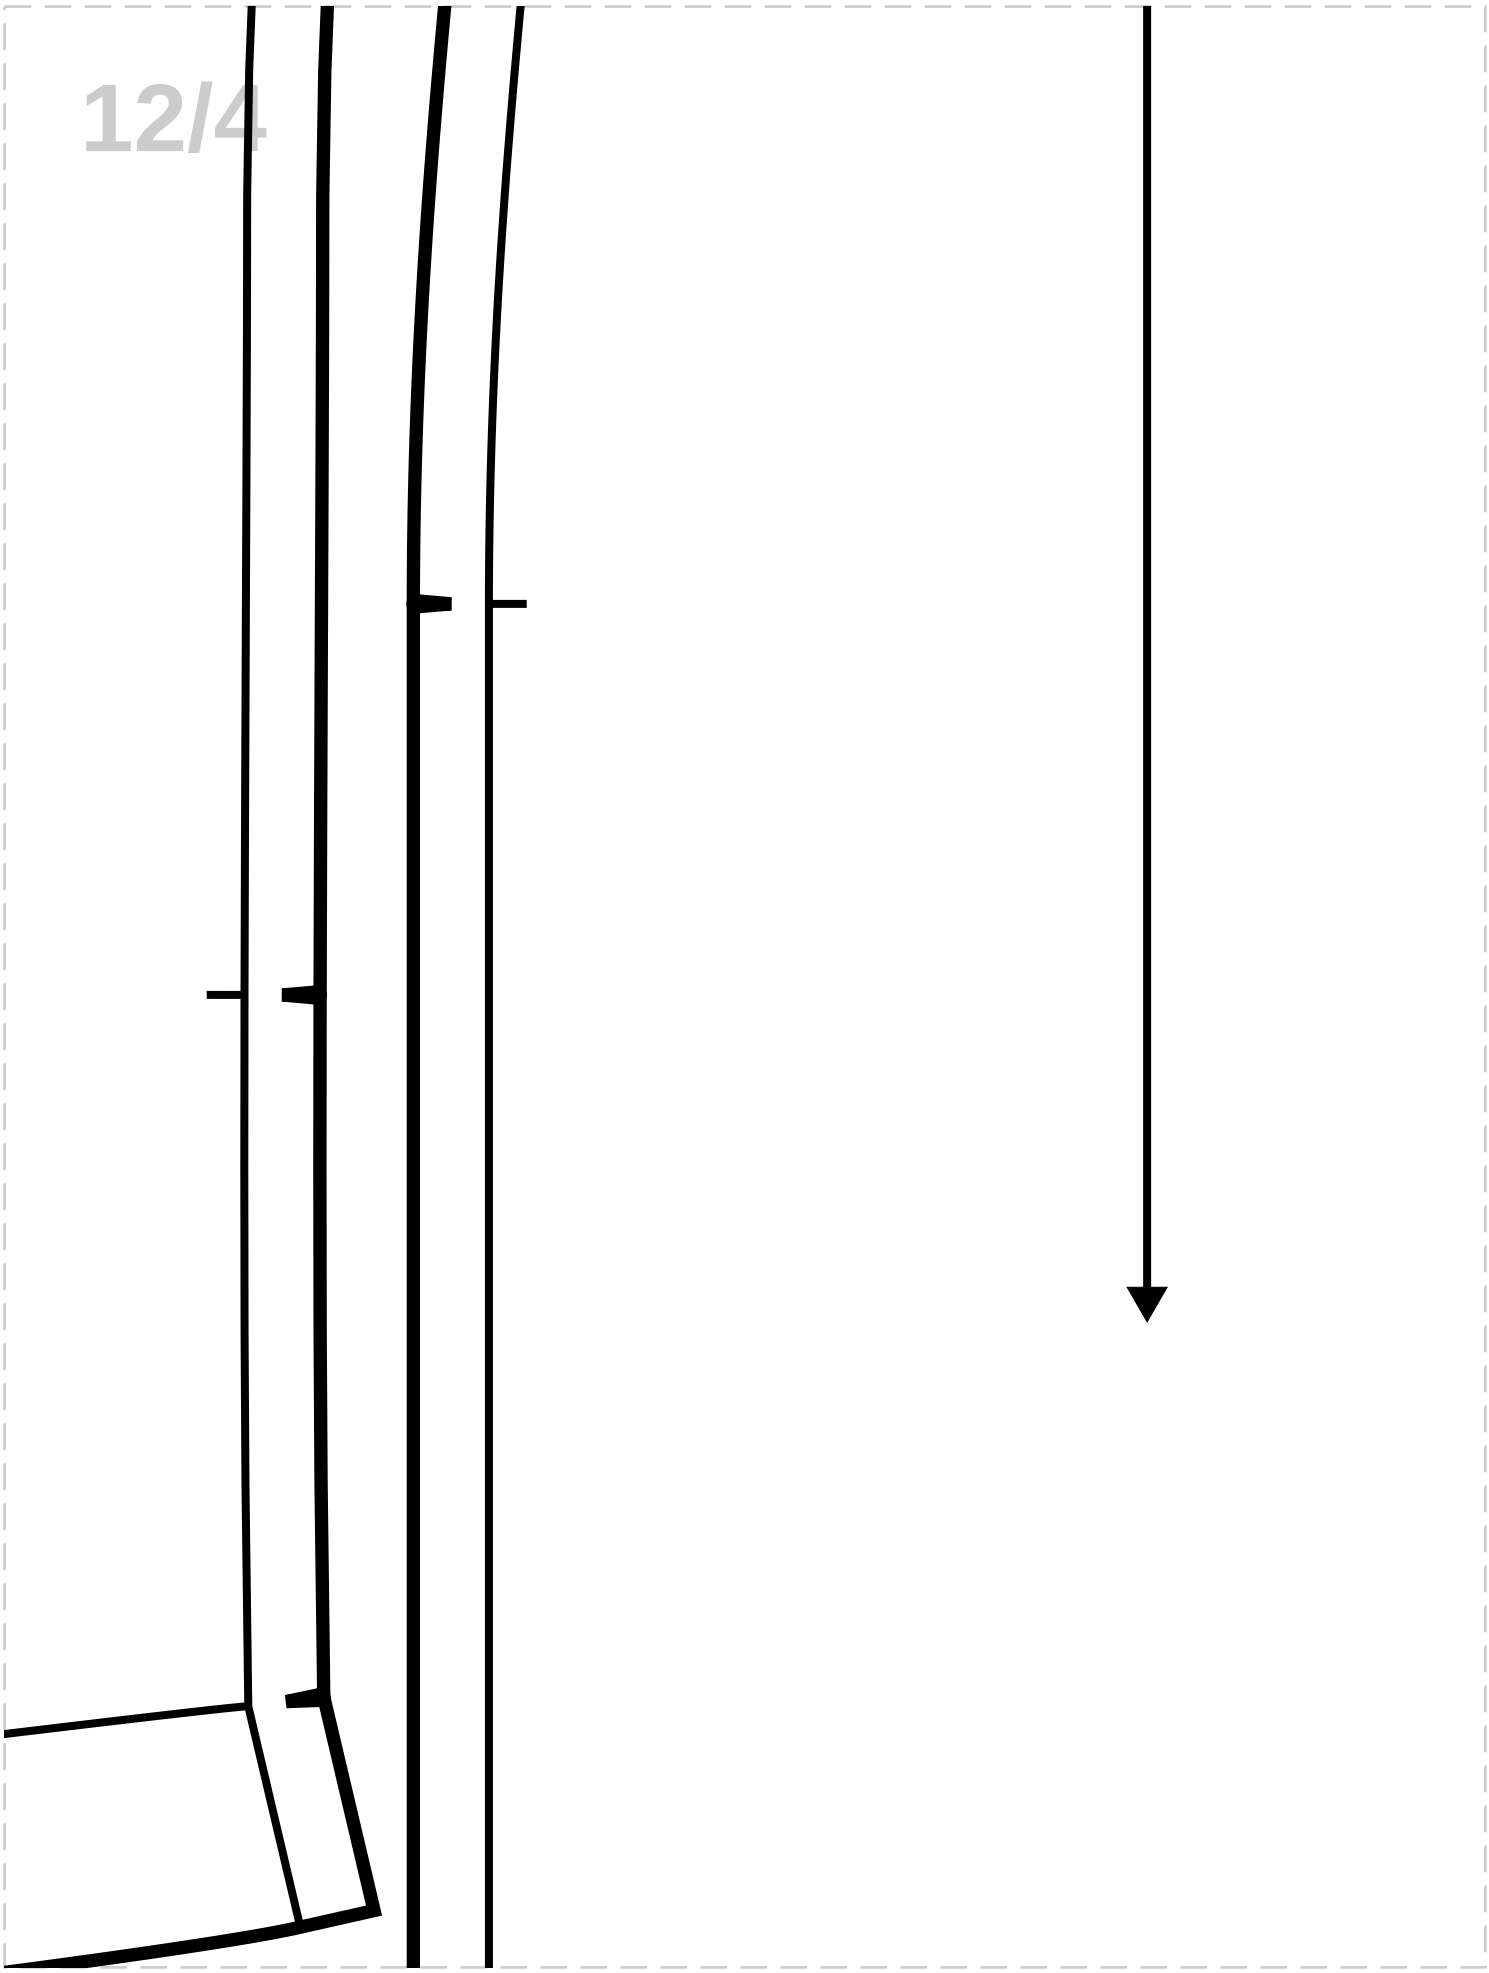


12/5

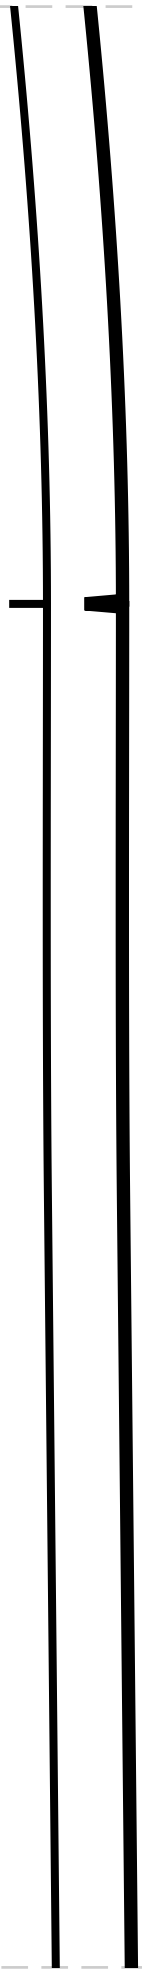

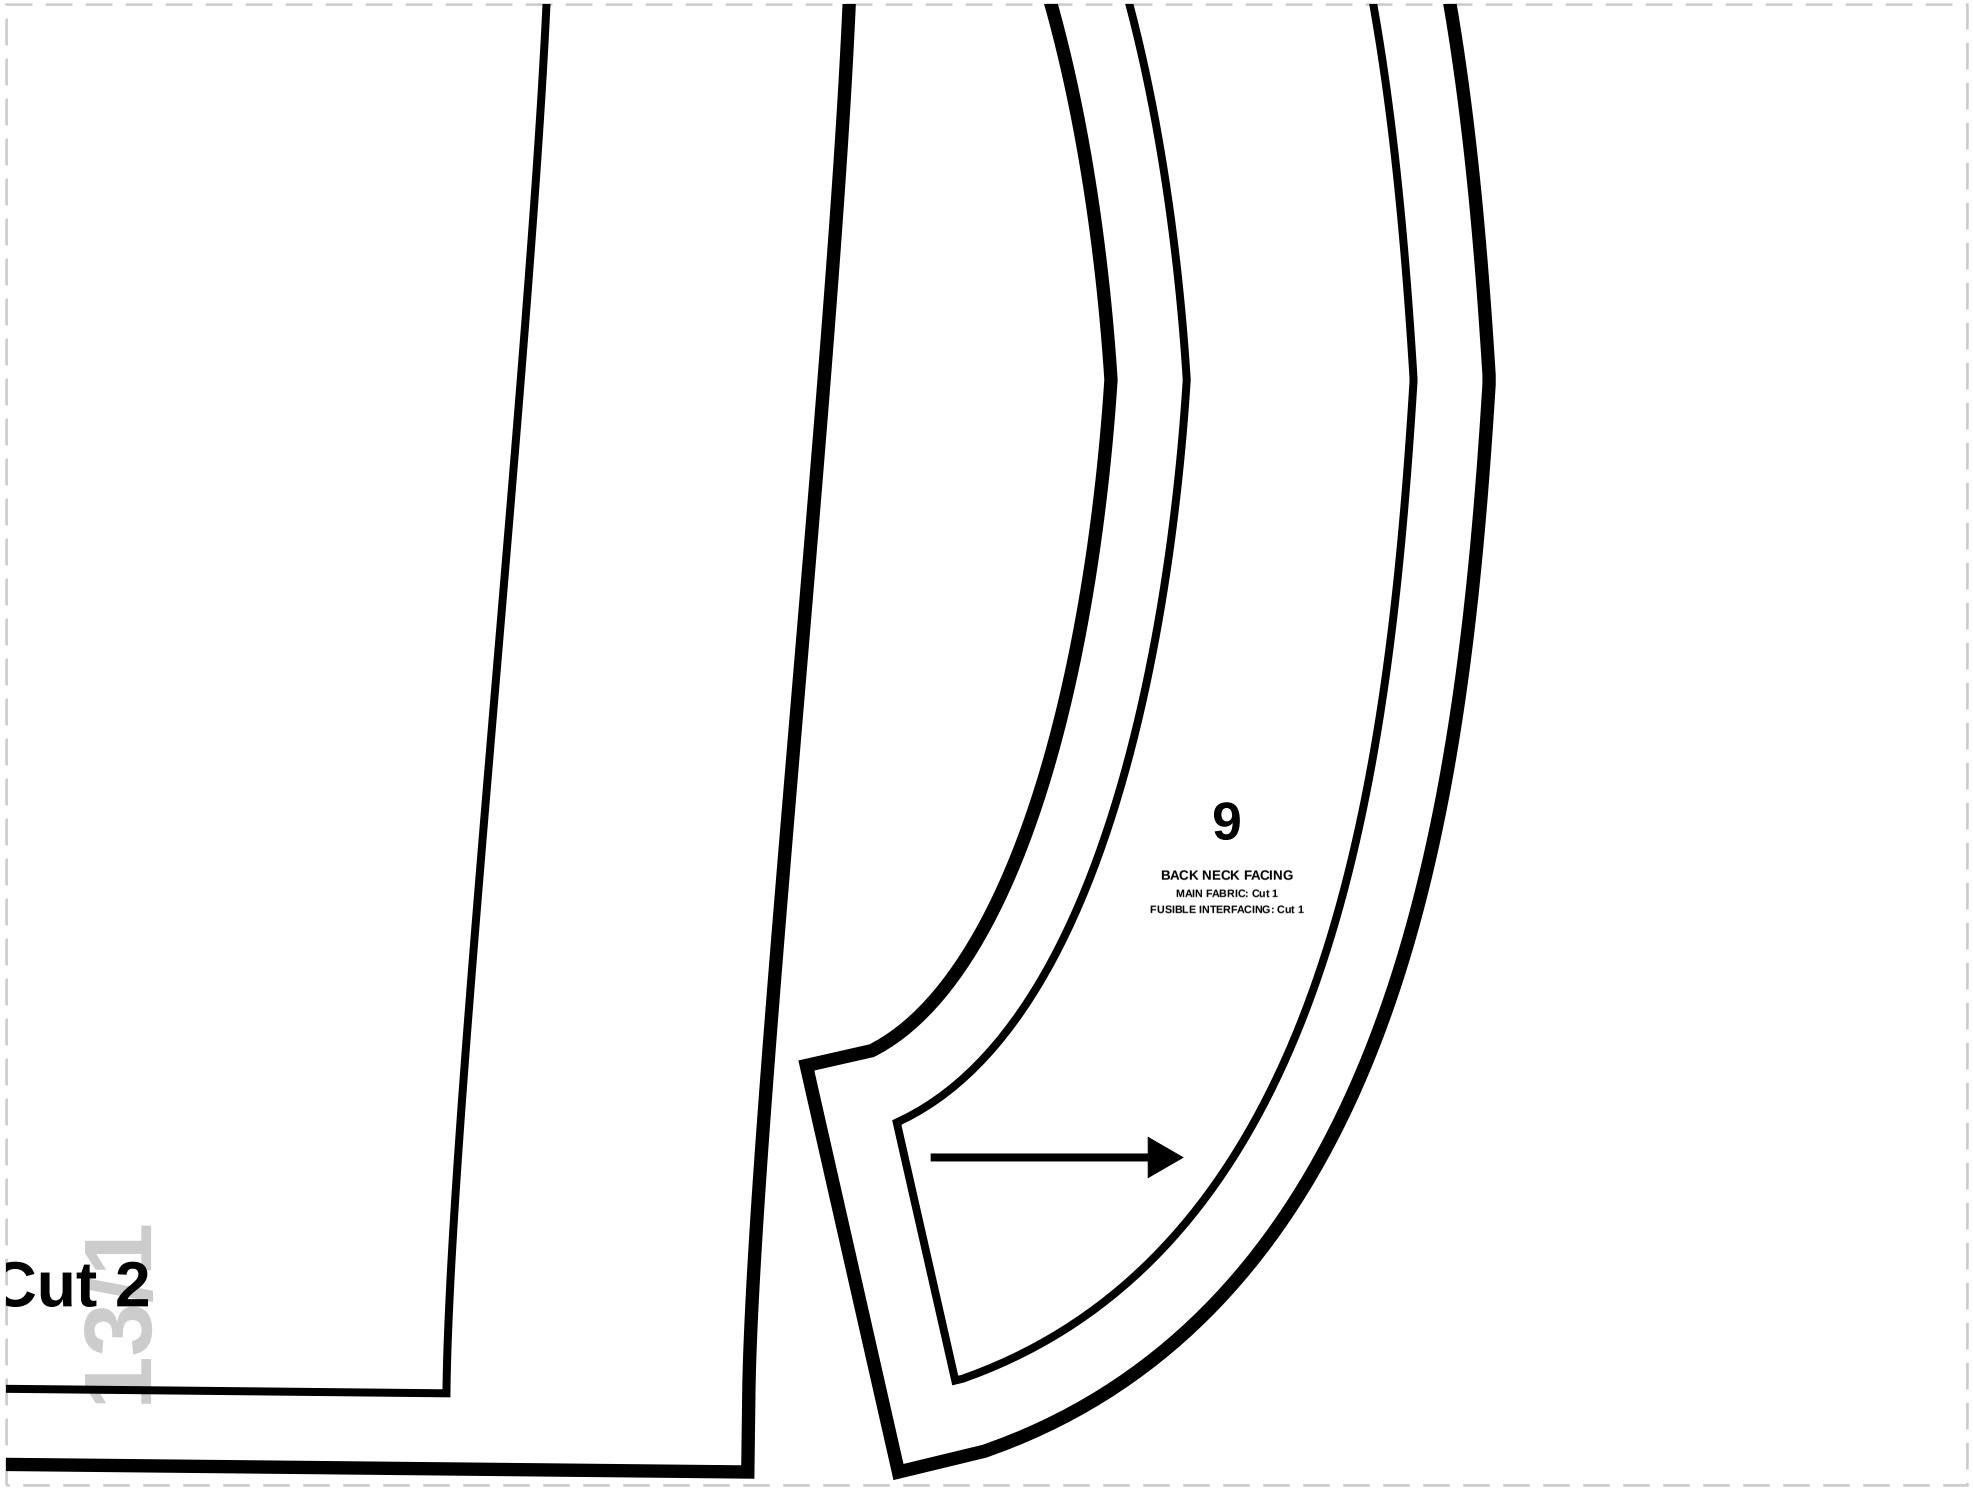
9
BACK NECK FACING
MAIN FABRIC: Cut 1
FUSIBLE INTERFACING: Cut 1
Cut 2
L31

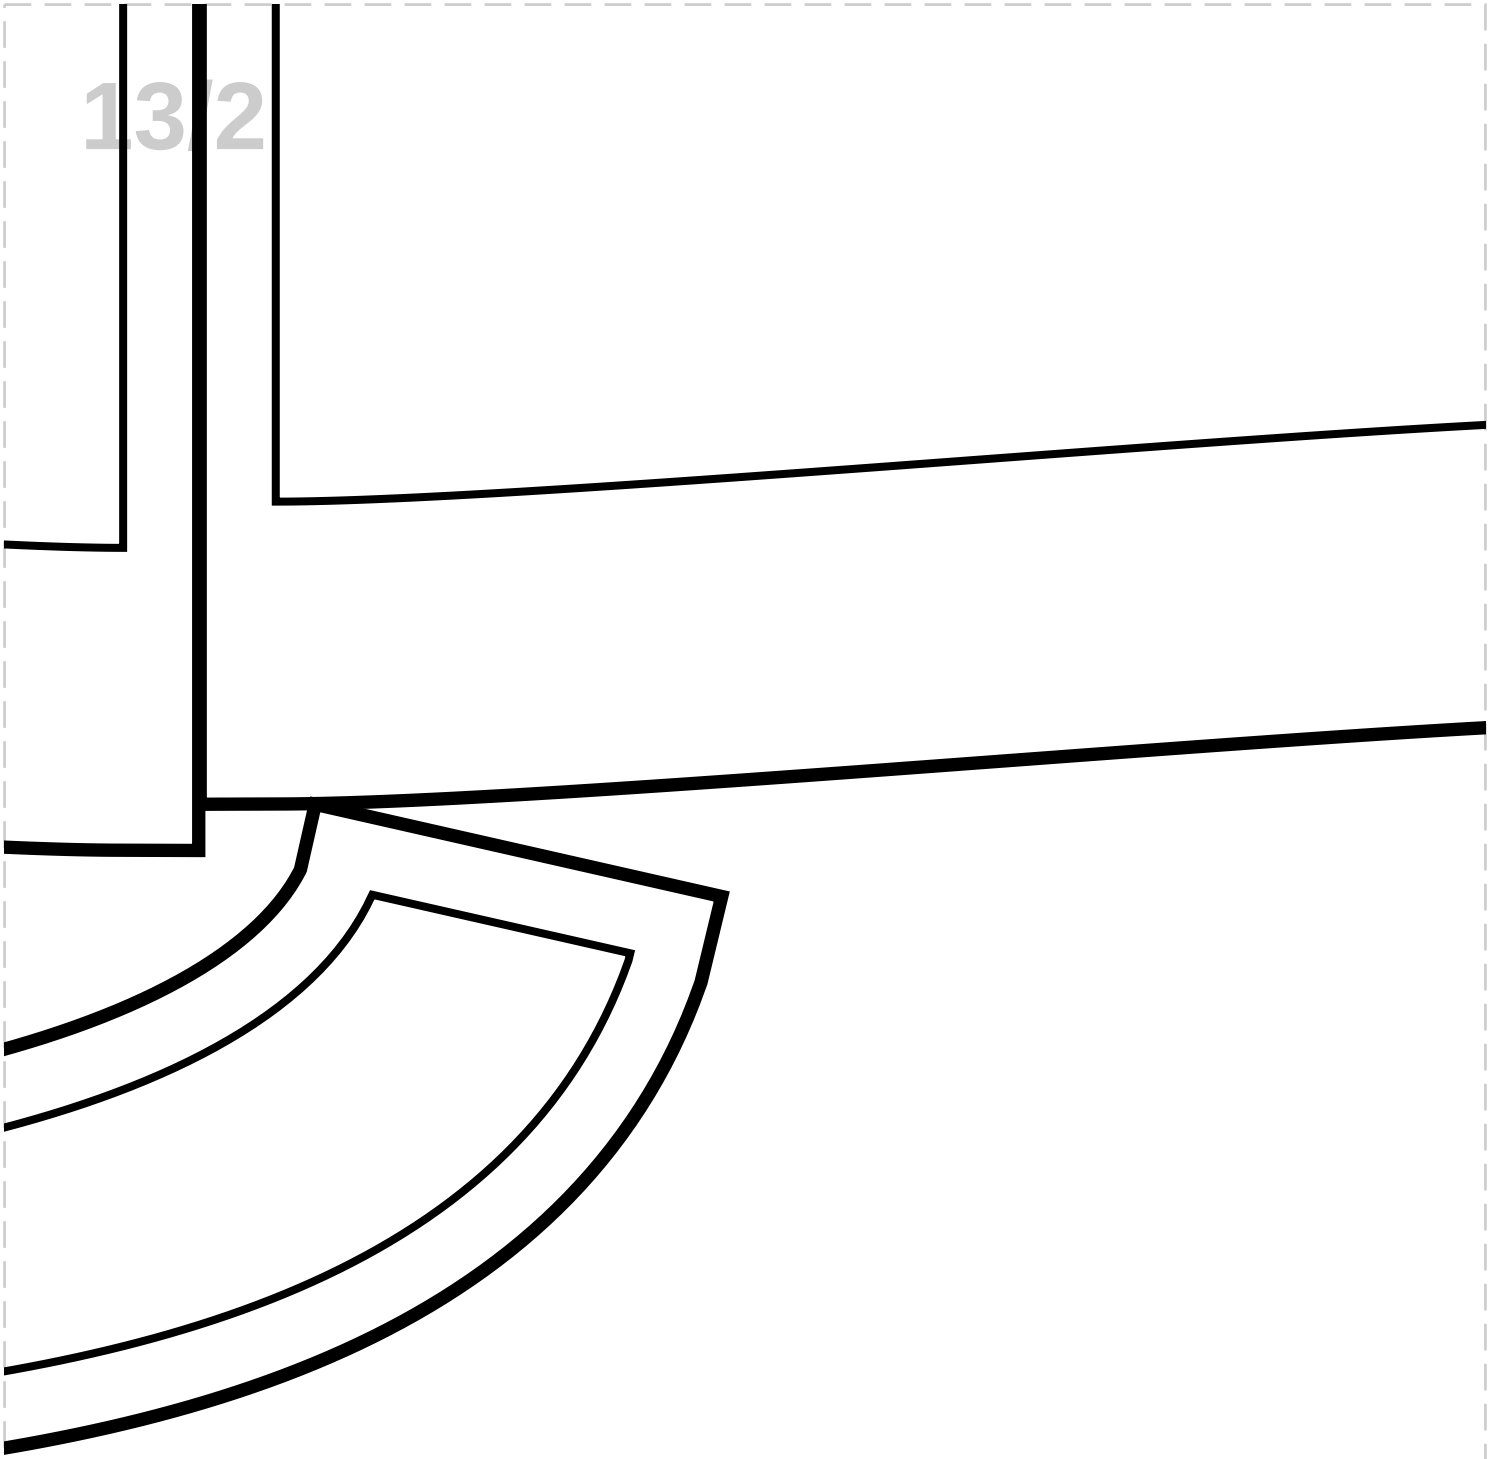

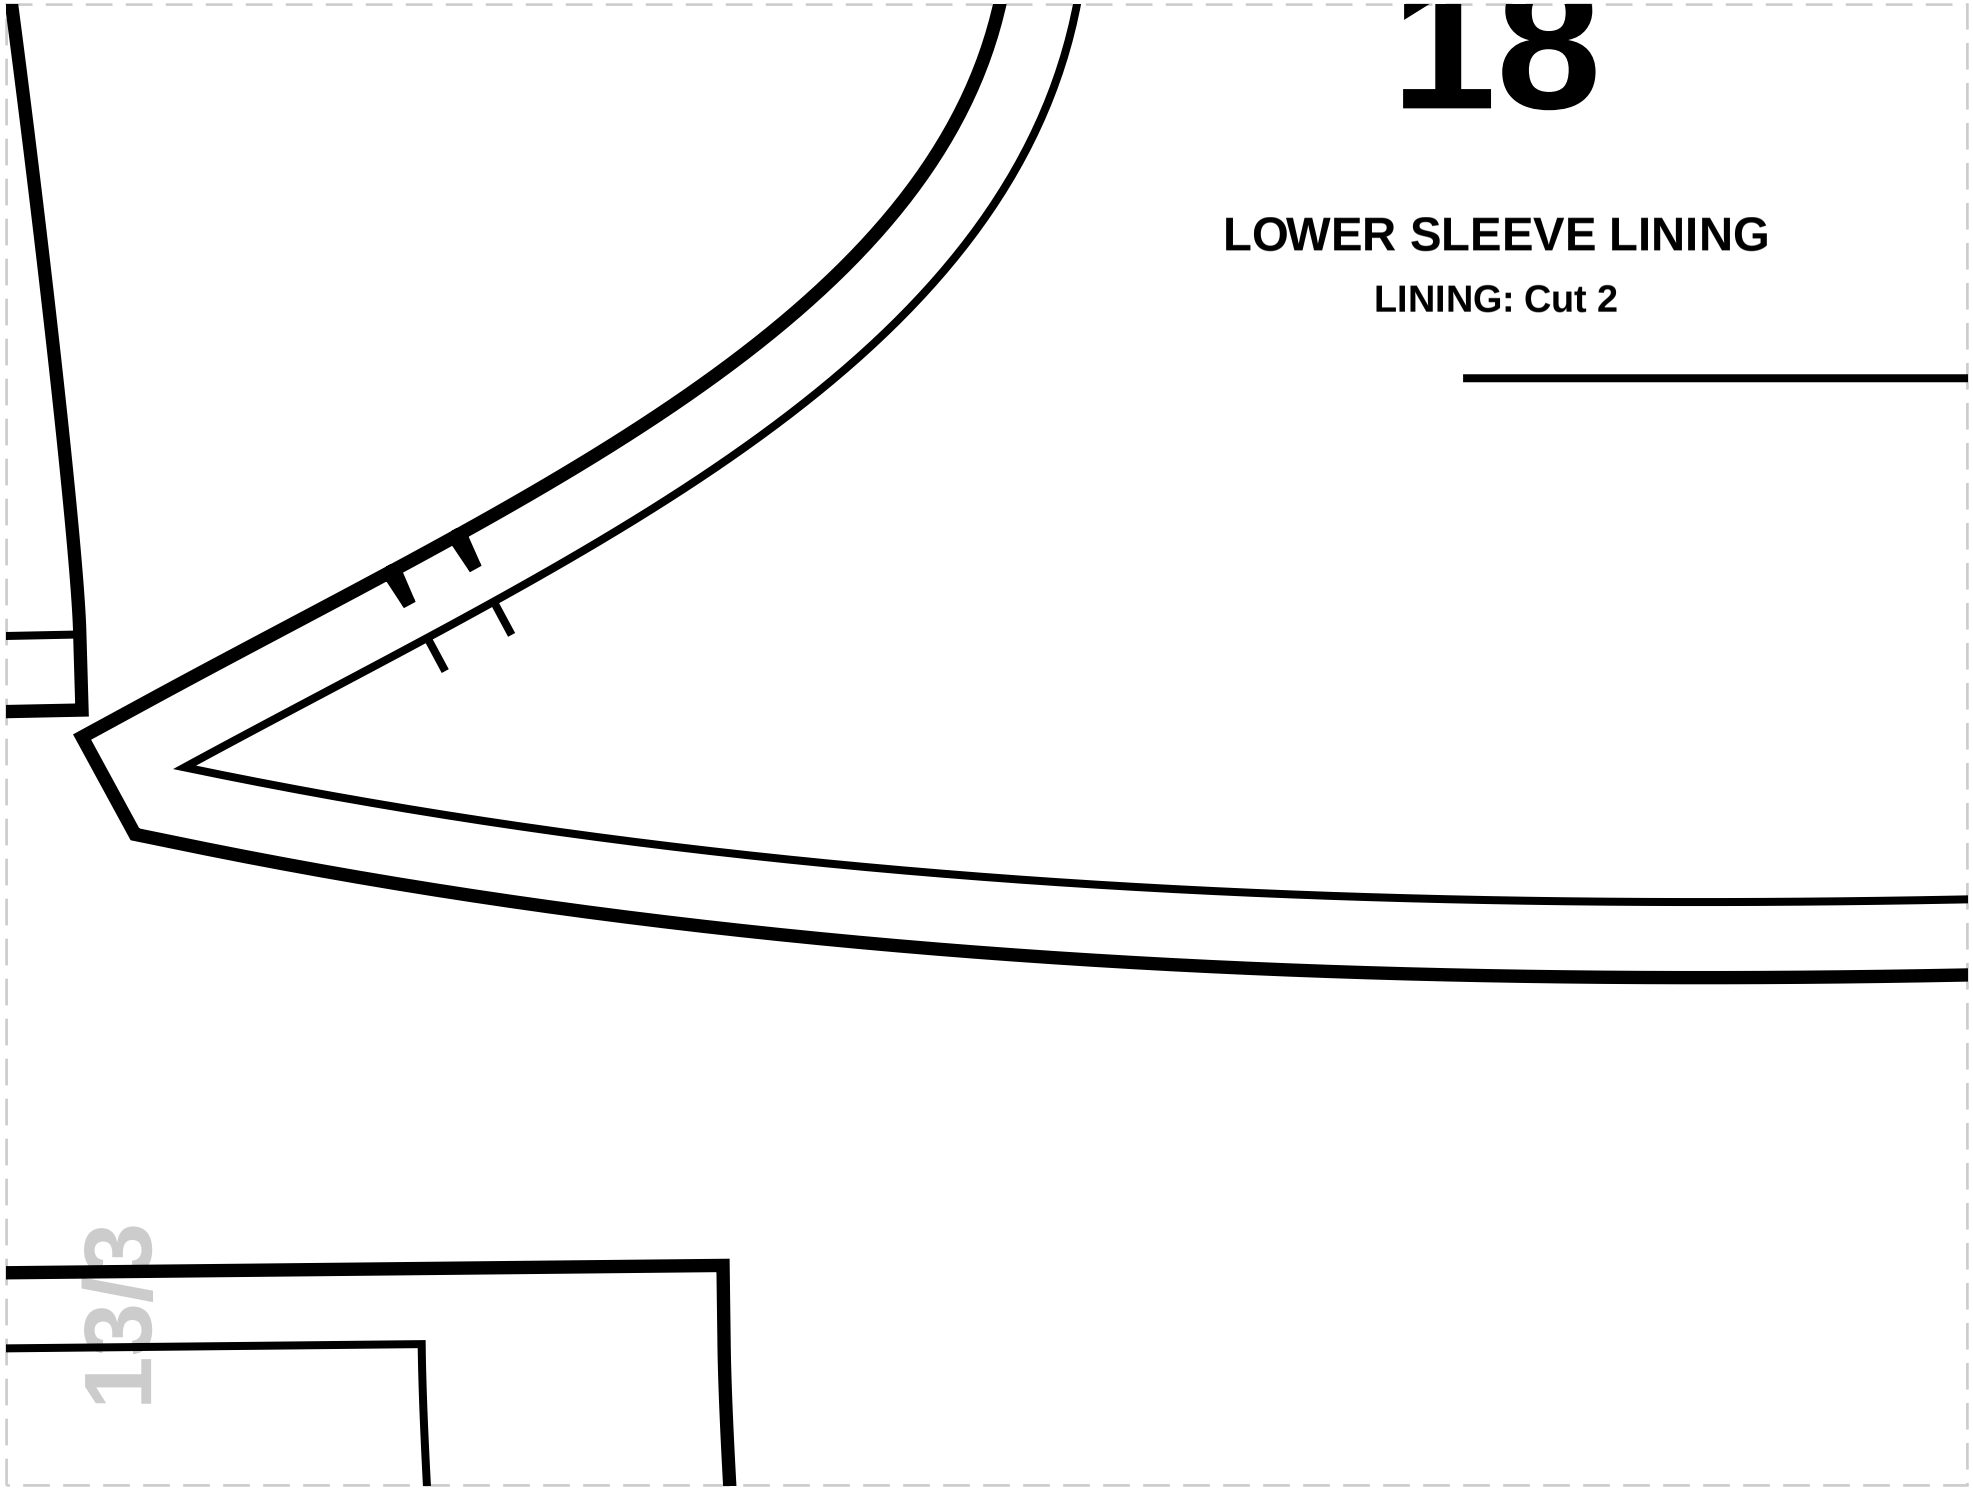



18

LOWER SLEEVE LINING

LINING: Cut 2

13/3

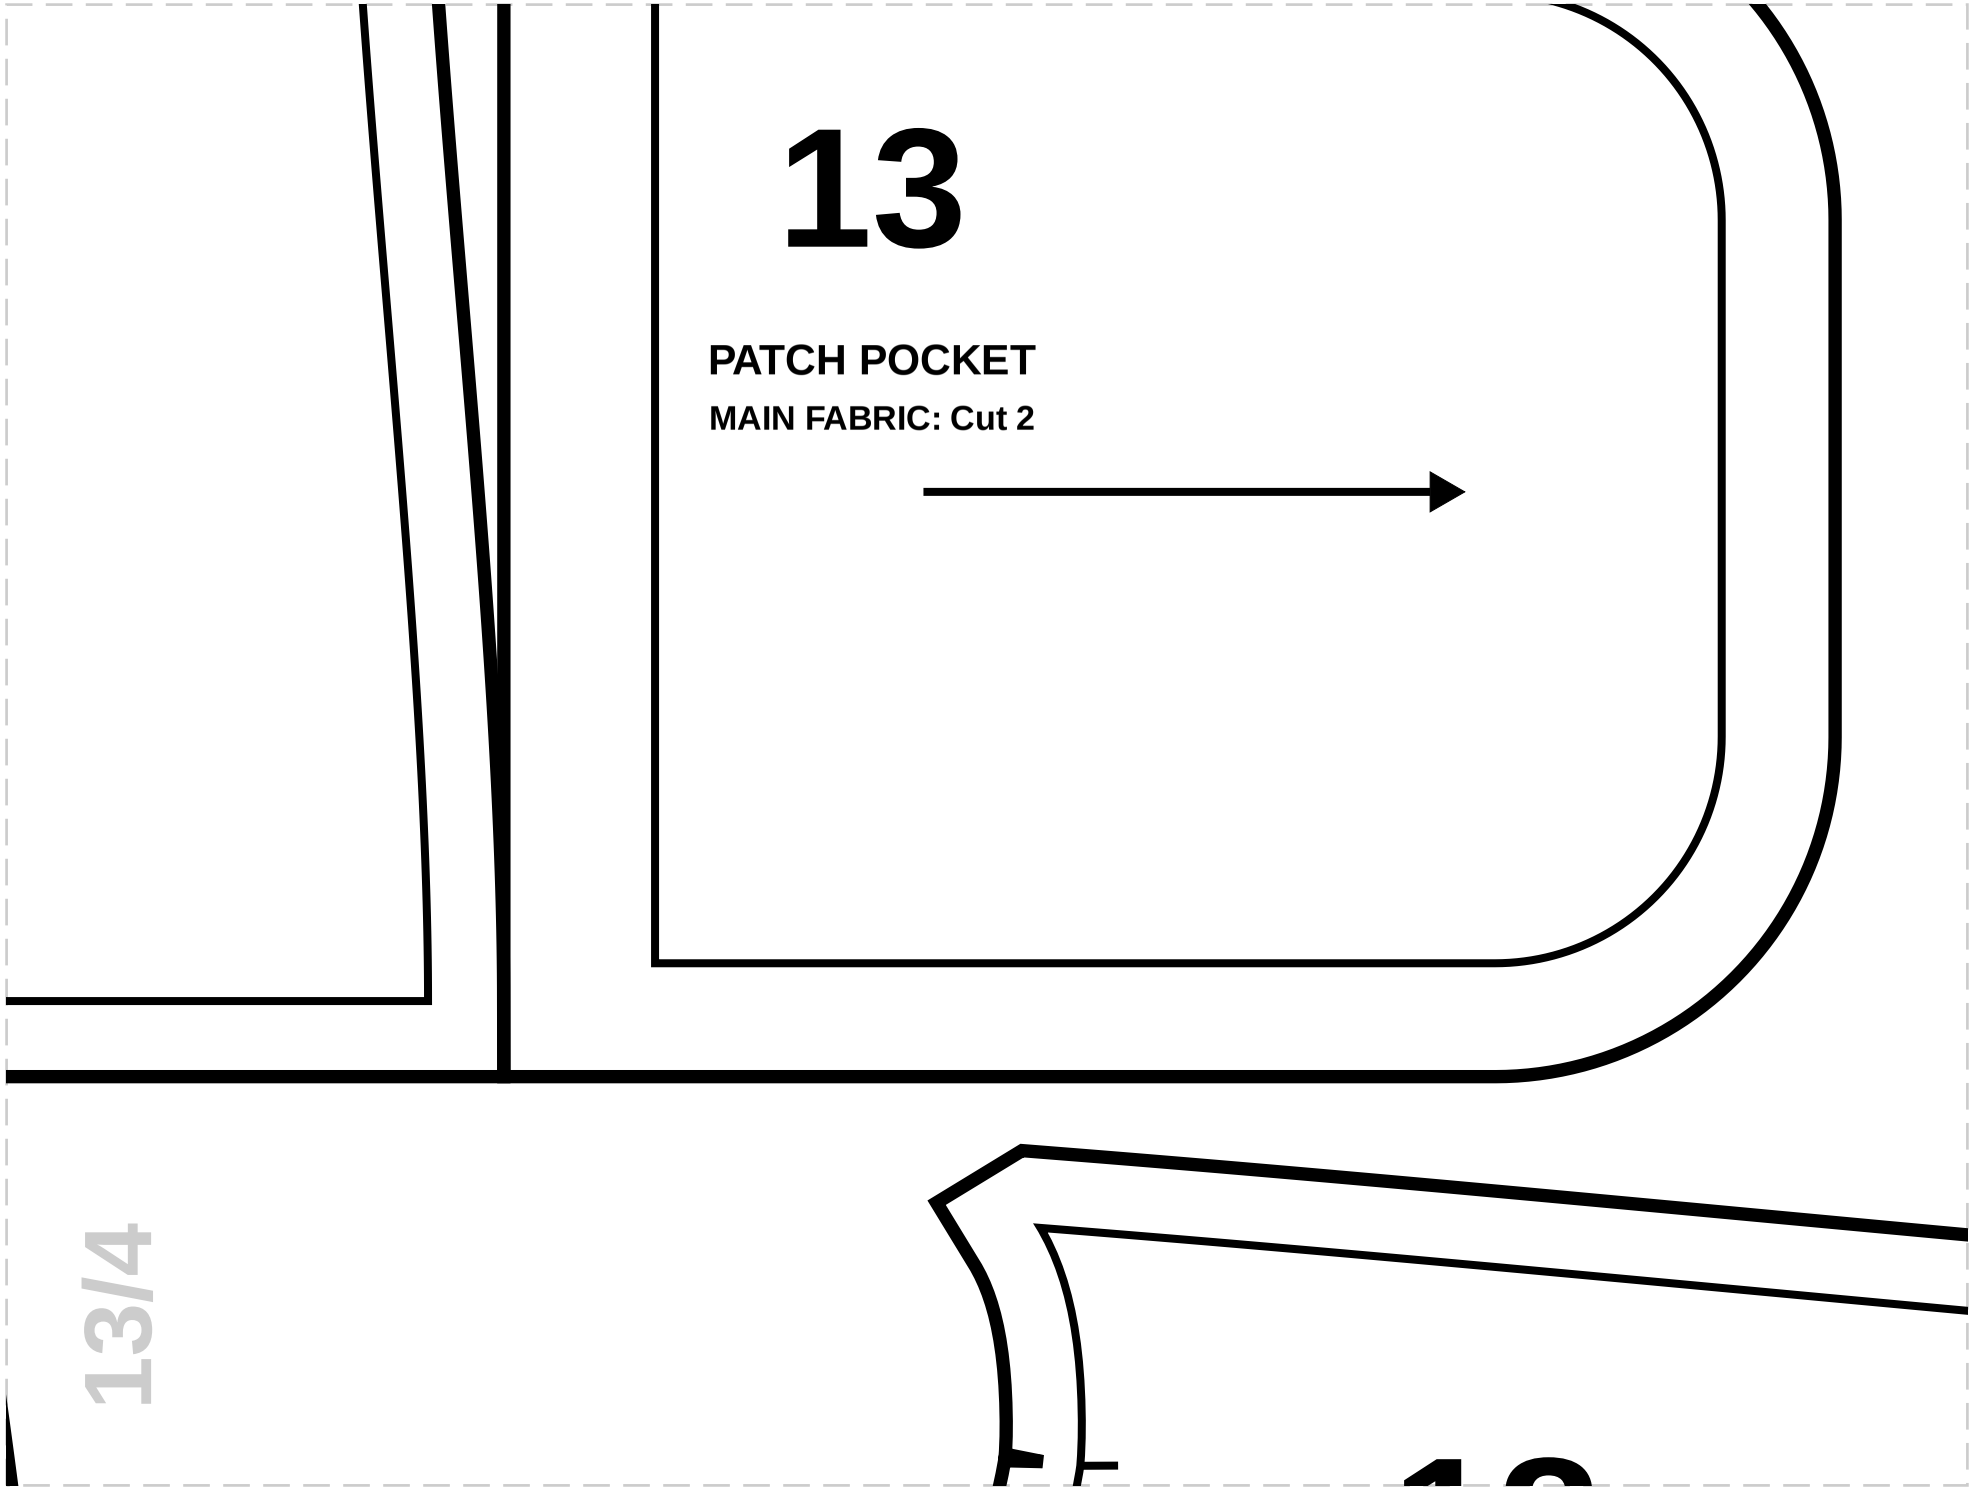

13
PATCH POCKET
MAIN FABRIC: Cut 2
13/4

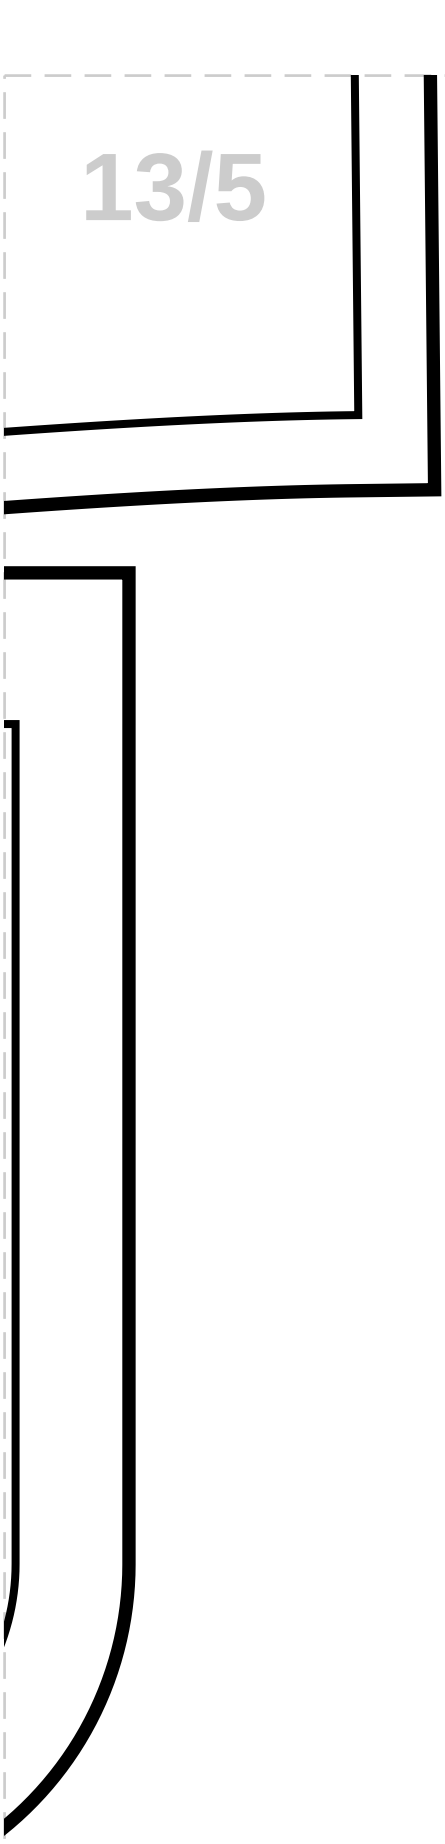


14/1

14/2

14/3

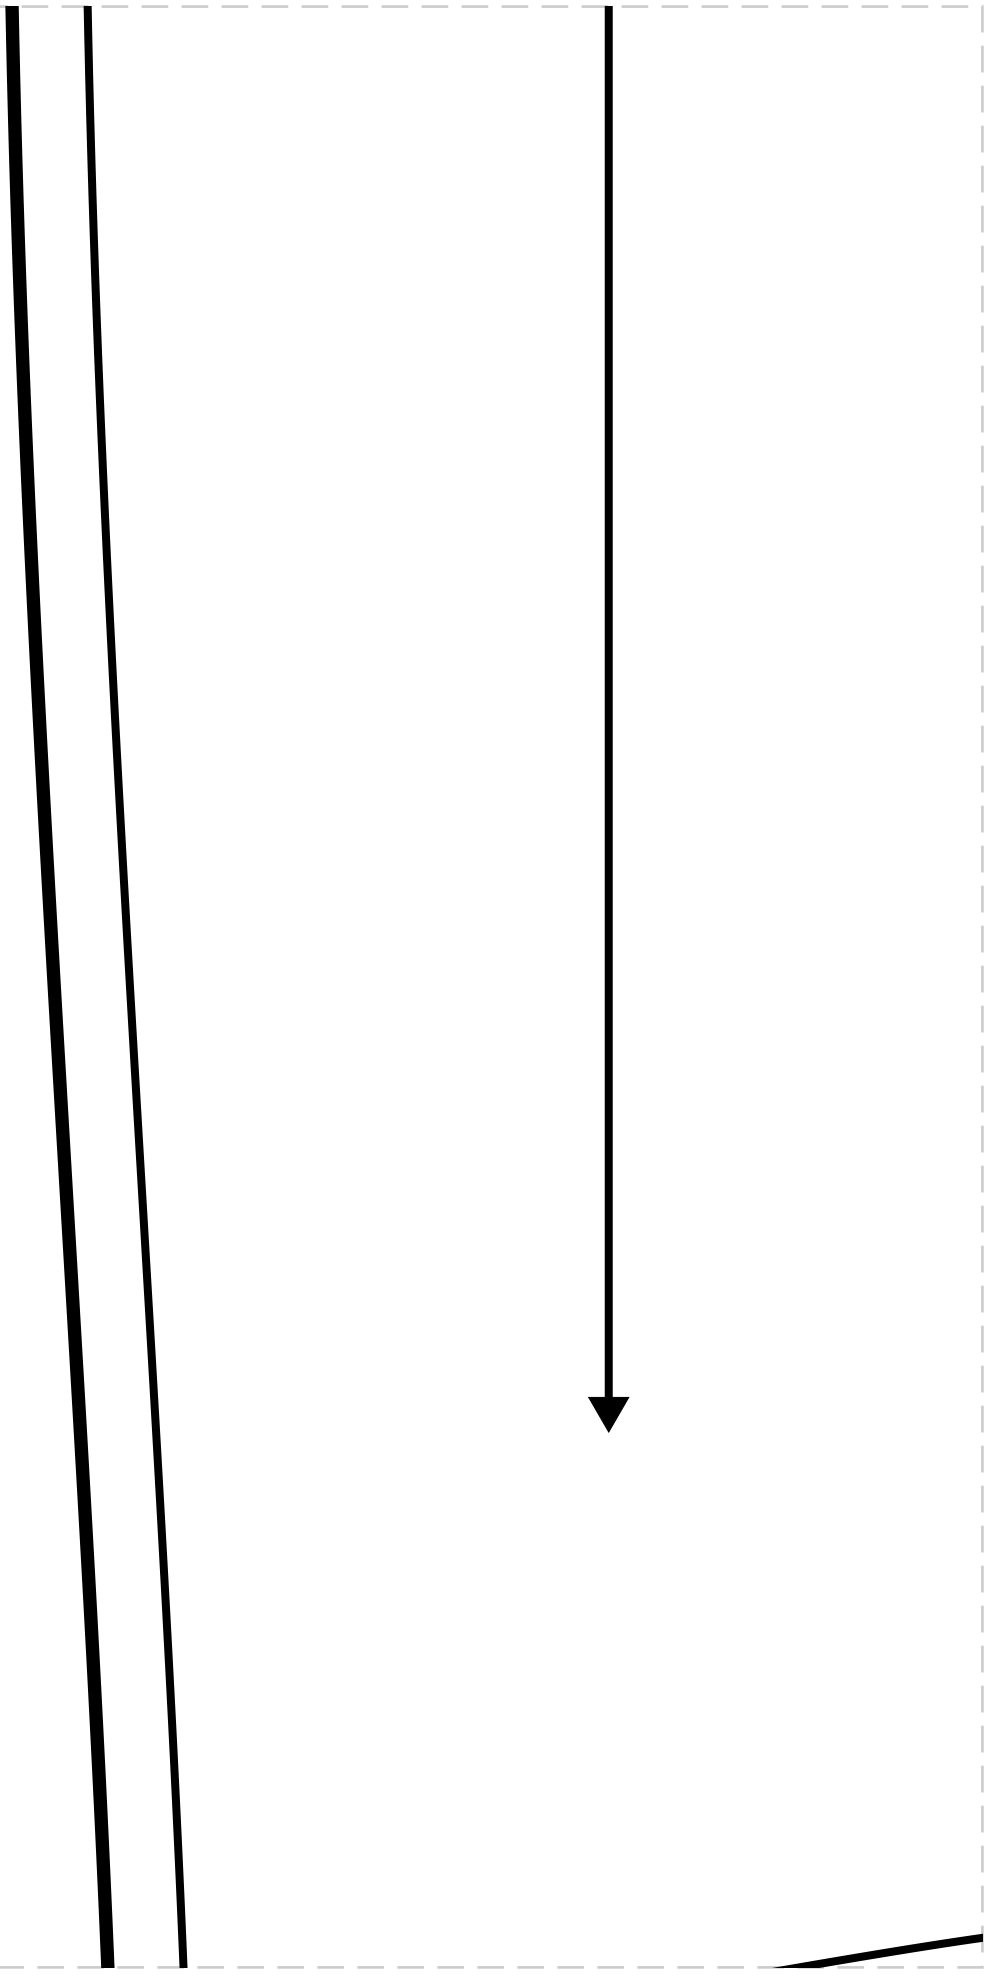


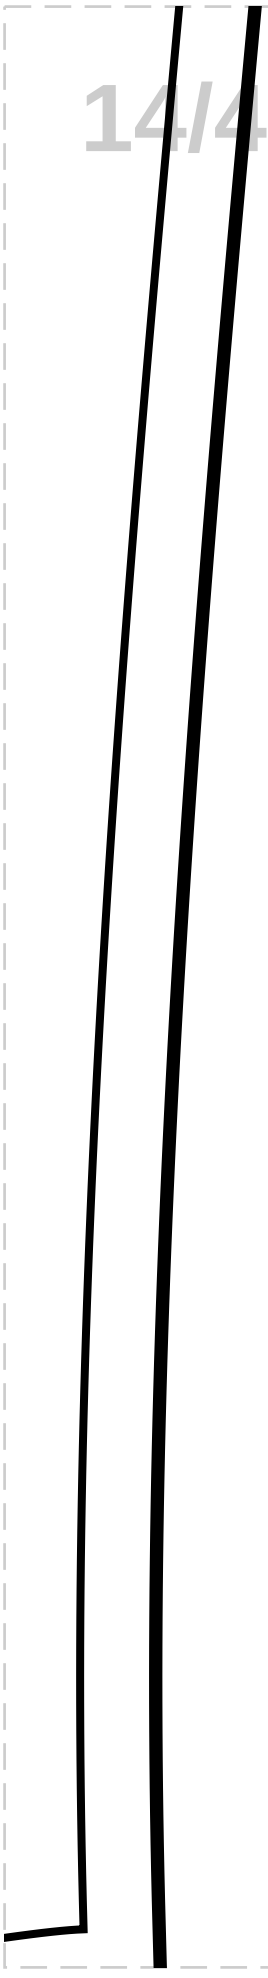

14/5

15/1

15/2

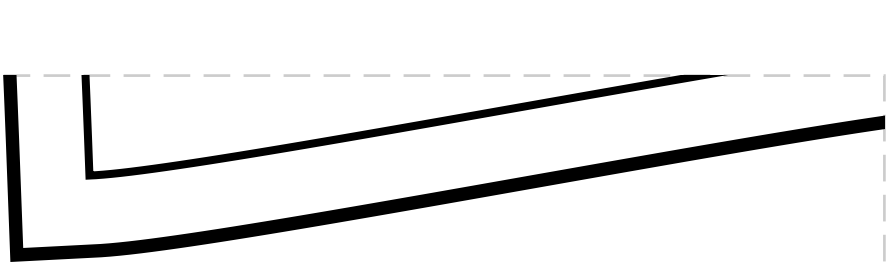

15/4

15/5