
cozysewpatterns

Print this Calibration Test page first!

Size: Height: 167.75, Bust: 119.25, Waist: 104.75, Hips: 125.75
SIZE 20

Notes

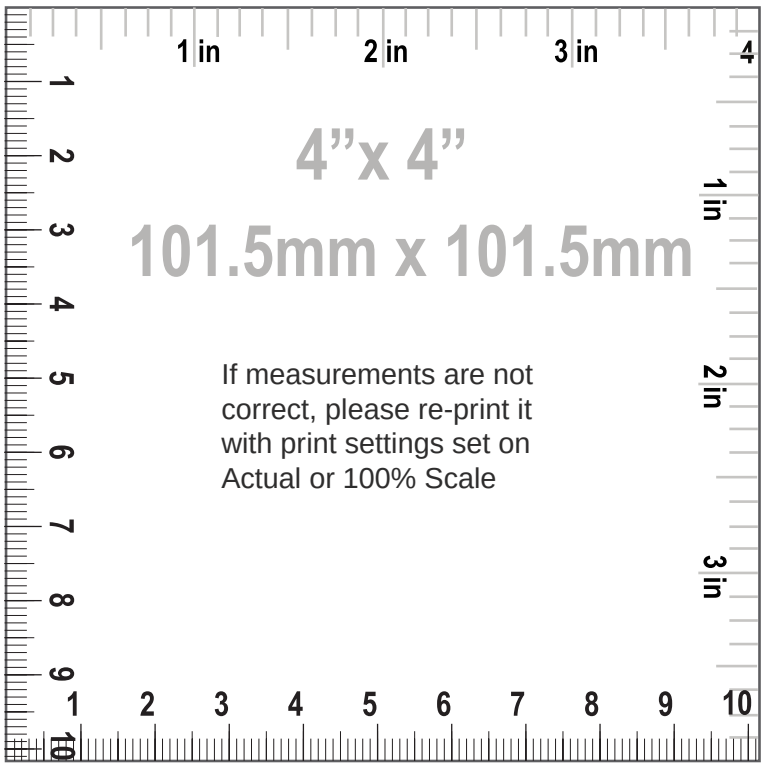

How to print

Printing

Once your Calibration Test Page has been printed, measure the 4”x 4” (10cm) scale box with a ruler. If the lengths match, you can confidently print your pattern. If the rulers do not match, set your print settings to 100% or Actual and retry.

Cutting

Your printouts will always have a dashed border to perfectly match your sheets. Cut off the right edge of each page. Be careful not to cut beyond the dashed mark, otherwise your patterns will not align accurately.

Tapping

Group each sheet by the second number marked on each pate i.e. in a group 1, there are: 1/1, 2/1, 3/1, 4/1, etc. In a group 2: 1/2, 2/2 etc. 2. Place page 1/1 on top of the page 2/1, overlapping the right side edge. Match corners and crosses and secure with a pin or tape. Then use a scotch tape to permanently attach the sheets together.

SIZE 20
Seam Allowance: 1 (3/8 in)

Pattern pieces:

1. "FRONT LINING", LINING: Cut 2
2. "CENTER FRONT", MAIN FABRIC, FUSIBLE INTERFACING: Cut 2
3. "SIDE FRONT", MAIN FABRIC, FUSIBLE INTERFACING: Cut 2
4. "CENTER BACK", MAIN FABRIC, FUSIBLE INTERFACING: Cut 2
5. "CENTER BACK LINING", LINING: Cut 1
6. "SIDE BACK", MAIN FABRIC, FUSIBLE INTERFACING: Cut 2
7. "SIDE BACK LINING", LINING: Cut 2
8. "FRONT NECK FACING", MAIN FABRIC, FUSIBLE INTERFACING: Cut 2
9. "BACK NECK FACING", MAIN FABRIC, FUSIBLE INTERFACING: Cut 1
10. "UPPER COLLAR", MAIN FABRIC, FUSIBLE INTERFACING: Cut 1
11. "LOWER COLLAR", MAIN FABRIC, FUSIBLE INTERFACING: Cut 1
12. "BELT", MAIN FABRIC, FUSIBLE INTERFACING: Cut 1
13. "PATCH POCKET", MAIN FABRIC: Cut 2
14. "TWO BELT LOOPS", MAIN FABRIC: Cut 1
15. "UPPER SLEEVE", MAIN FABRIC: Cut 2
16. "LOWER SLEEVE", MAIN FABRIC: Cut 2
17. "UPPER SLEEVE LINING", LINING: Cut 2
18. "LOWER SLEEVE LINING", LINING: Cut 2


Pattern Specs (Circumferences are divided by 2):


1. Hem max 4.60 none (1 3/4 in)
2. Seam allowance max 2.00 none (3/4 in)
3. Seam allowance p max 1.50 none (5/8 in)
4. Stretch factor 1.00 none (3/8 in)
5. Shoulder pads thickness 1.00 none (3/8 in)
6. Pocket entry length 13.45 cm (5 1/4 in)
7. Waist to pocket length 10.19 cm (4 in)
8. Side seam pocket position 10.75 cm (4 1/4 in)
9. Button diameter 1.50 cm (5/8 in)
10. Front buttons quantity 12.00 pc
11. Front length from HPS to hem 94.74 cm (37 1/4 in)
12. Across chest 67.78 cm (26 5/8 in)
13. Center front length to hem 84.29 cm (33 1/8 in)

14. Center back length to hem 88.94 cm (35 in)
15. Across front 48.22 cm (19 in)
16. Across back 44.29 cm (17 3/8 in)
17. Across shoulders 43.41 cm (17 1/8 in)
18. Side seam 60.80 cm (23 7/8 in)
19. Waist 60.08 cm (23 5/8 in)
20. Low hips 71.88 cm (28 1/4 in)
21. Blazer hemline sweep 76.80 cm (30 1/4 in)
22. Armhole length 64.60 cm (25 3/8 in)
23. Neck opening 19.69 cm (7 3/4 in)
24. Front neck drop 21.11 cm (8 1/4 in)
25. Back neck drop 3.87 cm (1 1/2 in)
26. Shoulder width 13.60 cm (5 3/8 in)
27. Apex to apex 24.85 cm (9 3/4 in)
28. Seam allowance poc max 3.00 none (1 1/8 in)
29. Hem poc max 6.00 none (2 3/8 in)
30. Pocket height 14.80 cm (5 7/8 in)
31. Stretch factor horizontal 1.00 none (3/8 in)
32. Stretch factor vertical 1.00 none (3/8 in)
33. Sleeve length 59.44 none (23 3/8 in)
34. Sleeve cap length 66.70 none (26 1/4 in)
35. Armhole length 64.60 none (25 3/8 in)
36. Sleeve upper arm width 45.17 none (17 3/4 in)
37. Sleeve opening 28.59 none (11 1/4 in)

cozysewpatterns

Paper Size: LETTER;
Print Actual Size (100% Scale);

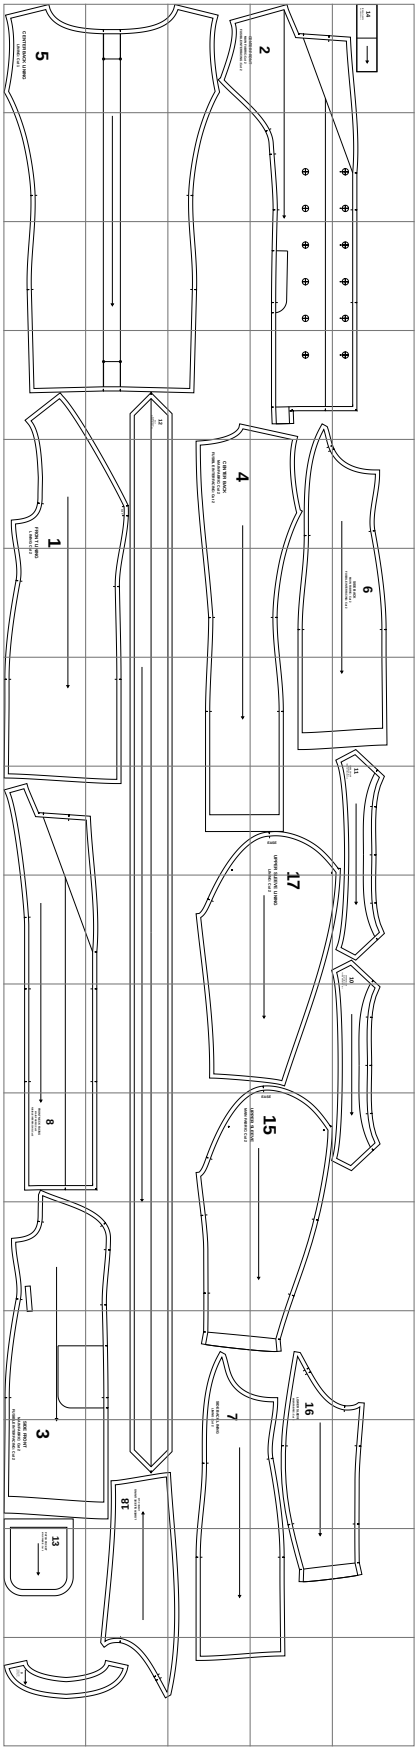

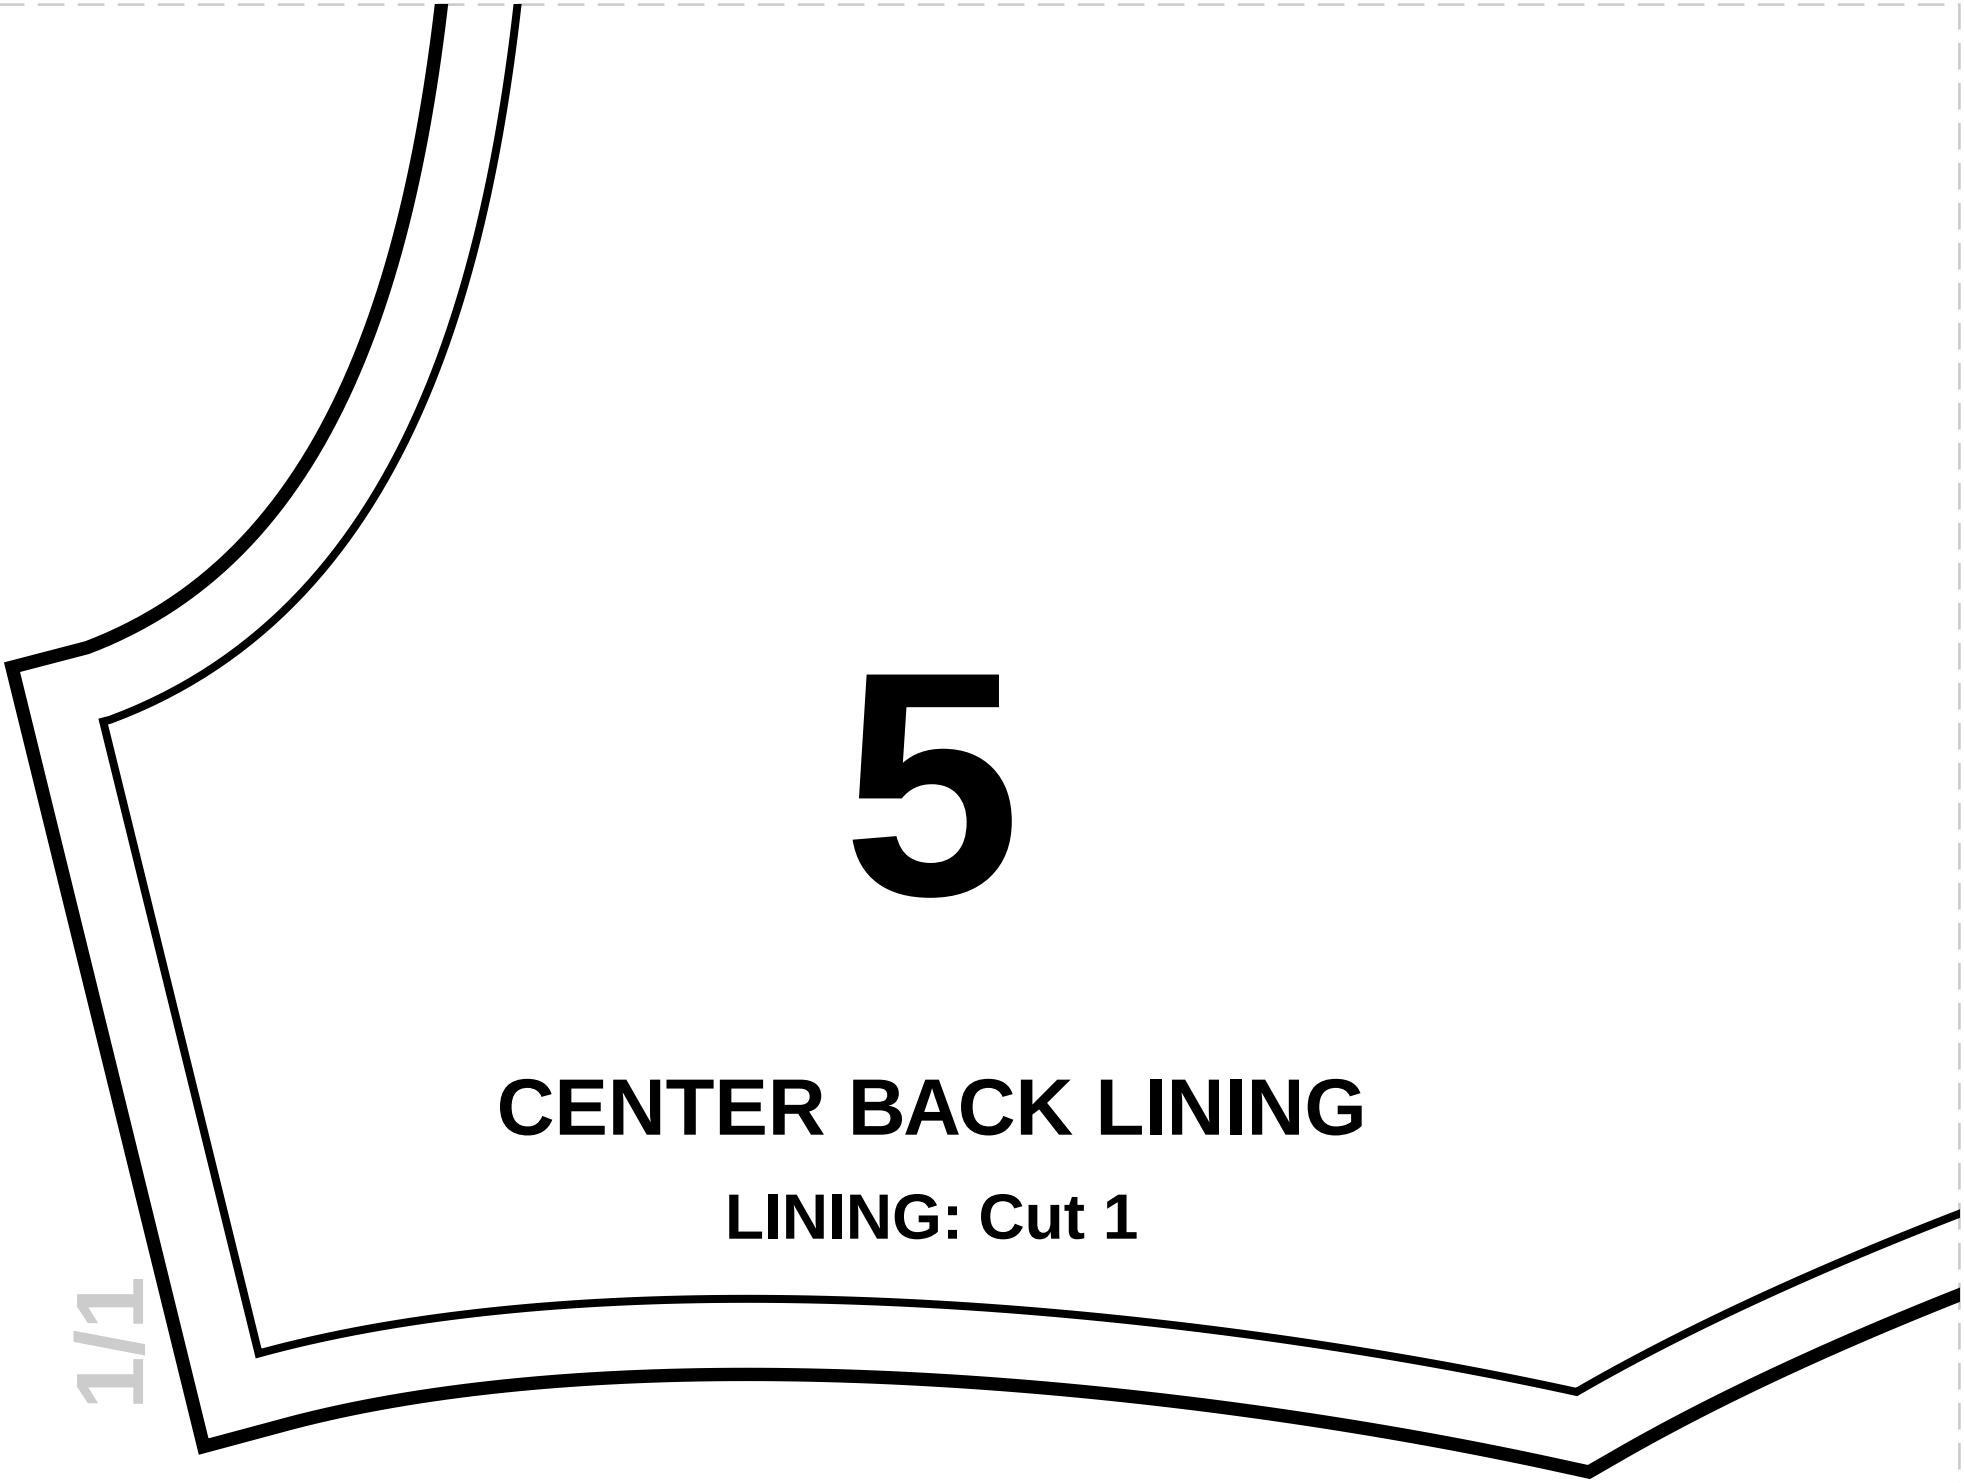


5

CENTER BACK LINING

LINING: Cut 1


1/1

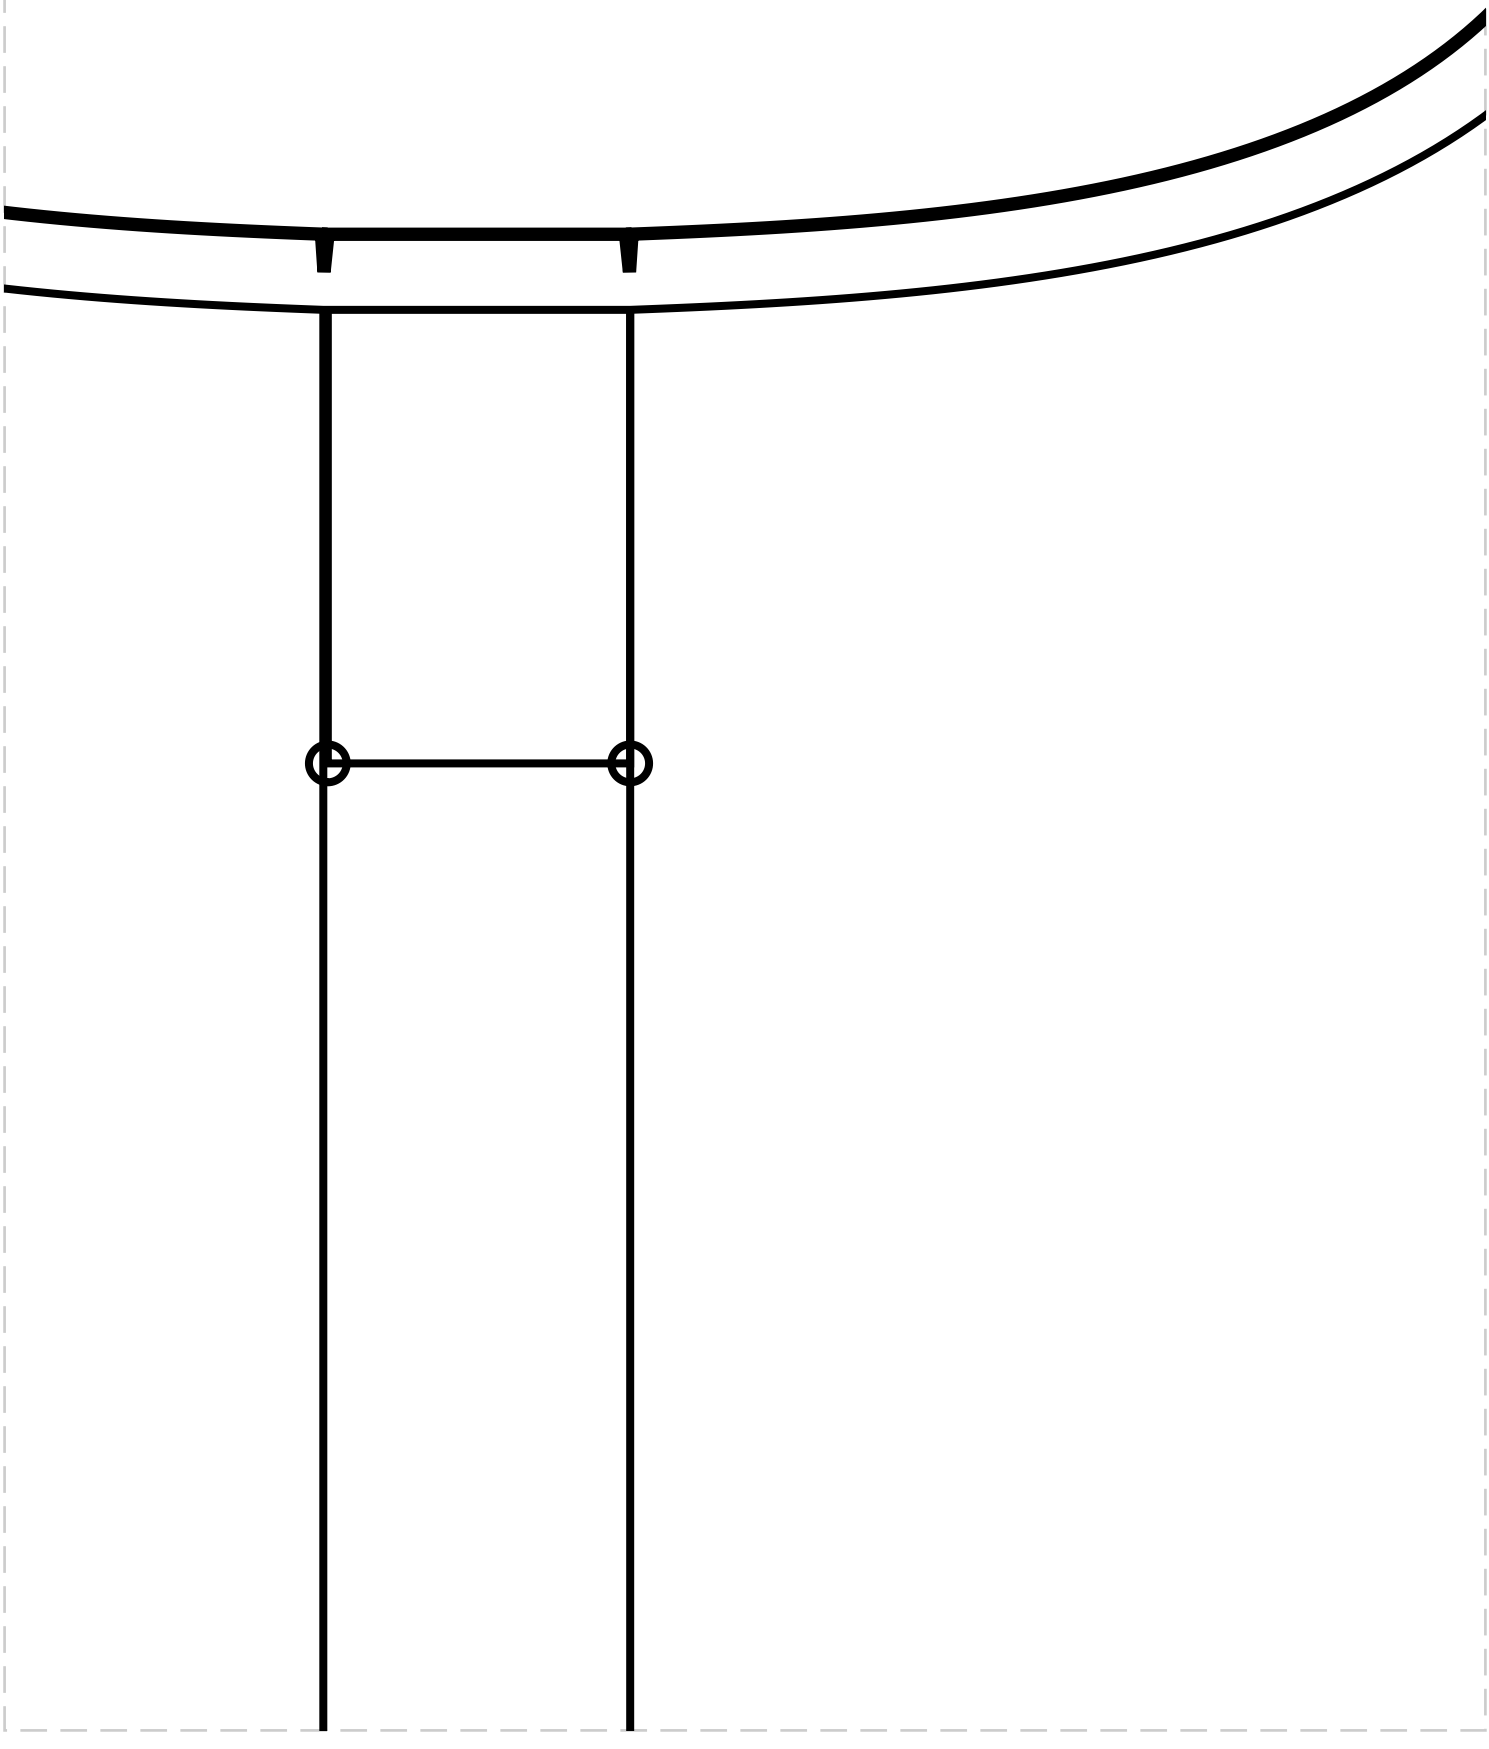

CENTER FRONT


MAIN FABRIC: Cut 2


FUSIBLE INTERFACING: Cut 2

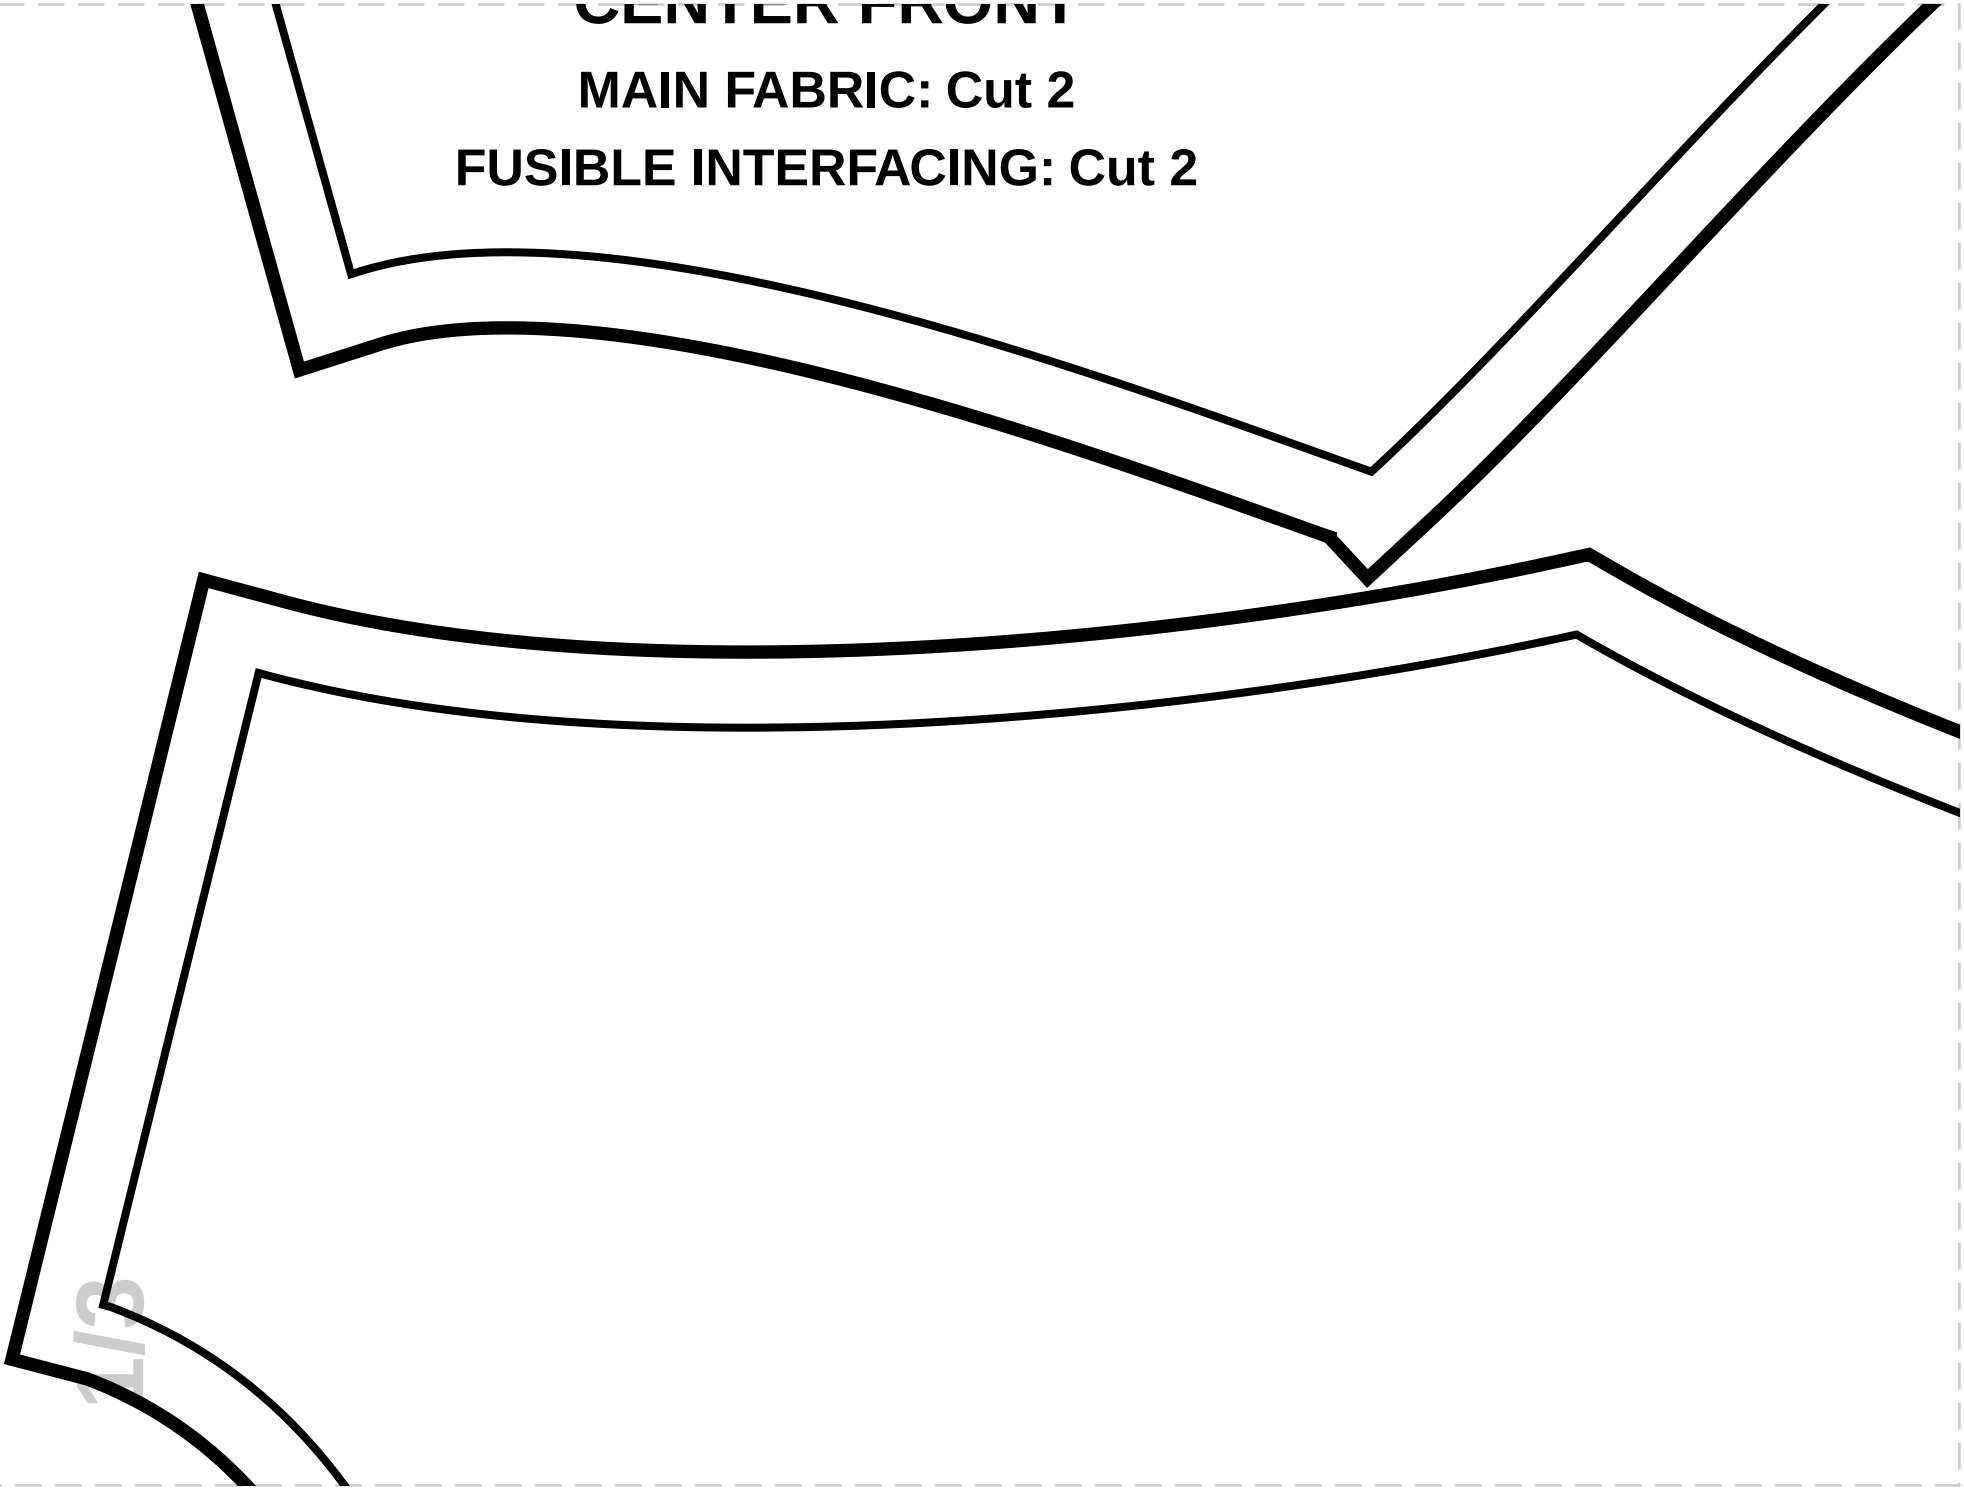



CENTER FRONT


2

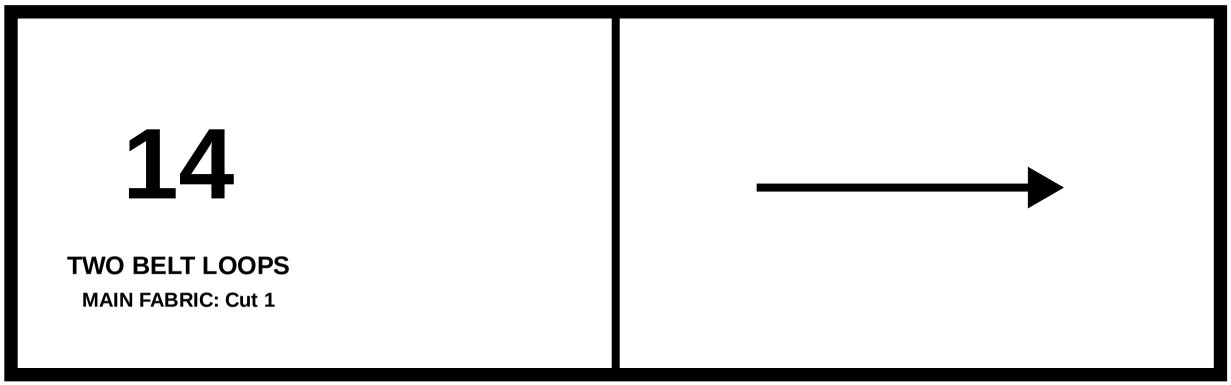

14
TWO BELT LOOPS
MAIN FABRIC: Cut 1

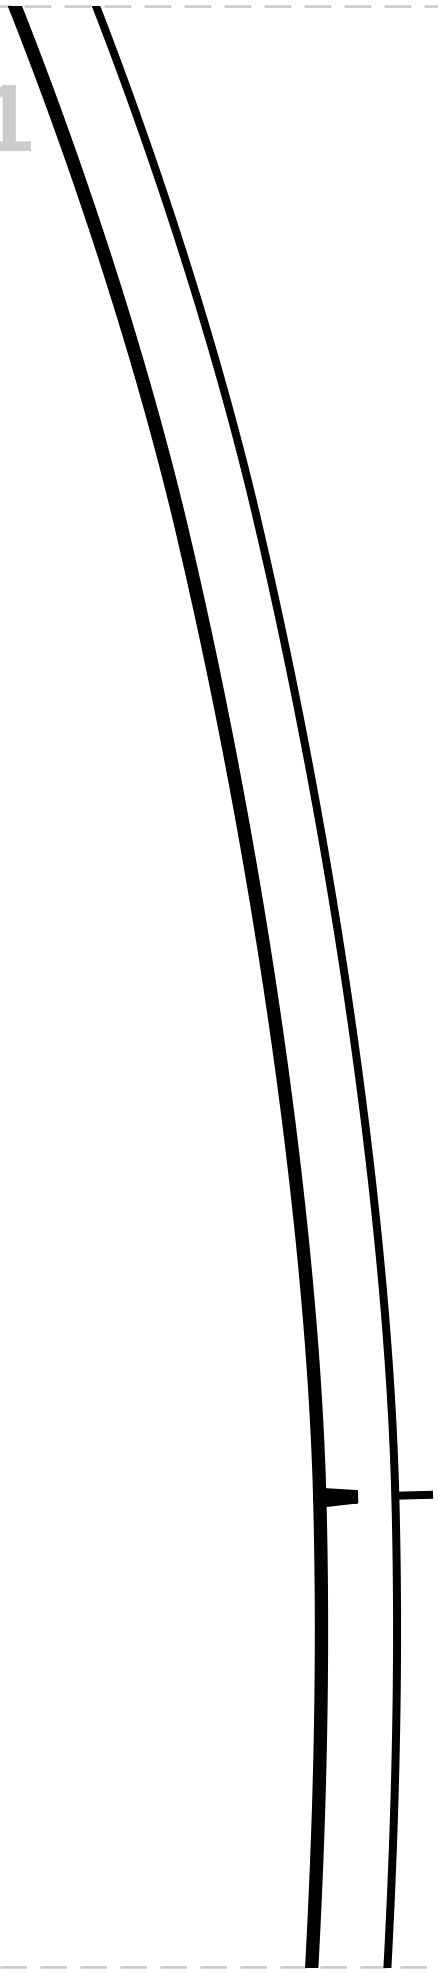




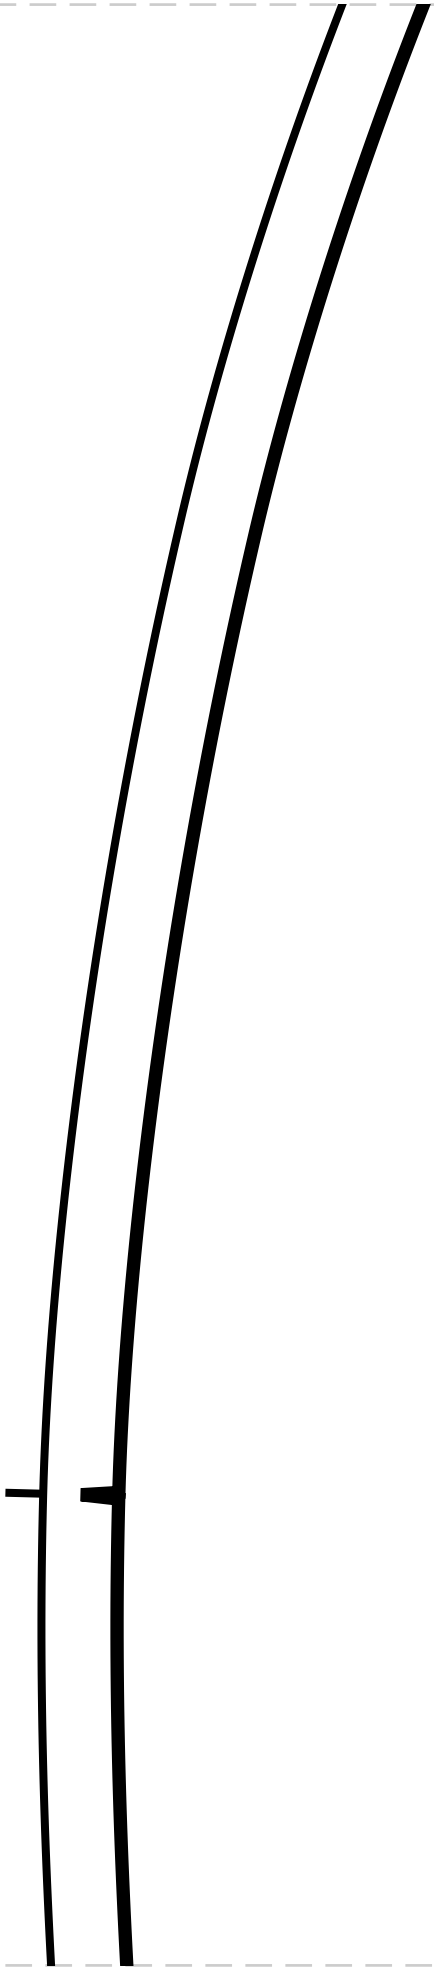

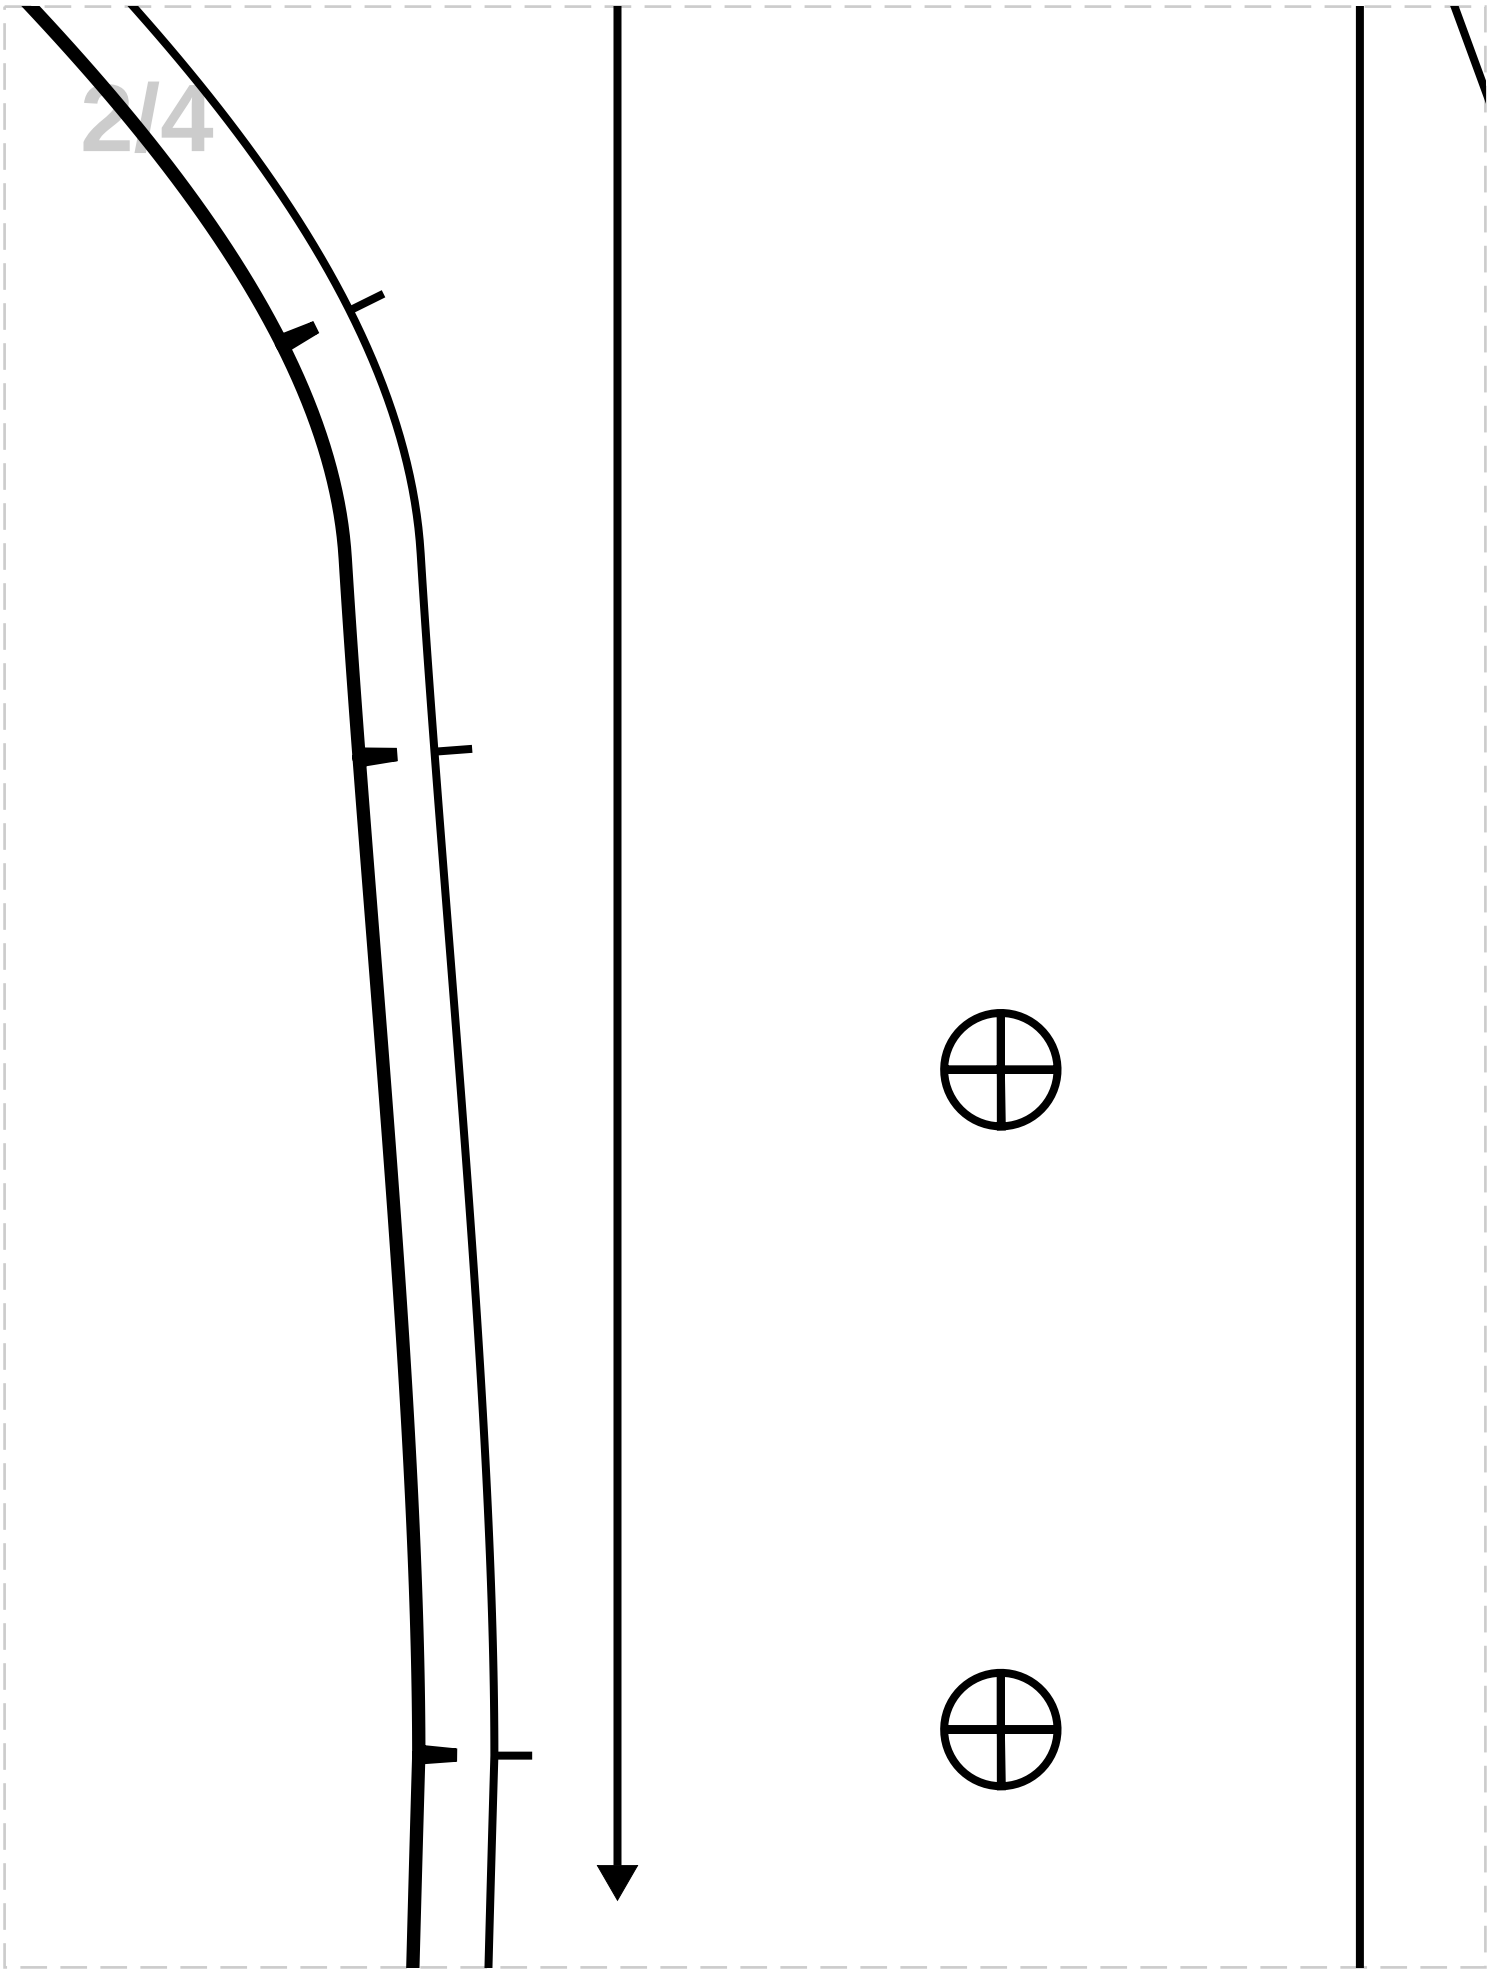


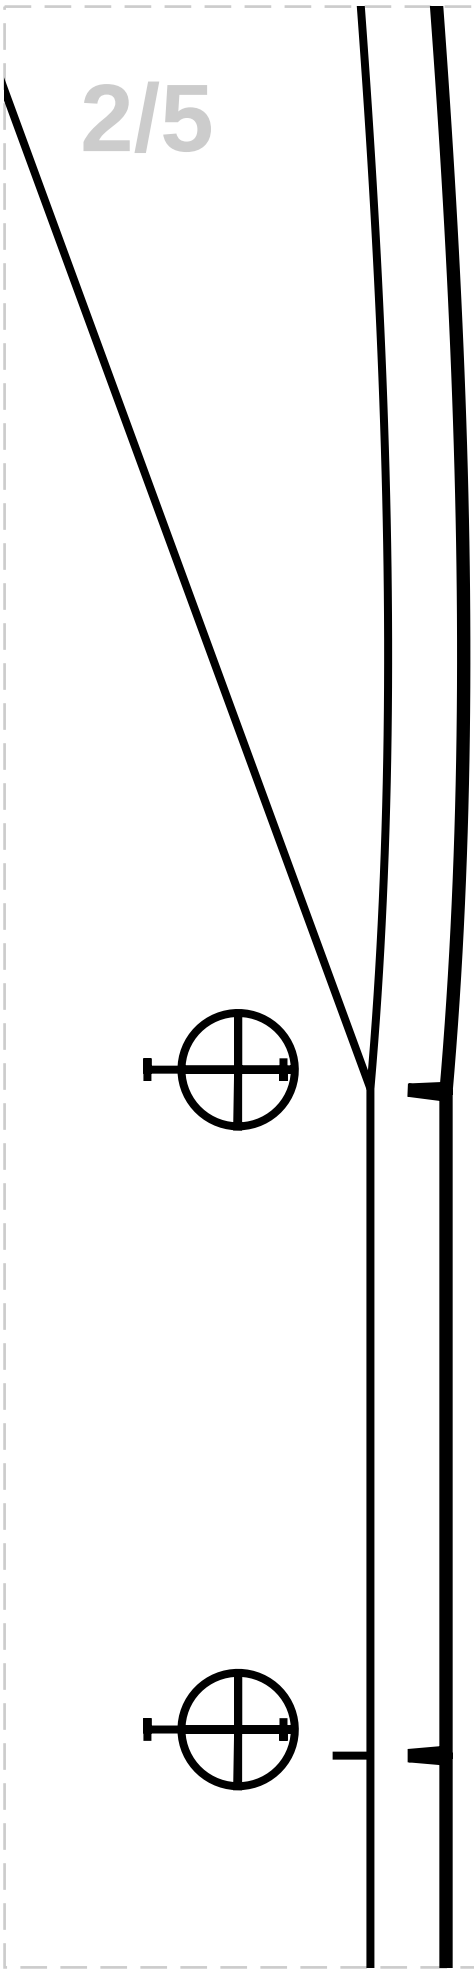



3/1

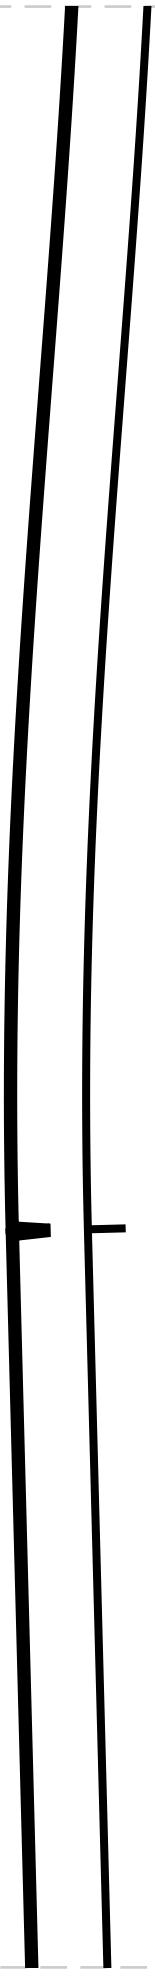



3/2




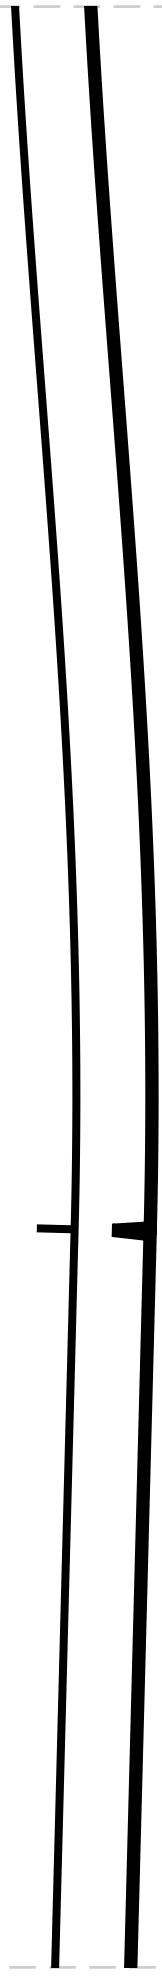


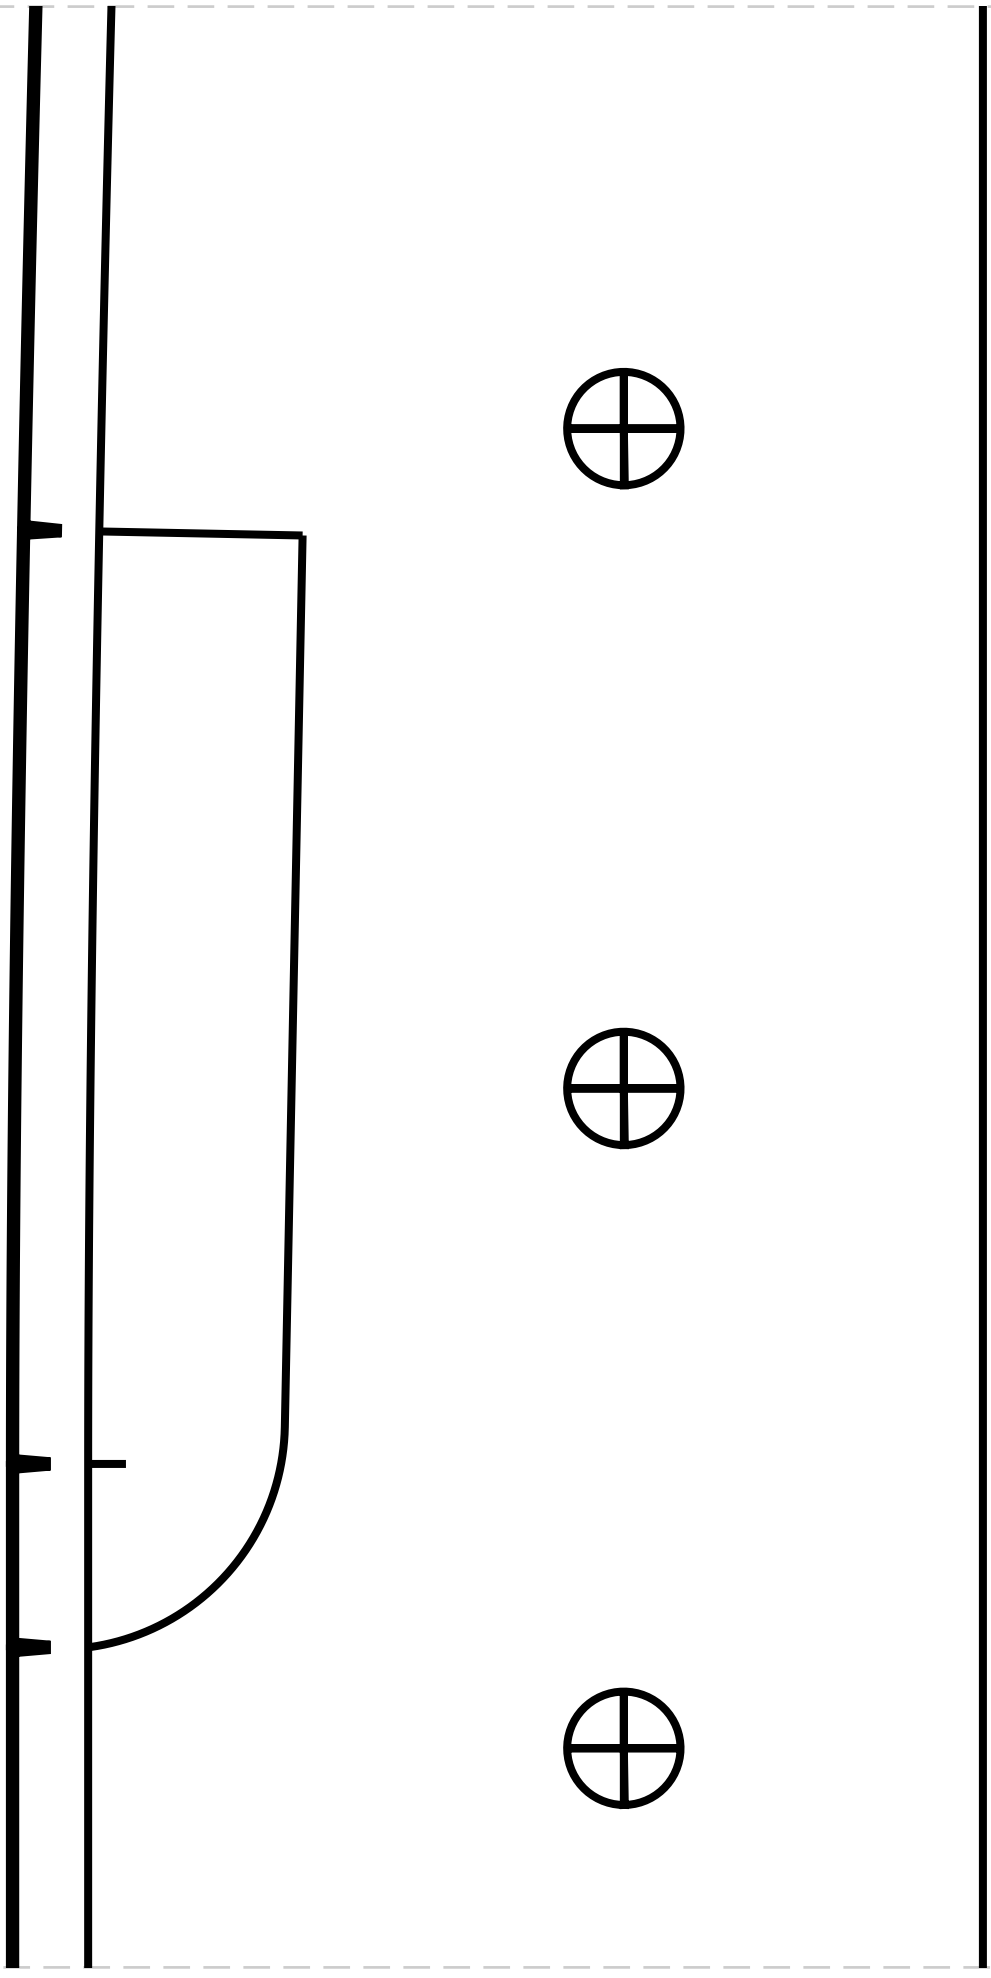


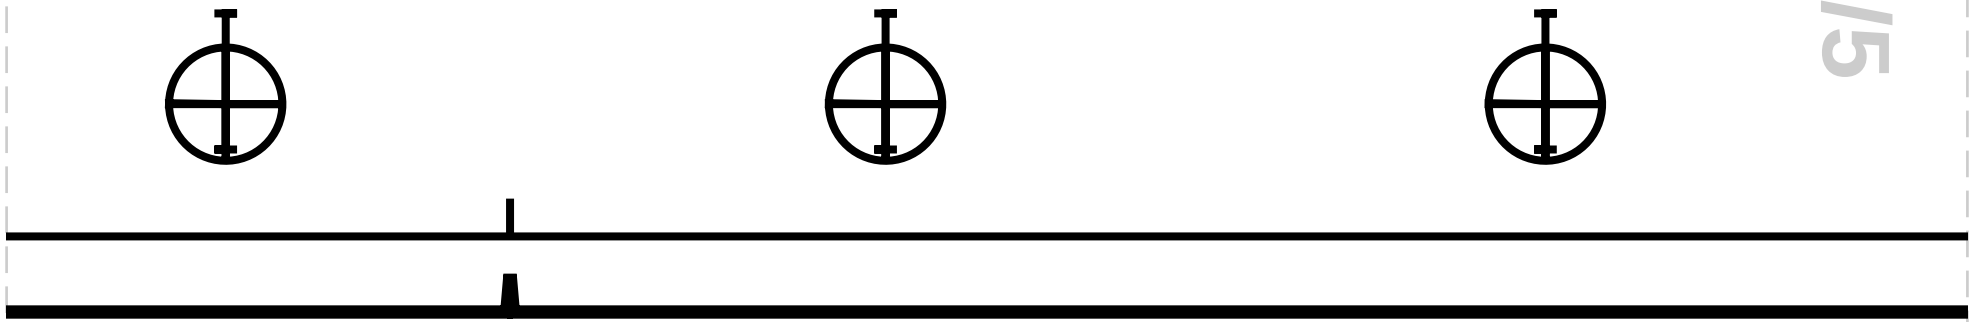


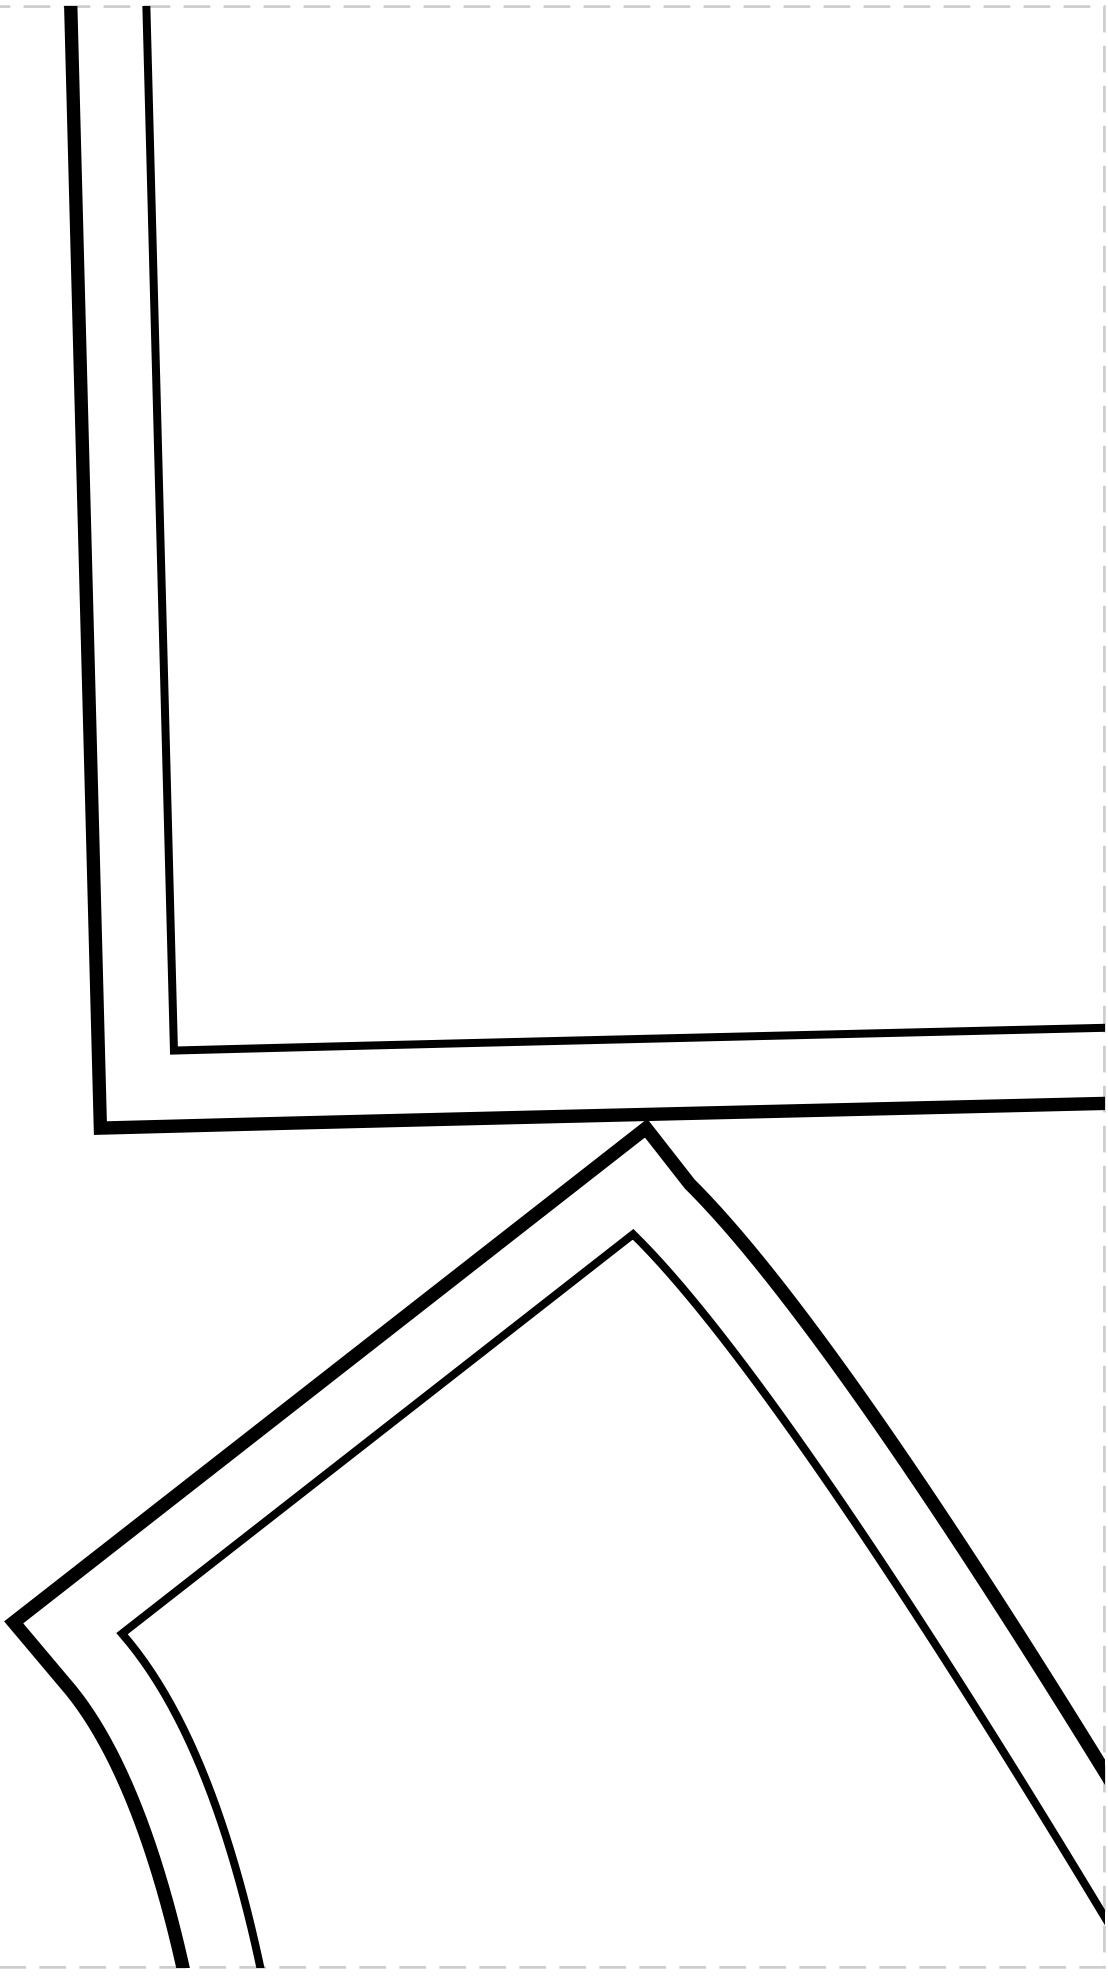

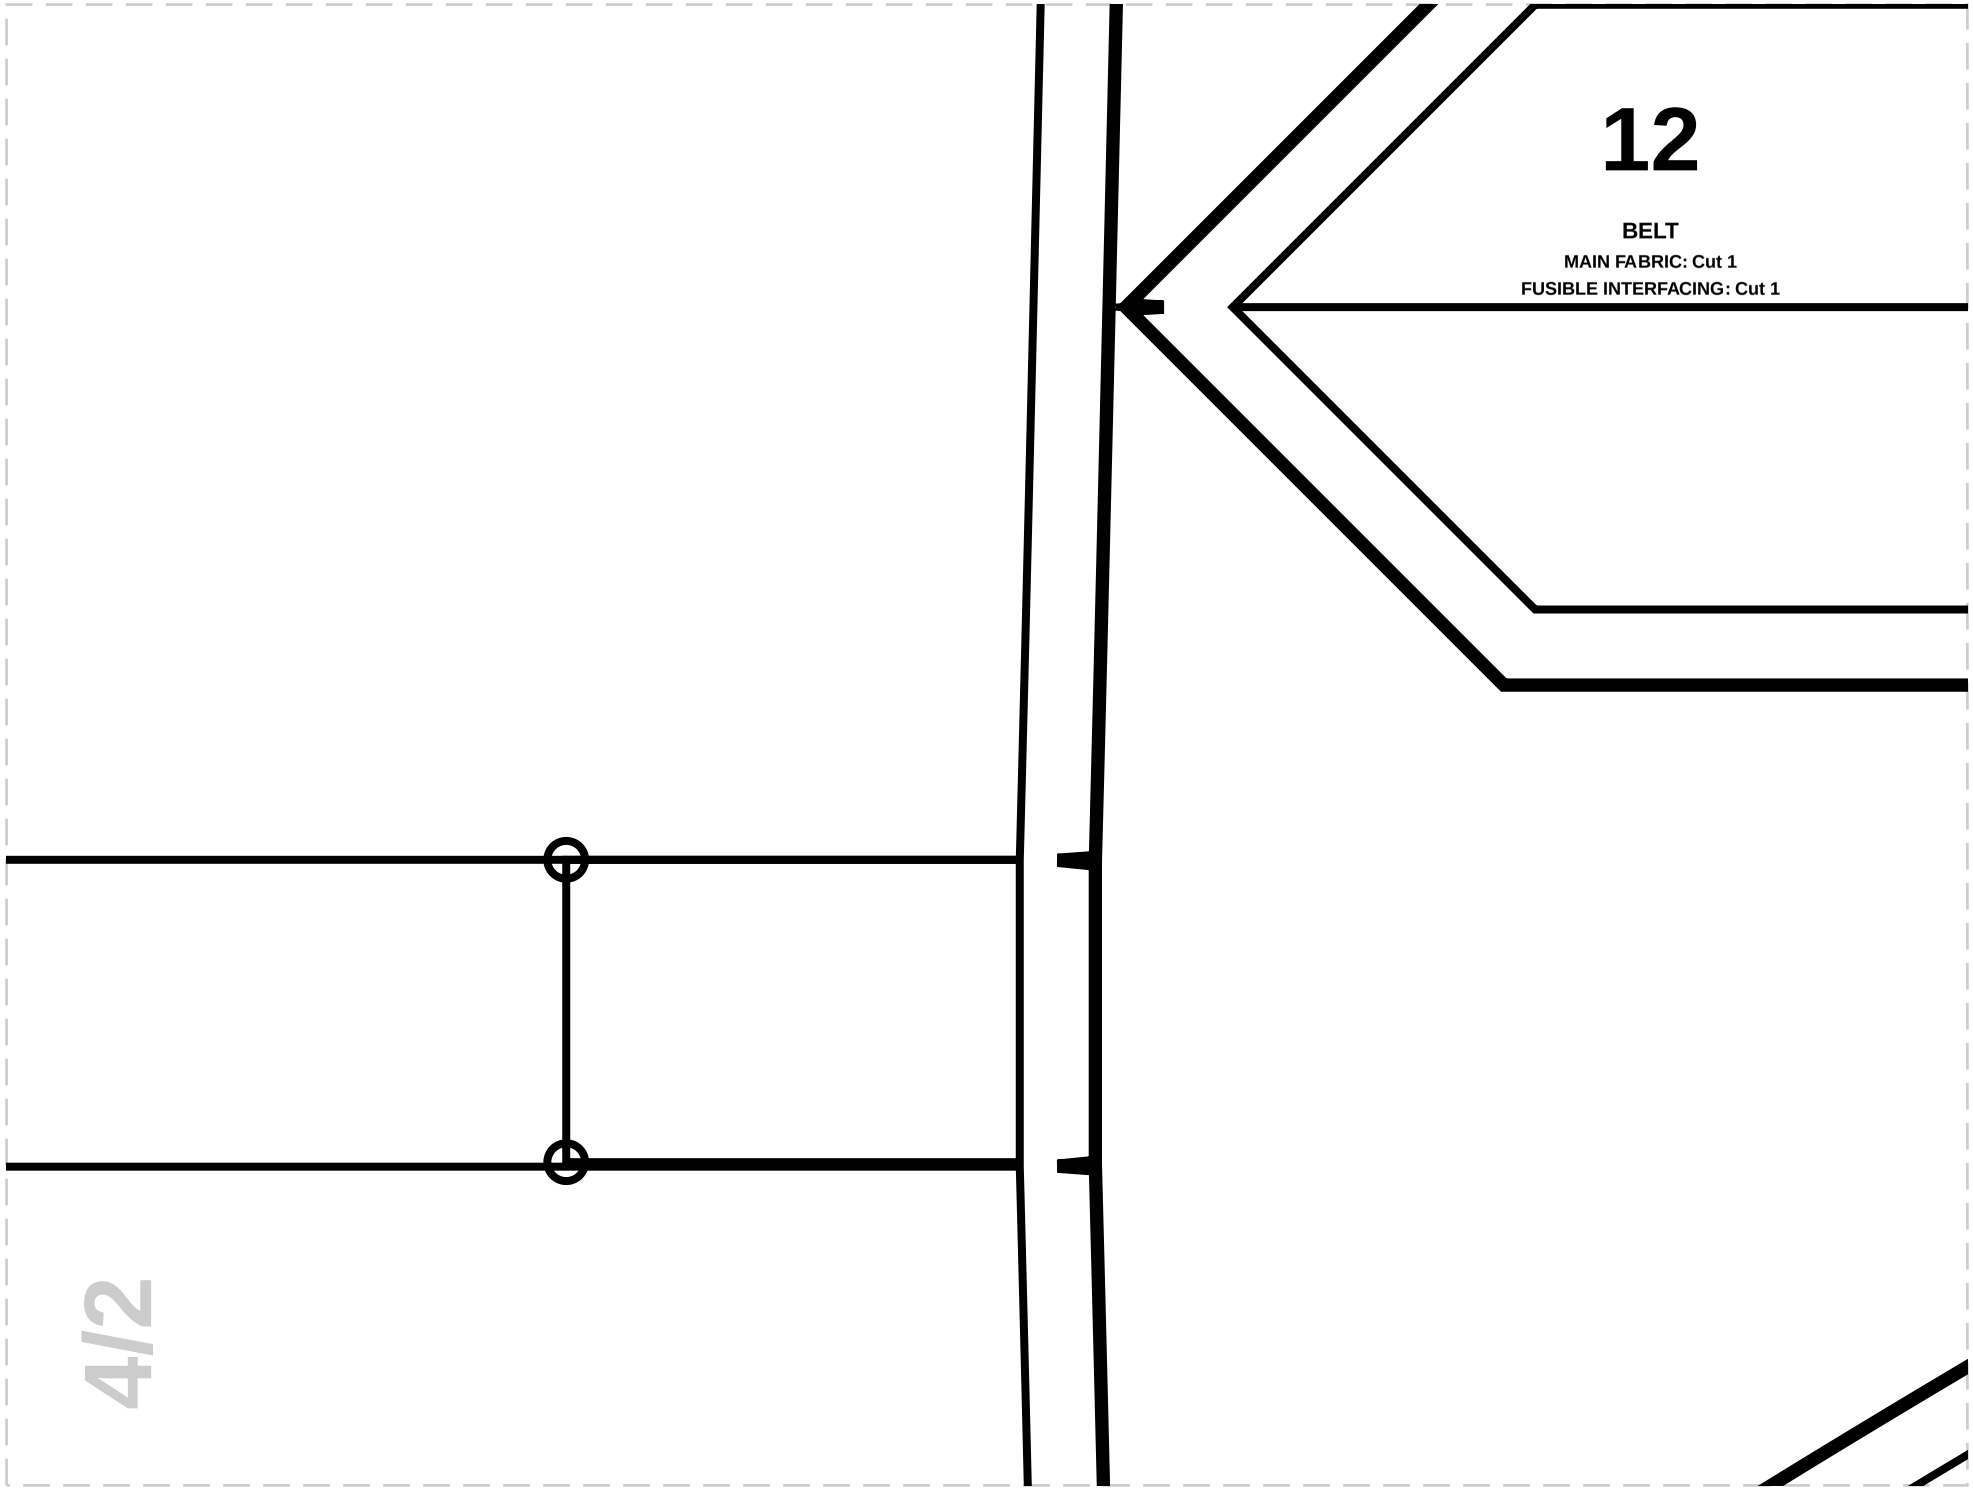

12
BELT
MAIN FABRIC: Cut 1
FUSIBLE INTERFACING: Cut 1
4/2

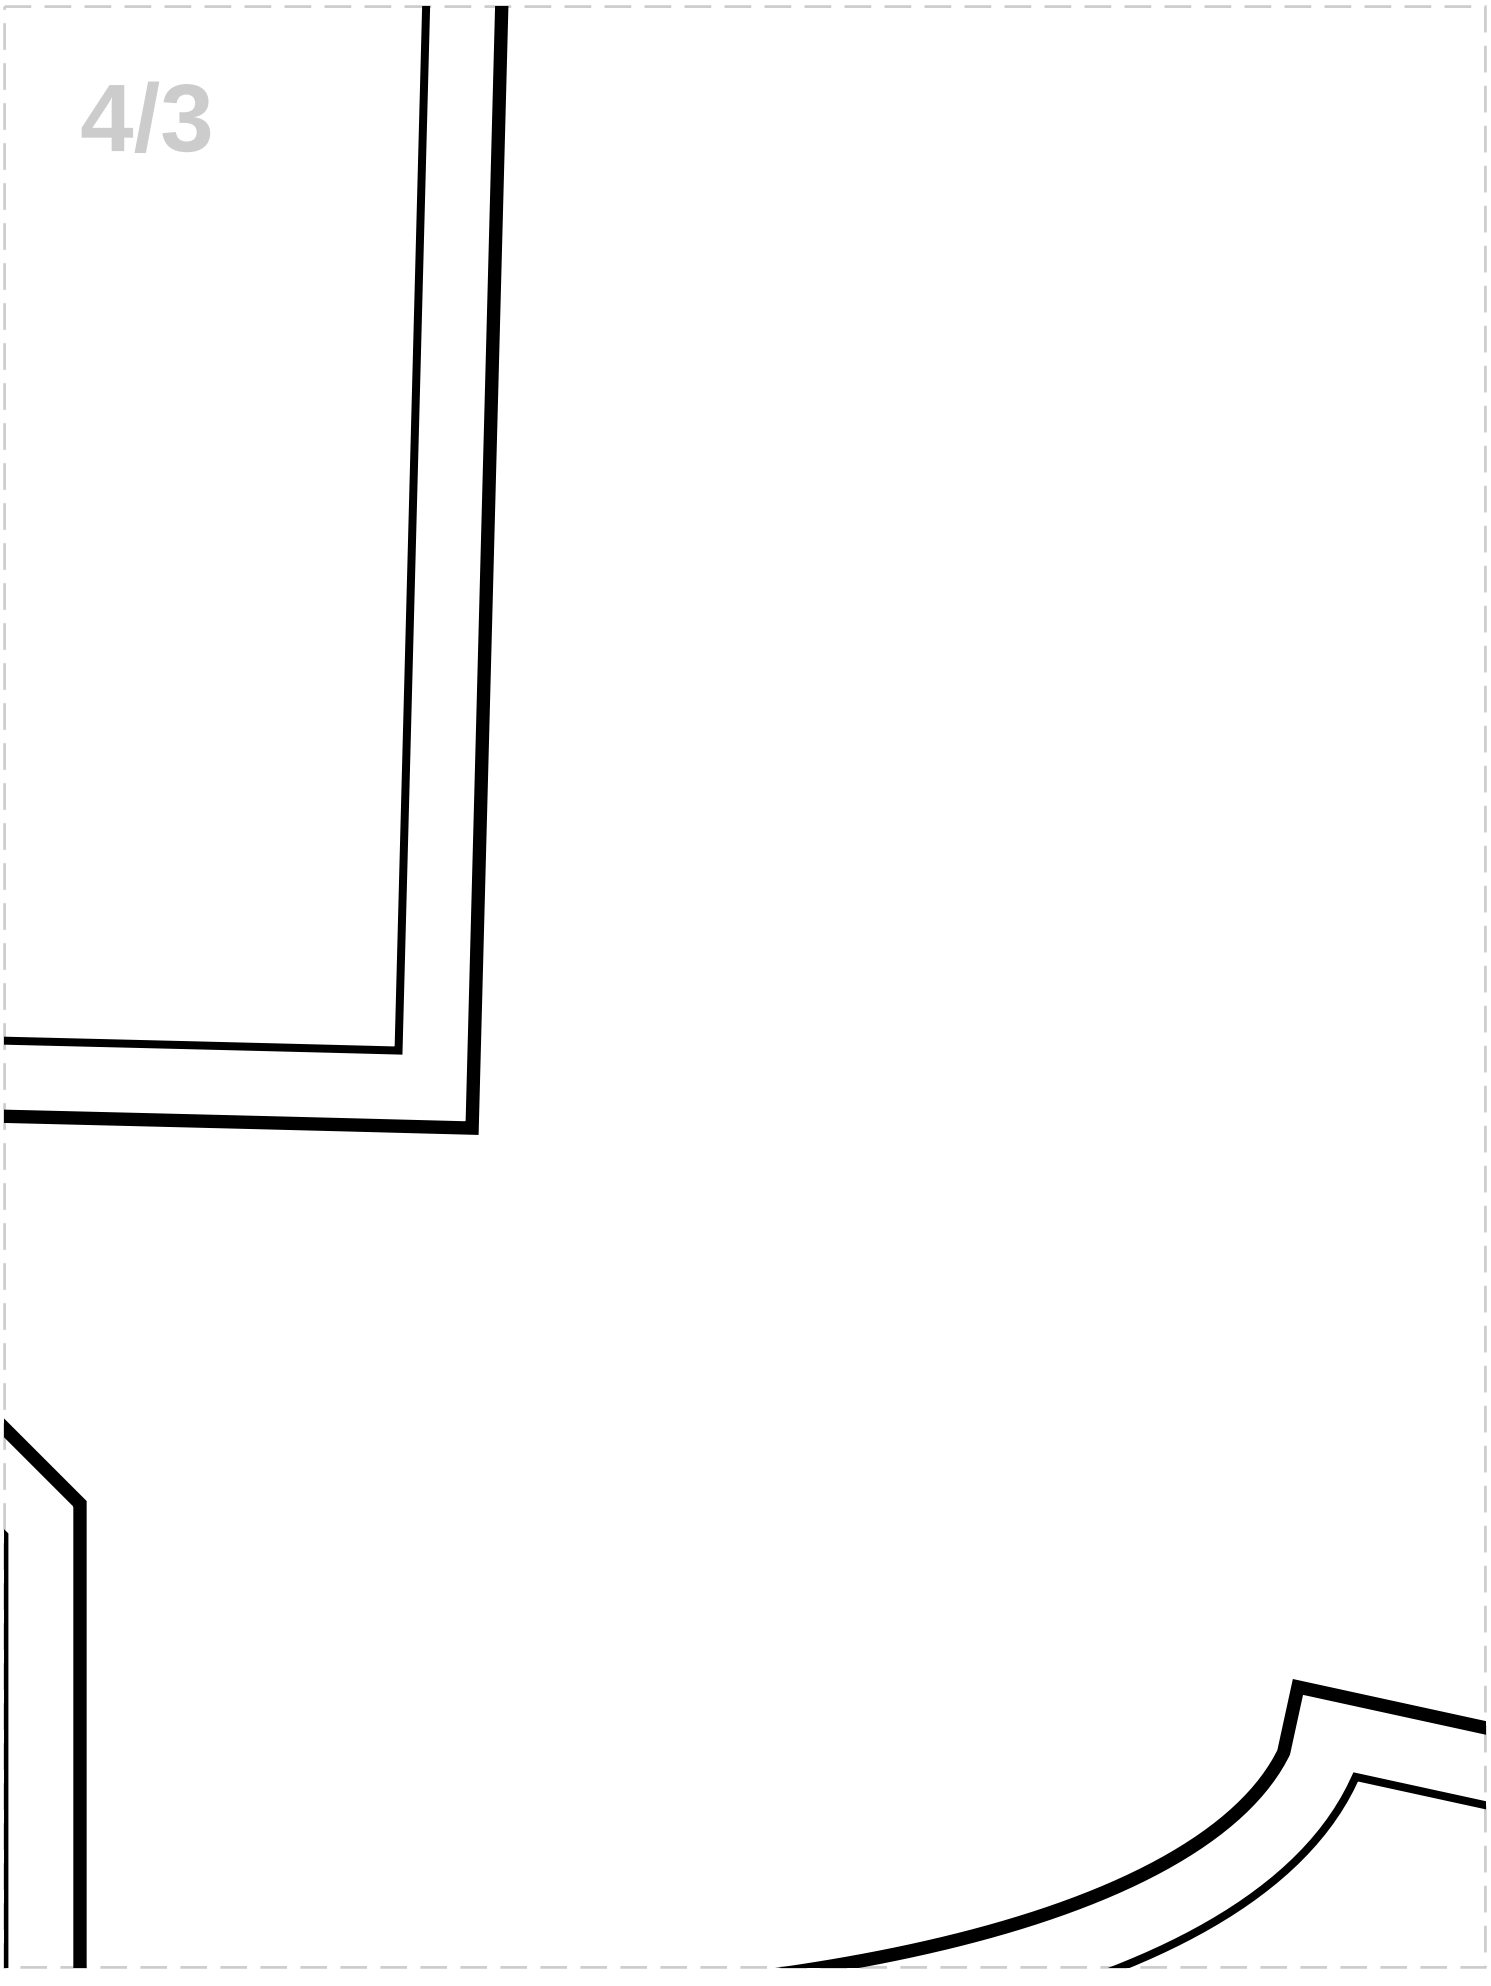

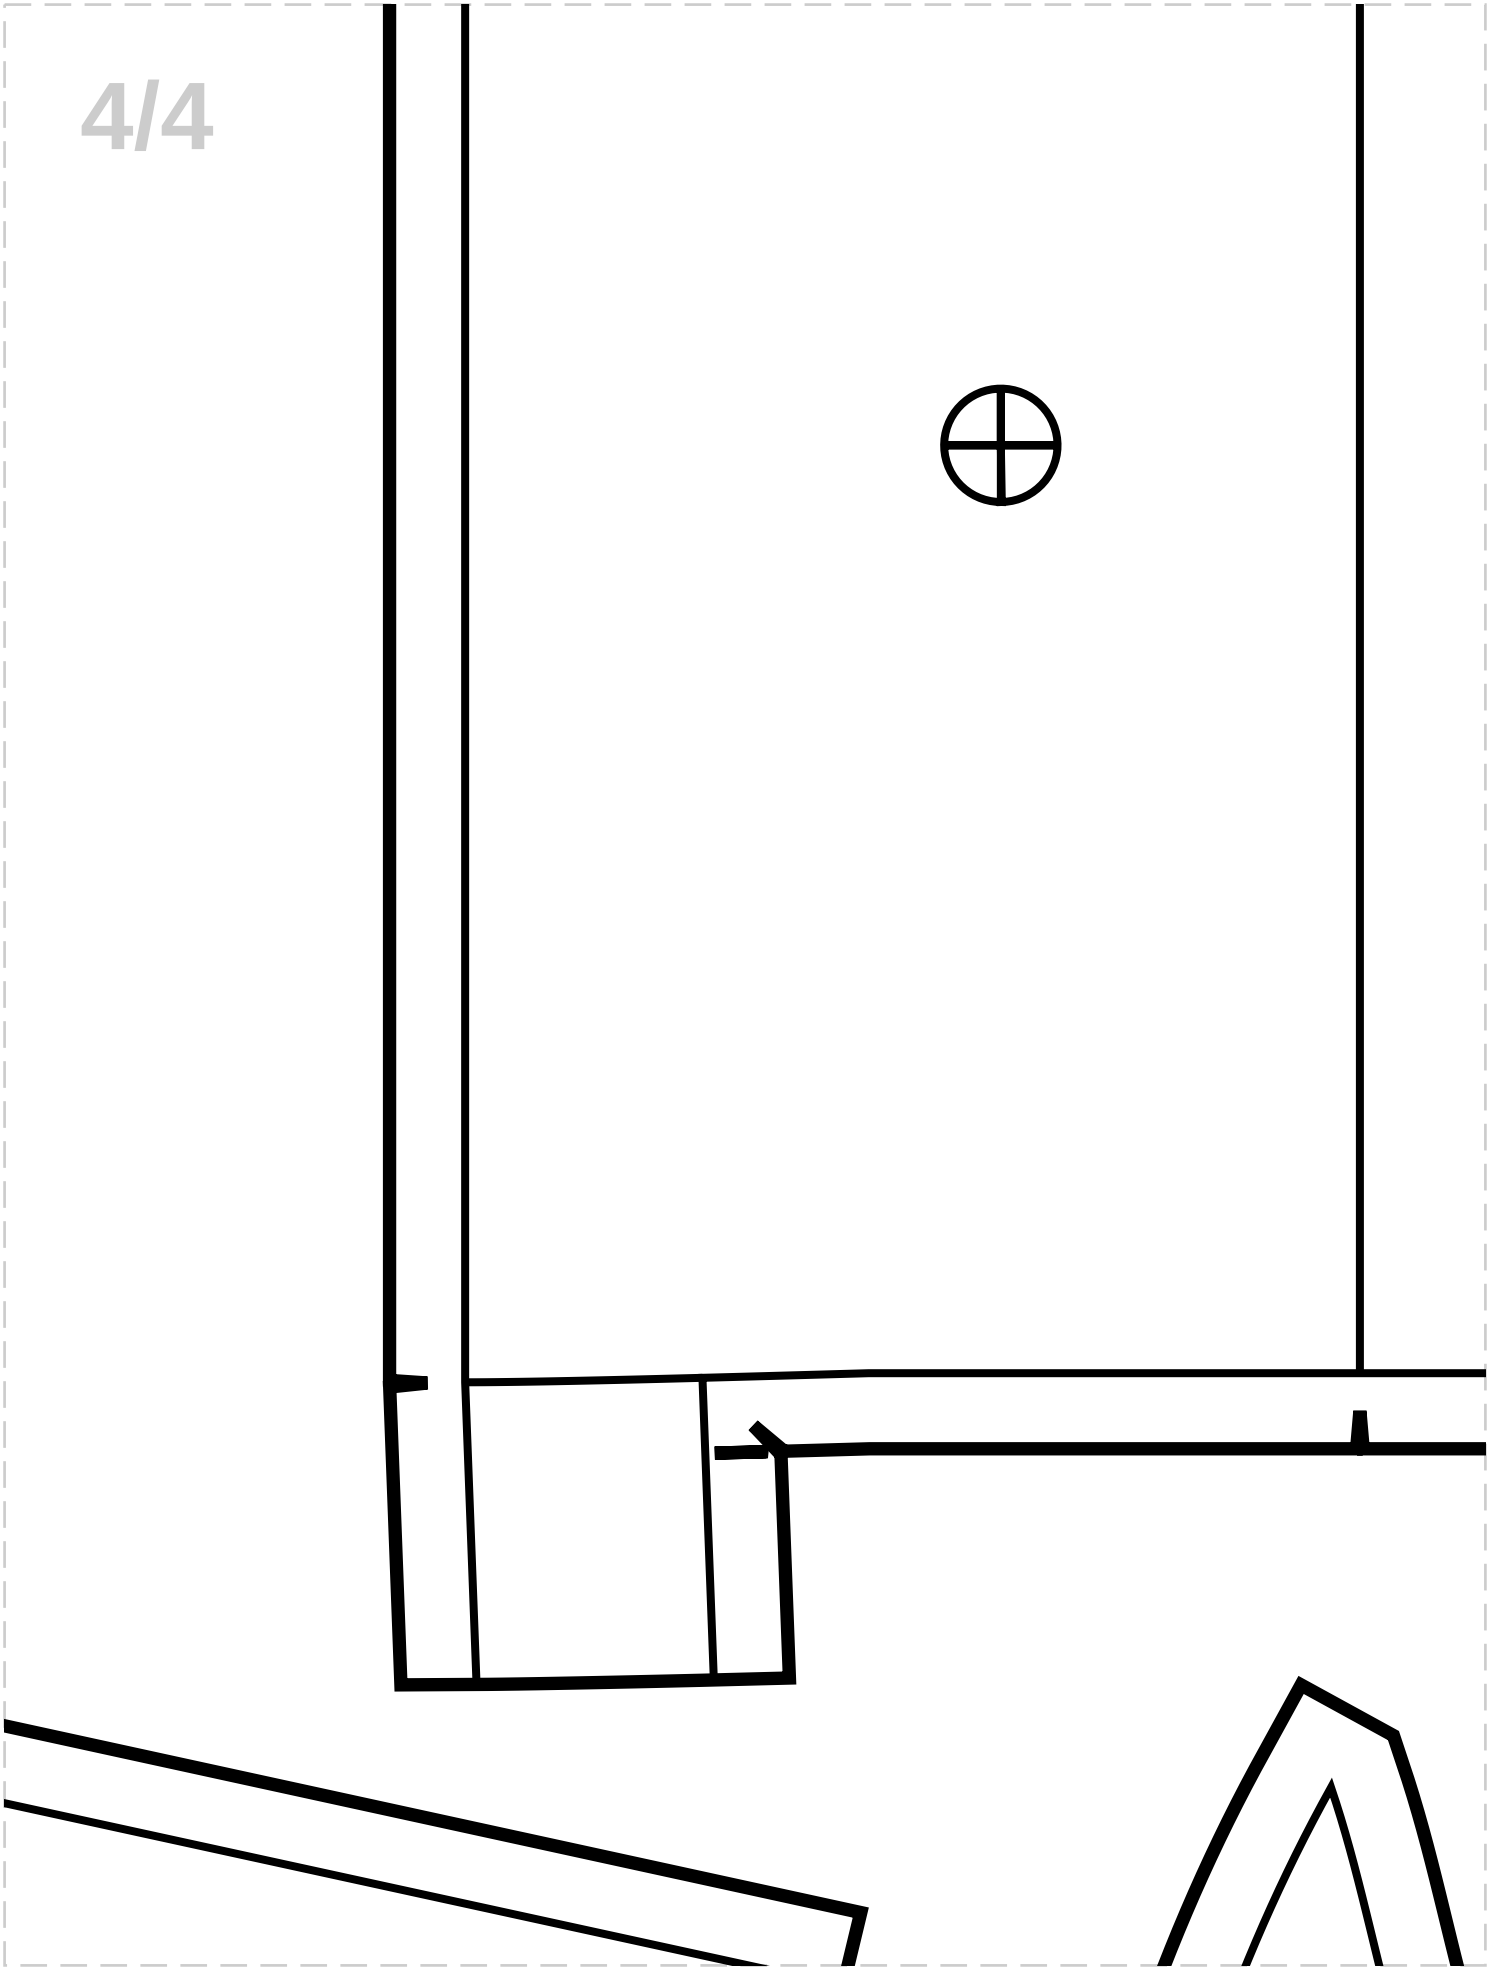

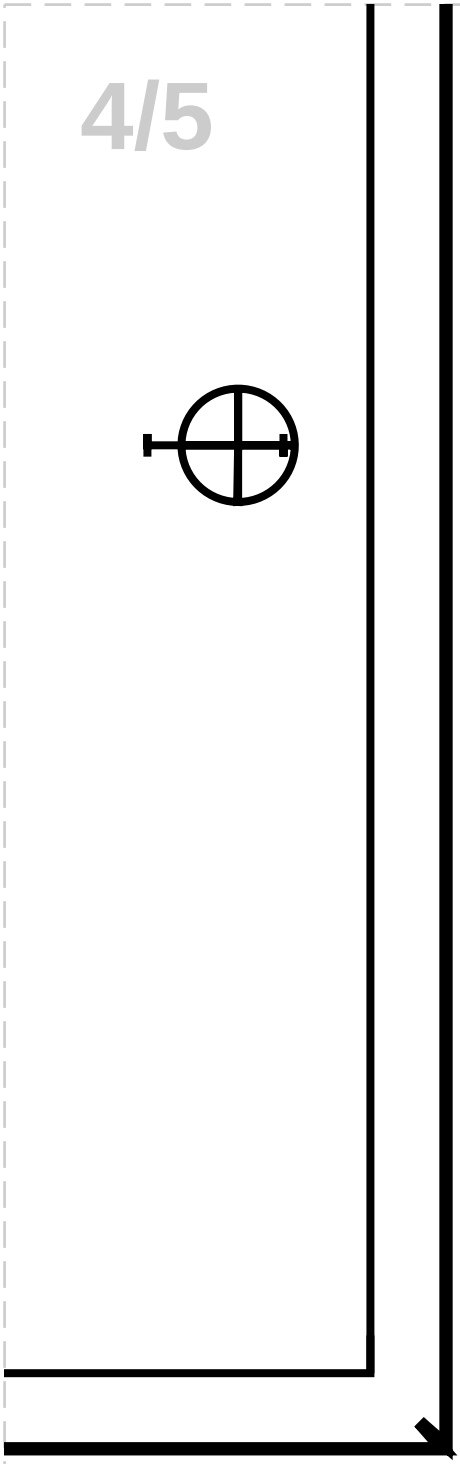


1

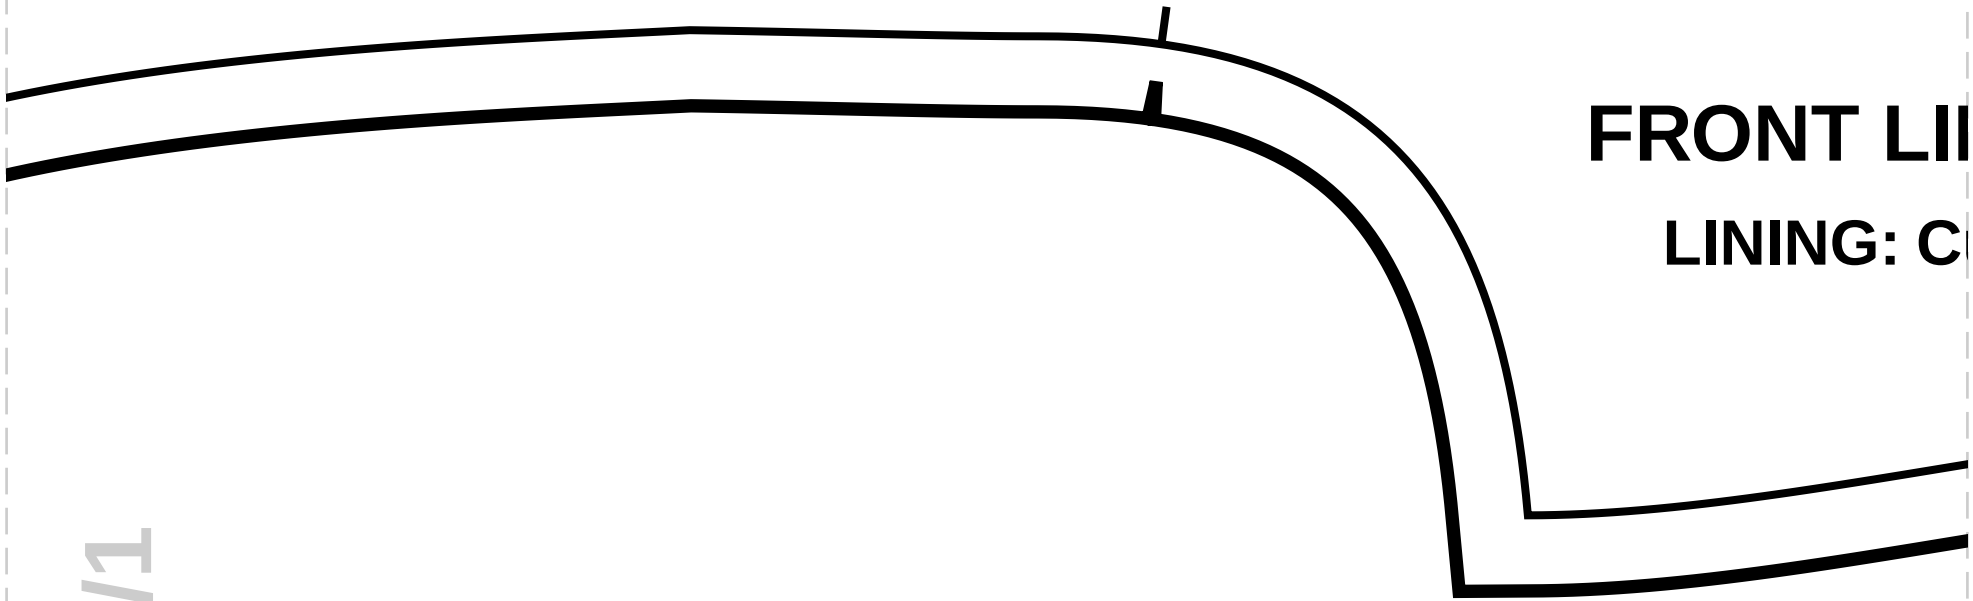

FRONT LI

LINING: C

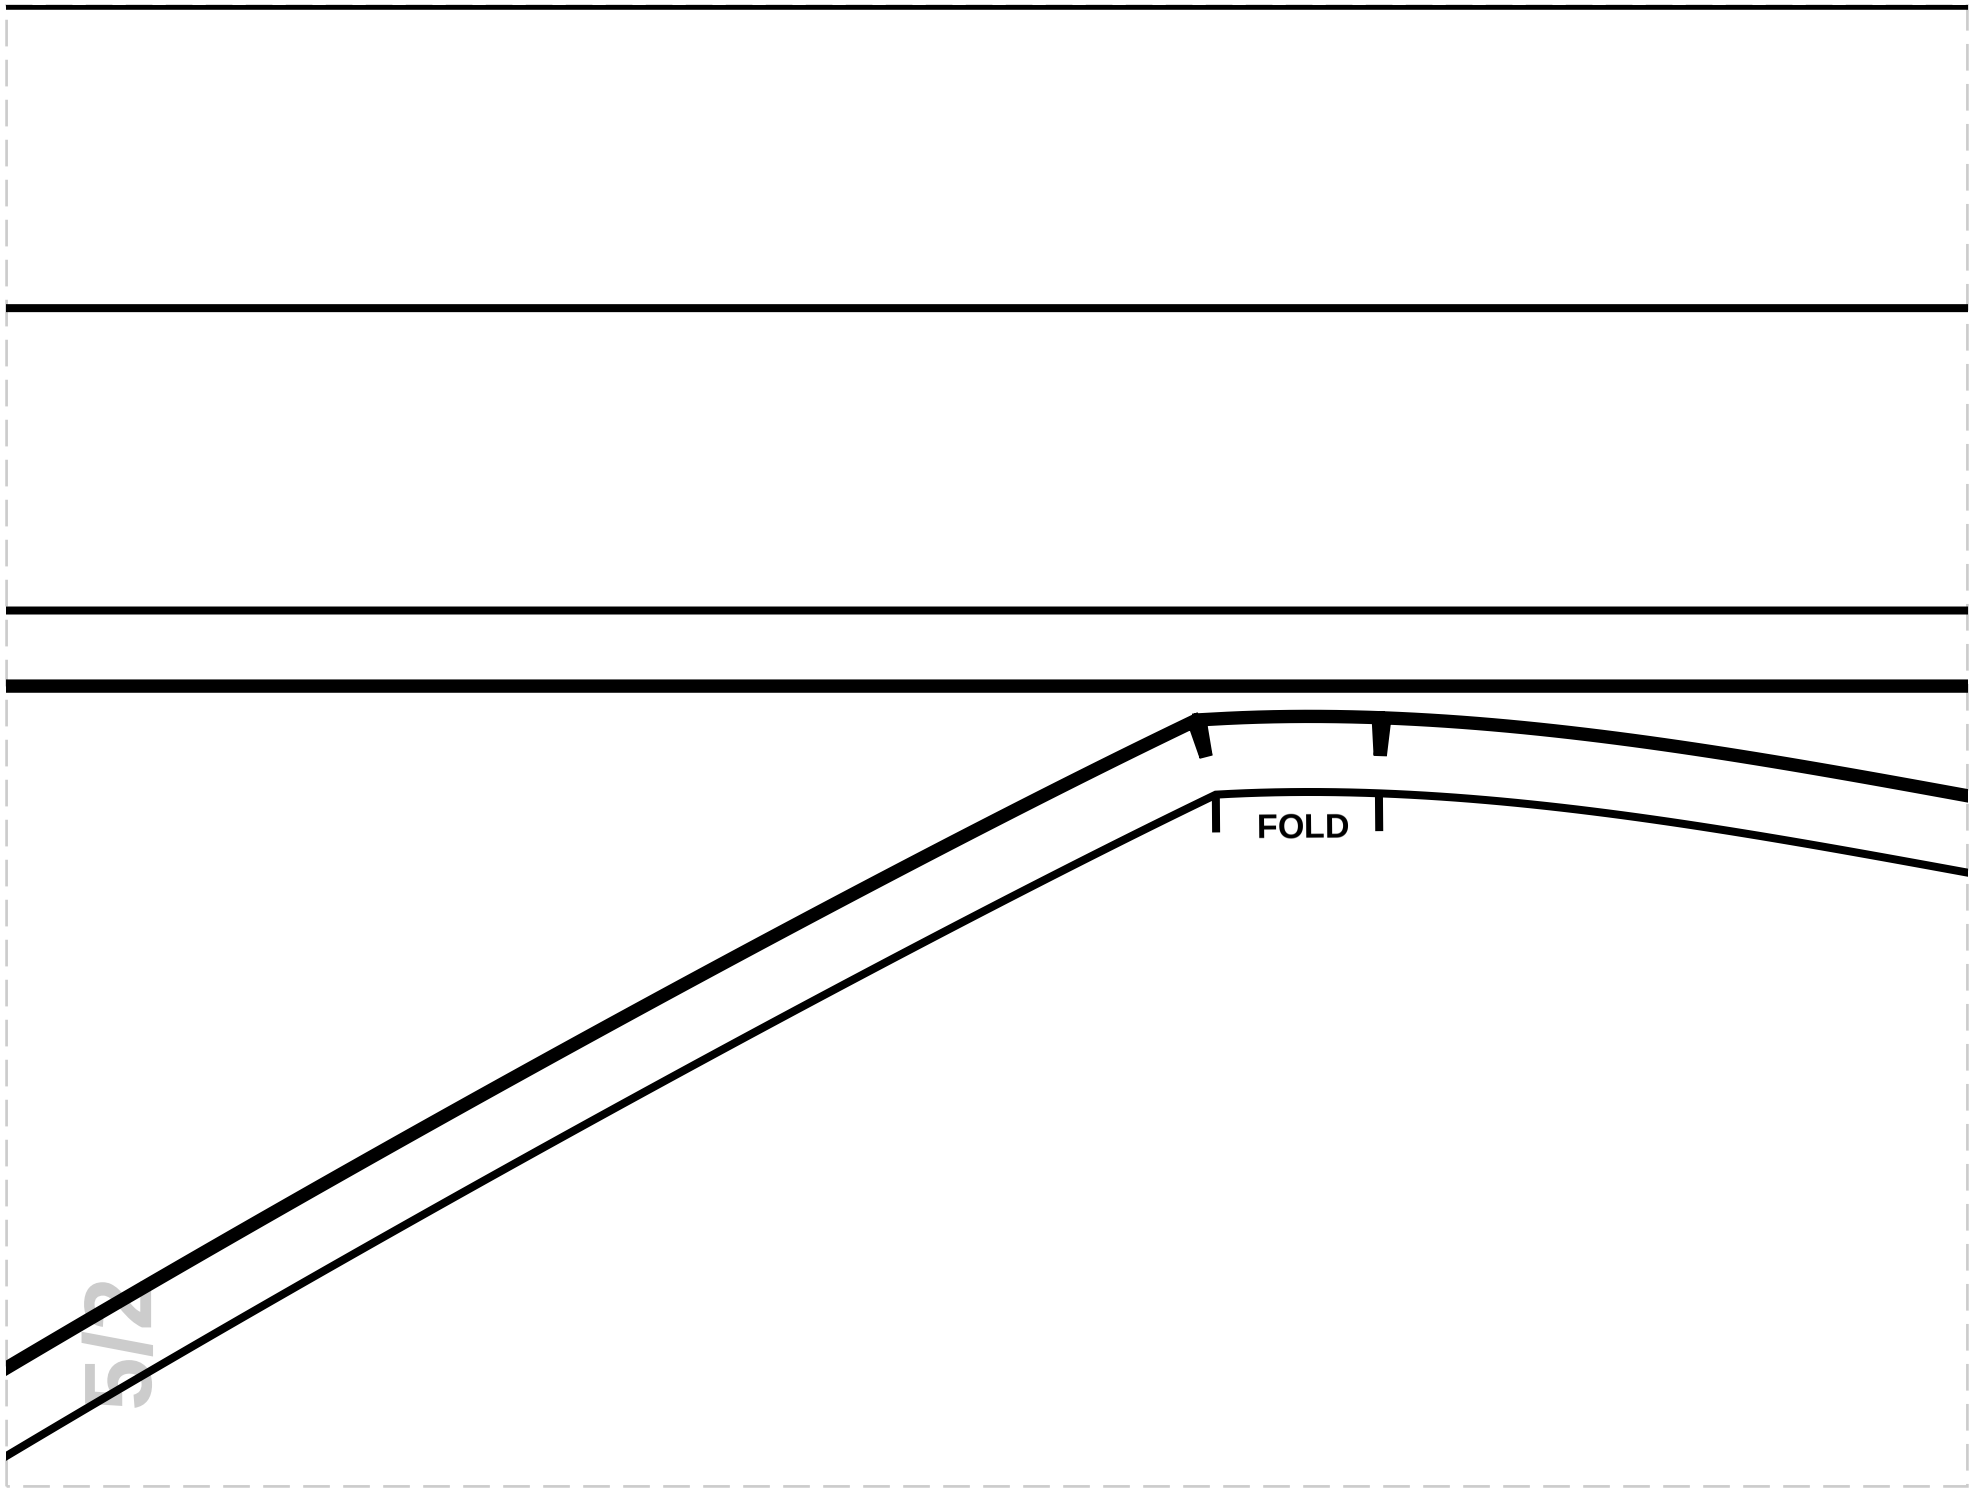

FOLD


4

CENTER BACK

MAIN FABRIC: Cut 2


FUSIBLE INTERFACING: Cut 2

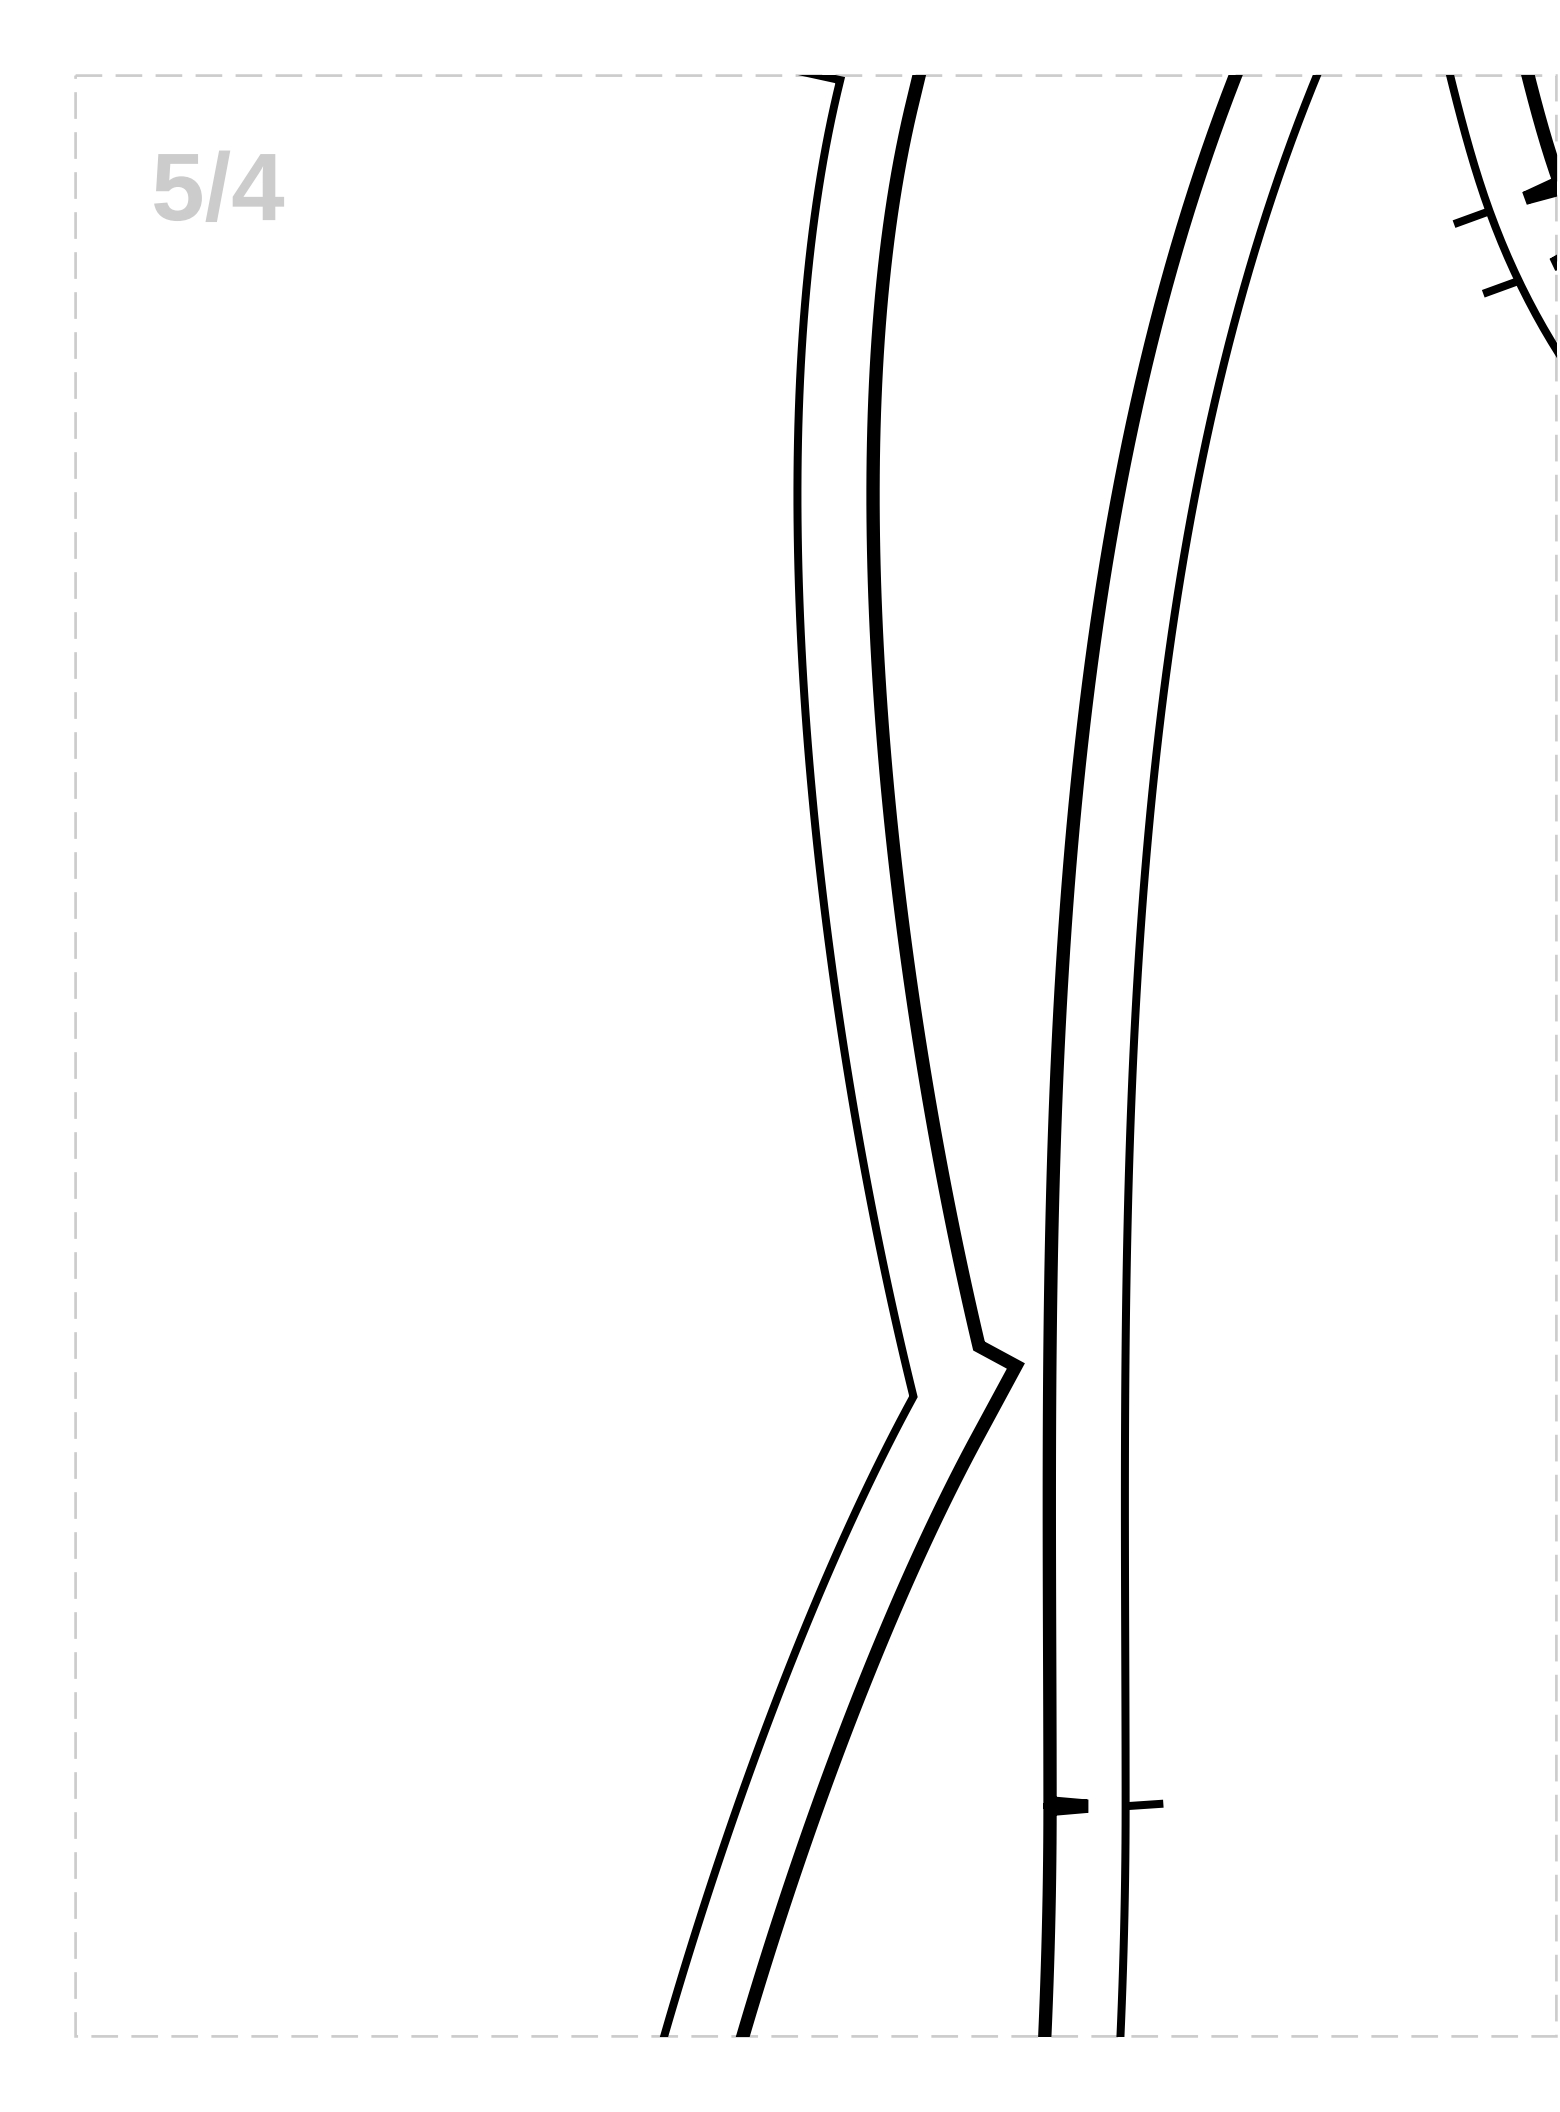

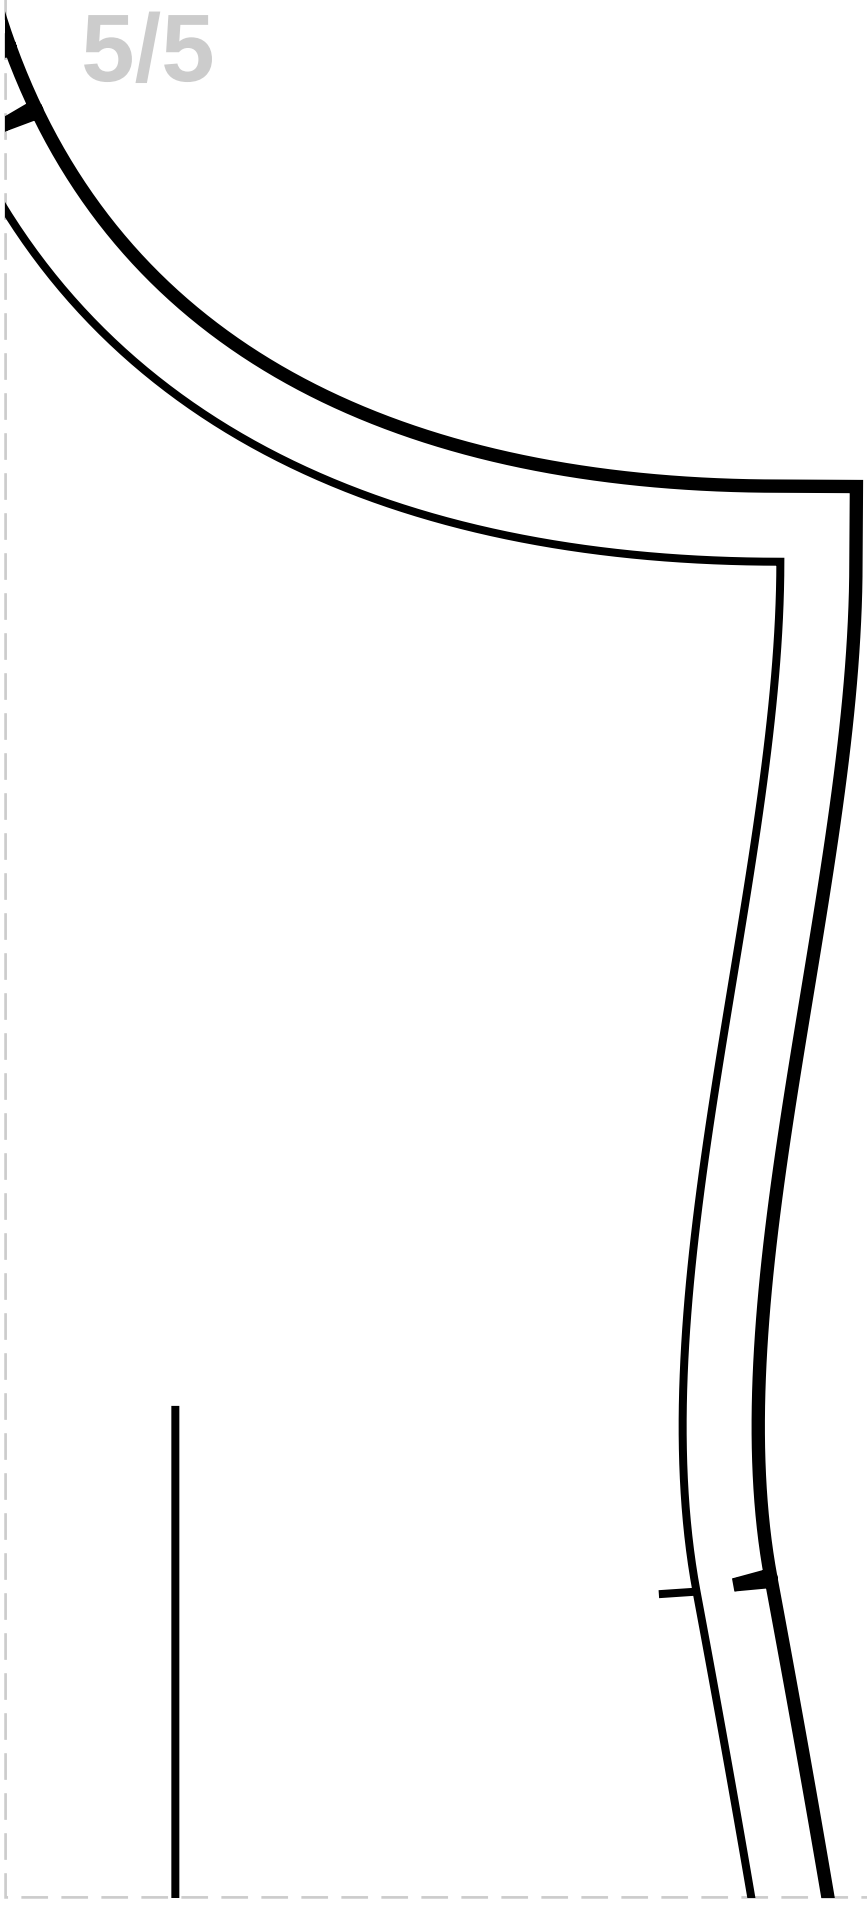


NING


ut 2

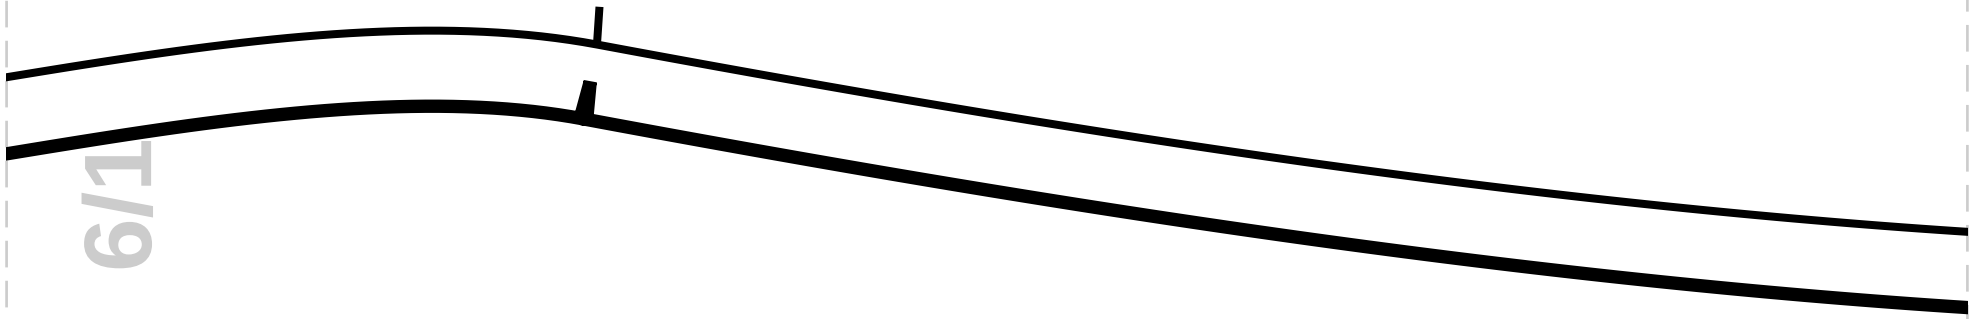



6/1

6/2

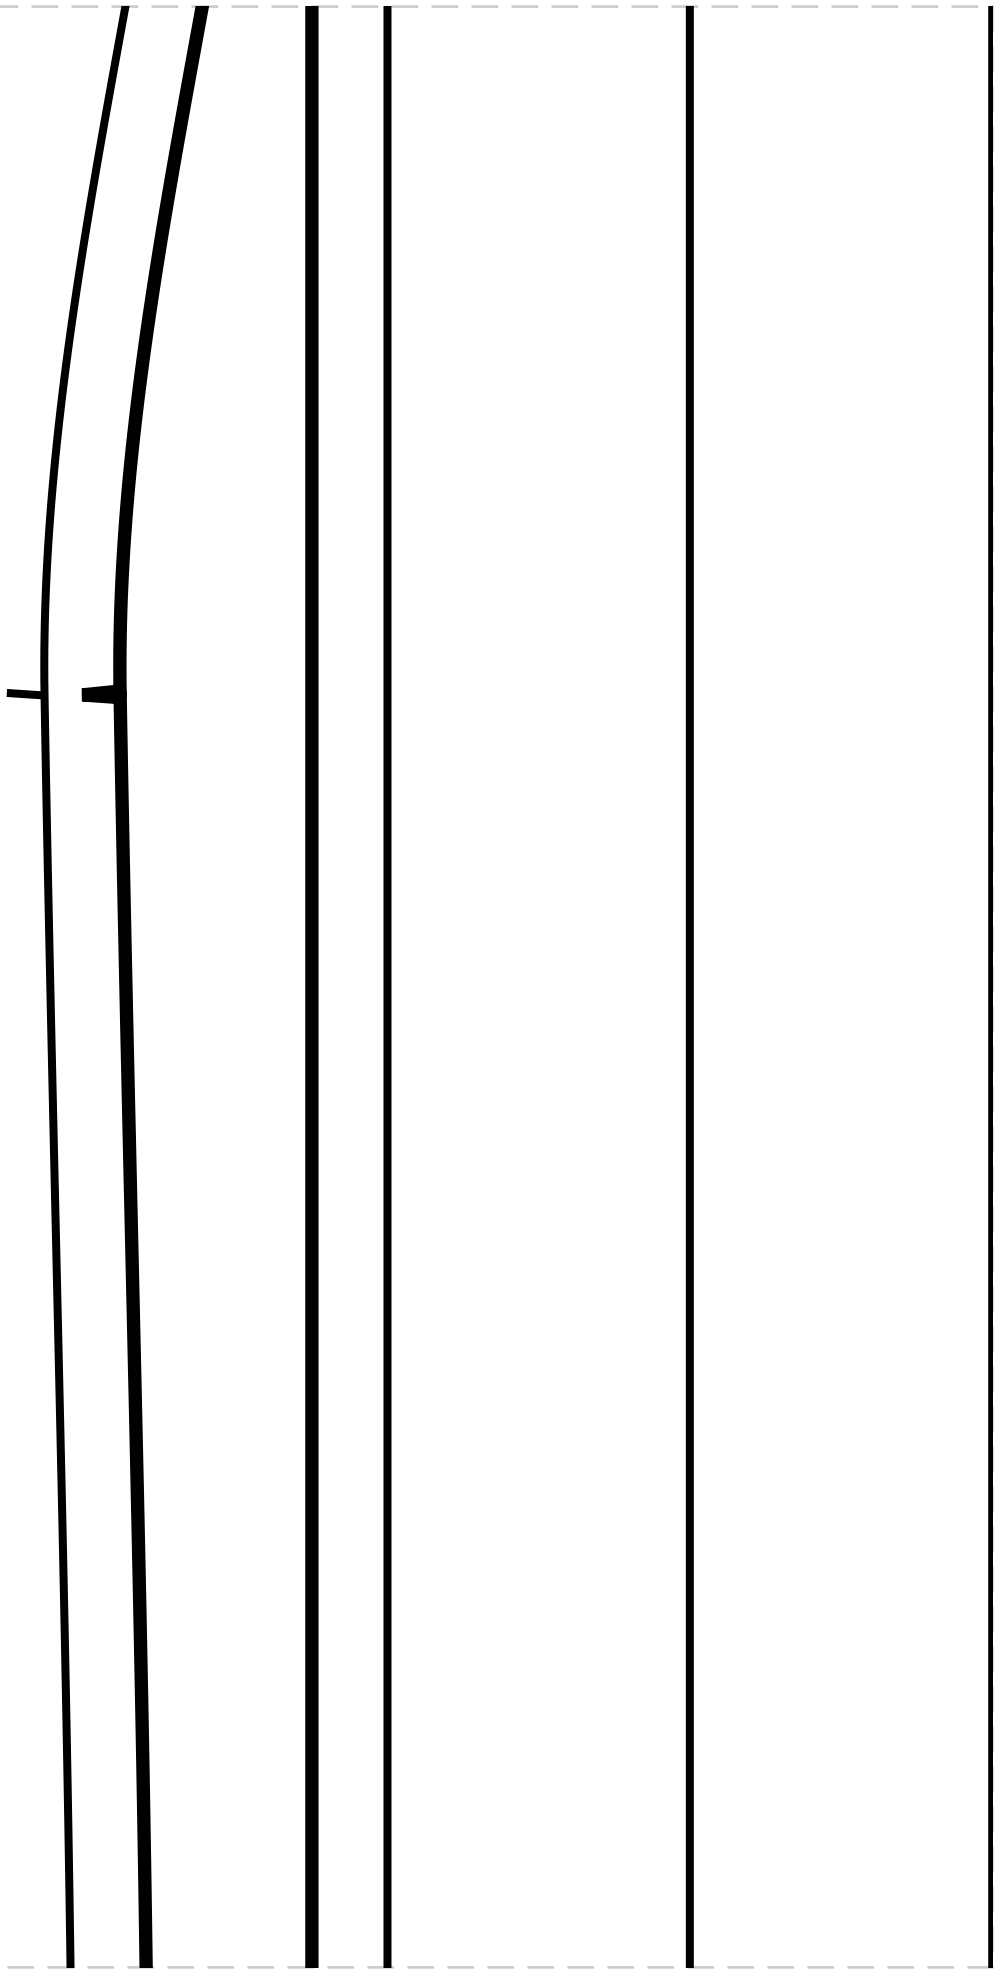

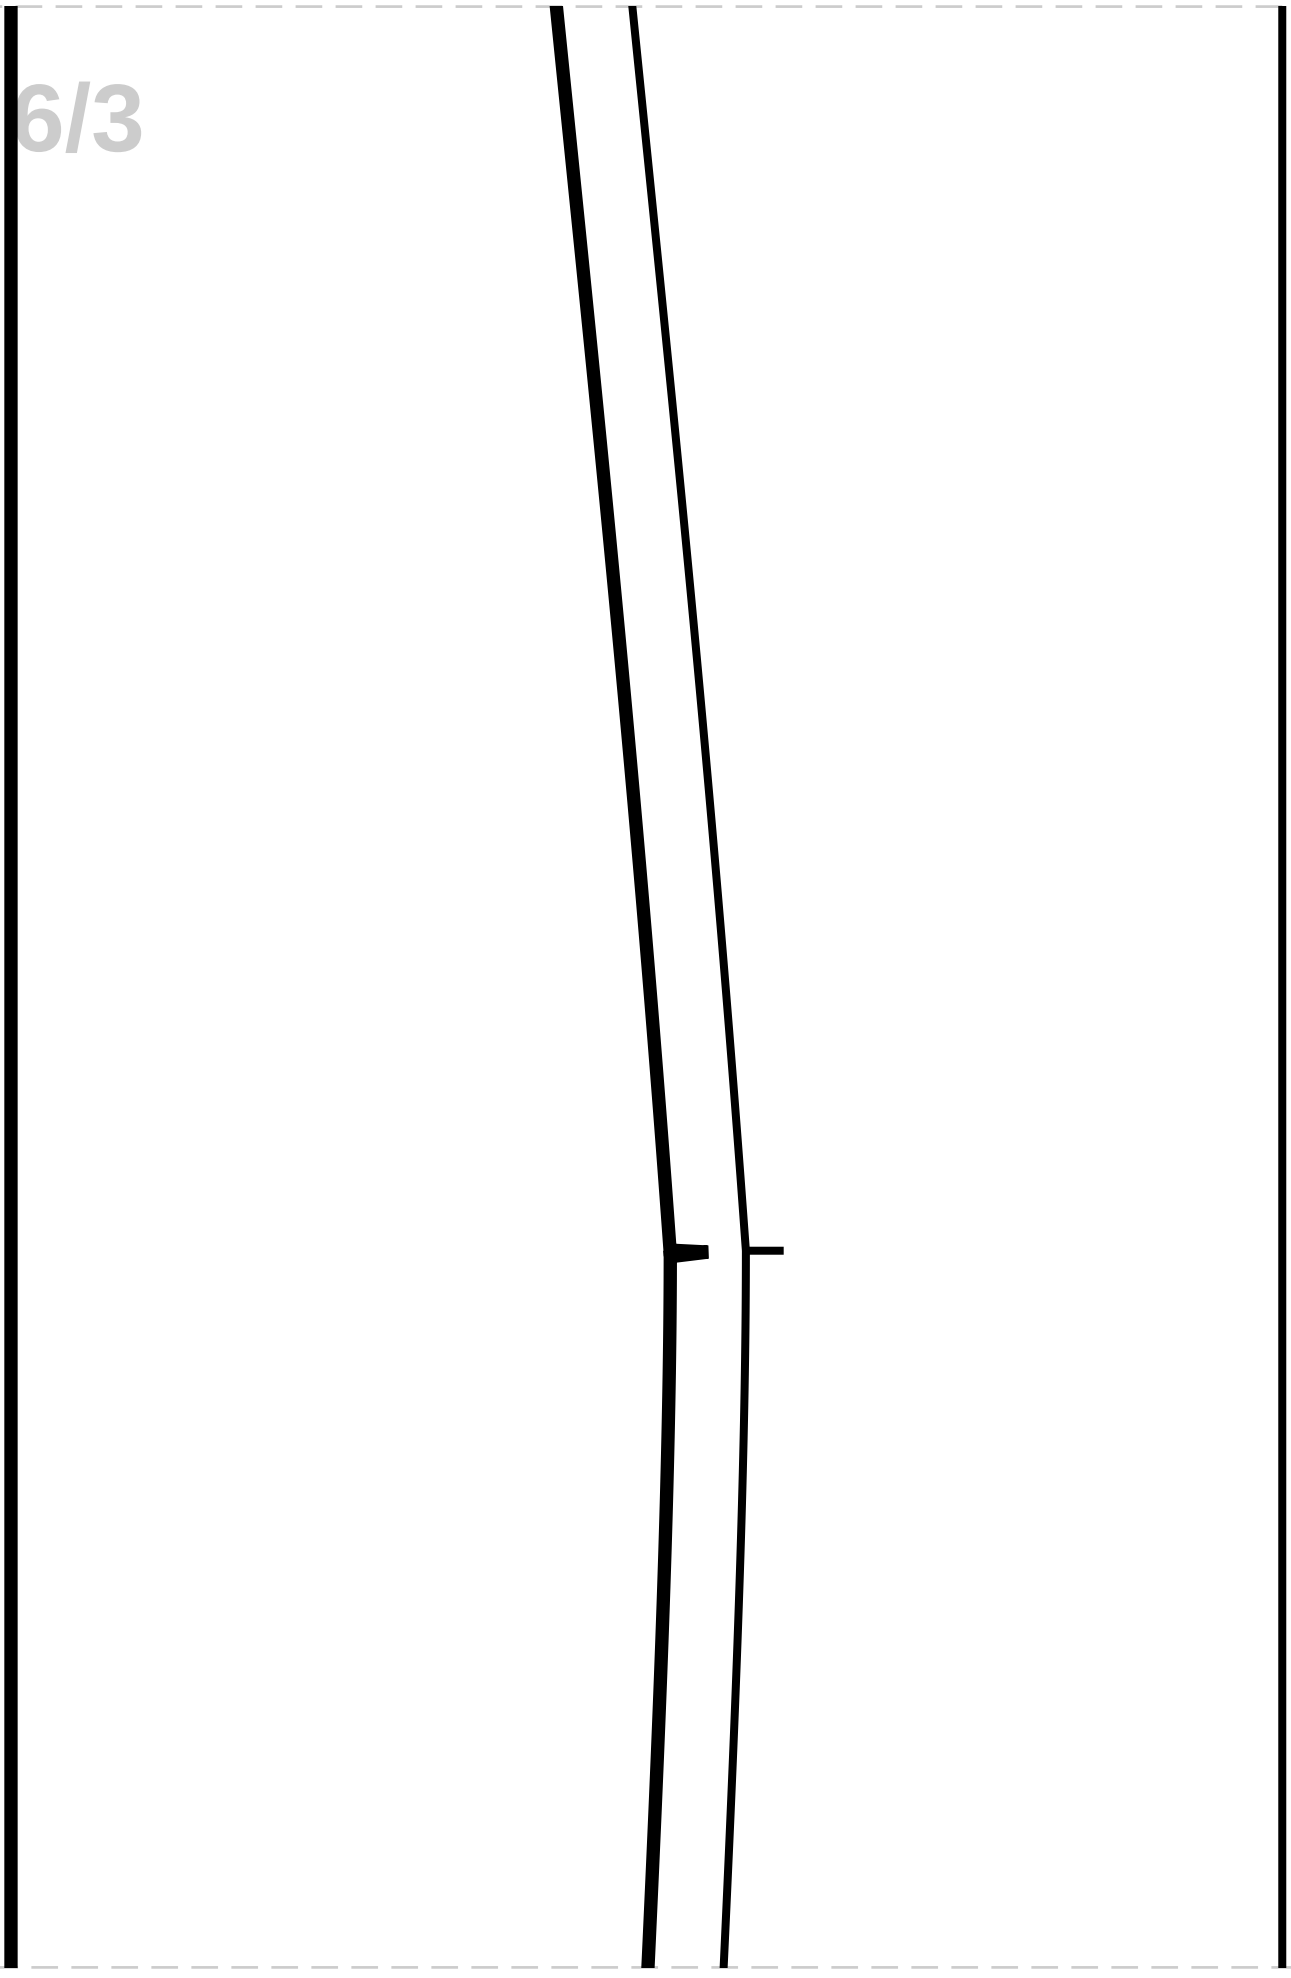

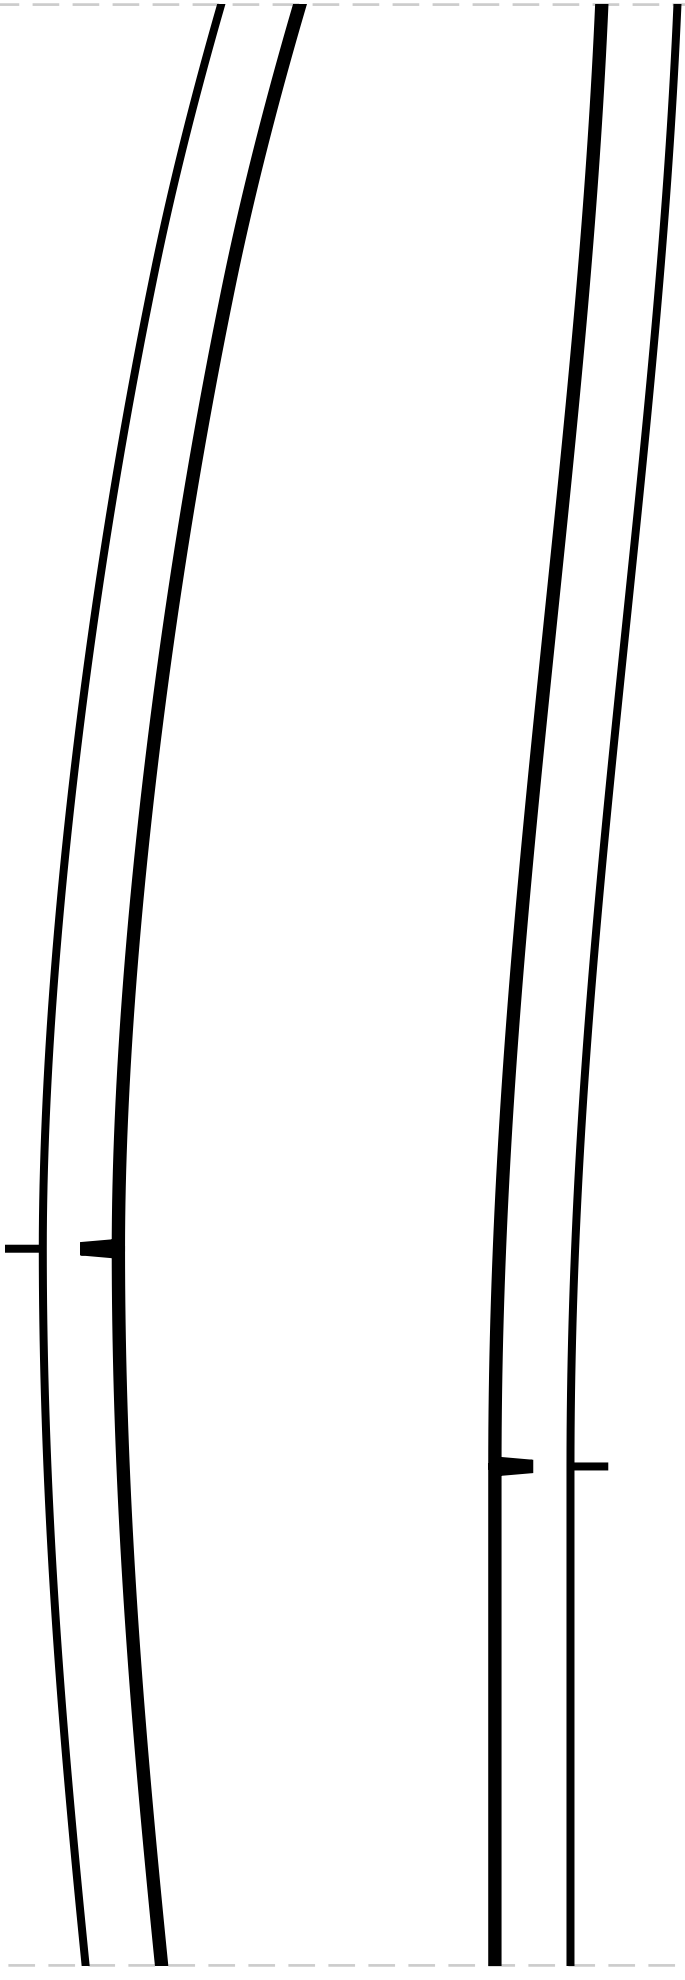

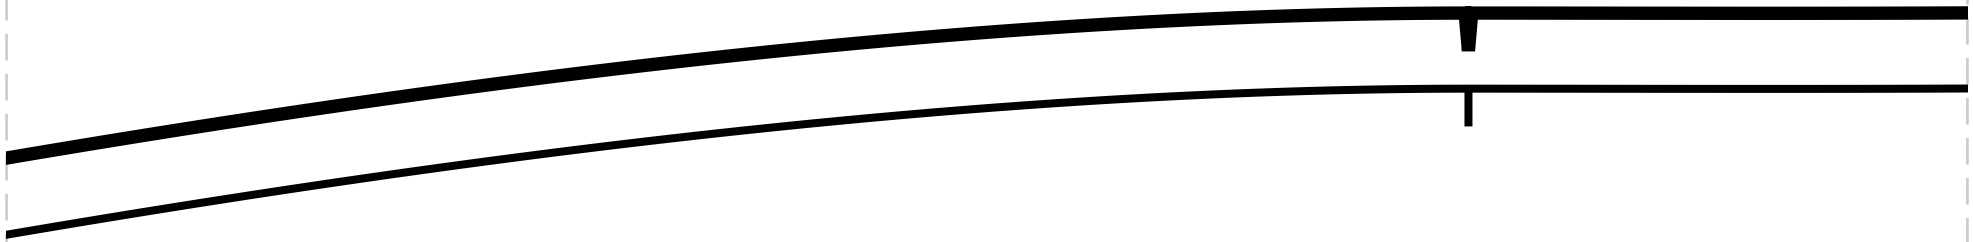


6


SIDE BACK


MAIN FABRIC: Cut 2


FUSIBLE INTERFACING: Cut 2

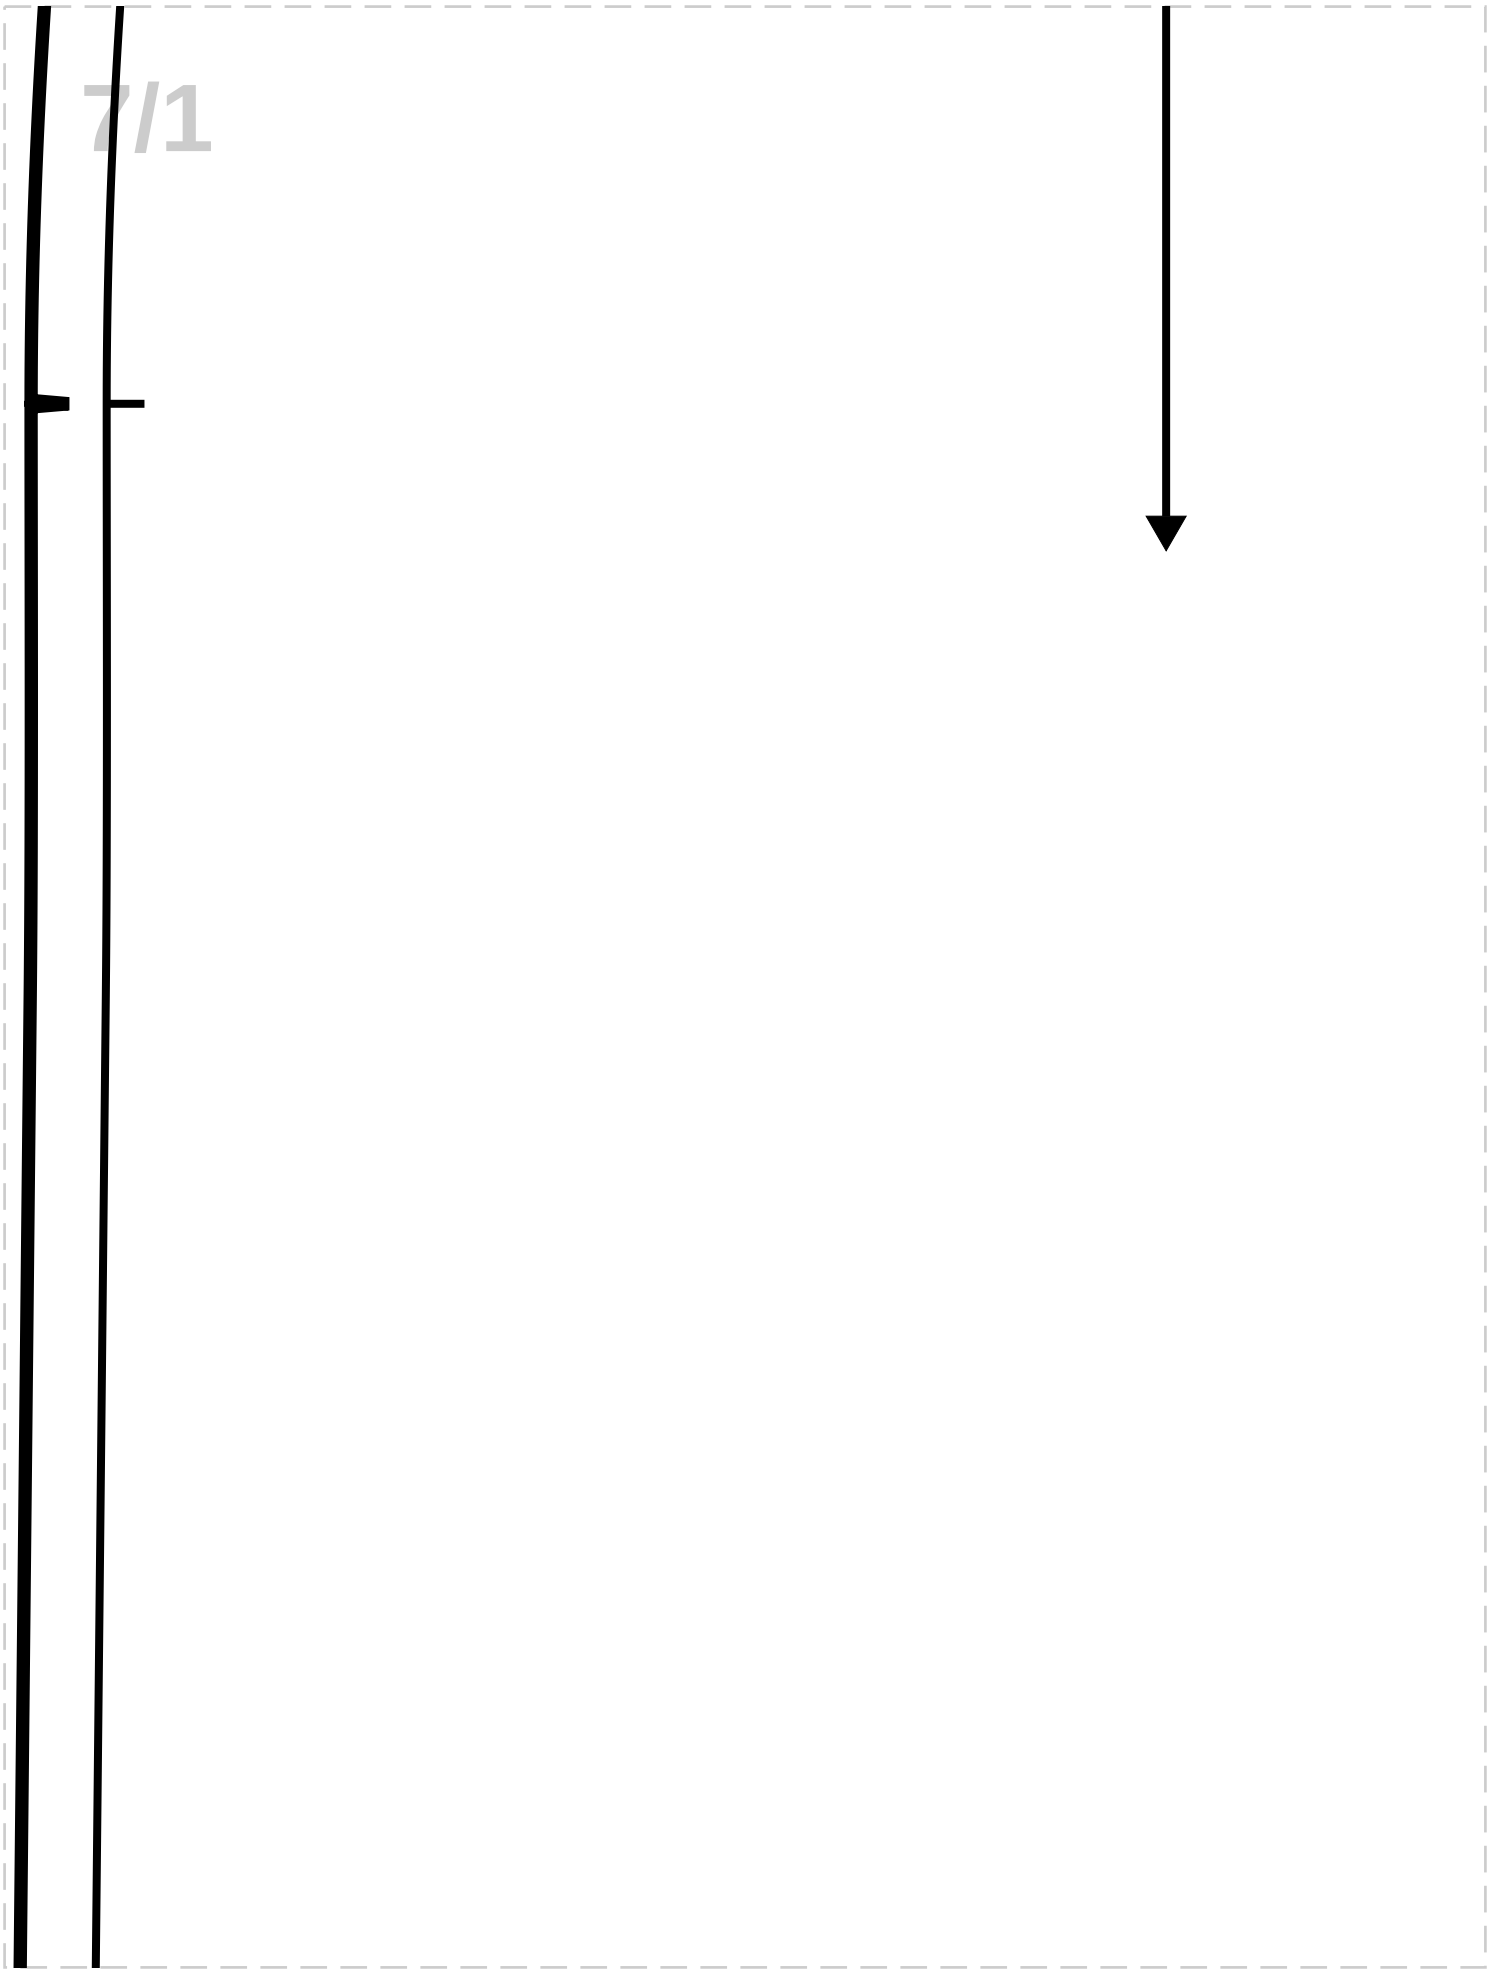
7/1


7/2

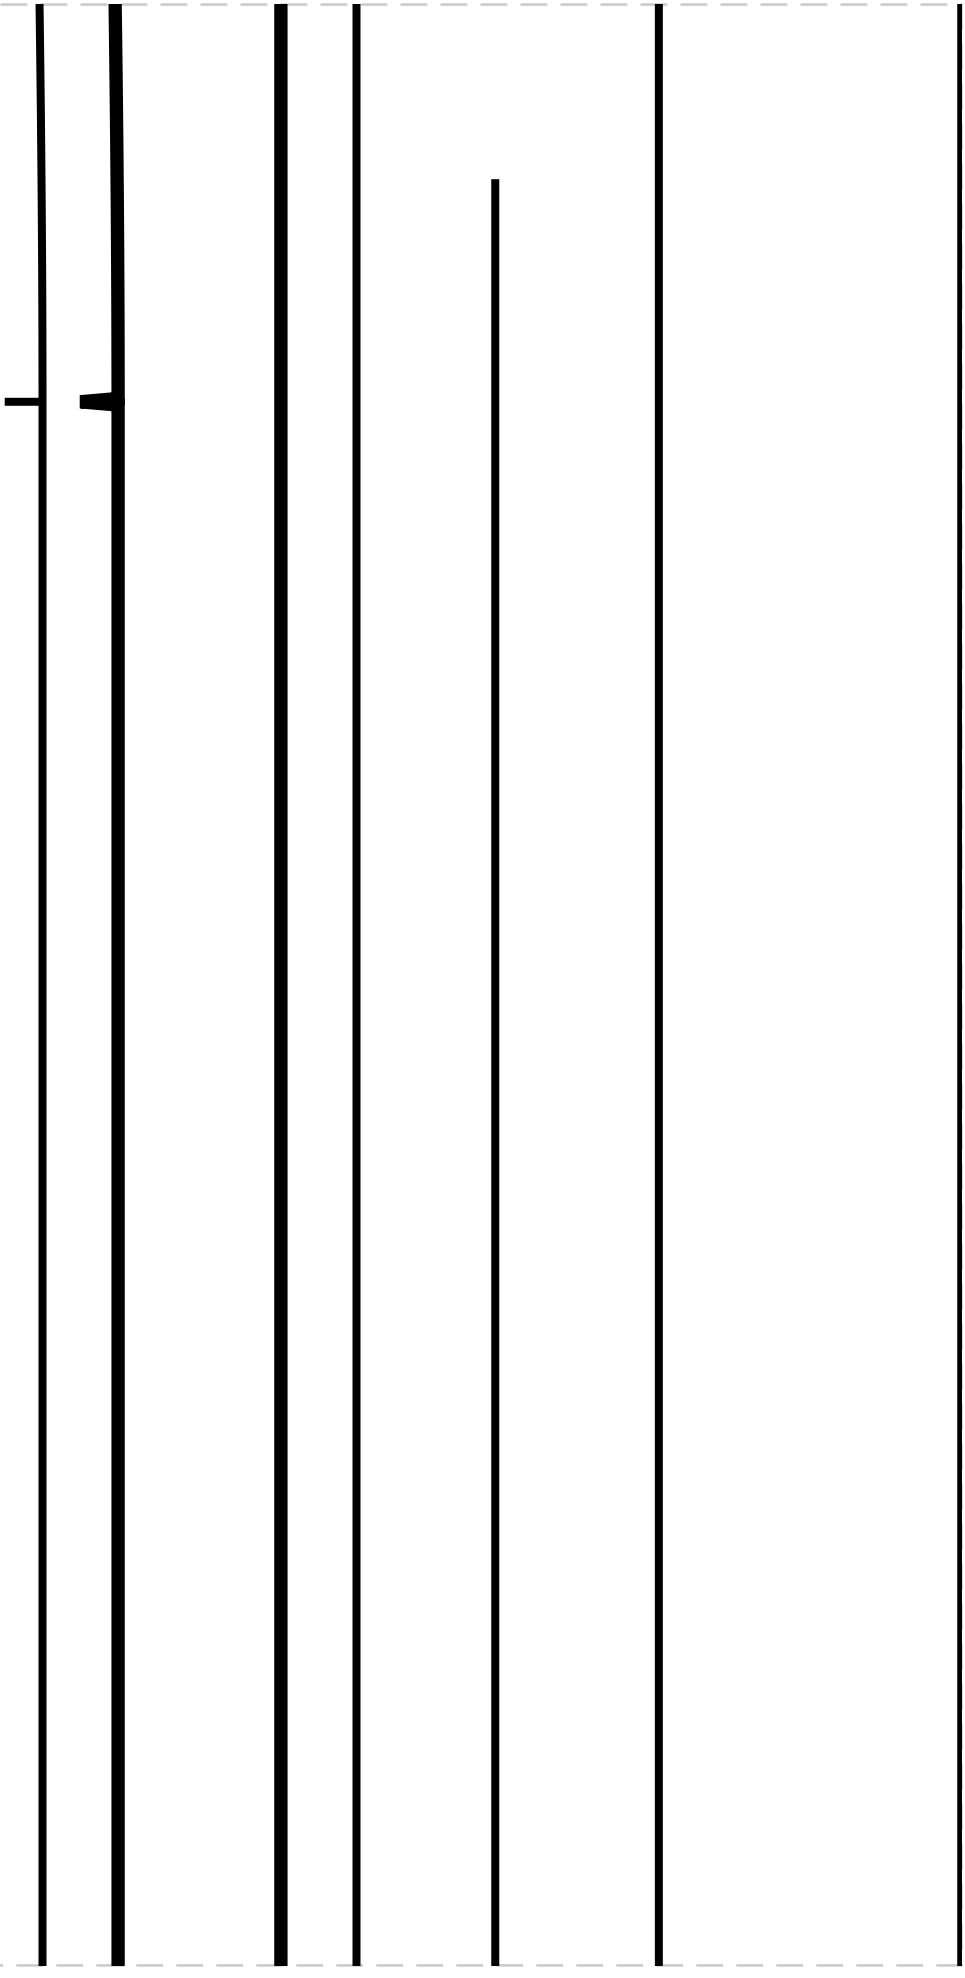


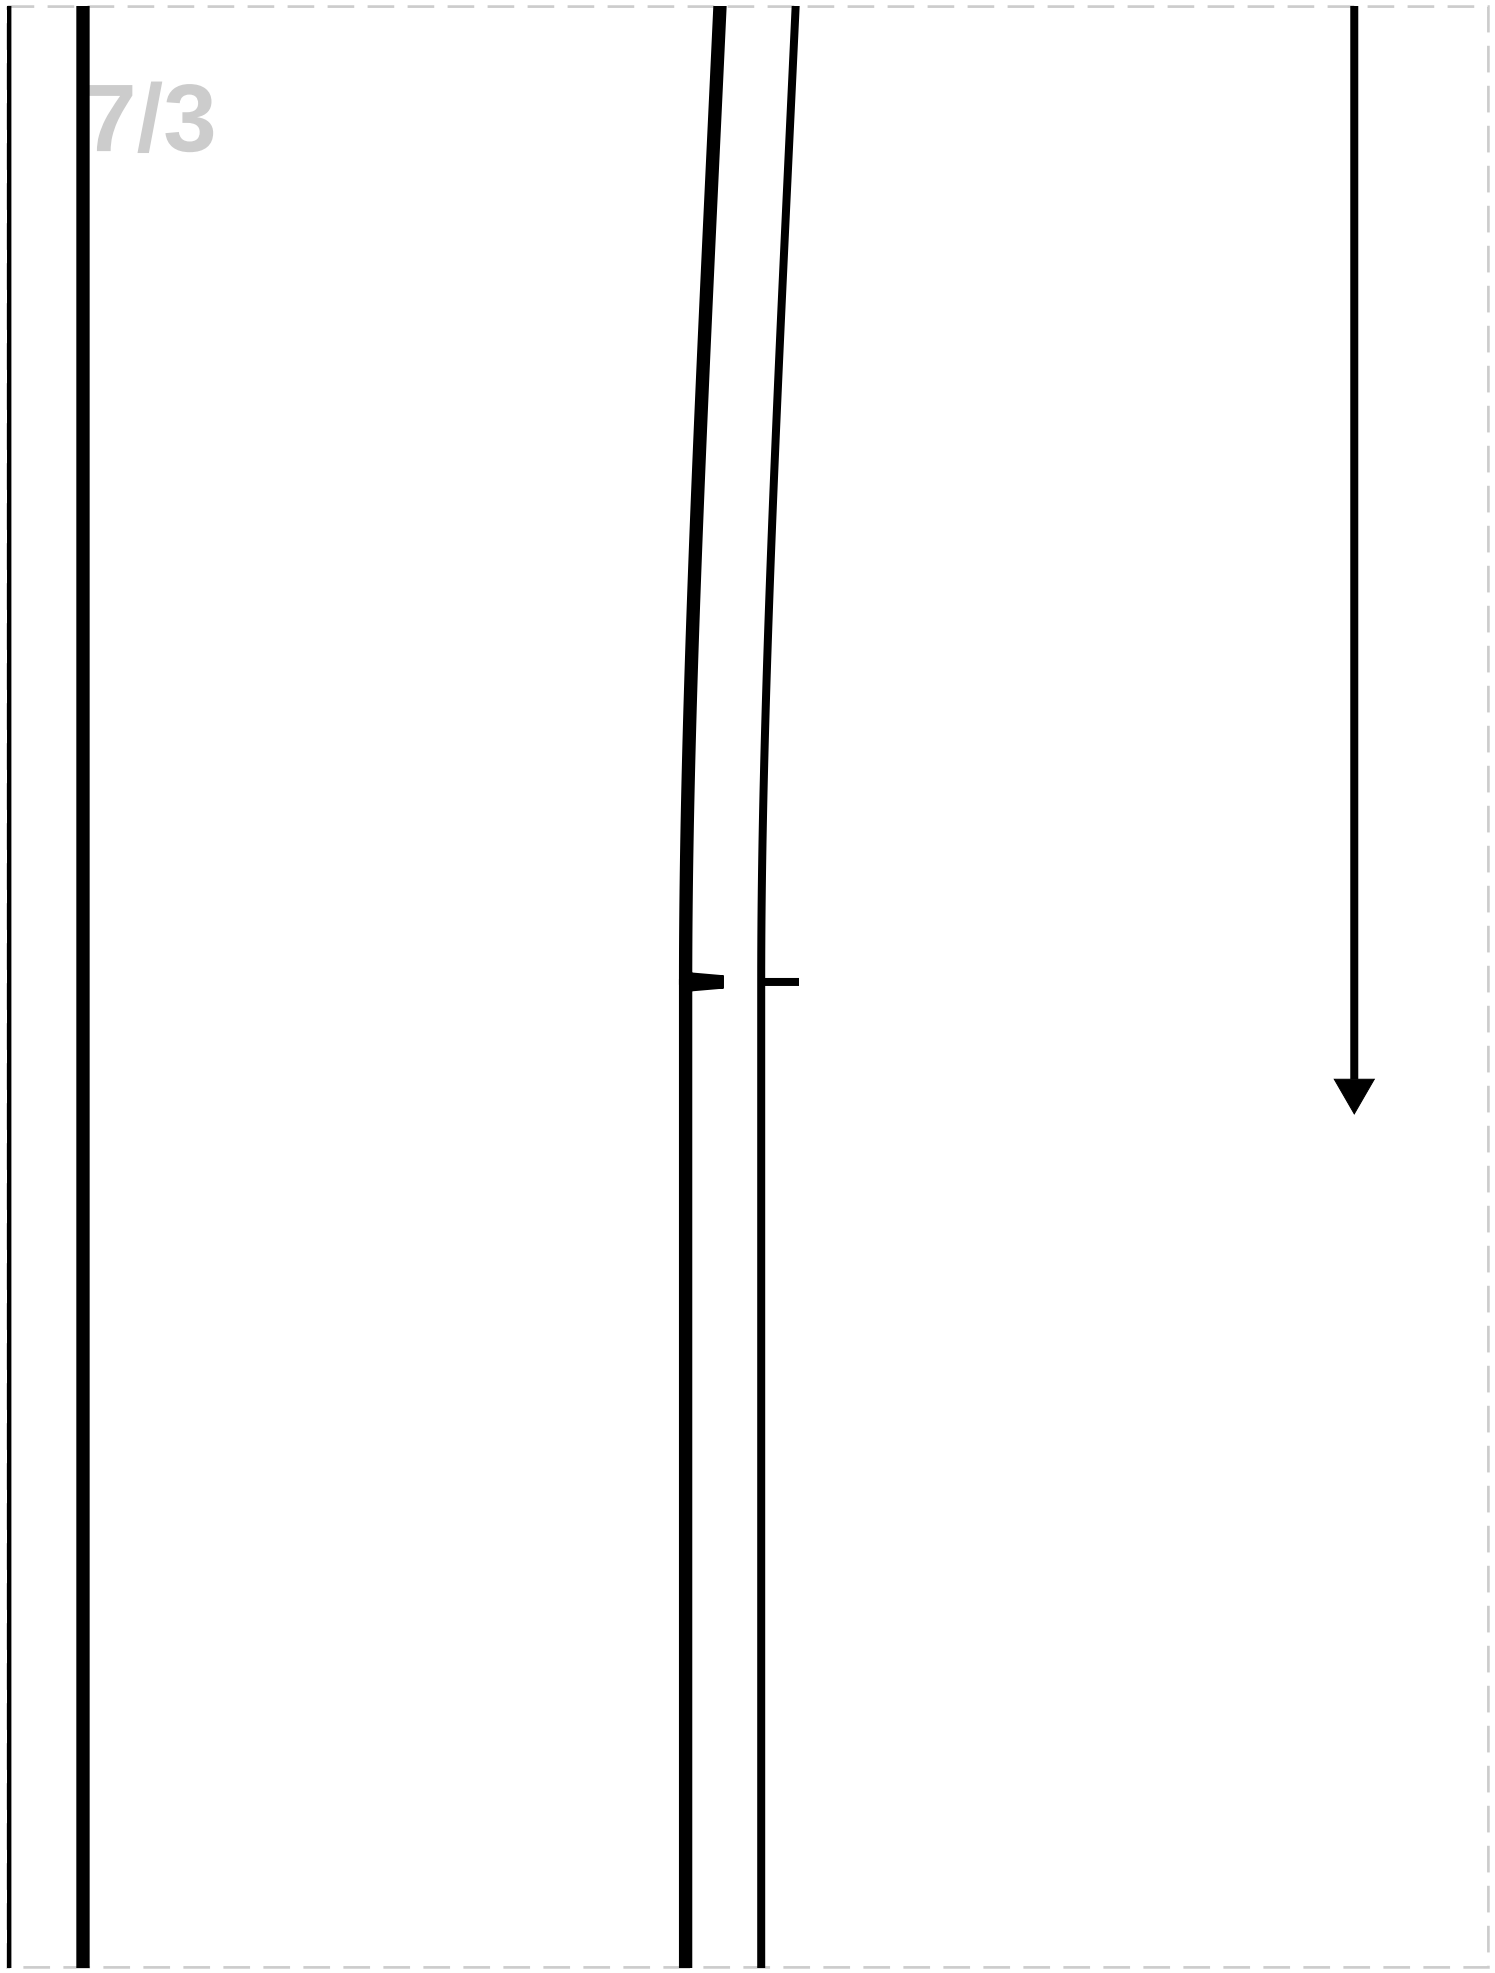


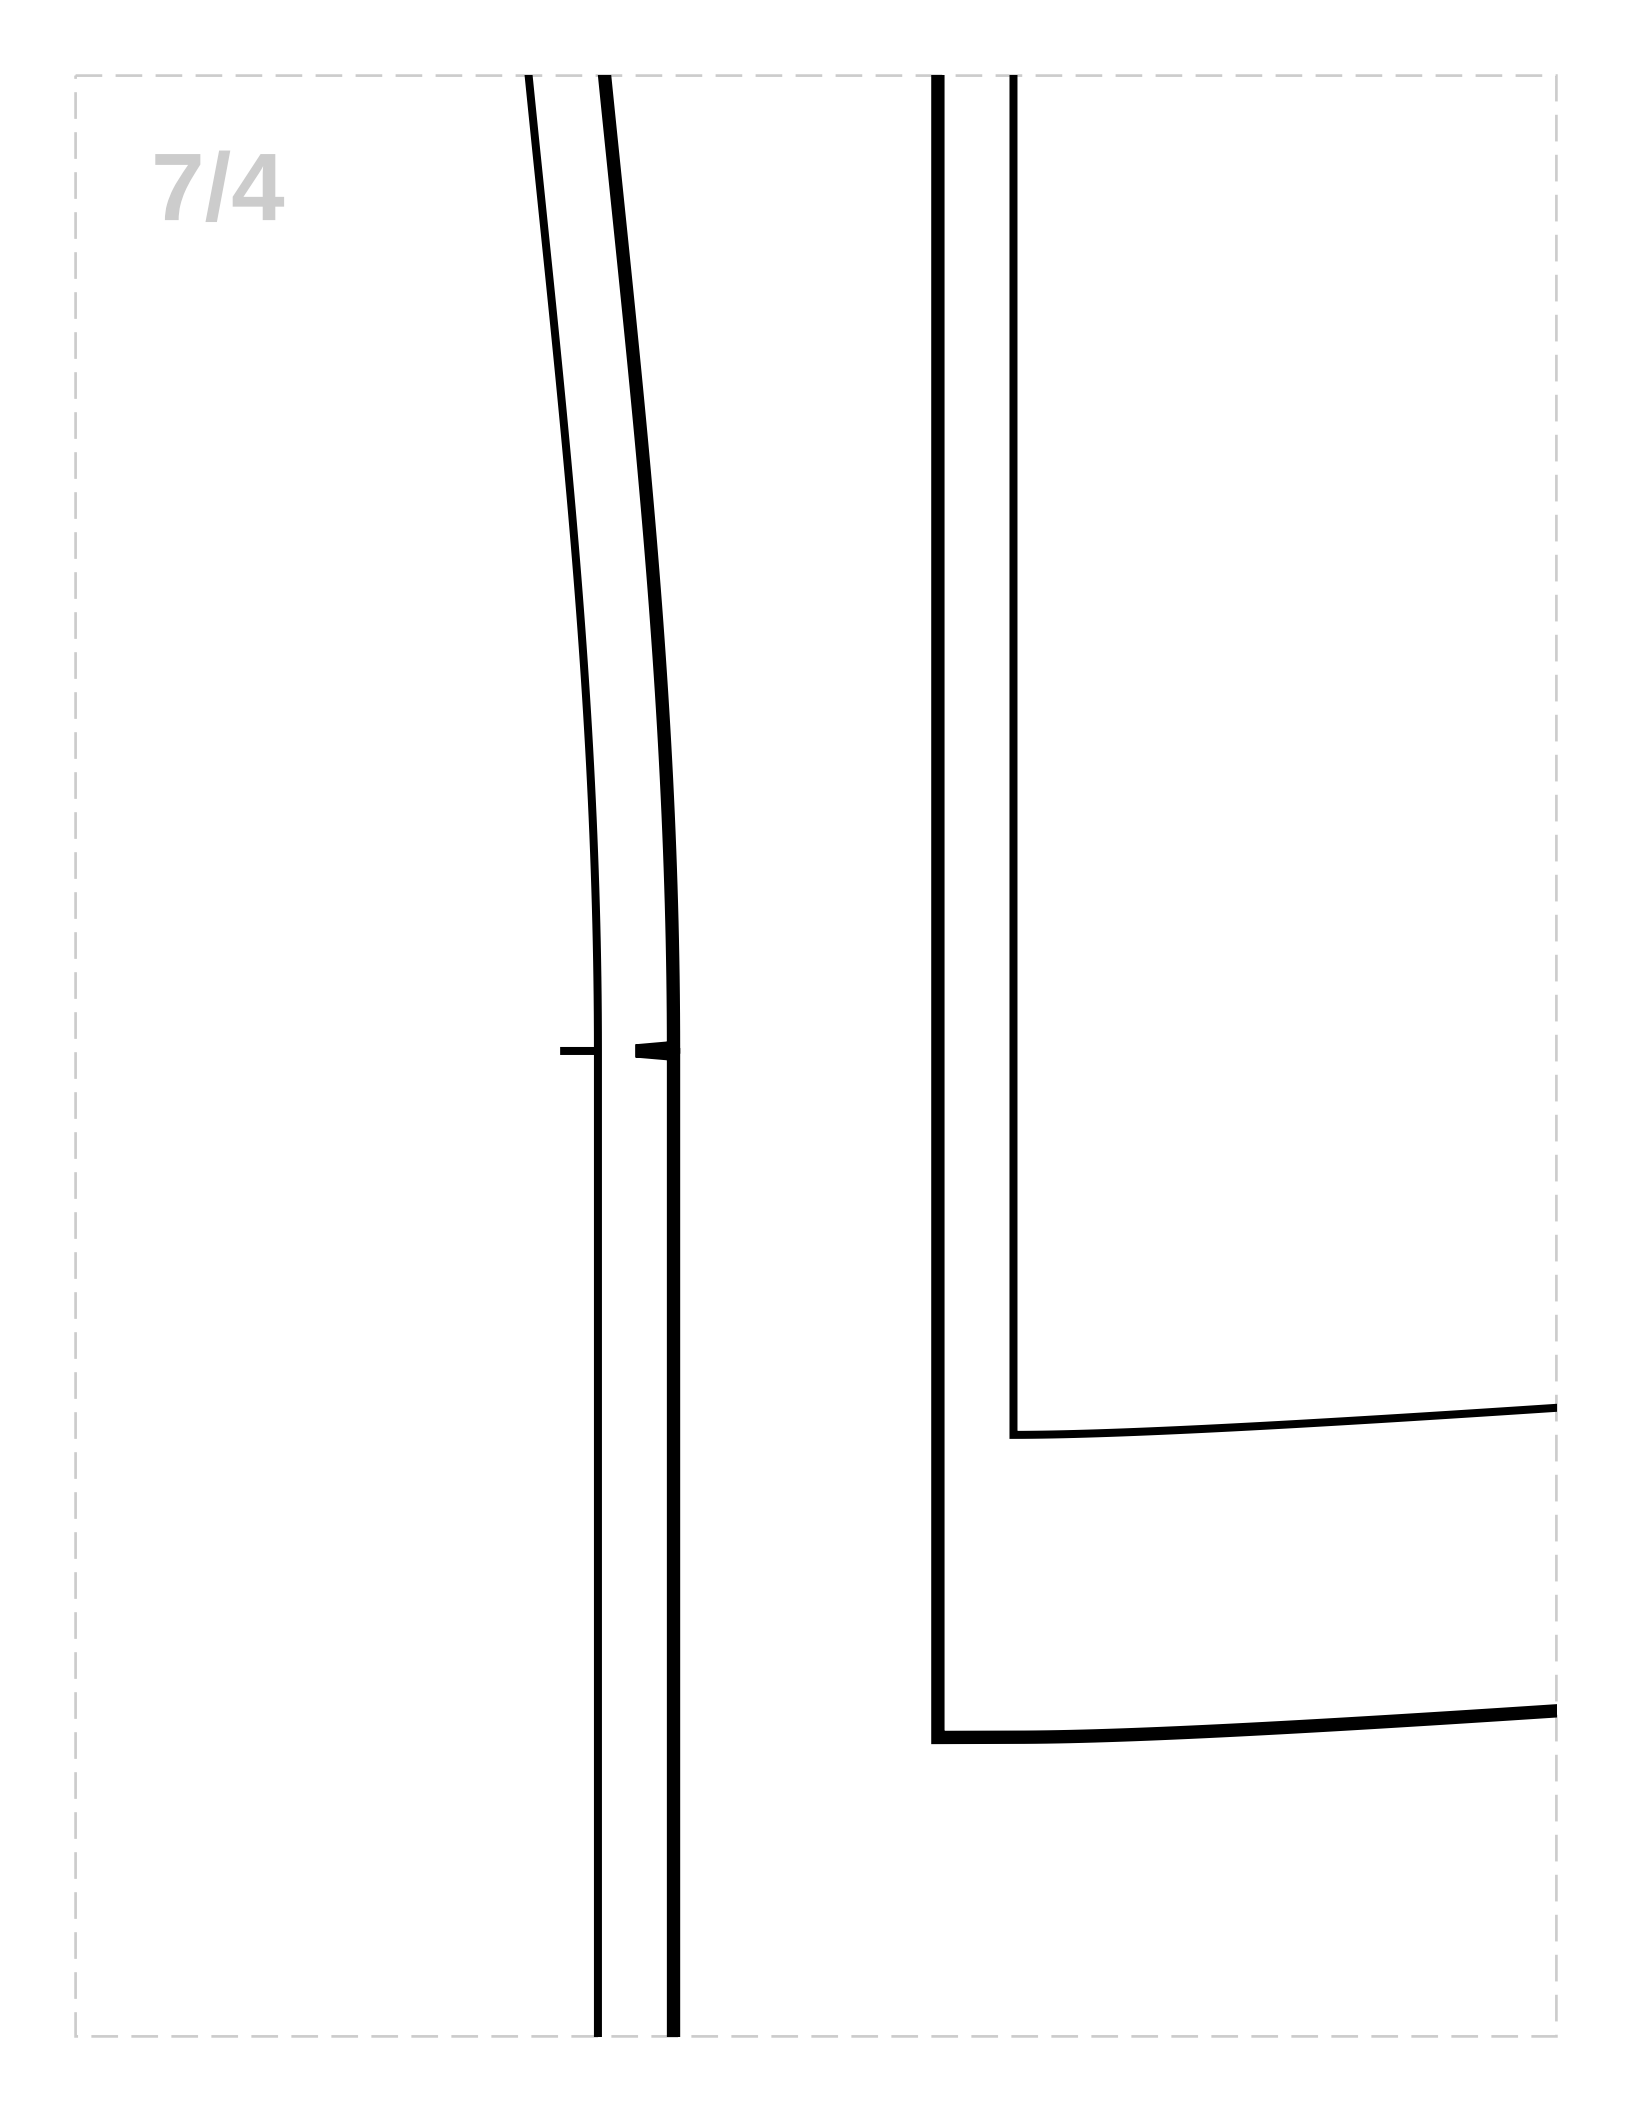



FUSIB
L
N

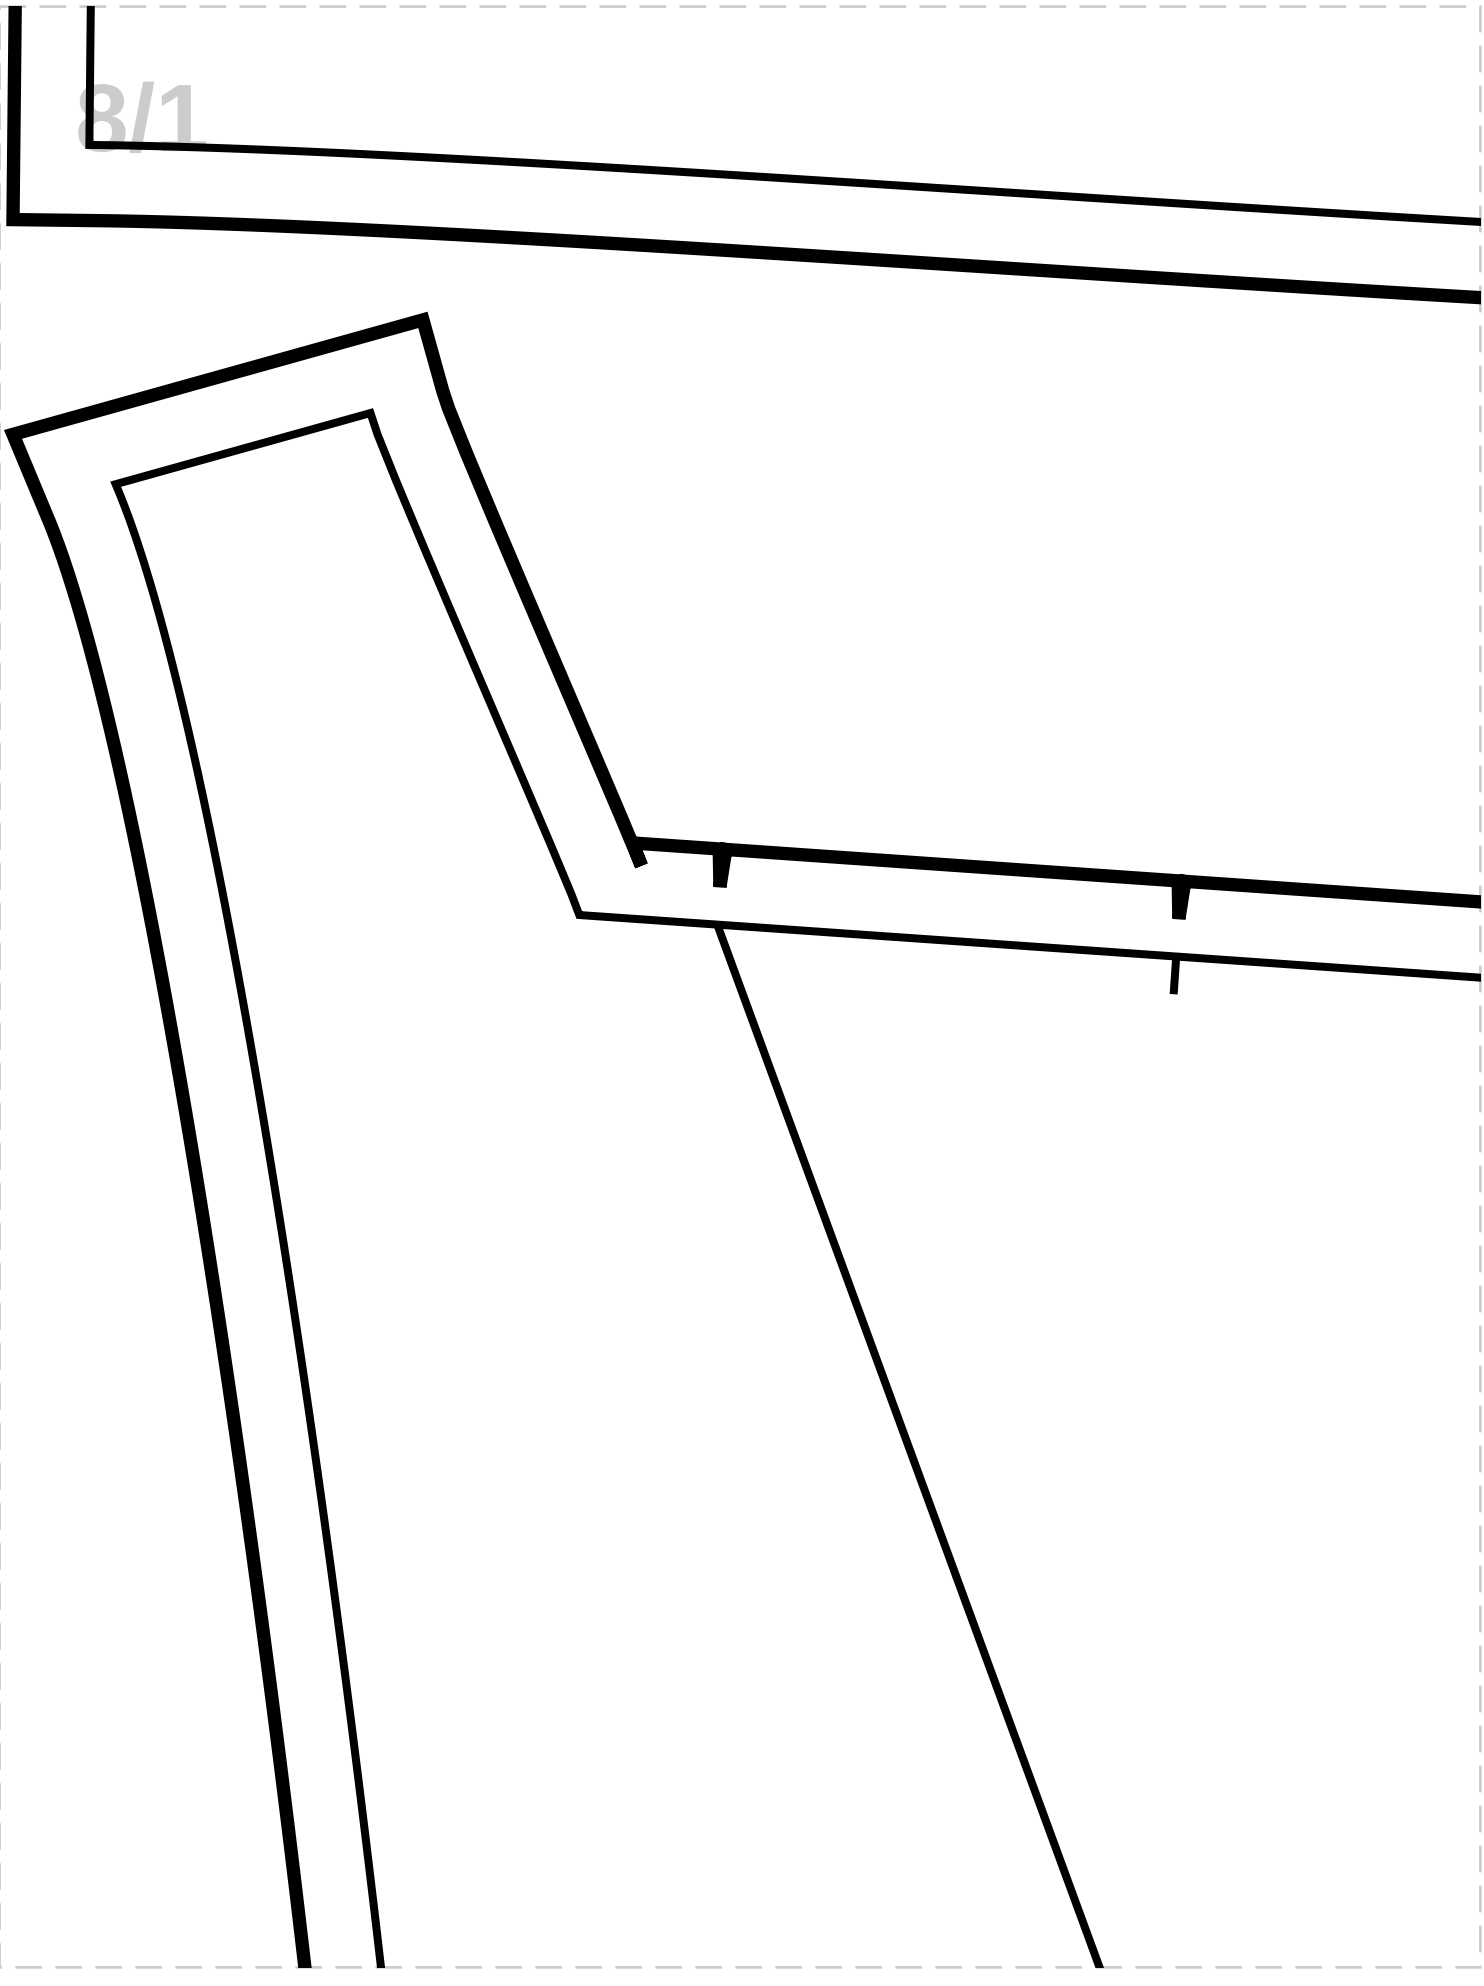

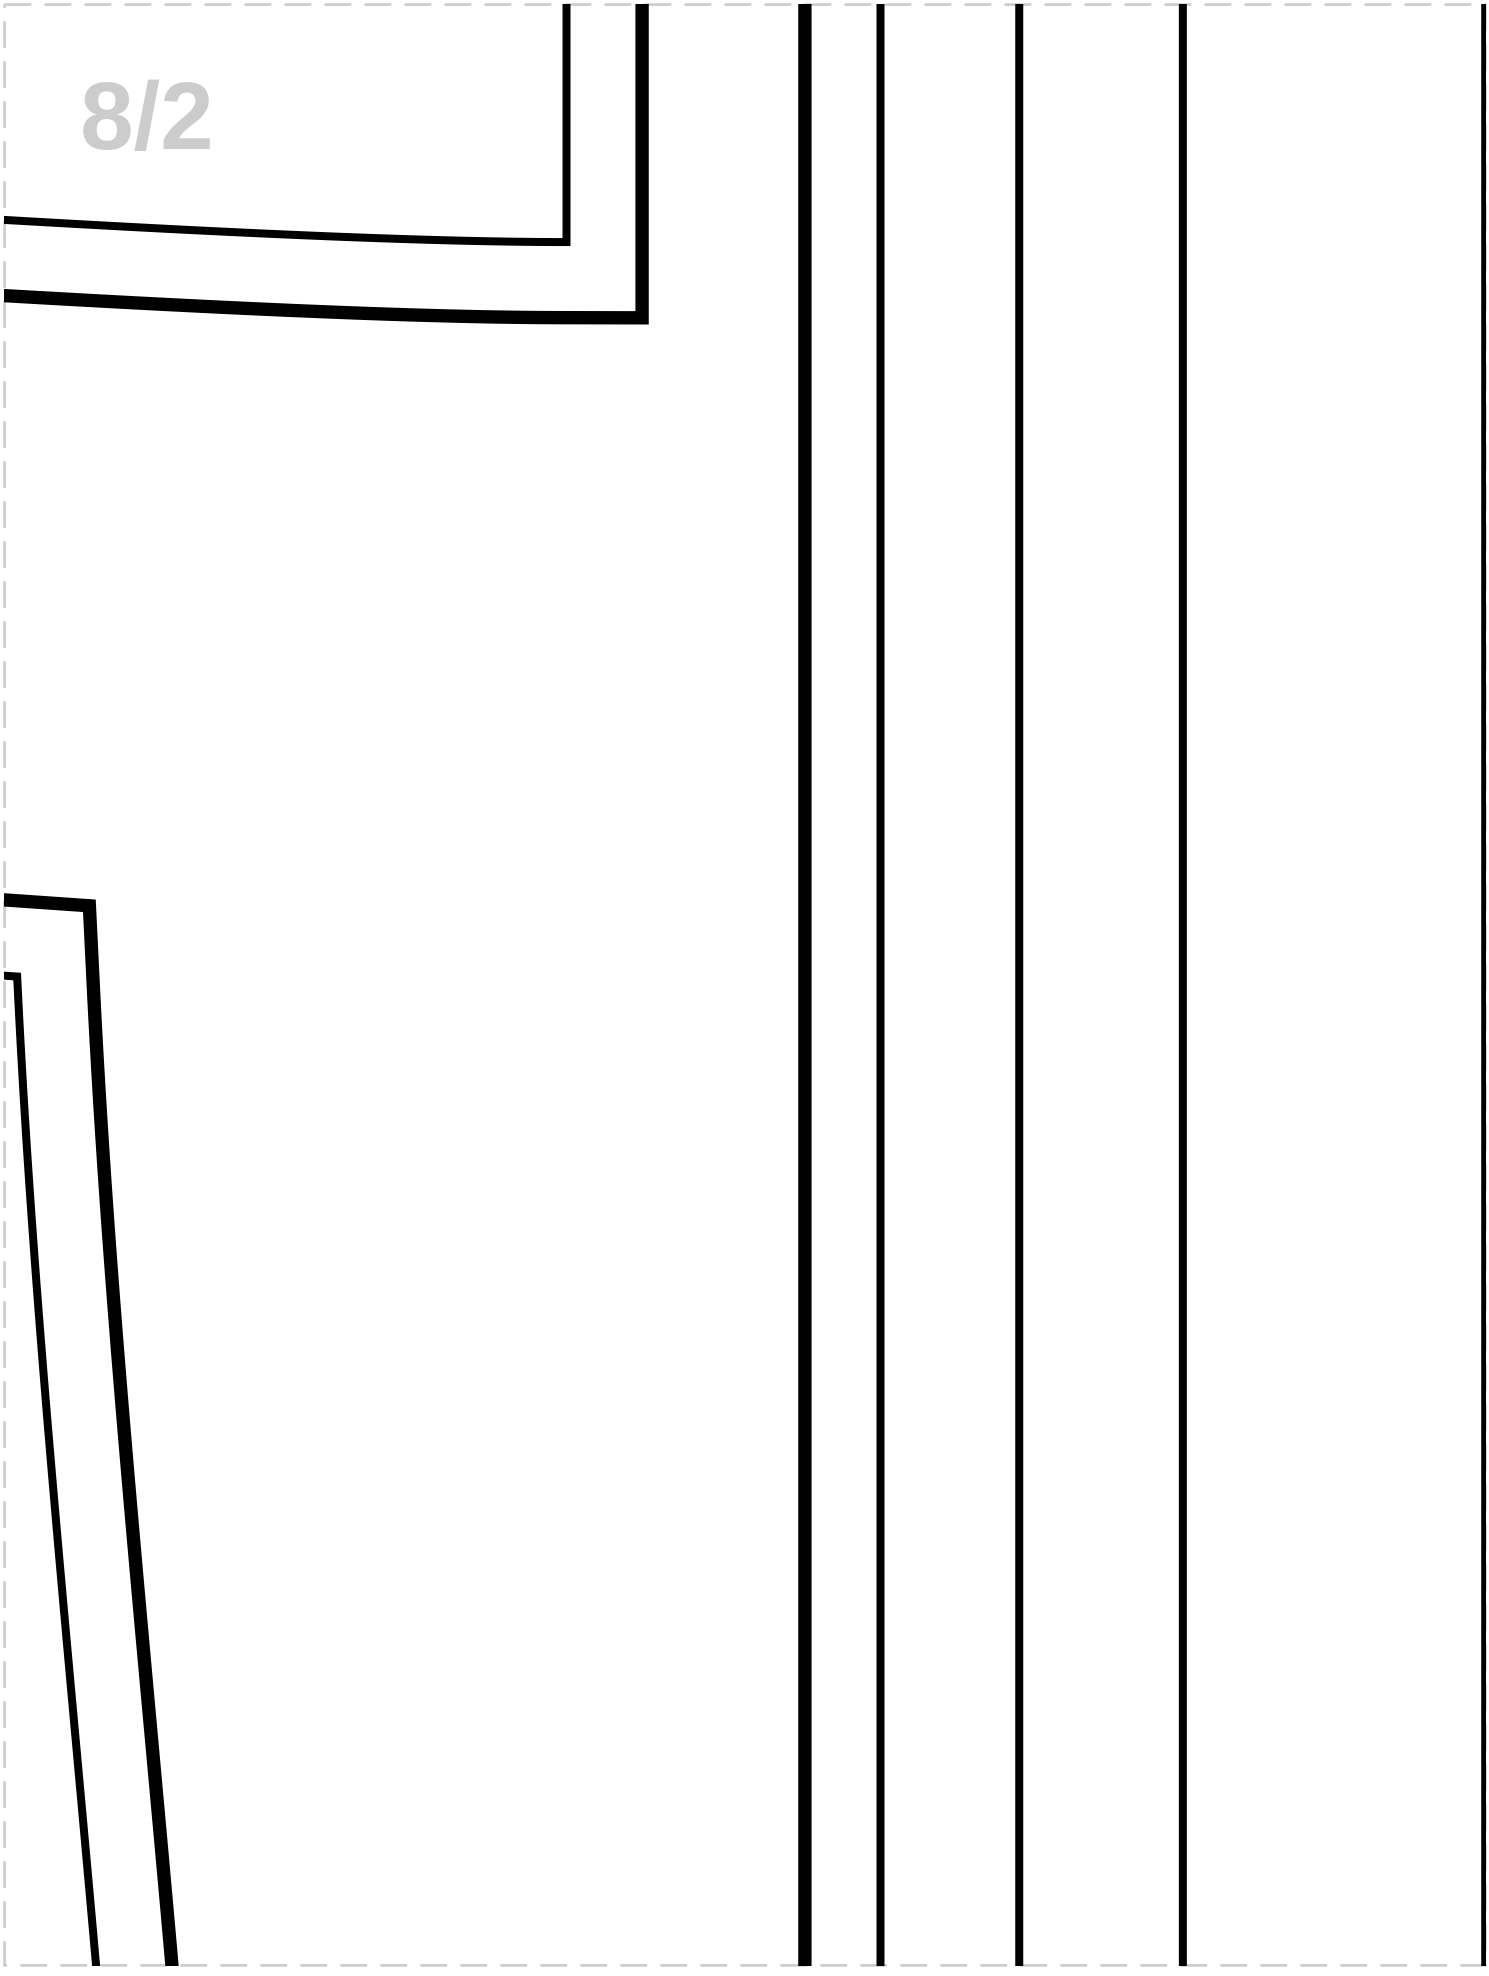

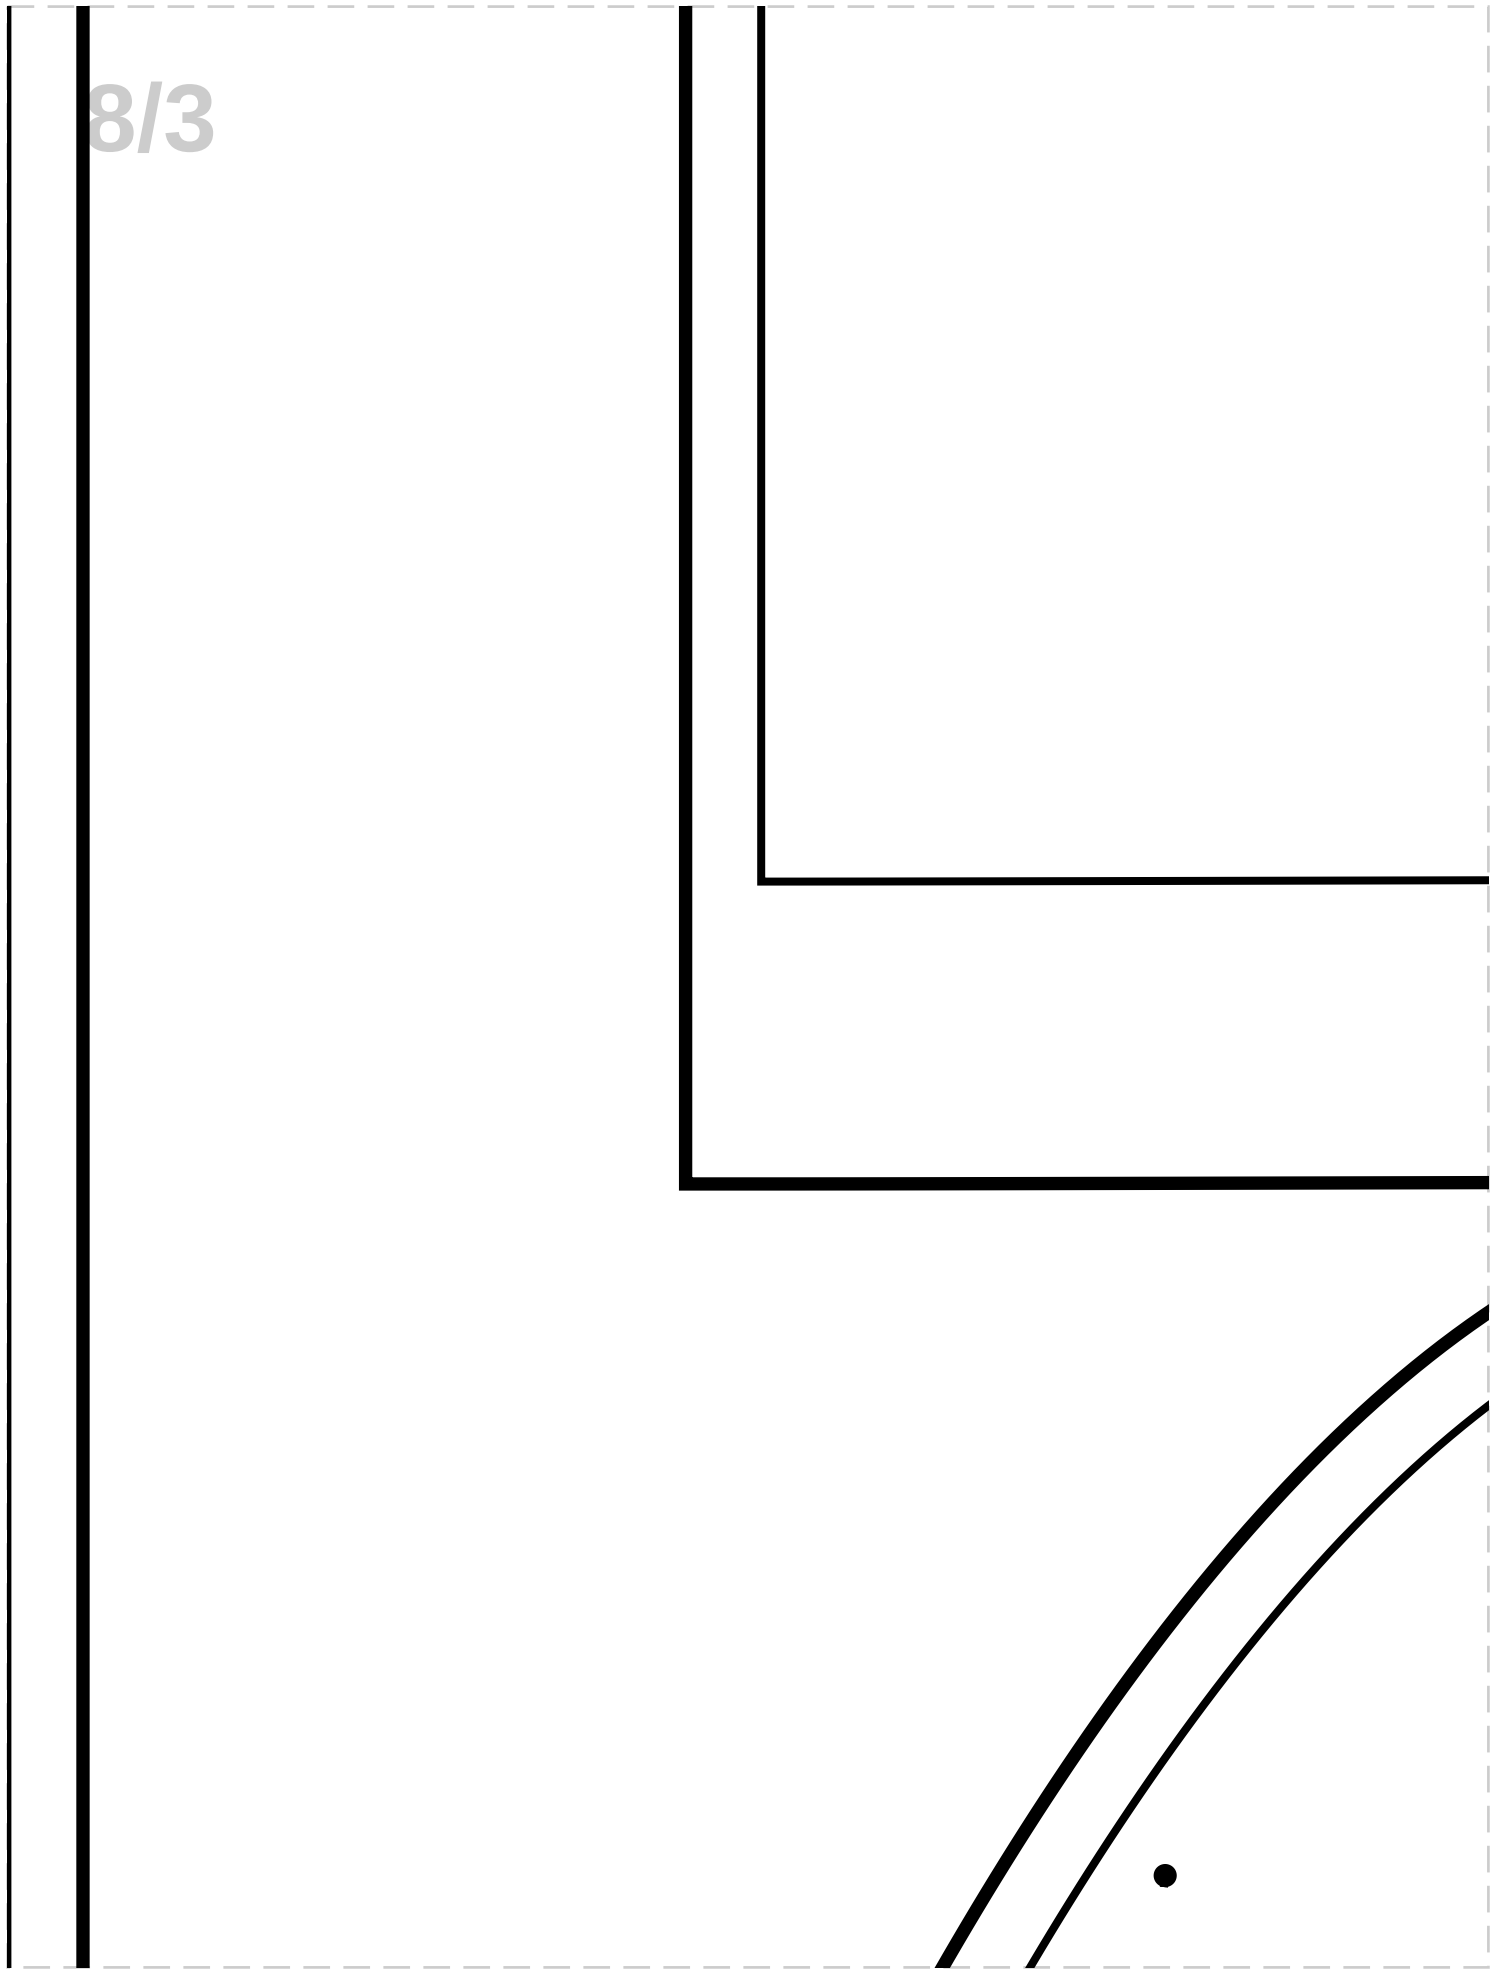

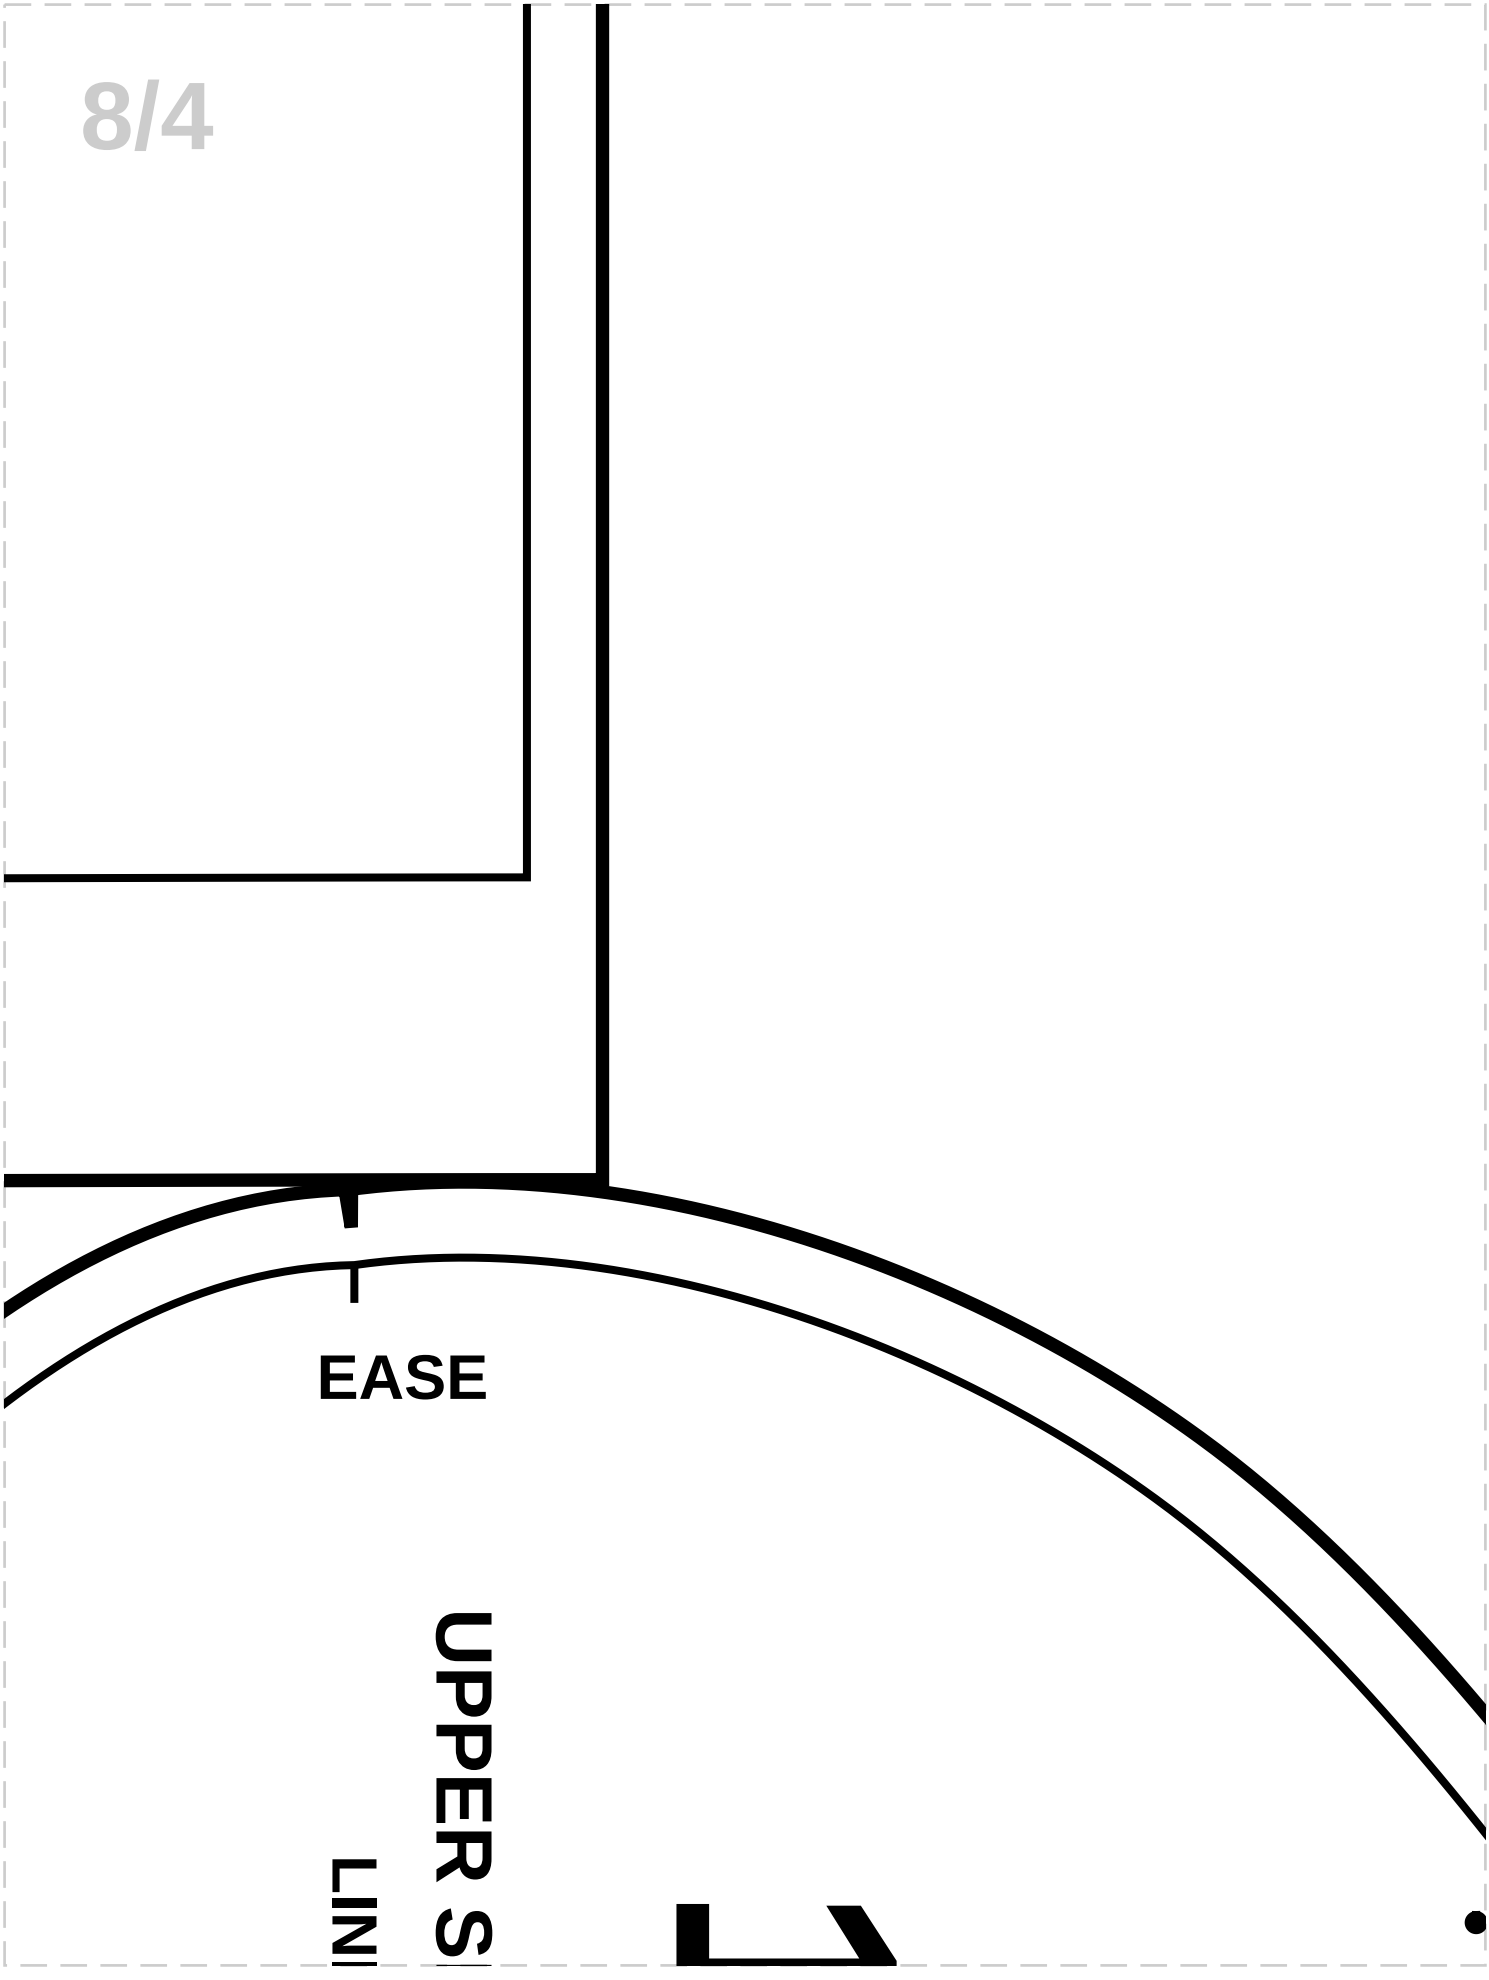
EASE
UPPER S
LIN

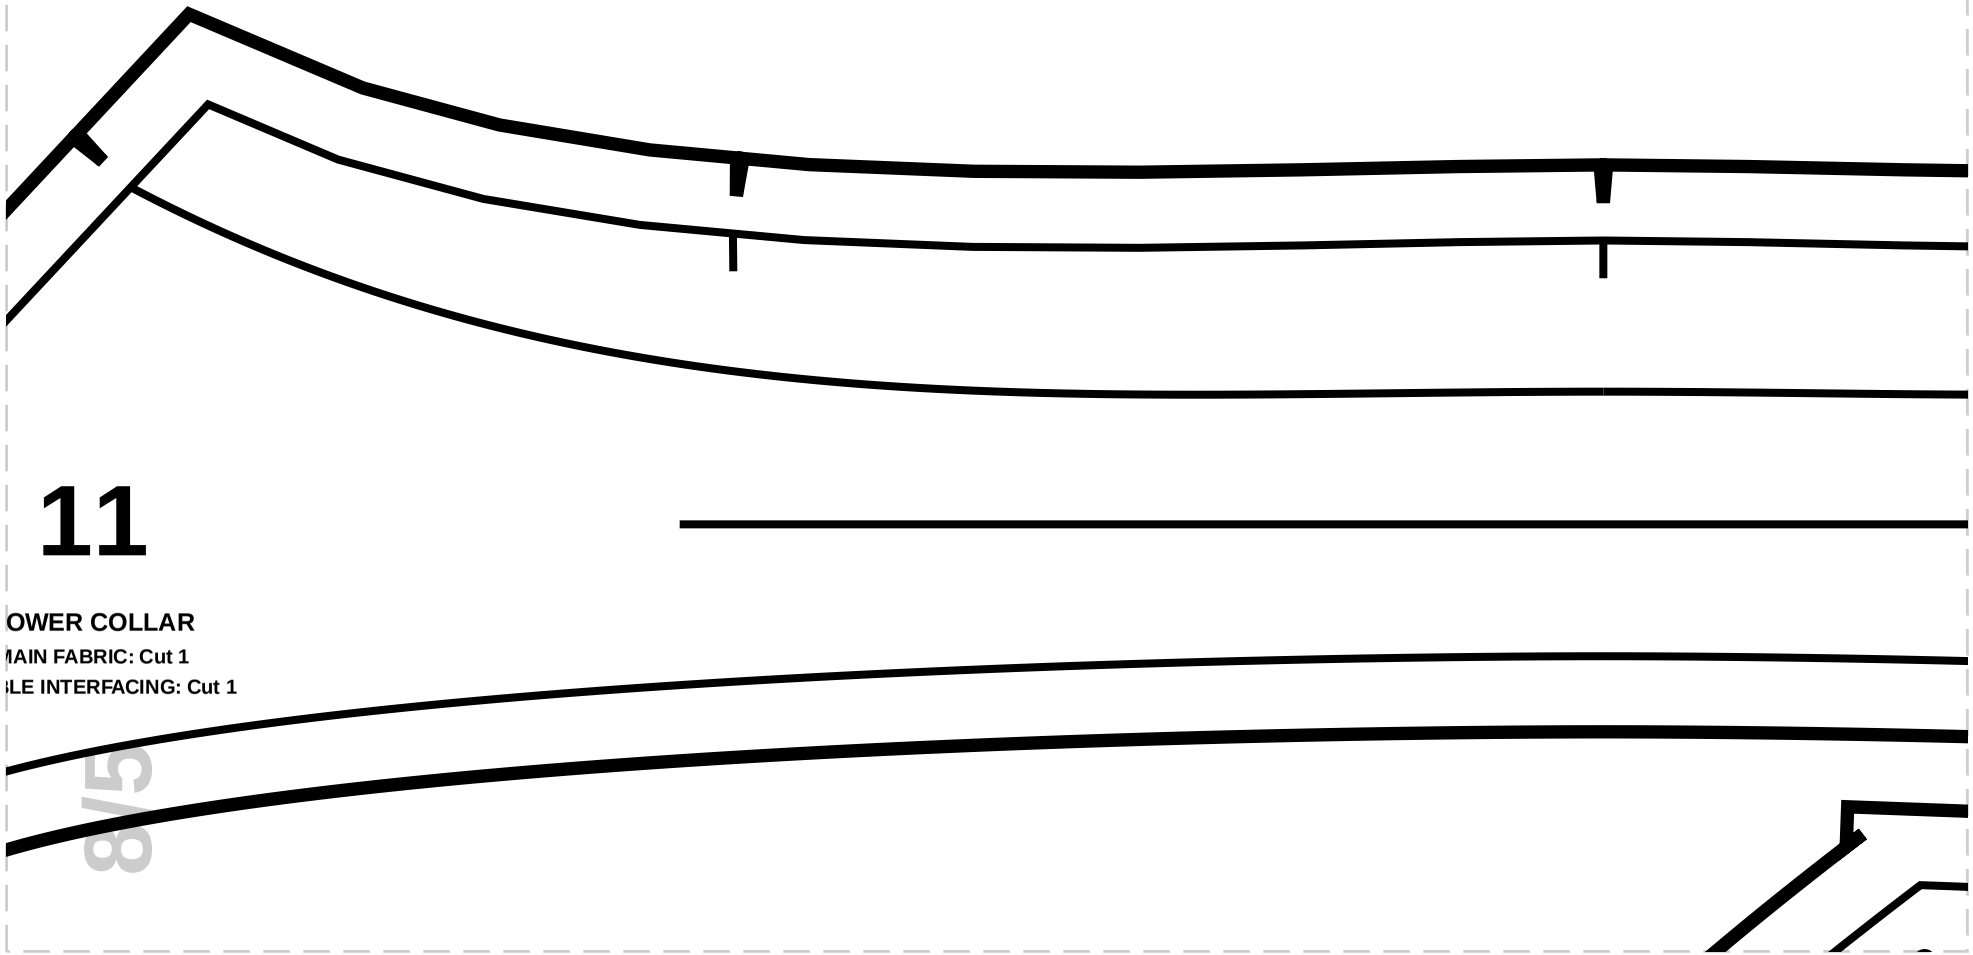


11


OWER COLLAR


AIN FABRIC: Cut 1

LE INTERFACING: Cut 1

8/5

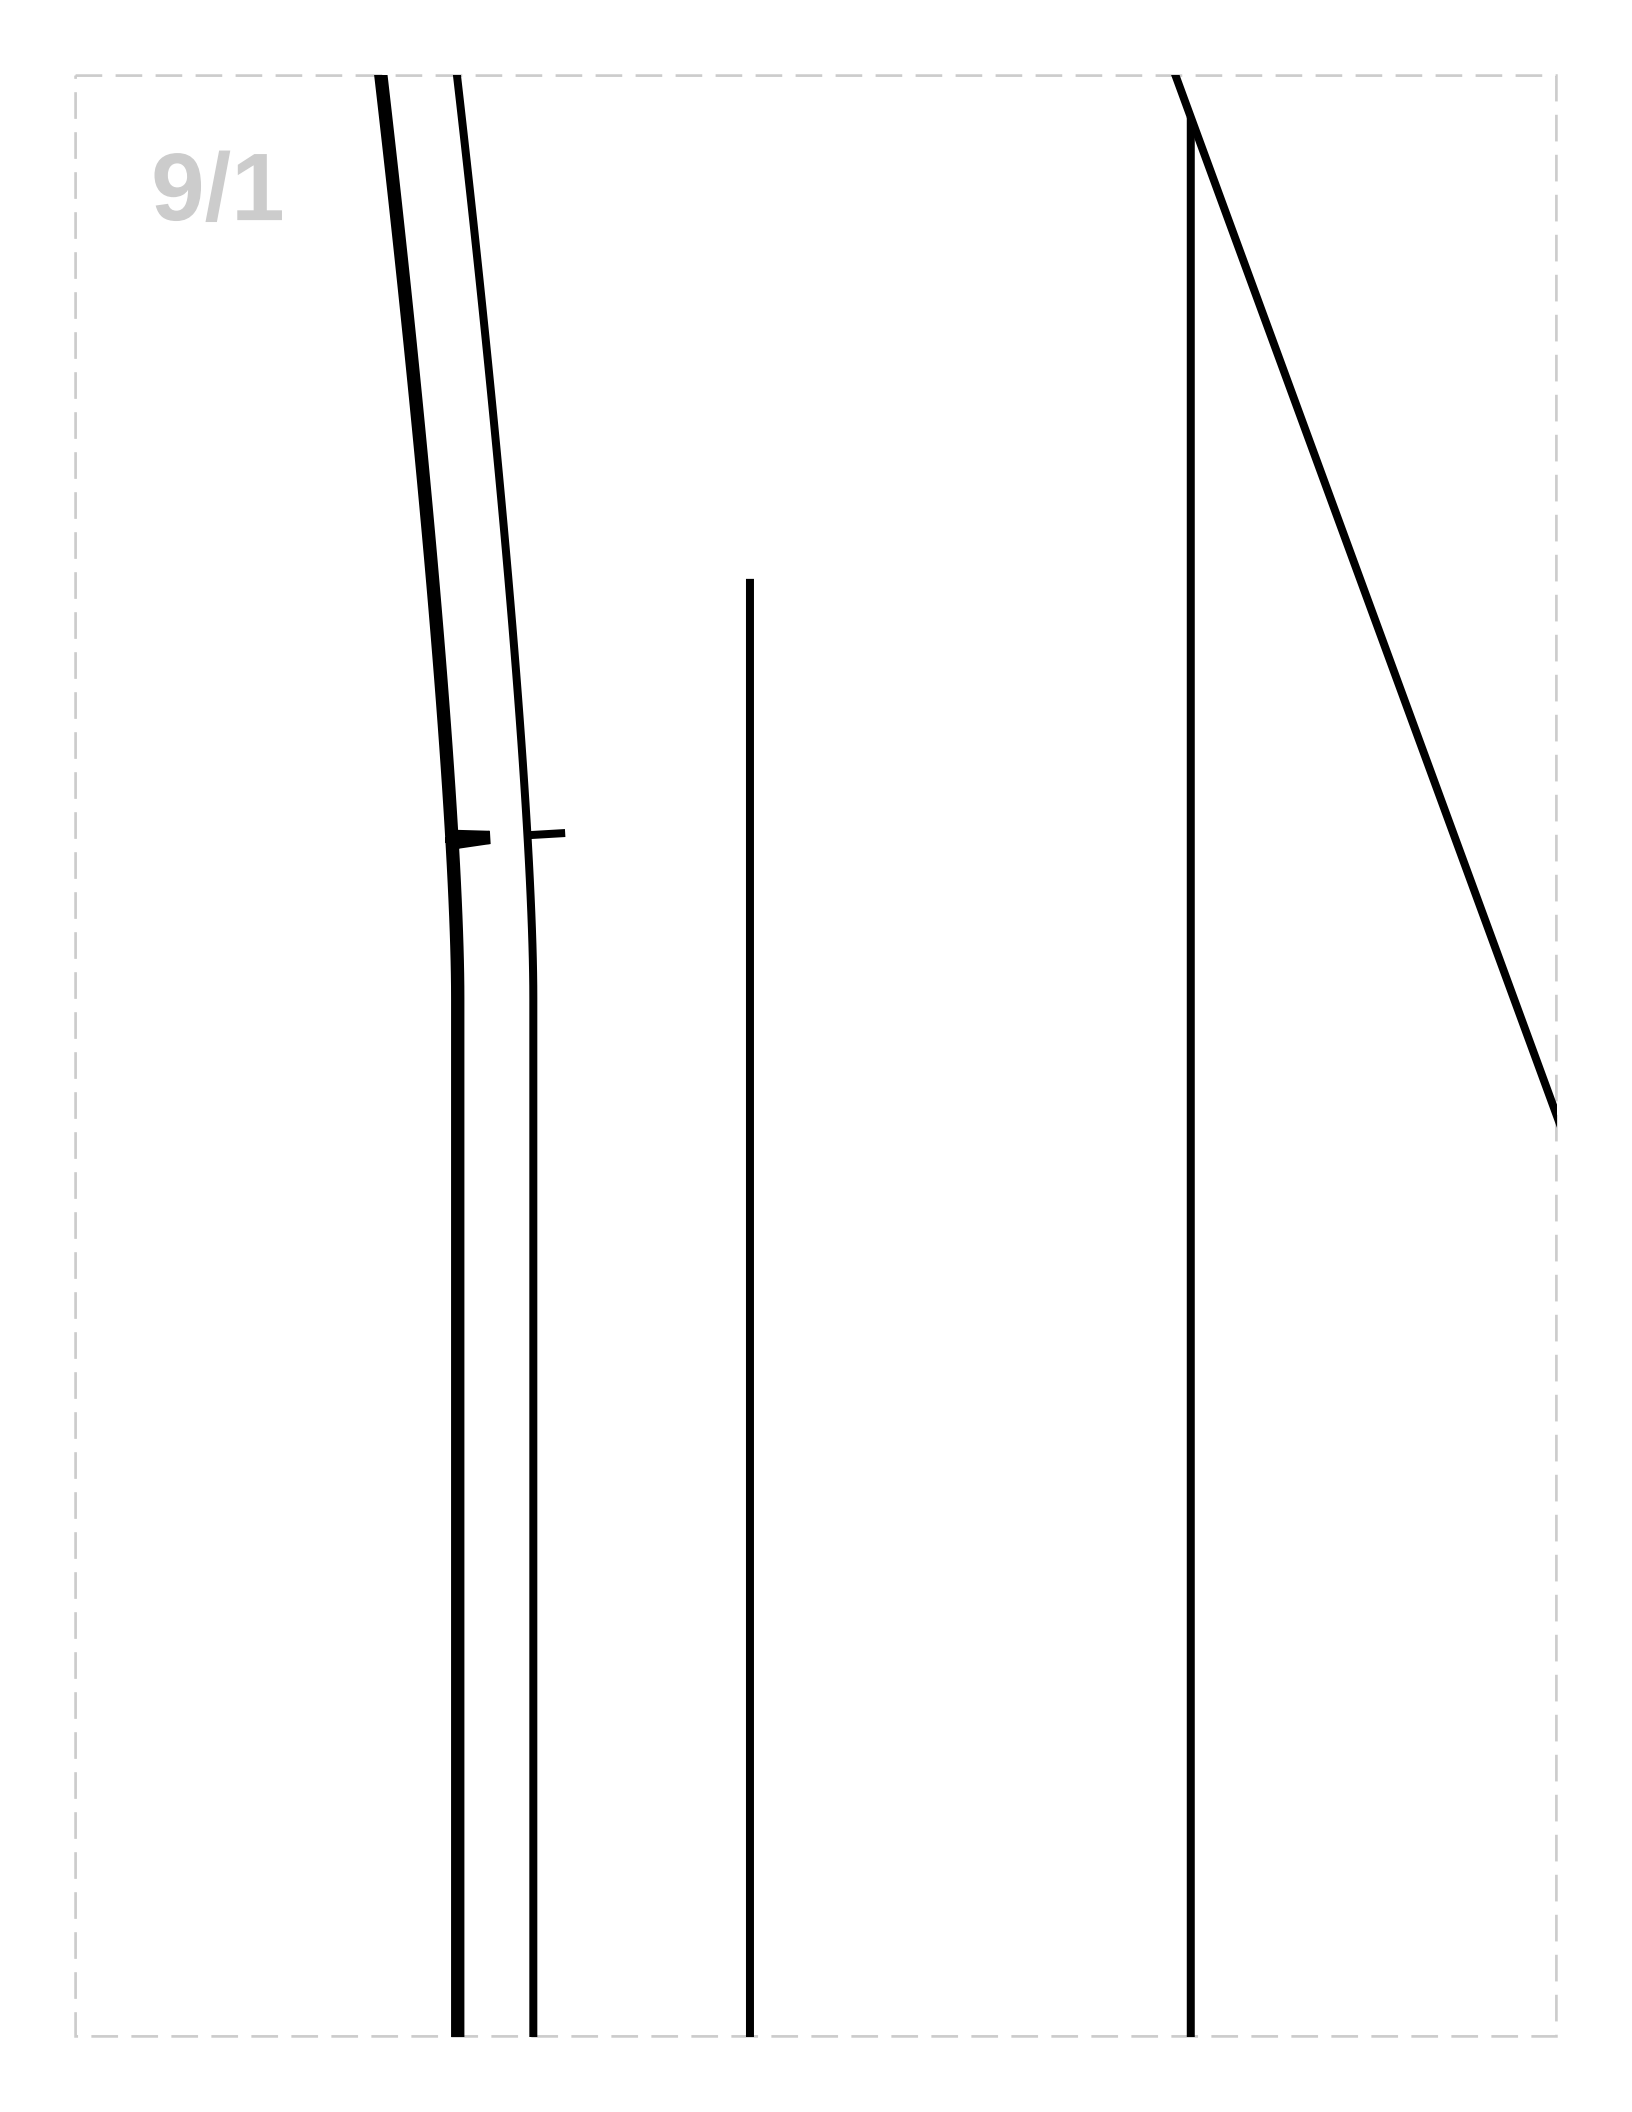

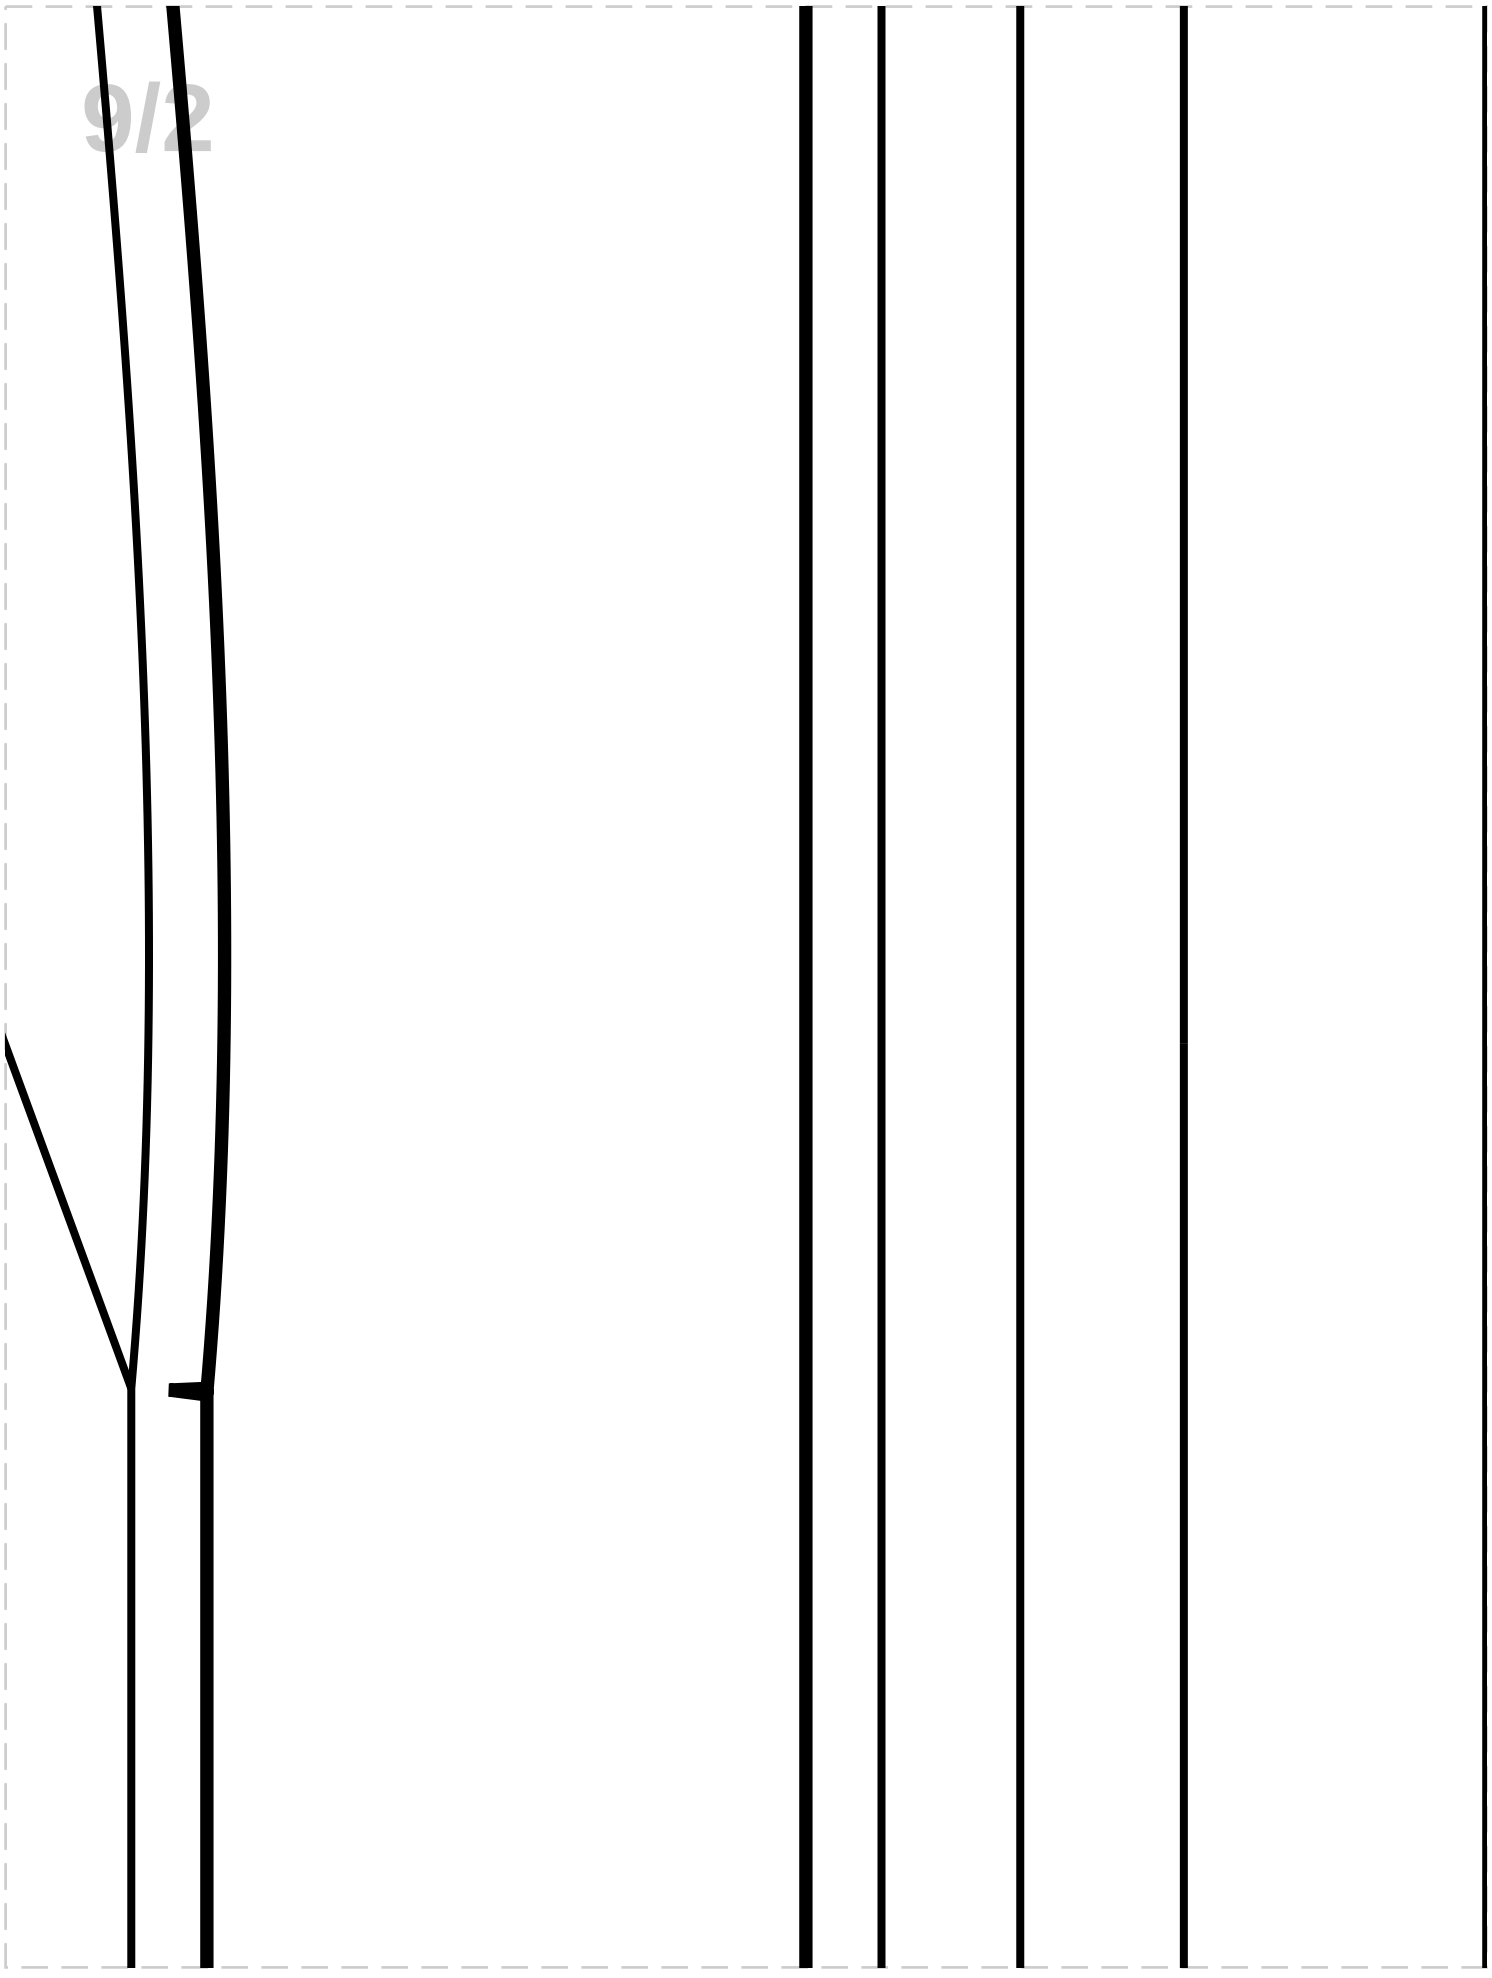


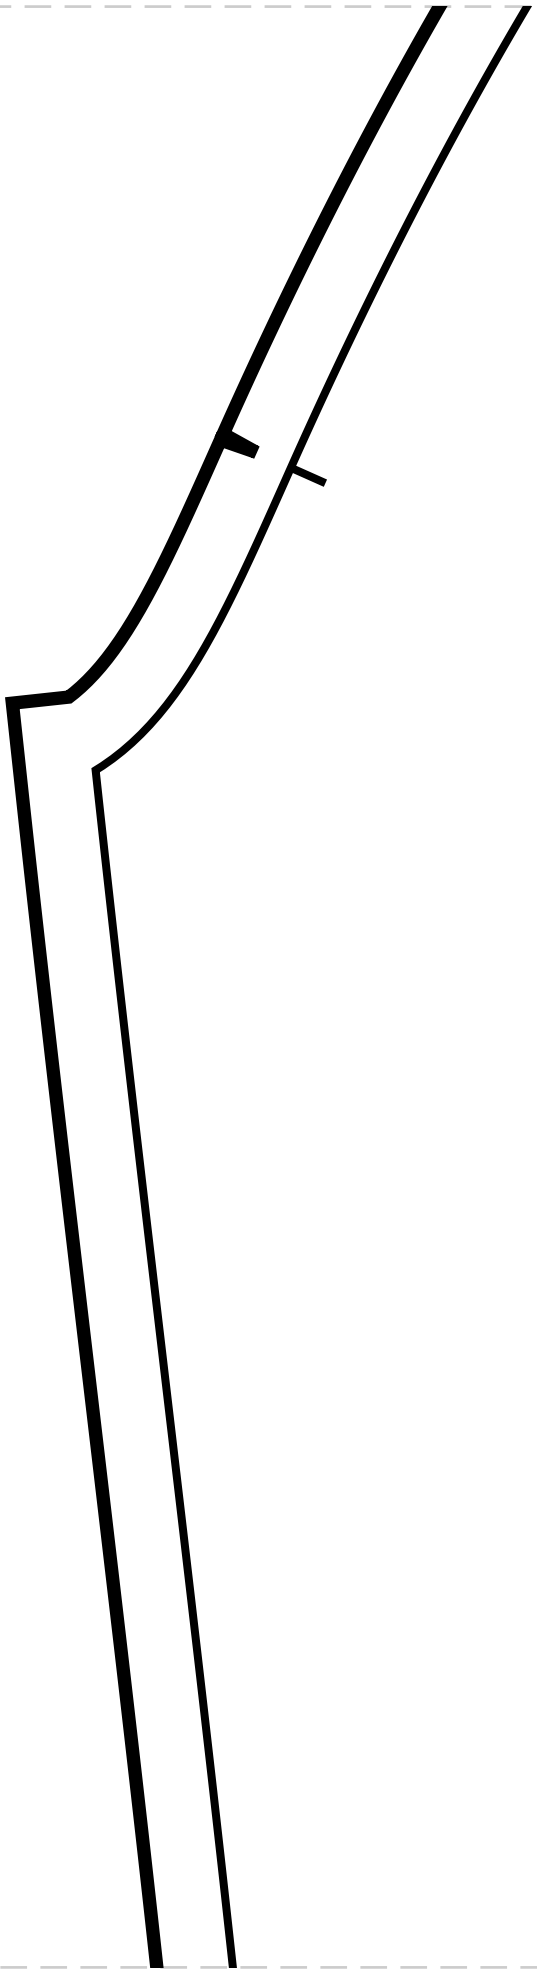



L7


LEEVE LINING


ING: Cut 2

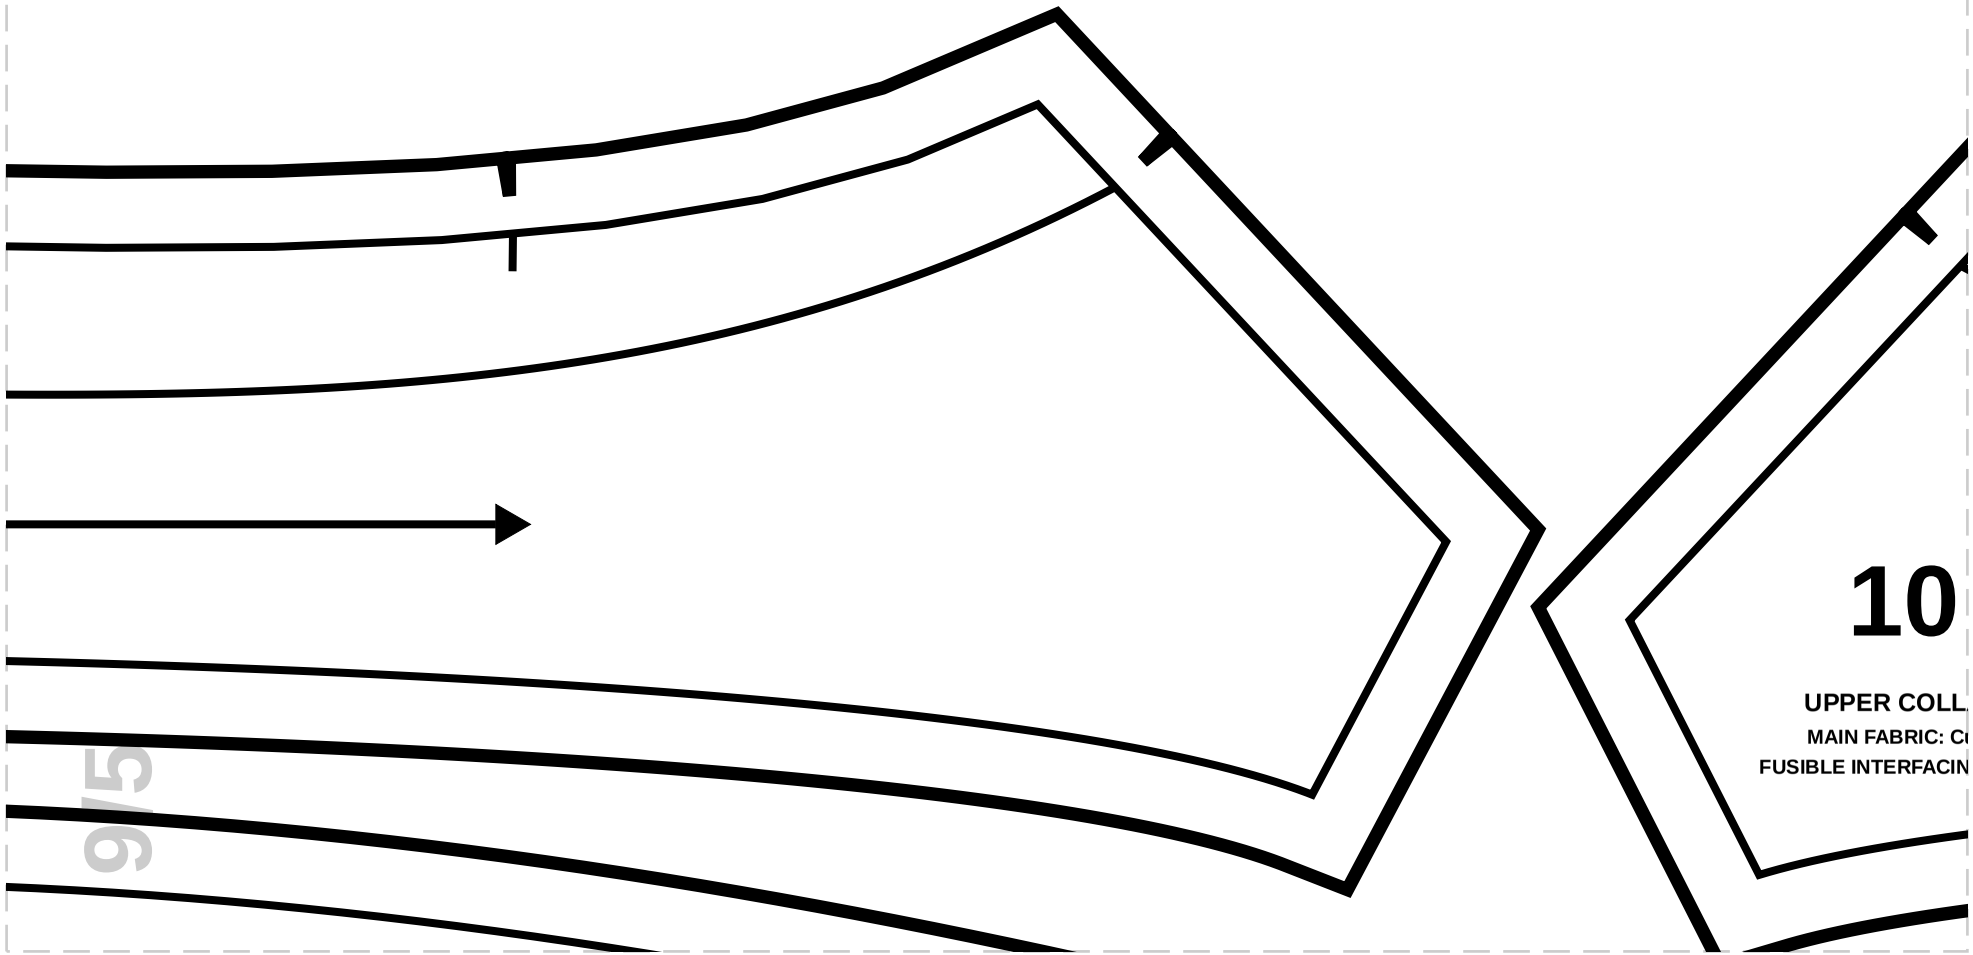
10
UPPER COLL
MAIN FABRIC: C
FUSIBLE INTERFACIN

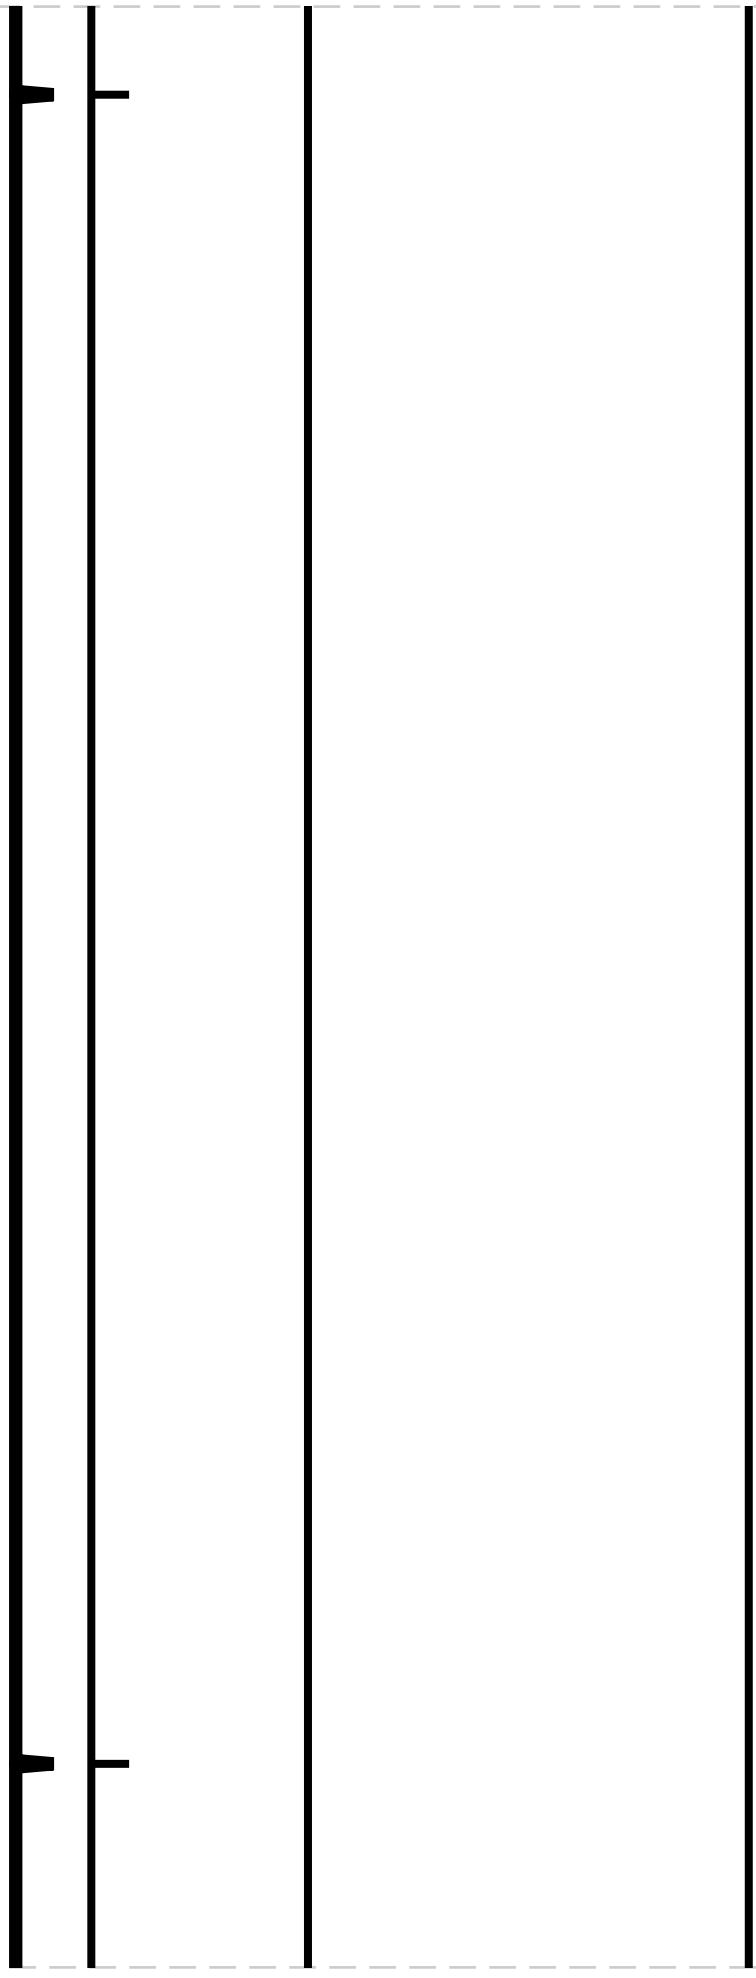

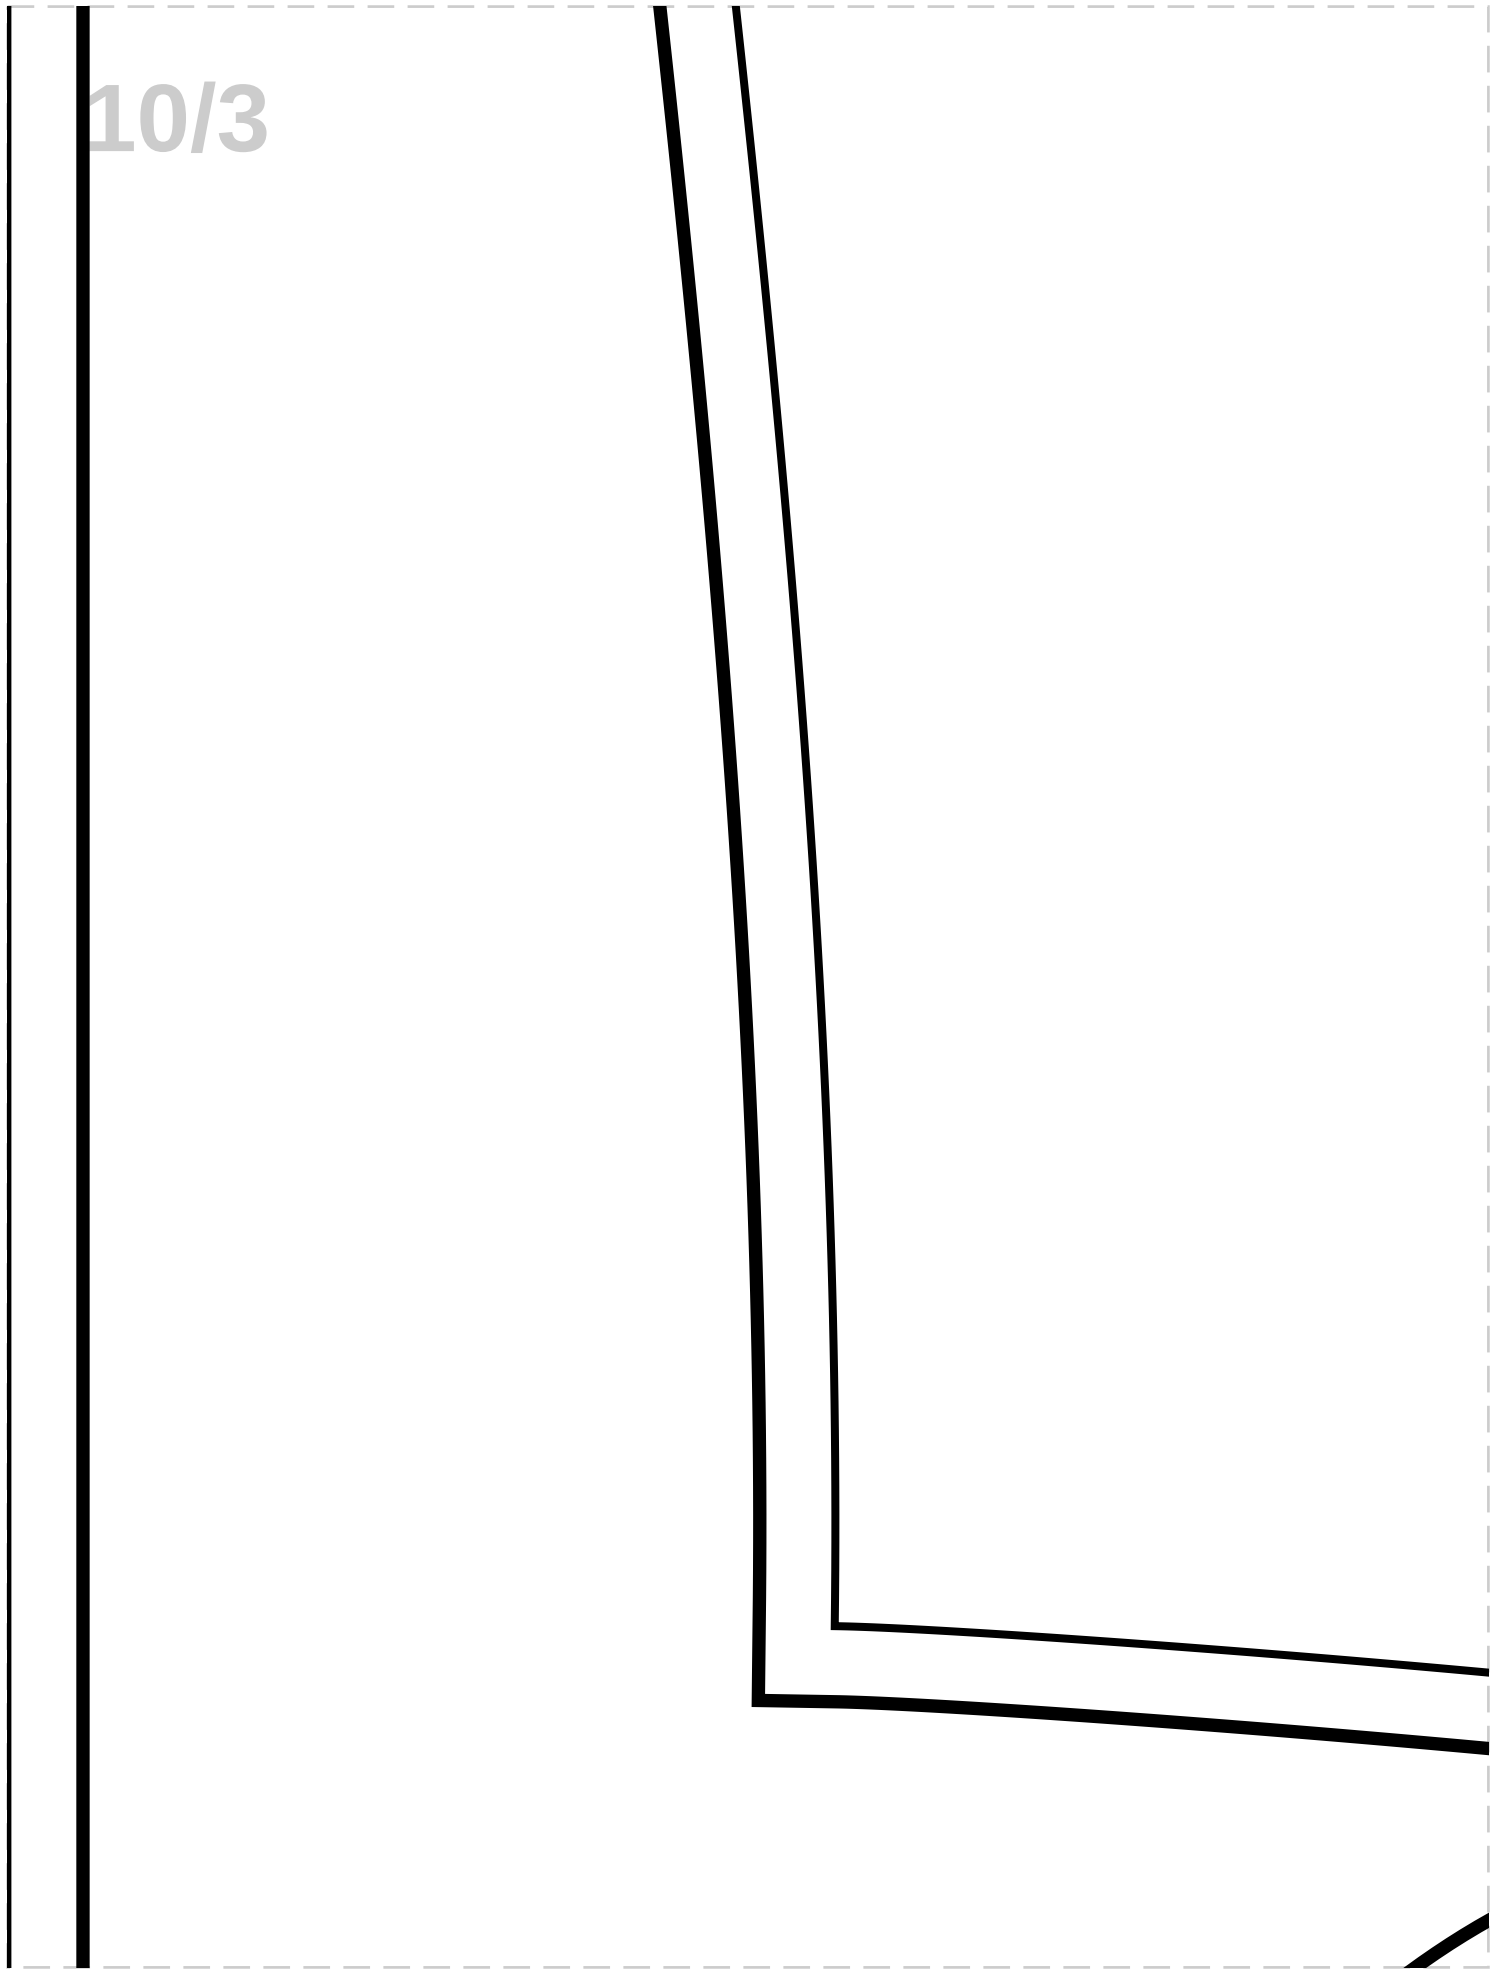


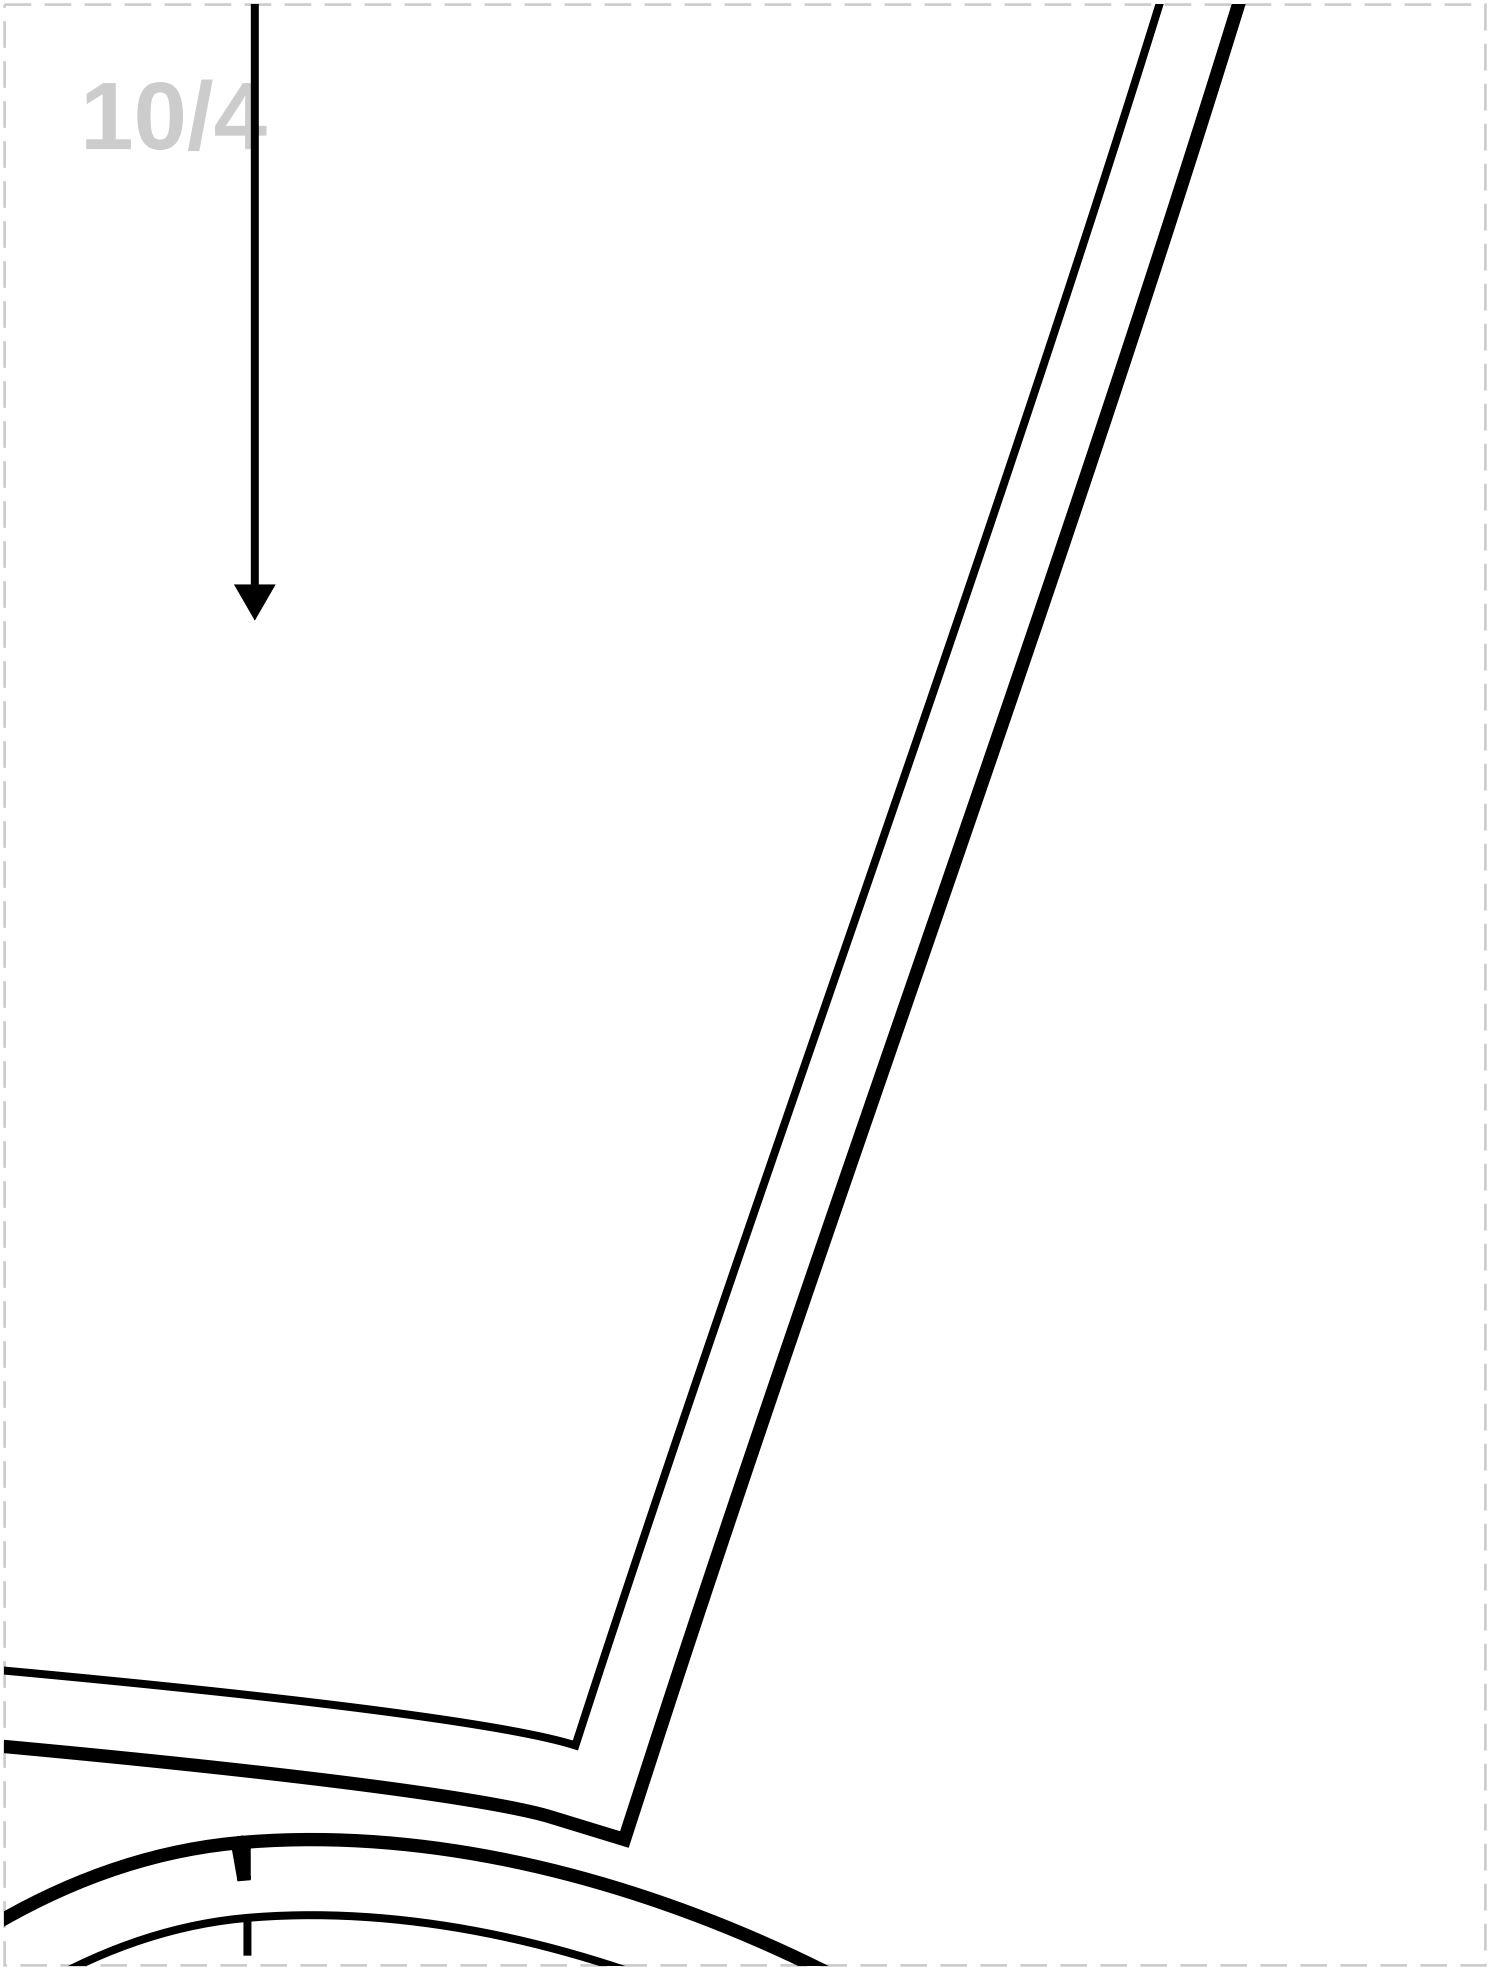


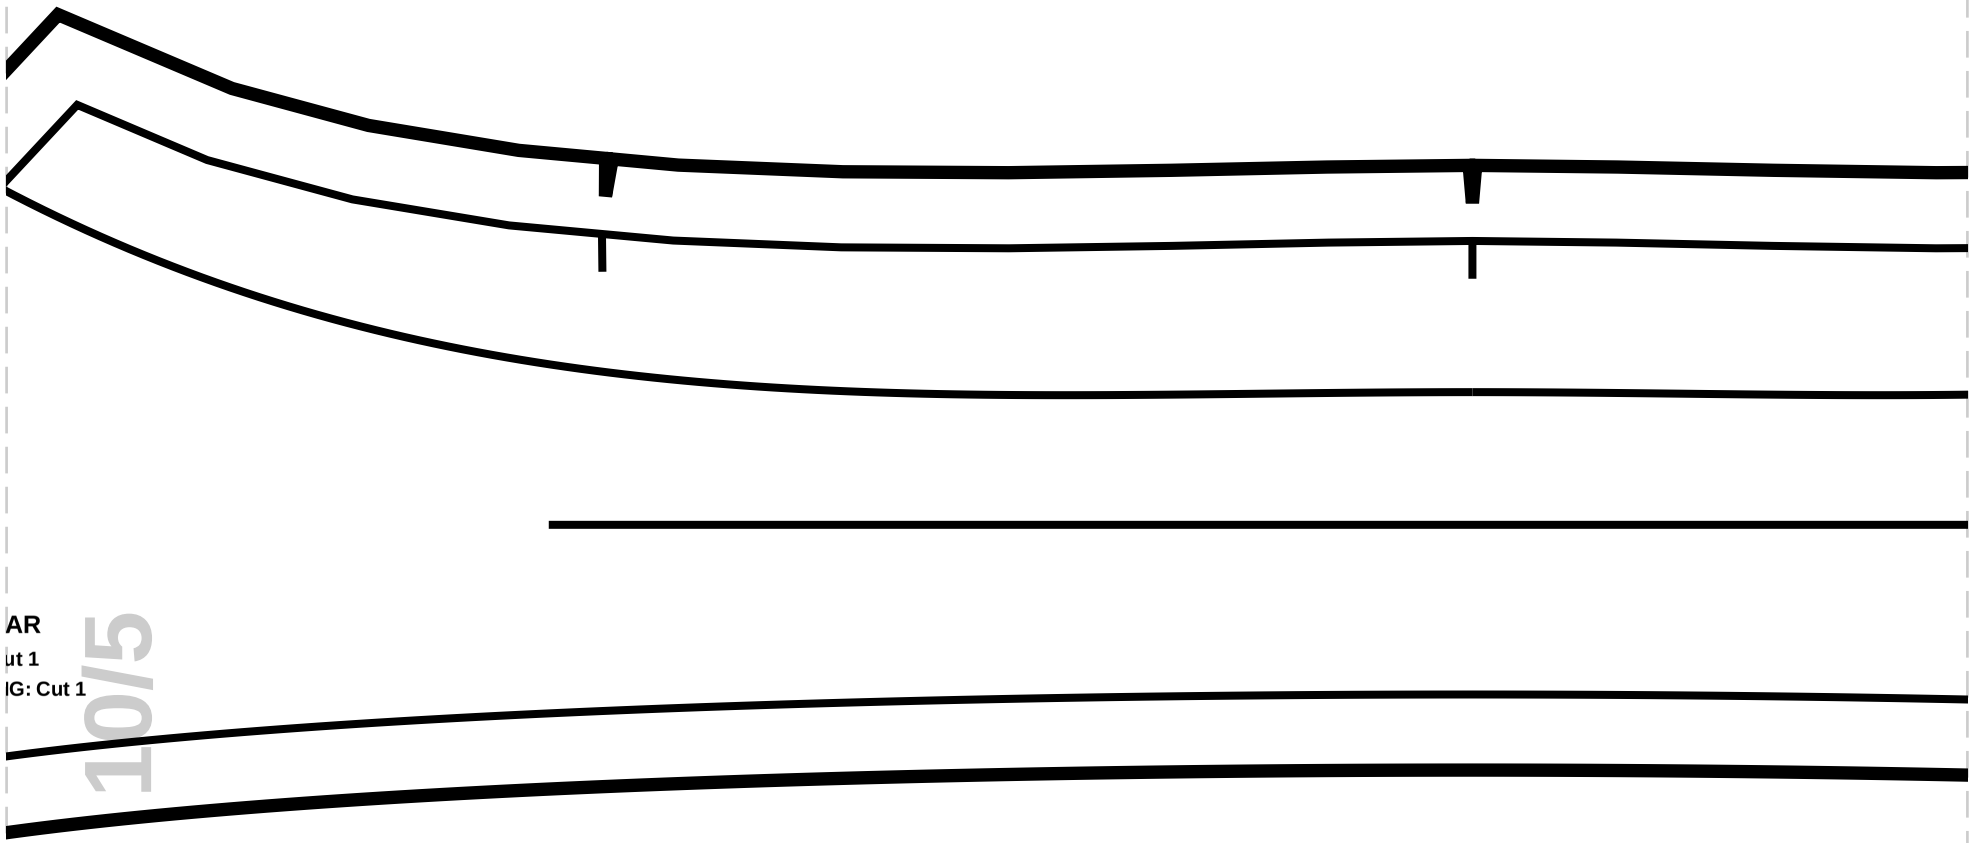


AR
ut 1
IG: Cut 1

10/5

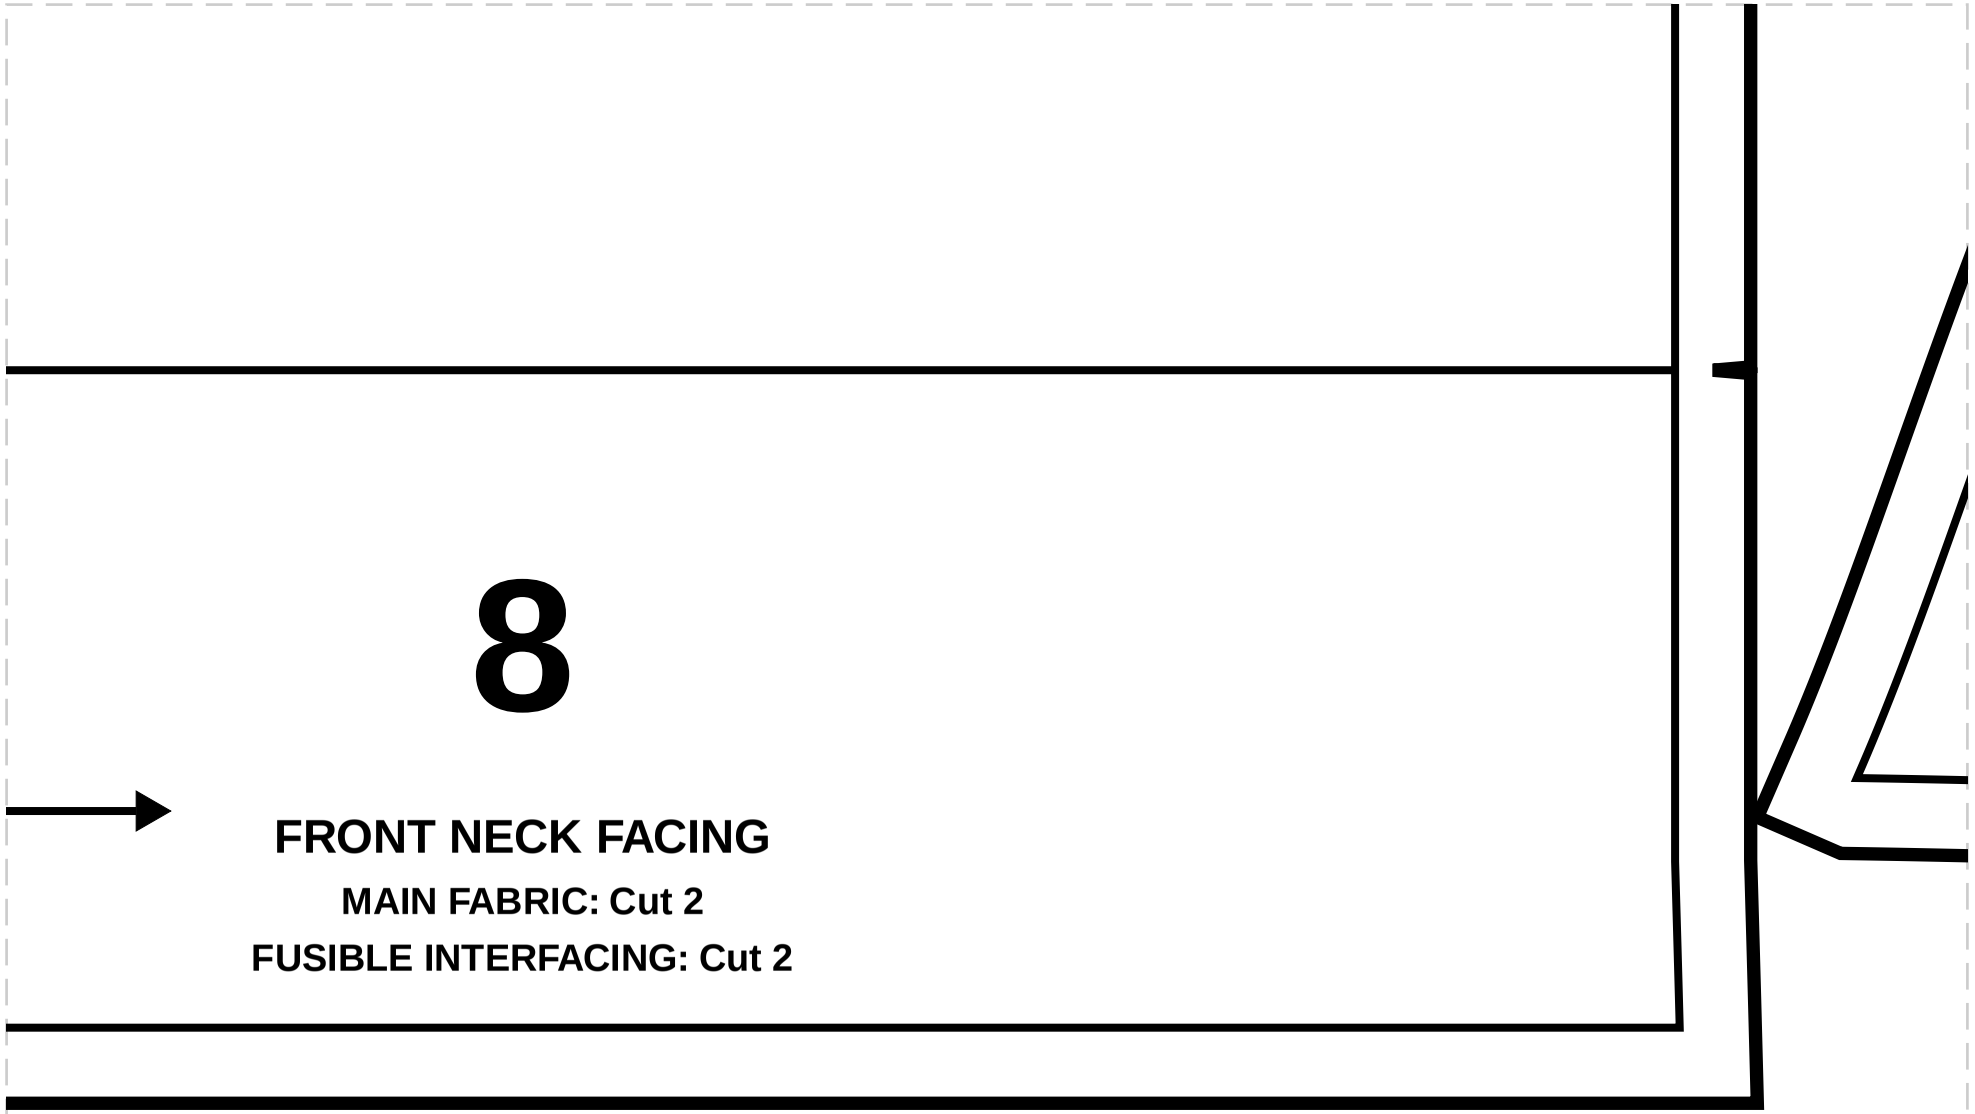

8
FRONT NECK FACING
MAIN FABRIC: Cut 2
FUSIBLE INTERFACING: Cut 2

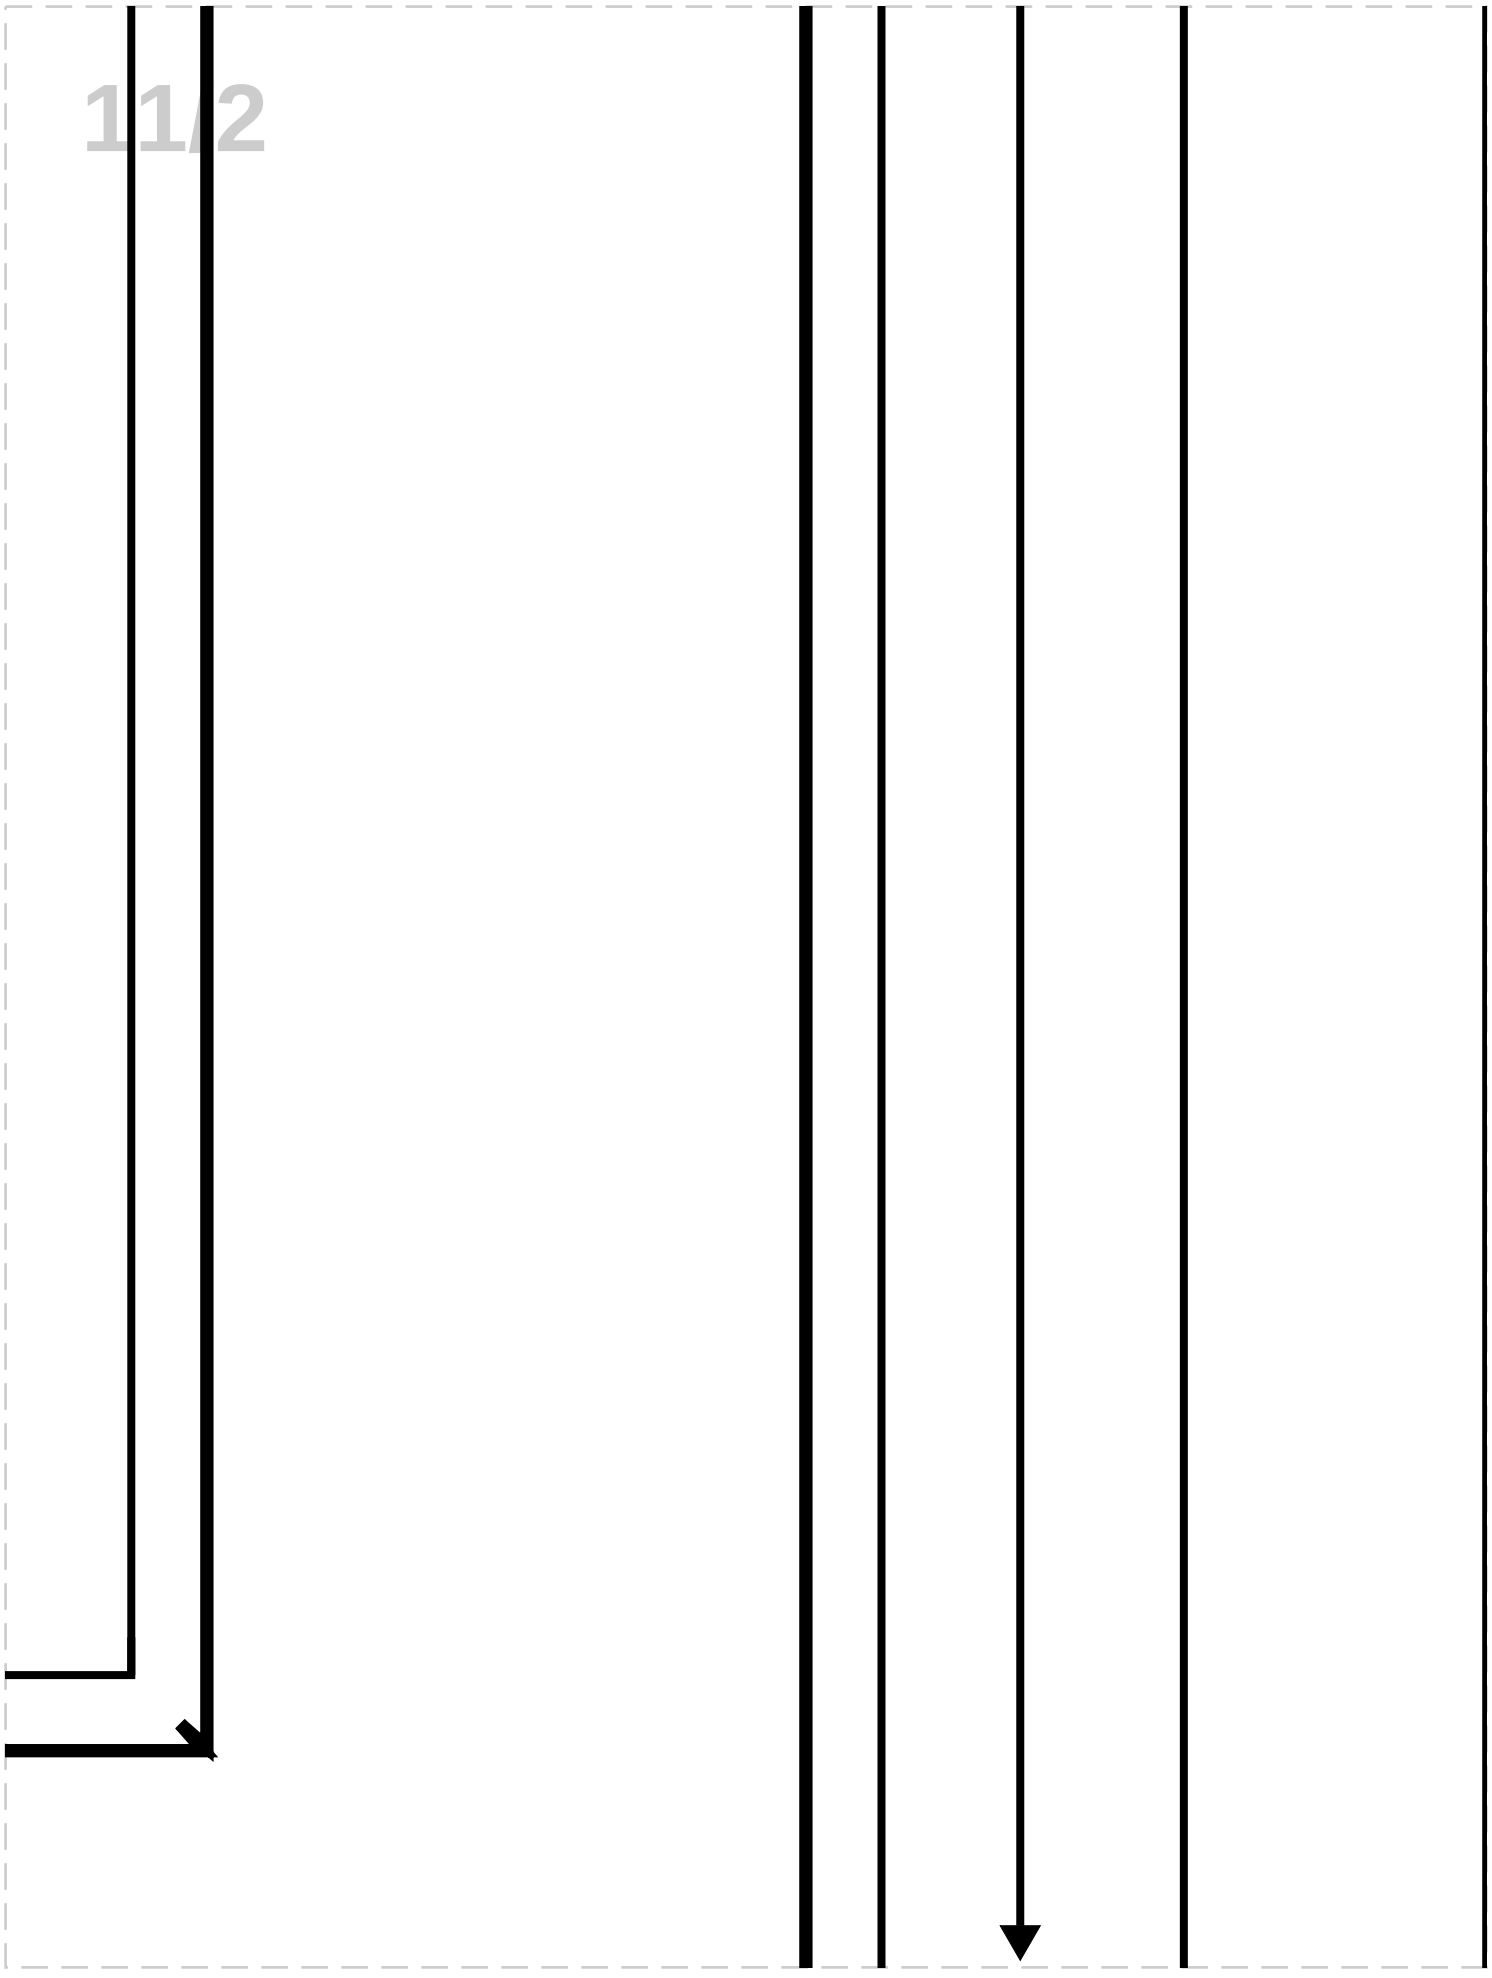



MAIN FABRIC: Cut 2

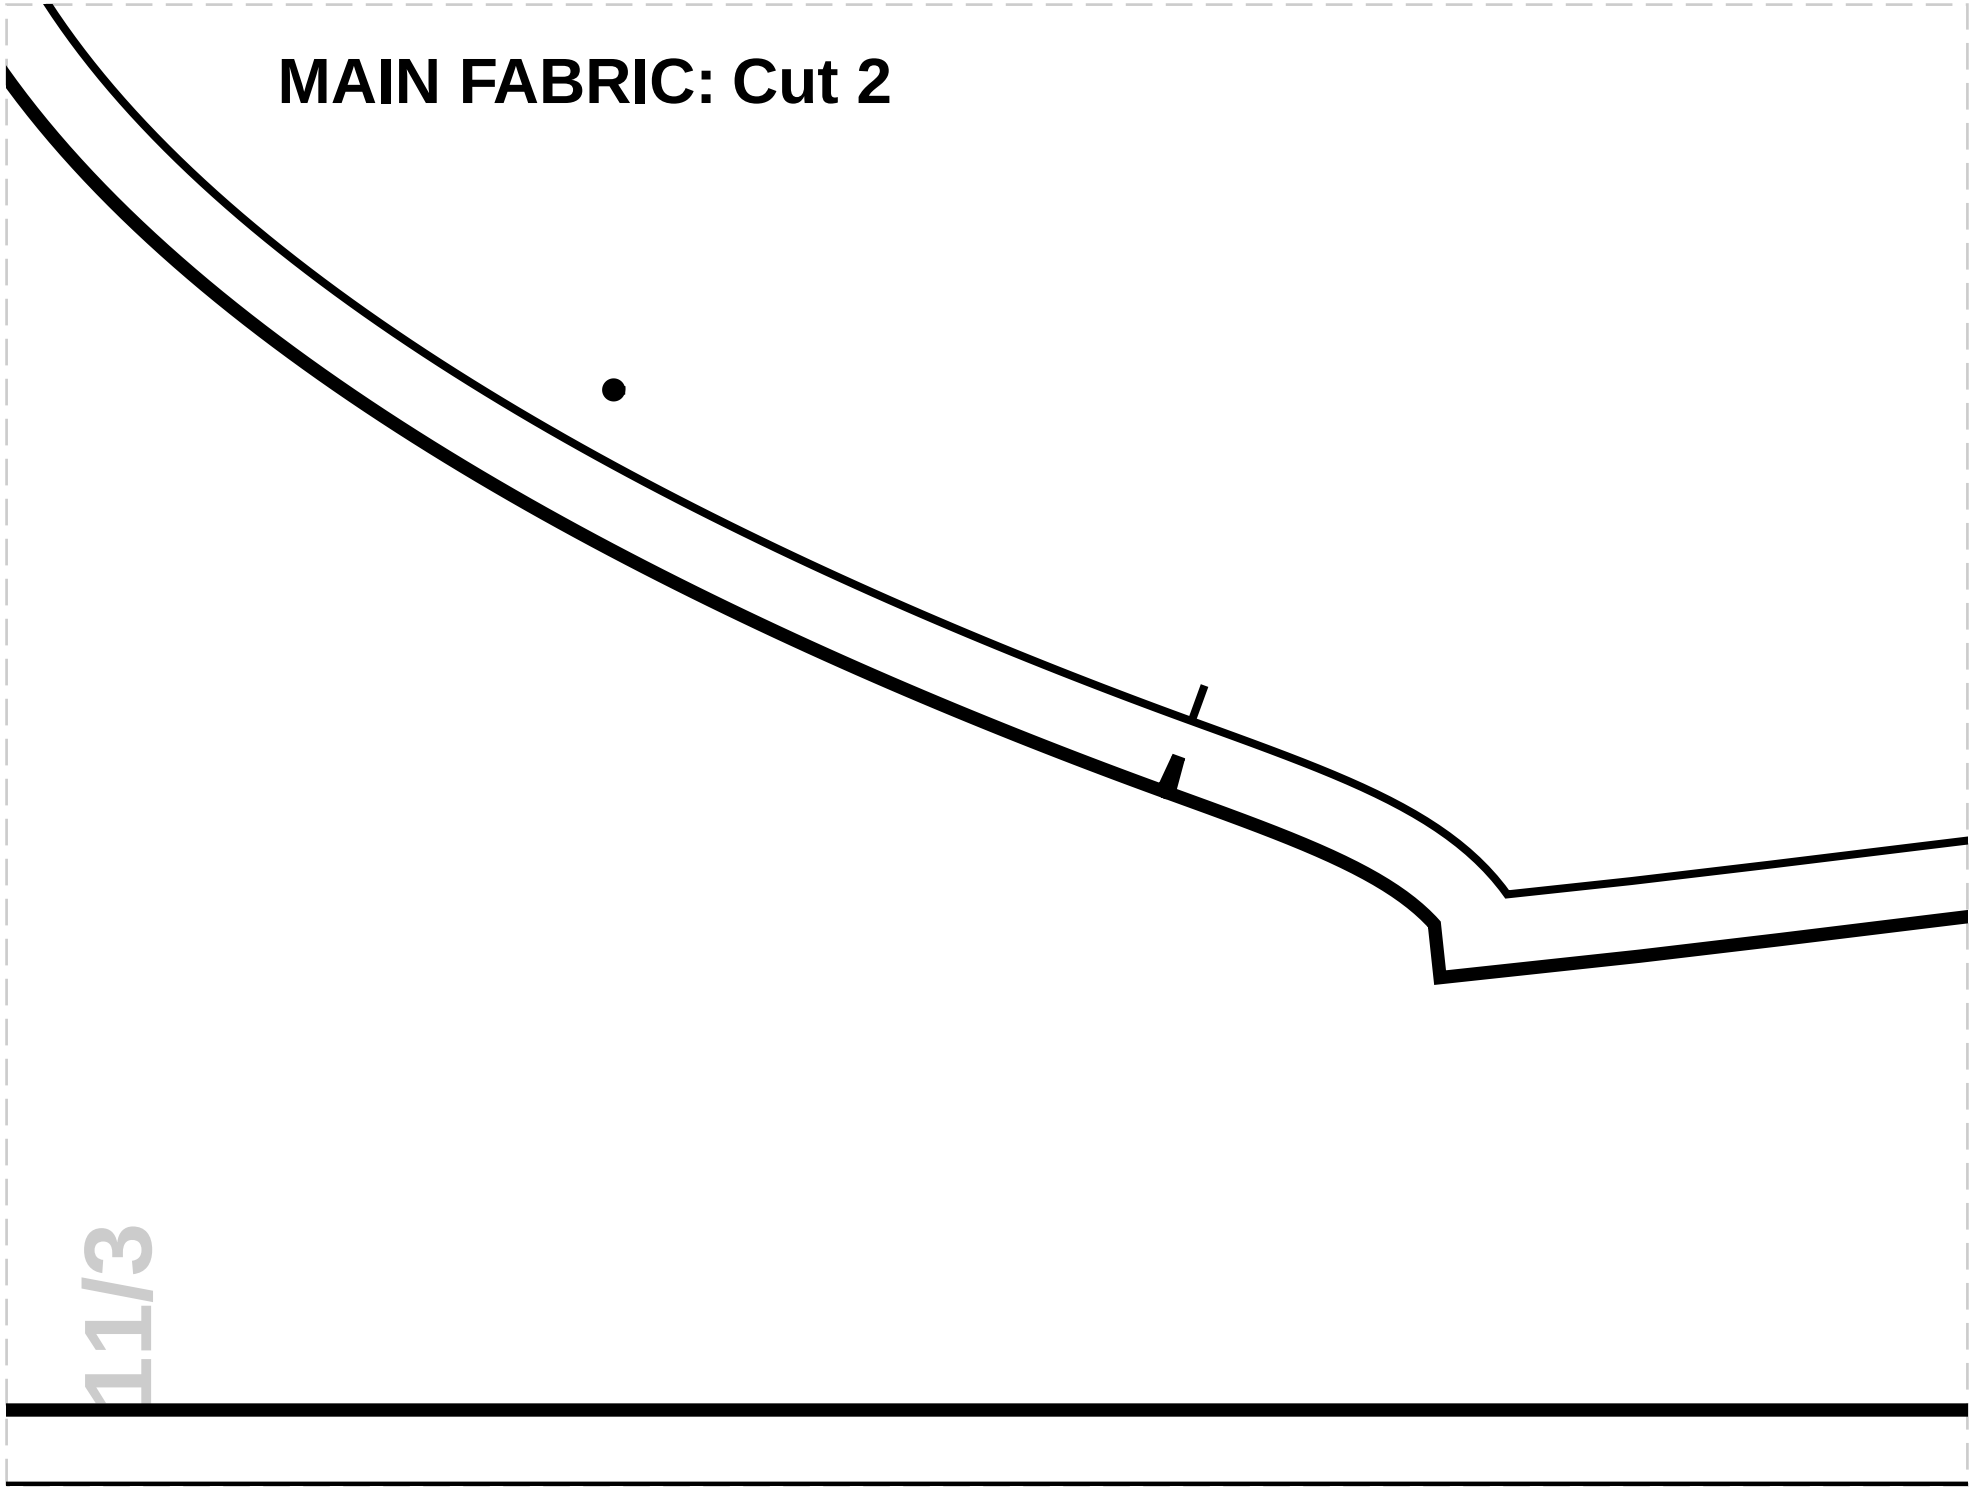


11/3

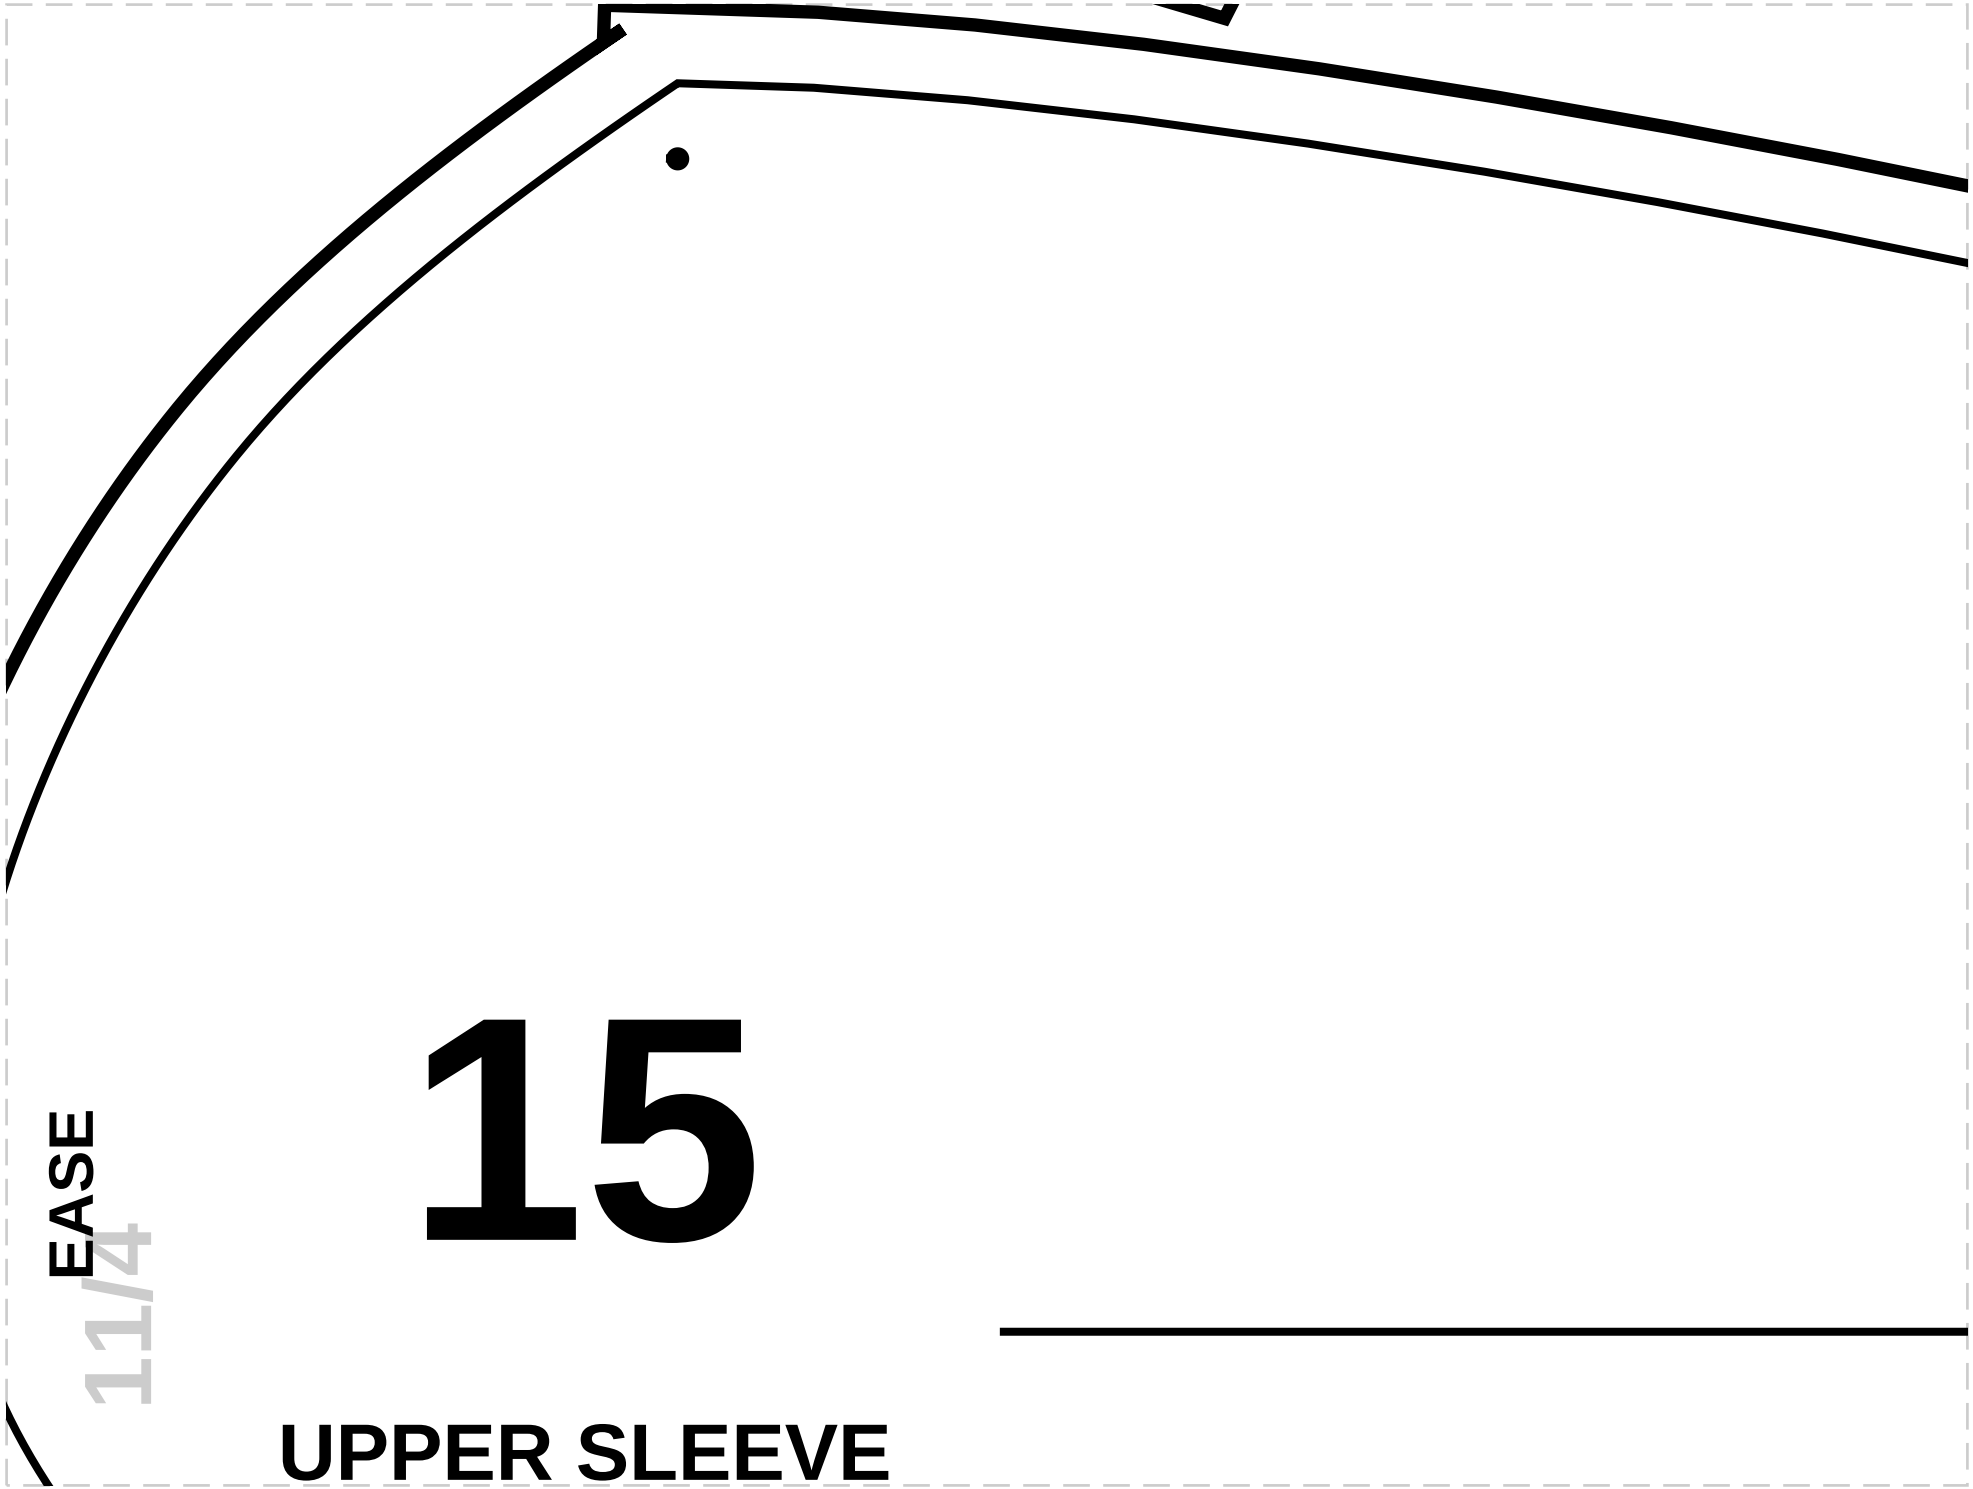

15
EASE
1 1/4
UPPER SLEEVE

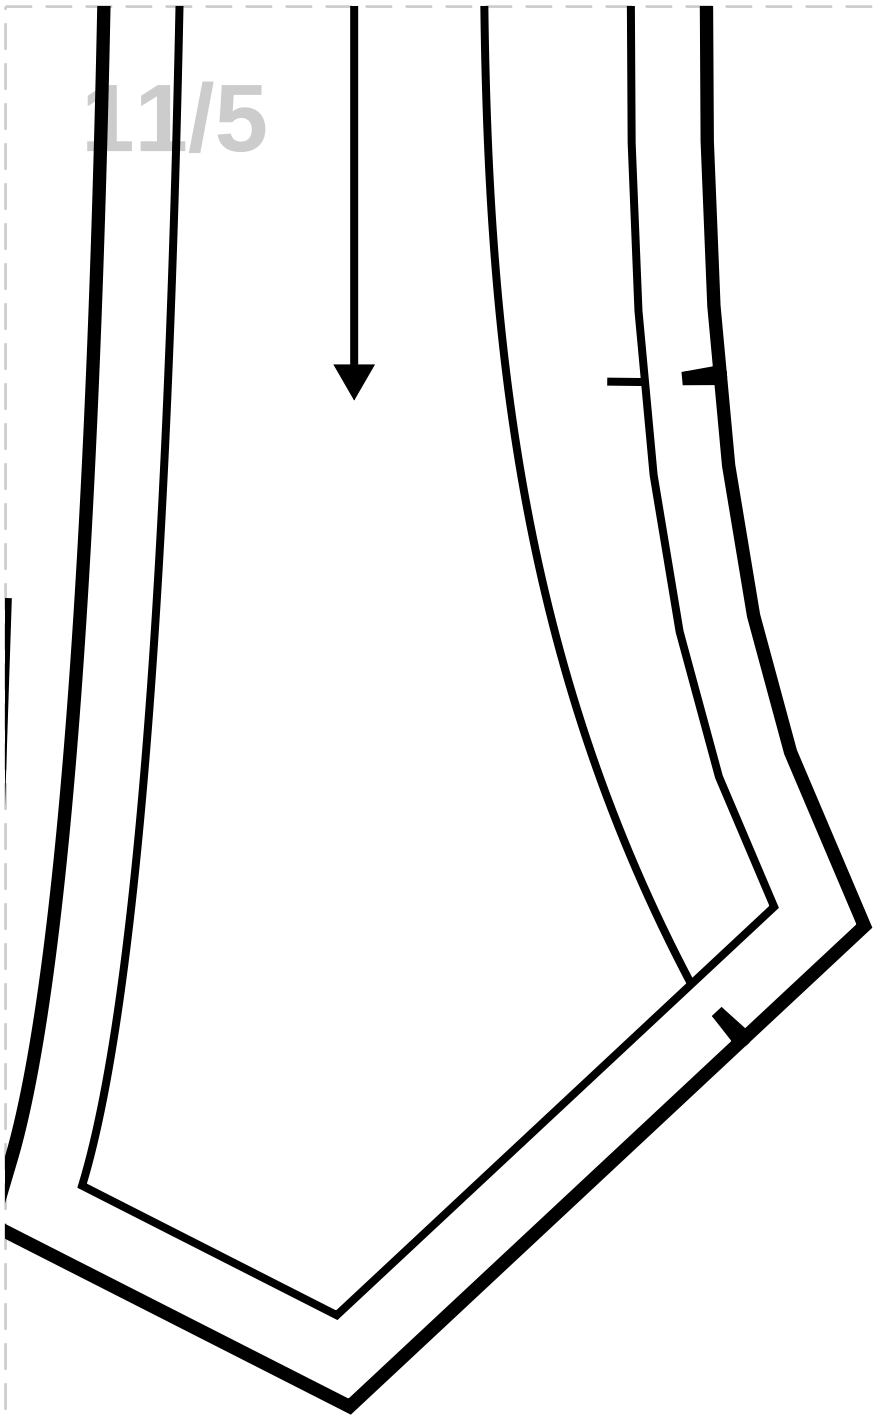


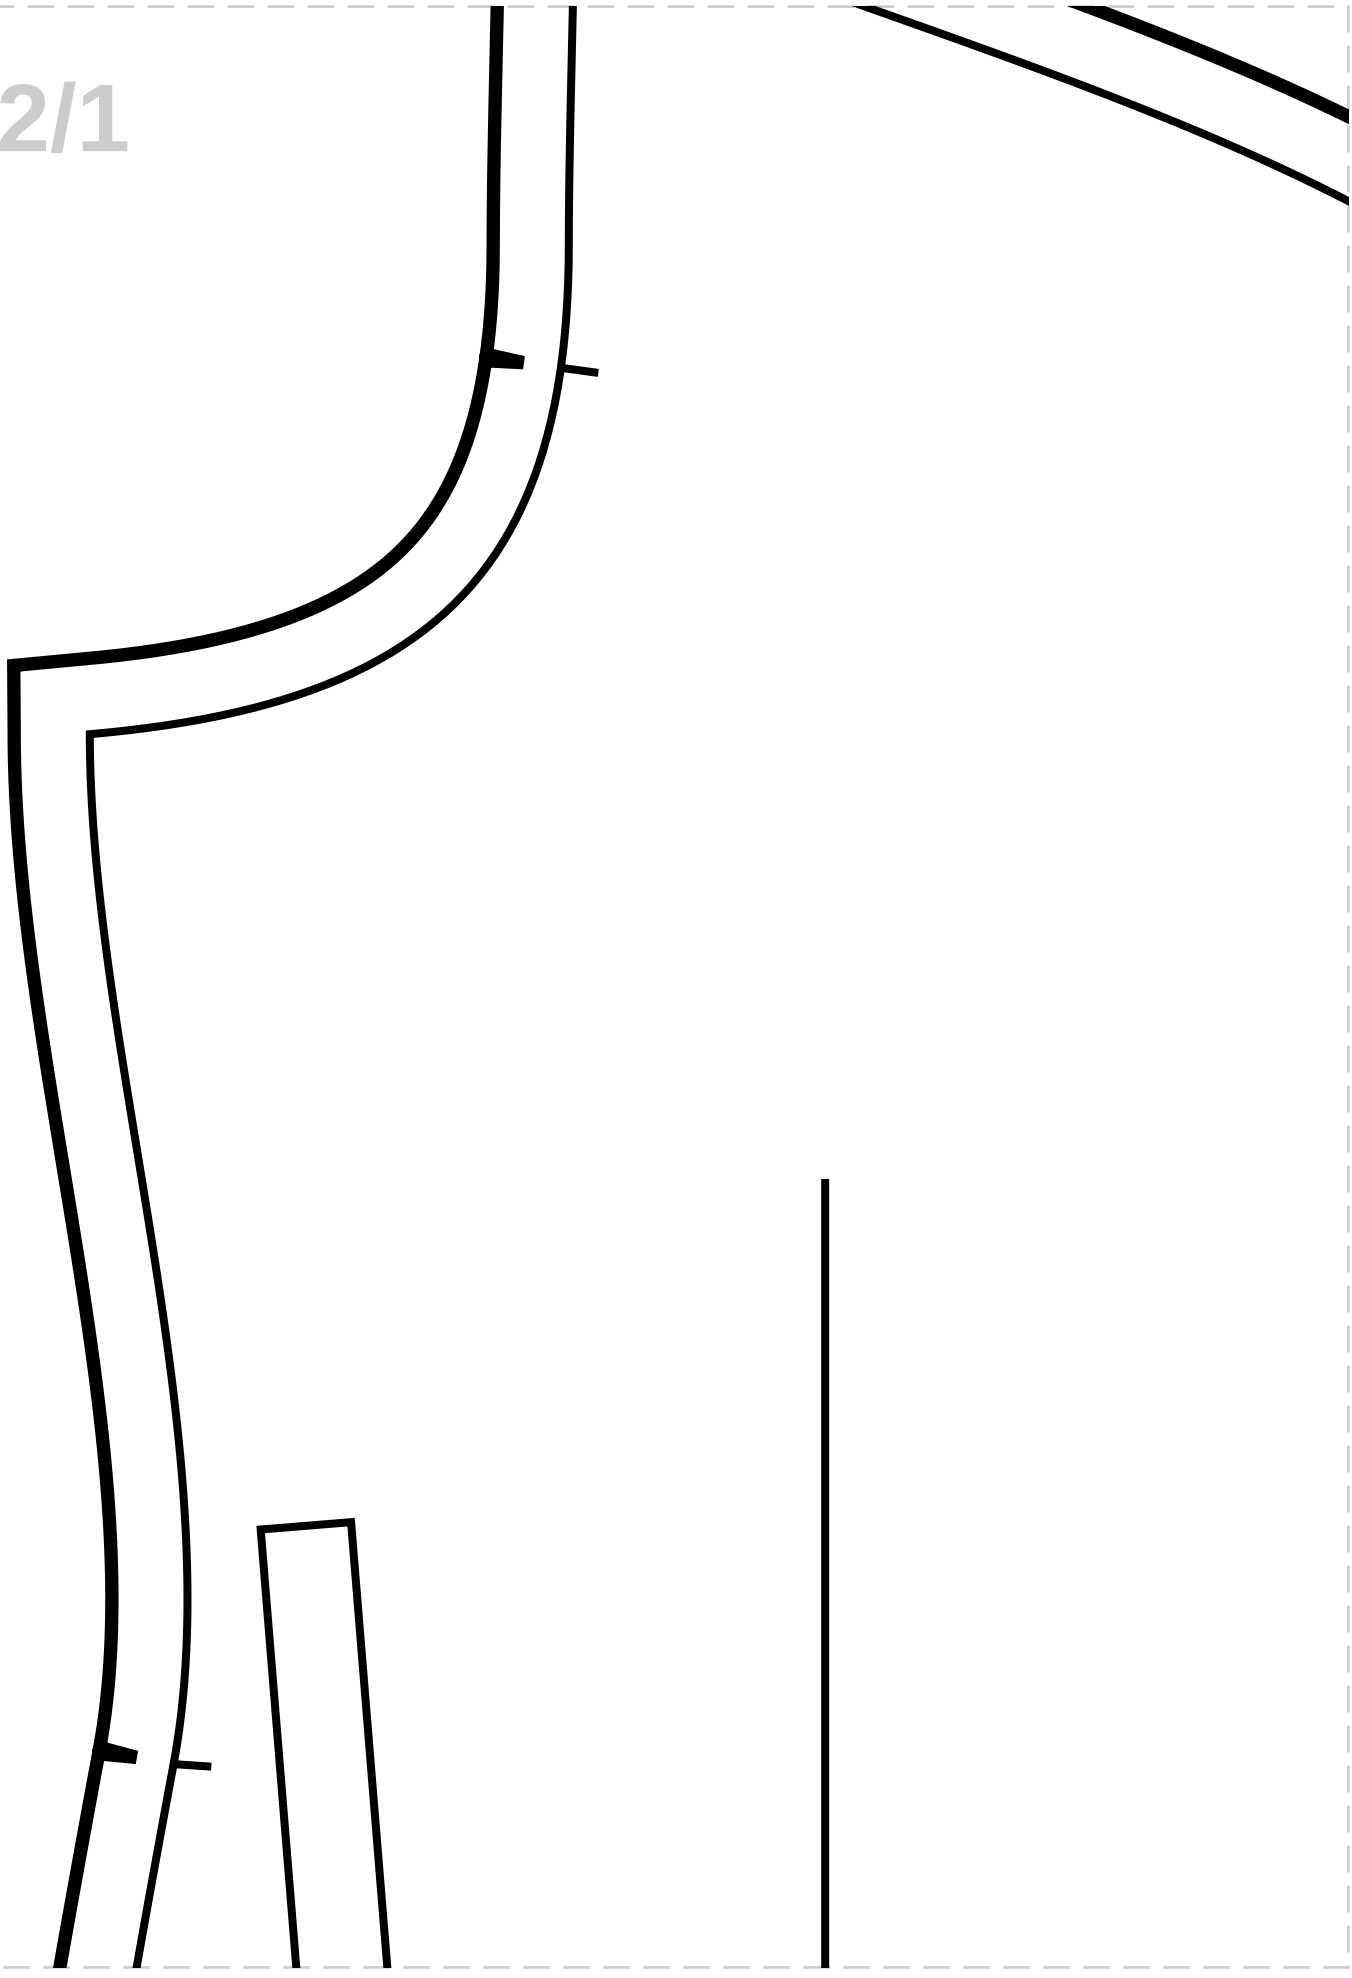


12/2

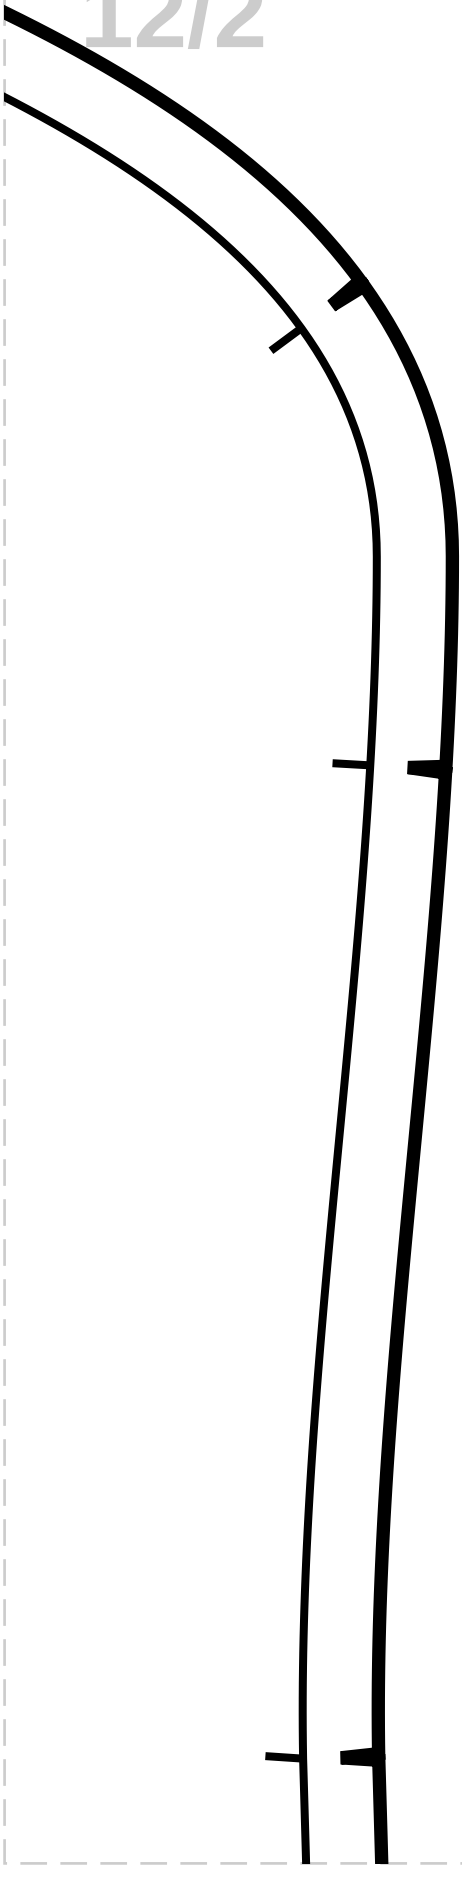


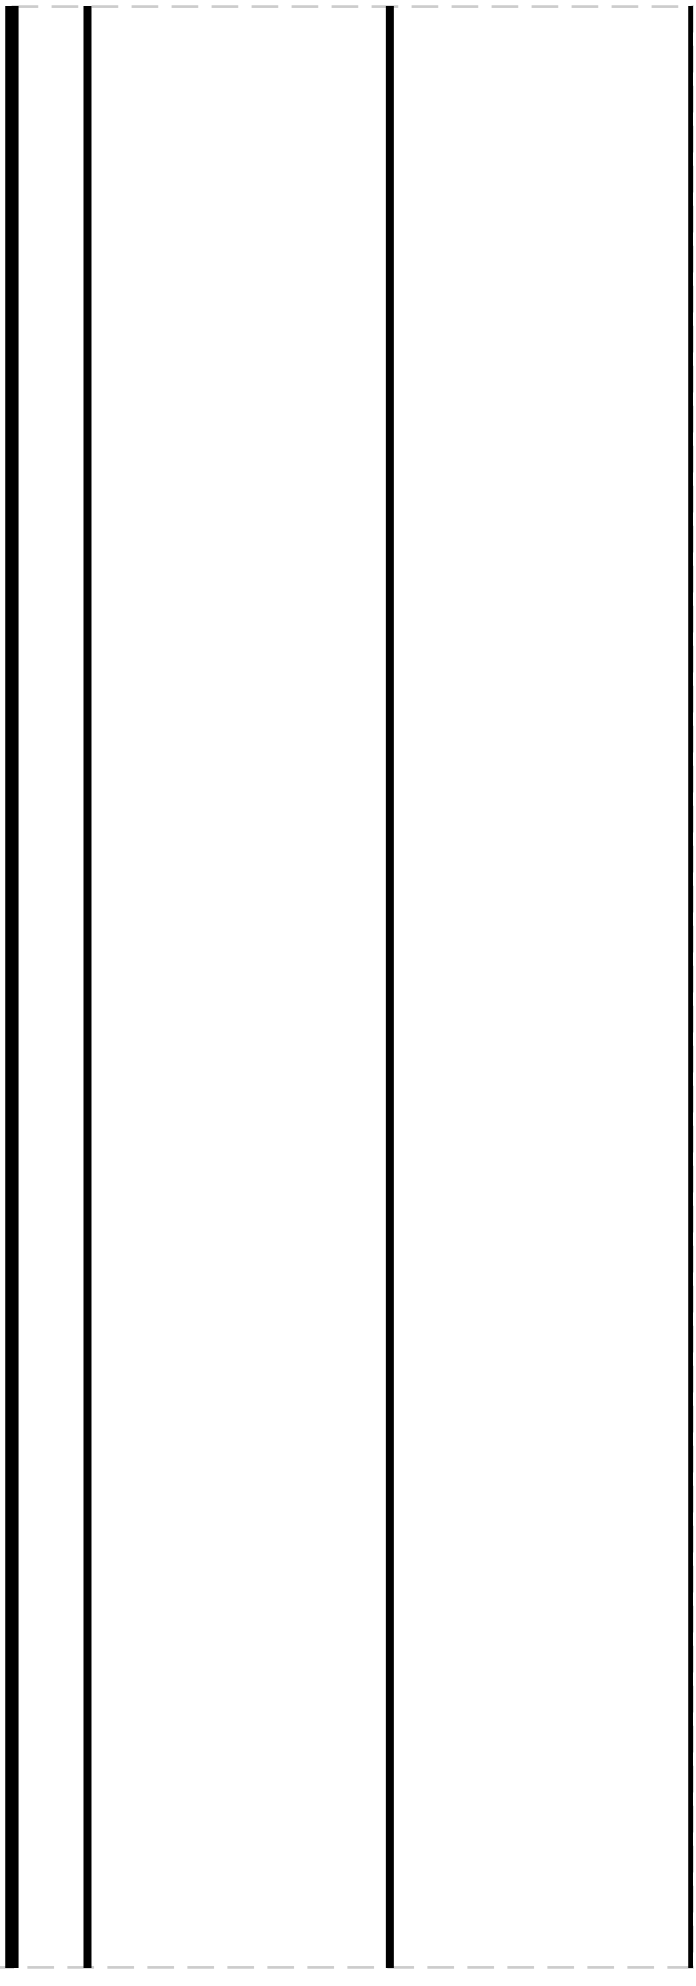


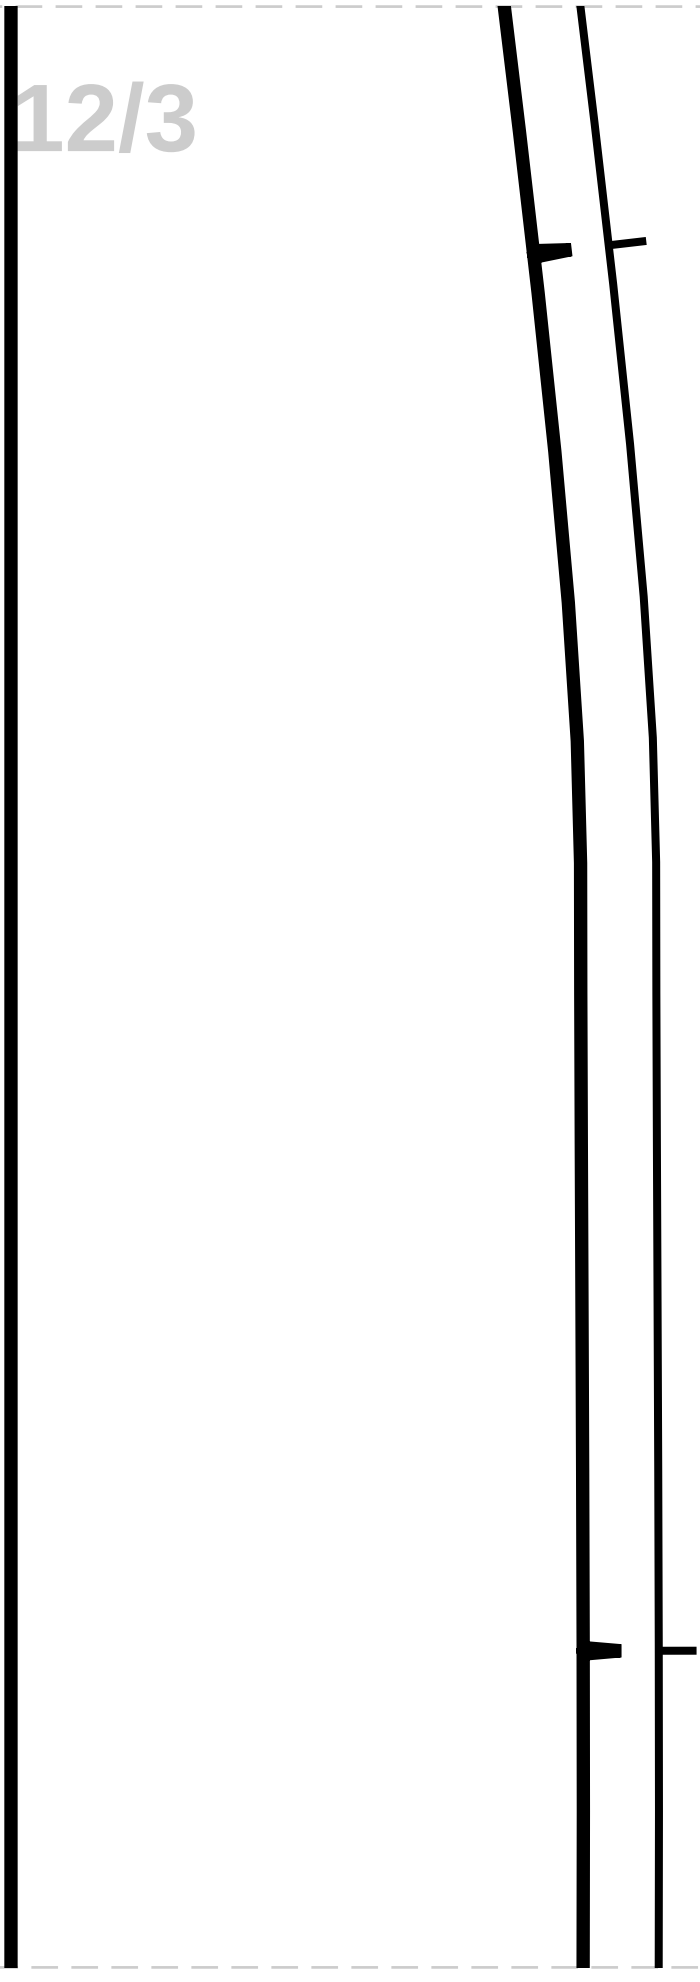


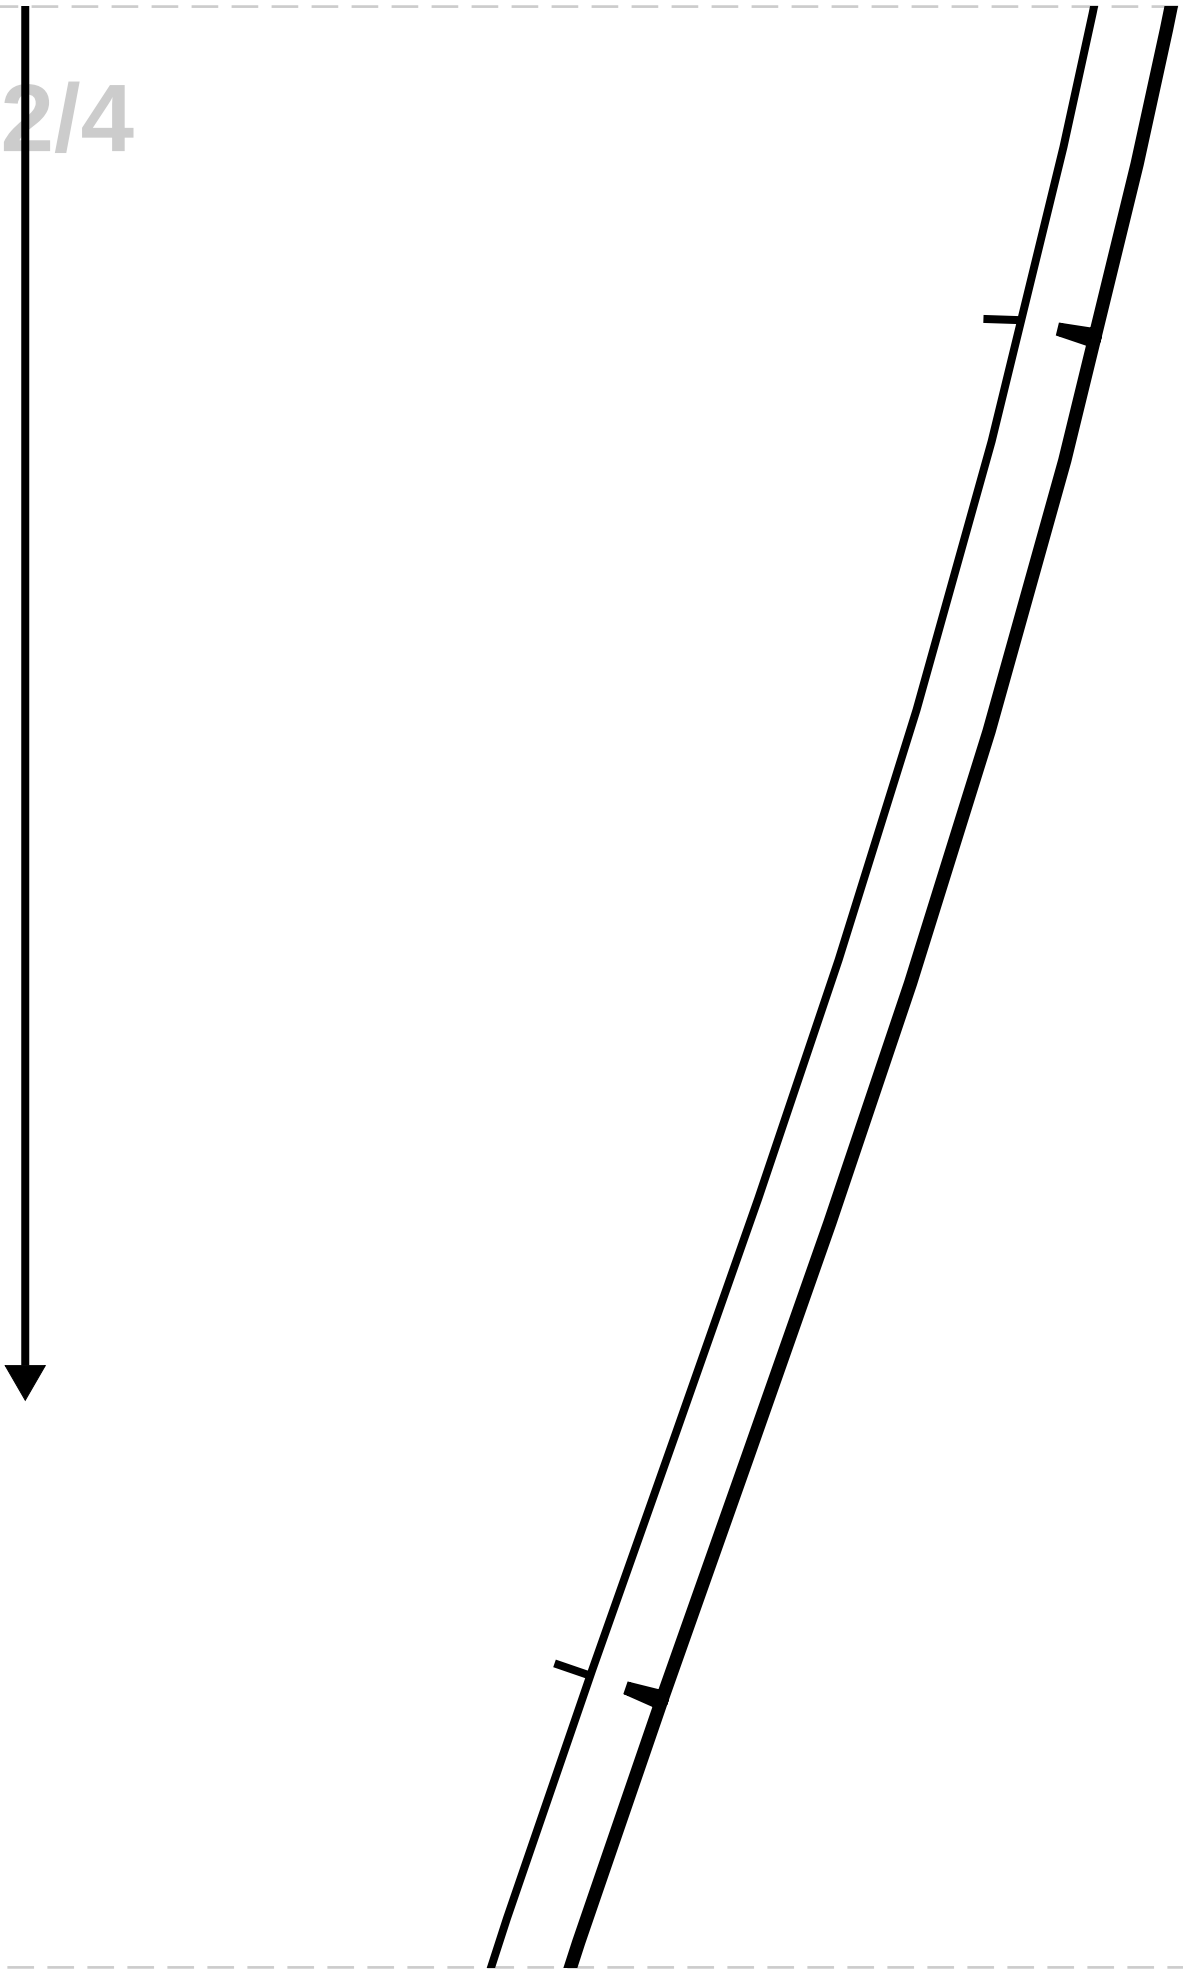

12/5

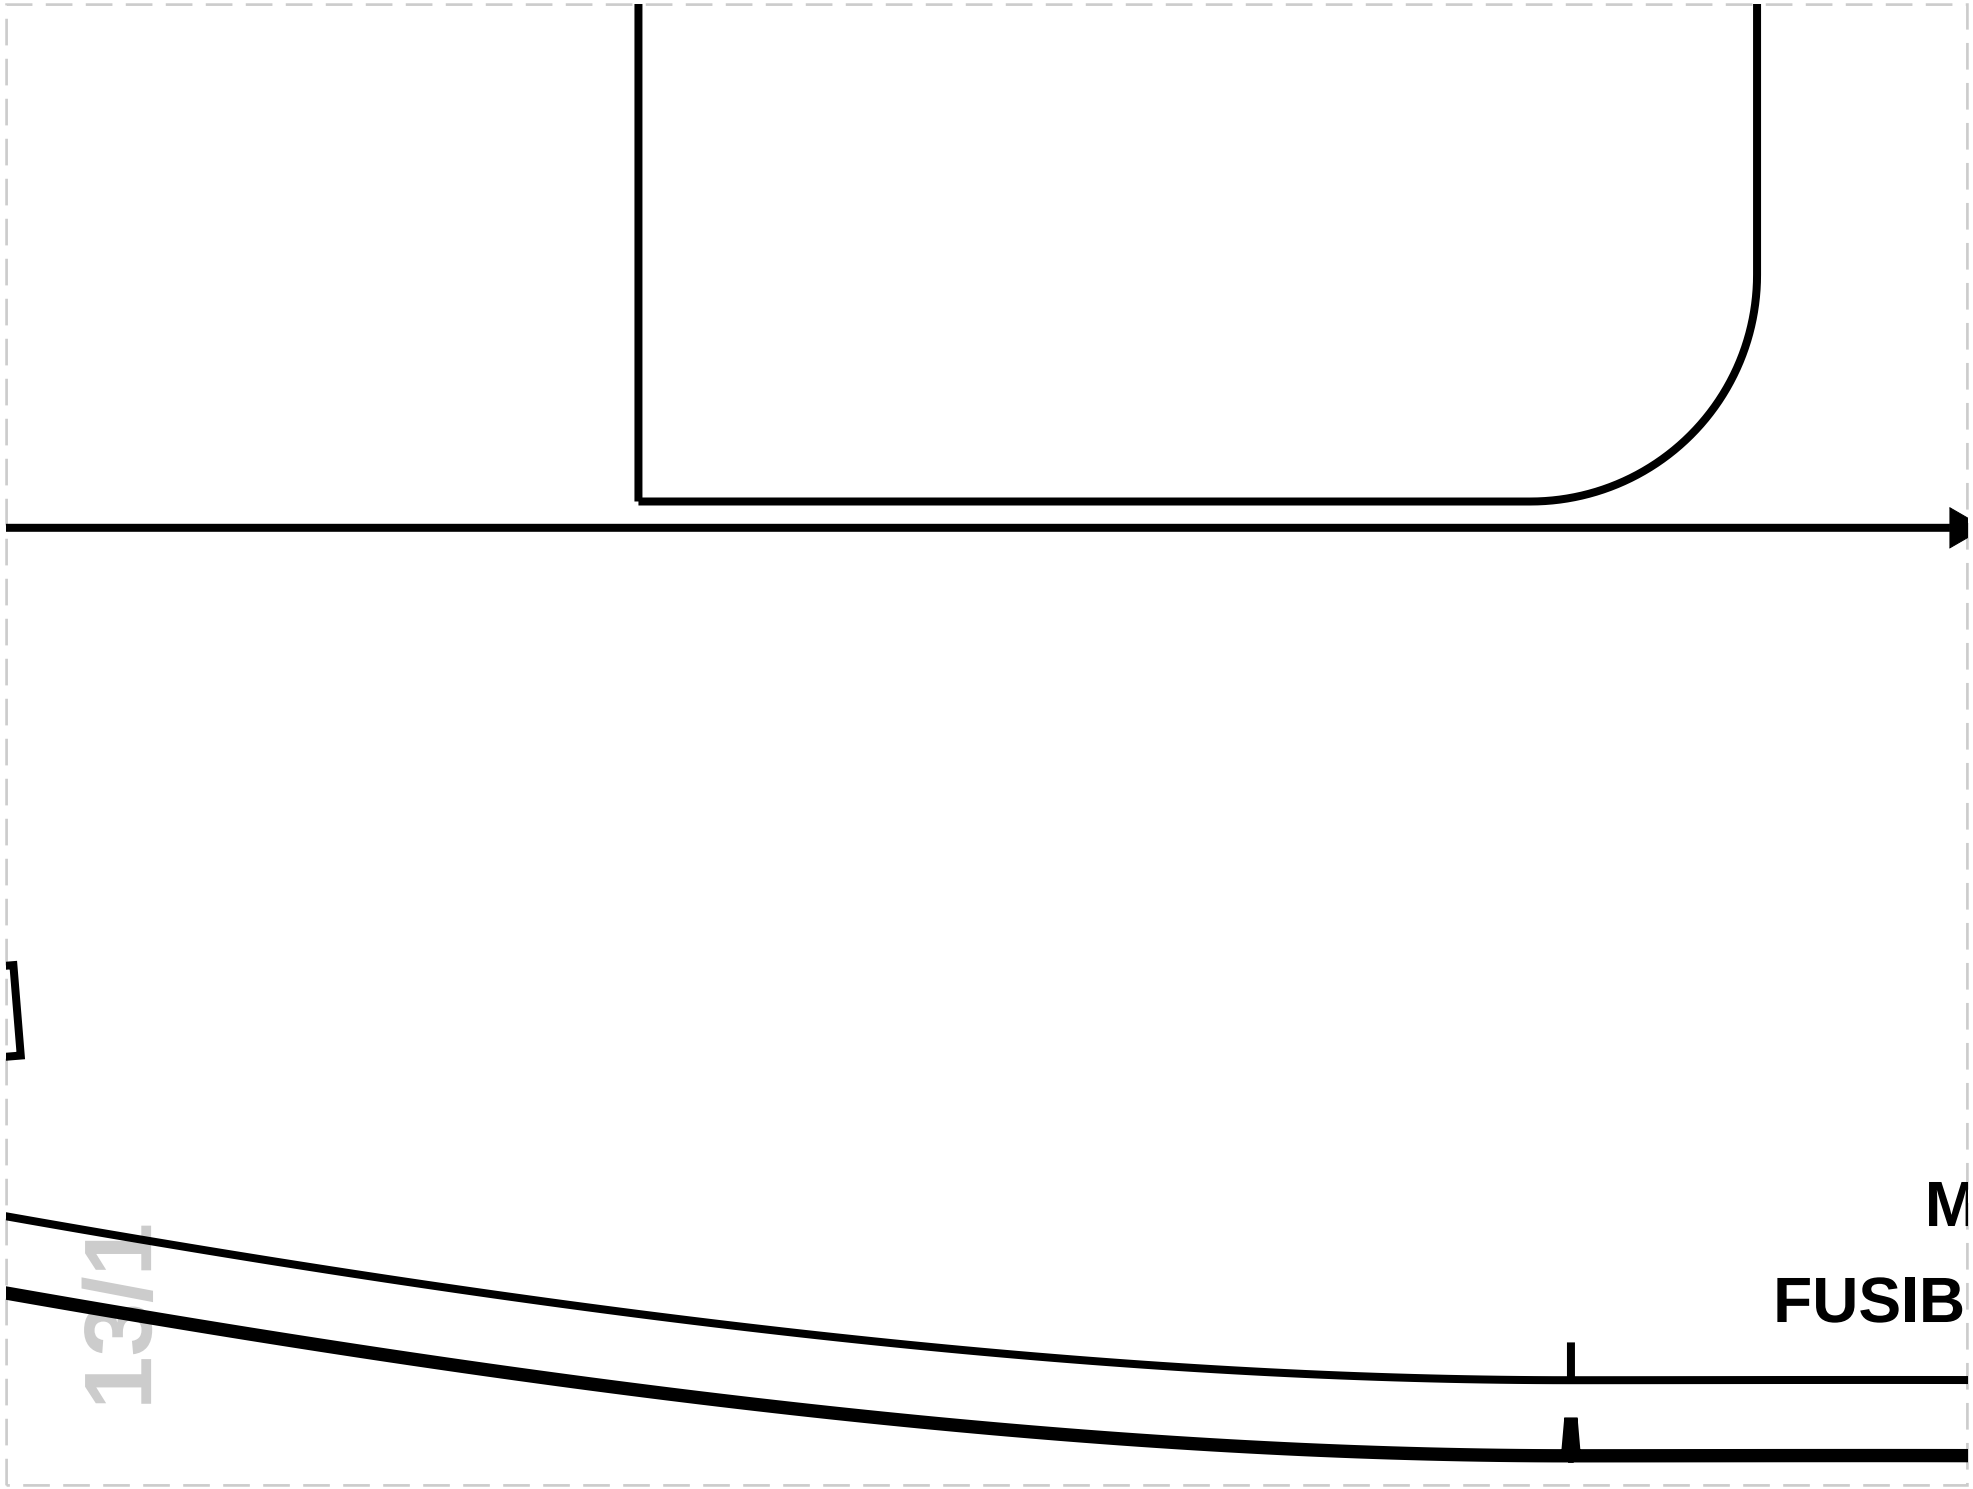
M
FUSIB

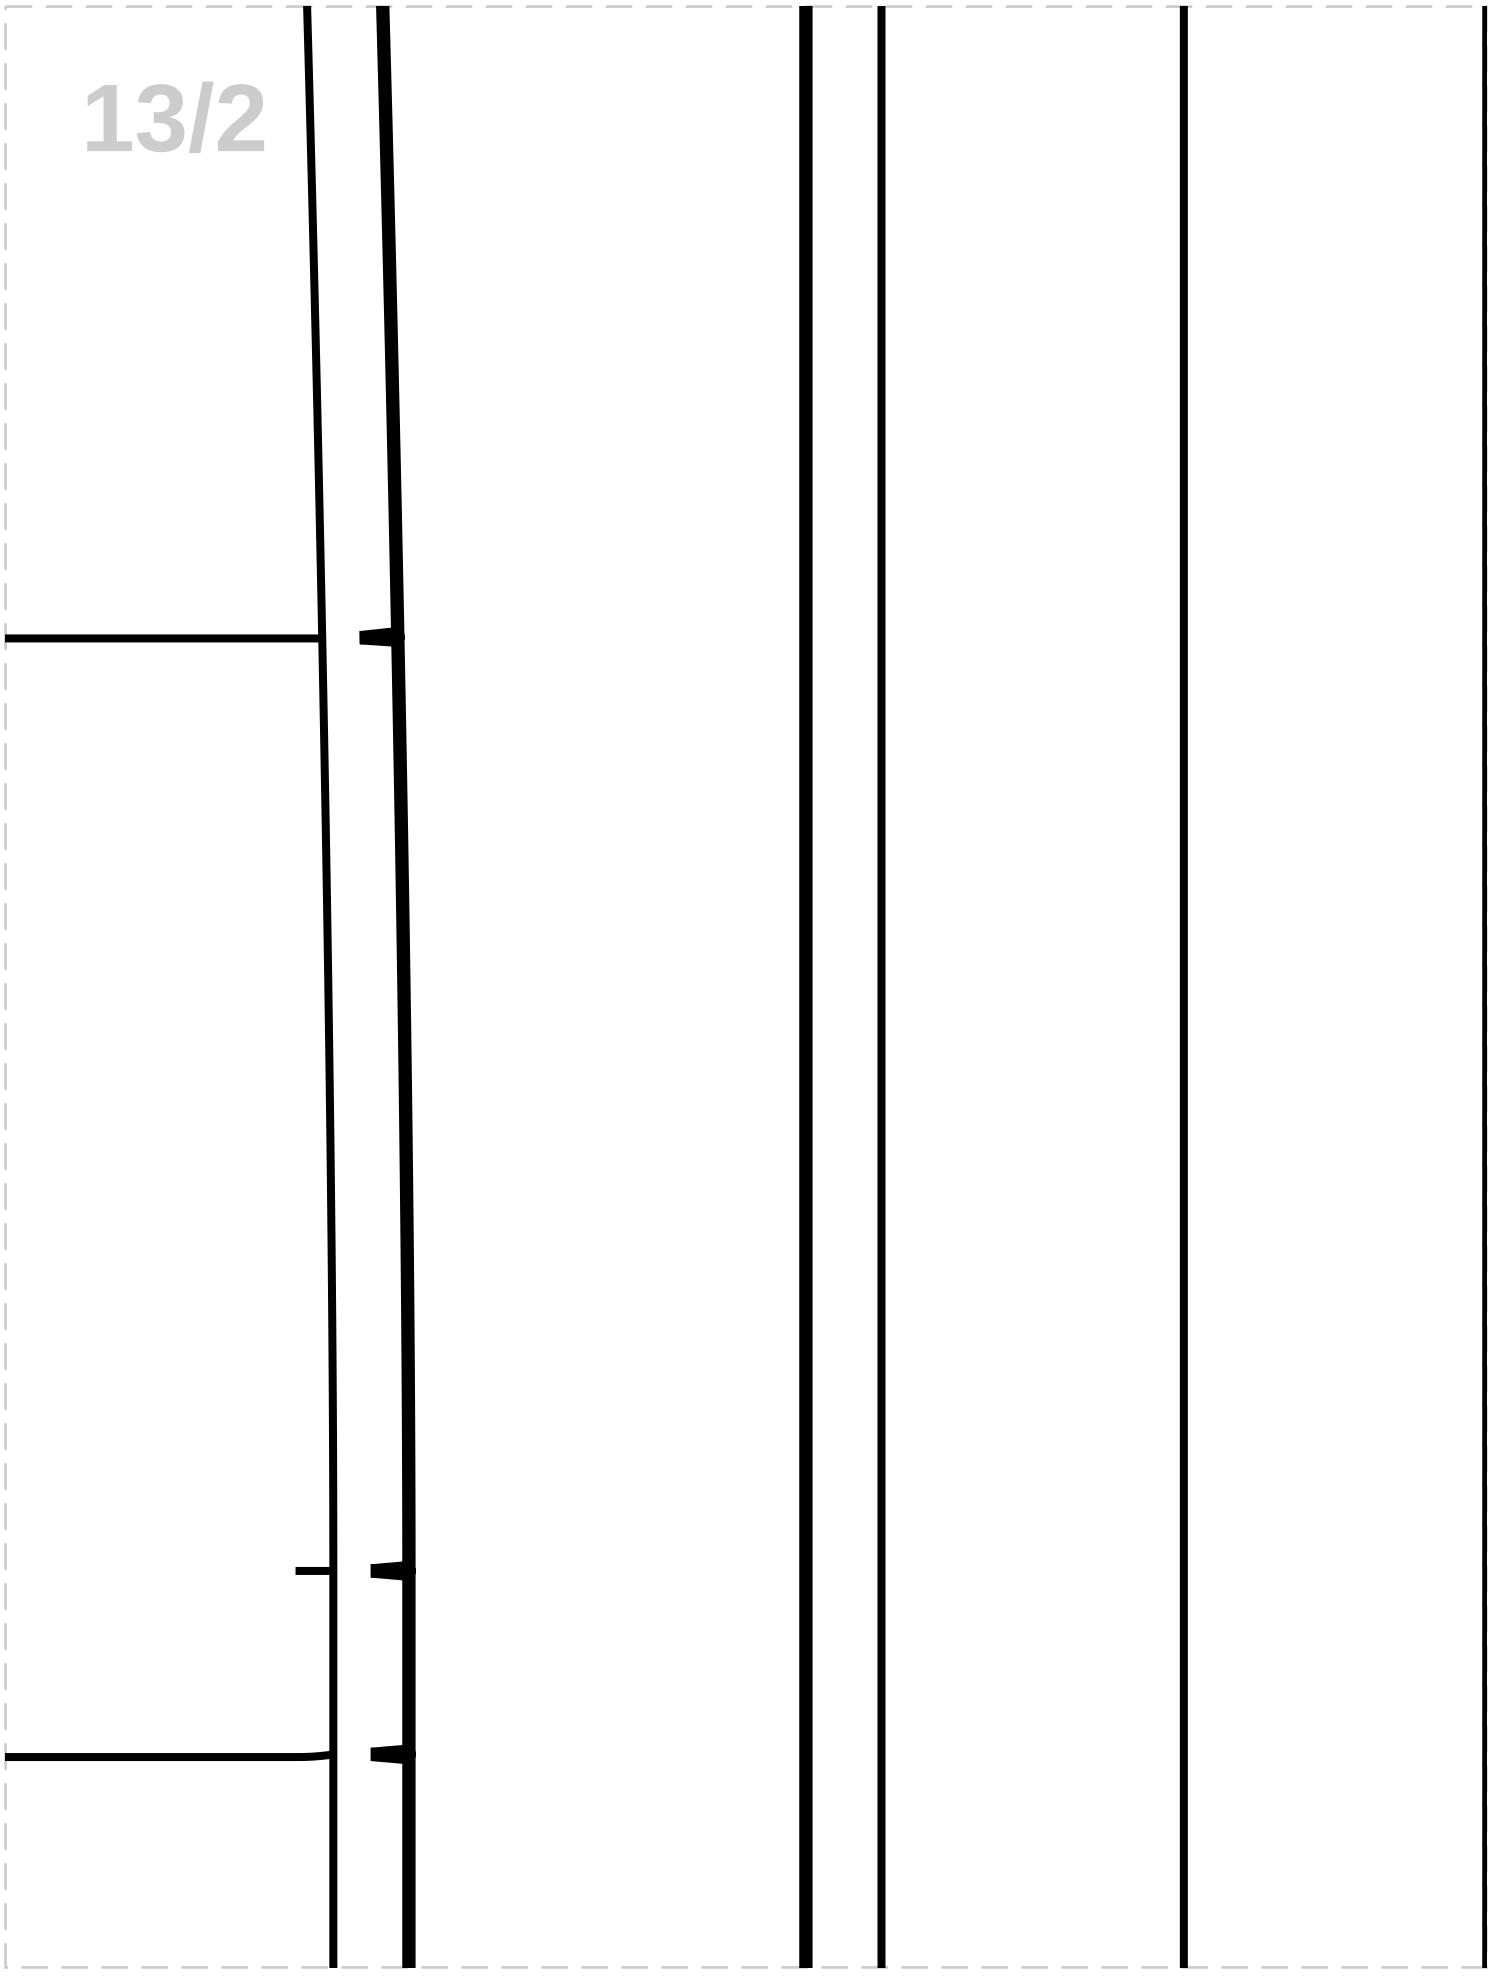

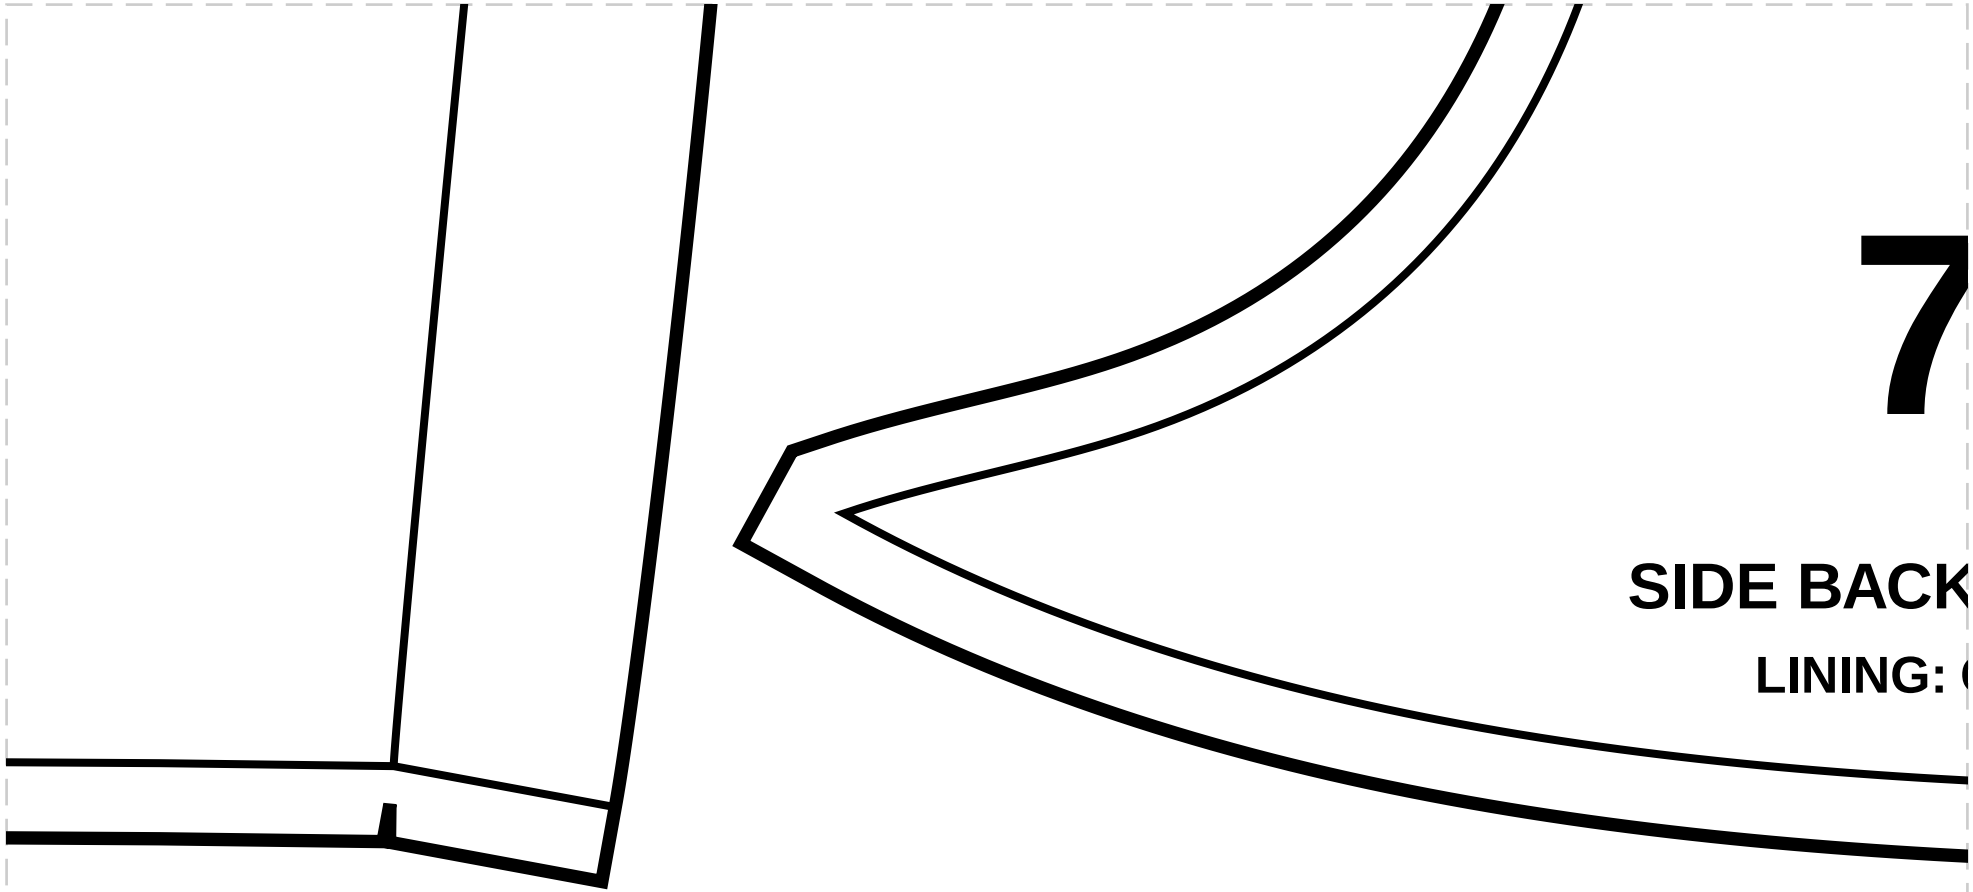



7


SIDE BACK


LINING: C


13/3

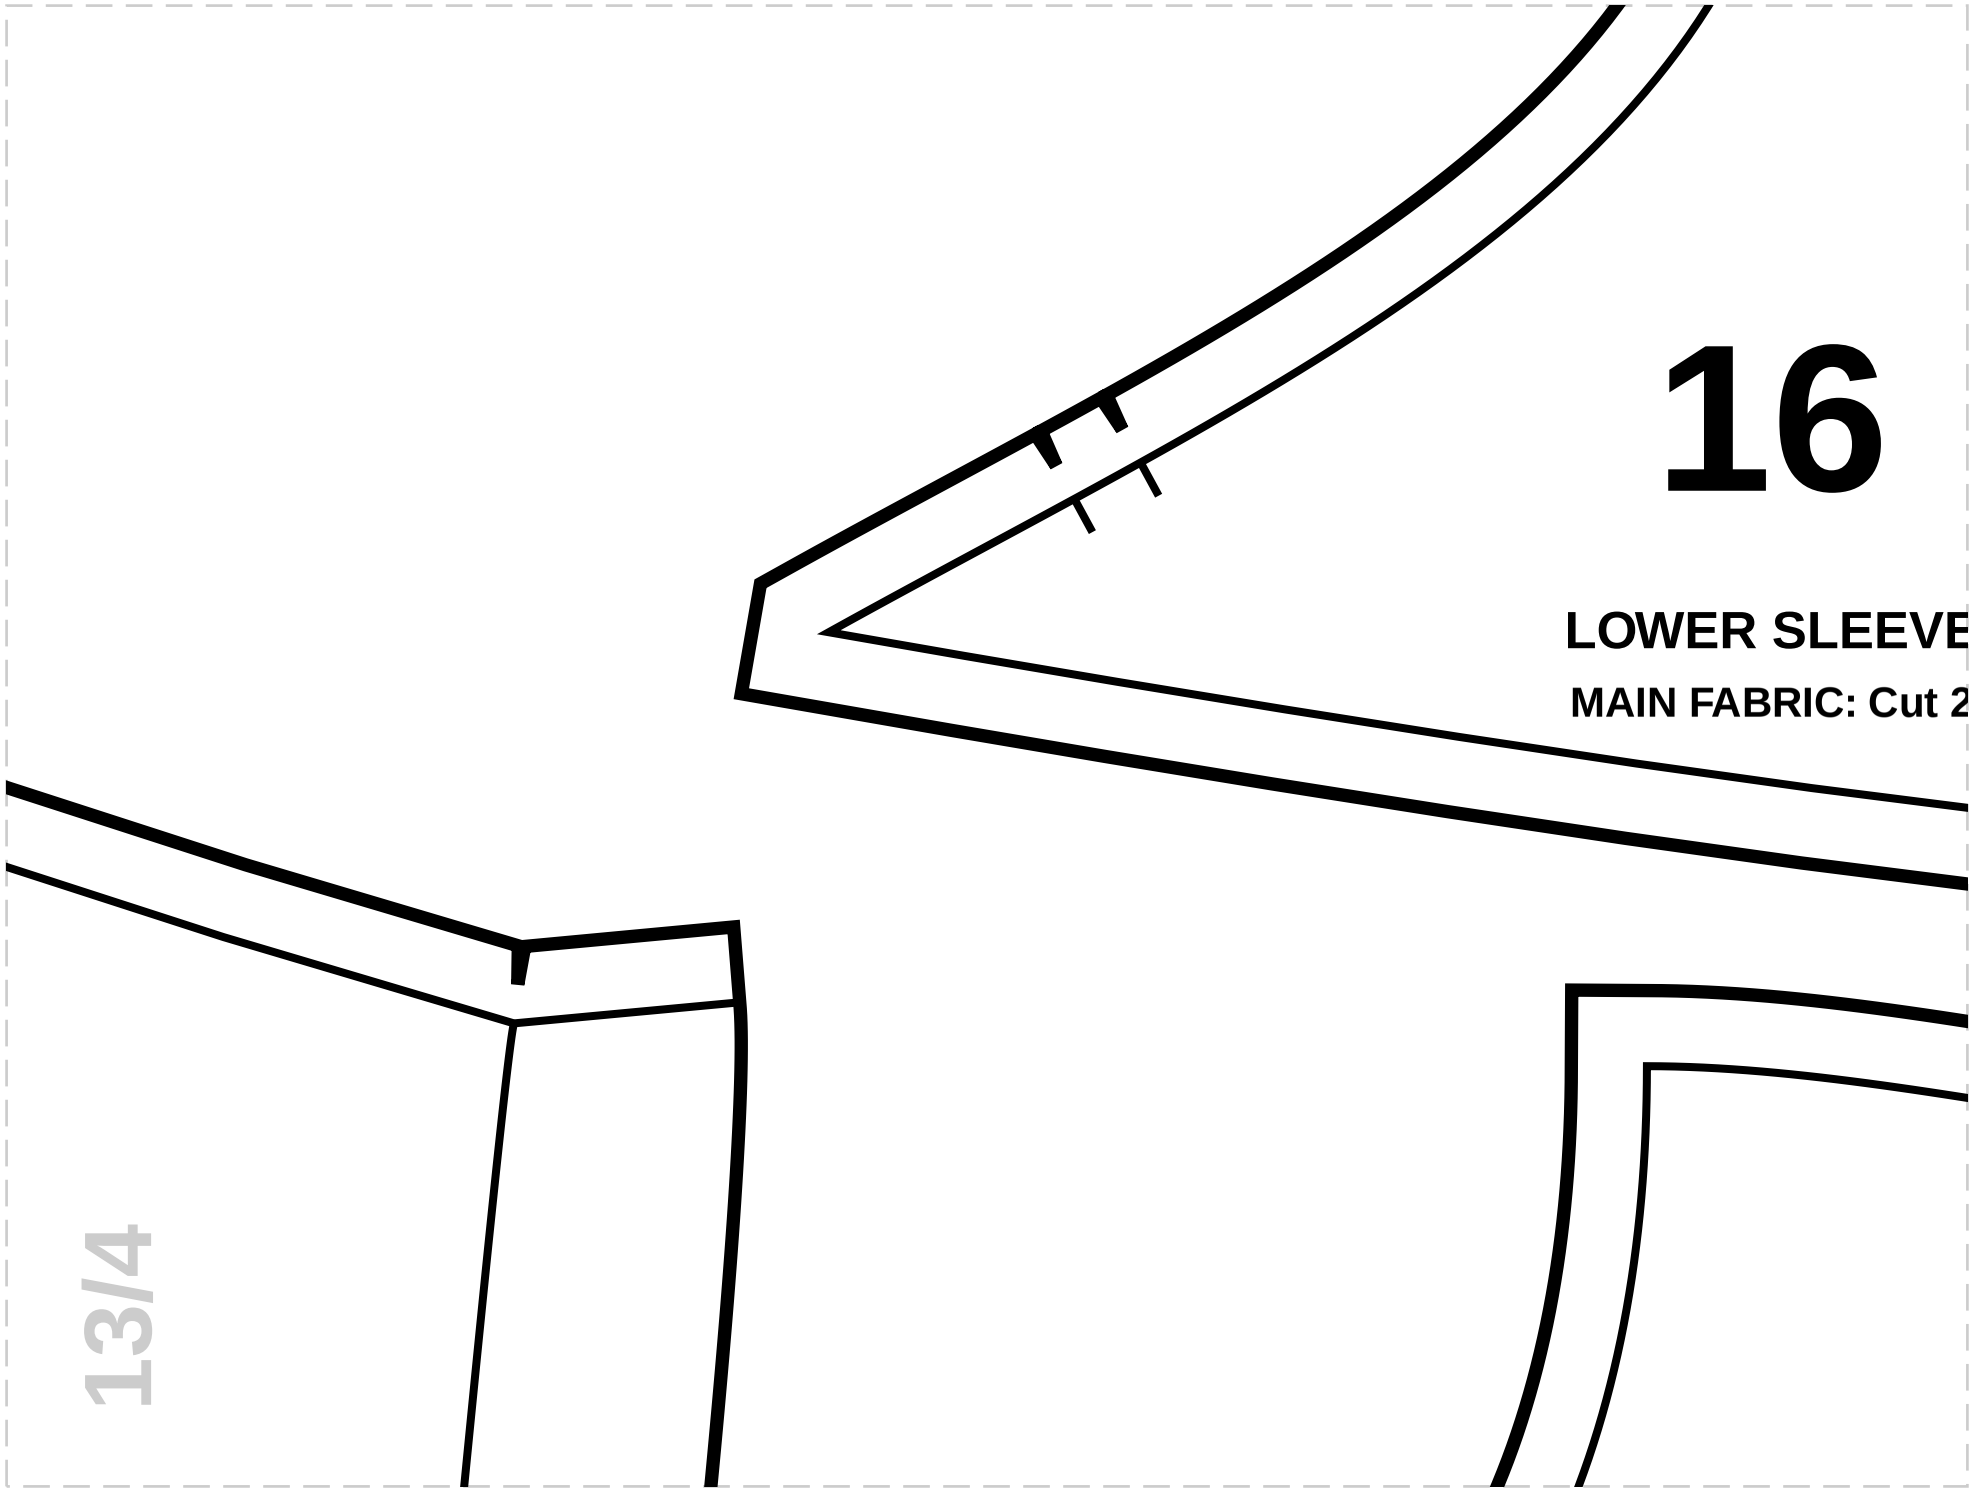

16
LOWER SLEEVE
MAIN FABRIC: Cut 2
13/4

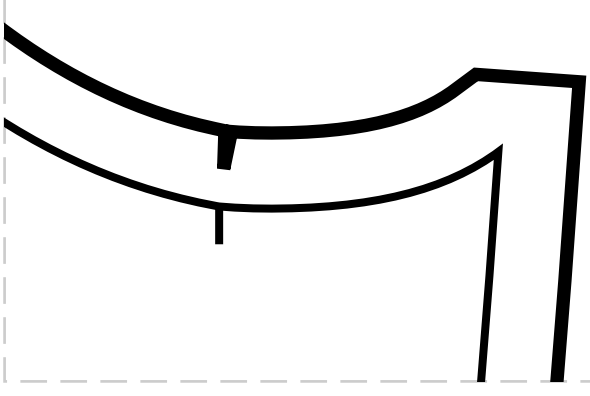

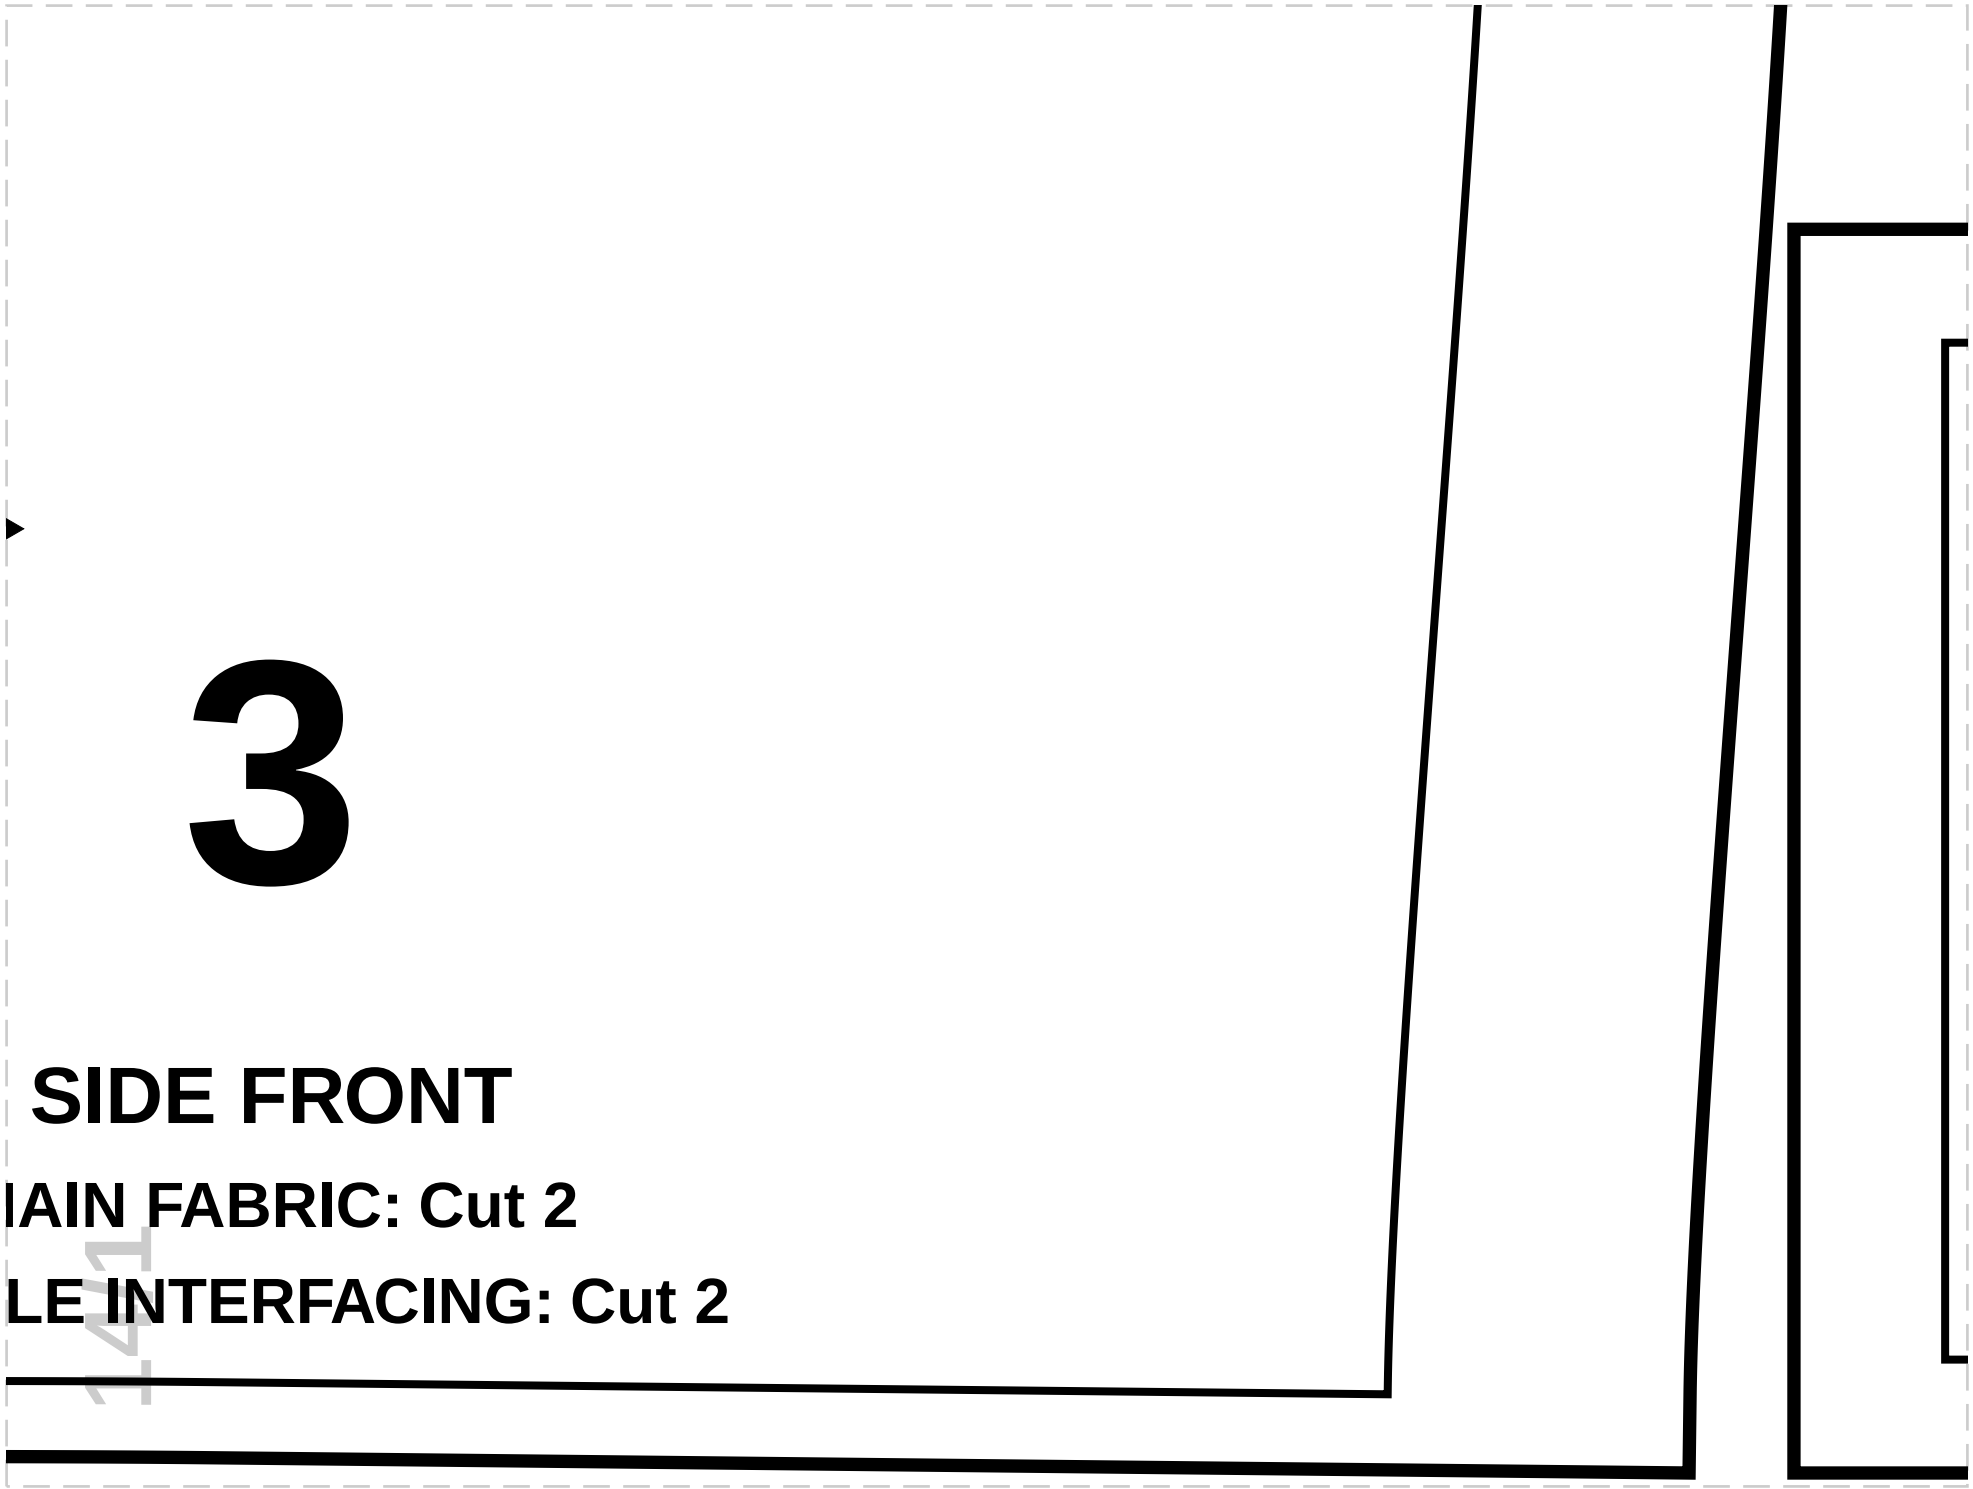

3
SIDE FRONT
IAIN FABRIC: Cut 2
LE INTERFACING: Cut 2

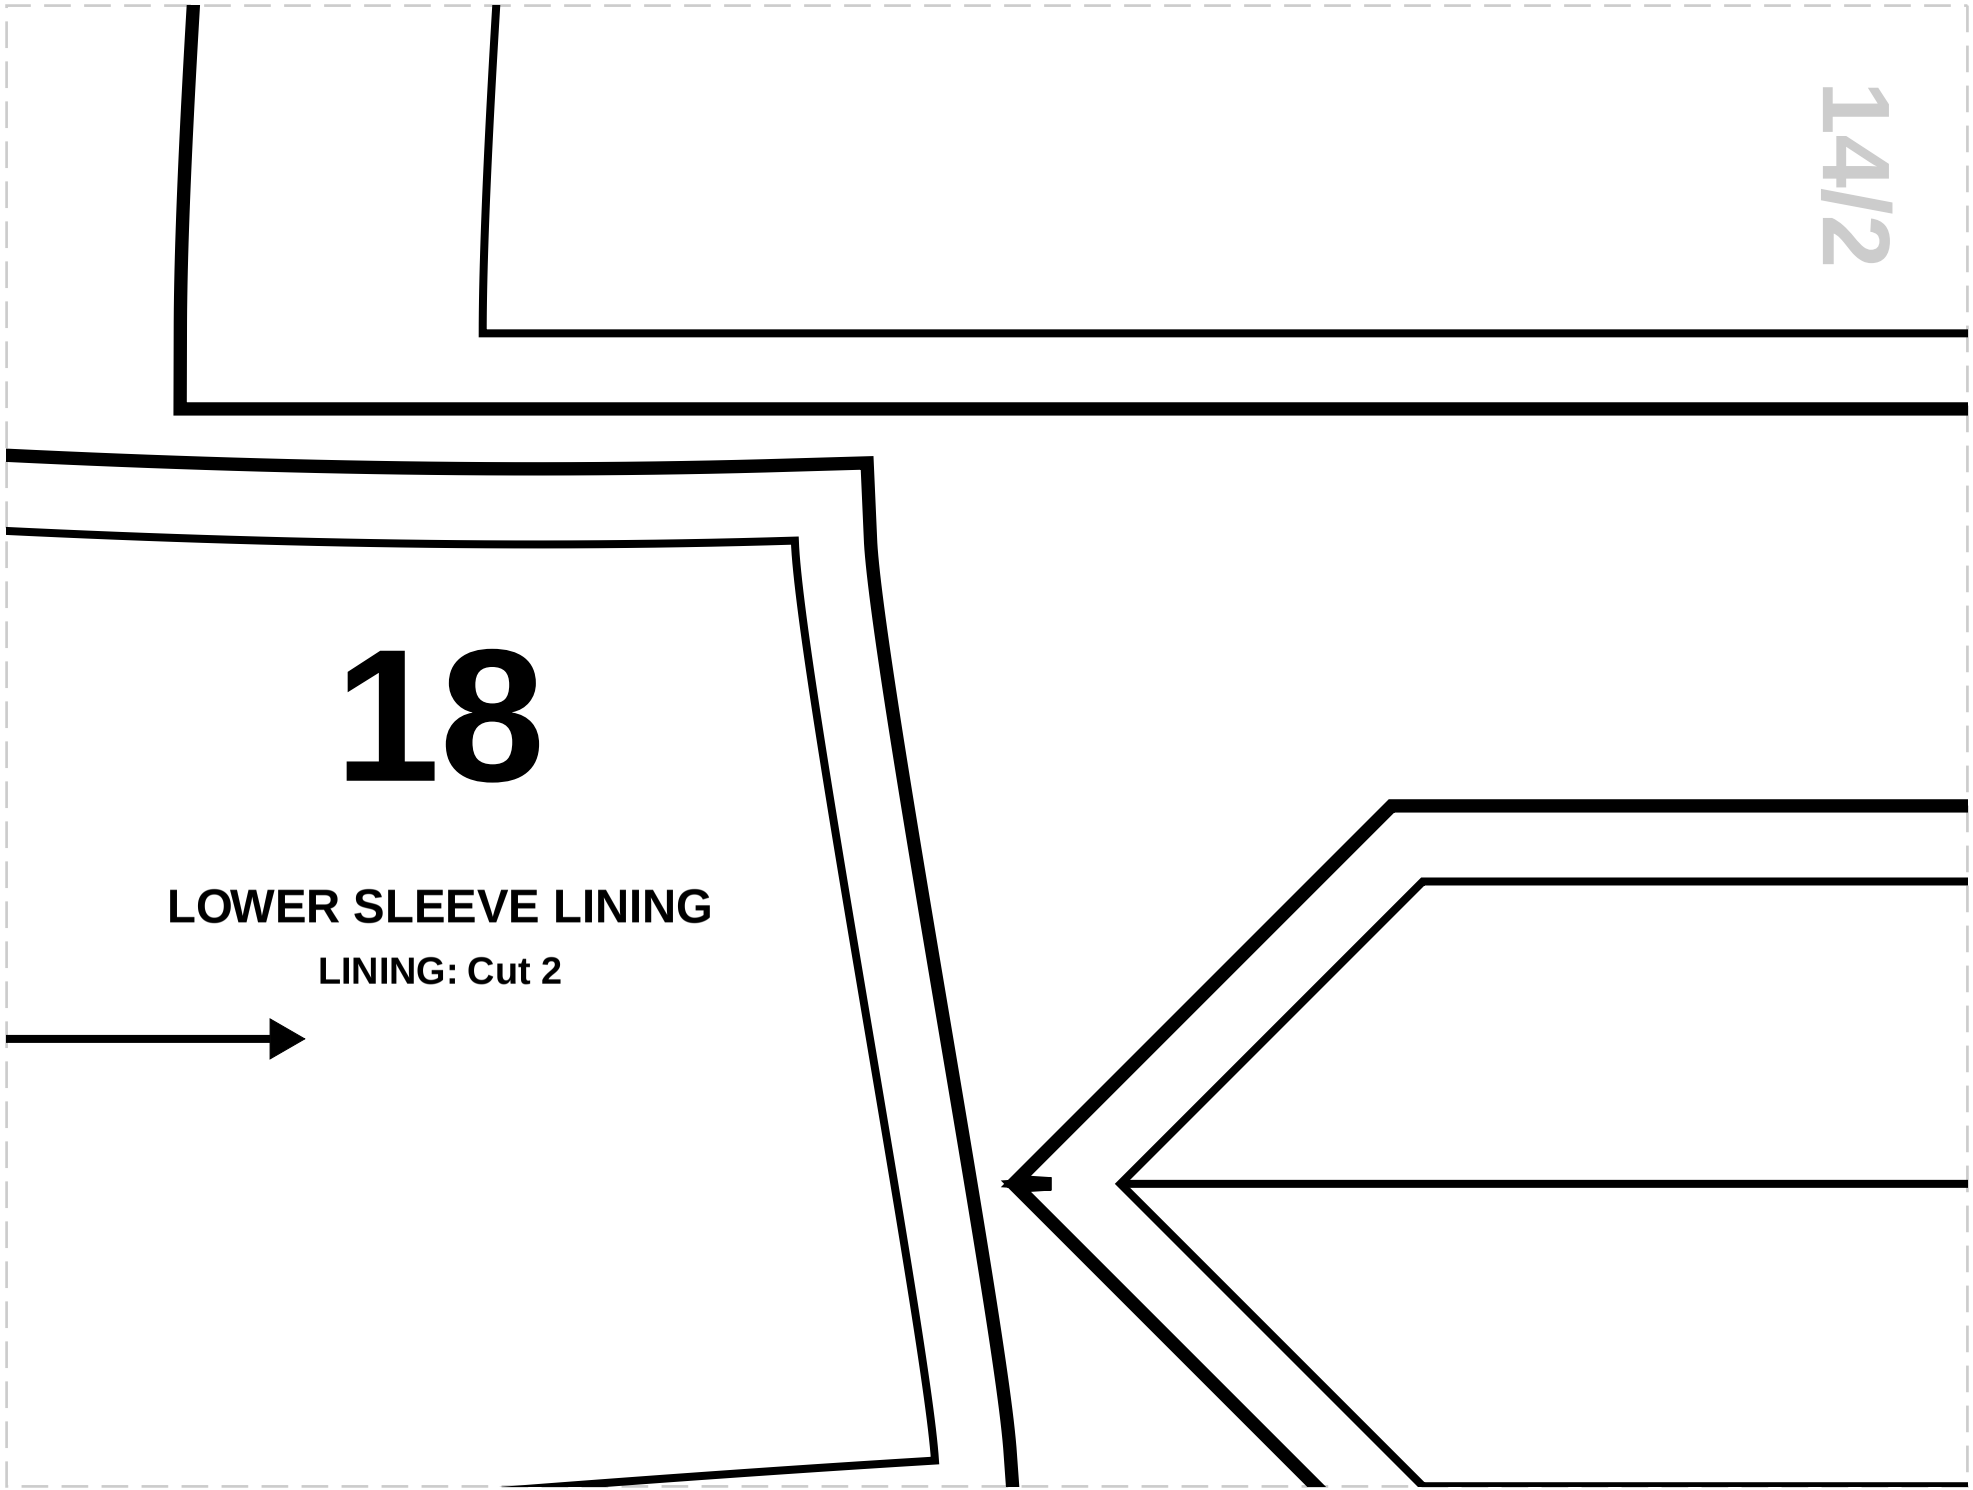
18
LOWER SLEEVE LINING
LINING: Cut 2

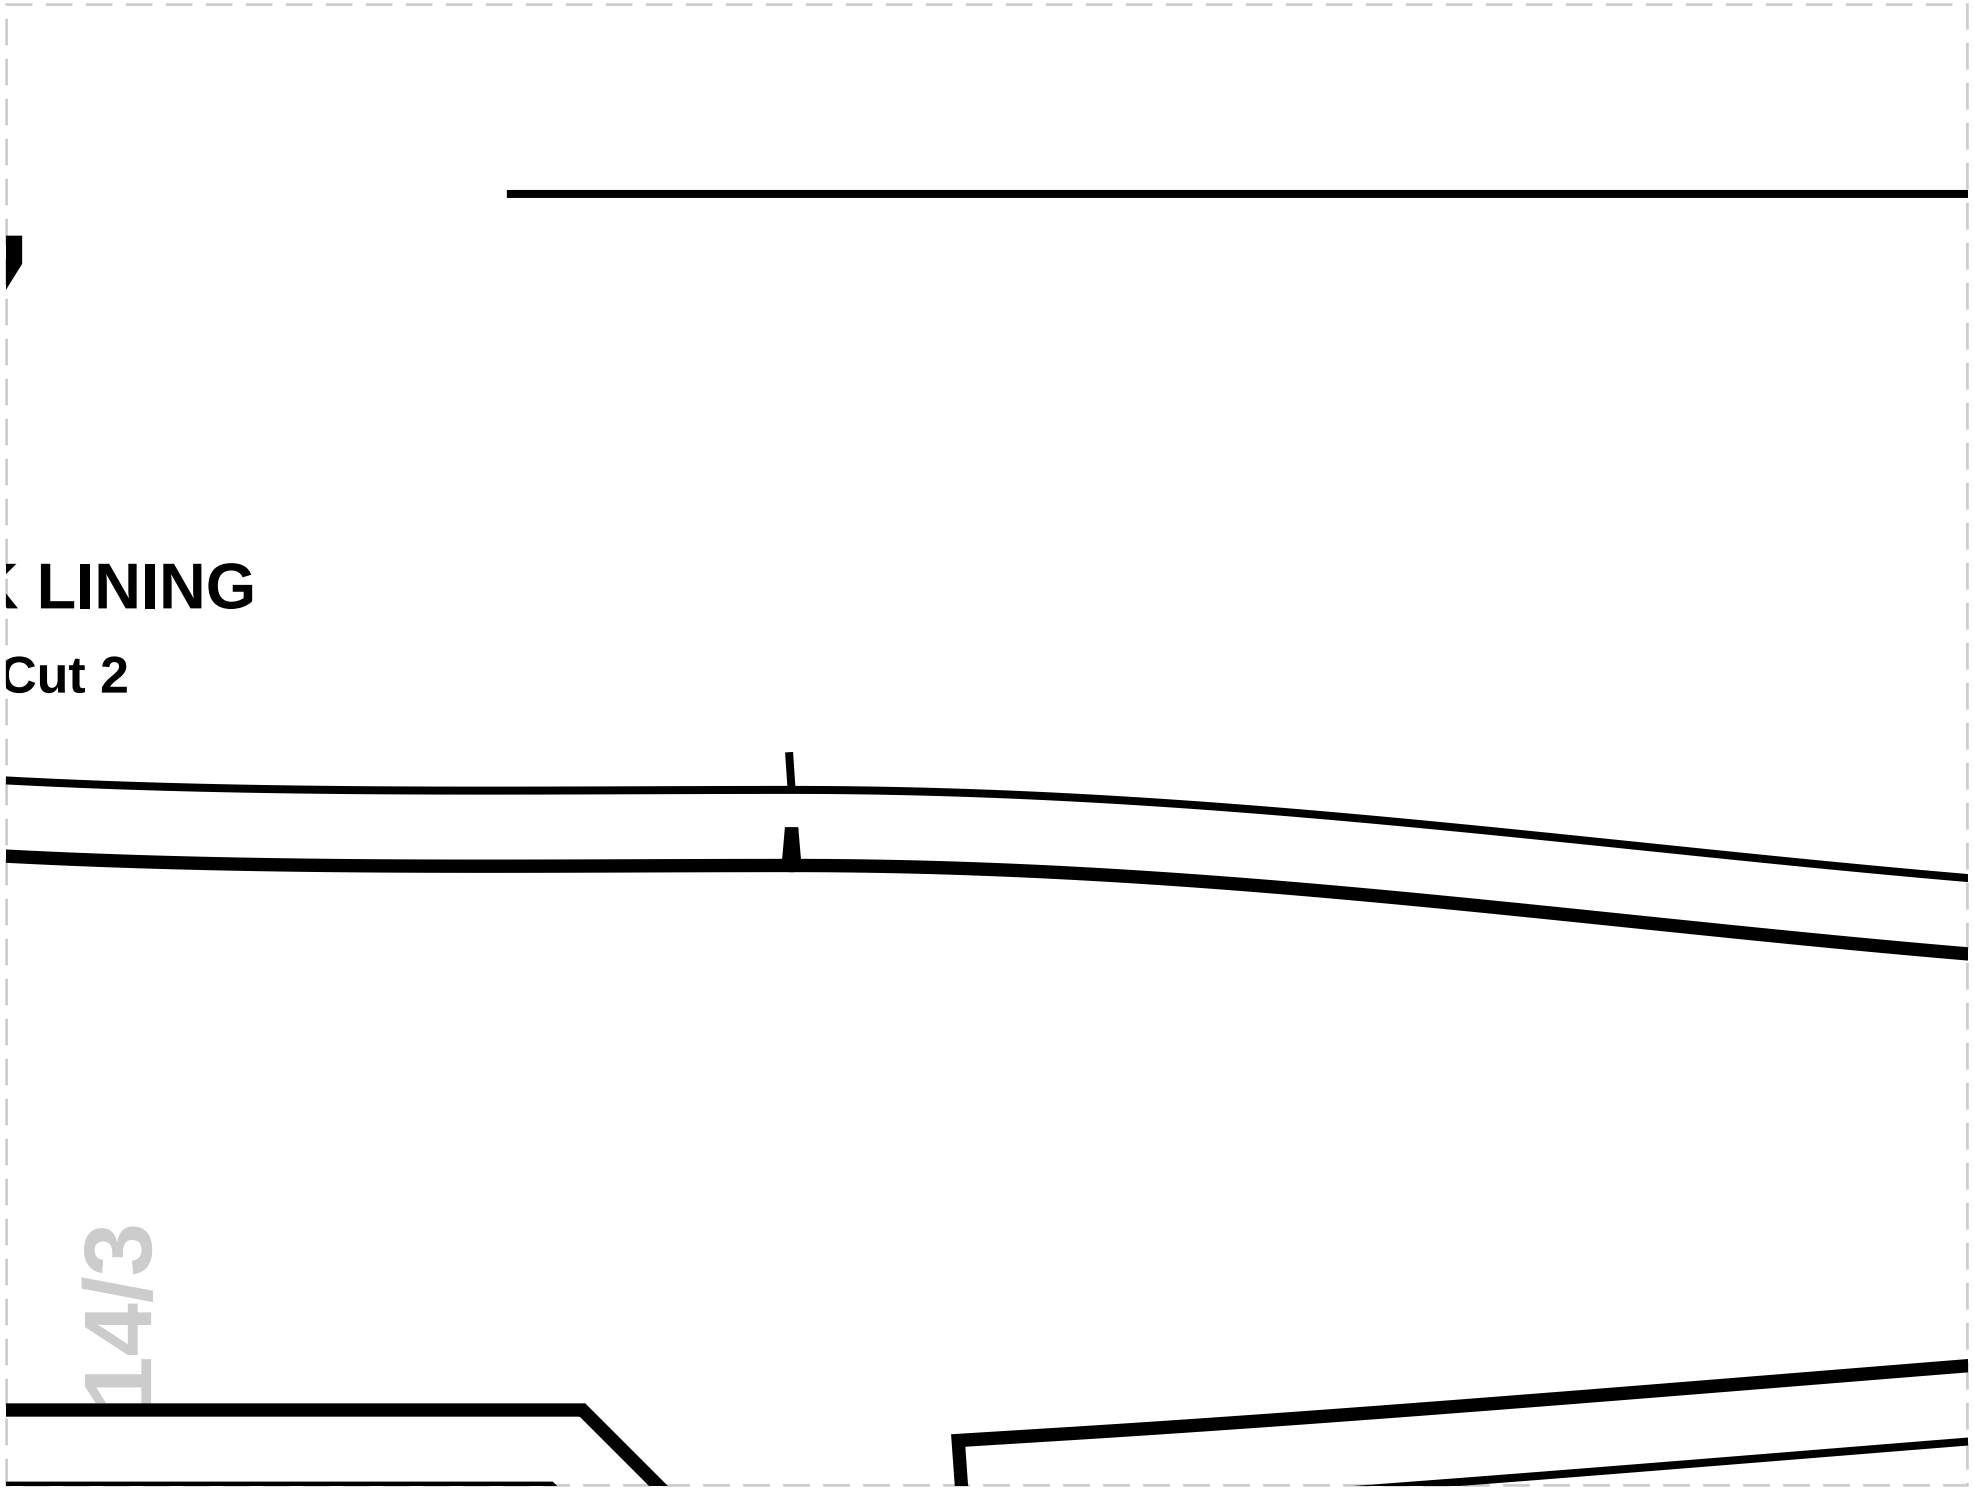
LINING
Cut 2
14/3

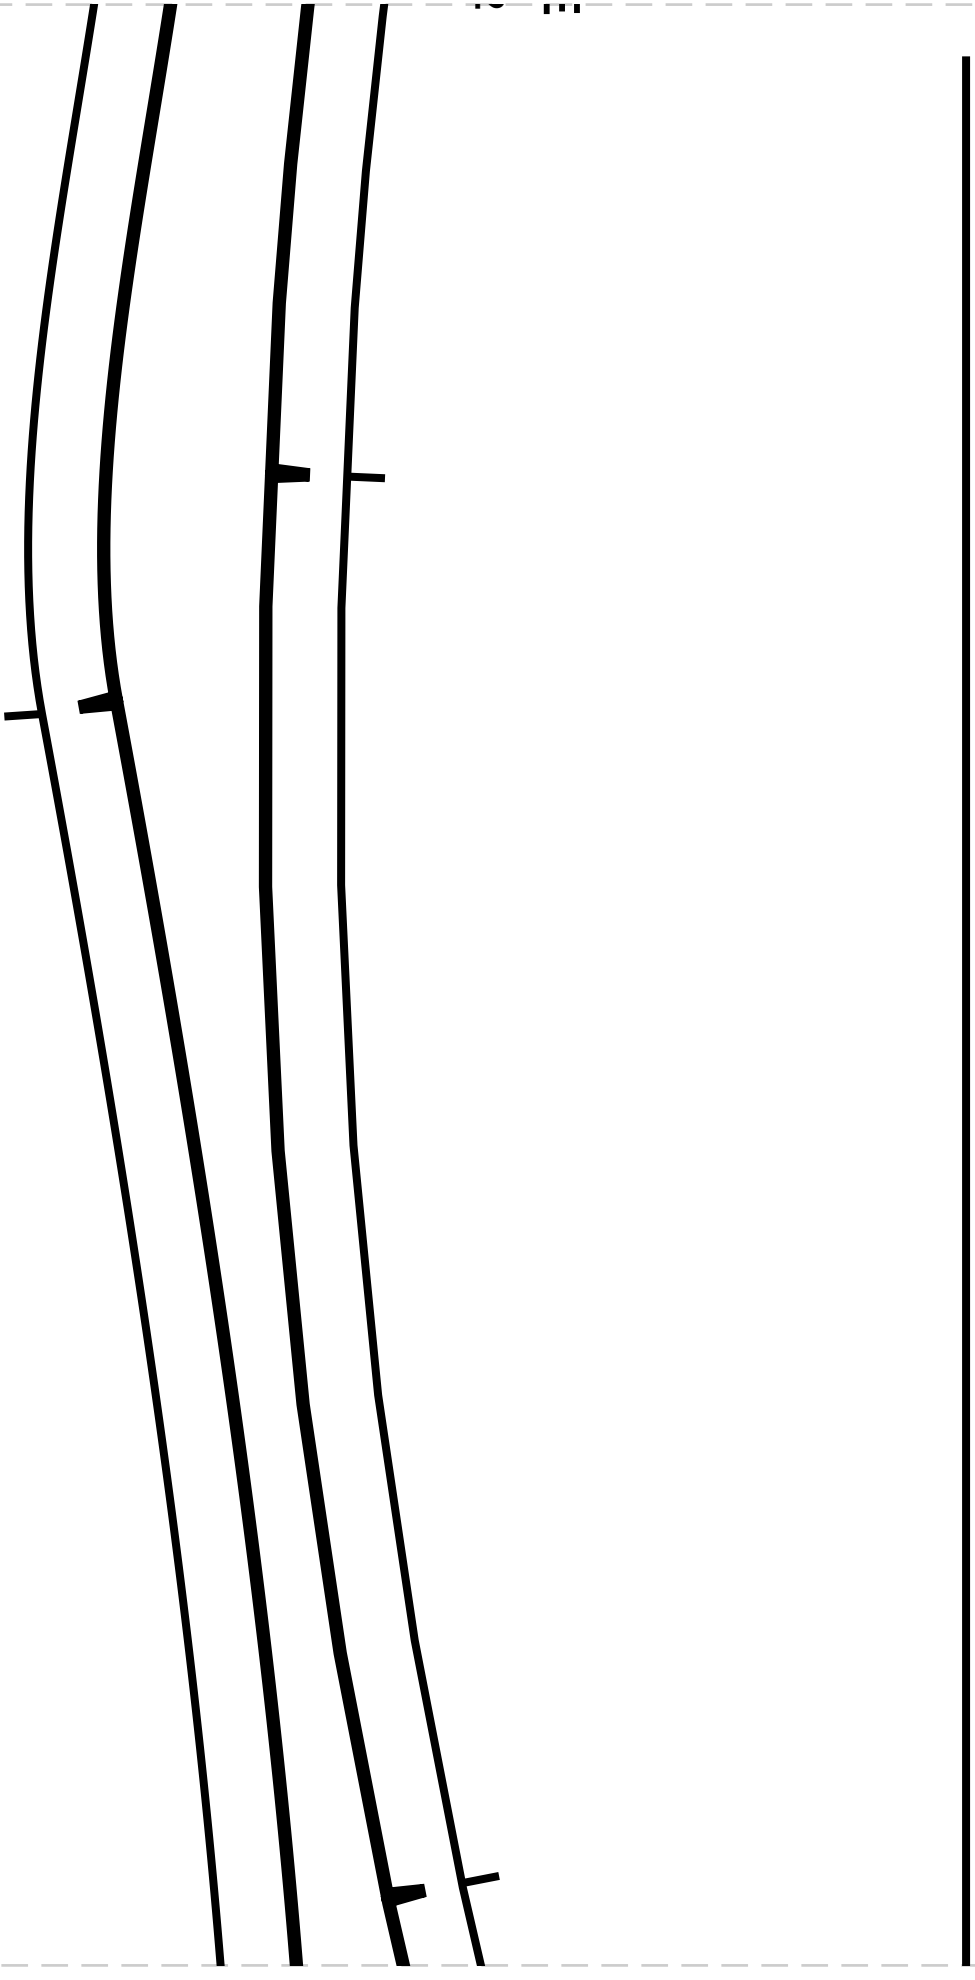

14/5

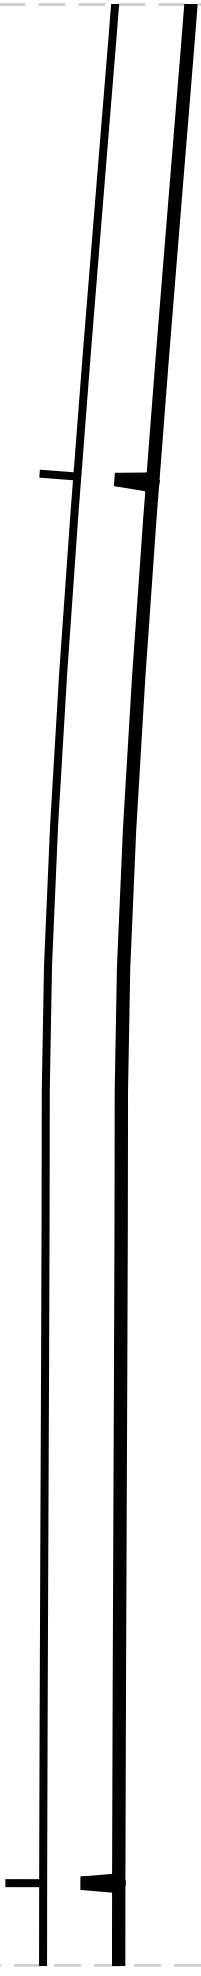


13


PATCH POCKET


MAIN FABRIC: Cut 2




15/1

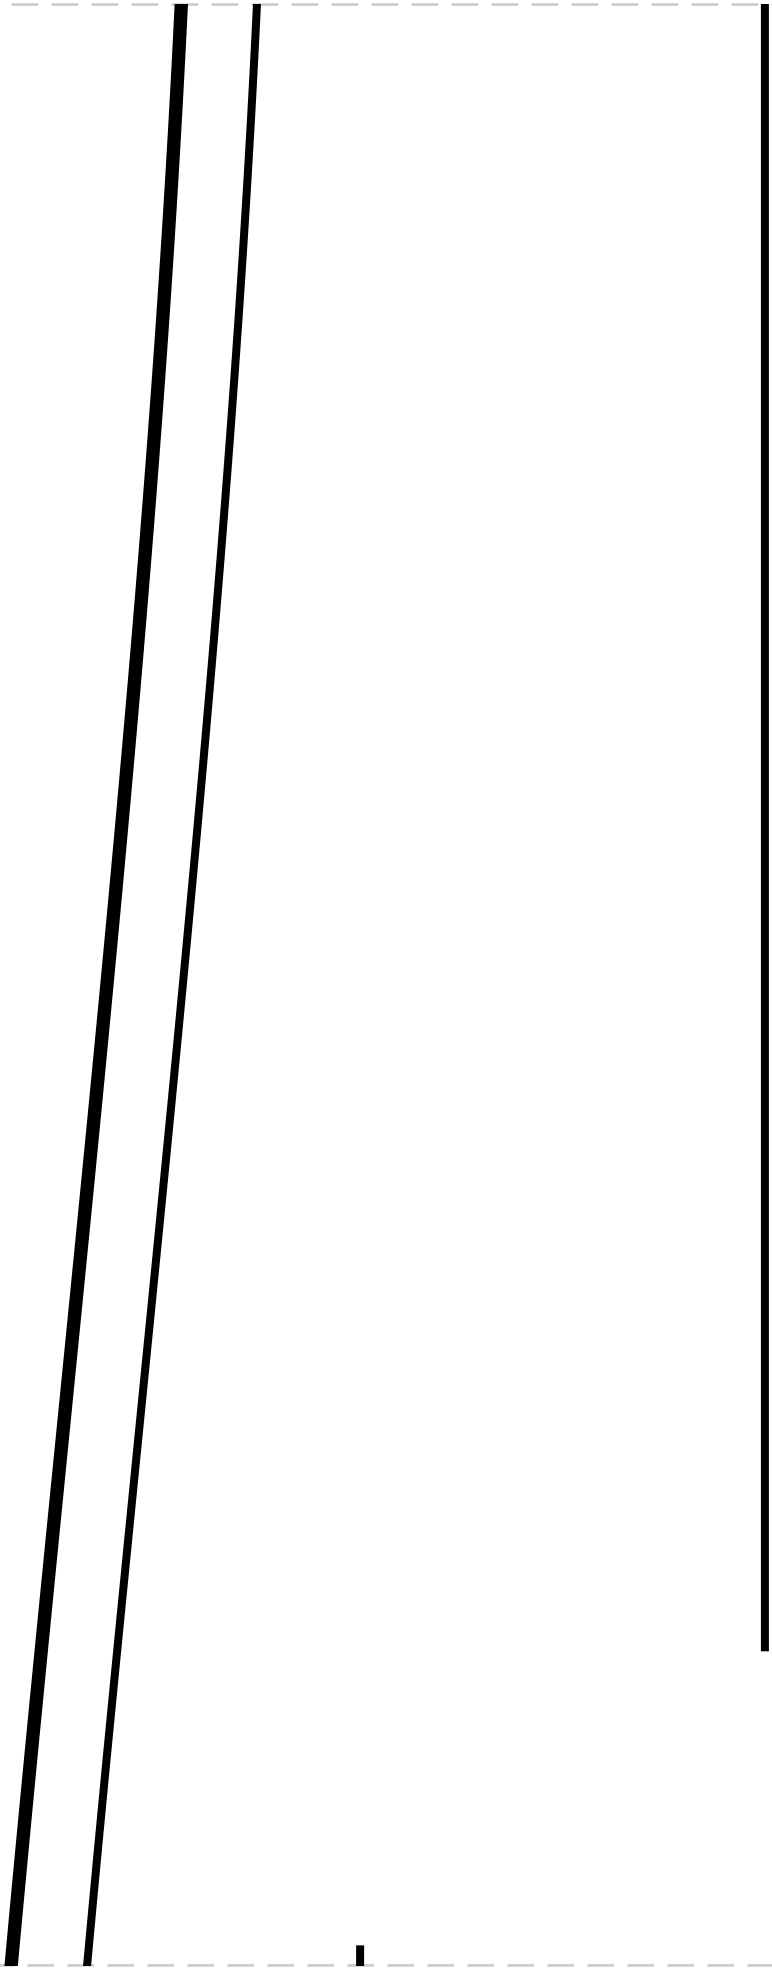


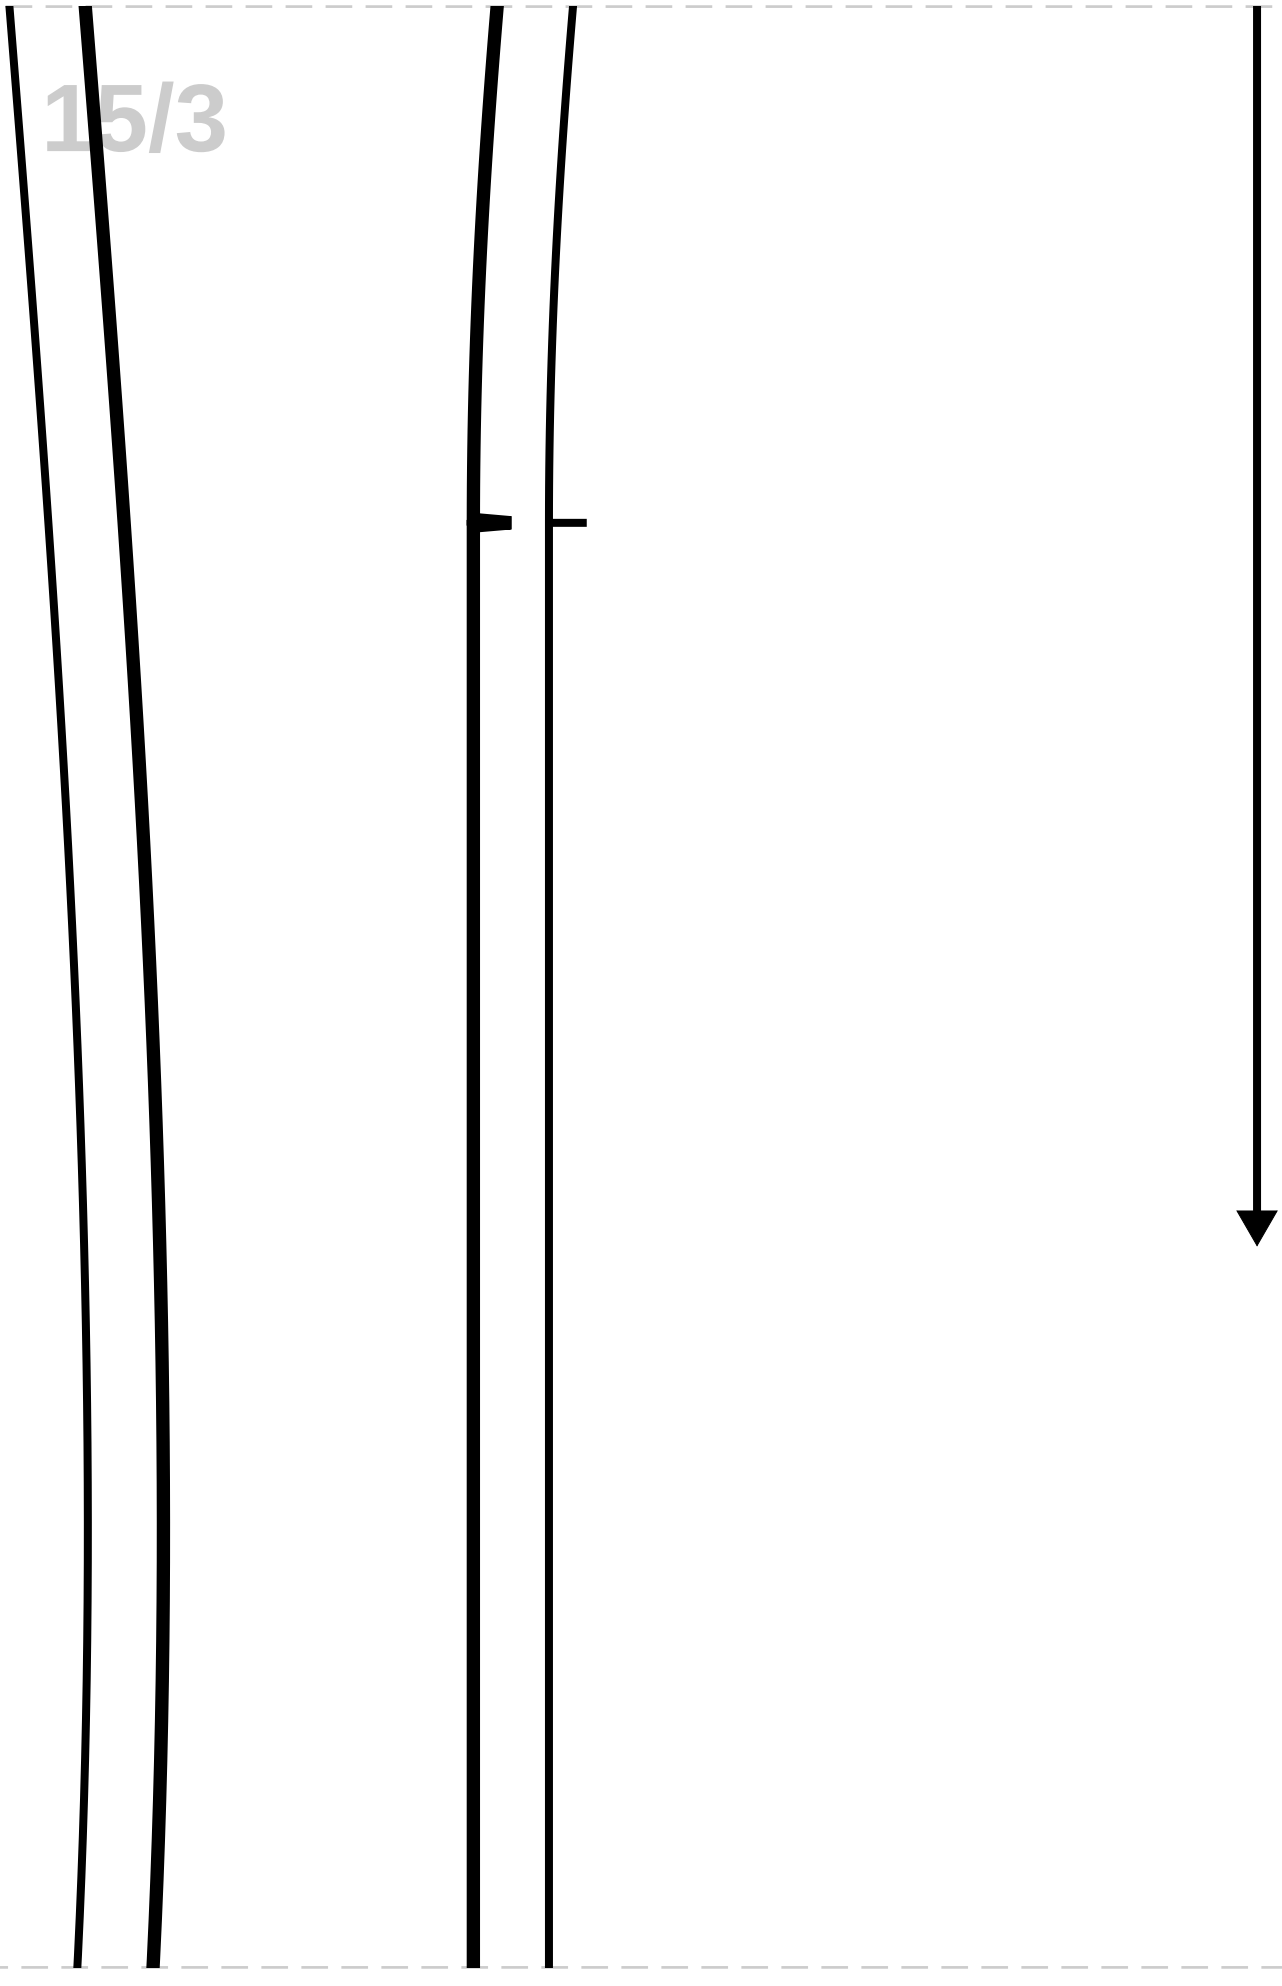


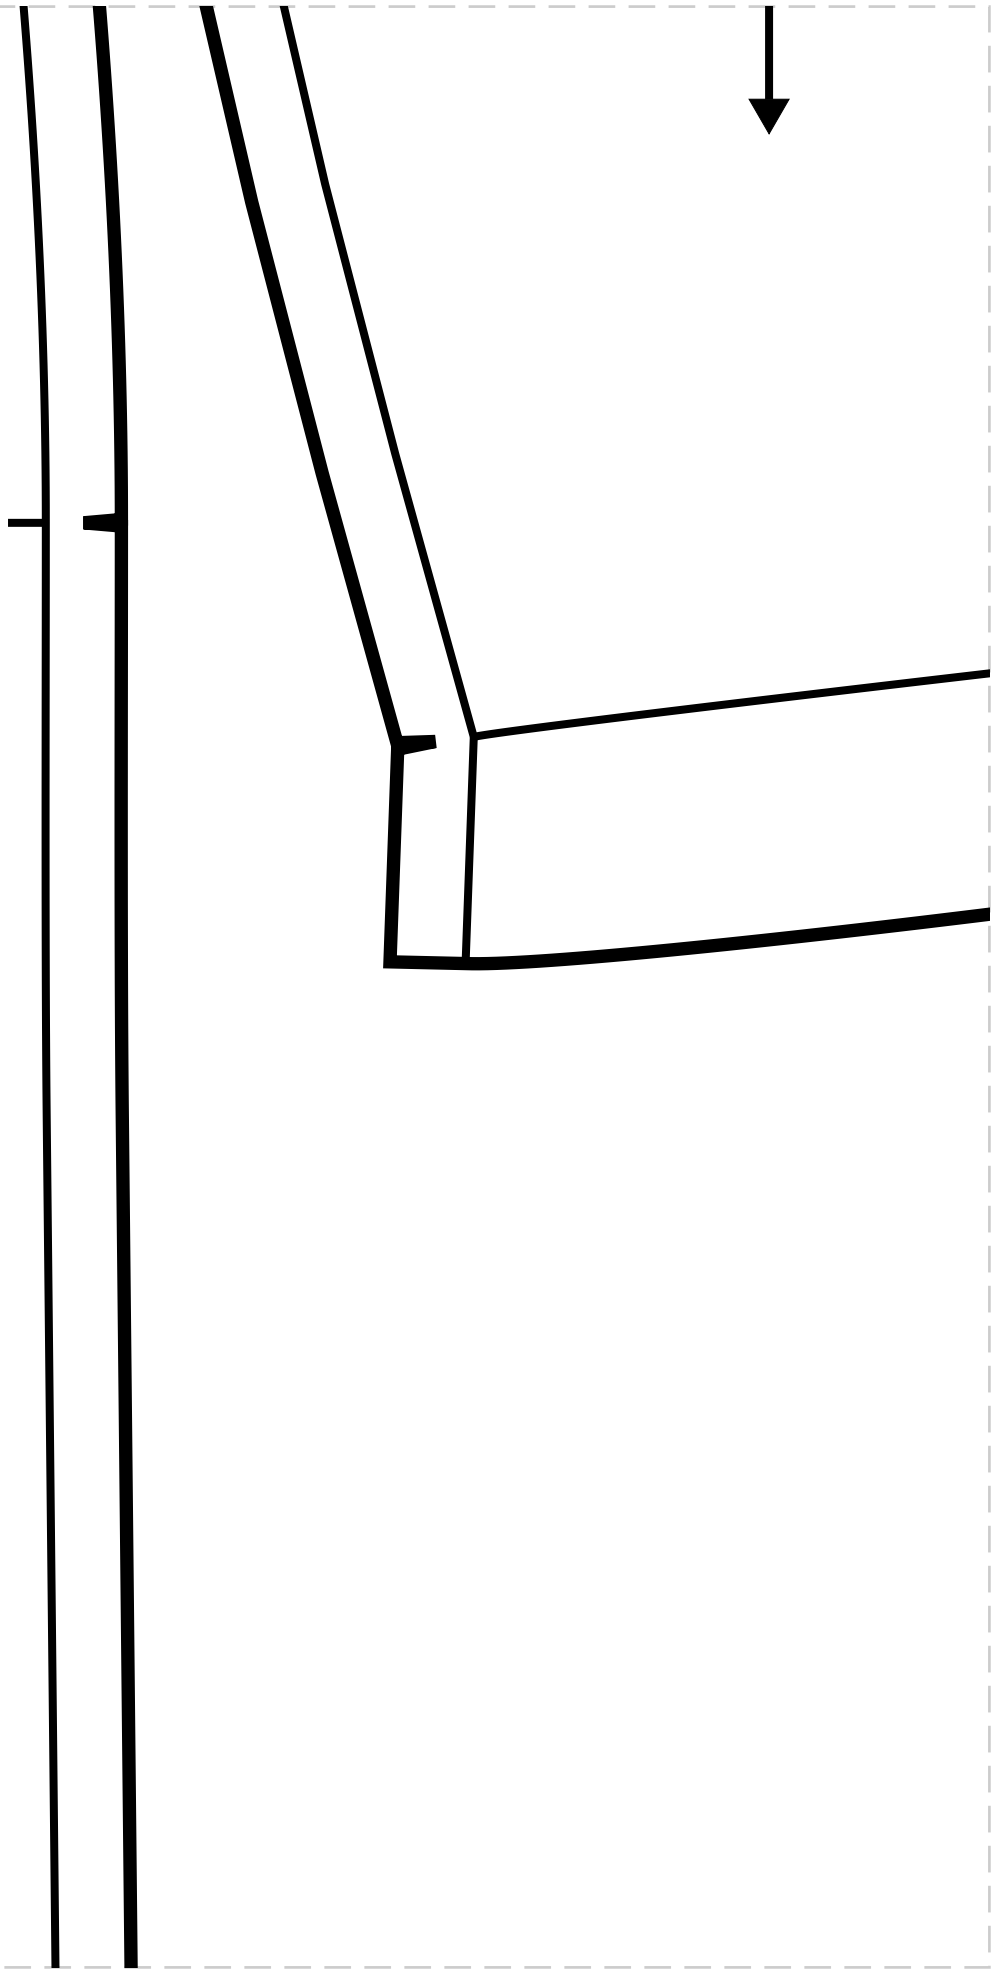


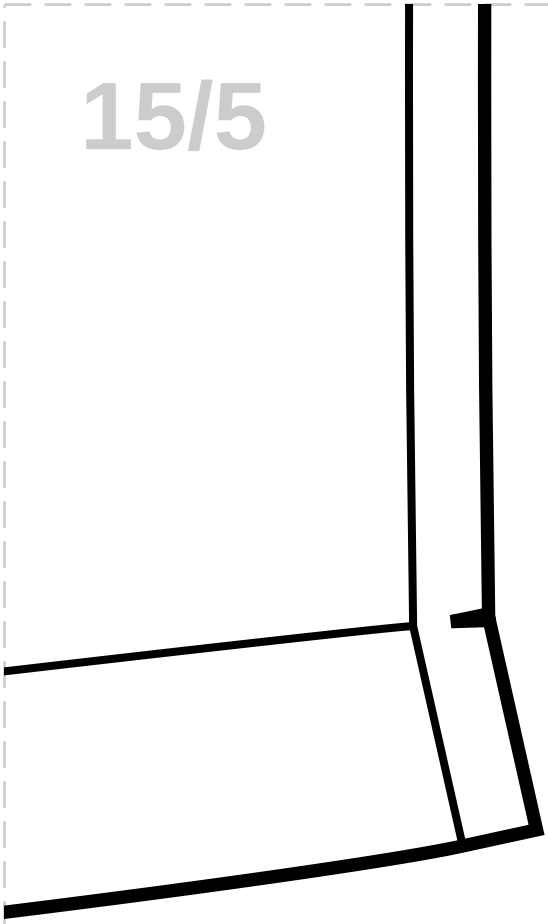

16/1

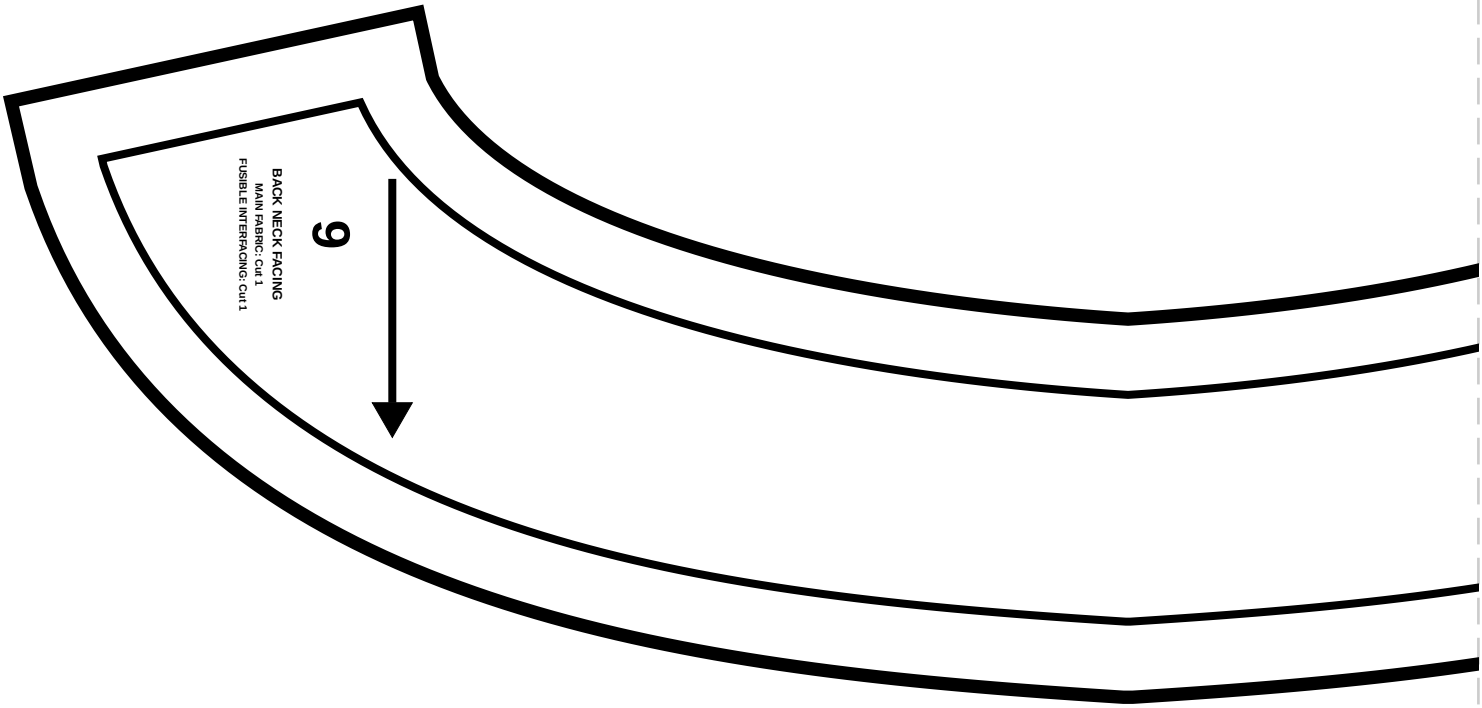
9
BACK NECK FACING
MAIN FABRIC: Cut 1
FUSIBLE INTERFACING: Cut 1

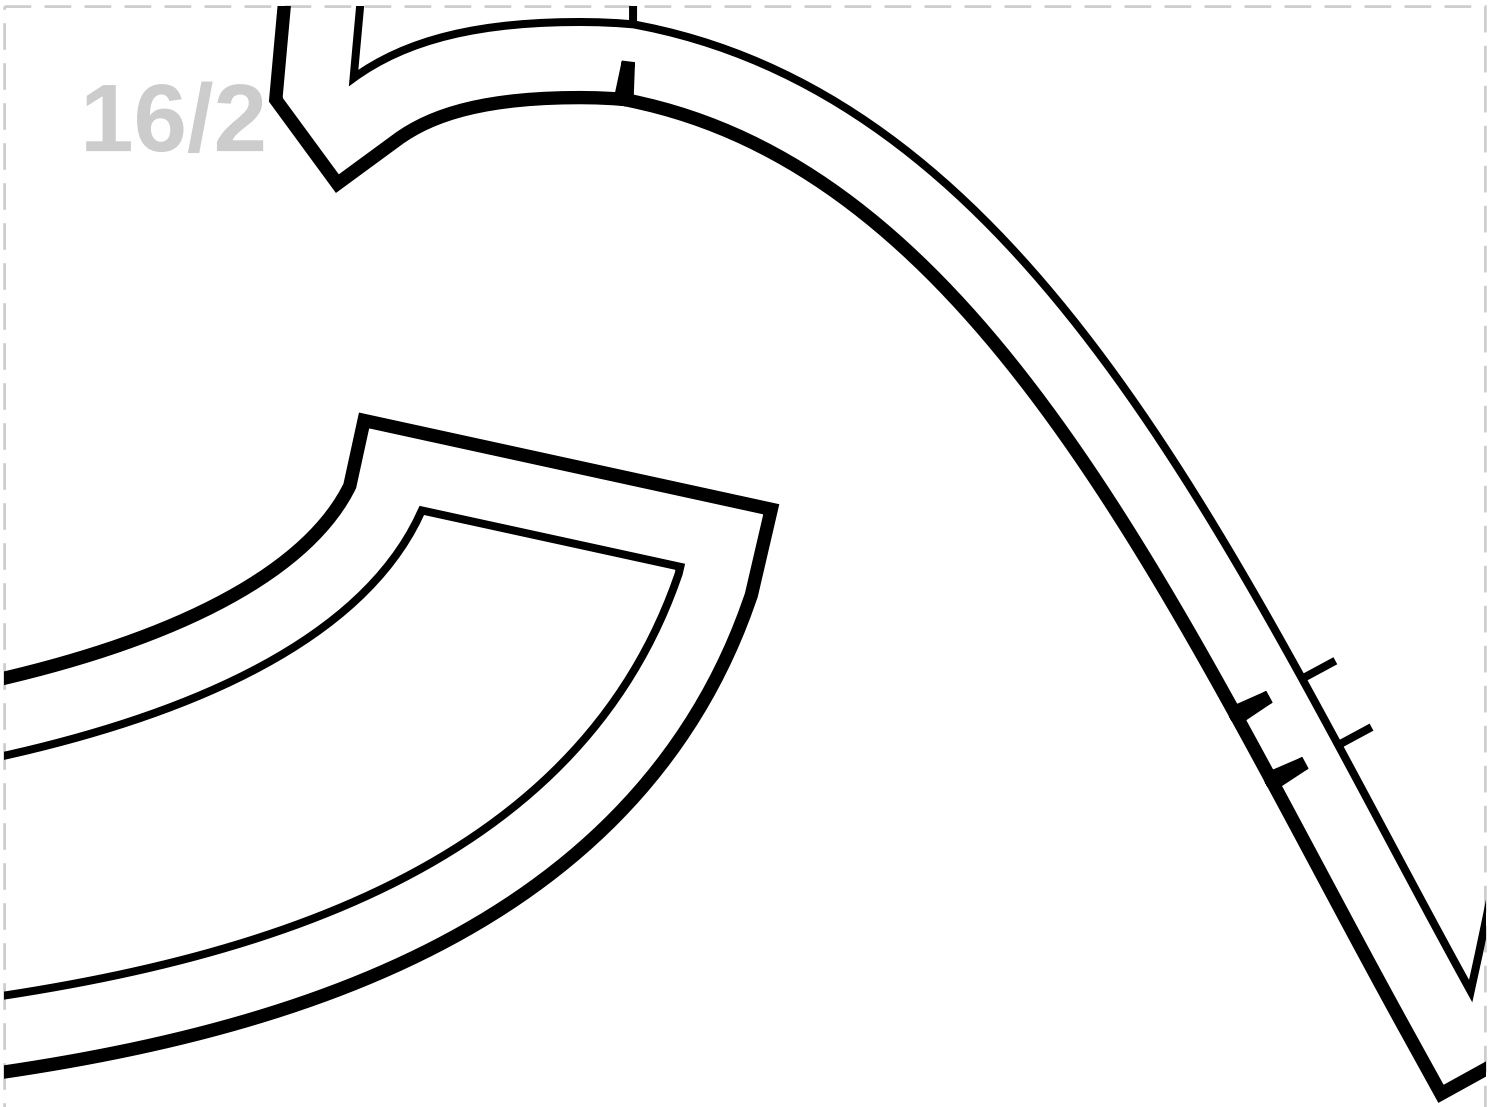

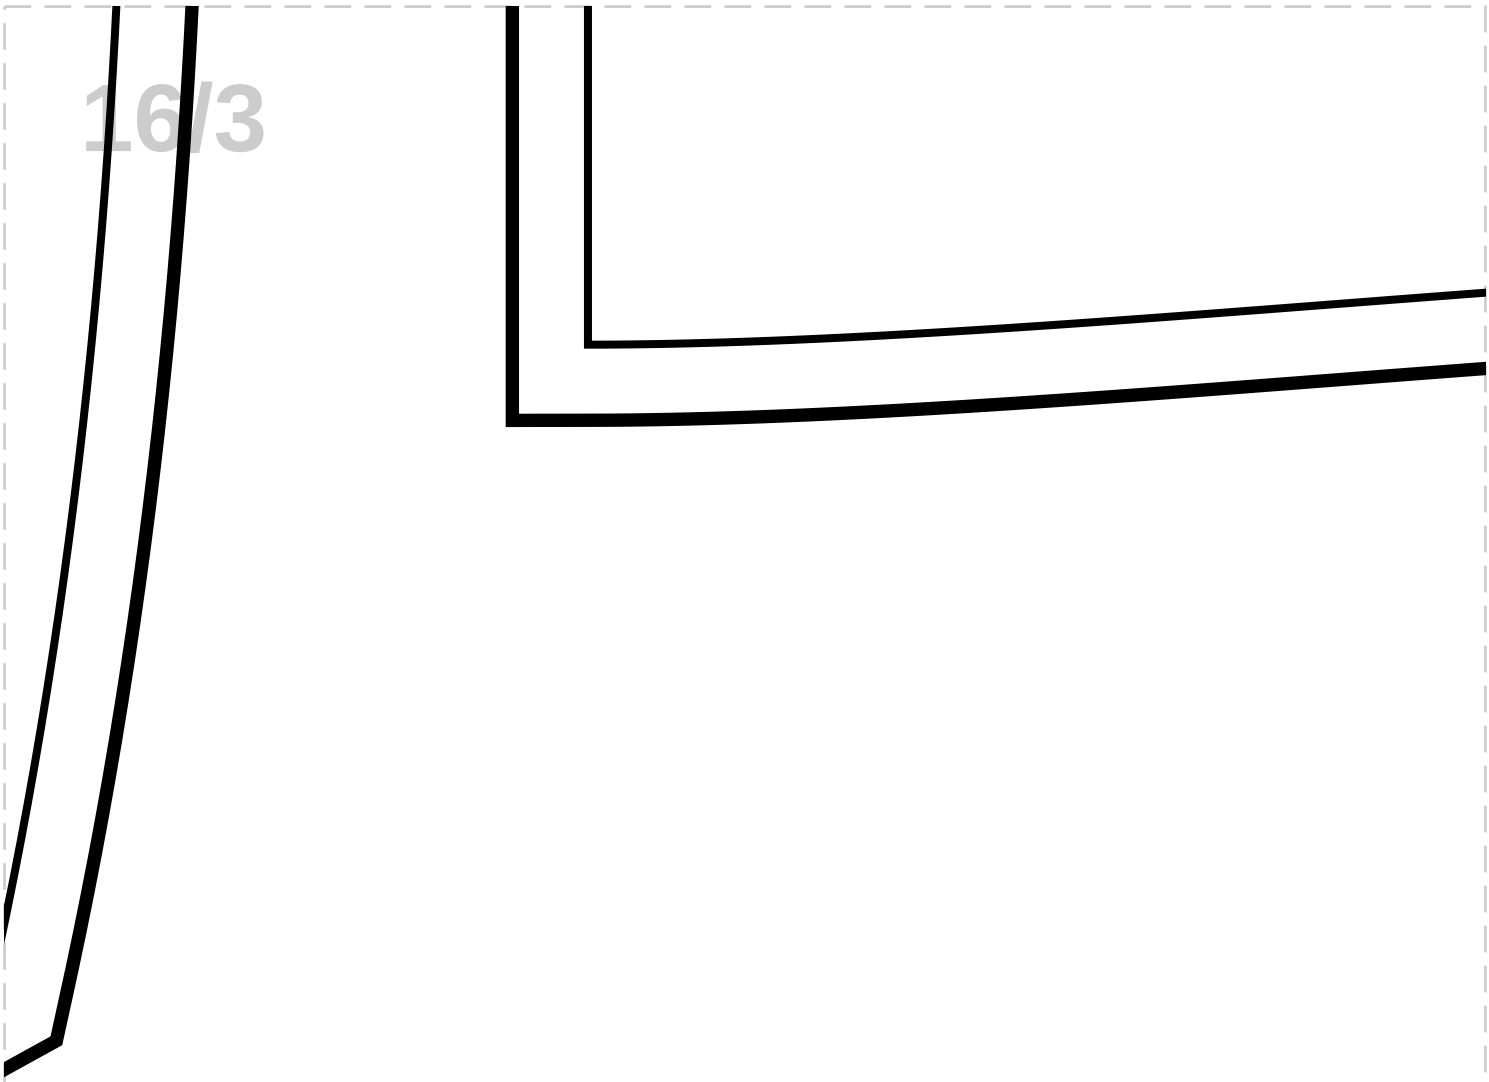

16/4

16/5