cozysewpatterns

Print this Calibration Test page first!

Size: Height: 167.75, Bust: 104.25, Waist: 87.5, Hips: 111
14

Notes

How to print

Printing


Once your Calibration Test Page has been printed, measure the 4”x 4” (10cm) scale box with a ruler. If the lengths match, you can confidently print your pattern. If the rulers do not match, set your print settings to 100% or Actual and retry.

Cutting

Your printouts will always have a dashed border to perfectly match your sheets. Cut off the right edge of each page. Be careful not to cut beyond the dashed mark, otherwise your patterns will not align accurately.

Tapping

Group each sheet by the second number marked on each pate i.e. in a group 1, there are: 1/1, 2/1, 3/1, 4/1, etc. In a group 2: 1/2, 2/2 etc. 2. Place page 1/1 on top of the page 2/1, overlapping the right side edge. Match corners and crosses and secure with a pin or tape. Then use a scotch tape to permanently attach the sheets together.

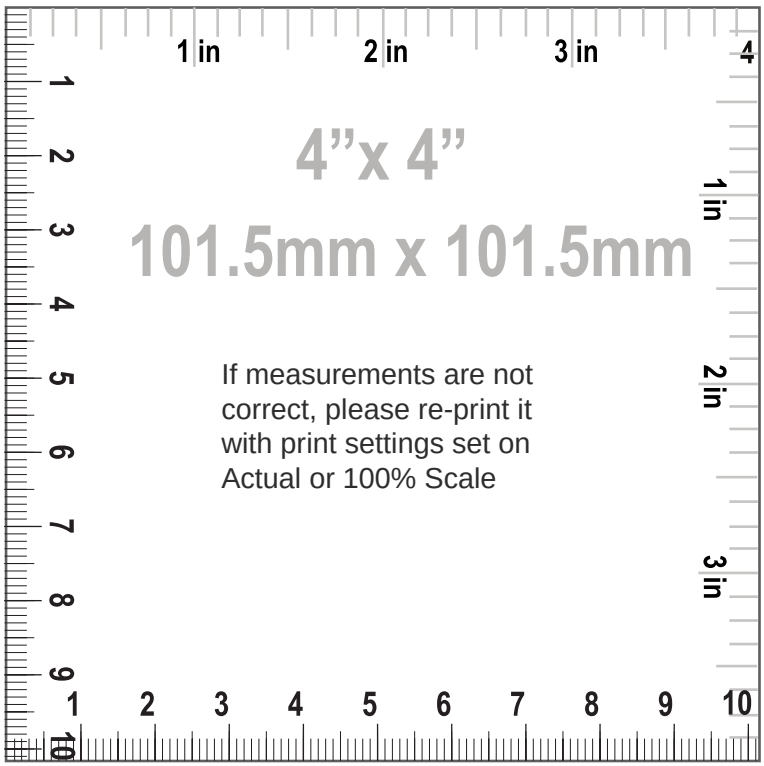

14
Seam Allowance: 1 (3/8 in)

Pattern pieces:

1. "FRONT", MAIN FABRIC: Cut 2
2. "BACK", MAIN FABRIC: Cut 1
3. "SLEEVE", MAIN FABRIC: Cut 2
4. "CUFF", MAIN FABRIC, FUSIBLE INTERFACING: Cut 2
5. "FRONT NECK FACING", MAIN FABRIC, FUSIBLE INTERFACING: Cut 2
6. "BACK NECK FACING", MAIN FABRIC, FUSIBLE INTERFACING: Cut 1
7. "COLLAR", MAIN FABRIC, FUSIBLE INTERFACING: Cut 2
8. "EDGING", MAIN FABRIC, FUSIBLE INTERFACING: Cut 2


Pattern Specs (Circumferences are divided by 2):


1. Hem max 3.00 none (1 1/8 in)
2. Seam allowance max 2.00 none (3/4 in)
3. Seam allowance p max 1.50 none (5/8 in)
4. Stretch factor 1.00 none (3/8 in)
5. Stretch factor horizontal 1.00 none (3/8 in)
6. Stretch factor vertical 1.00 none (3/8 in)
7. Front neck drop 15.75 cm (6 1/4 in)
8. Front length from HPS to hem 69.99 cm (27 1/2 in)
9. Across chest 54.96 cm (21 5/8 in)
10. Center front length to hem 54.24 cm (21 3/8 in)
11. Center back length to hem 64.51 cm (25 3/8 in)
12. Across front 40.89 cm (16 1/8 in)
13. Across back 36.56 cm (14 3/8 in)
14. Across shoulders 41.88 cm (16 1/2 in)
15. Side seam 32.96 cm (13 in)
16. Waist 47.43 cm (18 5/8 in)
17. Hips 60.44 cm (23 3/4 in)
18. Hemline sweep 75.46 cm (29 3/4 in)
19. Armhole length front 25.13 cm (9 7/8 in)
20. Armhole length back 29.12 cm (11 1/2 in)
21. Neck opening 21.40 cm (8 3/8 in)
22. Neckline length 64.63 cm (25 1/2 in)
23. Back neck drop 3.53 cm (1 3/8 in)


24. Shoulder width 9.74 cm (3 7/8 in)
25. Bust dart to bust dart 25.52 cm (10 in)
26. Sleeve length 55.58 cm (21 7/8 in)
27. Sleeve upper arm width 39.15 cm (15 3/8 in)
28. Cuff width 4.00 cm (1 5/8 in)
29. Cuff length 24.81 cm (9 3/4 in)
30. Sleeve cap length 55.71 none (21 7/8 in)
31. Cuff button diameter 0.50 cm (1/4 in)
32. Cuff buttons quantity 2.00 pc
33. Front exposed 7mm zipper length 54.26 cm (21 3/8 in)
34. Collar width 9.50 cm (3 3/4 in)
35. Collar edges length 9.00 cm (3 1/2 in)

cozysewpatterns

Paper Size: A4;
Print Actual Size (100% Scale);

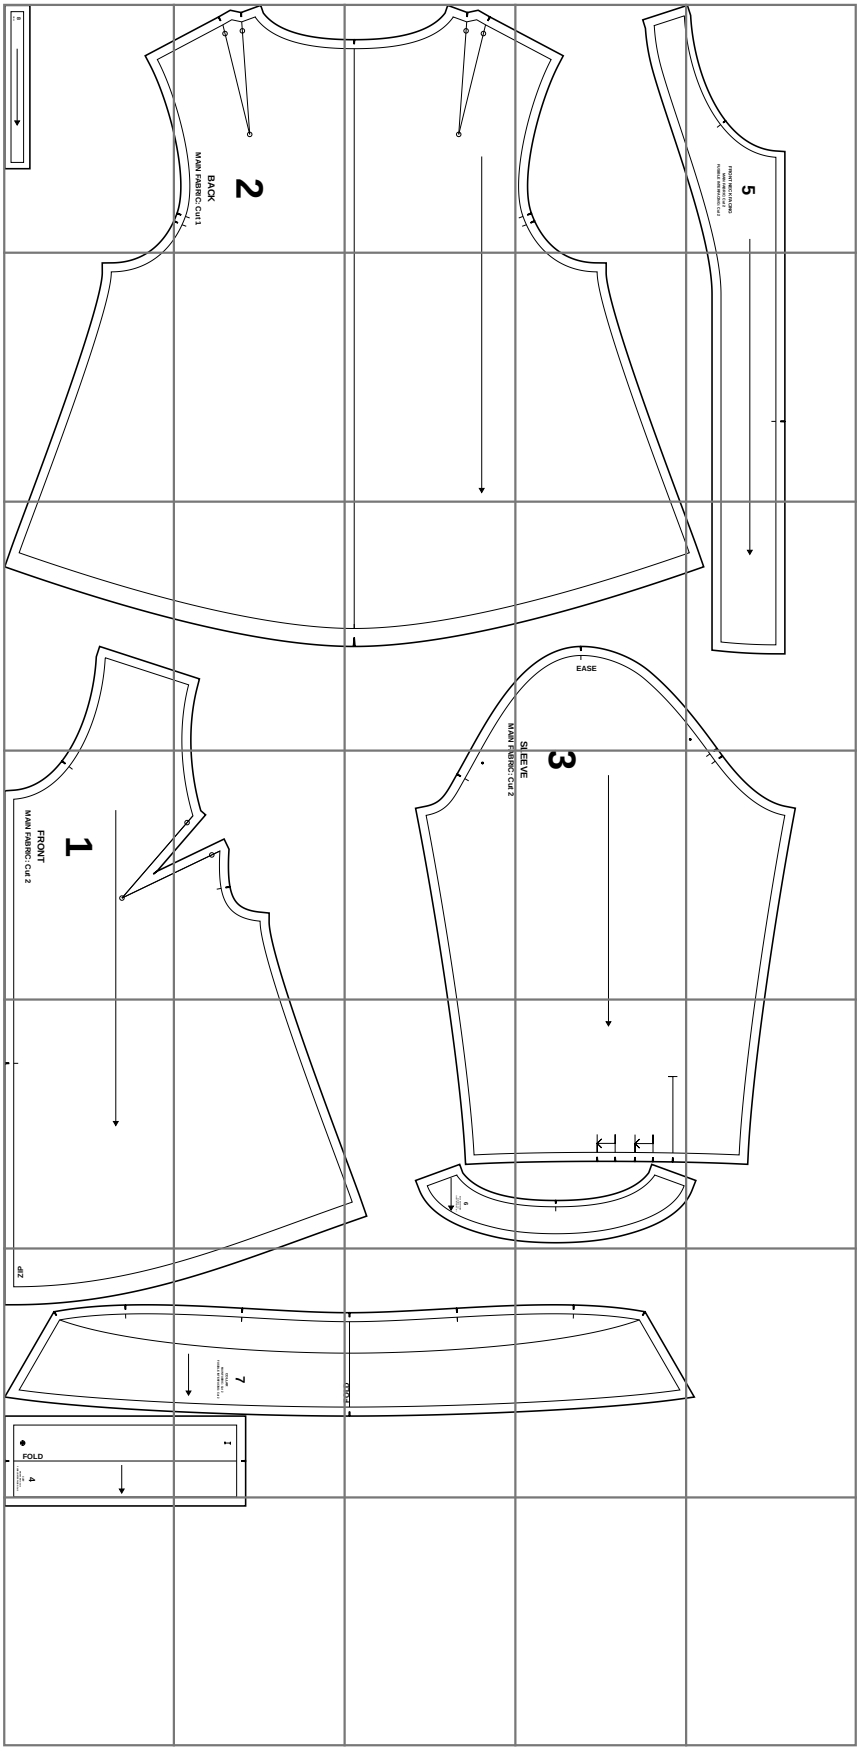

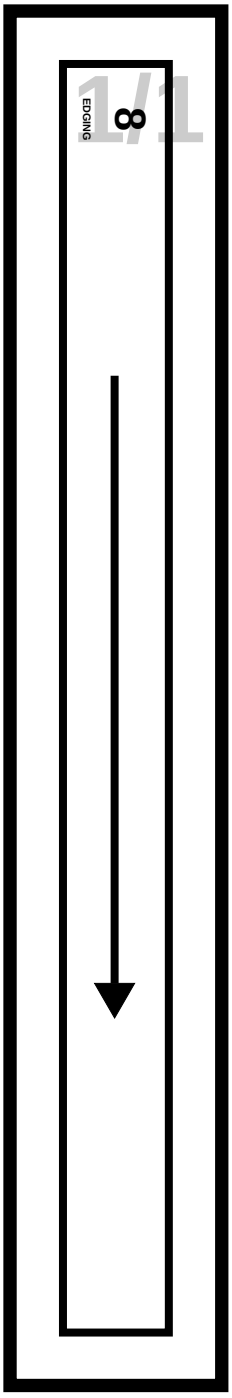
EDGING
8
1/1

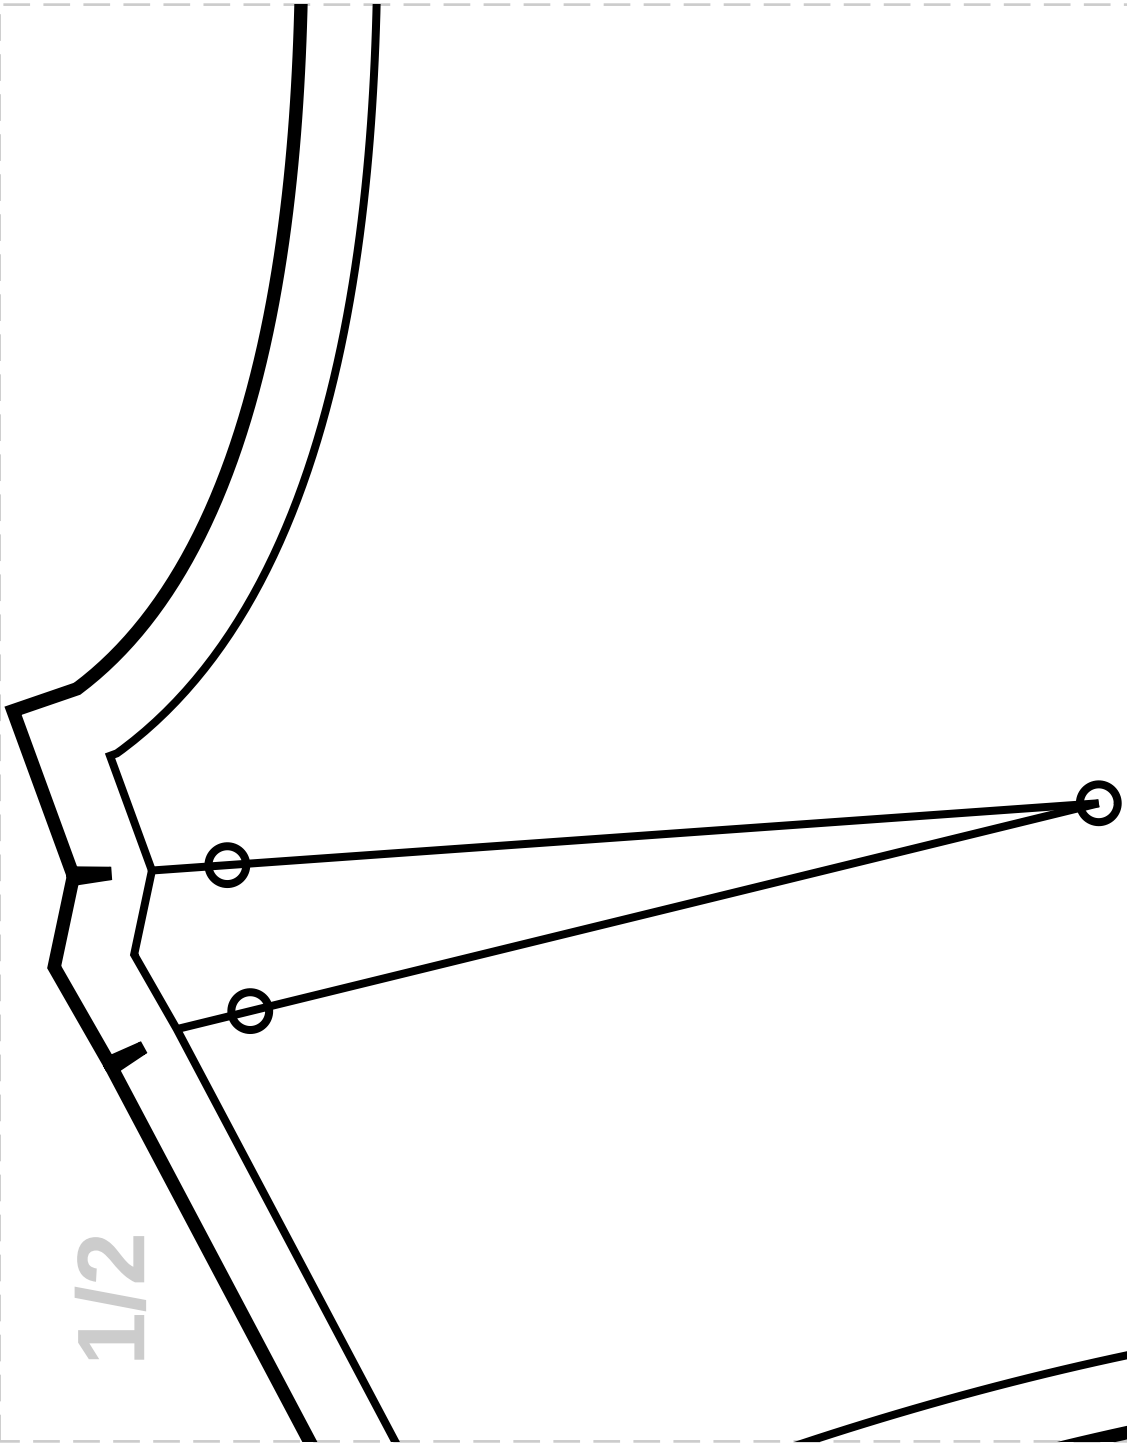



2


BACK

MAIN FABRIC: Cut 1



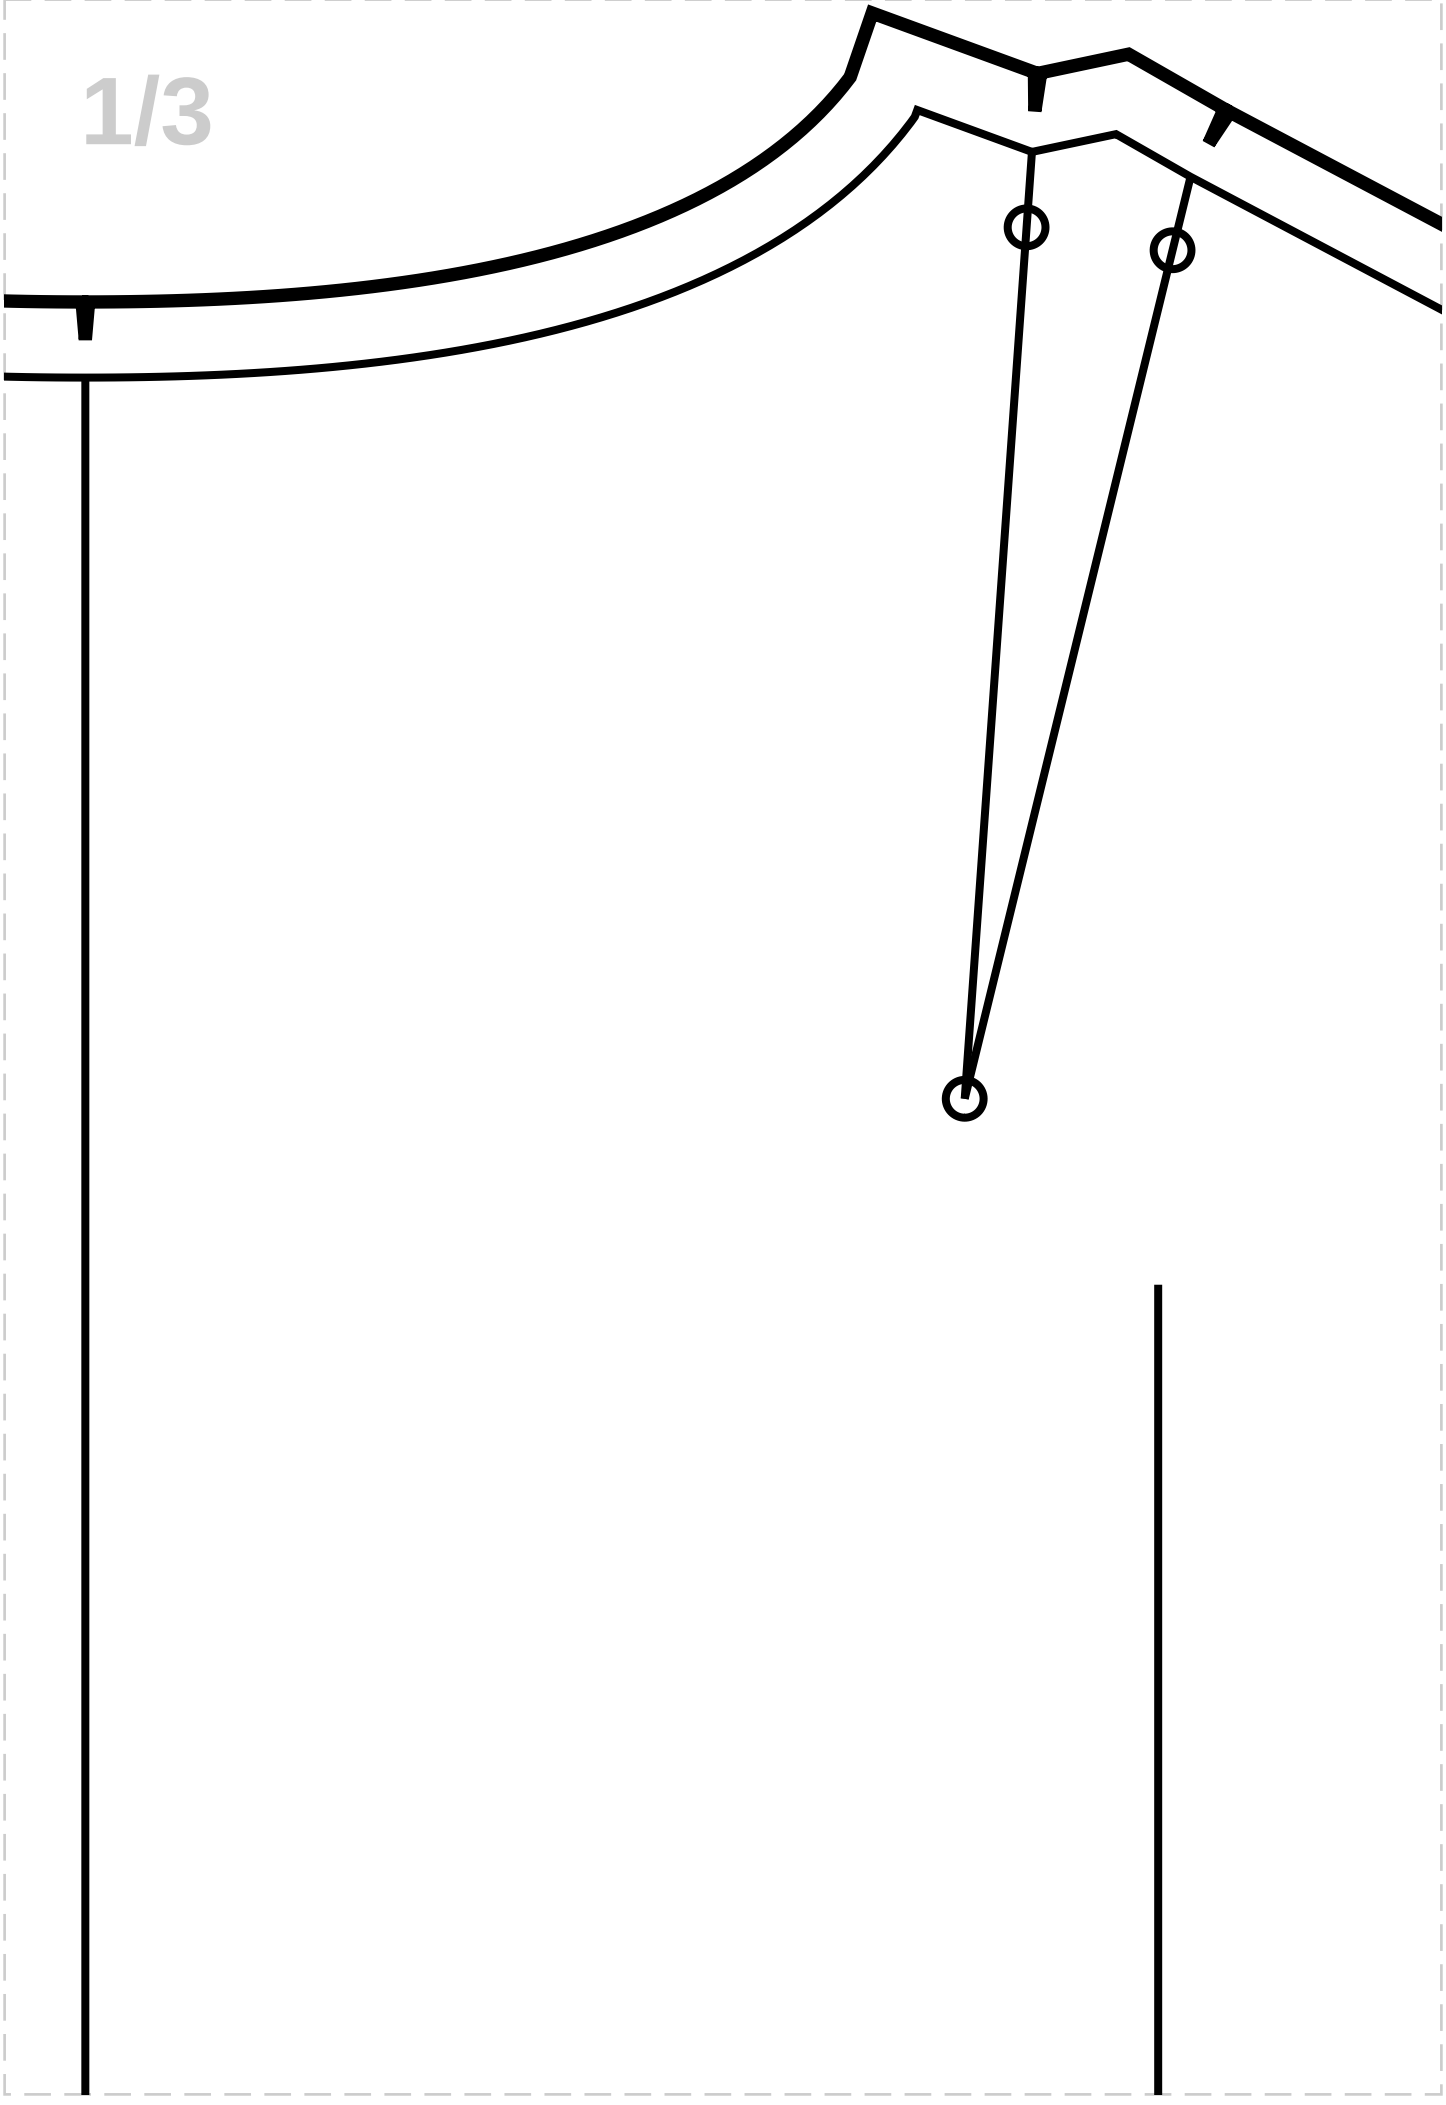

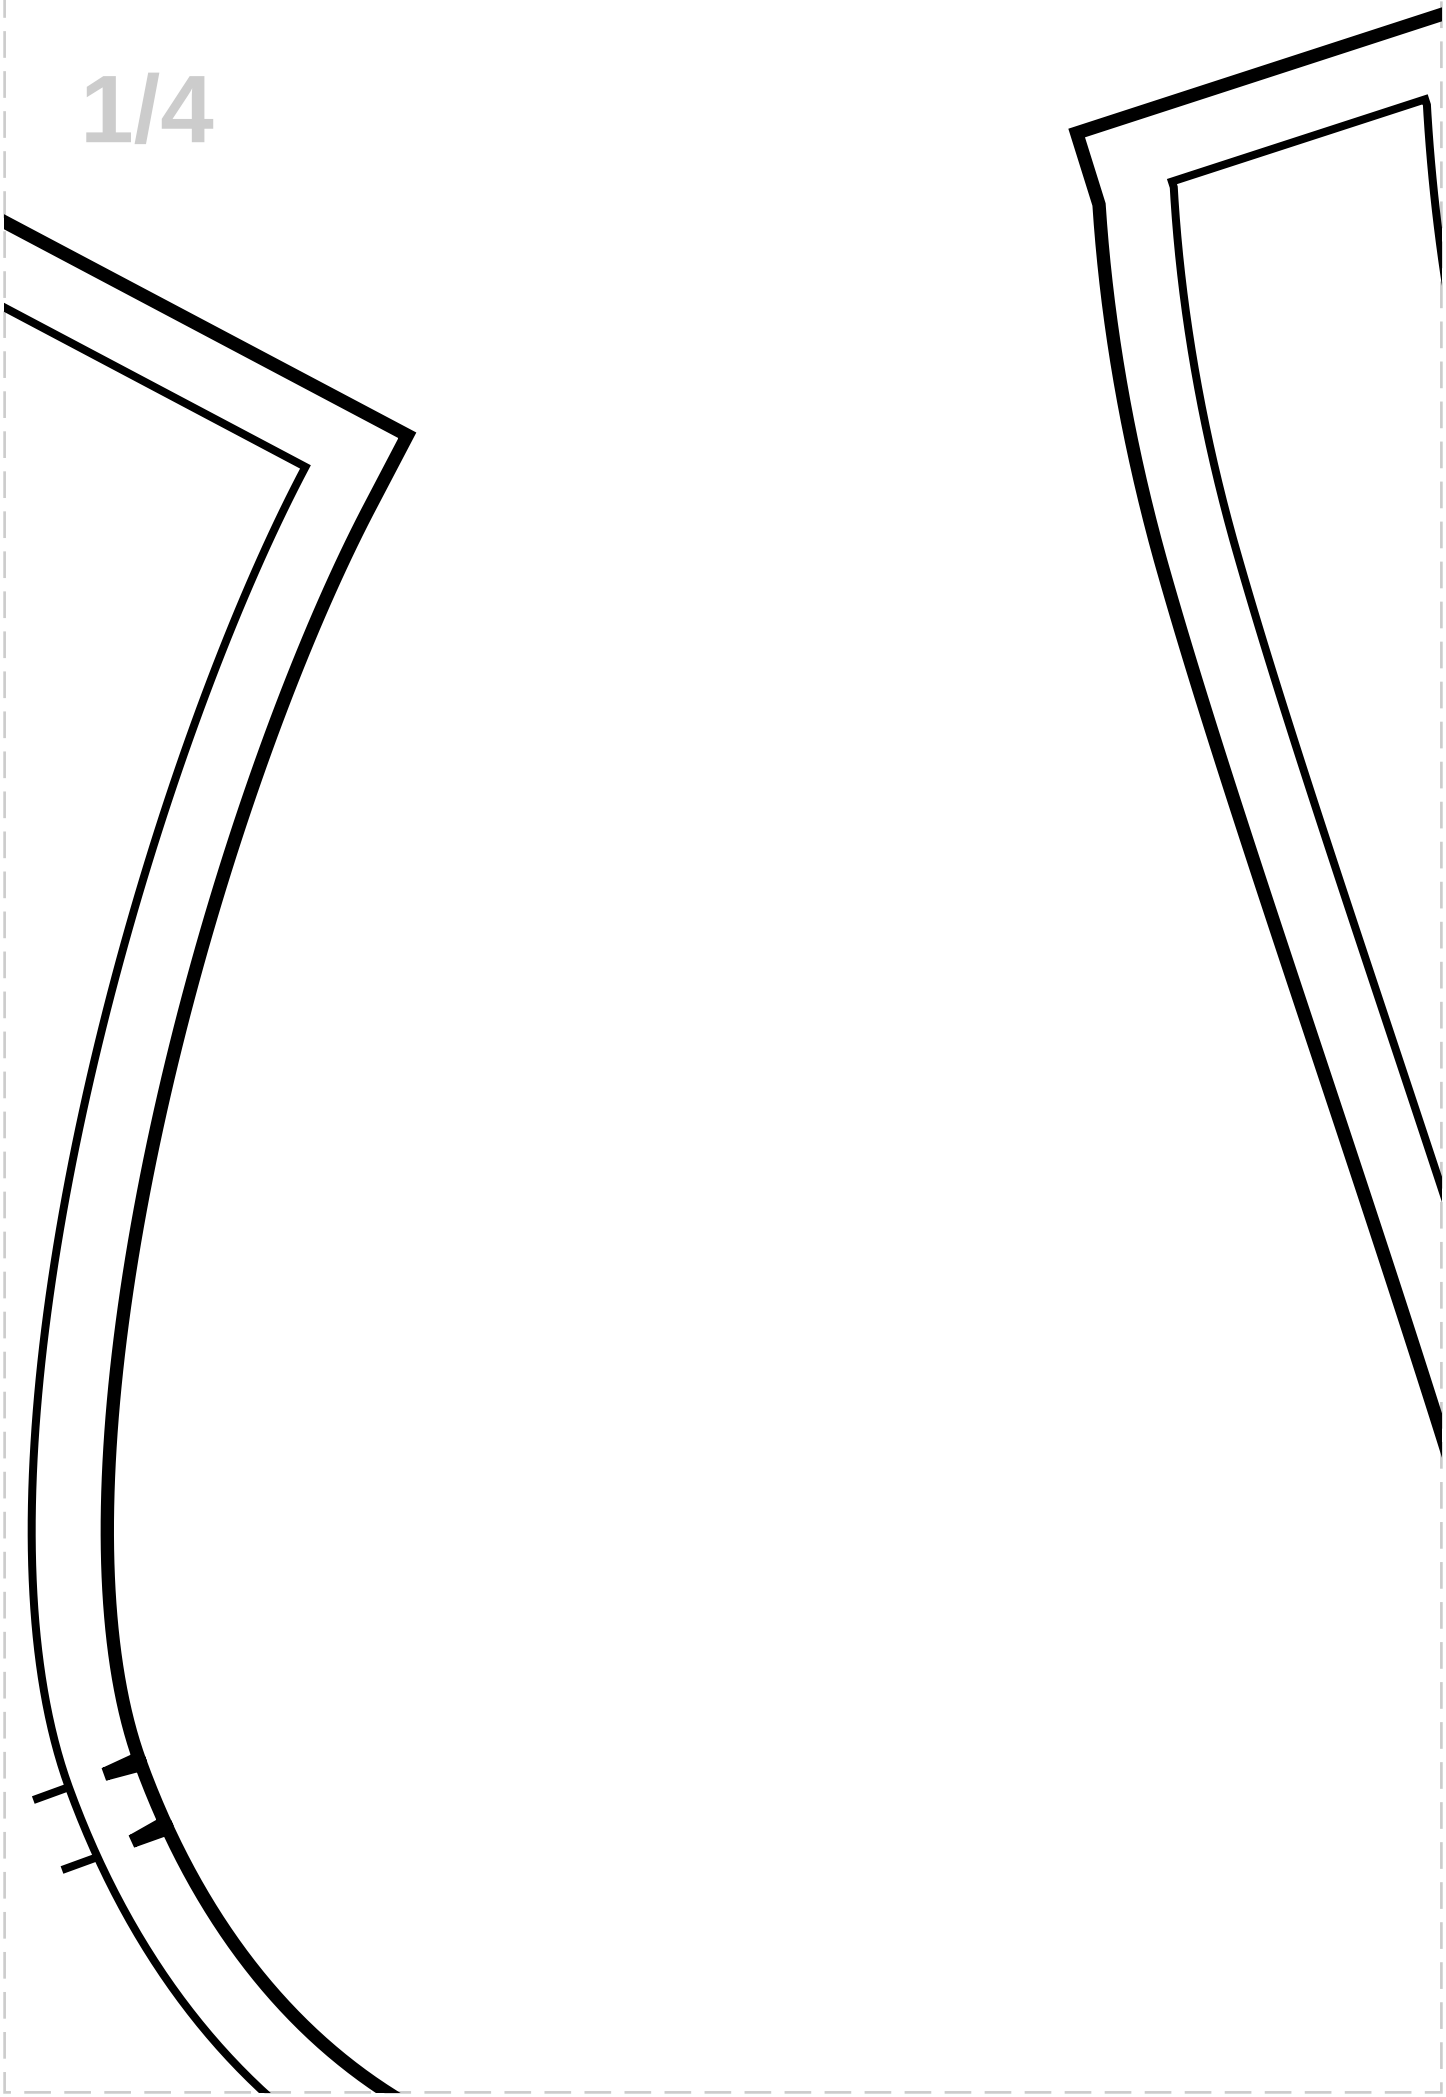

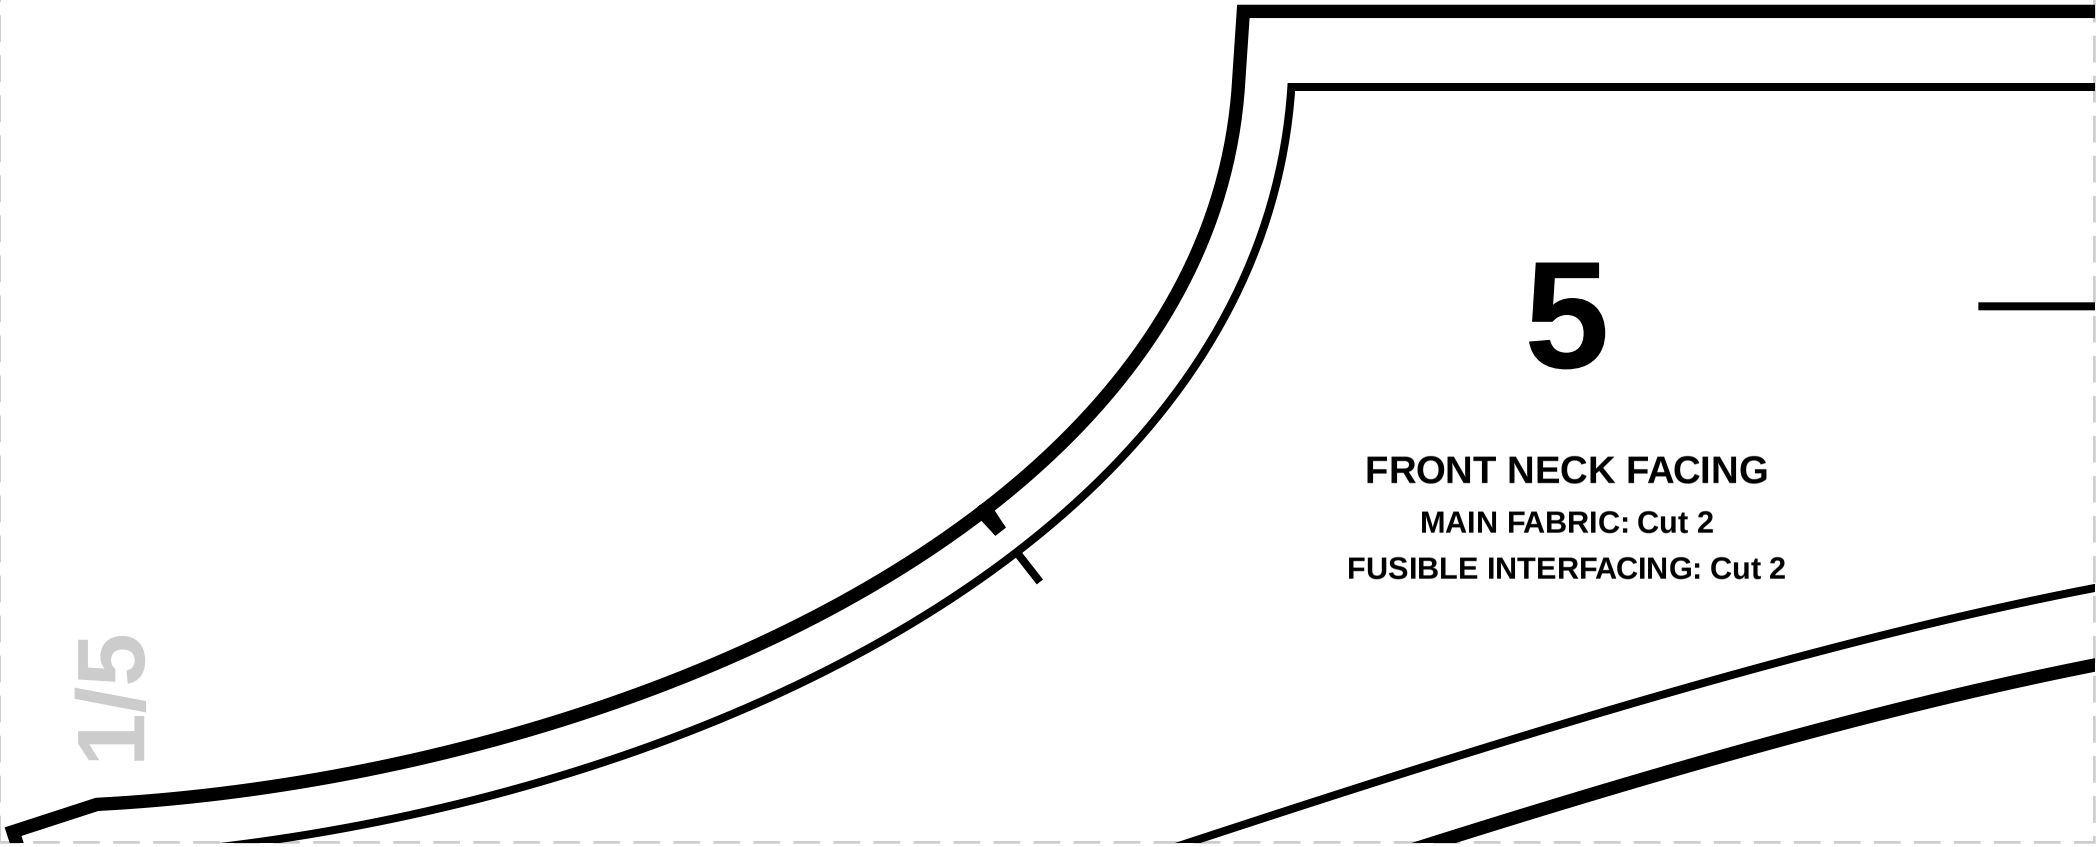


5


FRONT NECK FACING


MAIN FABRIC: Cut 2


FUSIBLE INTERFACING: Cut 2


2/1

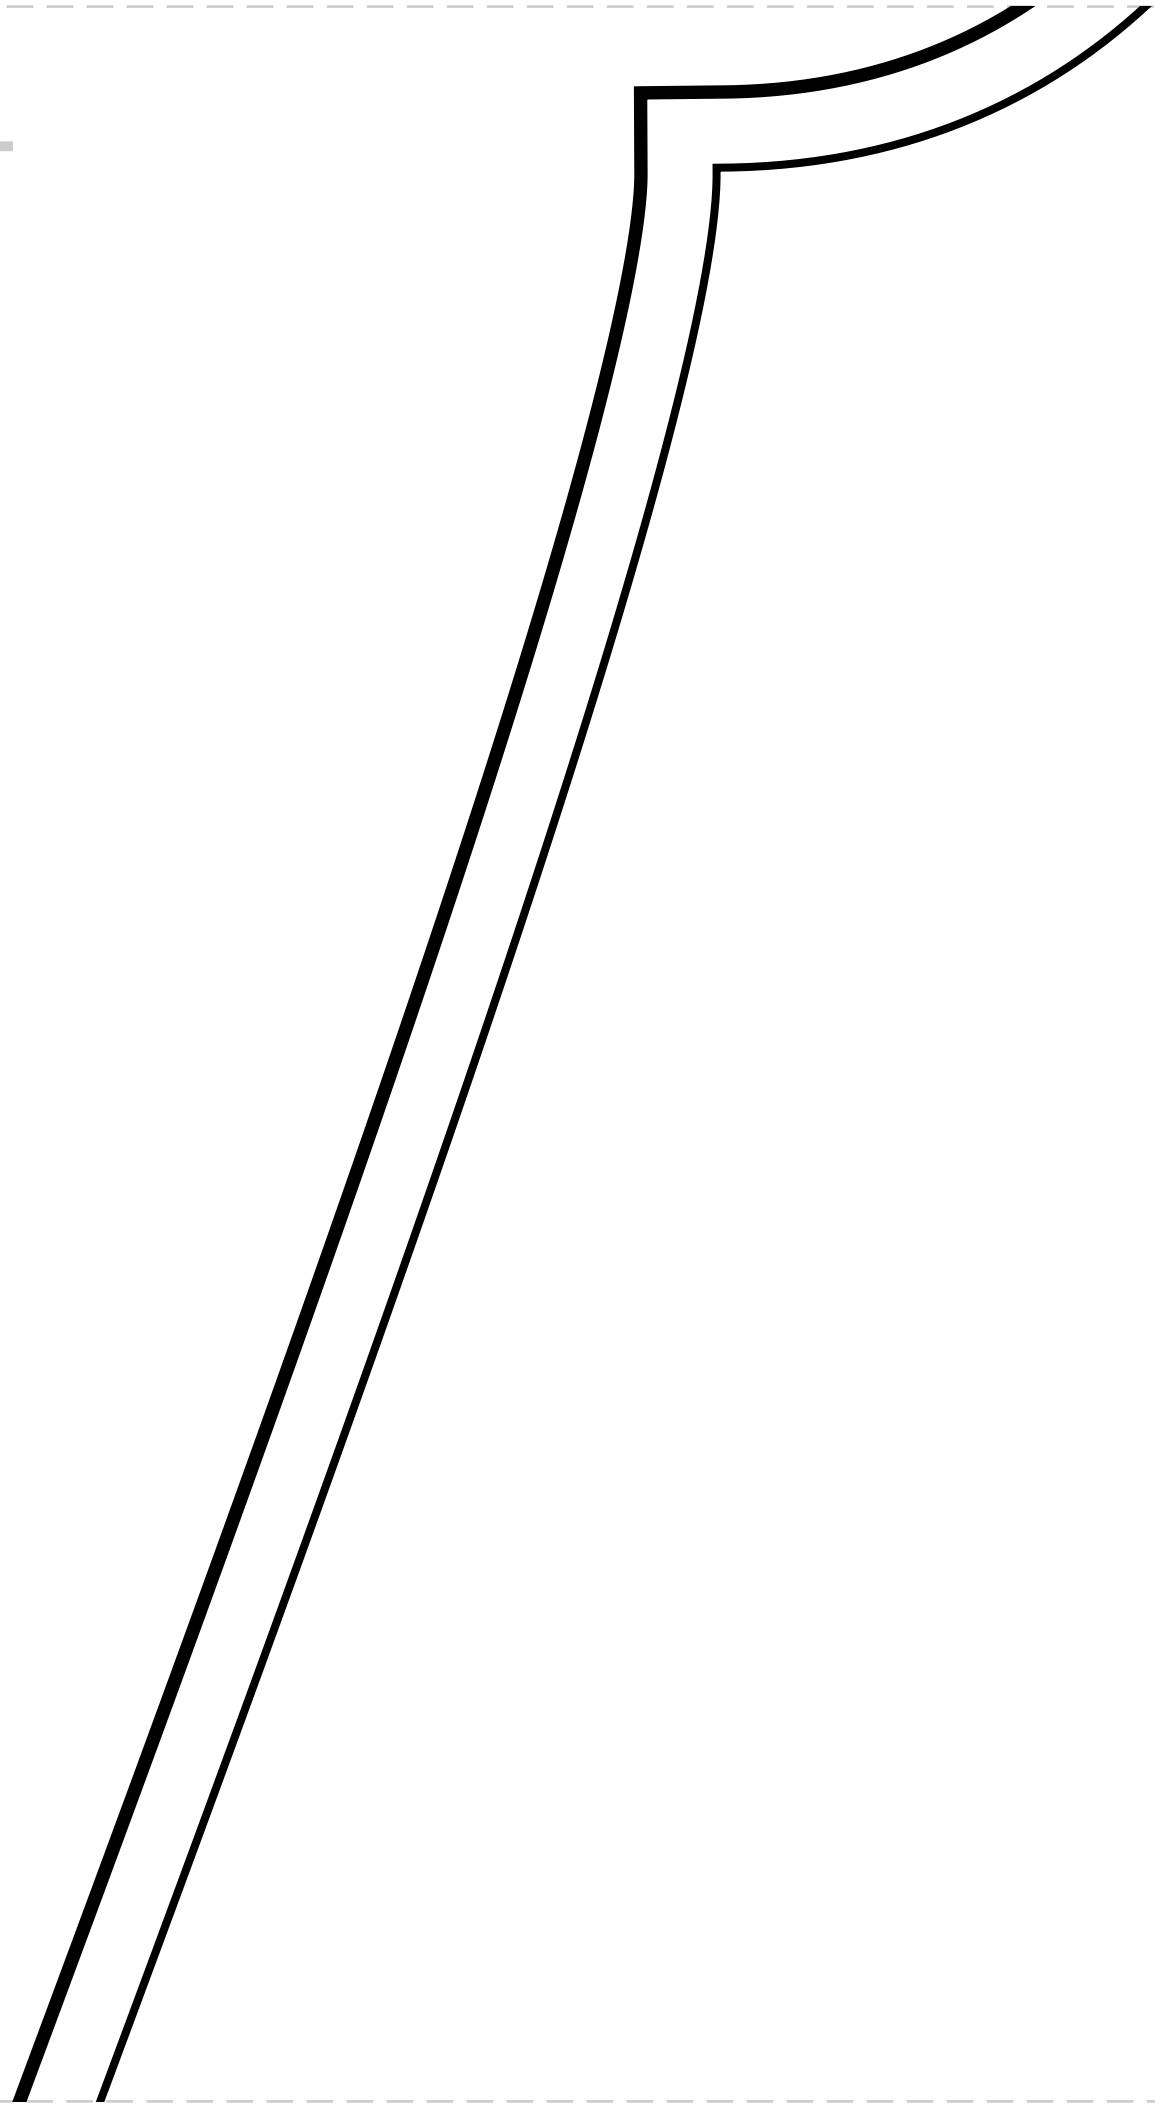


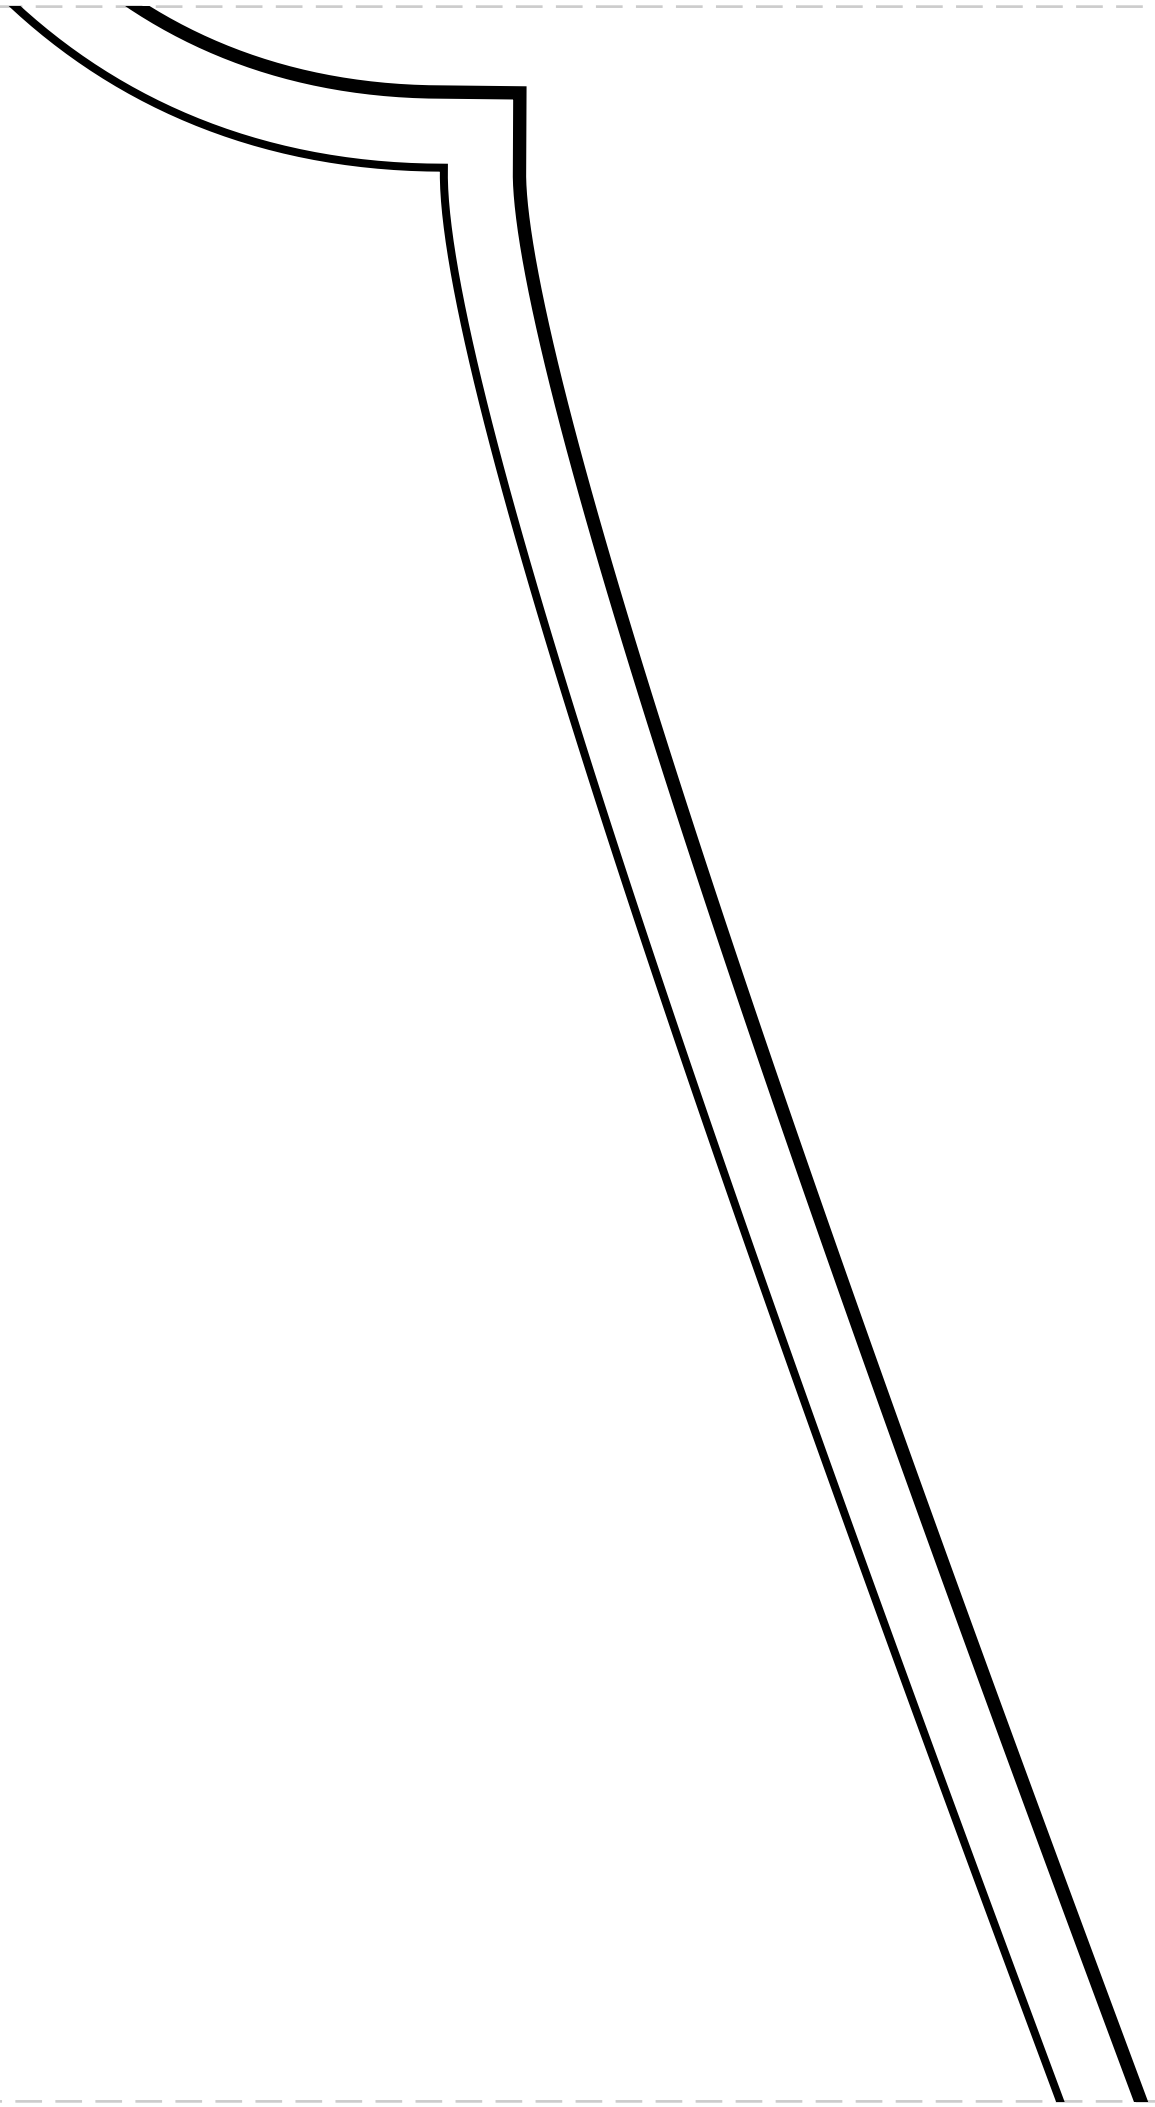


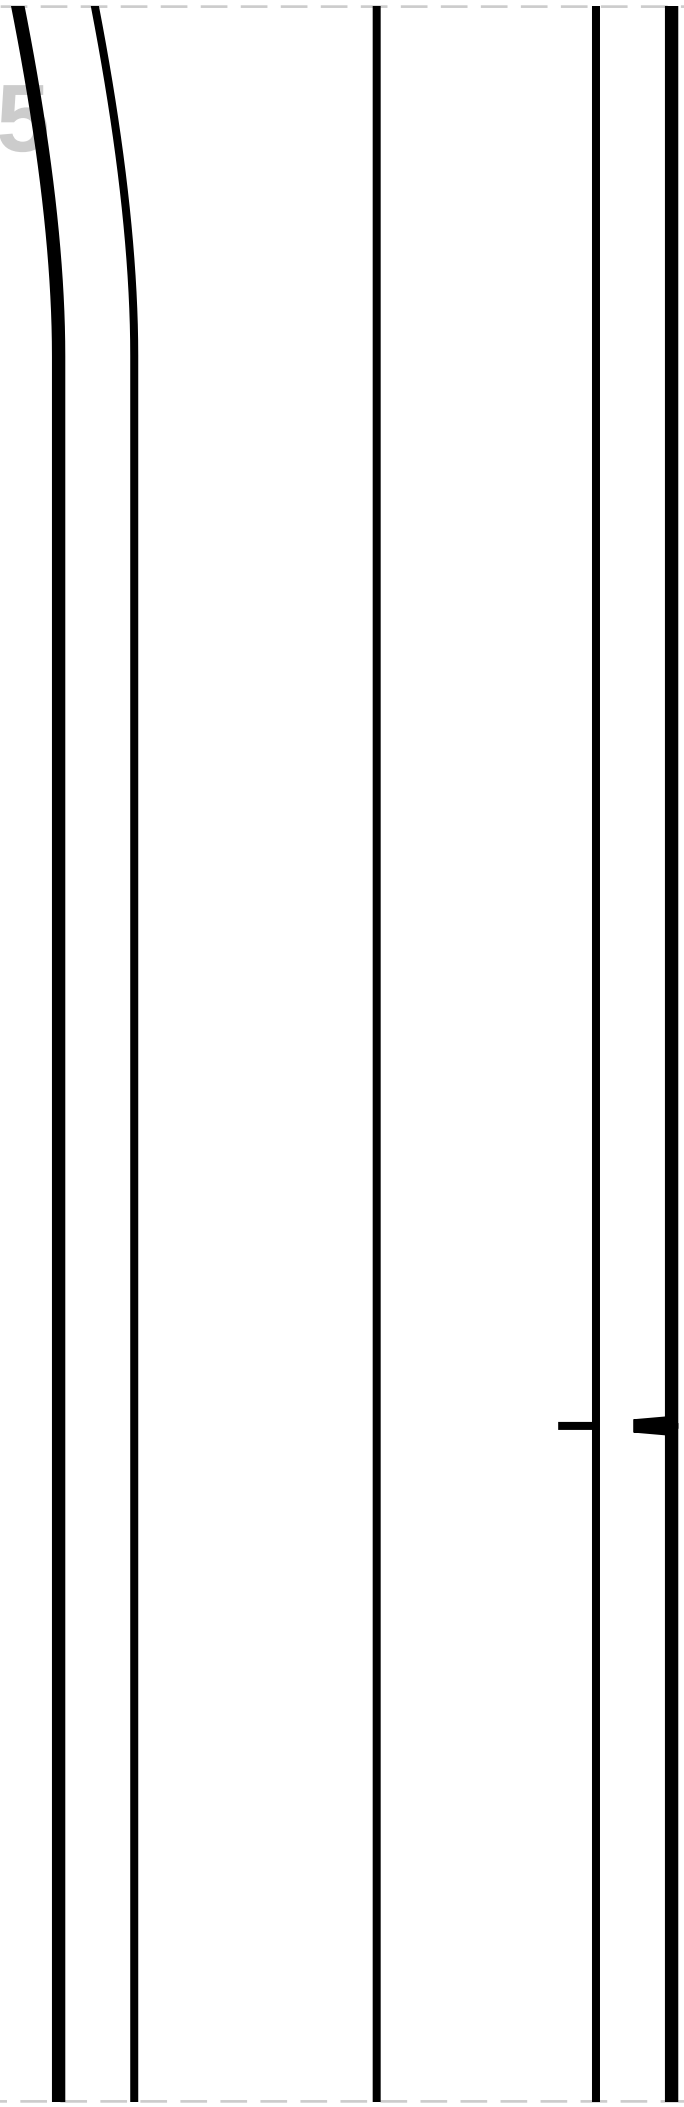


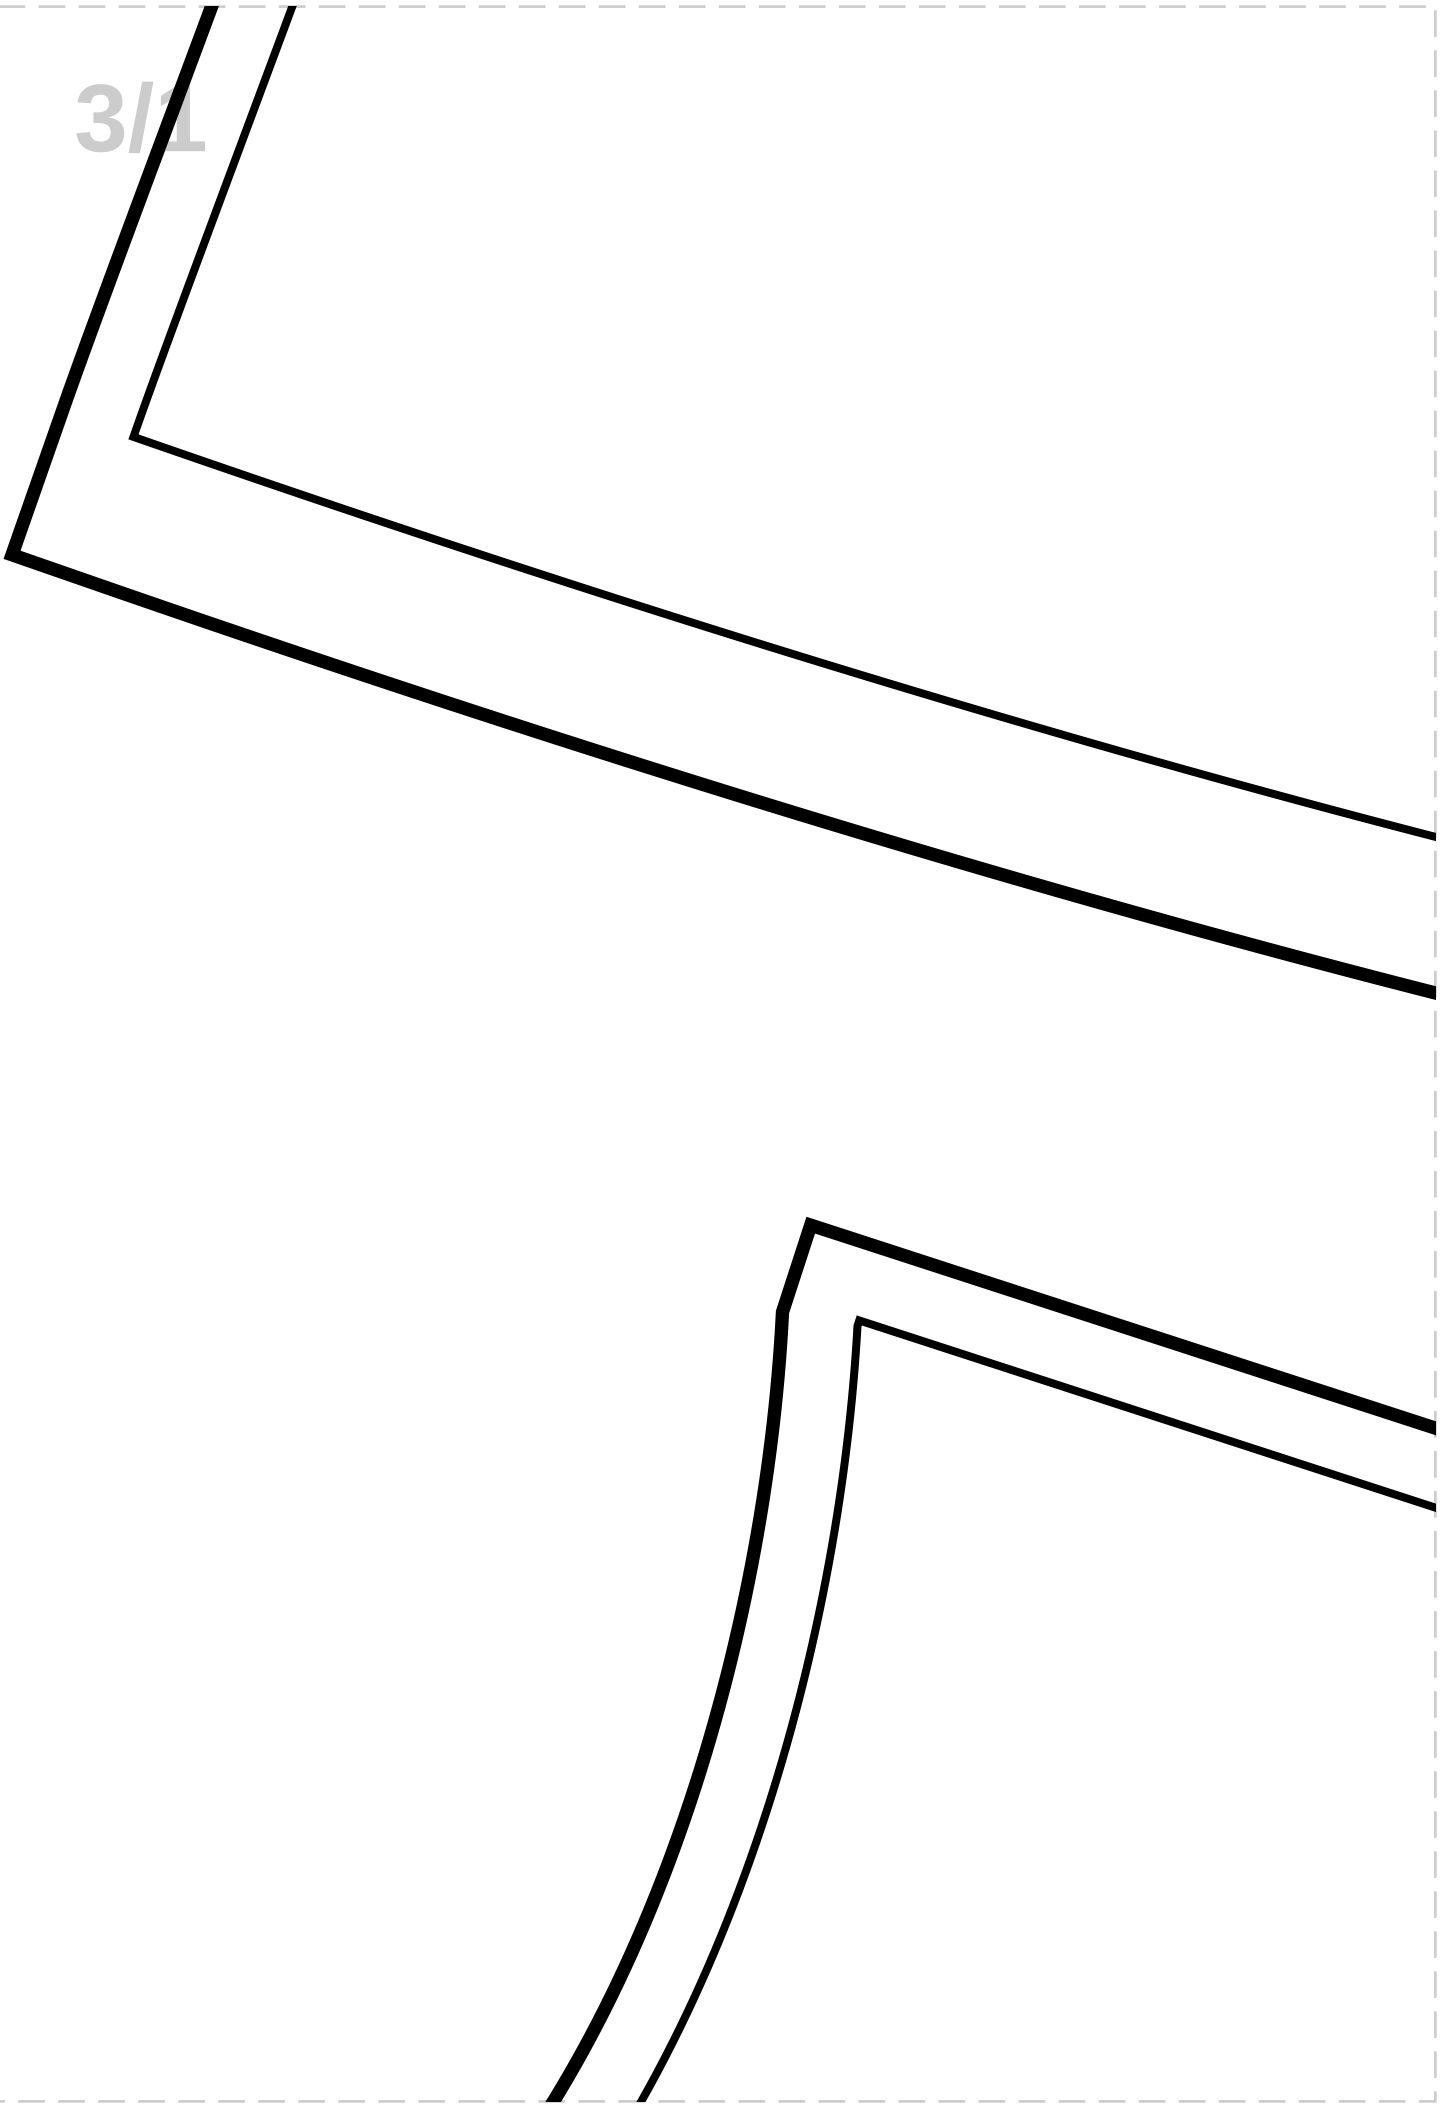


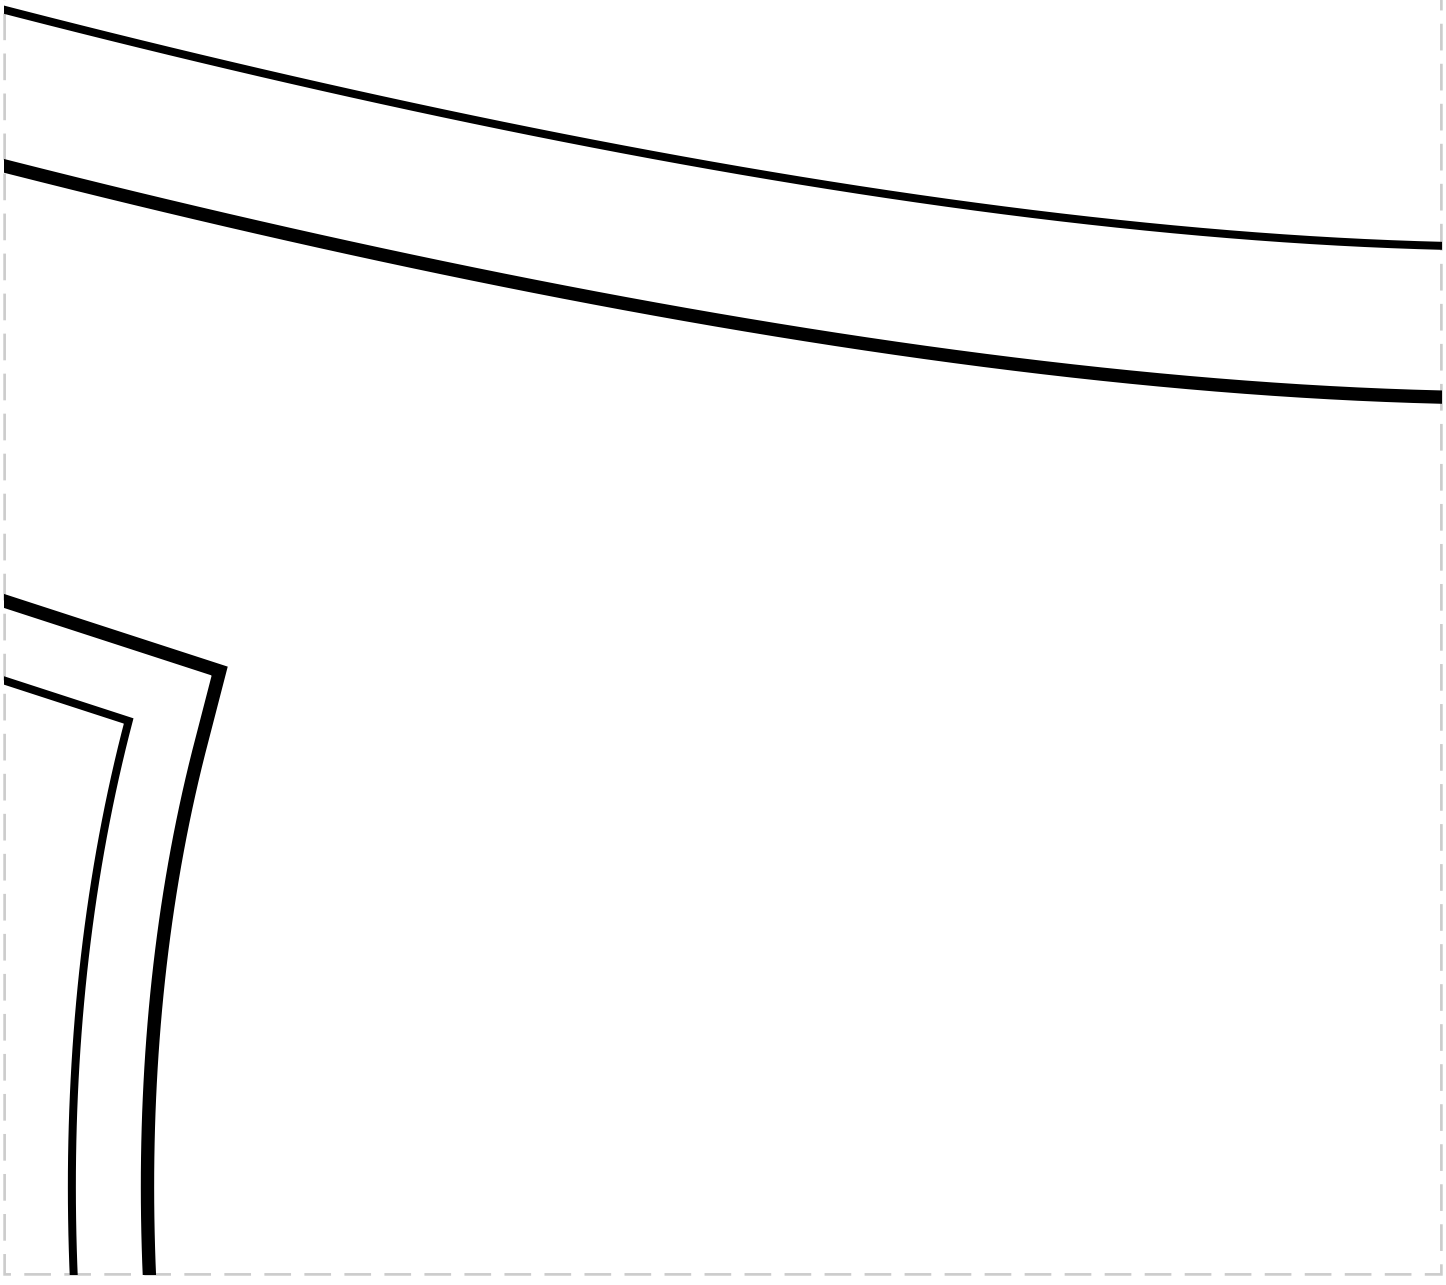

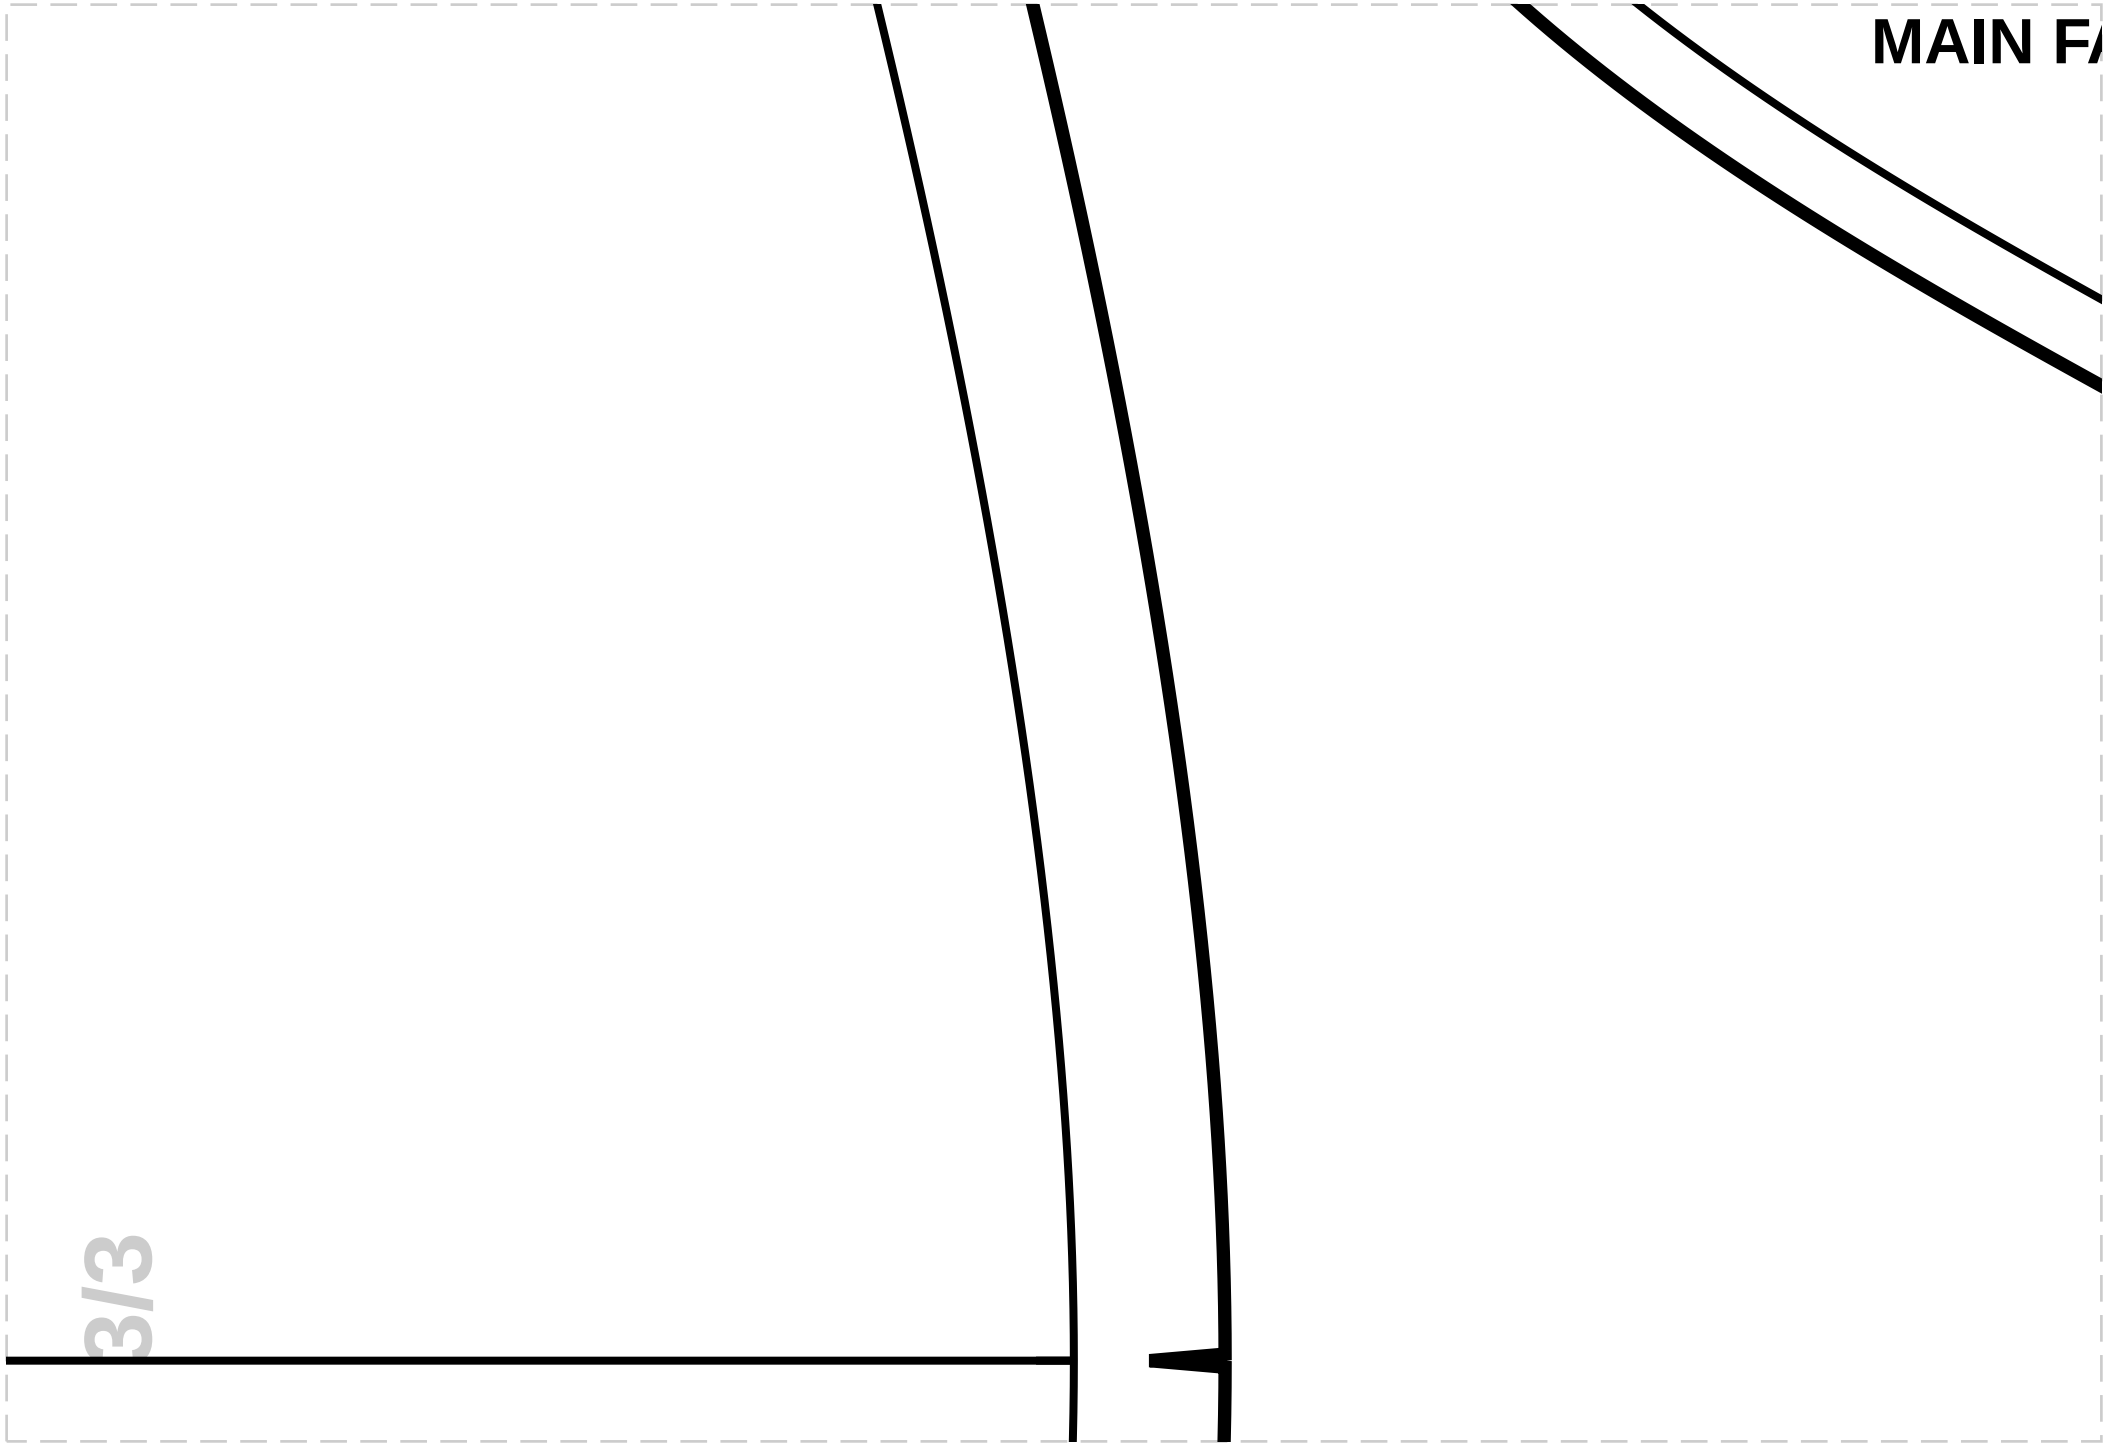
MAIN FA
3/3

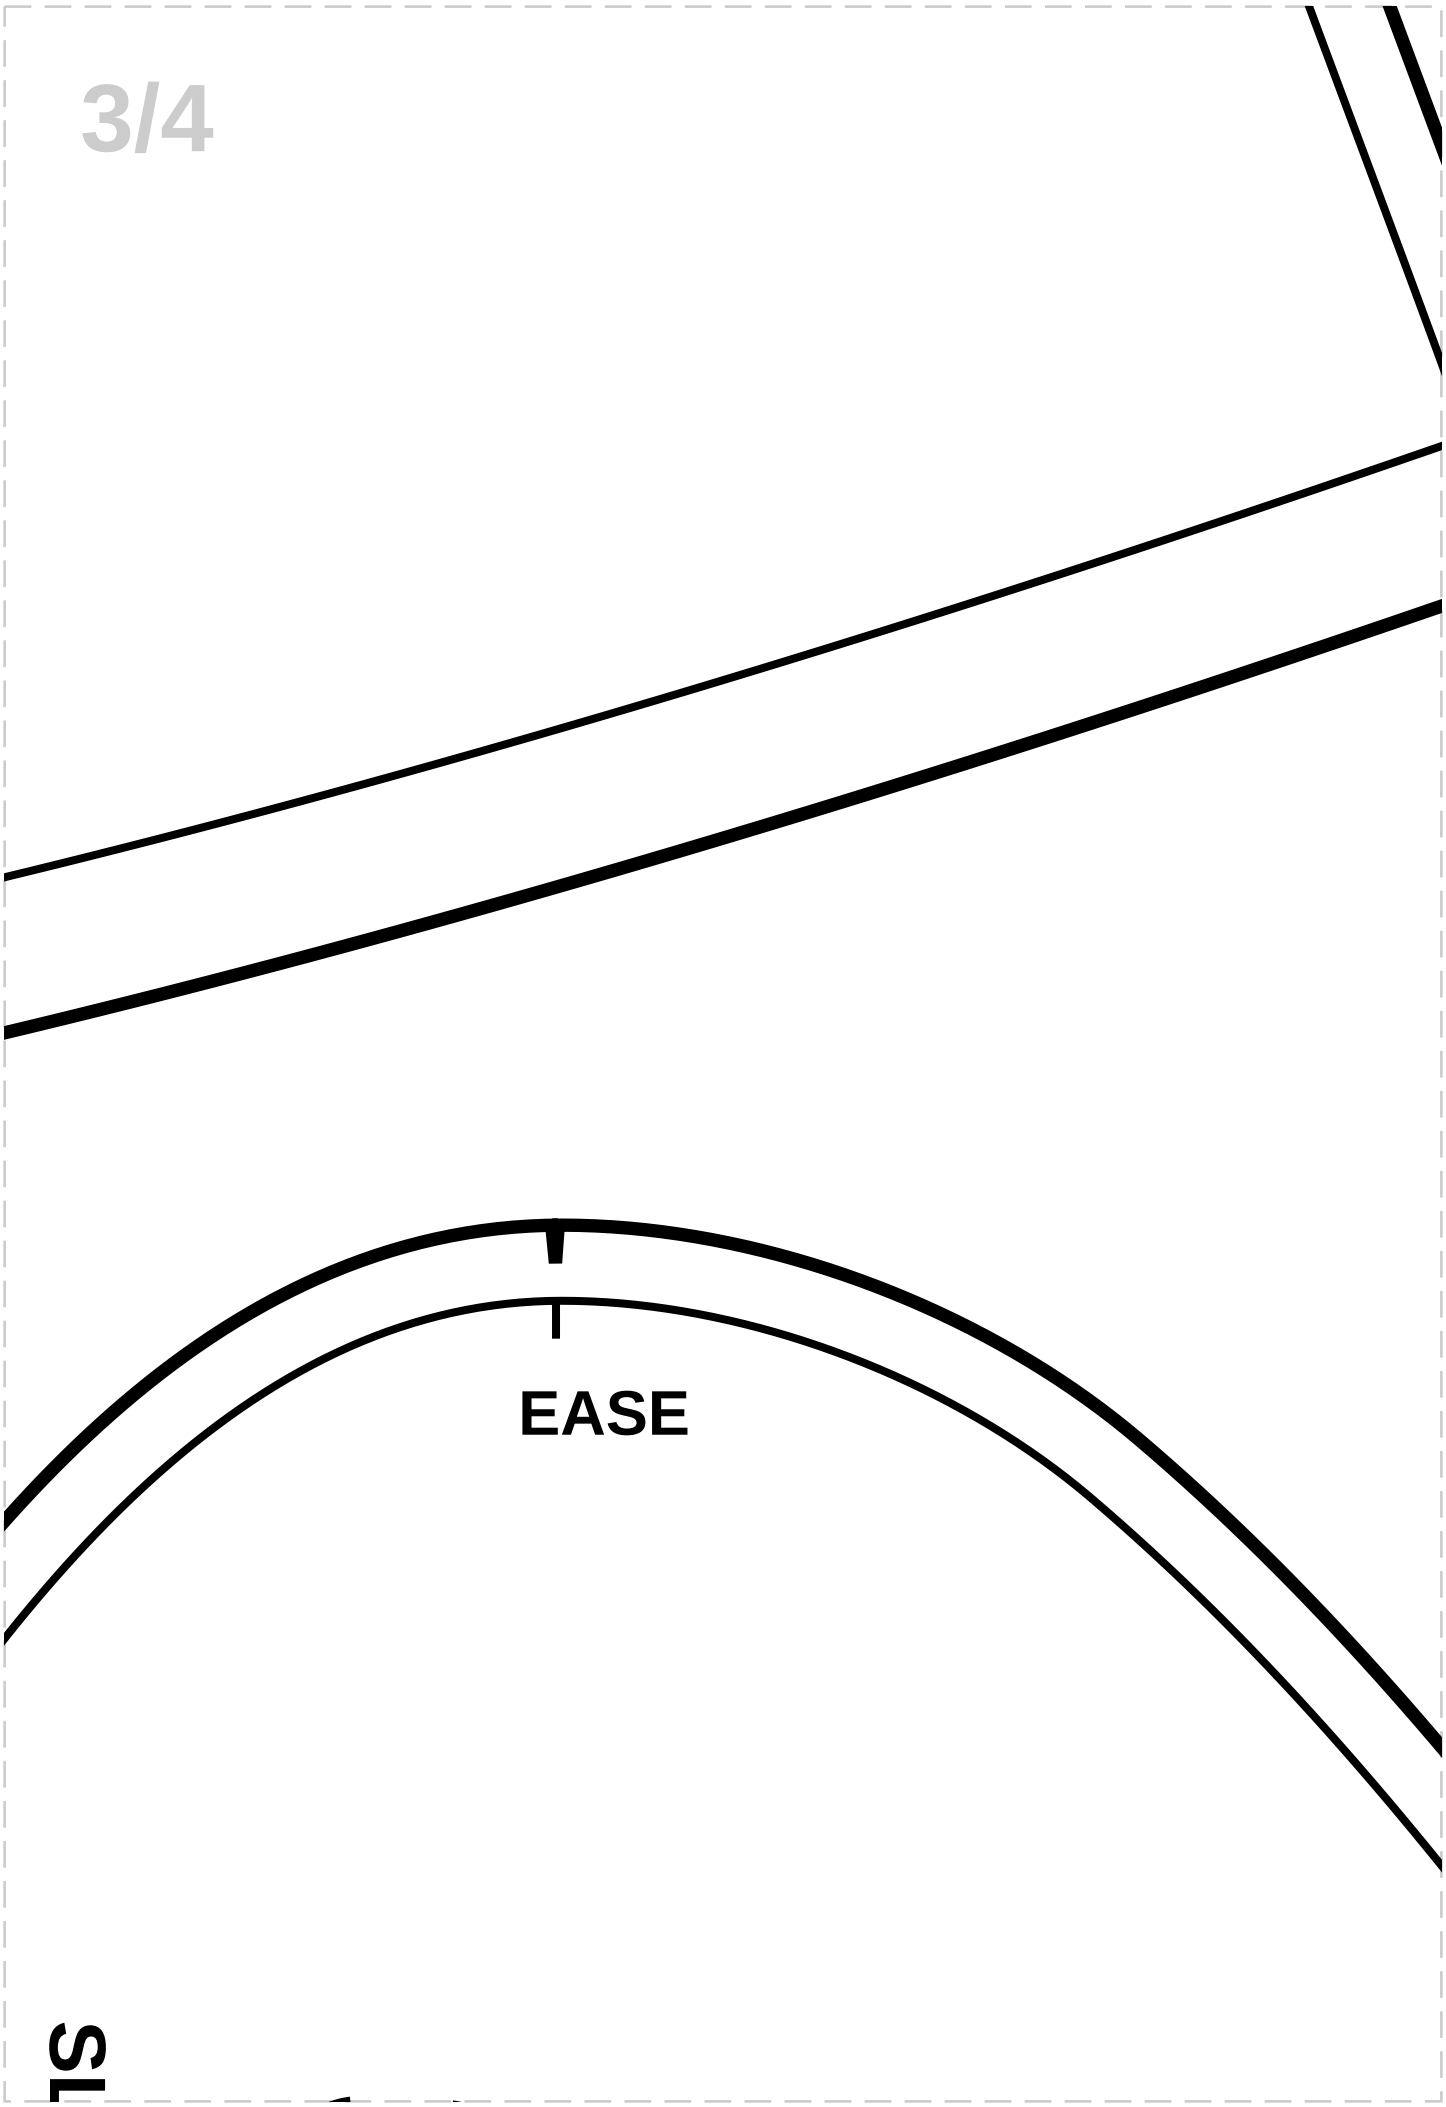
EASE
SL

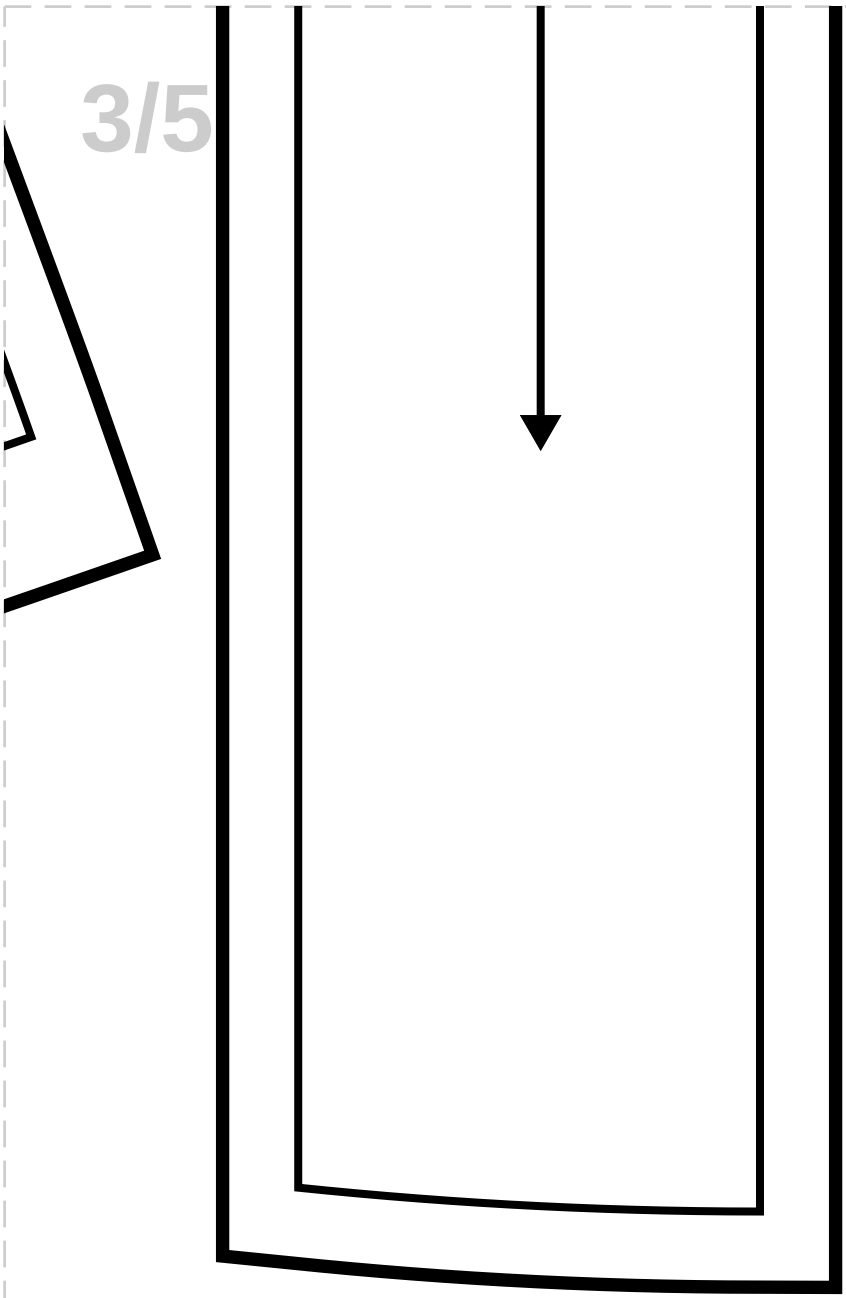


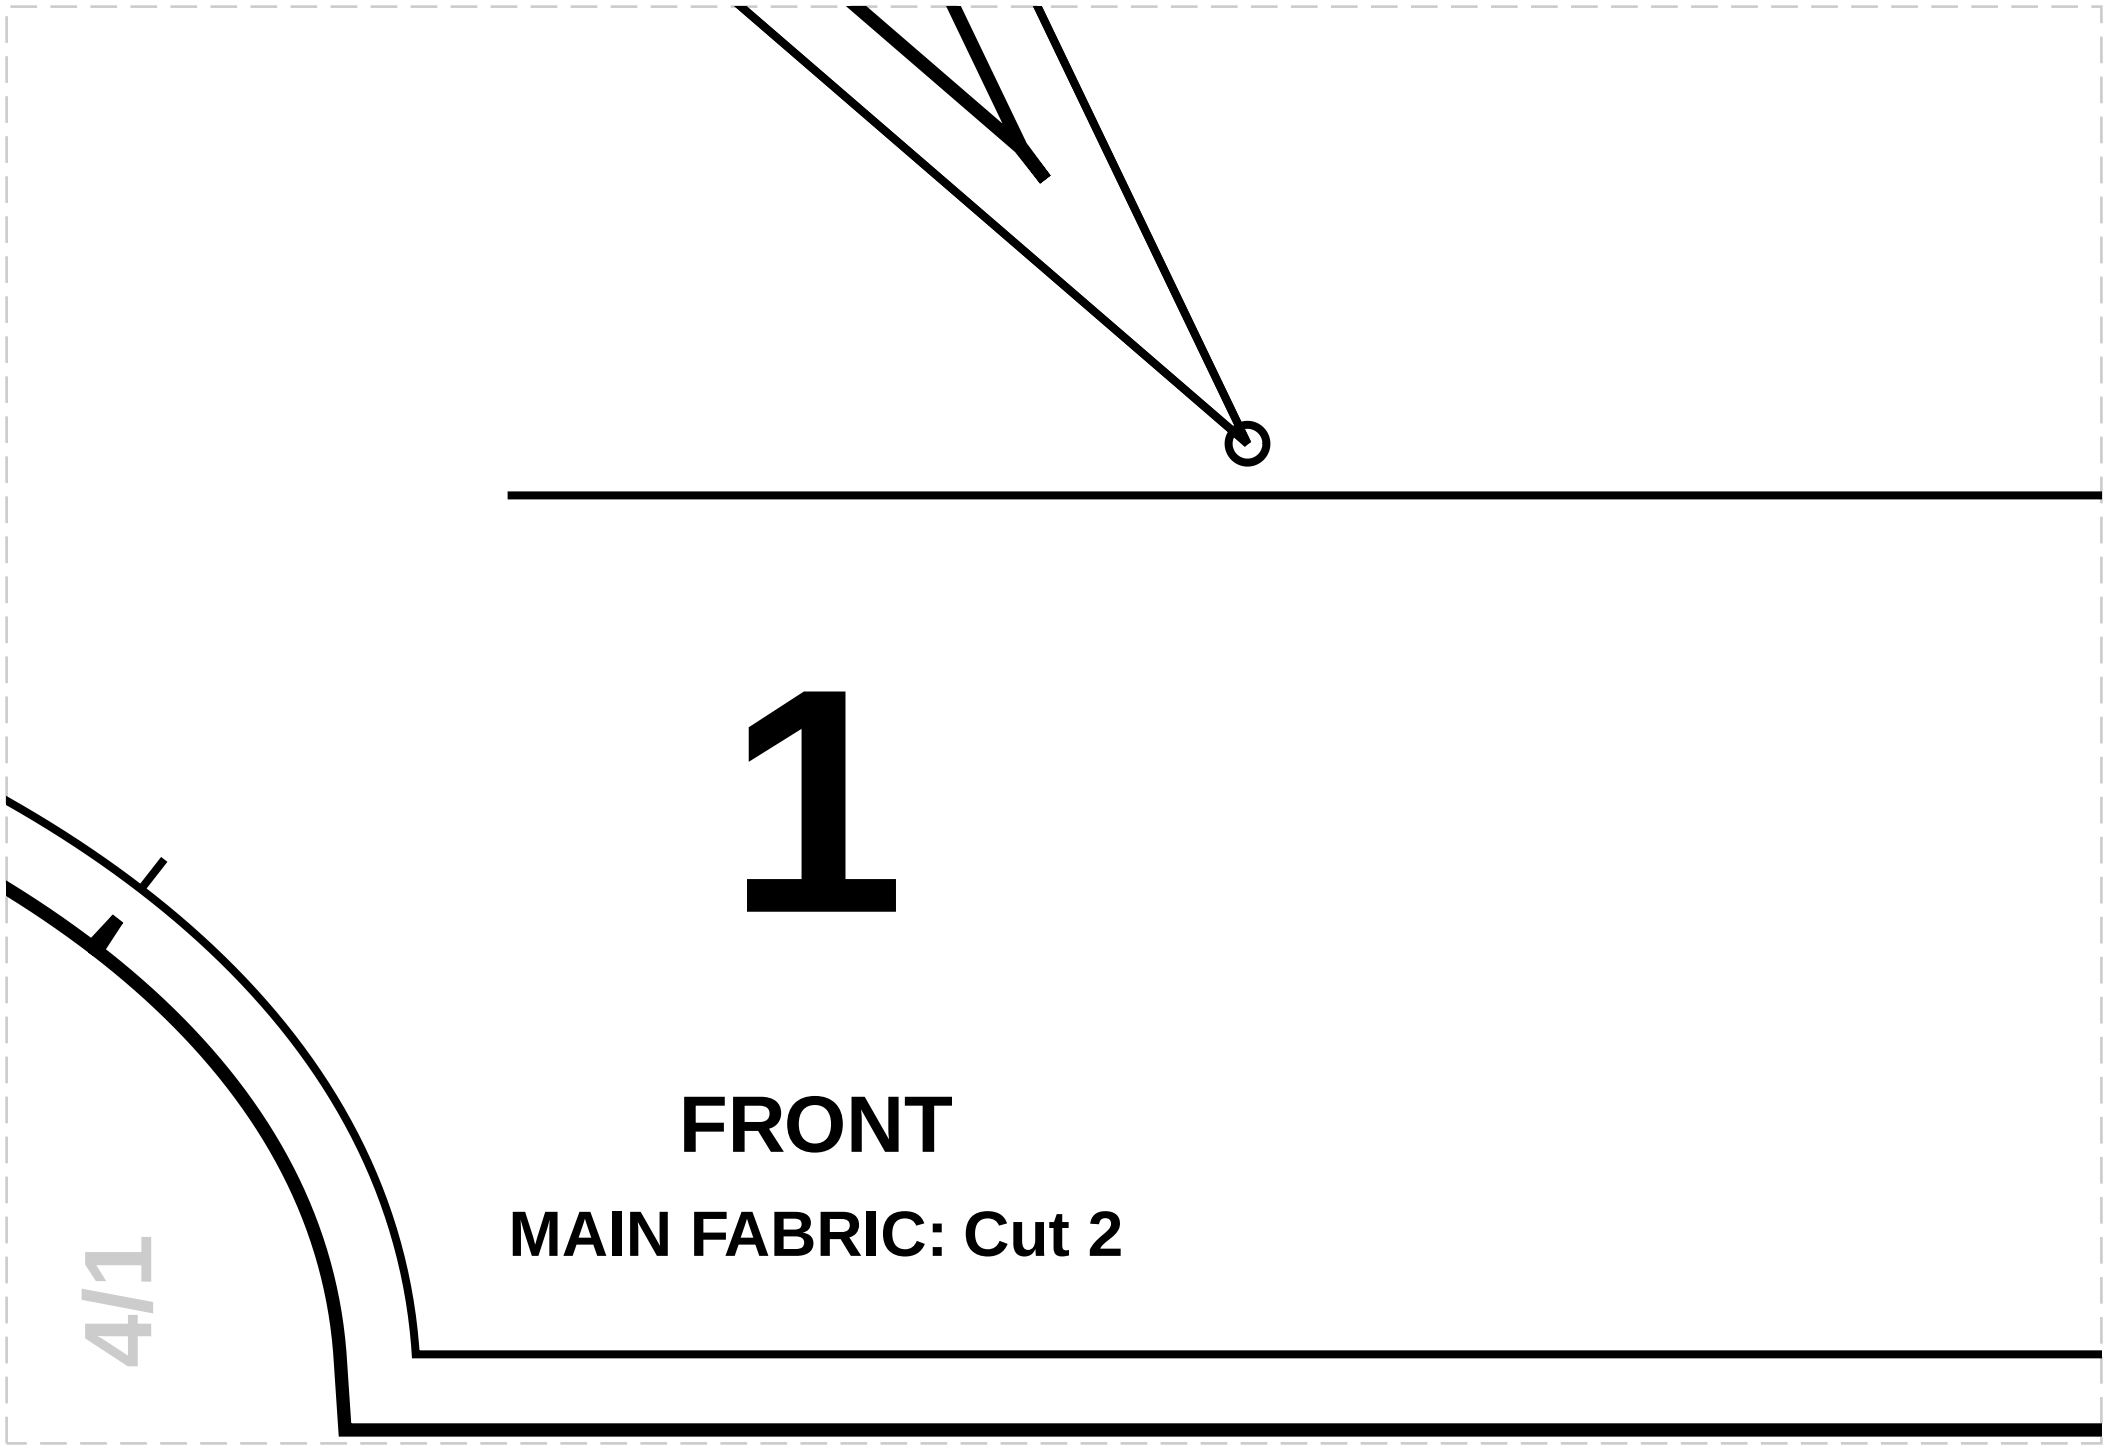


1

FRONT

MAIN FABRIC: Cut 2

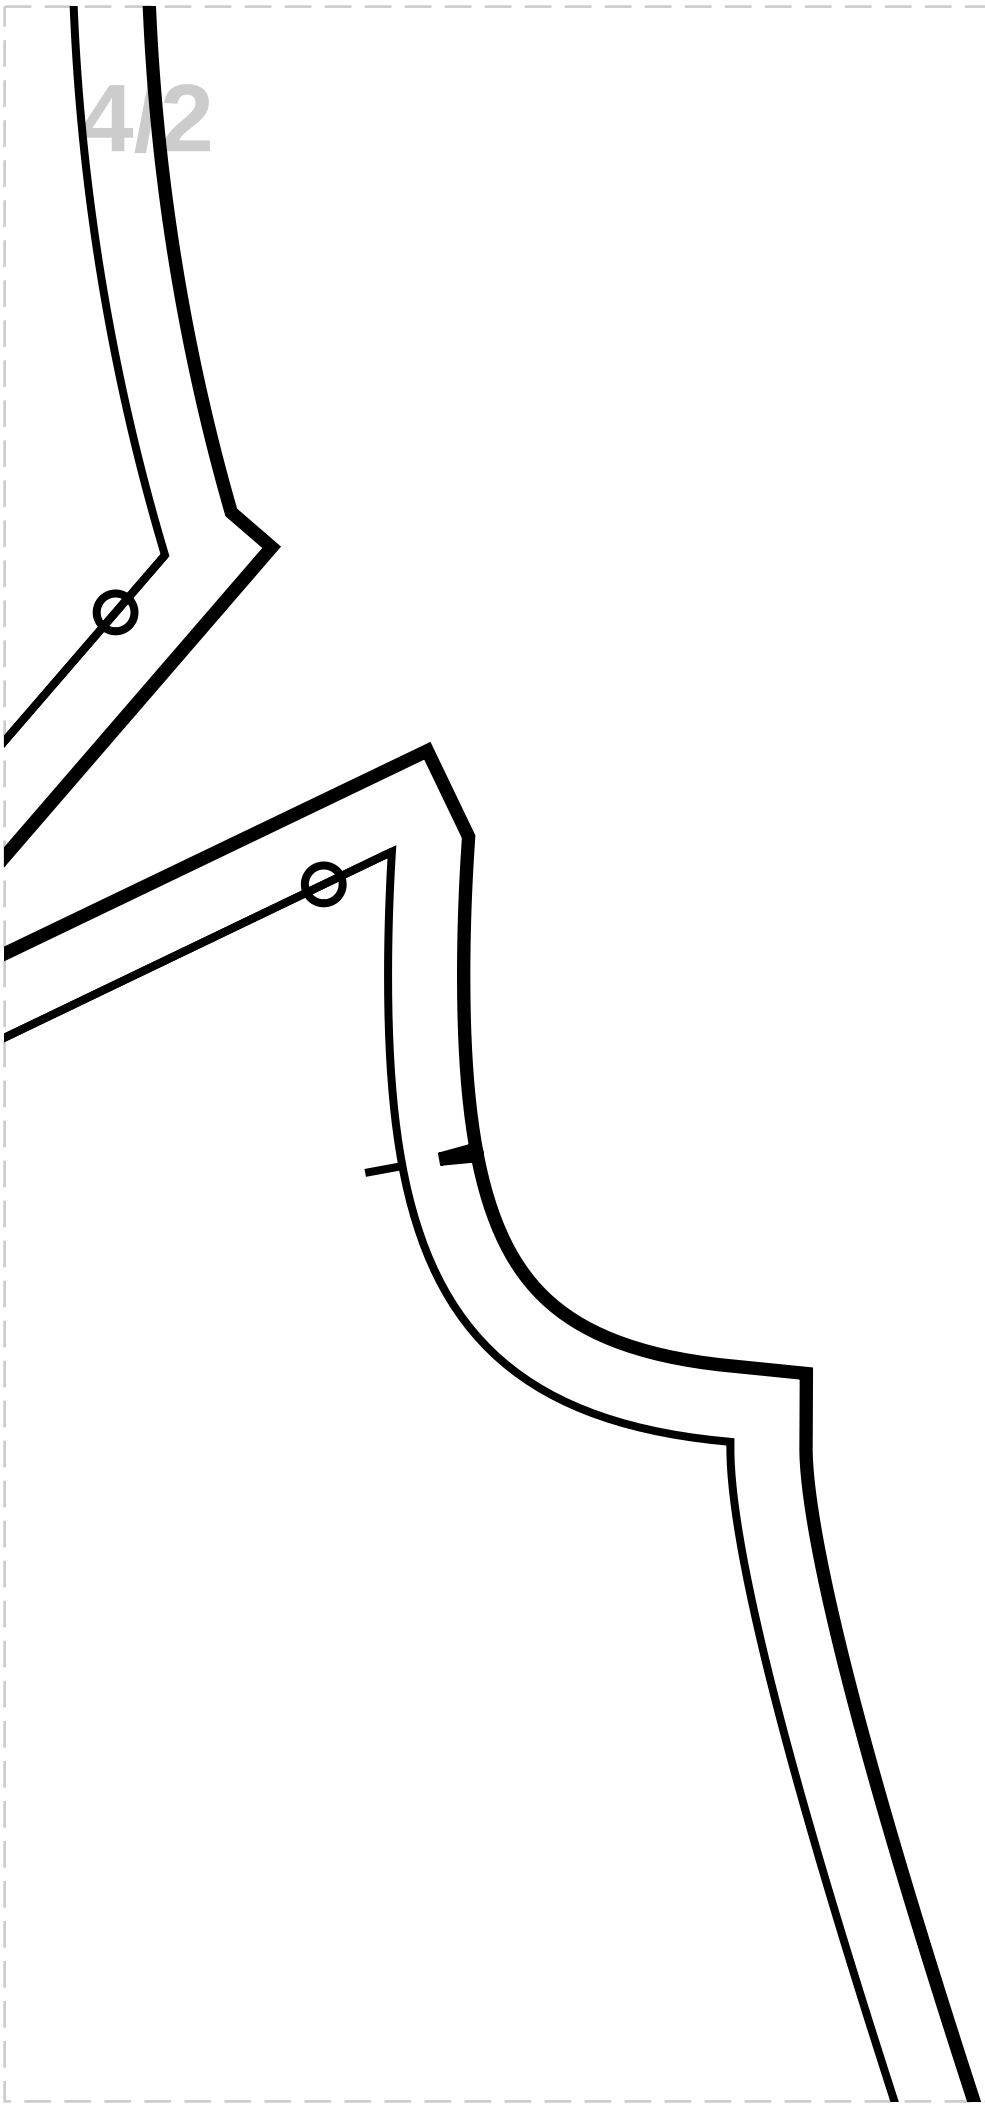


ABRIC: Cut 2

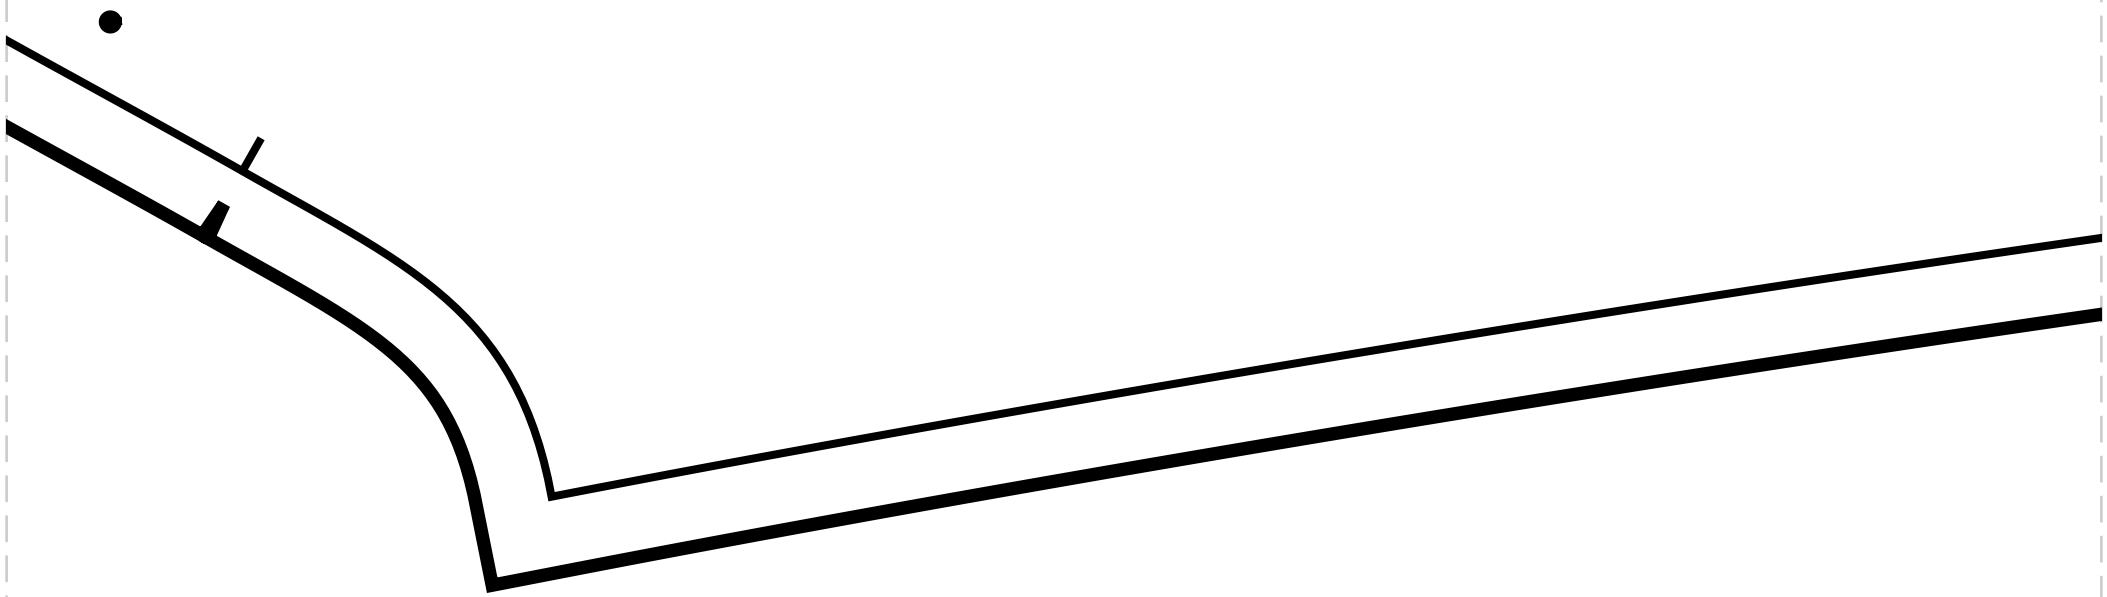



3


4/4


LEEVE

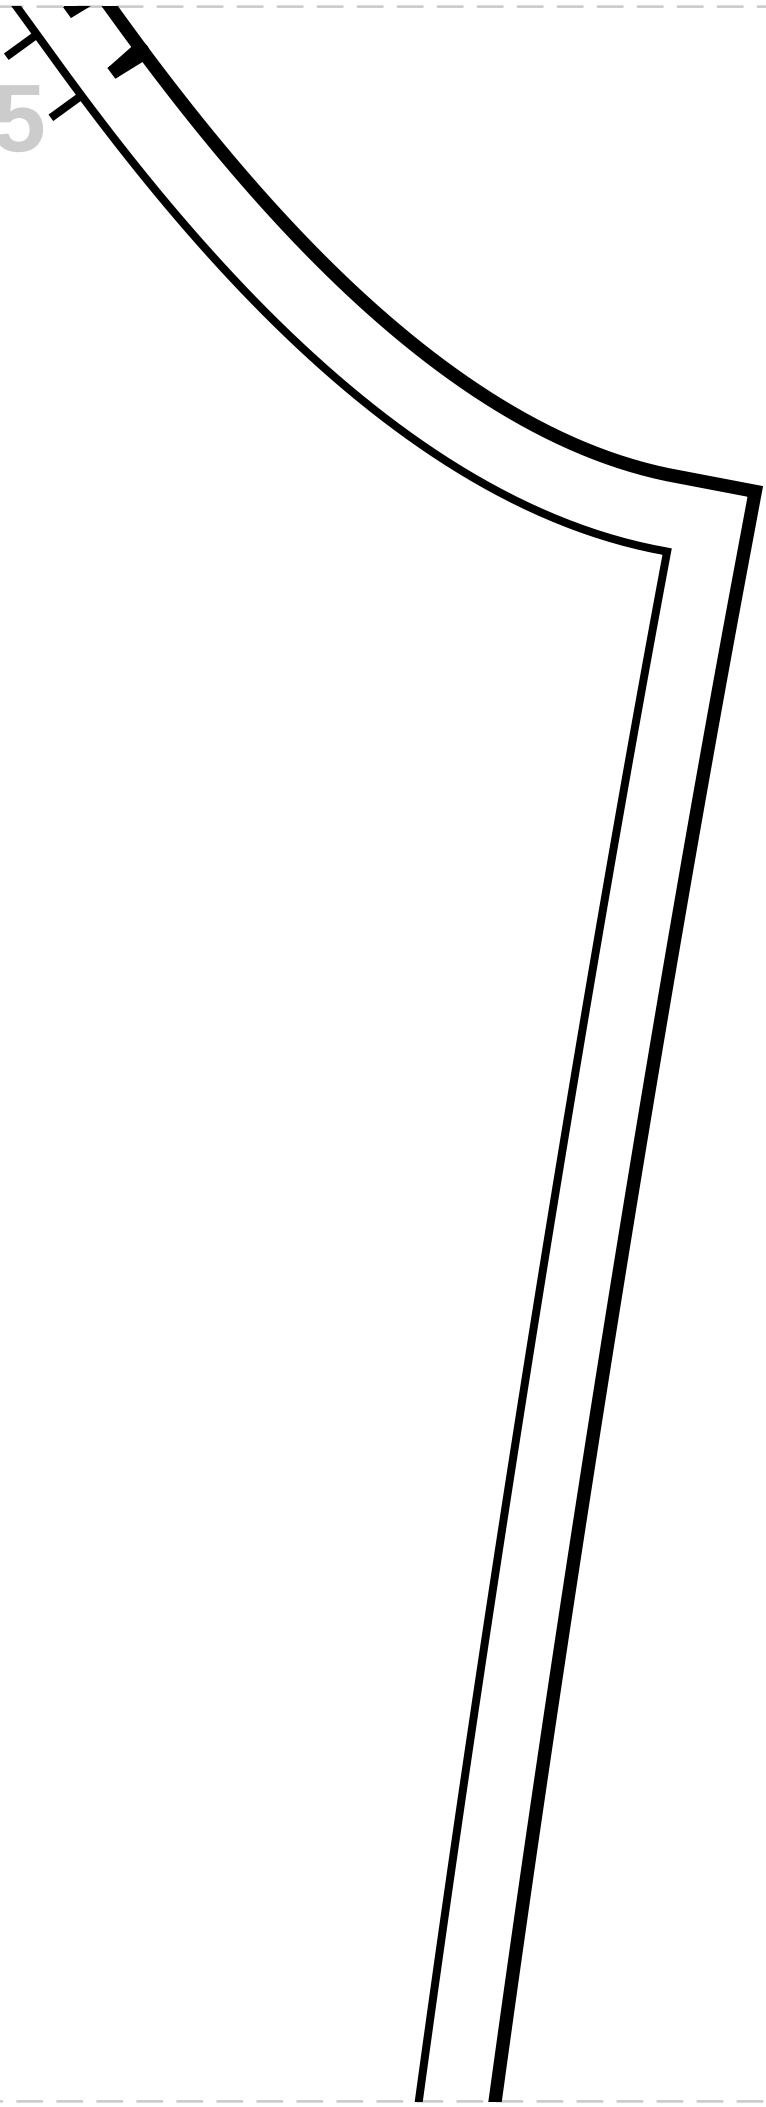


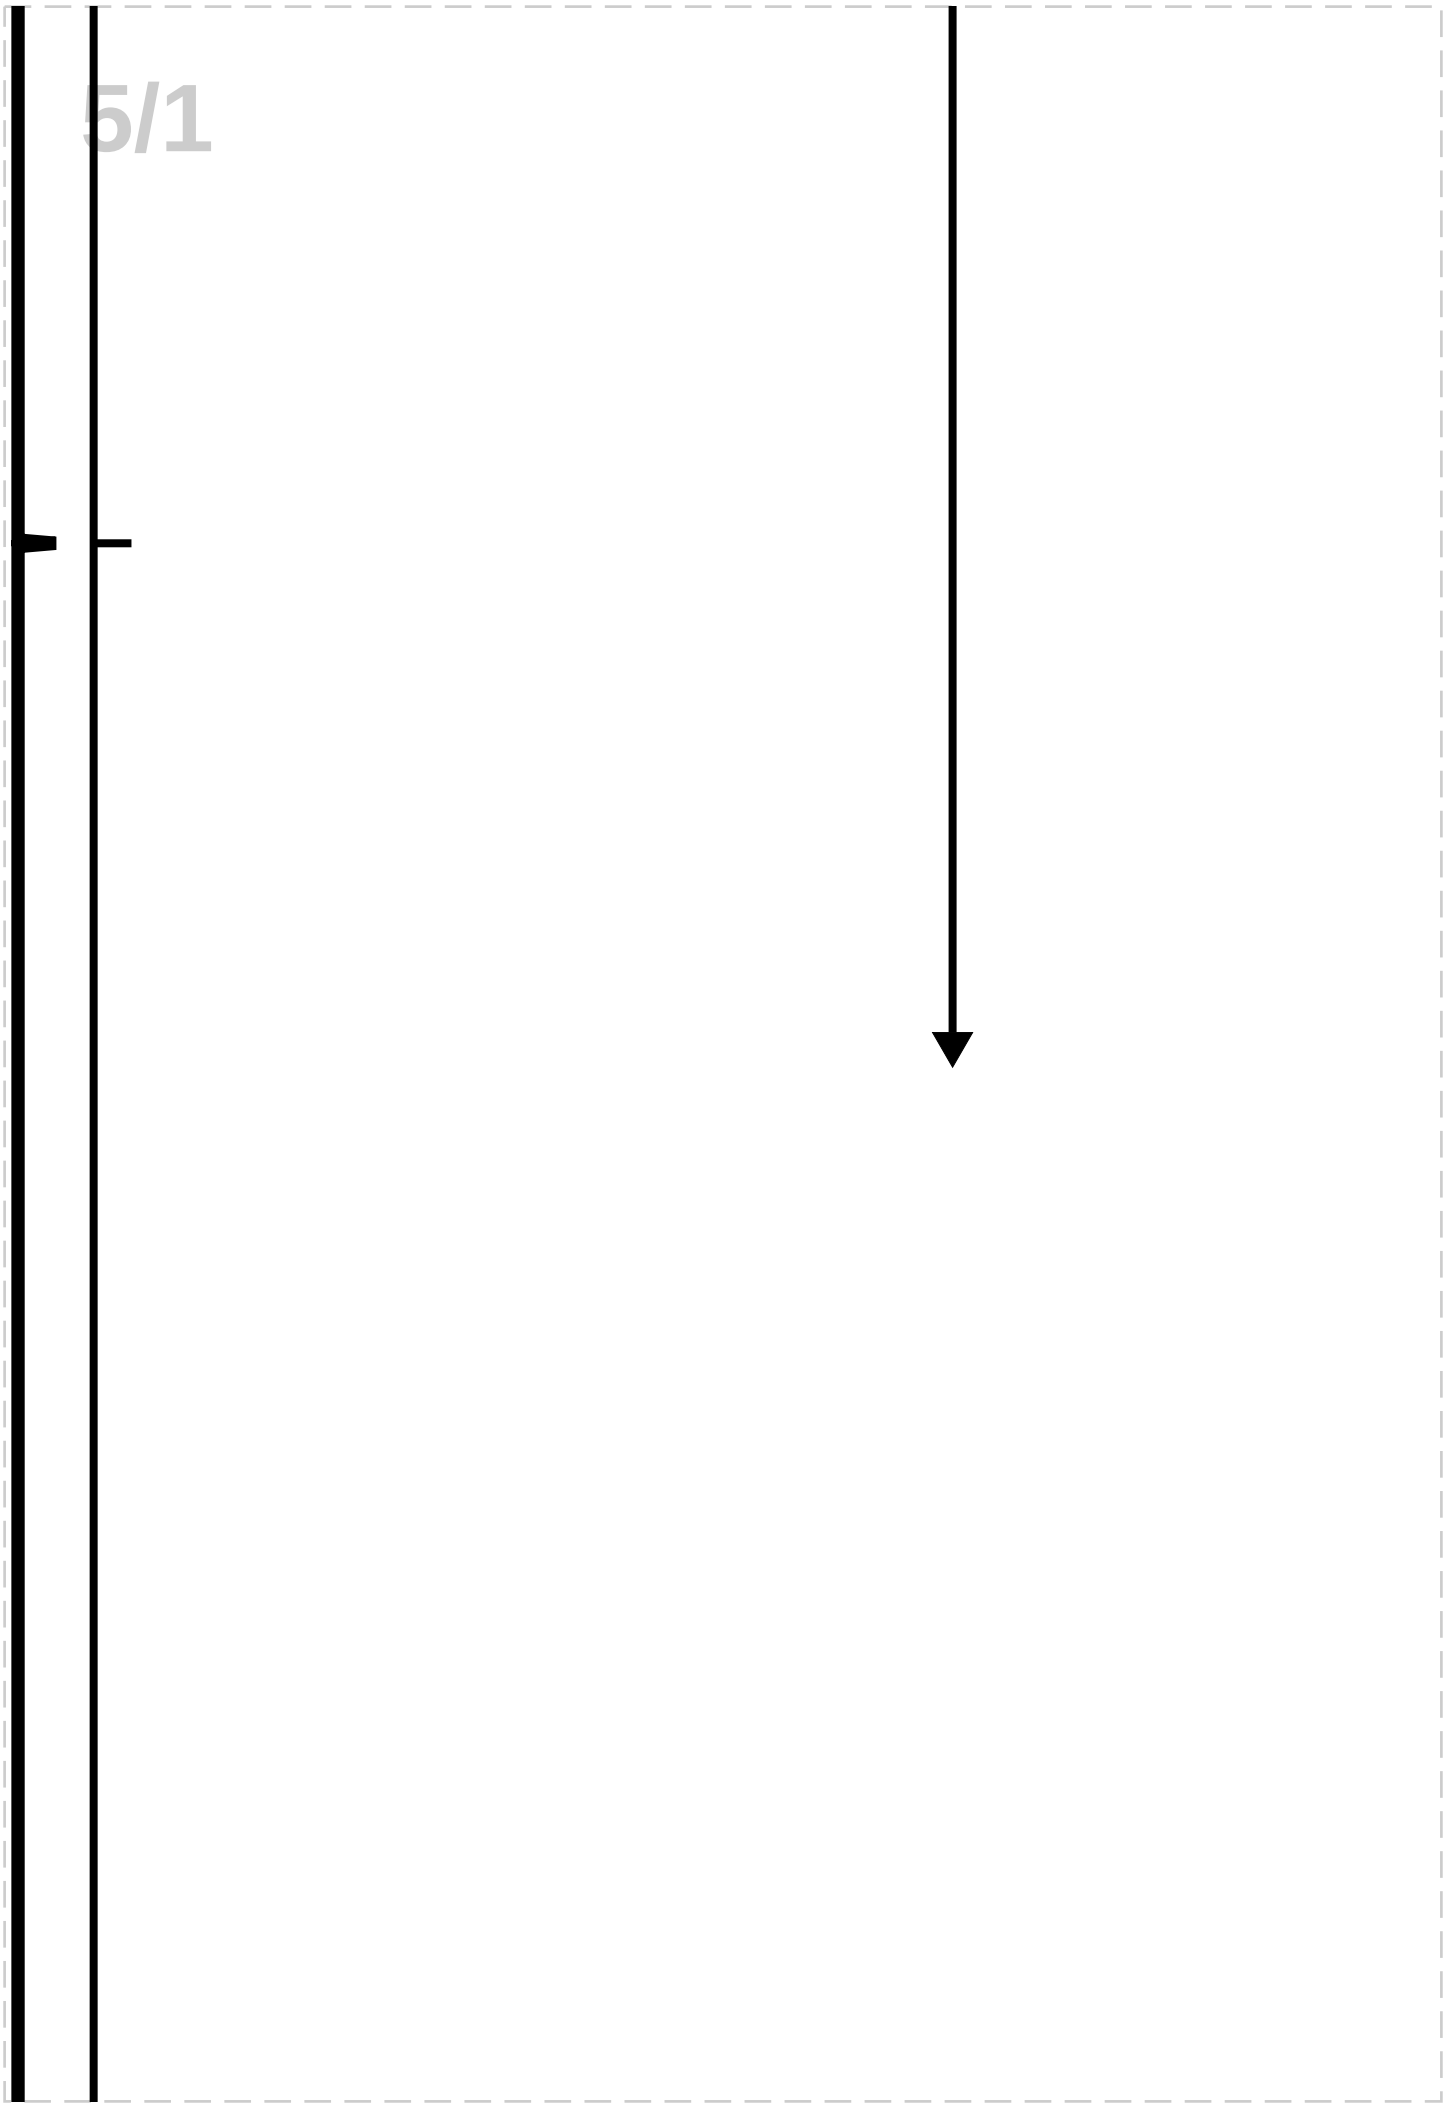


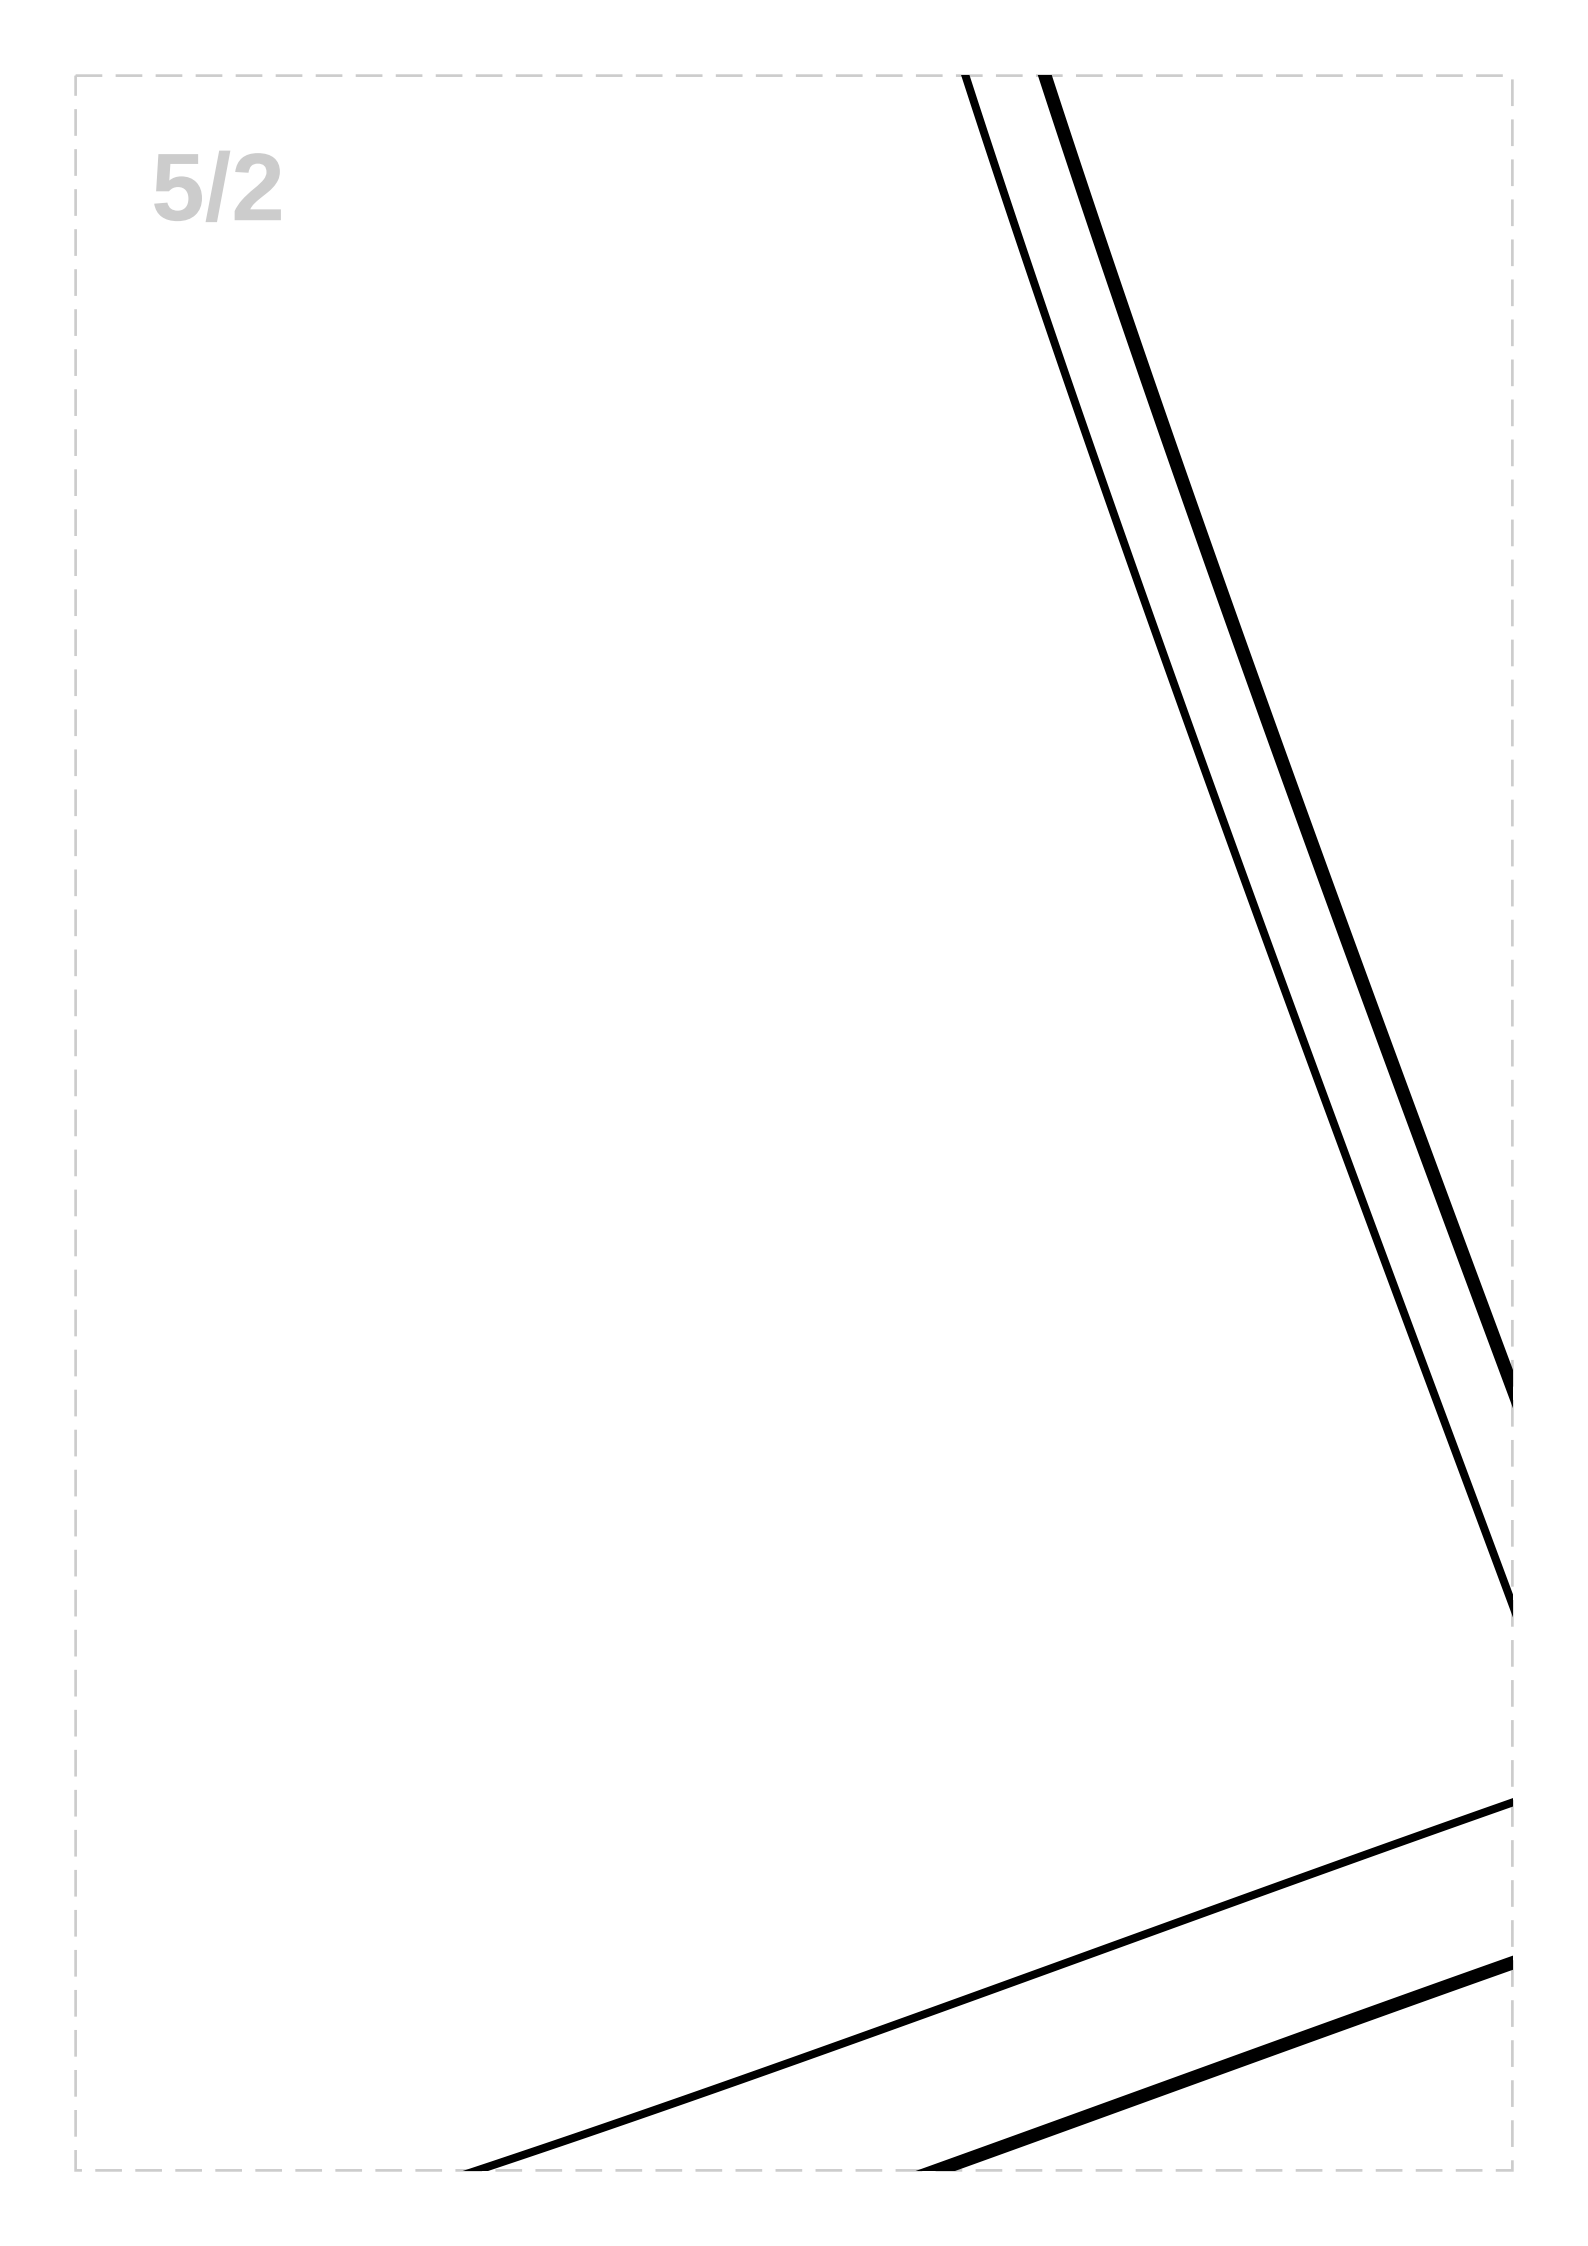


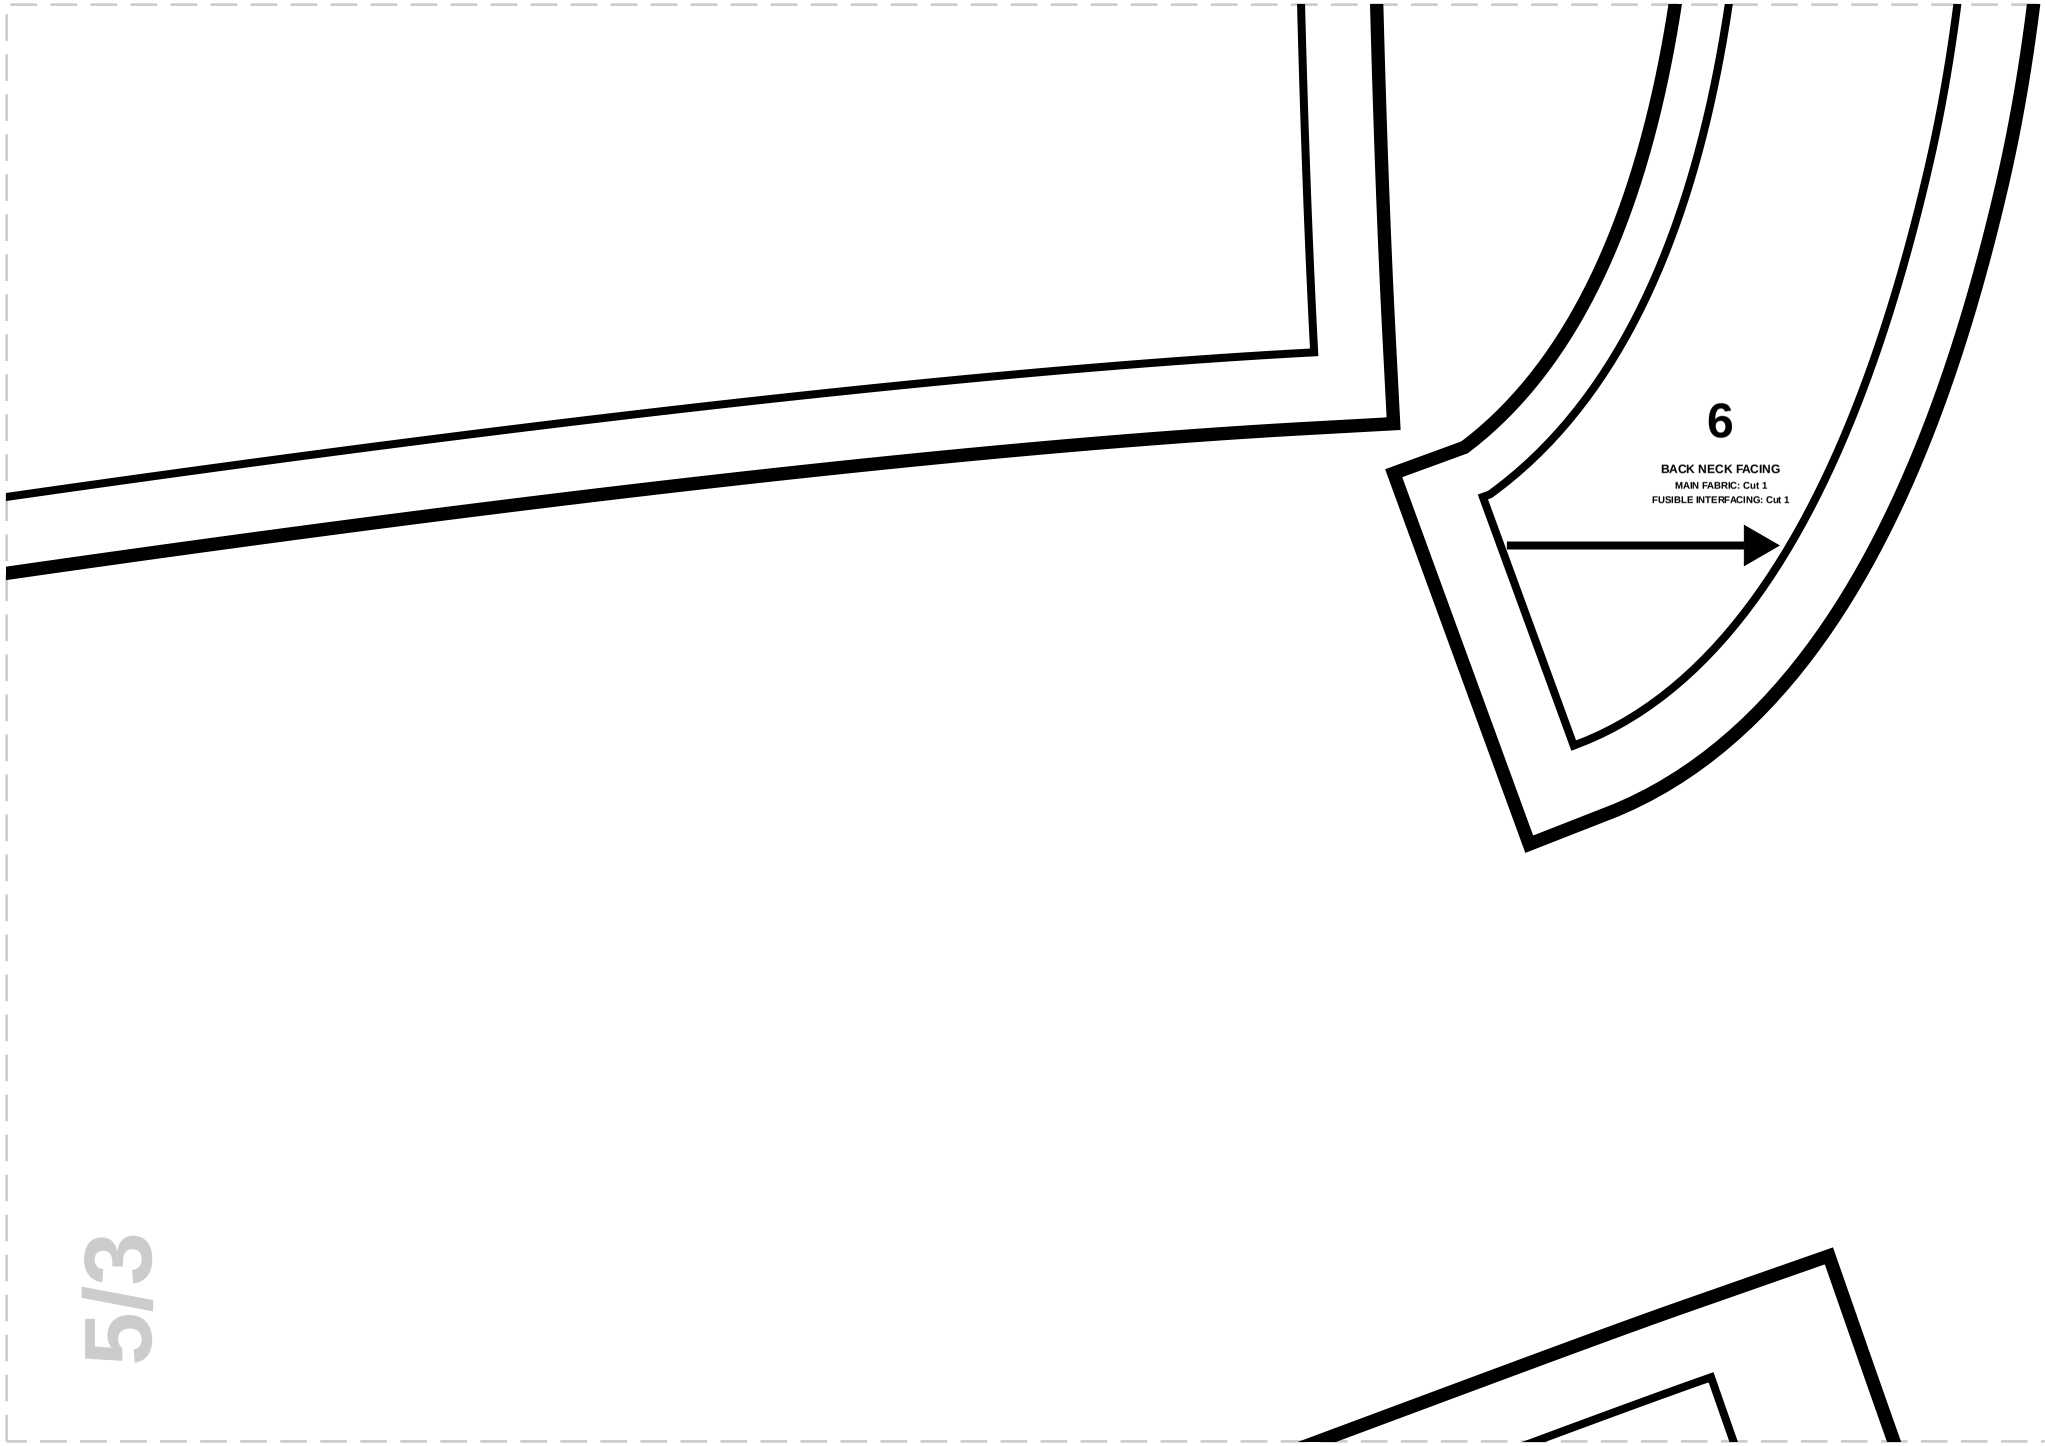
6
BACK NECK FACING
MAIN FABRIC: Cut 1
FUSIBLE INTERFACING: Cut 1

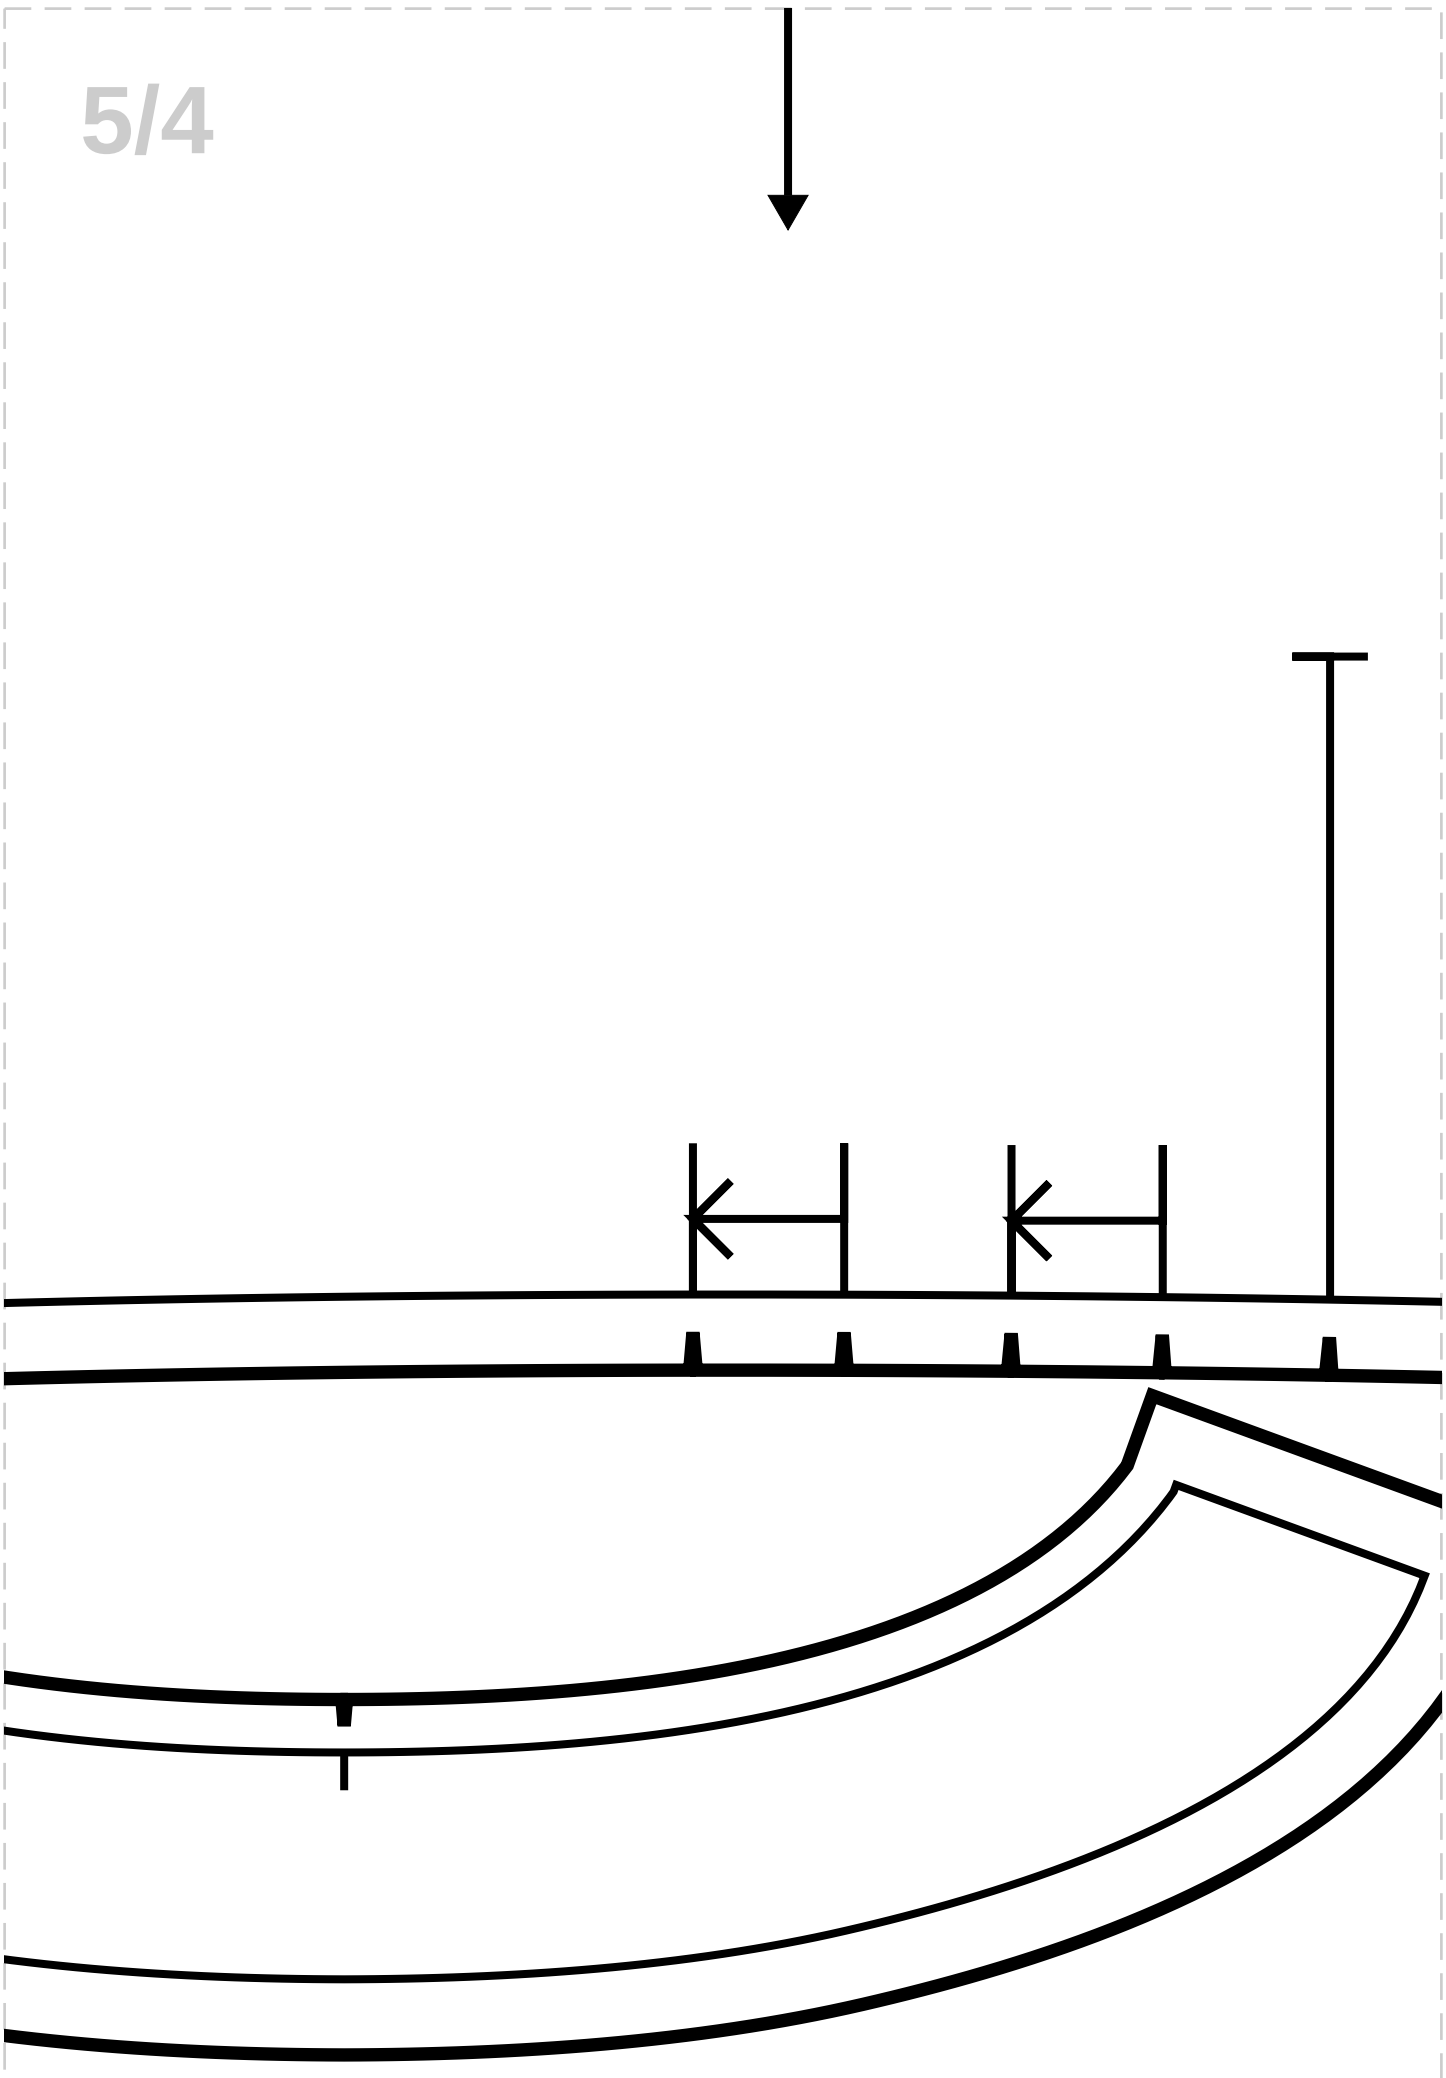


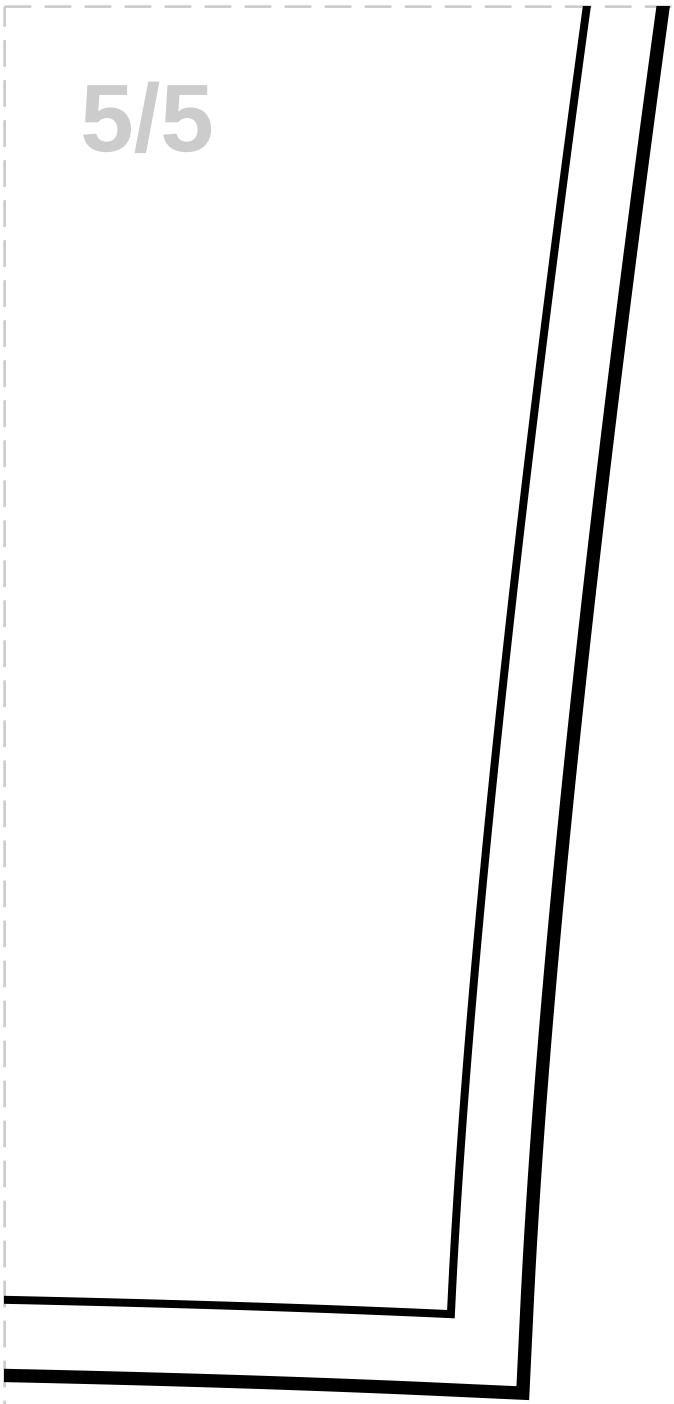


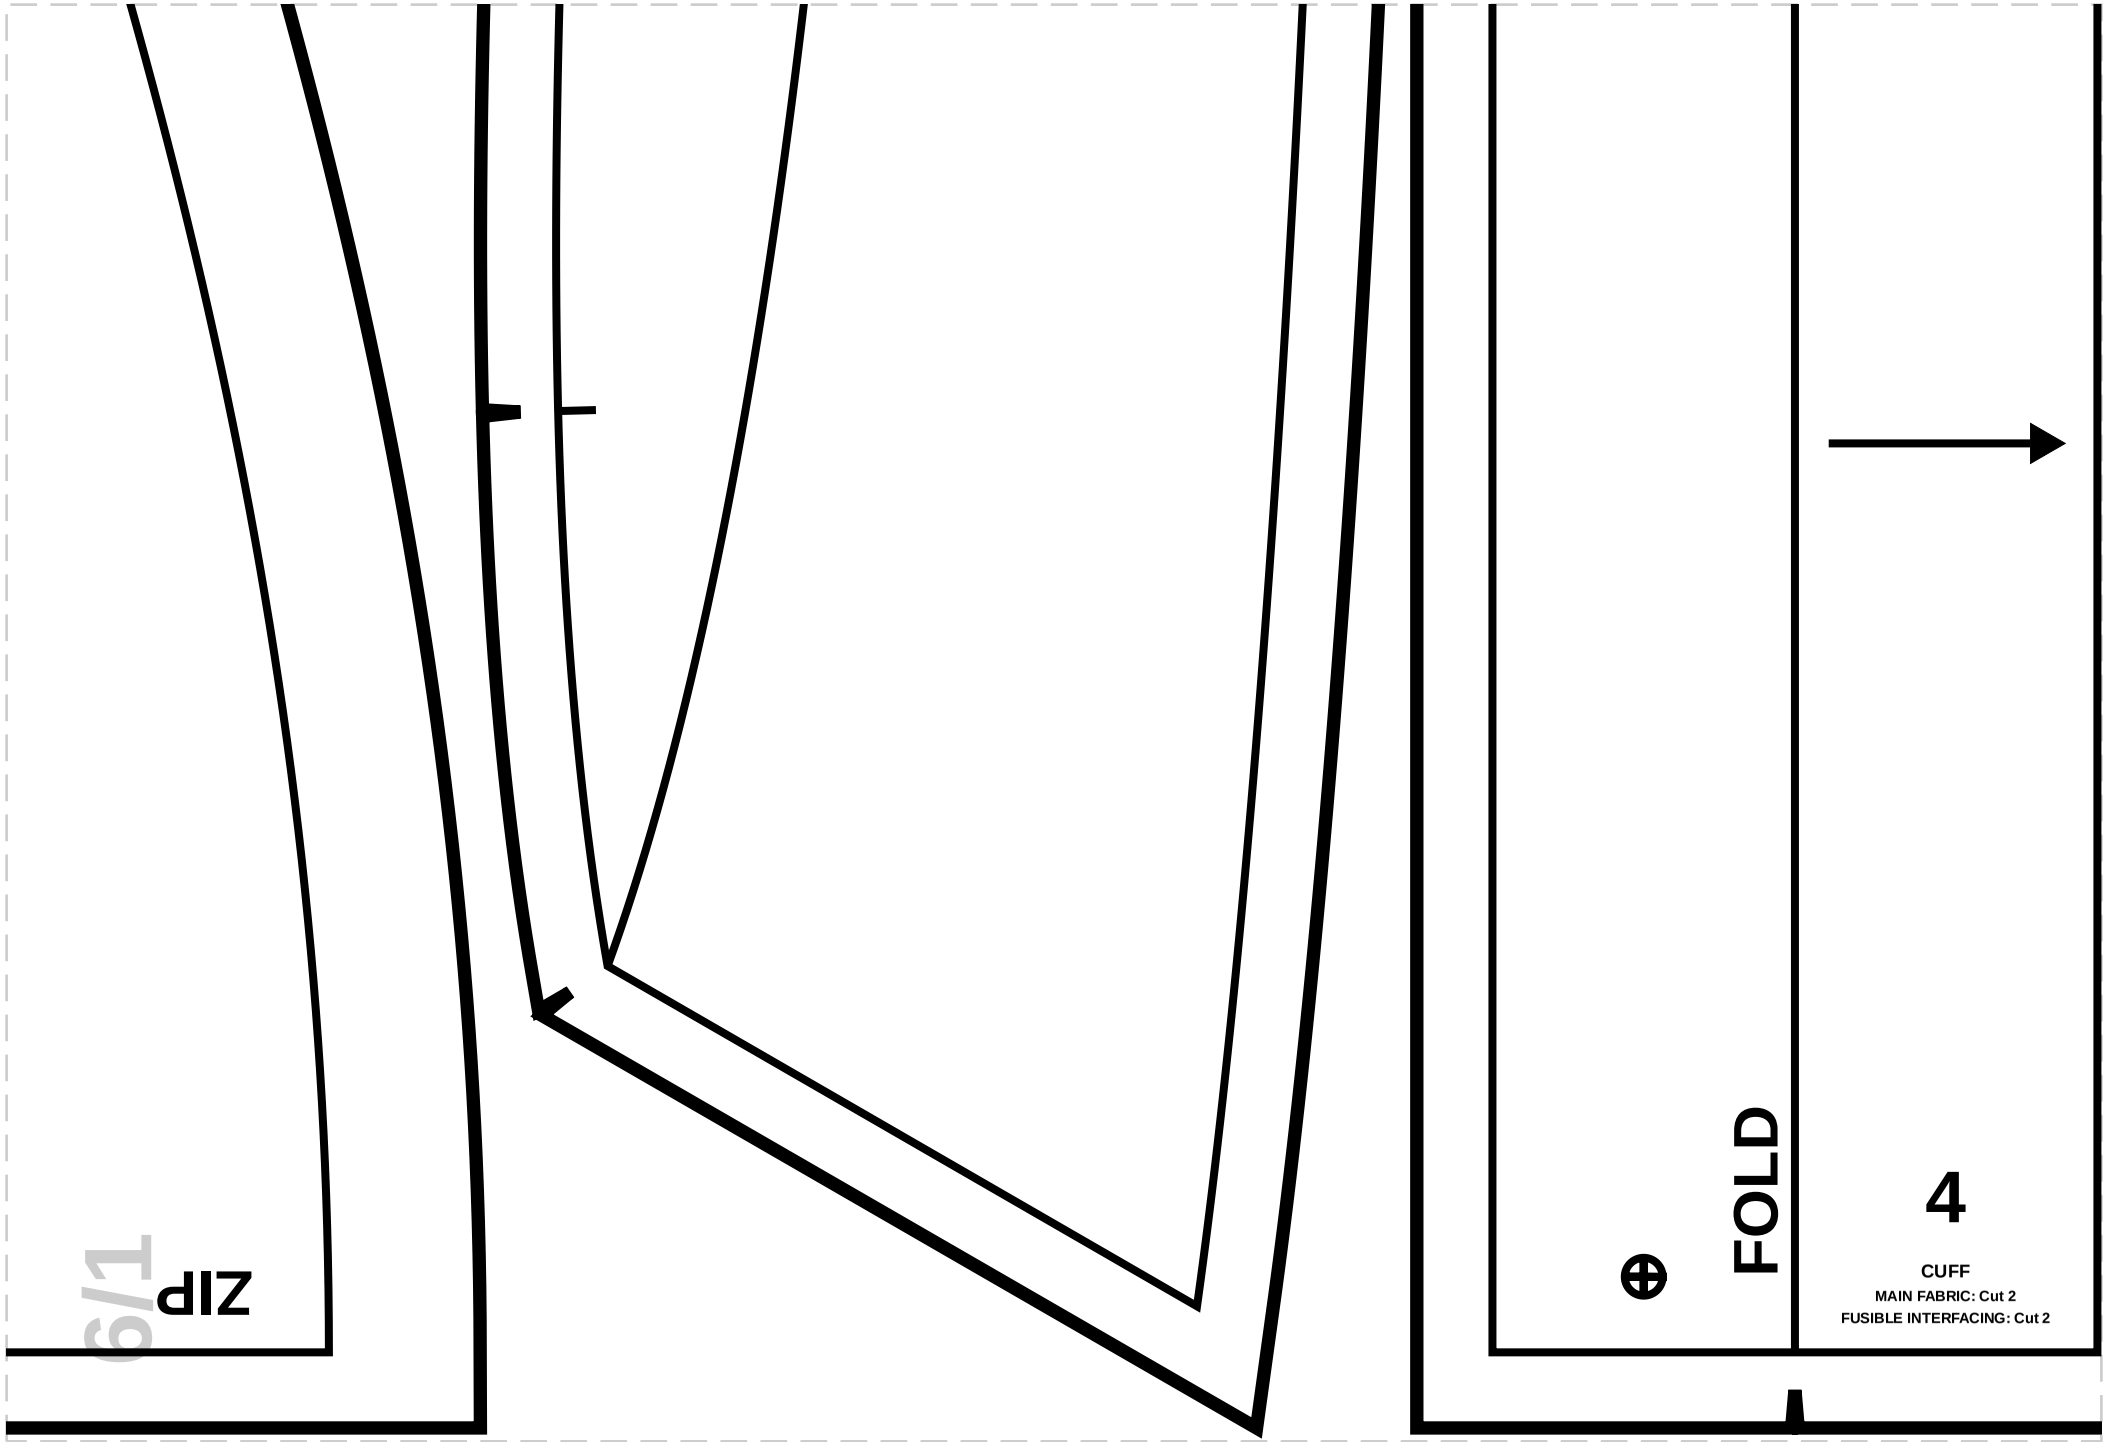
ZIP
6/1
FOLD
4
CUFF
MAIN FABRIC: Cut 2
FUSIBLE INTERFACING: Cut 2

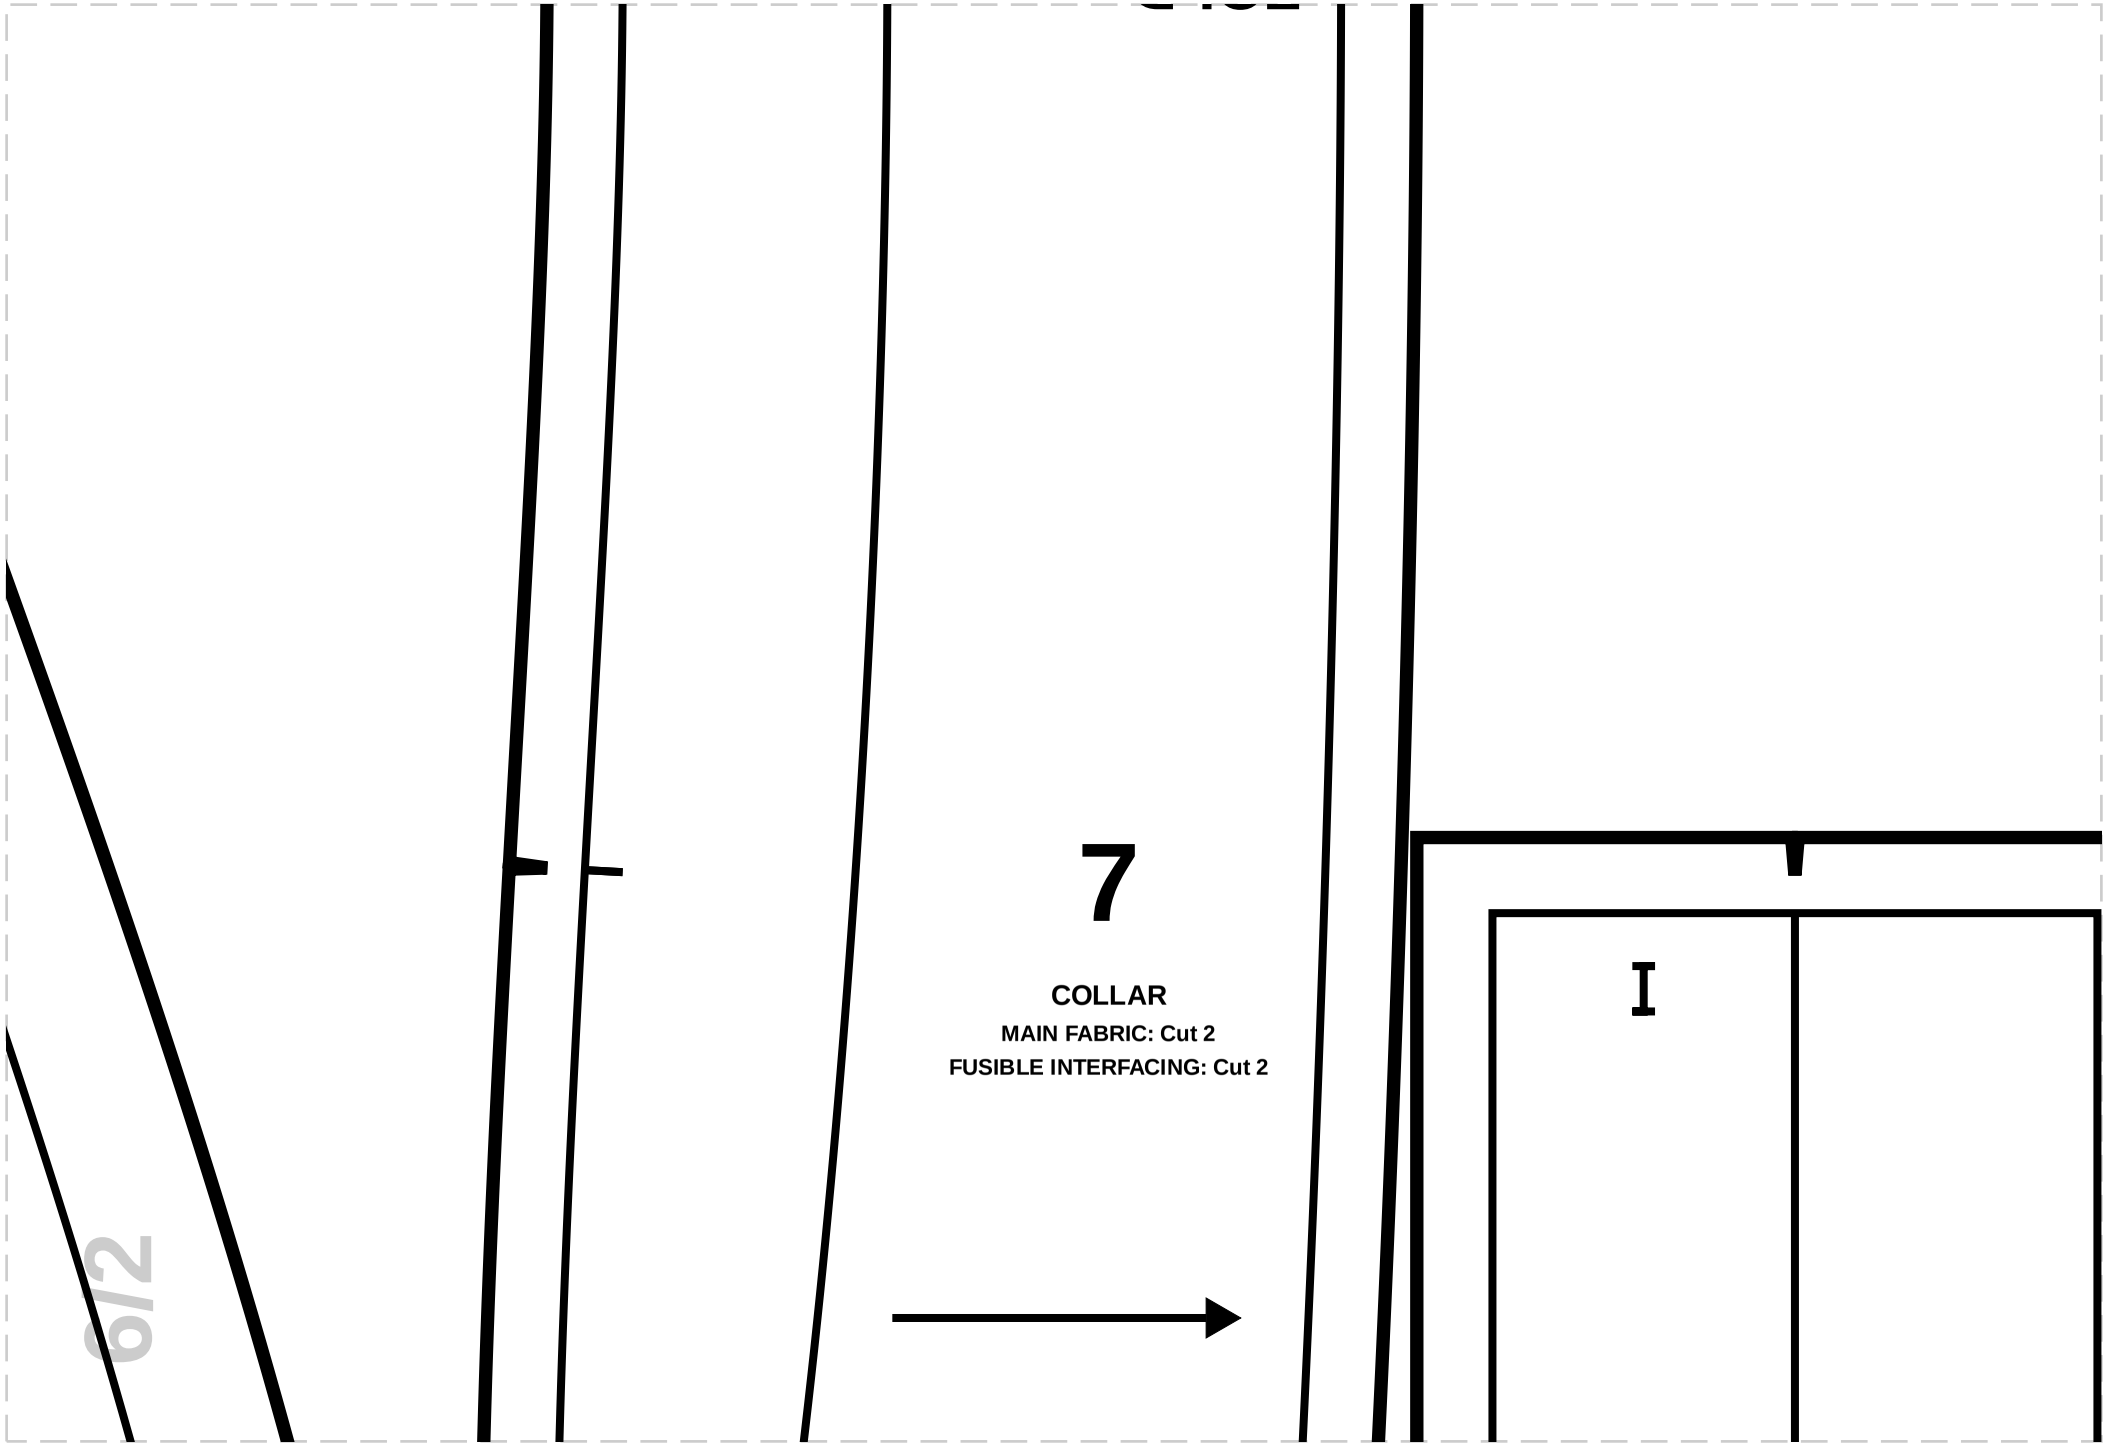
7
COLLAR
MAIN FABRIC: Cut 2
FUSIBLE INTERFACING: Cut 2
I
6/2

6/3

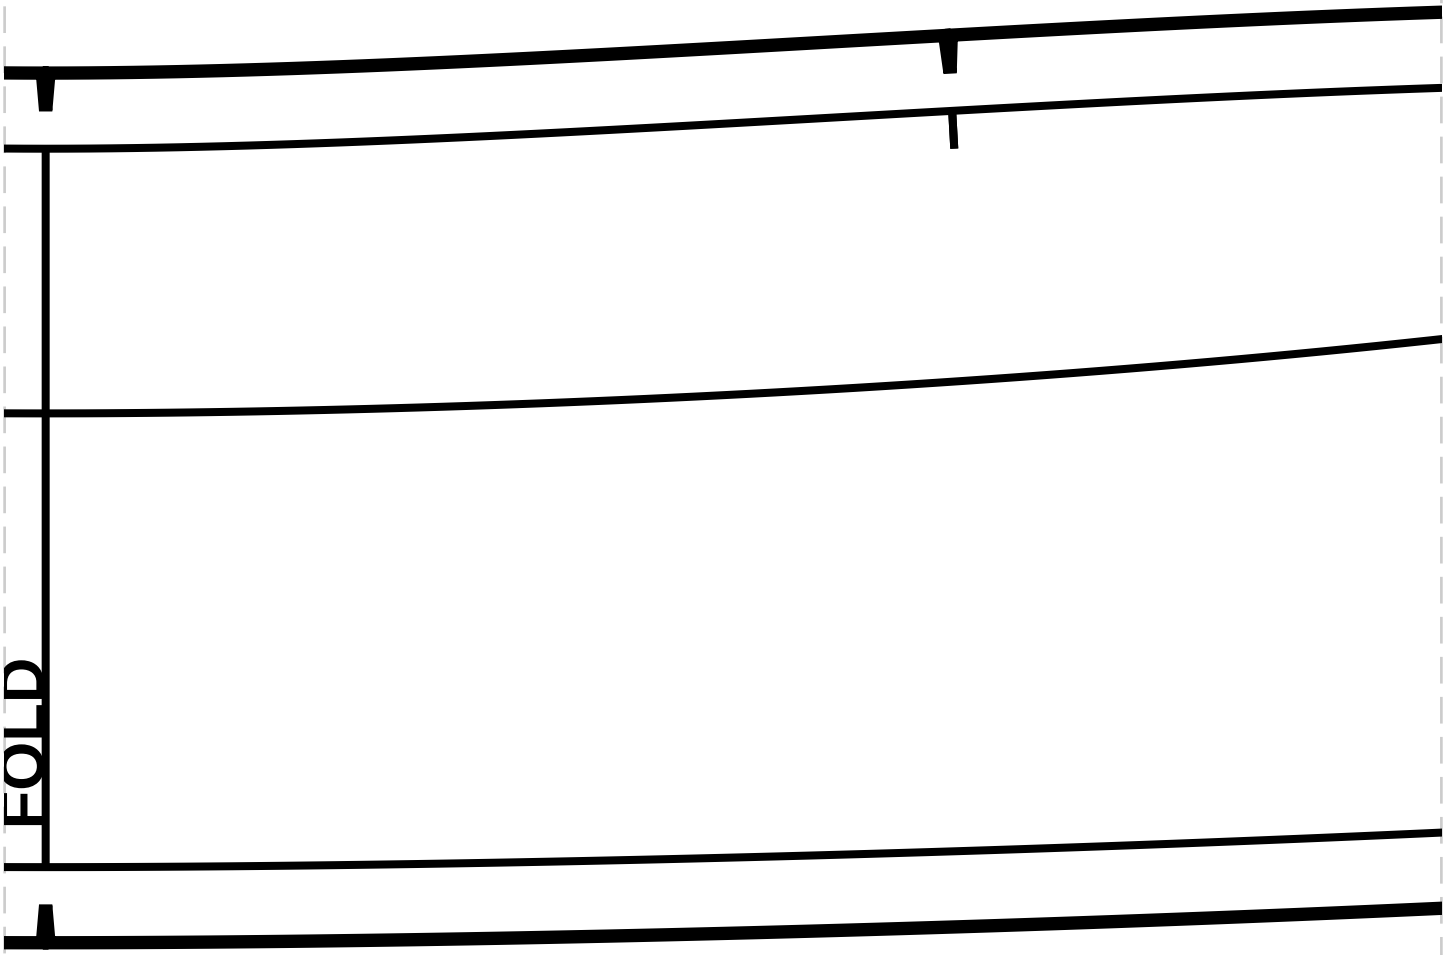

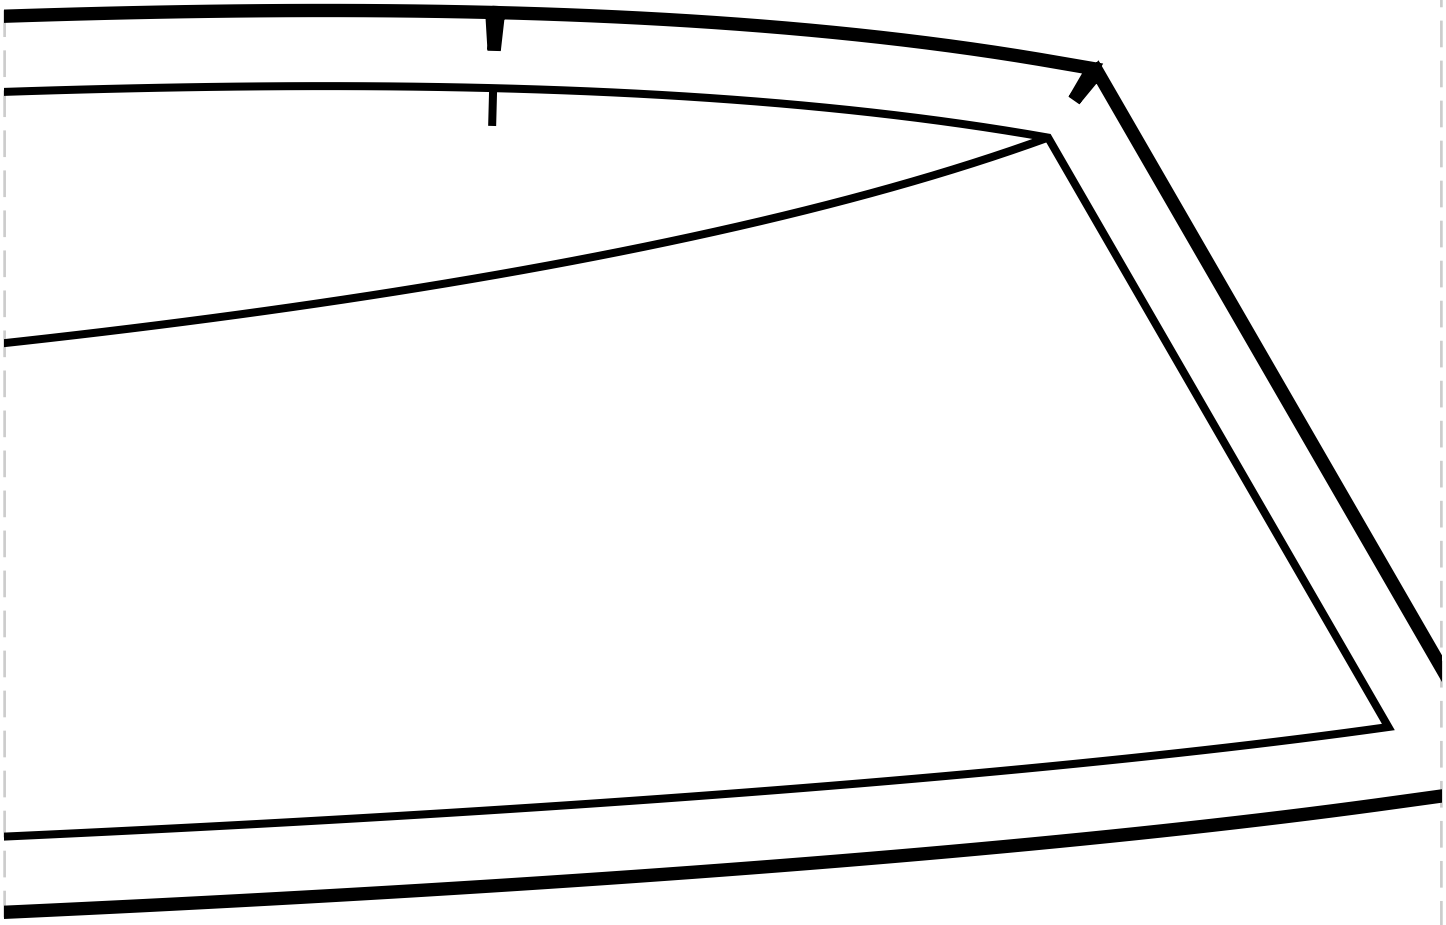



7/3

7/4

7/5