
cozysewpatterns

Print this Calibration Test page first!

Size: Height: 167.75, Bust: 80, Waist: 63.5, Hips: 87.75
00

Notes

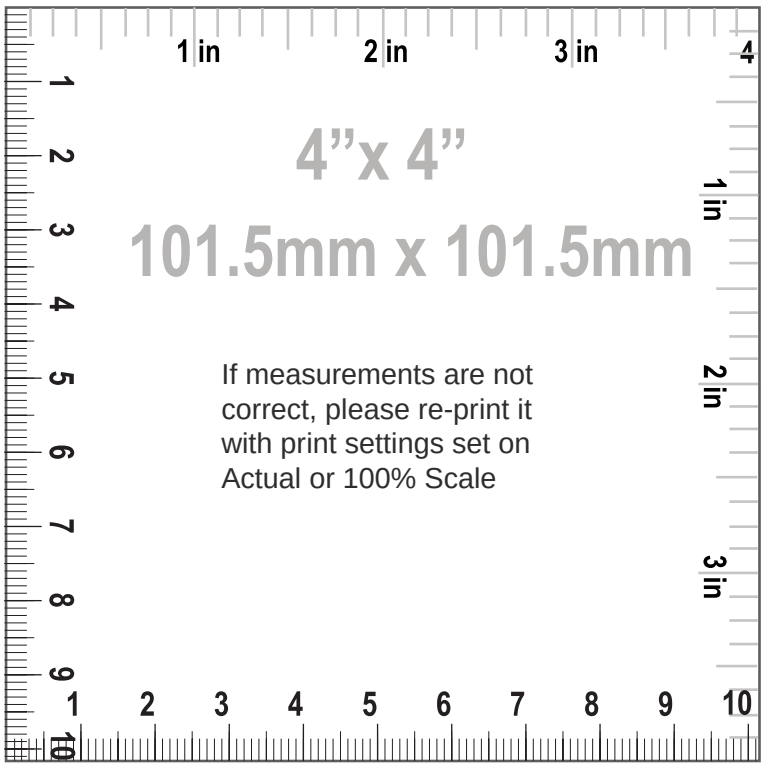

How to print

Printing

Once your Calibration Test Page has been printed, measure the 4”x 4” (10cm) scale box with a ruler. If the lengths match, you can confidently print your pattern. If the rulers do not match, set your print settings to 100% or Actual and retry.

Cutting

Your printouts will always have a dashed border to perfectly match your sheets. Cut off the right edge of each page. Be careful not to cut beyond the dashed mark, otherwise your patterns will not align accurately.

Tapping

Group each sheet by the second number marked on each pate i.e. in a group 1, there are: 1/1, 2/1, 3/1, 4/1, etc. In a group 2: 1/2, 2/2 etc. 2. Place page 1/1 on top of the page 2/1, overlapping the right side edge. Match corners and crosses and secure with a pin or tape. Then use a scotch tape to permanently attach the sheets together.

00
Seam Allowance: 1 (3/8 in)

Pattern pieces:

1. "FRONT", MAIN FABRIC: Cut 2
2. "BACK", MAIN FABRIC: Cut 1
3. "SLEEVE", MAIN FABRIC: Cut 2
4. "CUFF", MAIN FABRIC, FUSIBLE INTERFACING: Cut 2
5. "FRONT NECK FACING", MAIN FABRIC, FUSIBLE INTERFACING: Cut 2
6. "BACK NECK FACING", MAIN FABRIC, FUSIBLE INTERFACING: Cut 1
7. "COLLAR", MAIN FABRIC, FUSIBLE INTERFACING: Cut 2
8. "EDGING", MAIN FABRIC, FUSIBLE INTERFACING: Cut 2


Pattern Specs (Circumferences are divided by 2):


1. Hem max 3.00 none (1 1/8 in)
2. Seam allowance max 2.00 none (3/4 in)
3. Seam allowance p max 1.50 none (5/8 in)
4. Stretch factor 1.00 none (3/8 in)
5. Stretch factor horizontal 1.00 none (3/8 in)
6. Stretch factor vertical 1.00 none (3/8 in)
7. Front neck drop 13.84 cm (5 1/2 in)
8. Front length from HPS to hem 65.79 cm (25 7/8 in)
9. Across chest 42.75 cm (16 7/8 in)
10. Center front length to hem 51.94 cm (20 1/2 in)
11. Center back length to hem 63.32 cm (24 7/8 in)
12. Across front 29.77 cm (11 3/4 in)
13. Across back 32.49 cm (12 3/4 in)
14. Across shoulders 38.20 cm (15 in)
15. Side seam 36.73 cm (14 1/2 in)
16. Waist 35.25 cm (13 7/8 in)
17. Hips 46.62 cm (18 3/8 in)
18. Hemline sweep 63.93 cm (25 1/8 in)
19. Armhole length front 19.01 cm (7 1/2 in)
20. Armhole length back 22.50 cm (8 7/8 in)
21. Neck opening 19.63 cm (7 3/4 in)
22. Neckline length 58.04 cm (22 7/8 in)
23. Back neck drop 3.32 cm (1 1/4 in)


24. Shoulder width 9.06 cm (3 5/8 in)
25. Bust dart to bust dart 20.30 cm (8 in)
26. Sleeve length 55.21 cm (21 3/4 in)
27. Sleeve upper arm width 28.52 cm (11 1/4 in)
28. Cuff width 4.00 cm (1 5/8 in)
29. Cuff length 21.06 cm (8 1/4 in)
30. Sleeve cap length 42.59 none (16 3/4 in)
31. Cuff button diameter 0.50 cm (1/4 in)
32. Cuff buttons quantity 2.00 pc
33. Front exposed 7mm zipper length 51.97 cm (20 1/2 in)
34. Collar width 9.50 cm (3 3/4 in)
35. Collar edges length 9.00 cm (3 1/2 in)


cozysewpatterns

Paper Size: LETTER;
Print Actual Size (100% Scale);

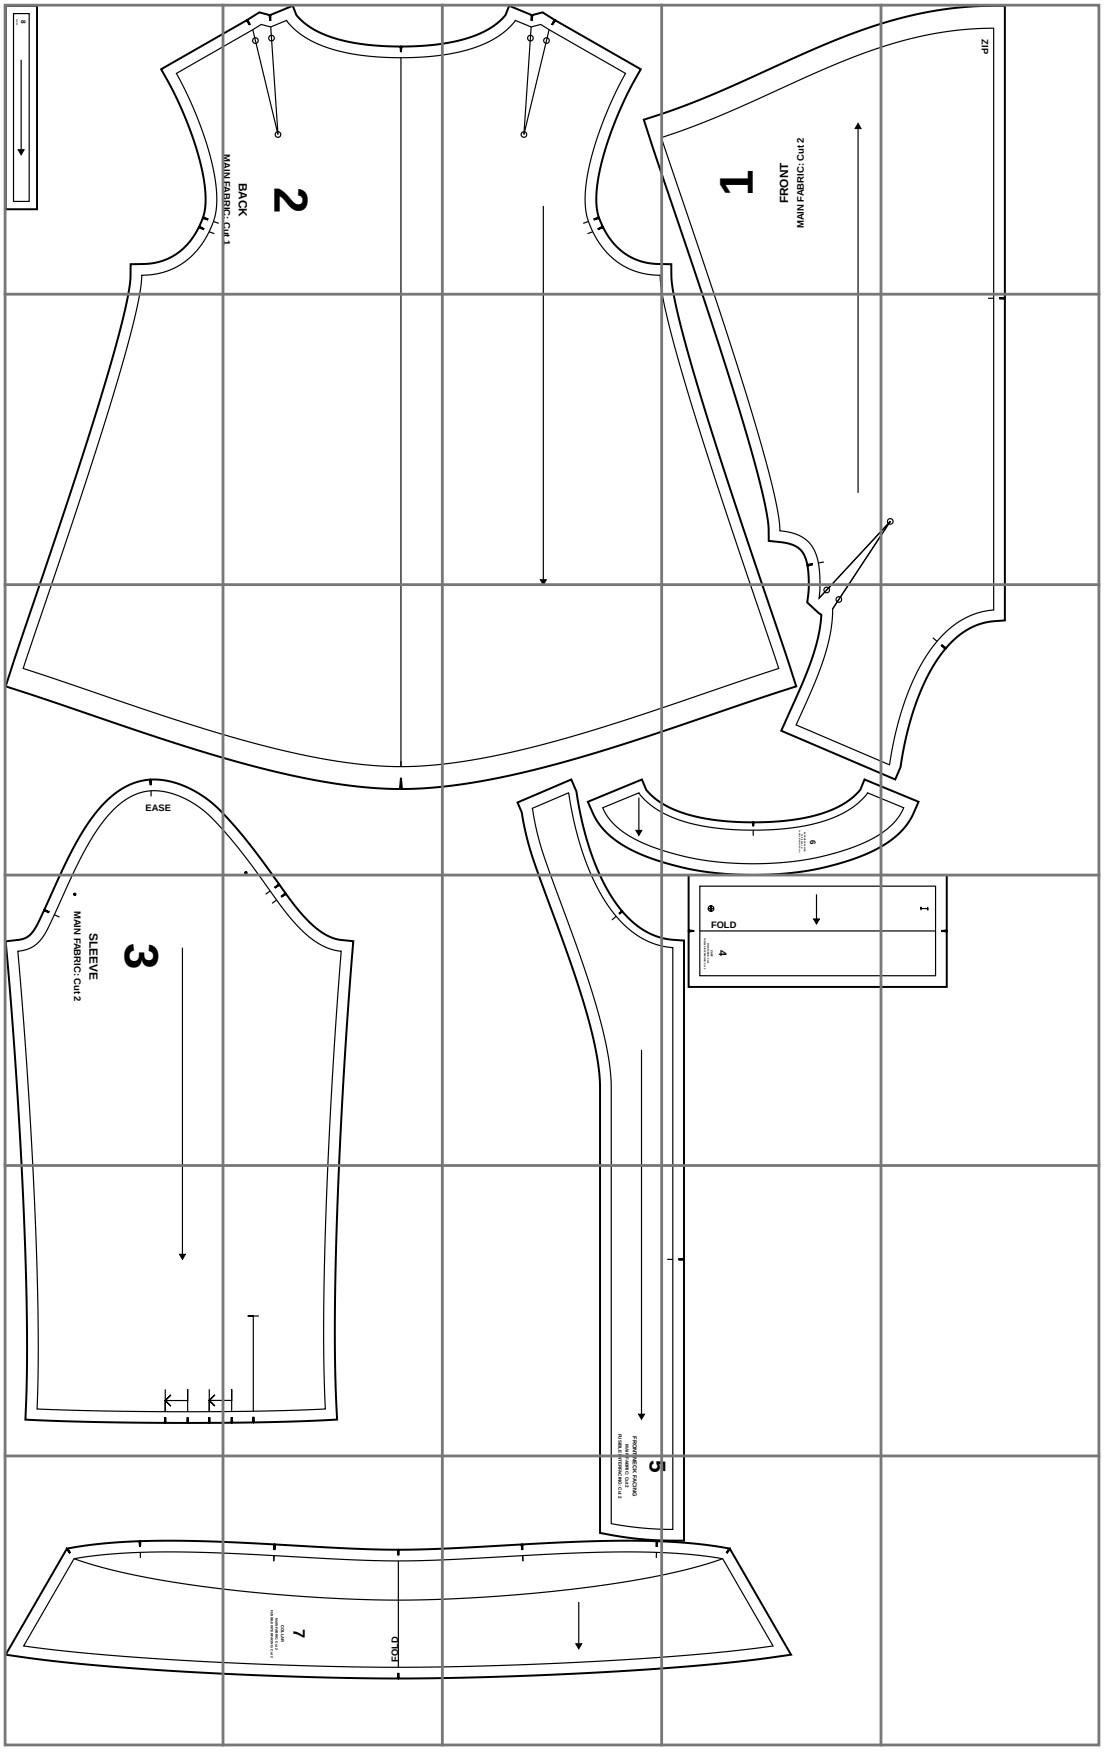

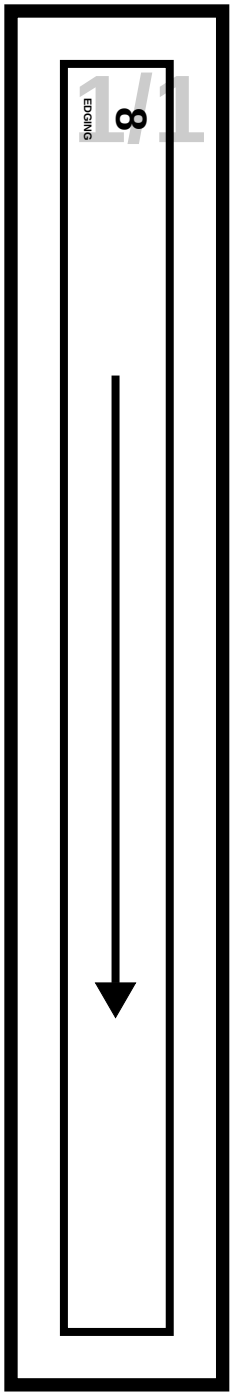
8
EDGING

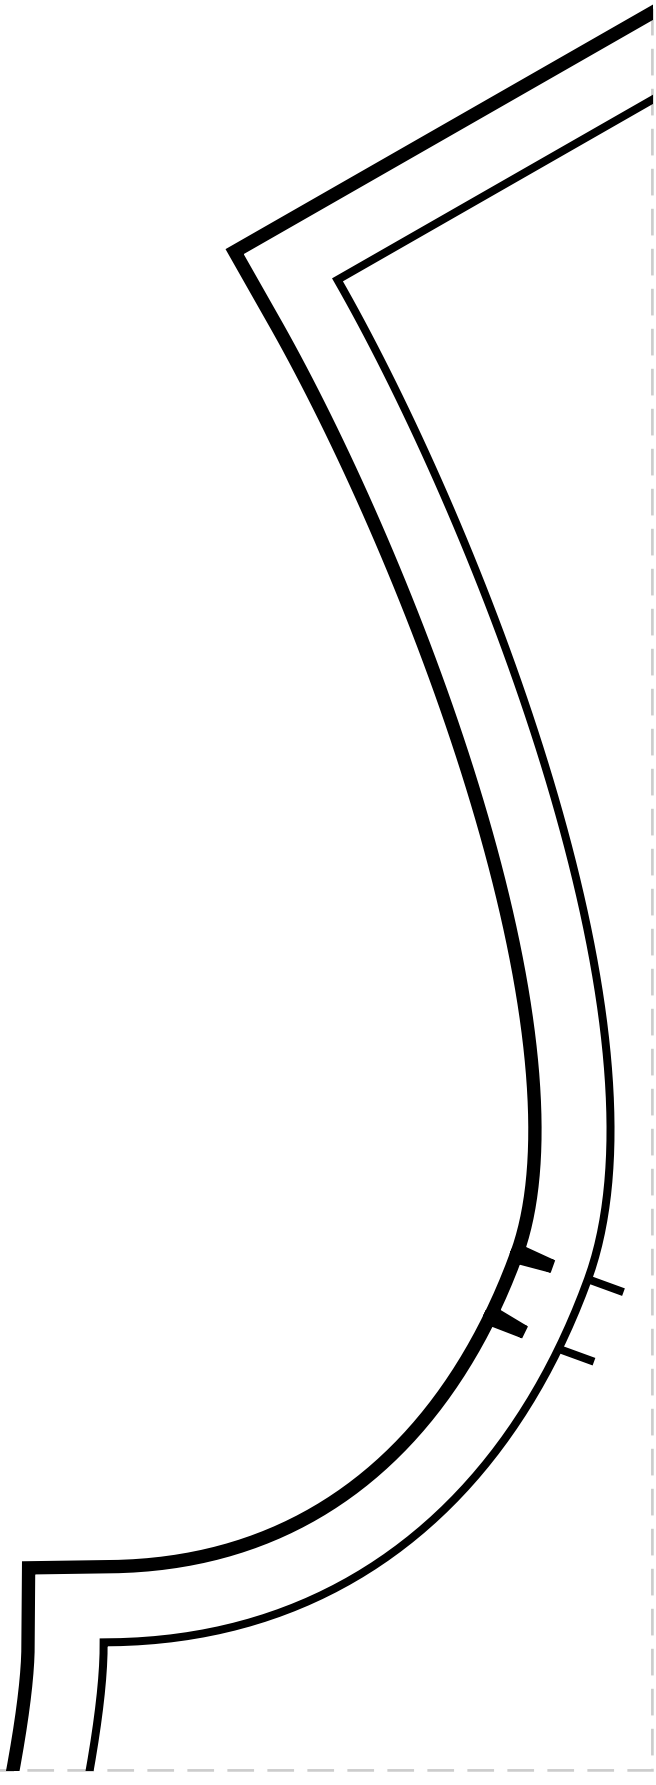


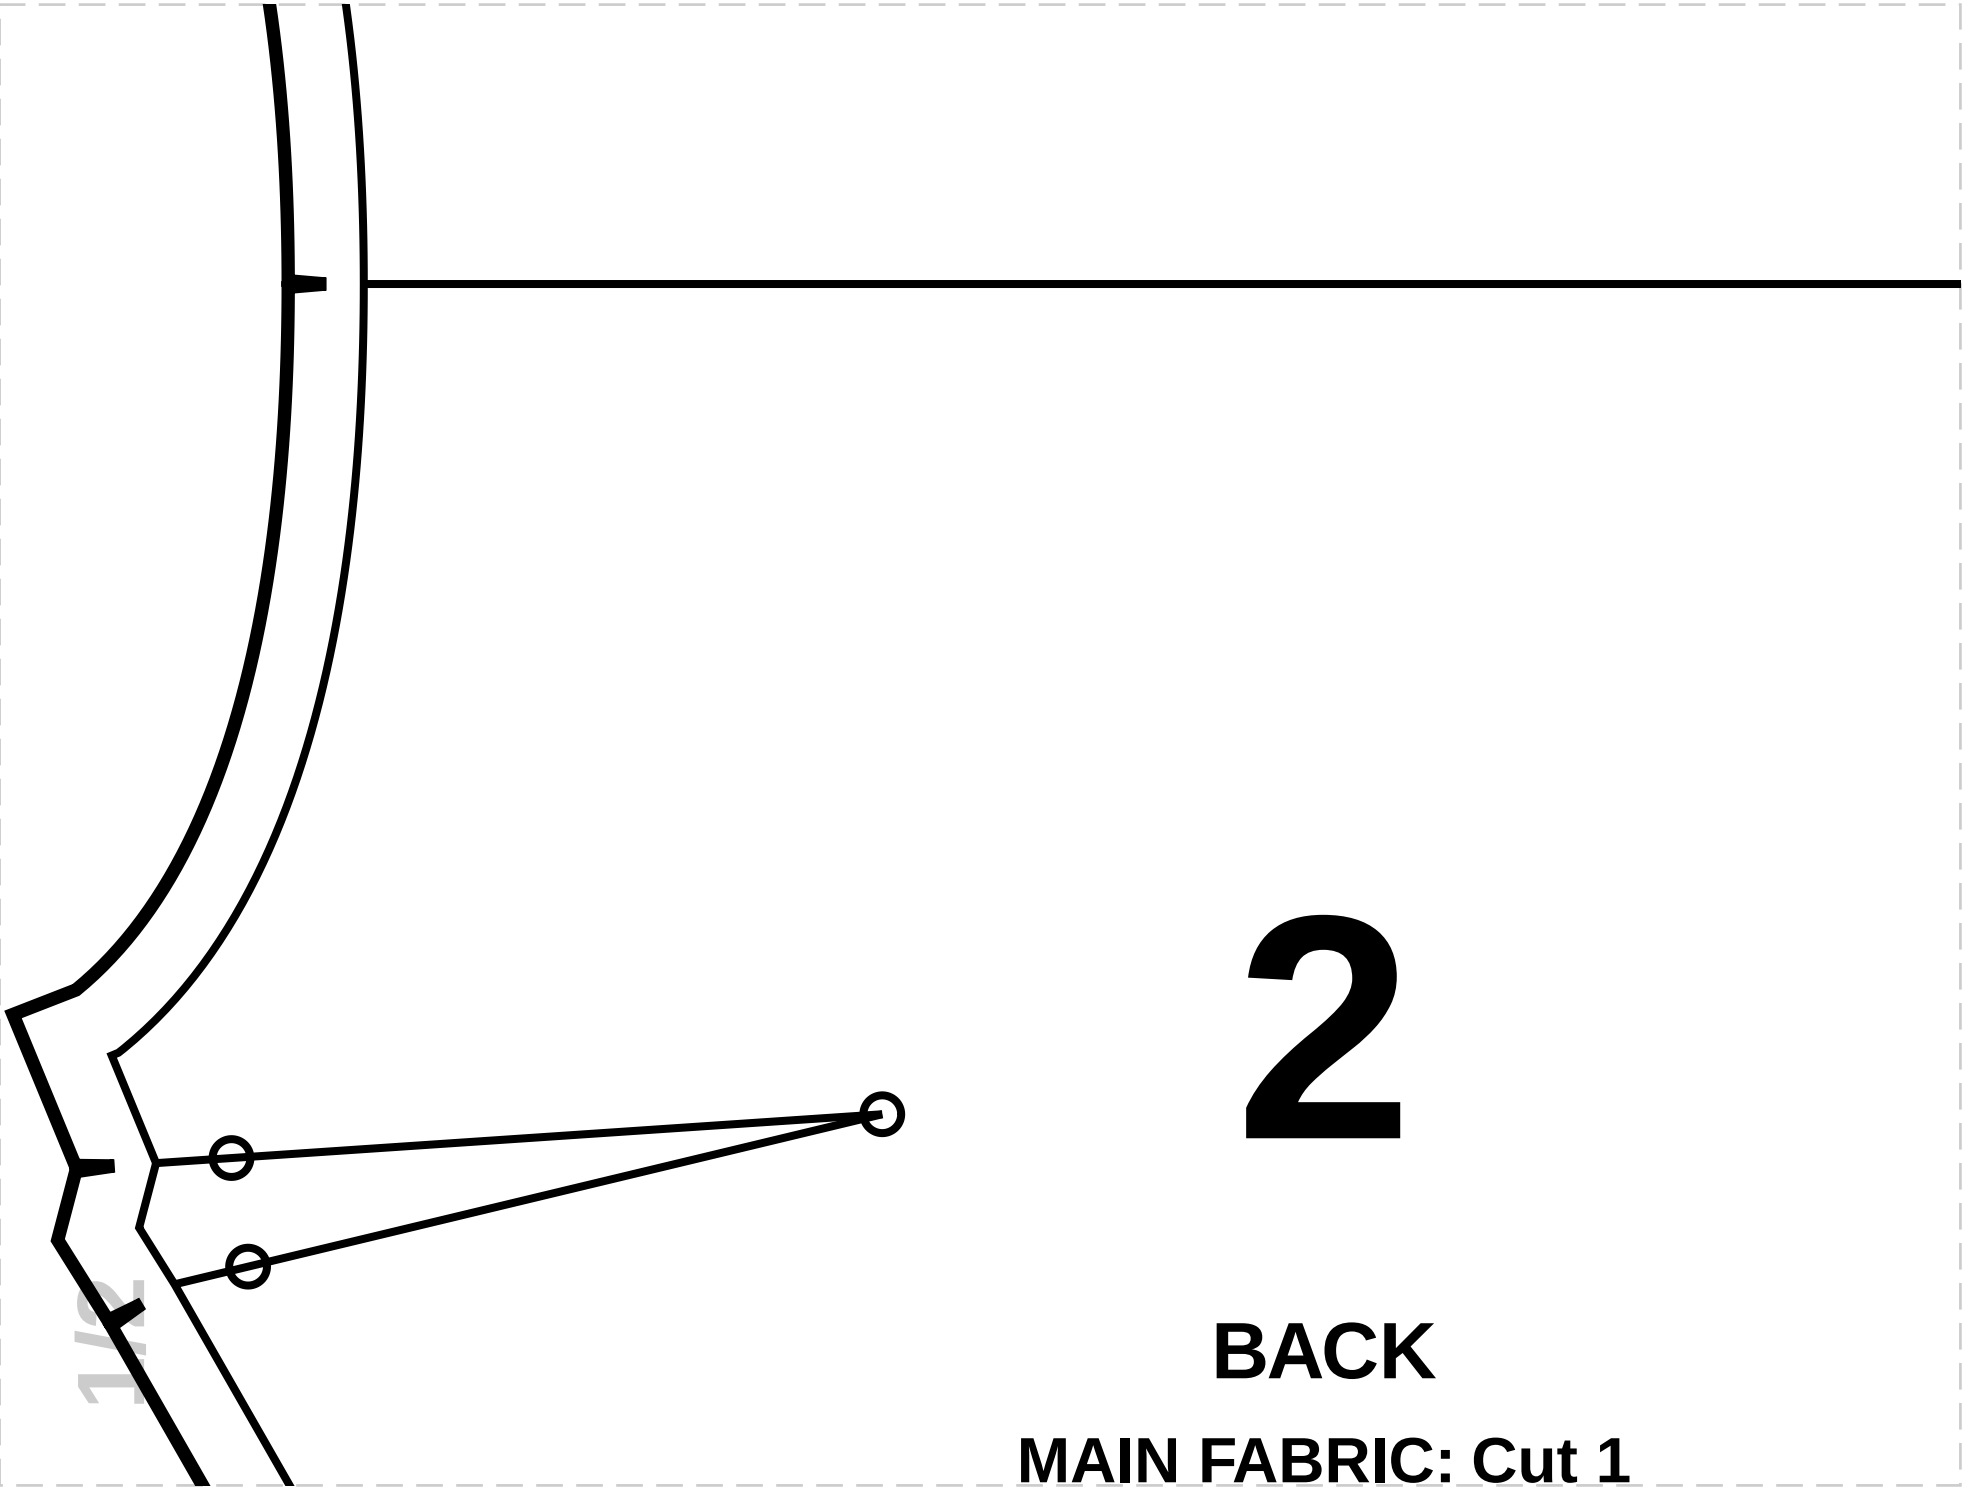

2

BACK


MAIN FABRIC: Cut 1

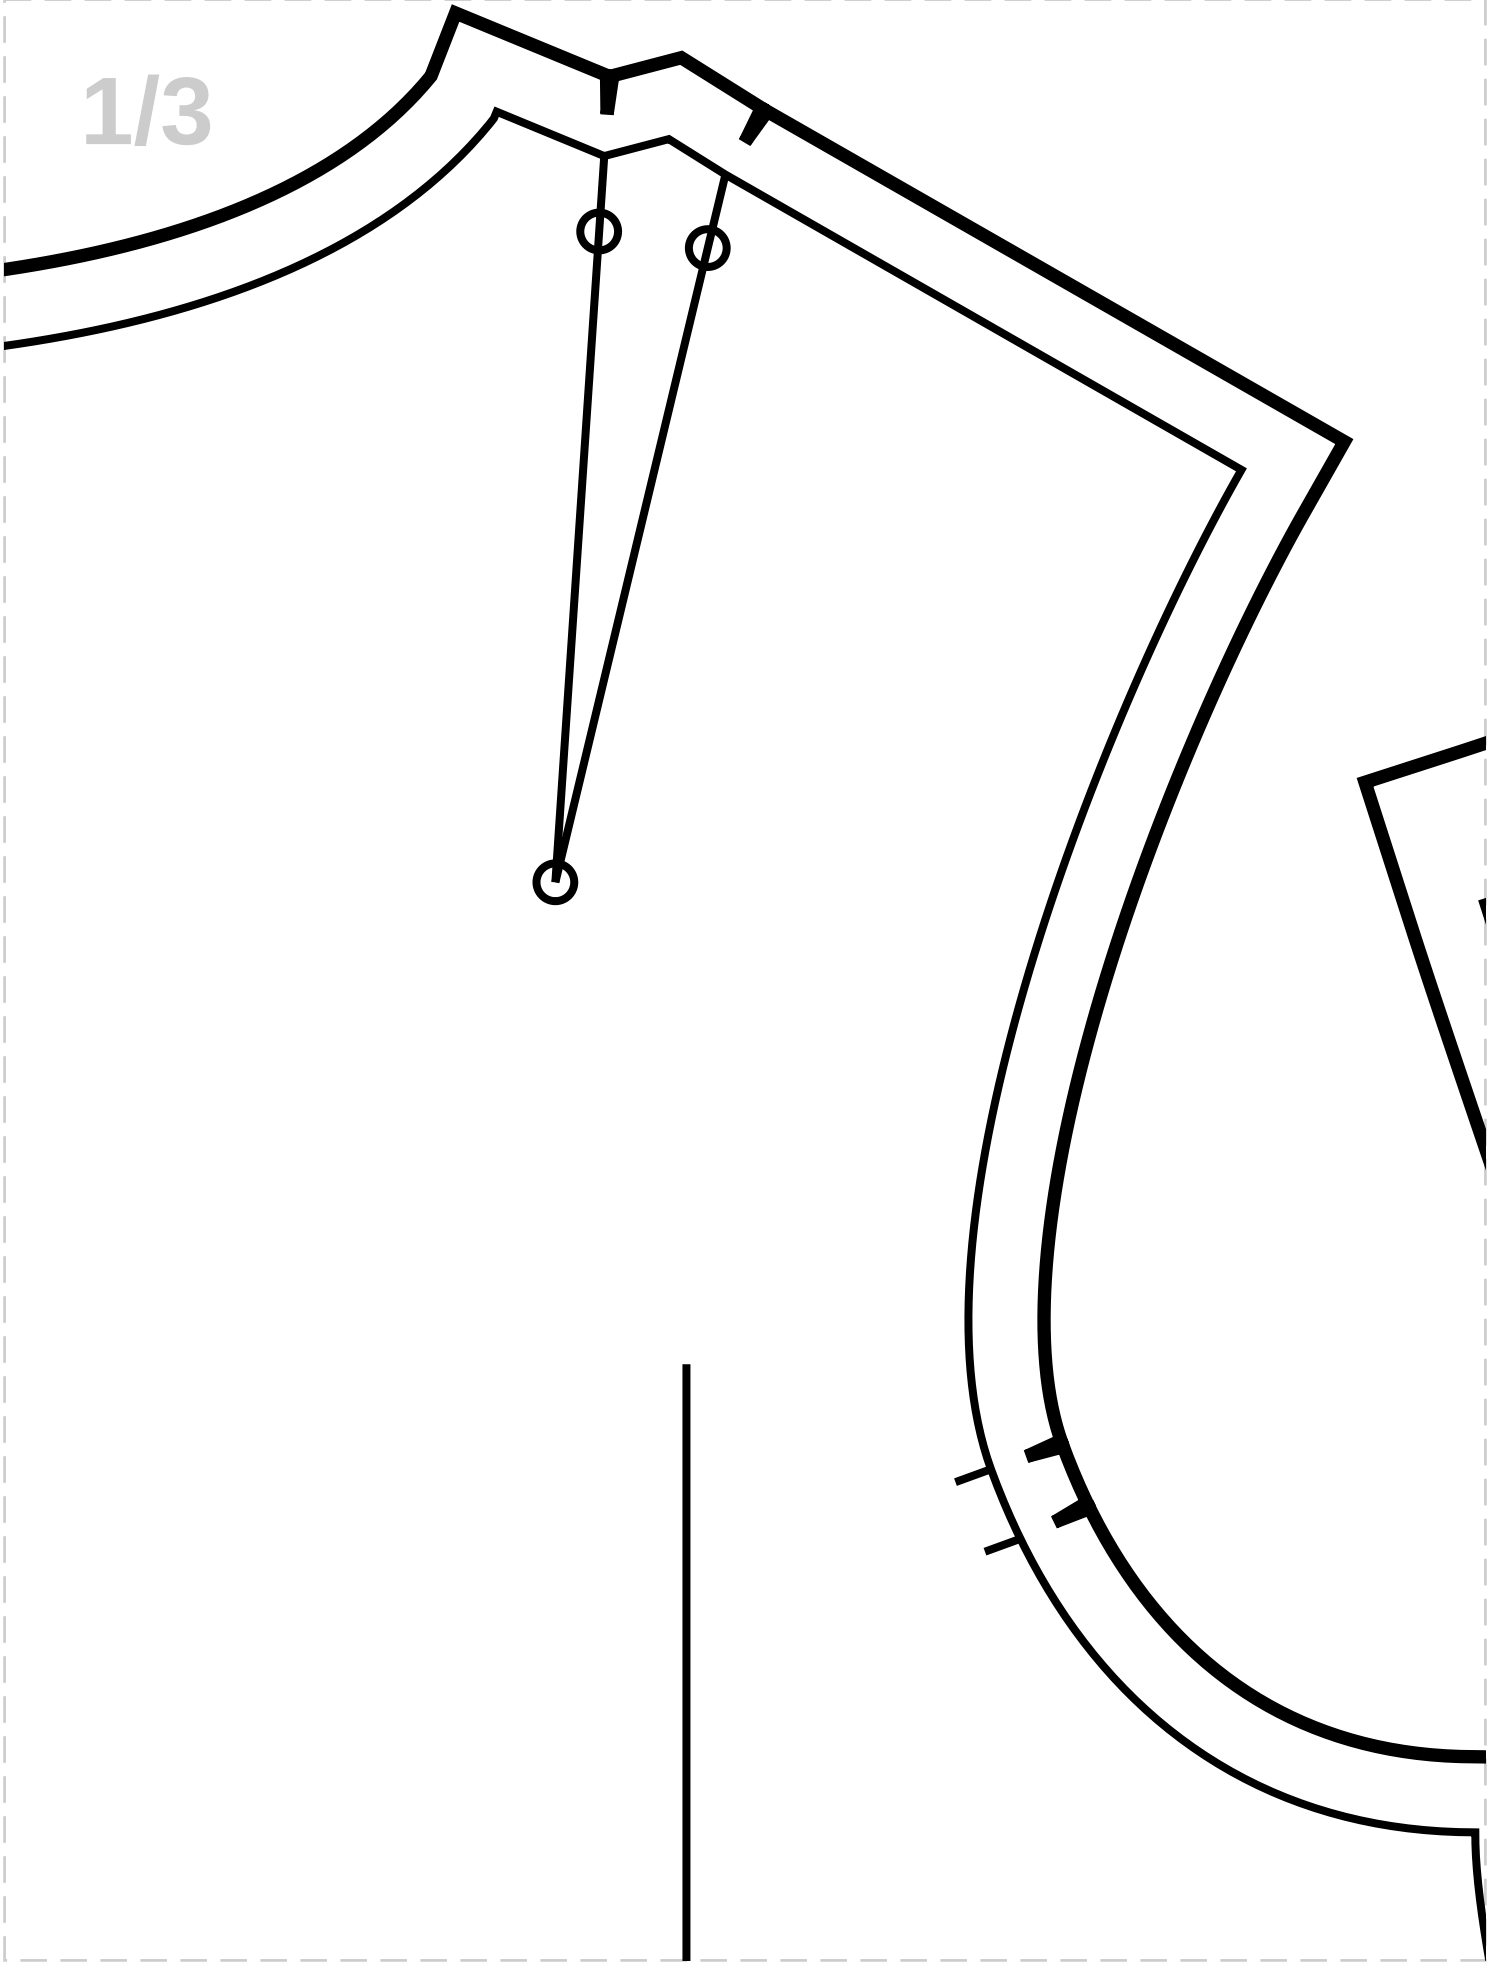



1

FRONT


MAIN FABRIC: Cut 2

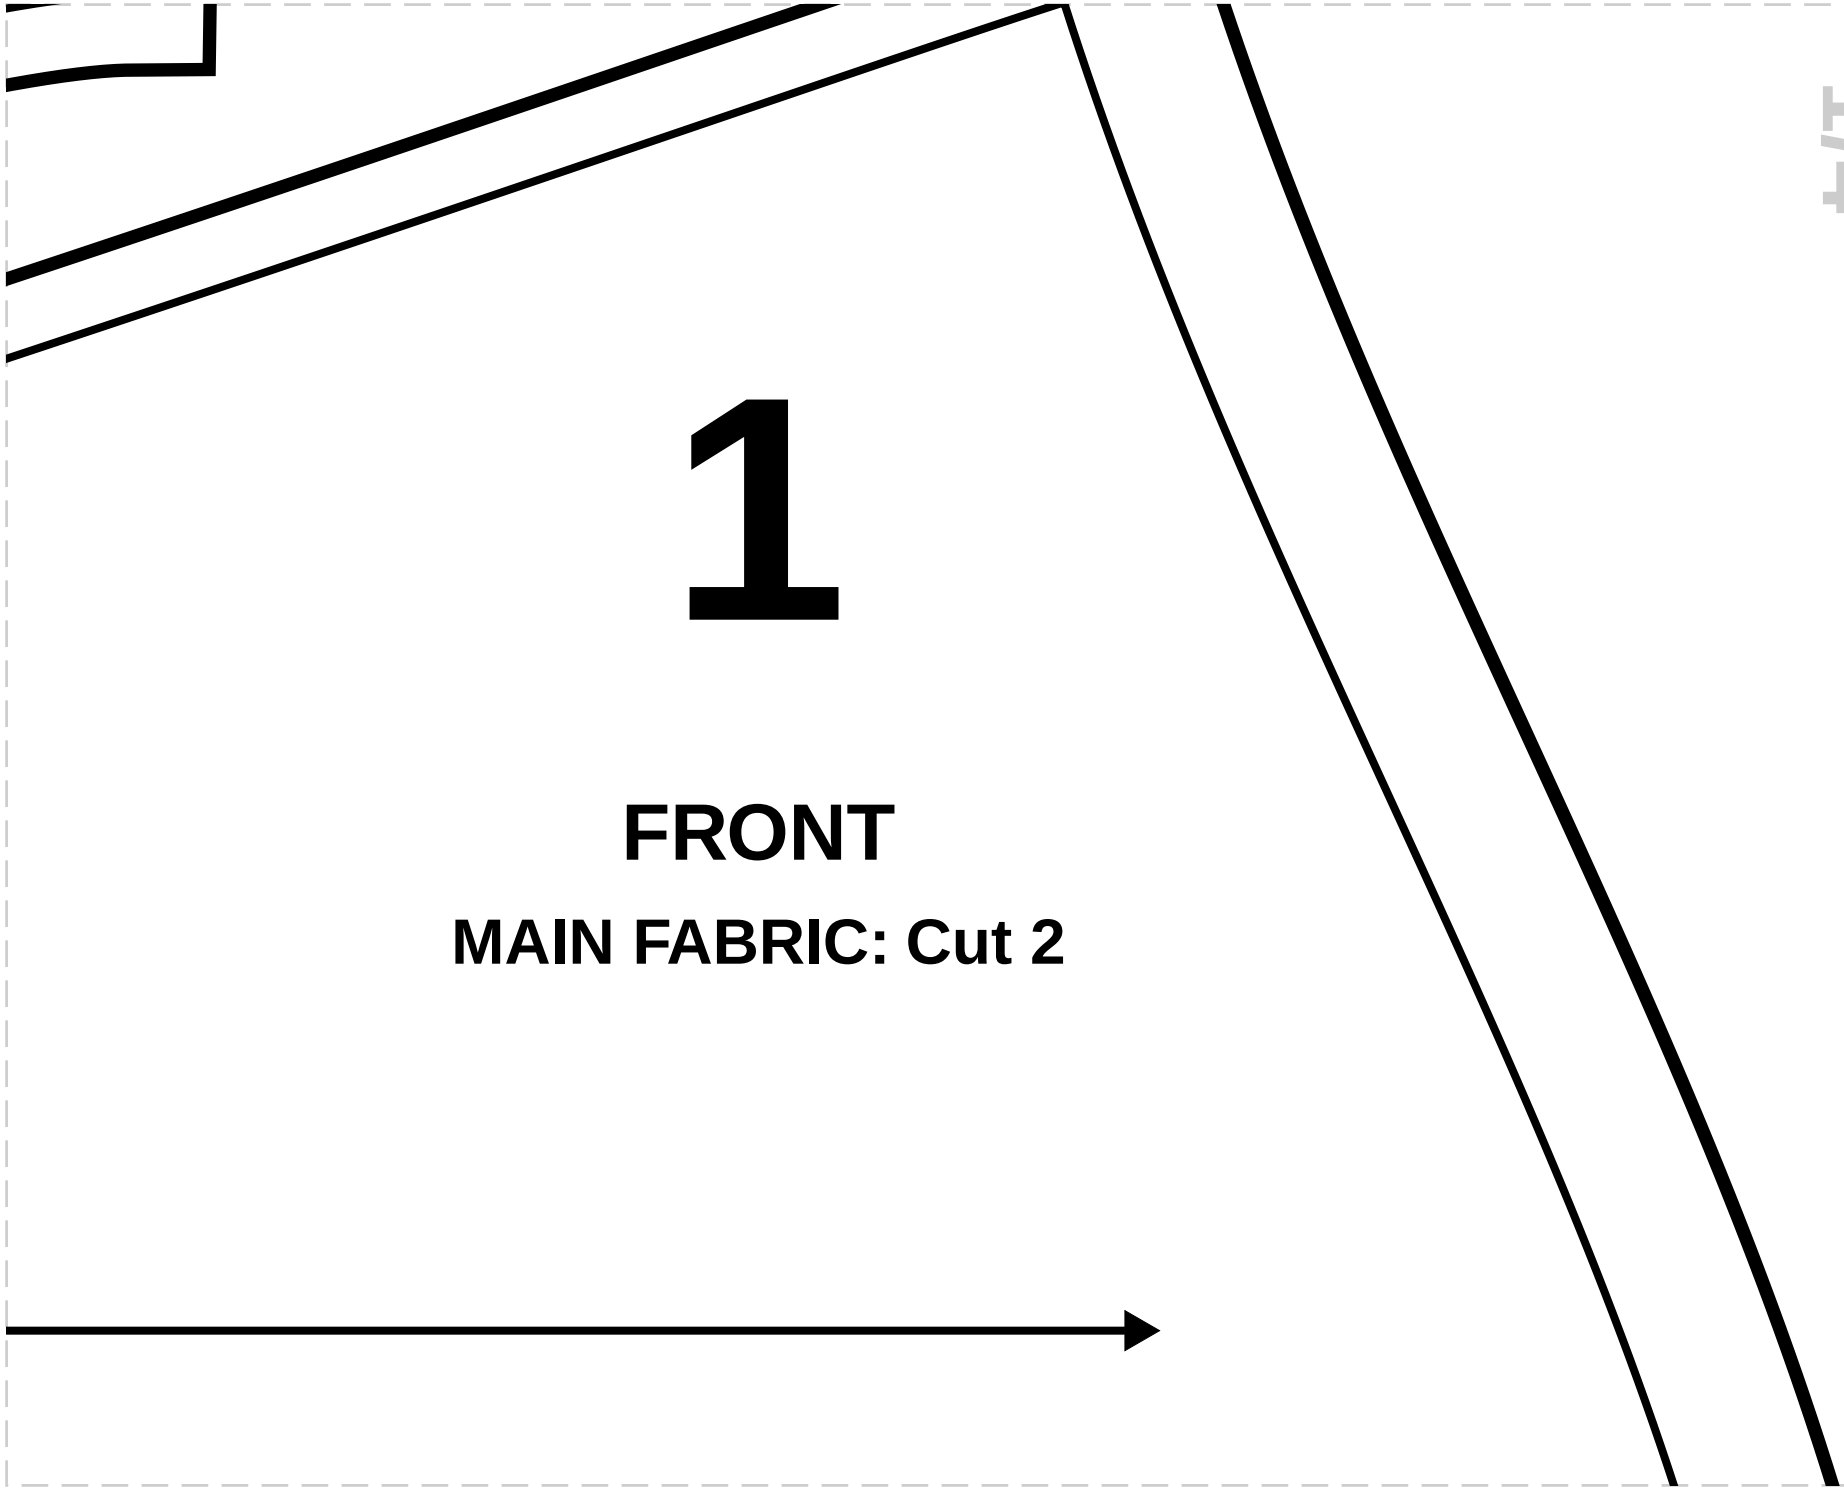


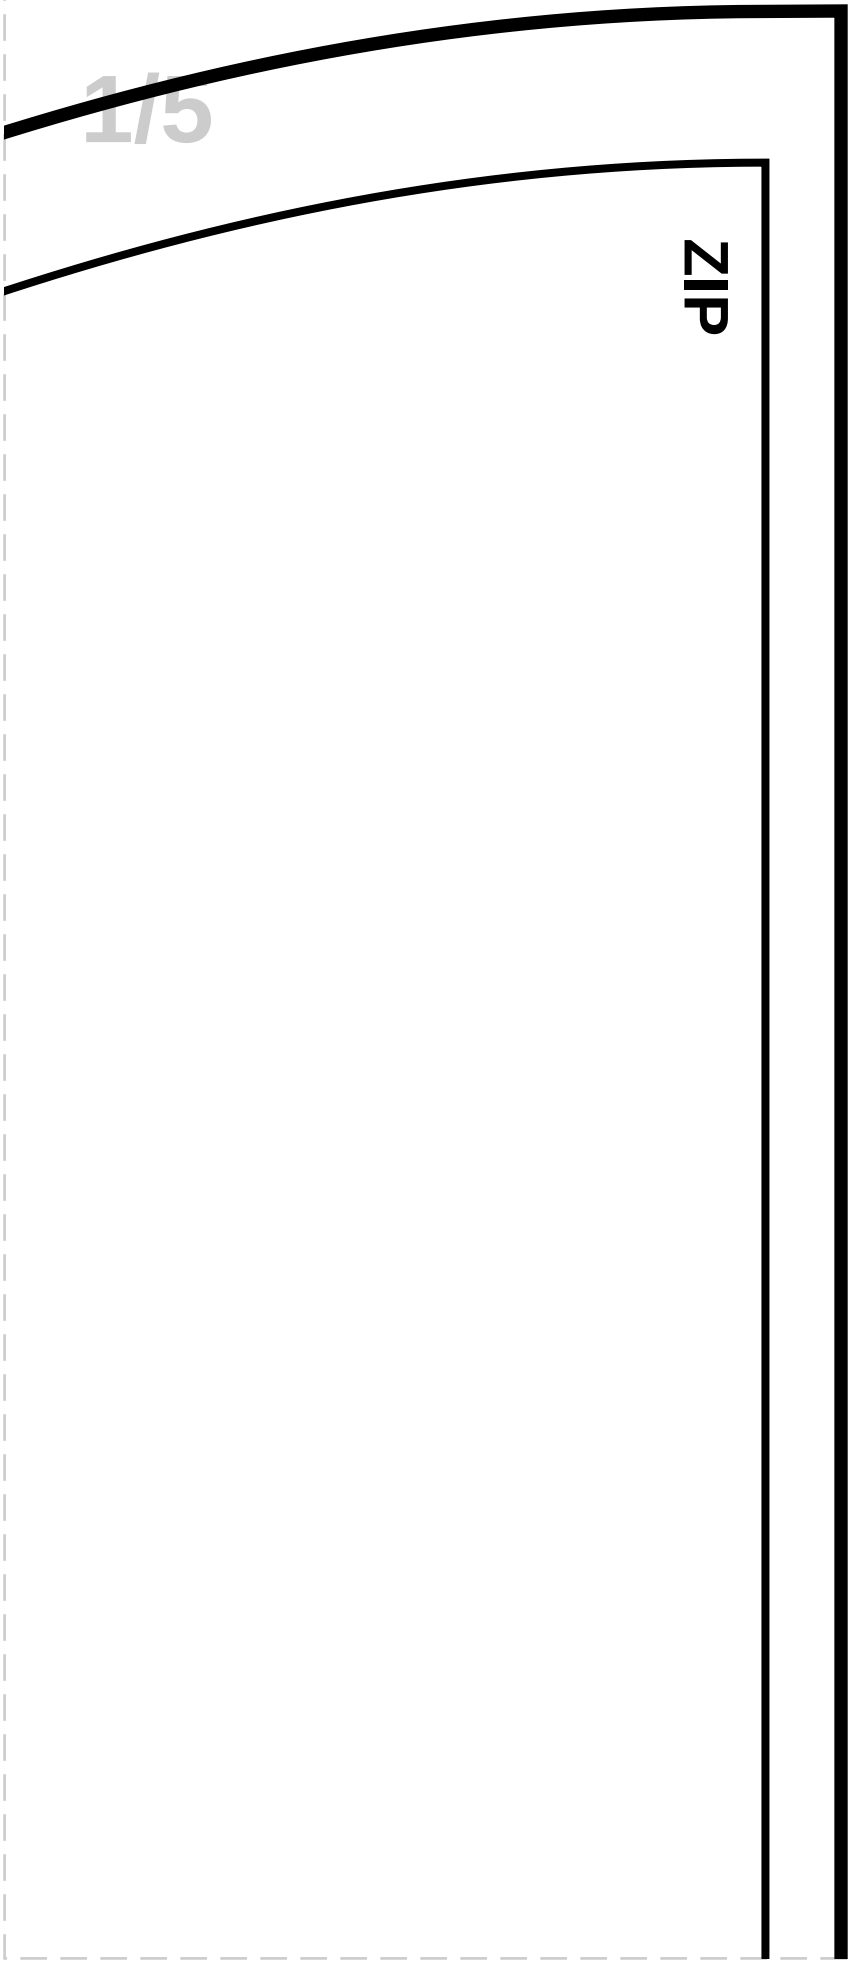
ZIP

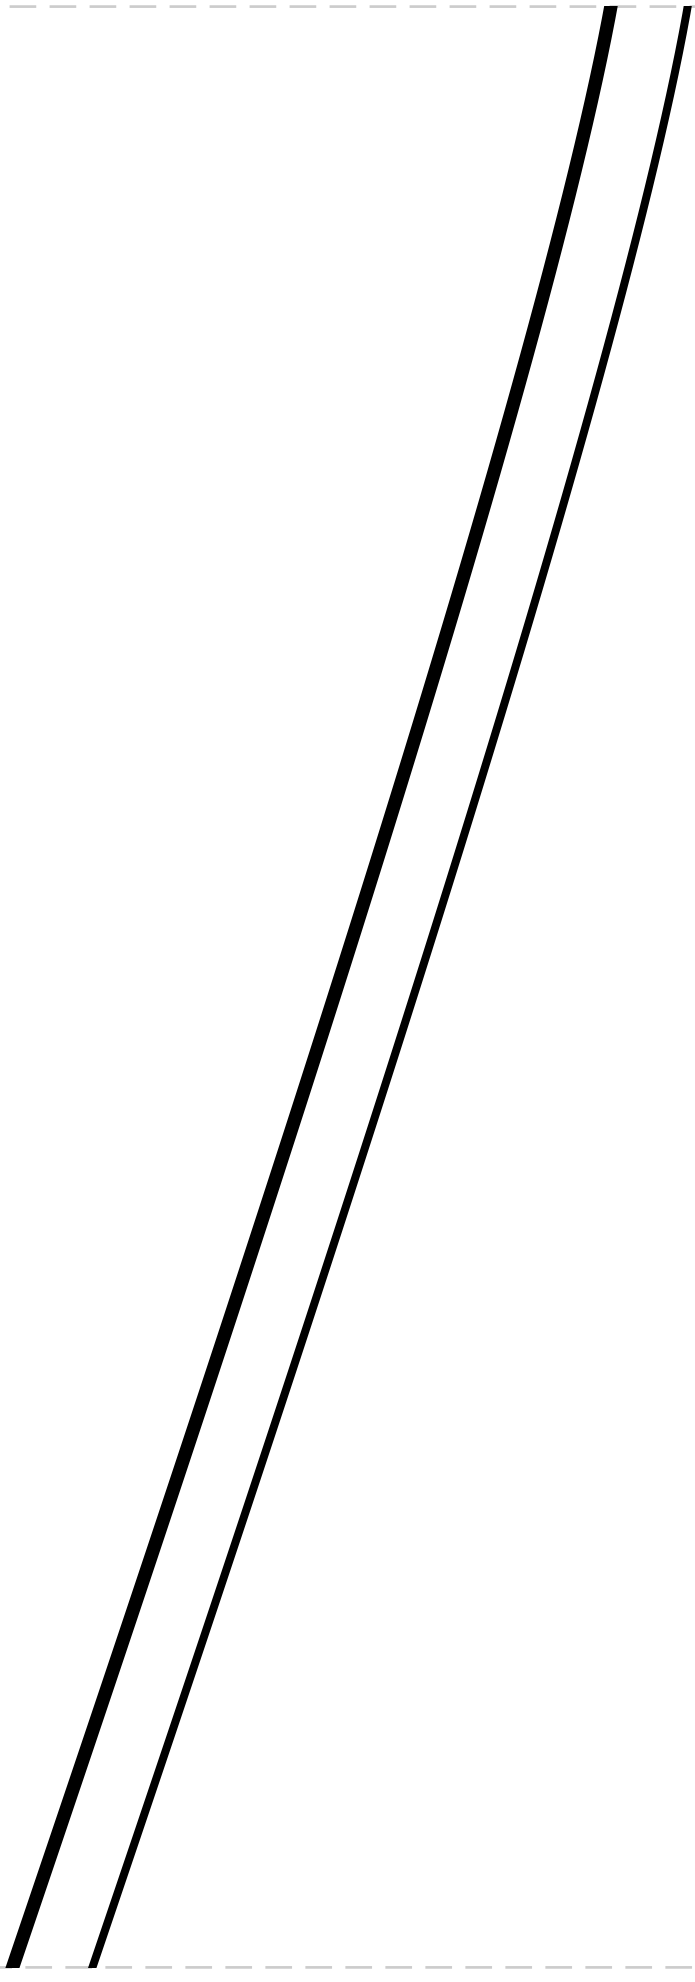





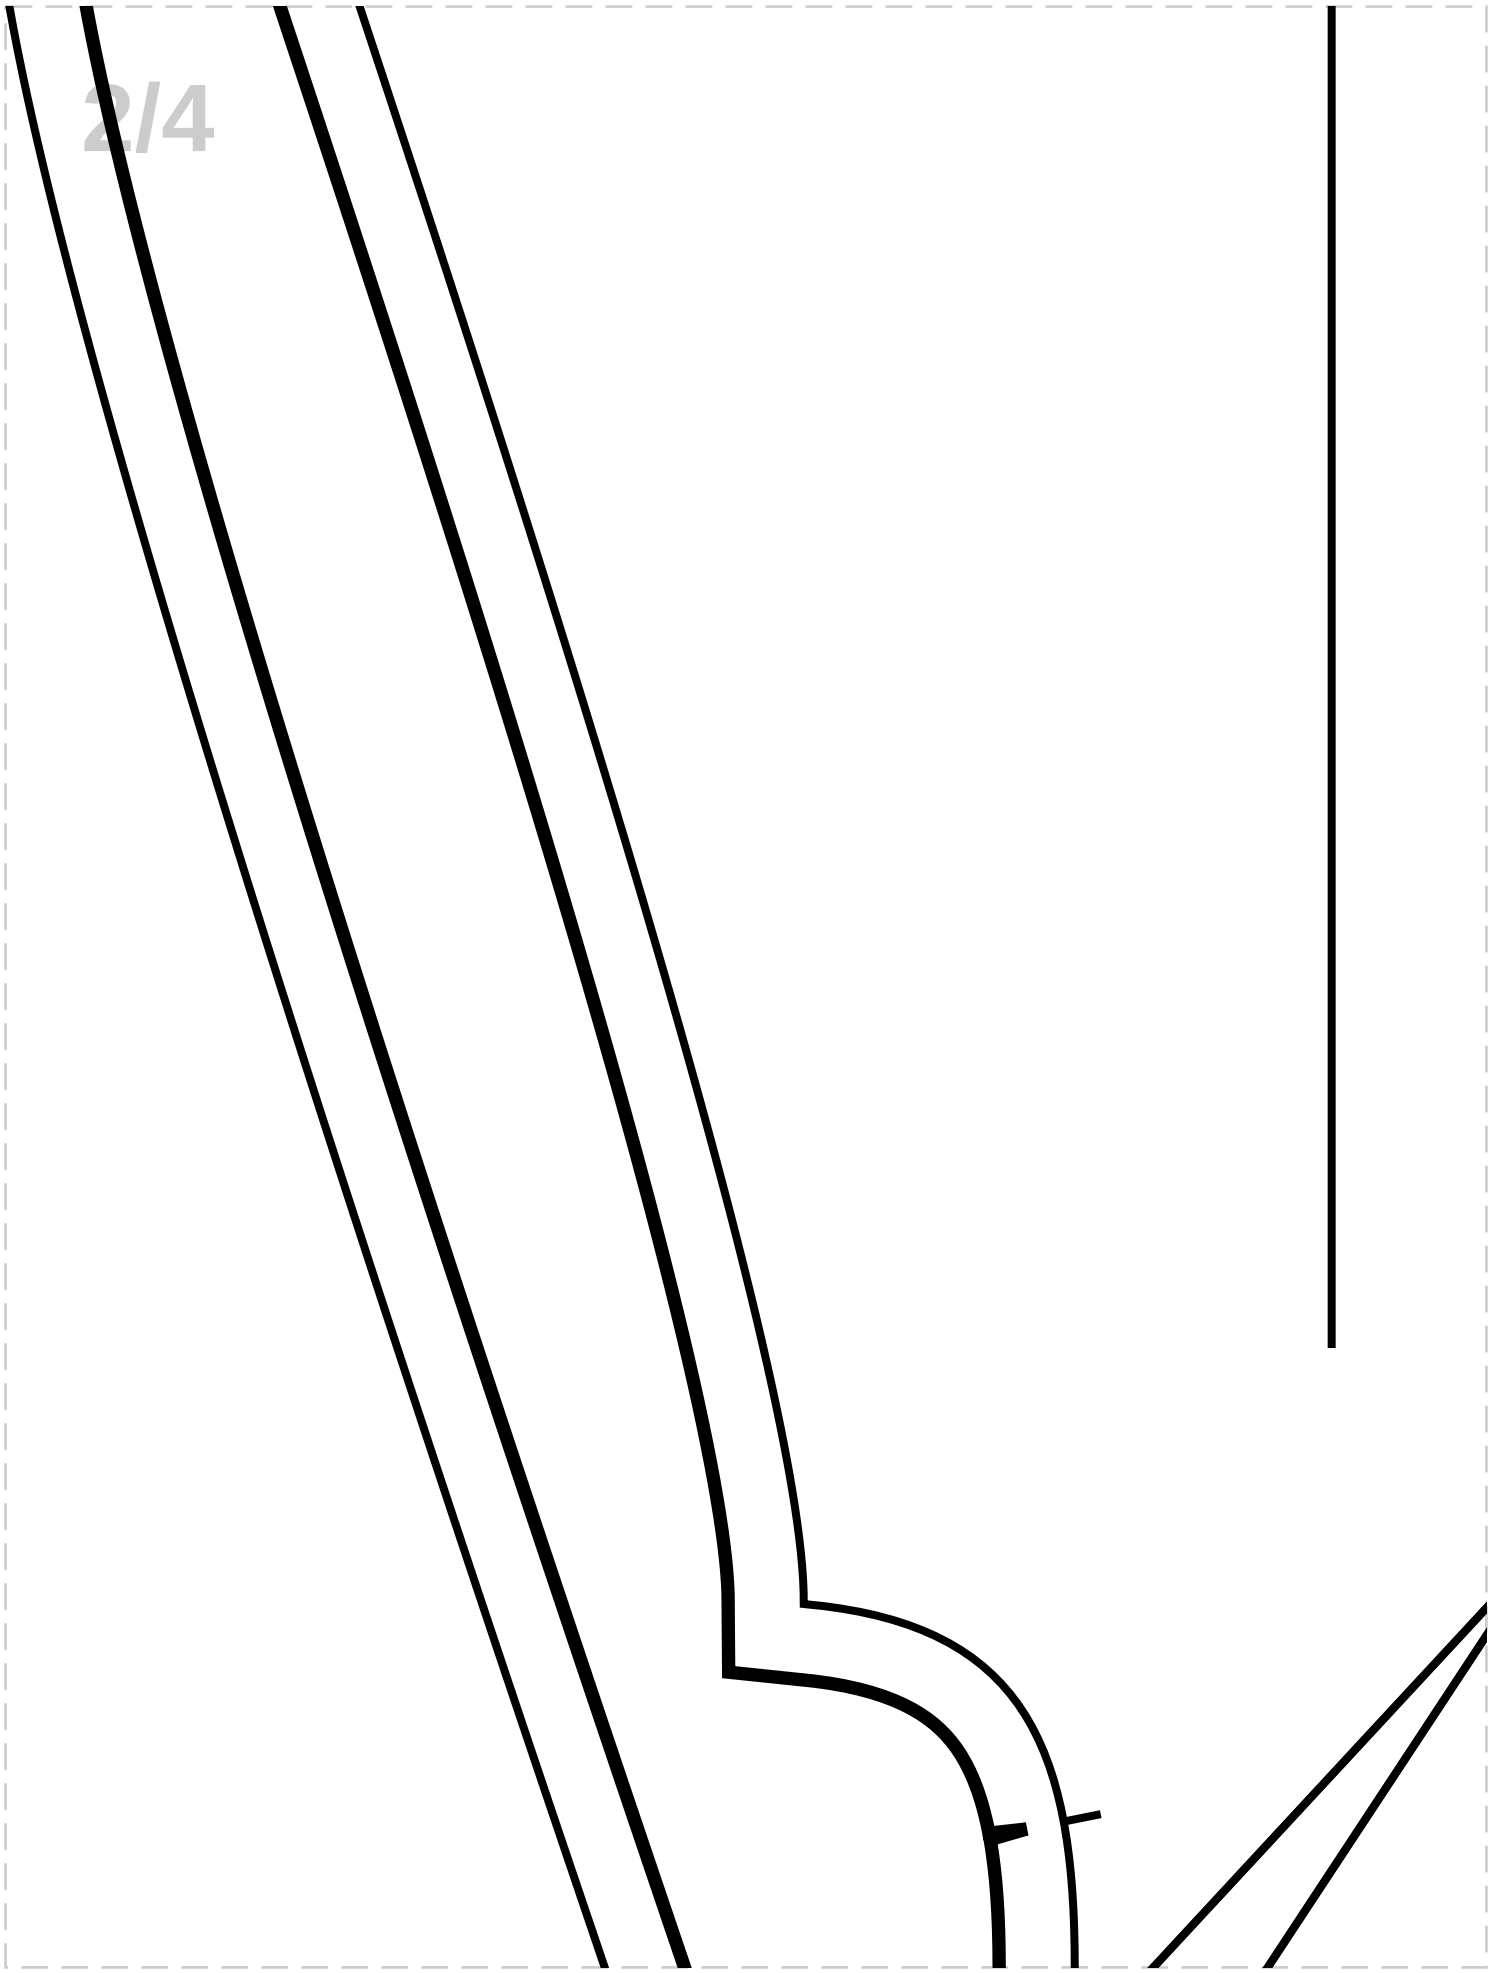





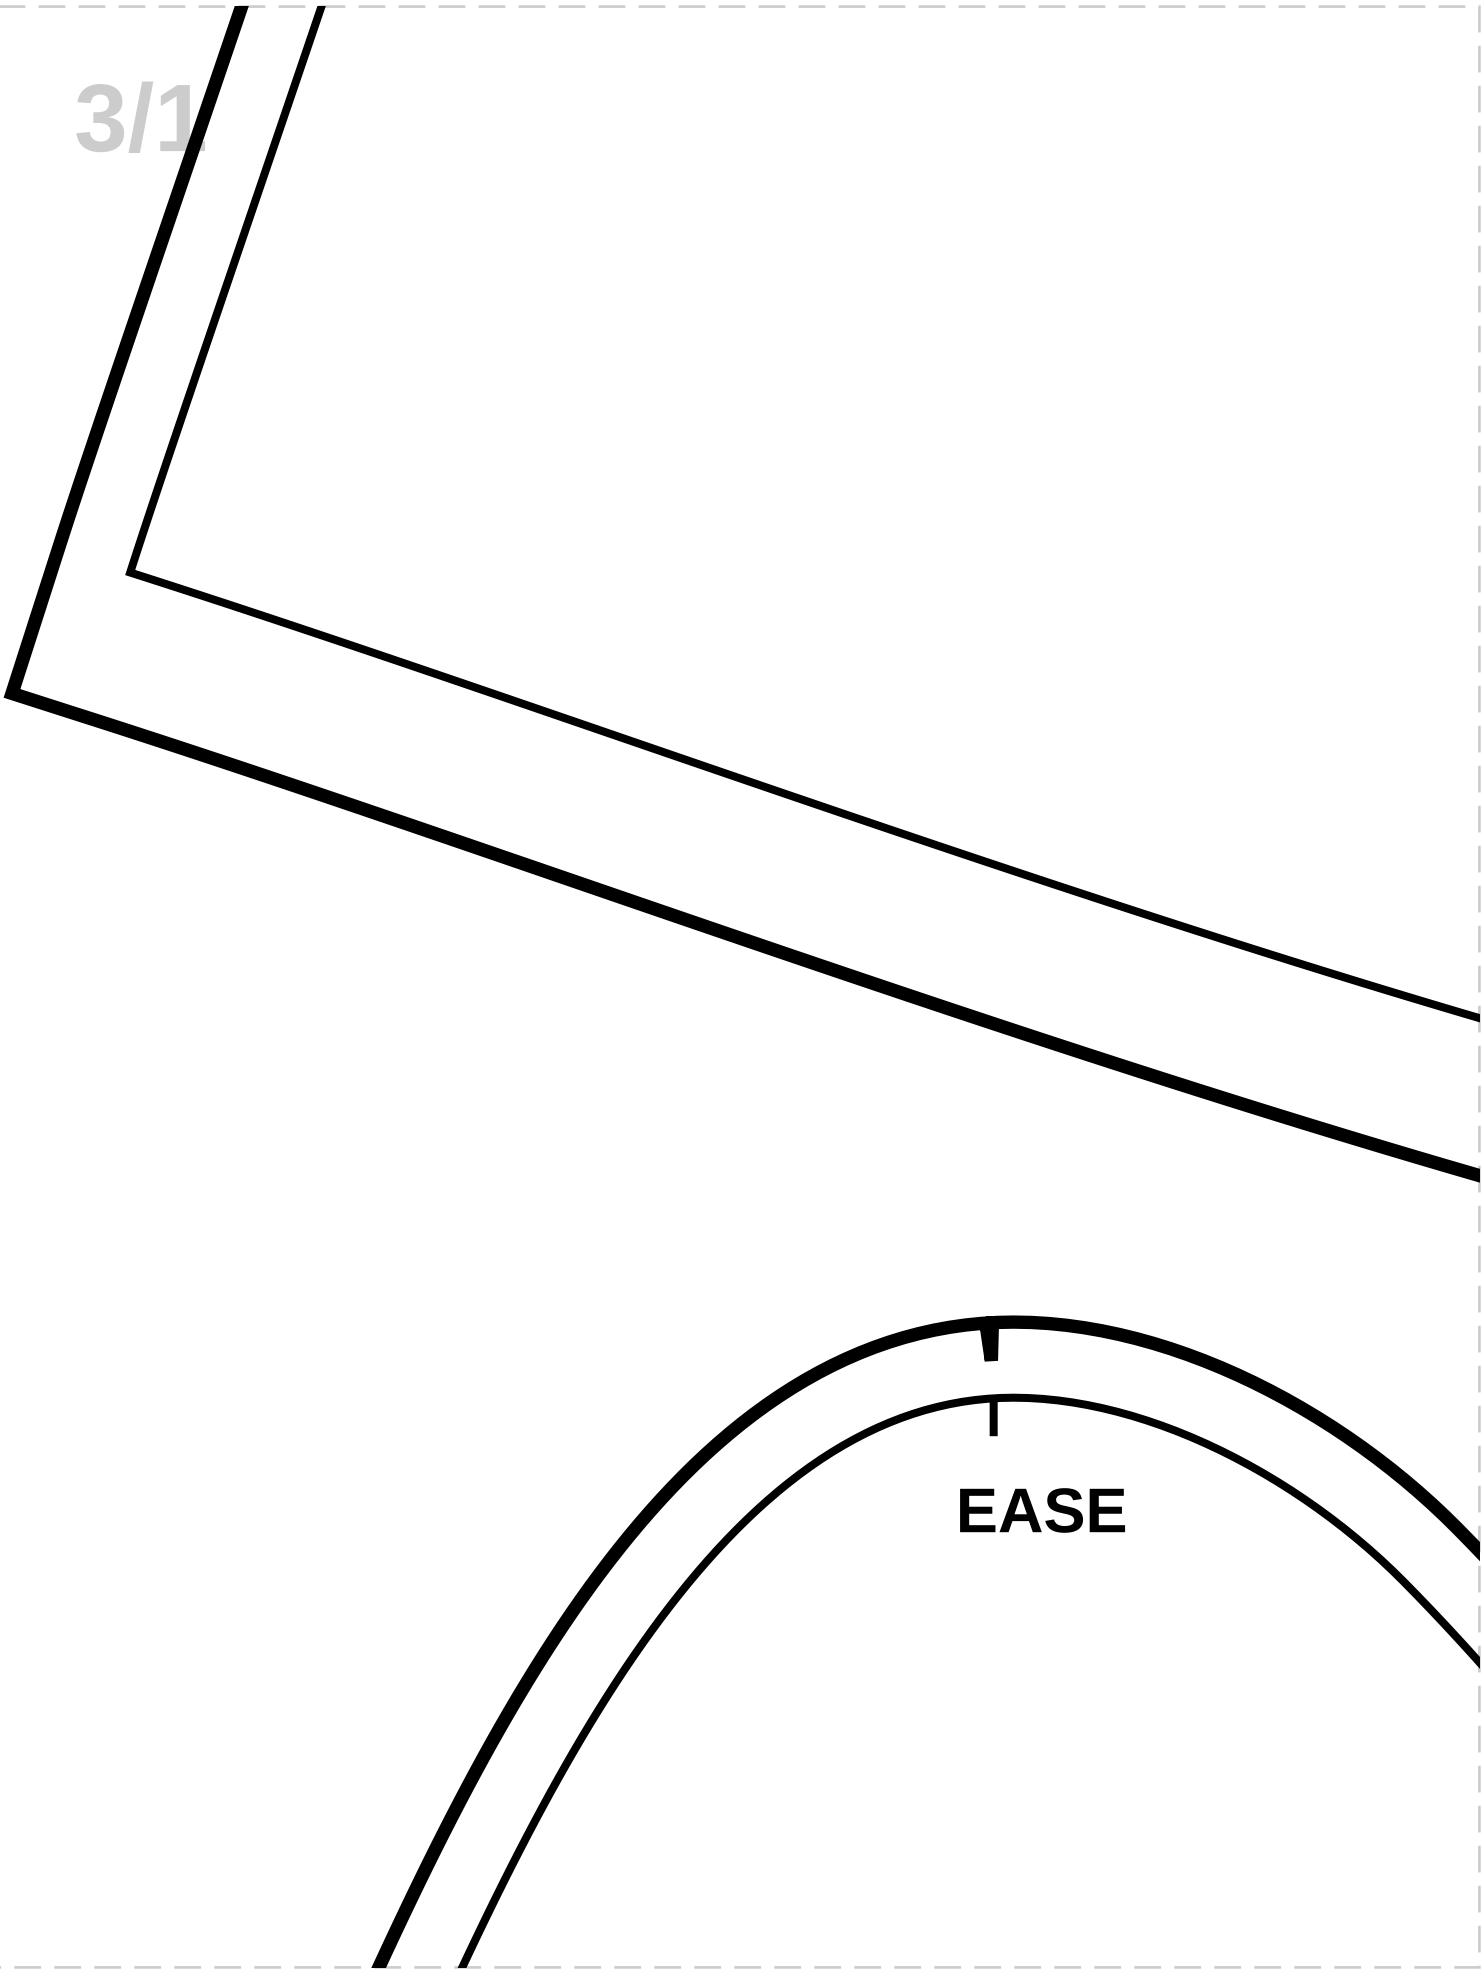



EASE

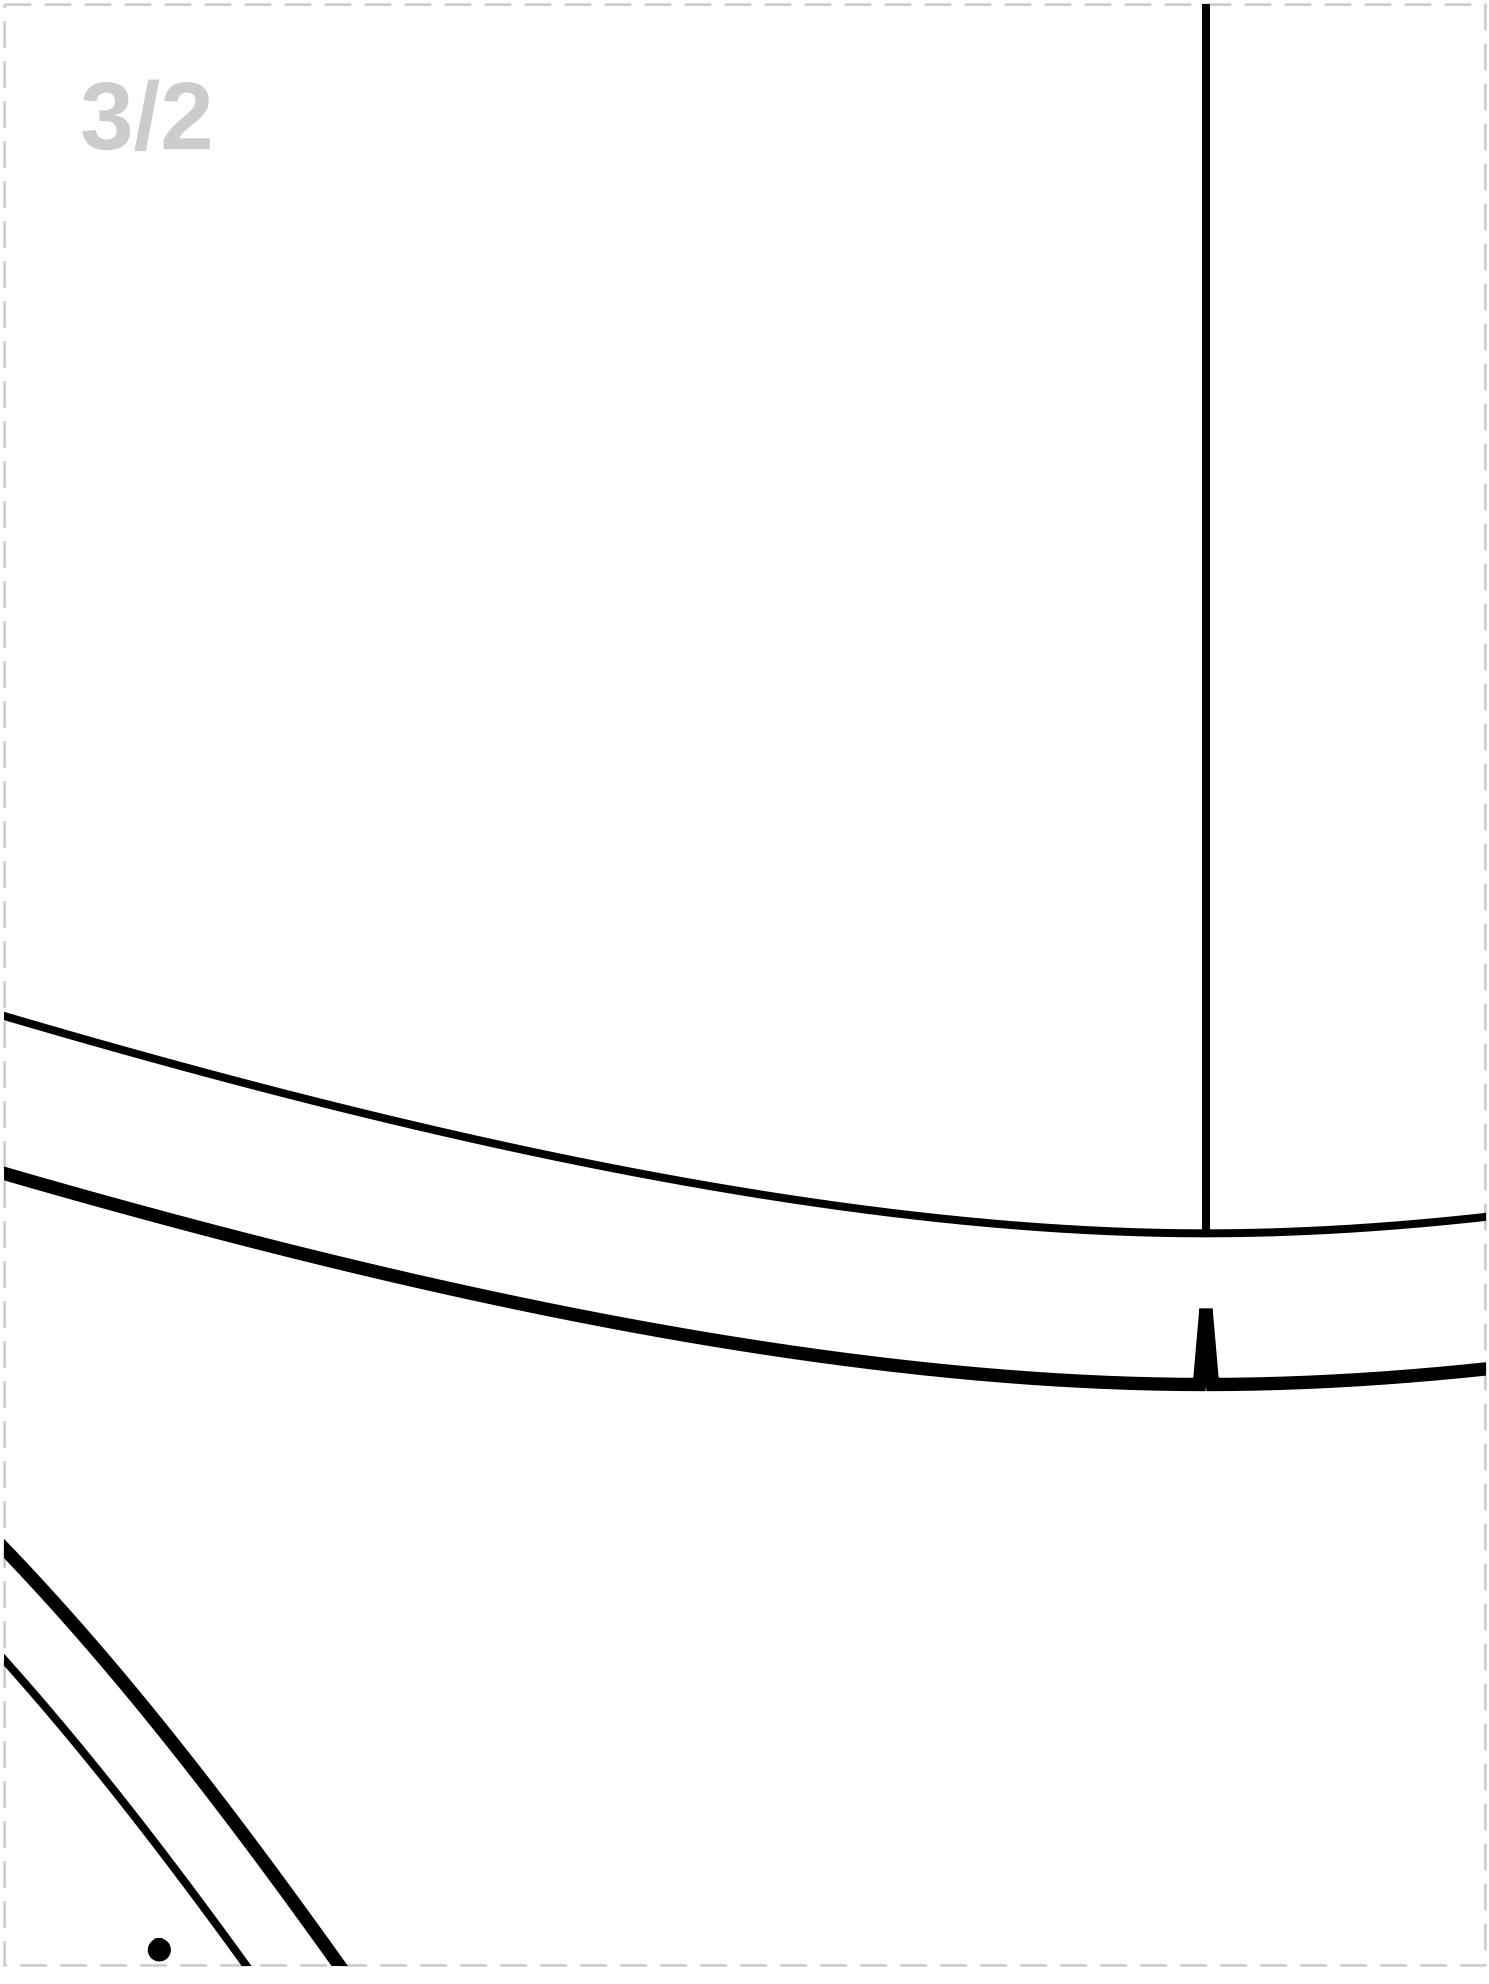

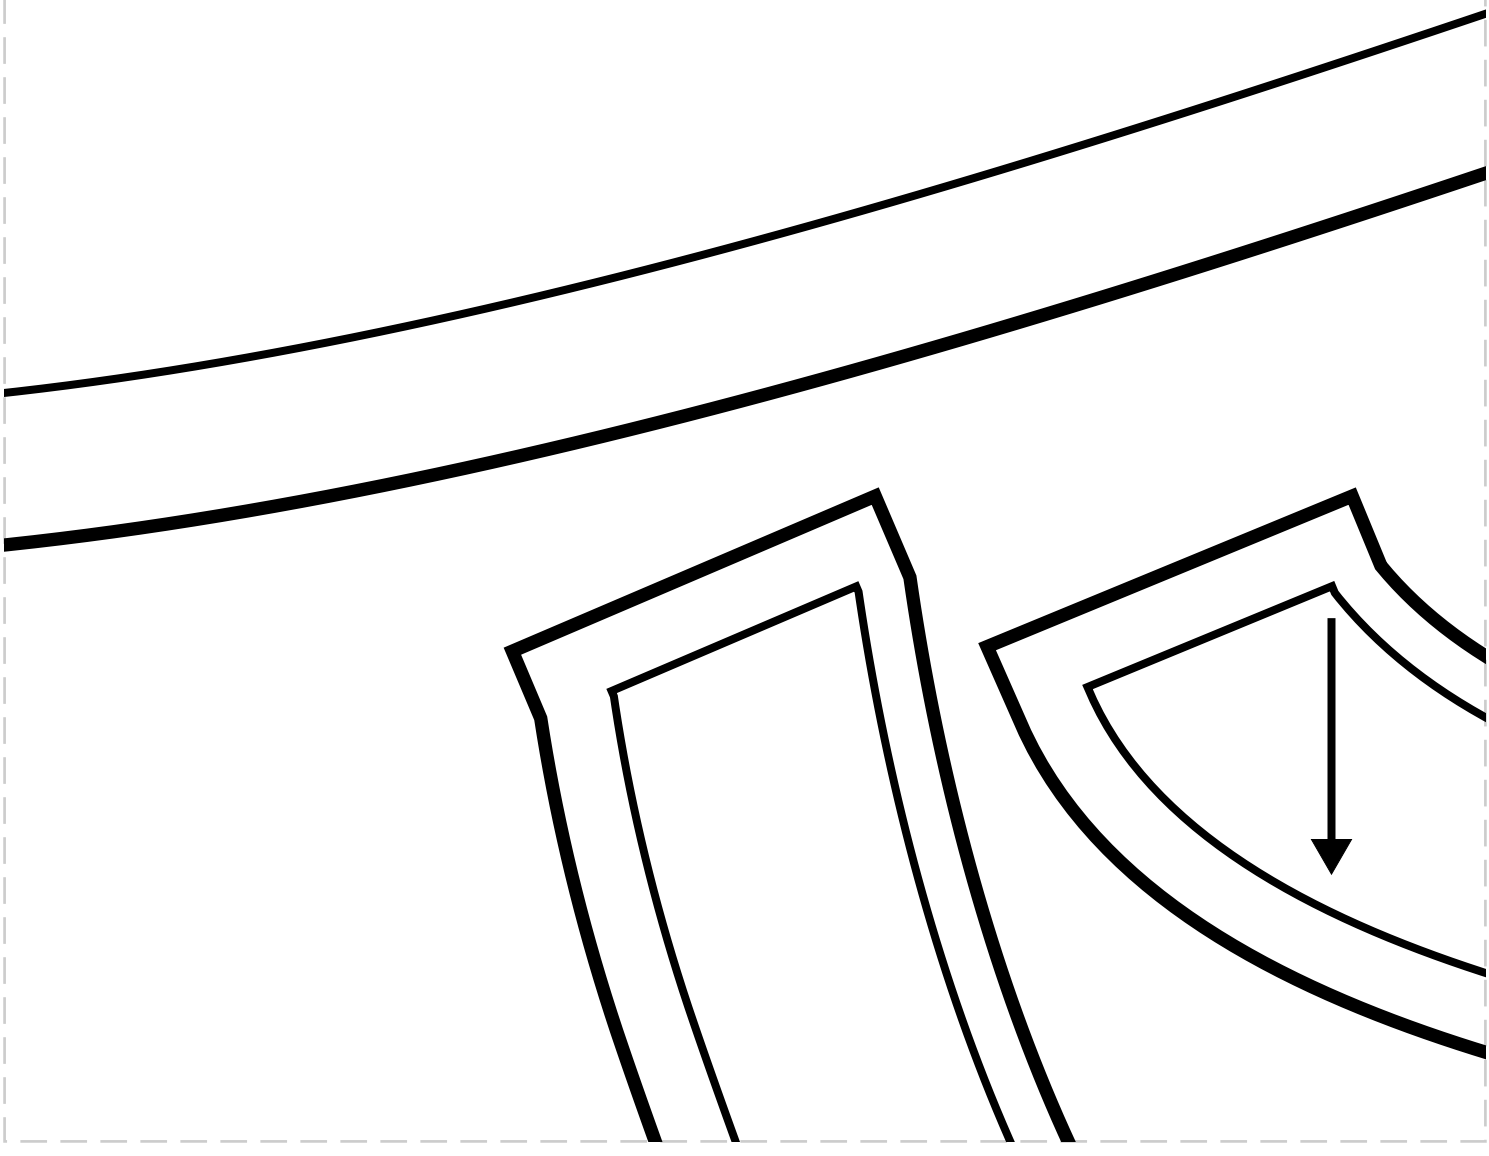

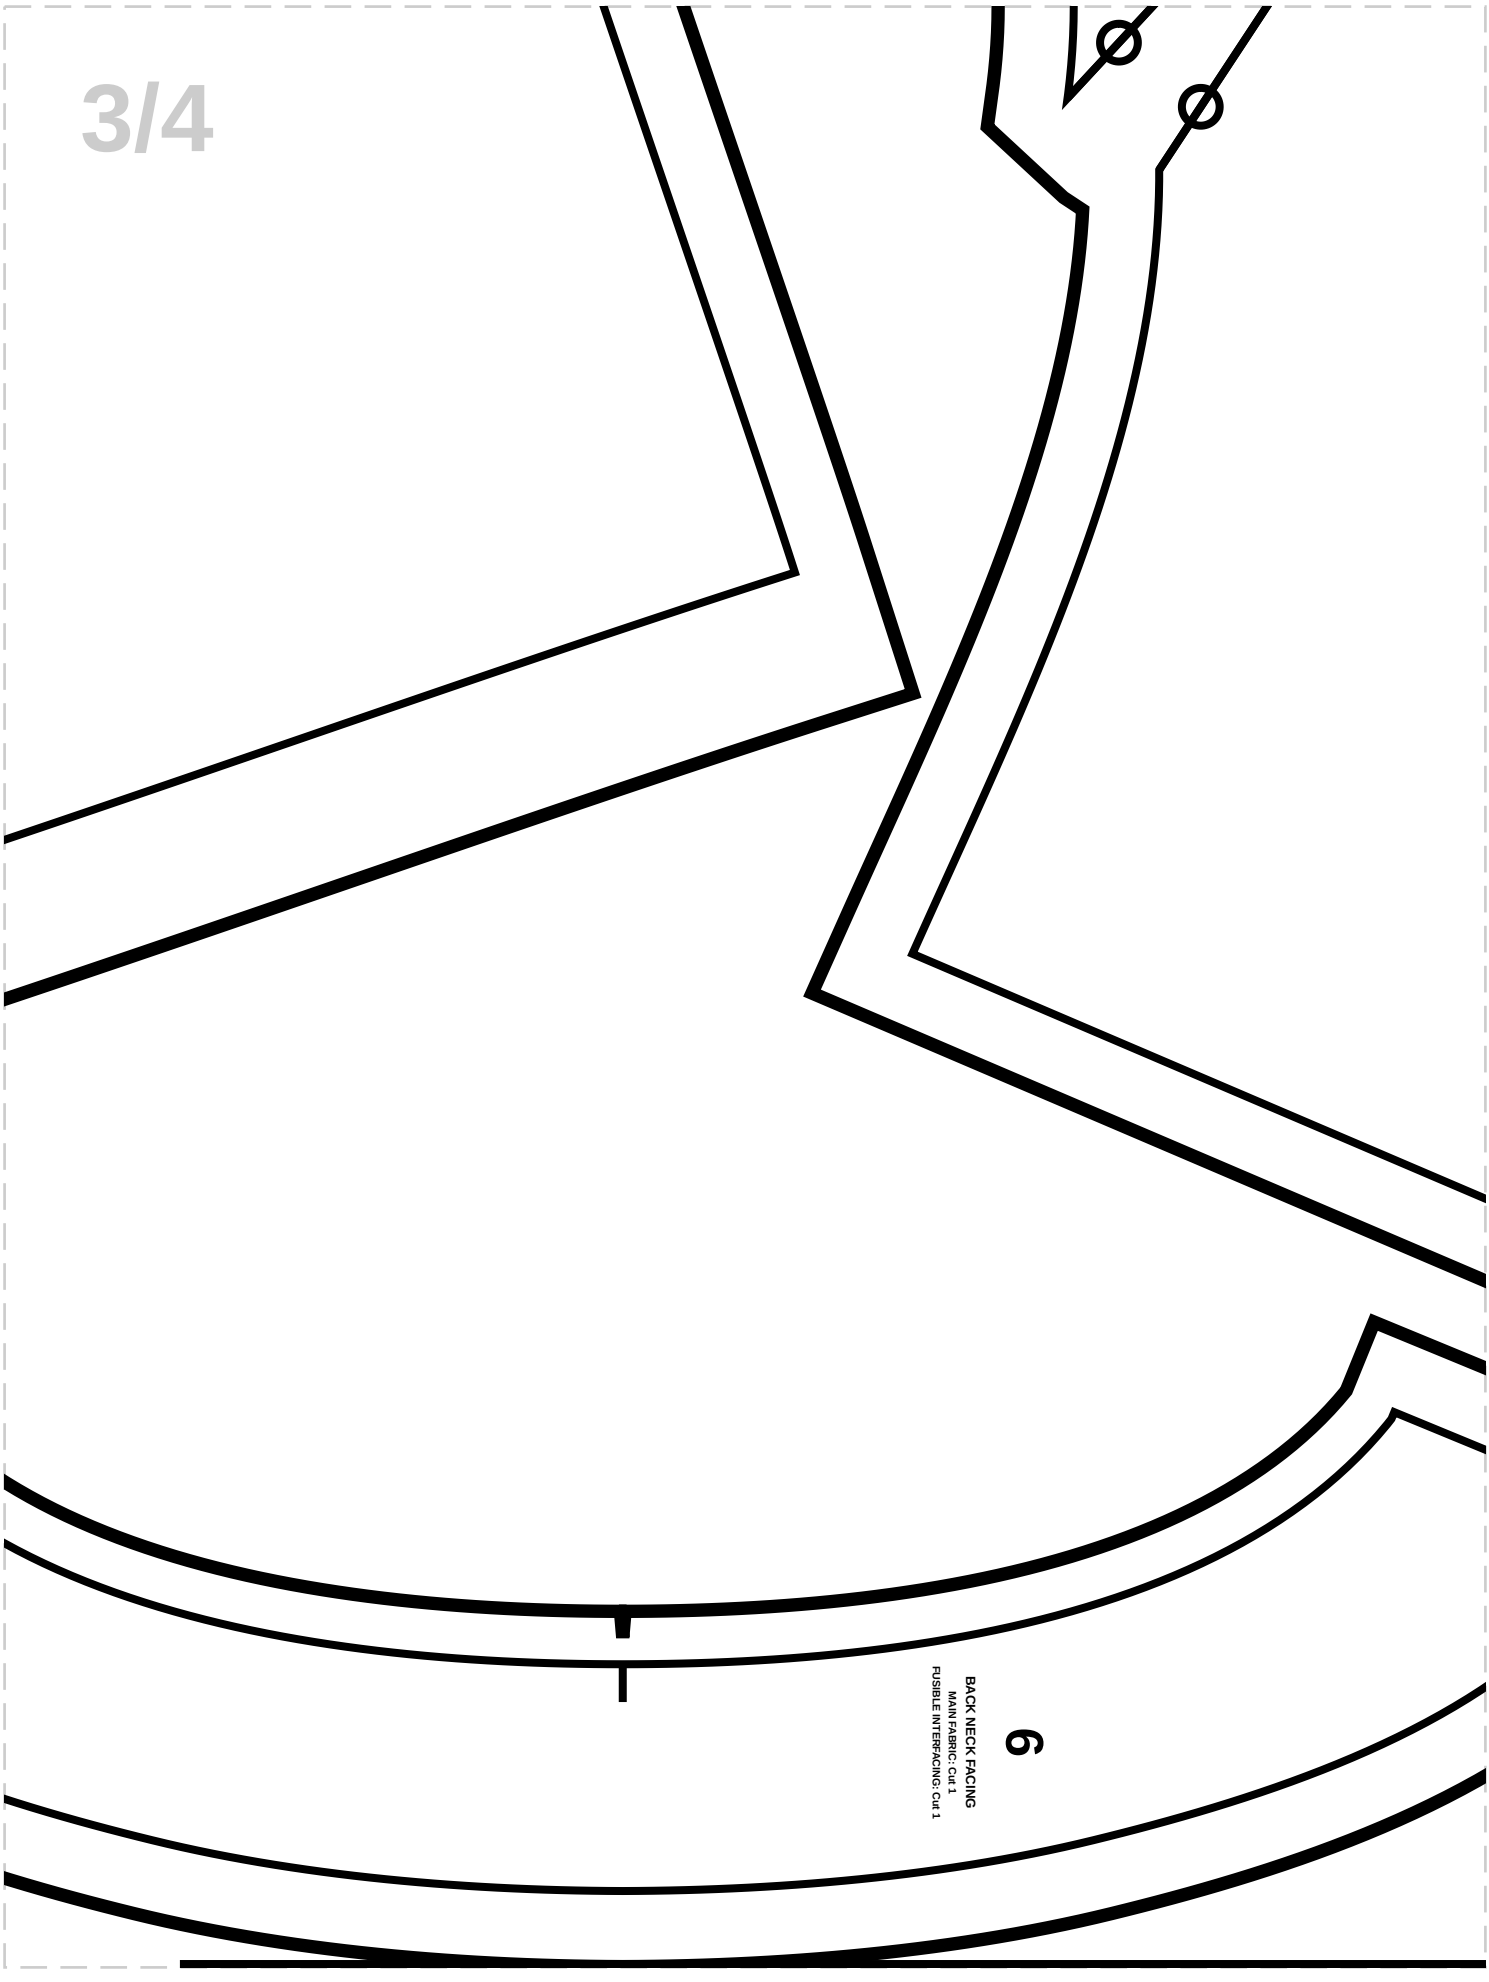
6
BACK NECK FACING
MAIN FABRIC: Cut 1
FUSIBLE INTERFACING: Cut 1

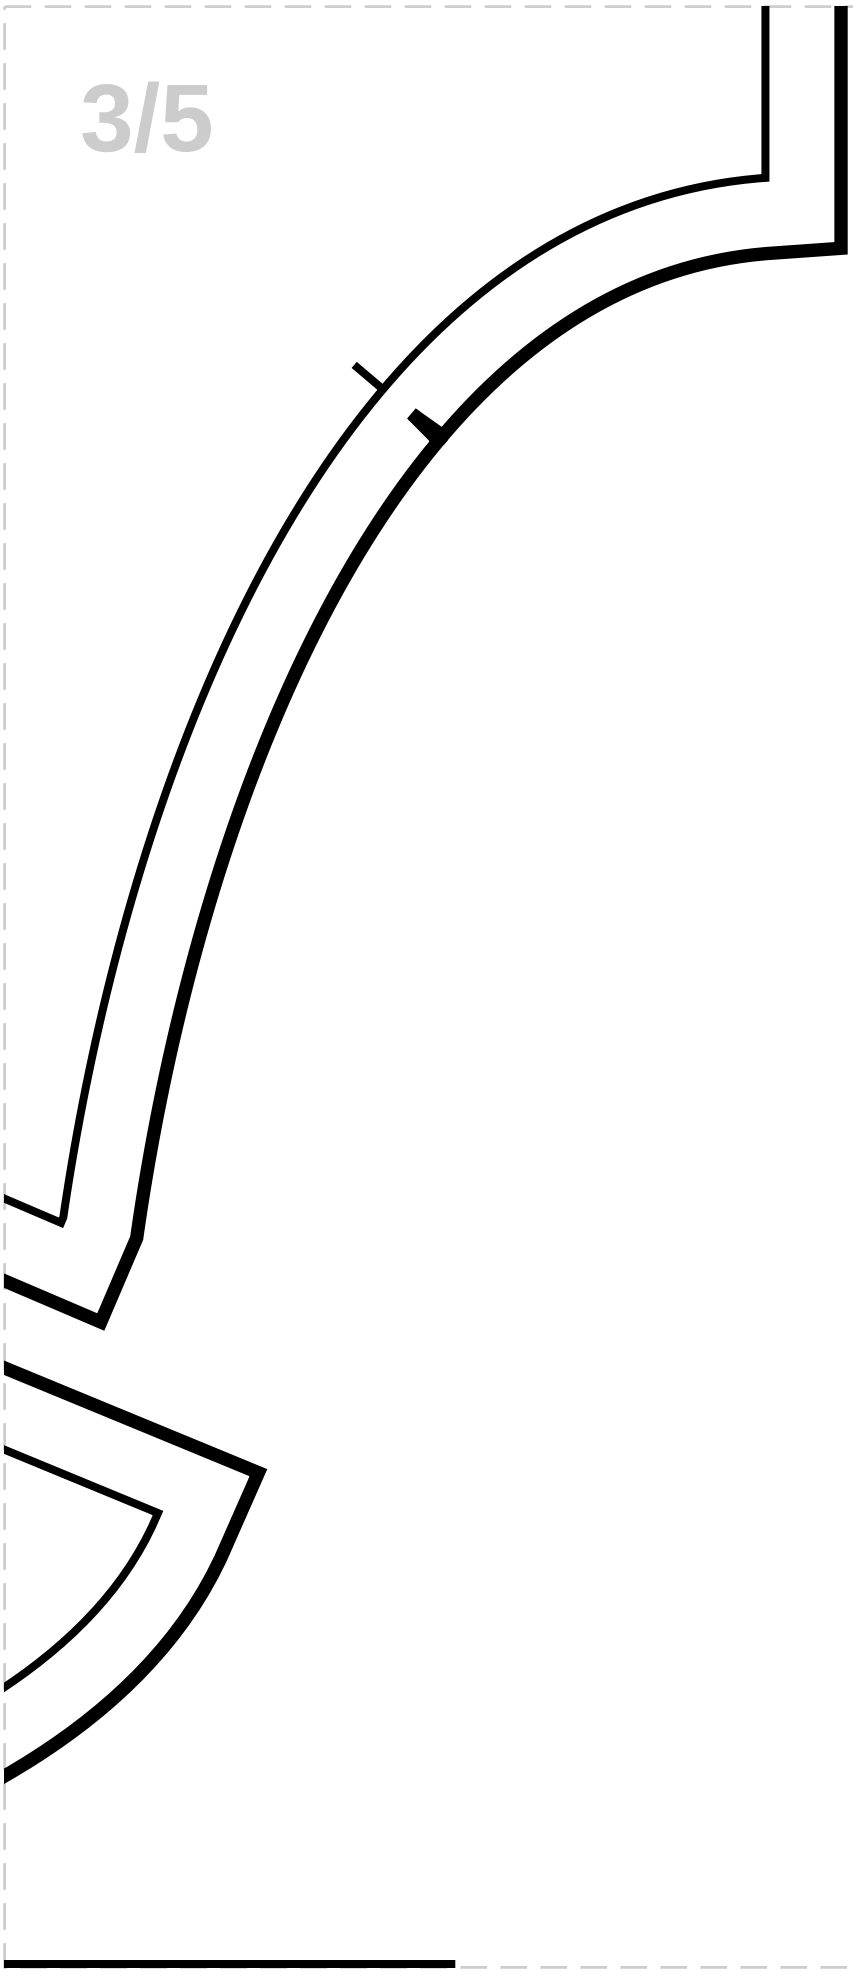



3


SLEEVE


- **MAIN FABRIC: Cut 2**

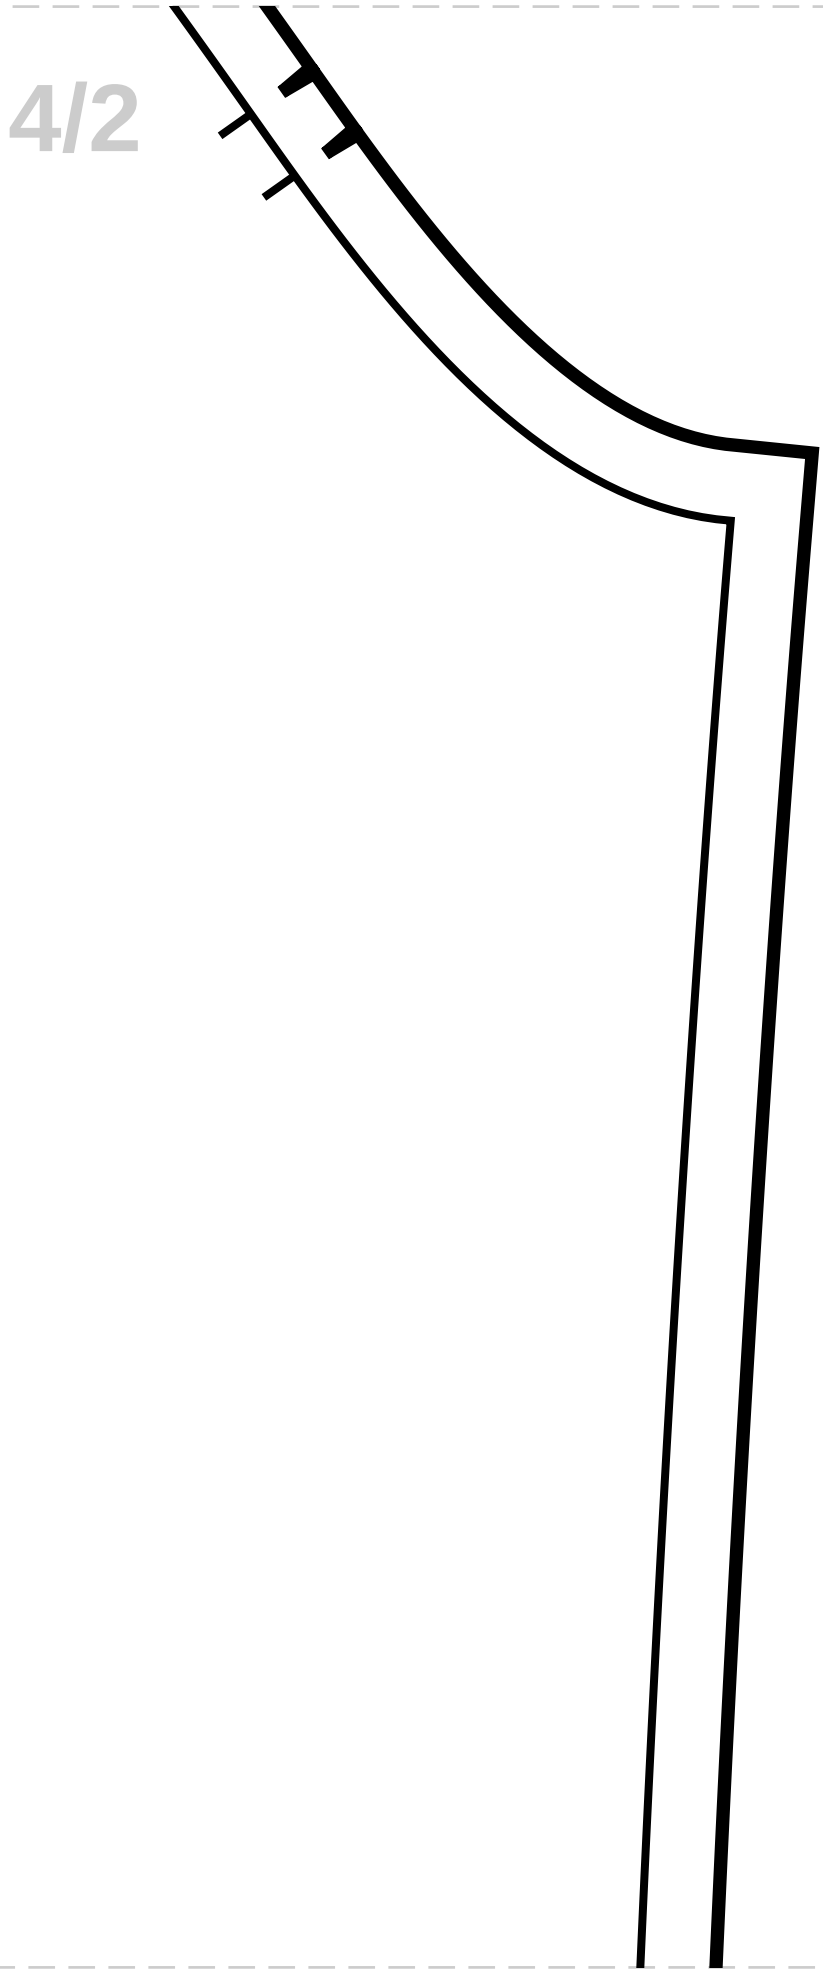




4/2

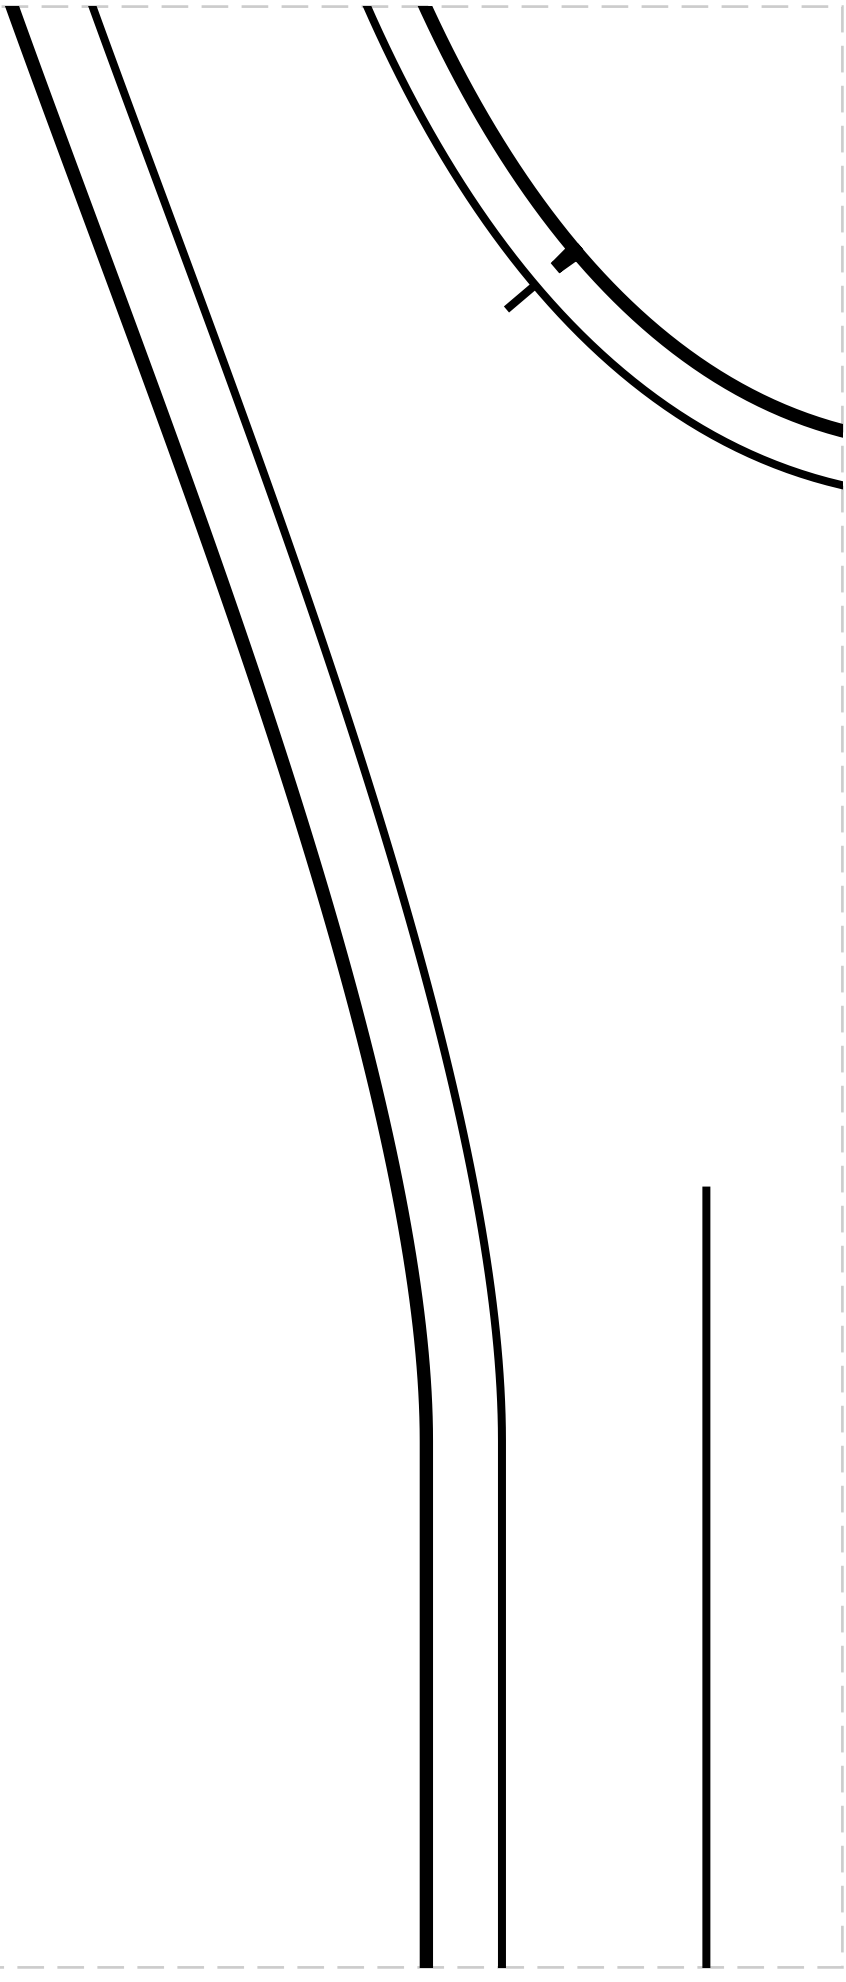


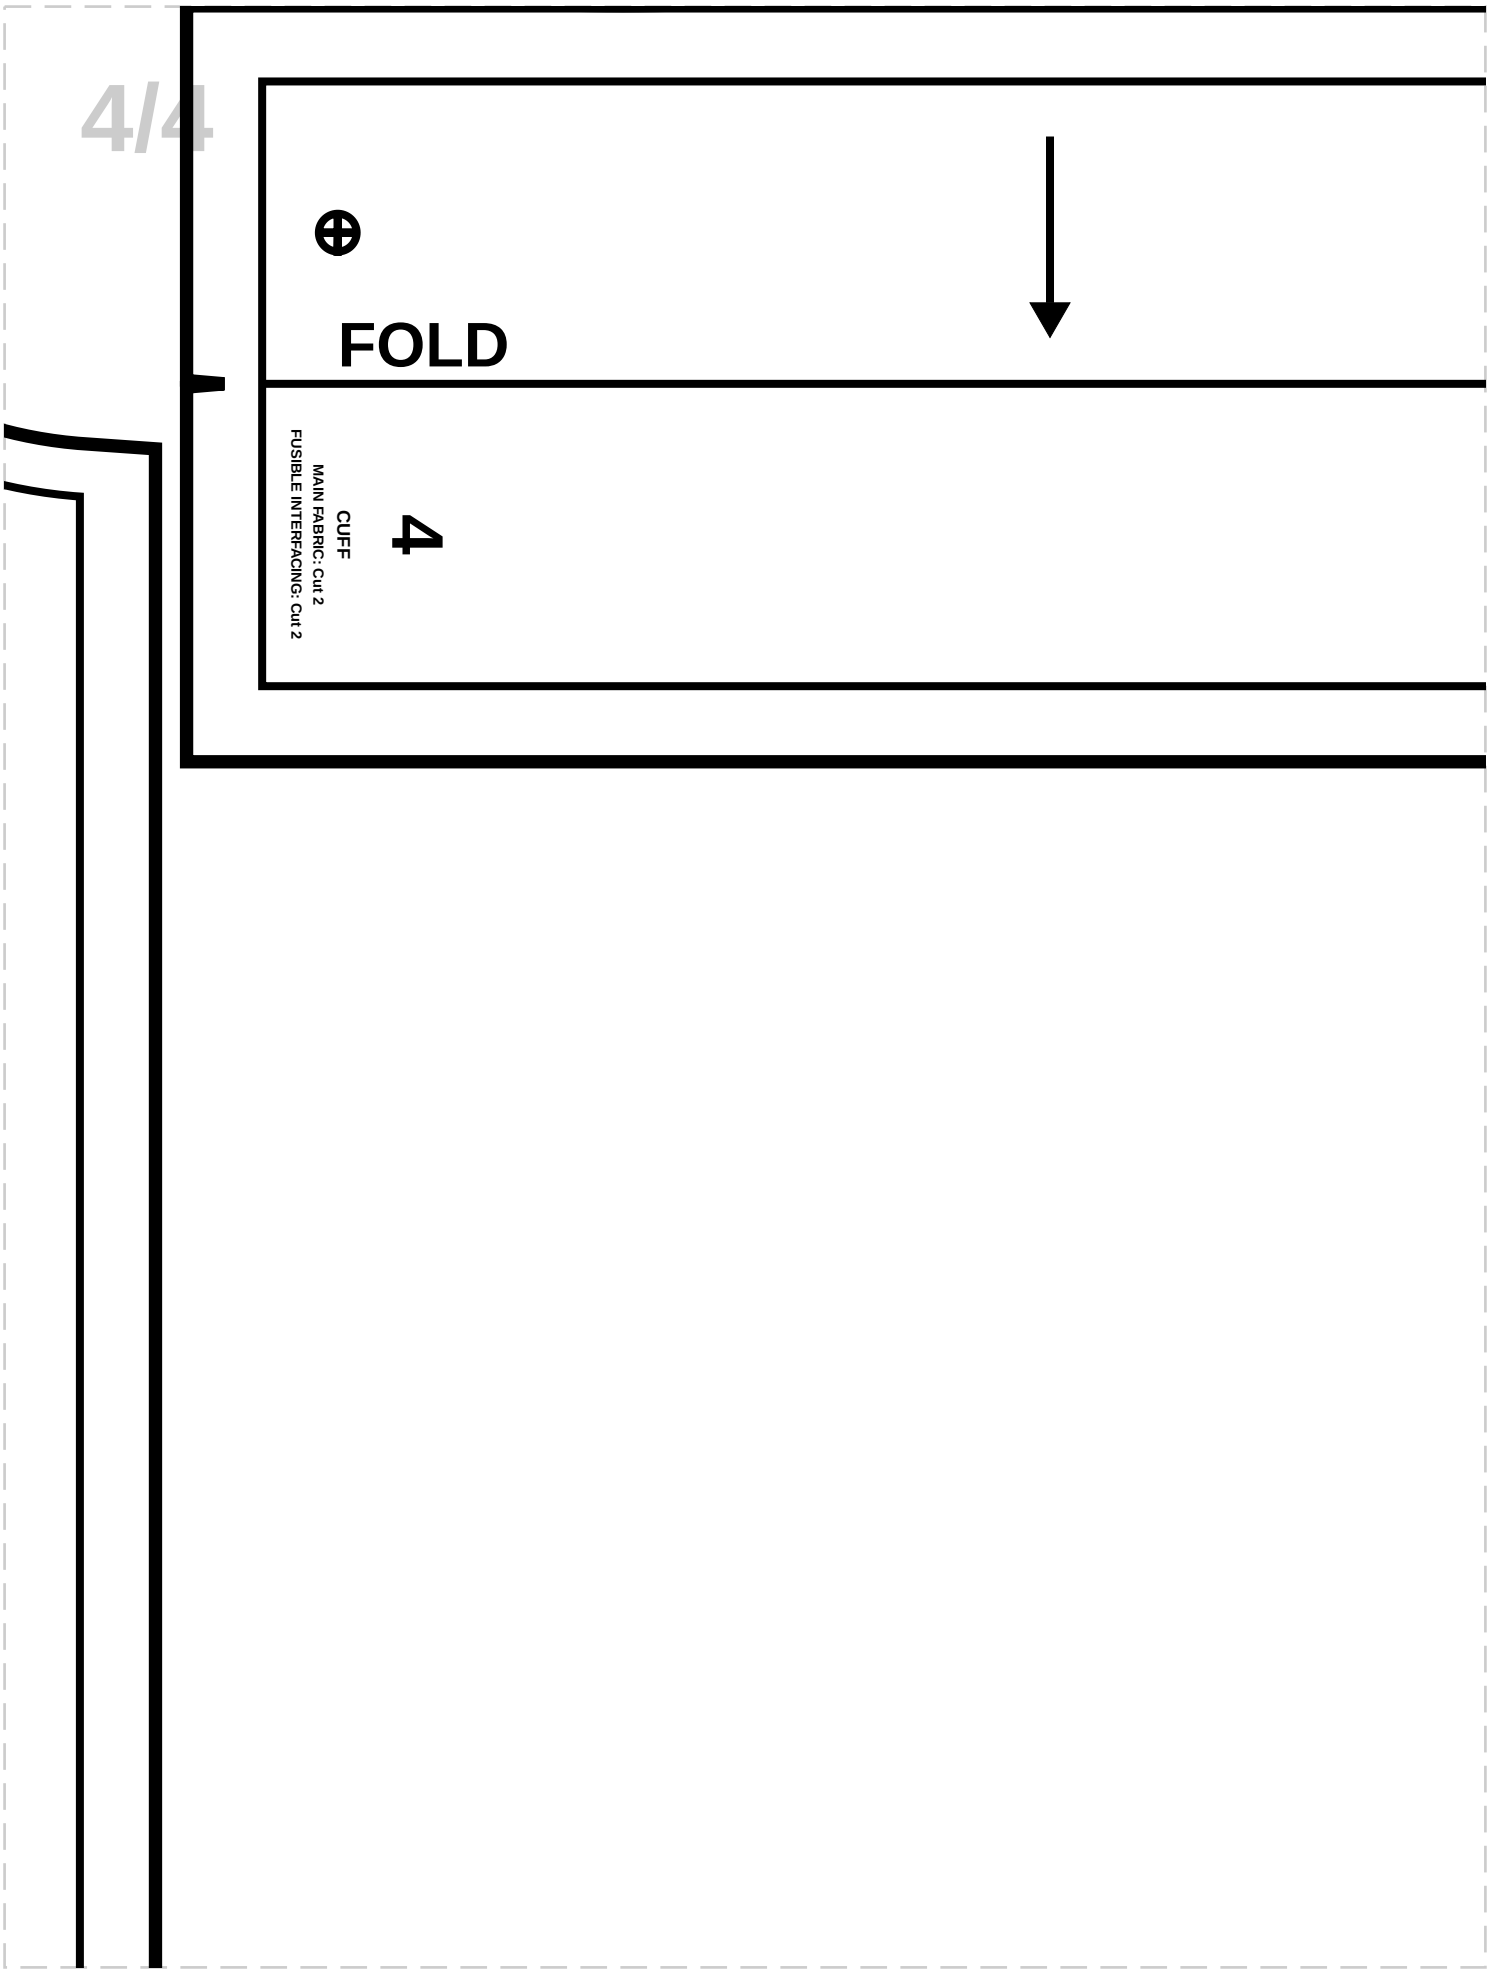

FOLD
4
CUFF
MAIN FABRIC: Cut 2
FUSIBLE INTERFACING: Cut 2

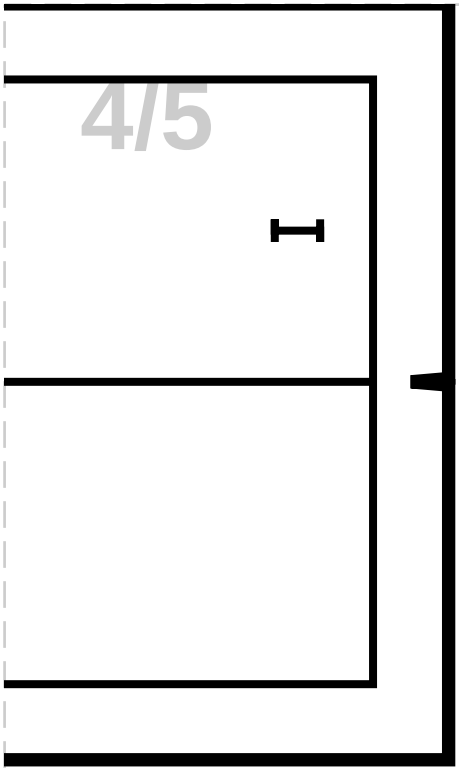

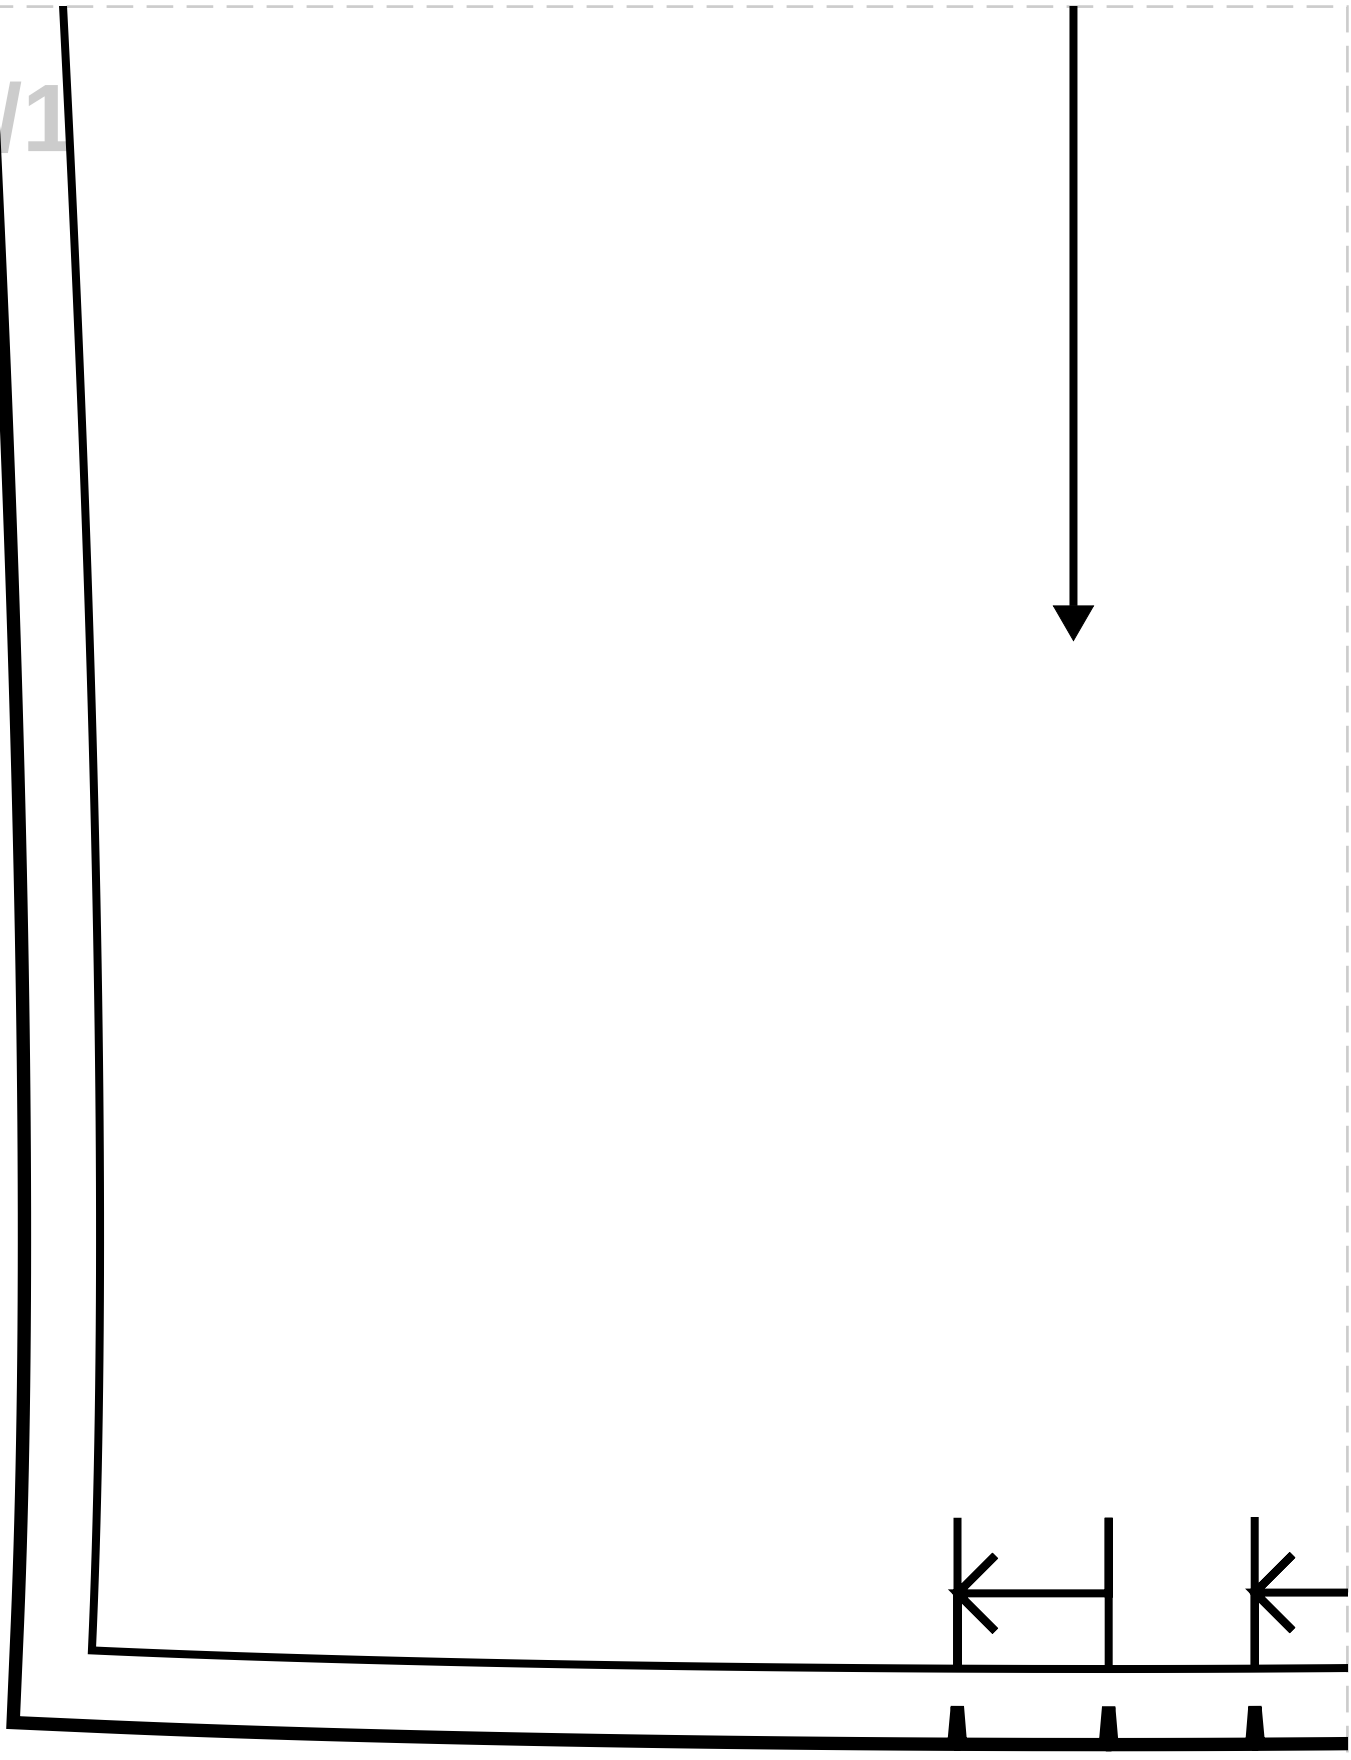


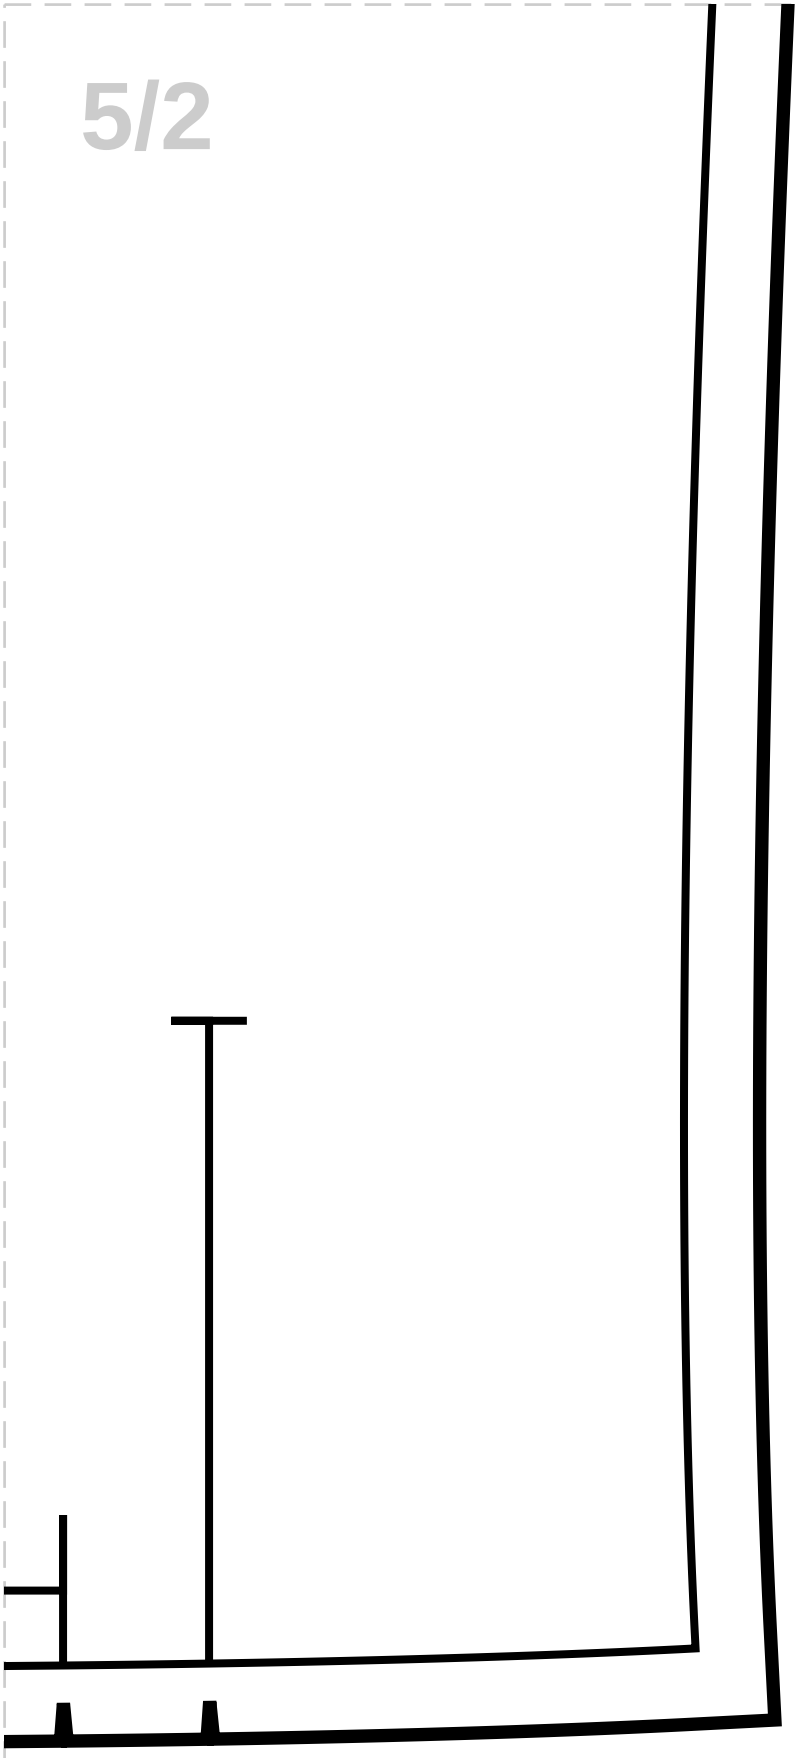


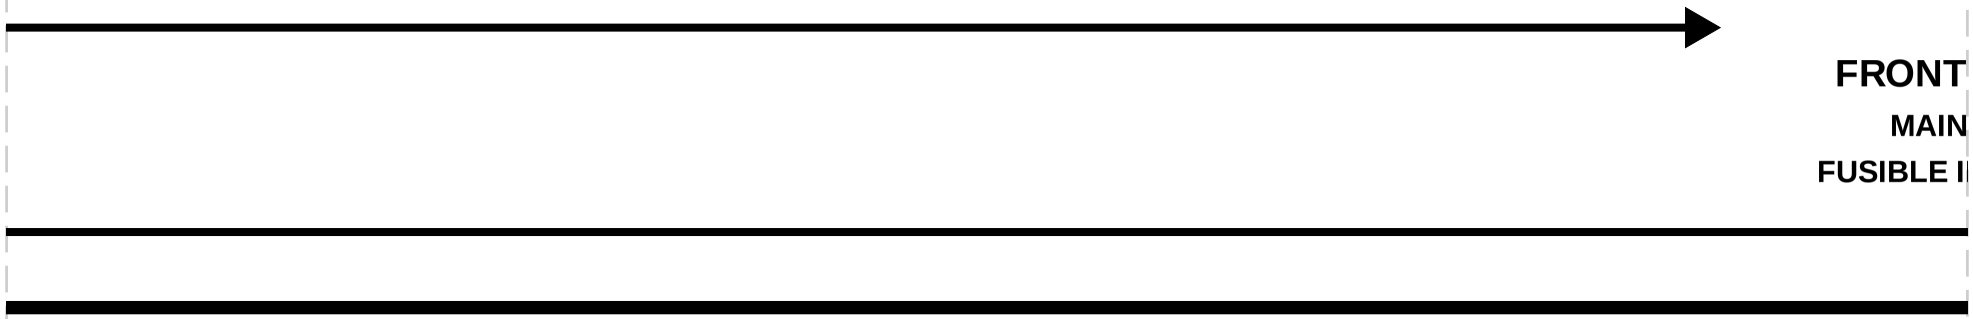
FRONT
MAIN
FUSIBLE I



6/1

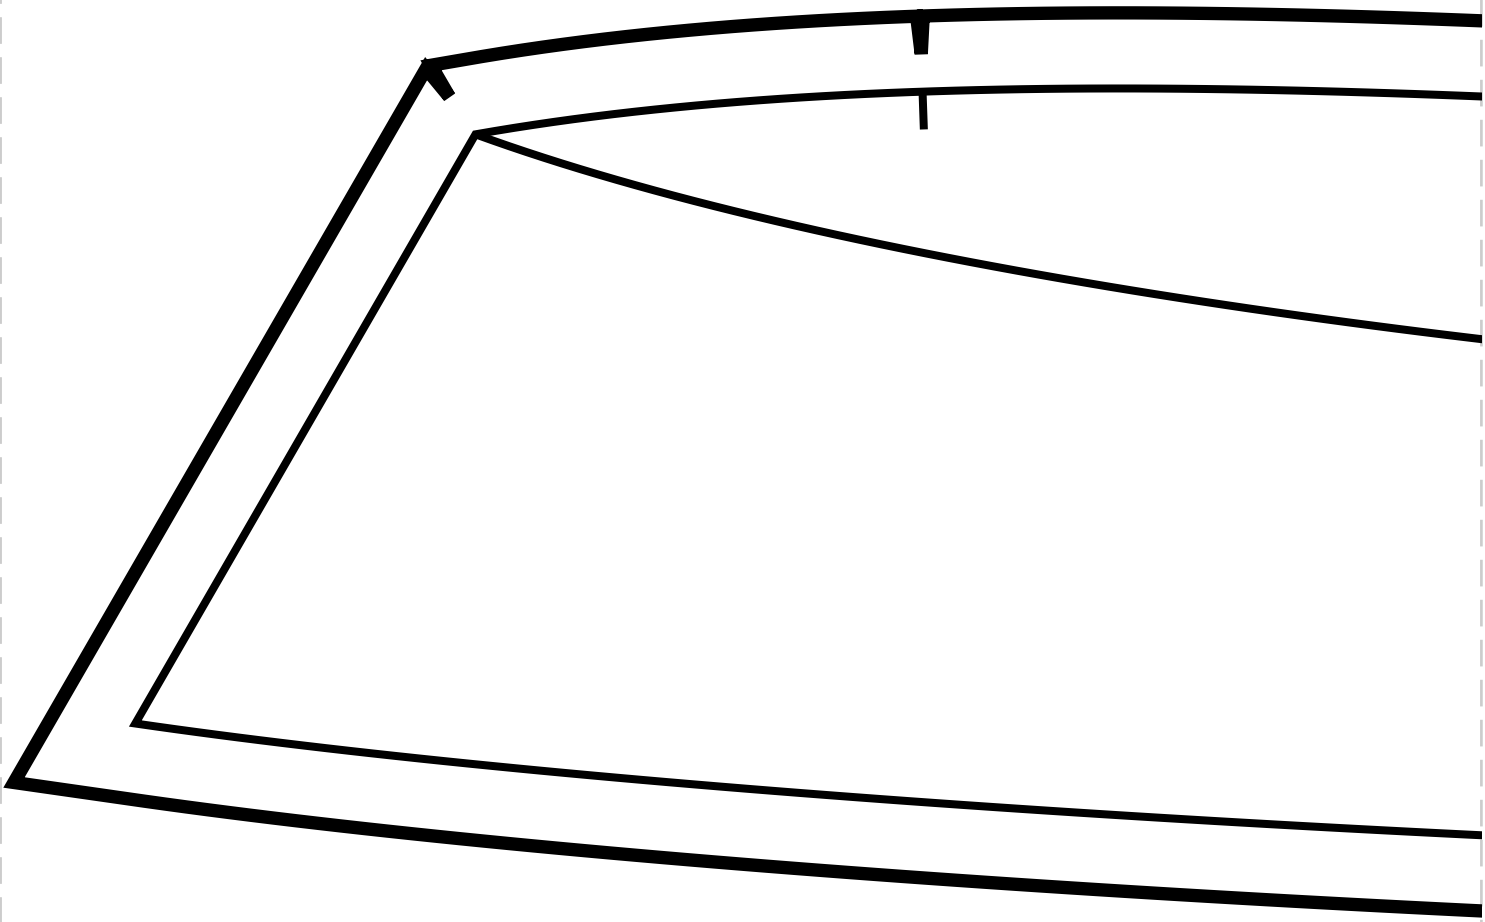

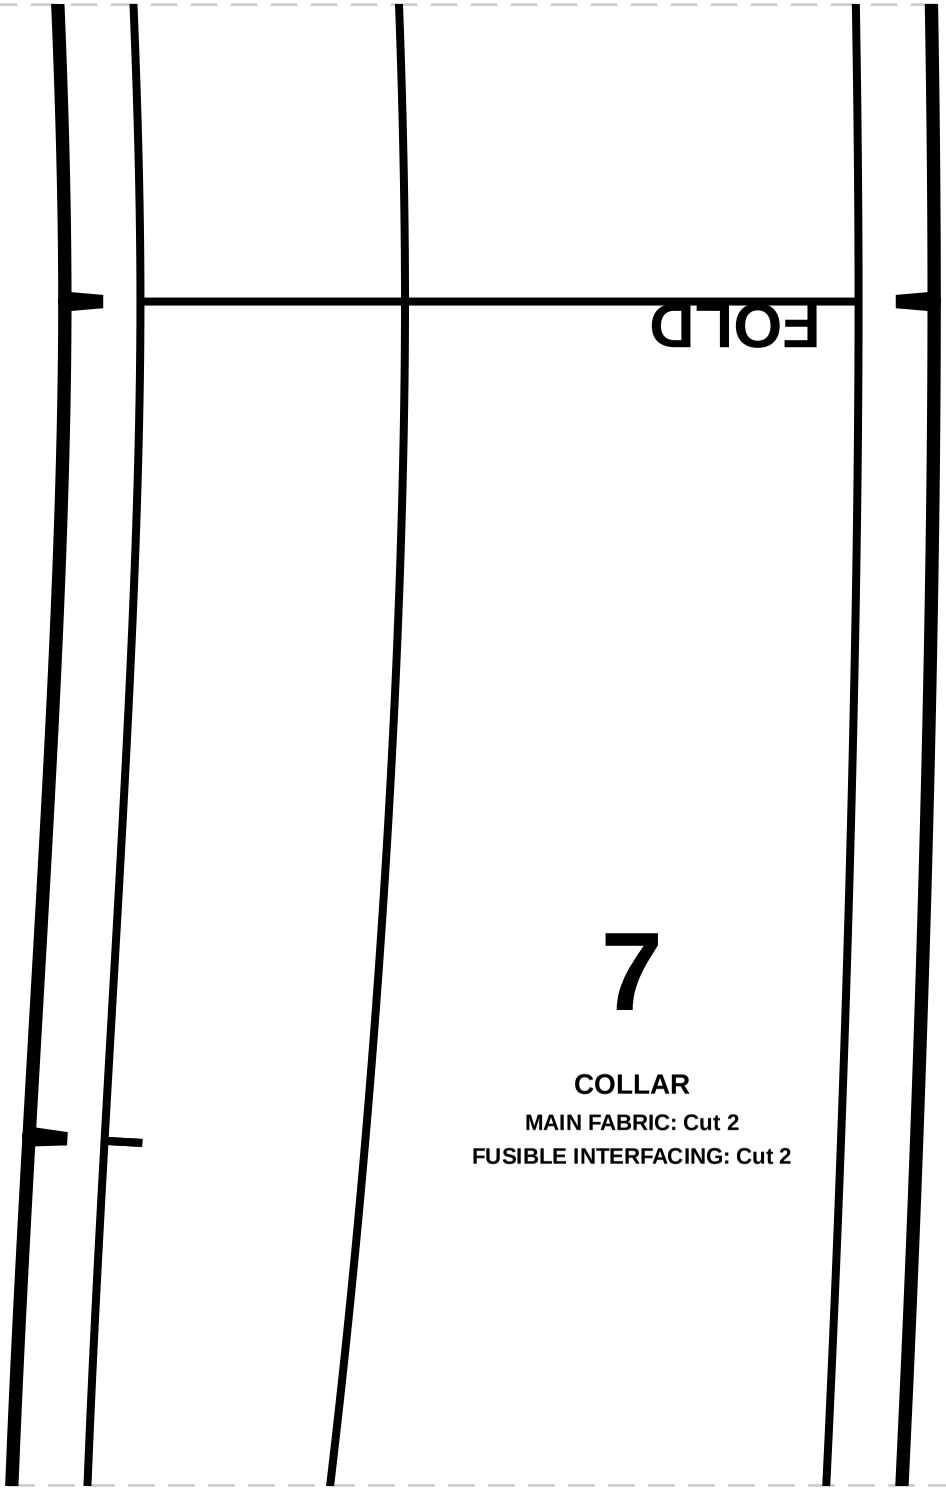

7

COLLAR

MAIN FABRIC: Cut 2


FUSIBLE INTERFACING: Cut 2


5

NECK FACING

FABRIC: Cut 2

NTERFACING: Cut 2

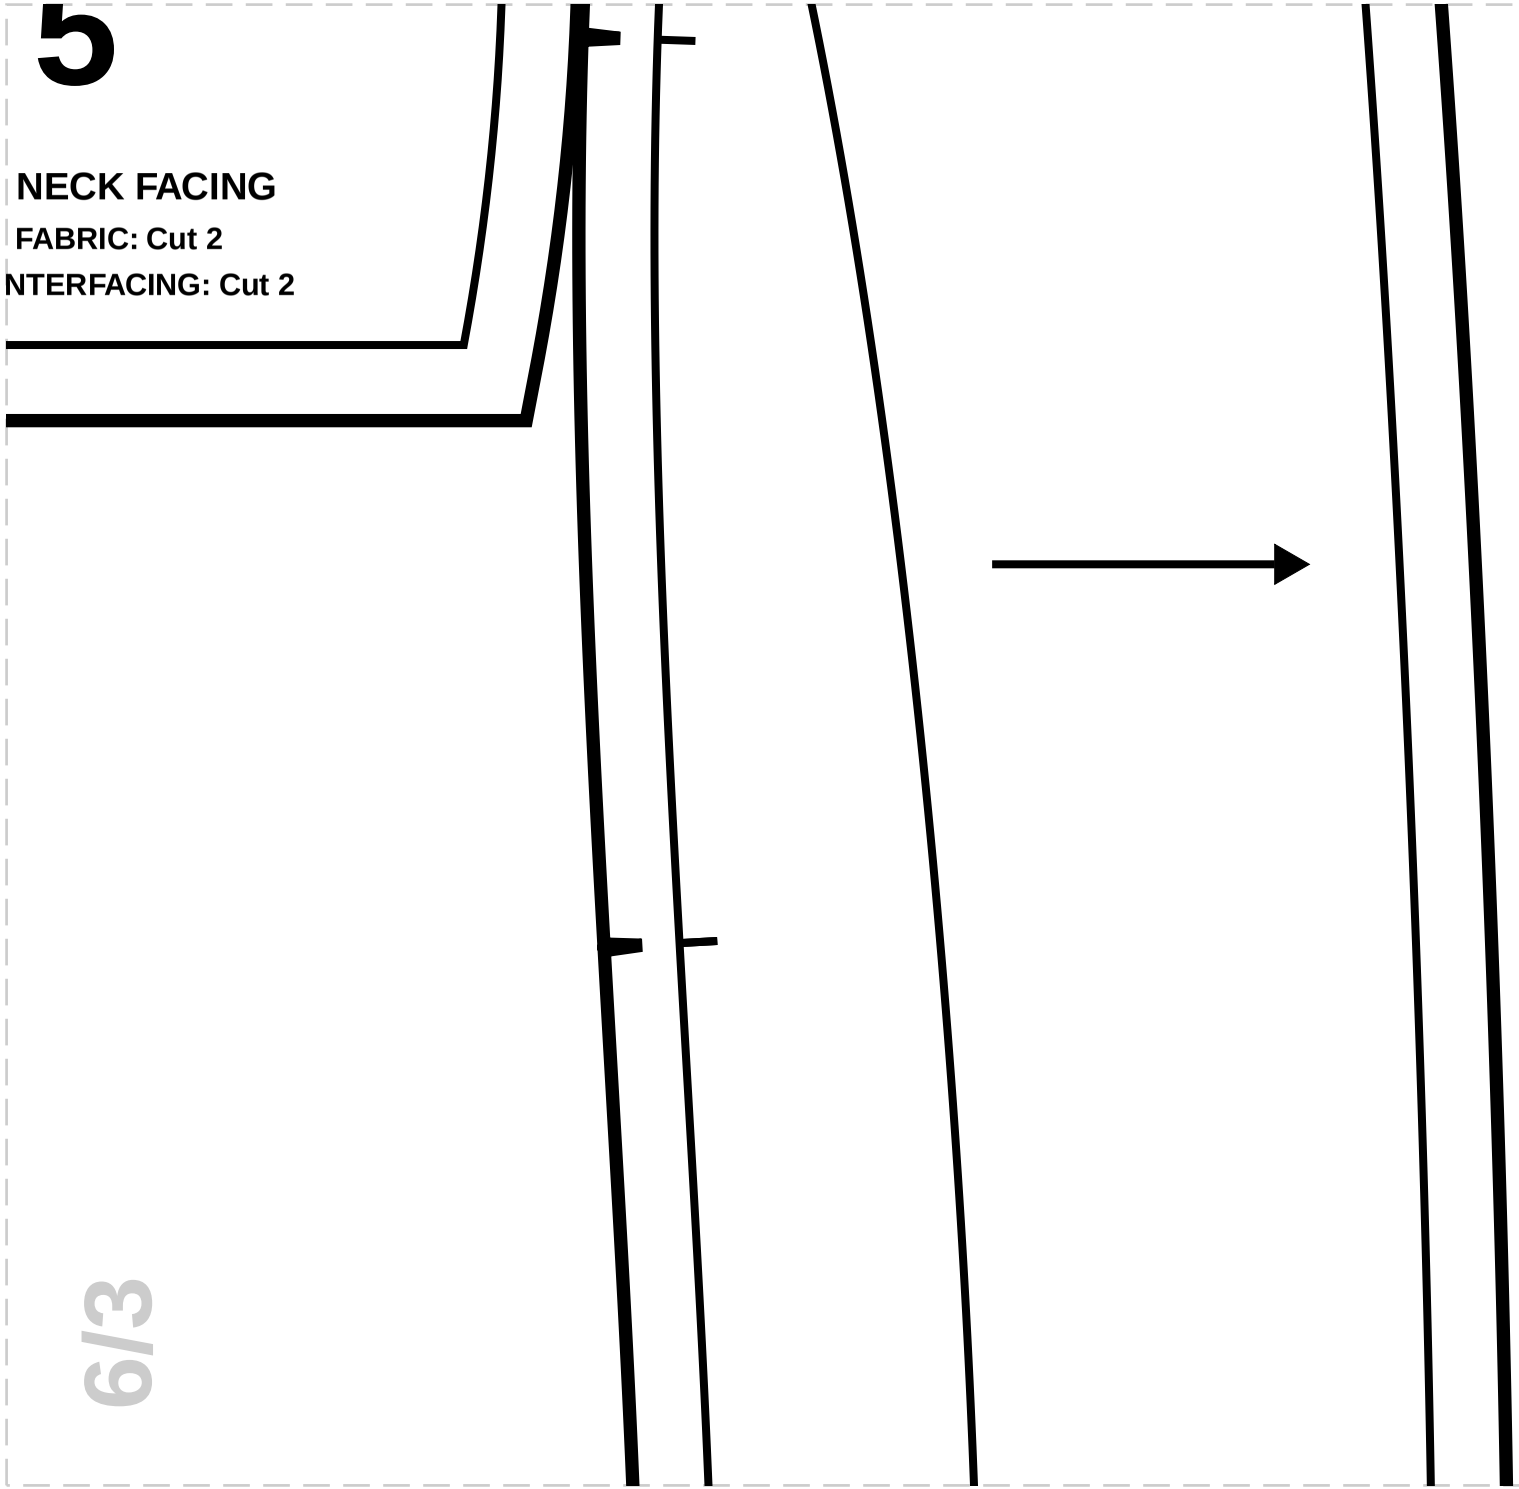

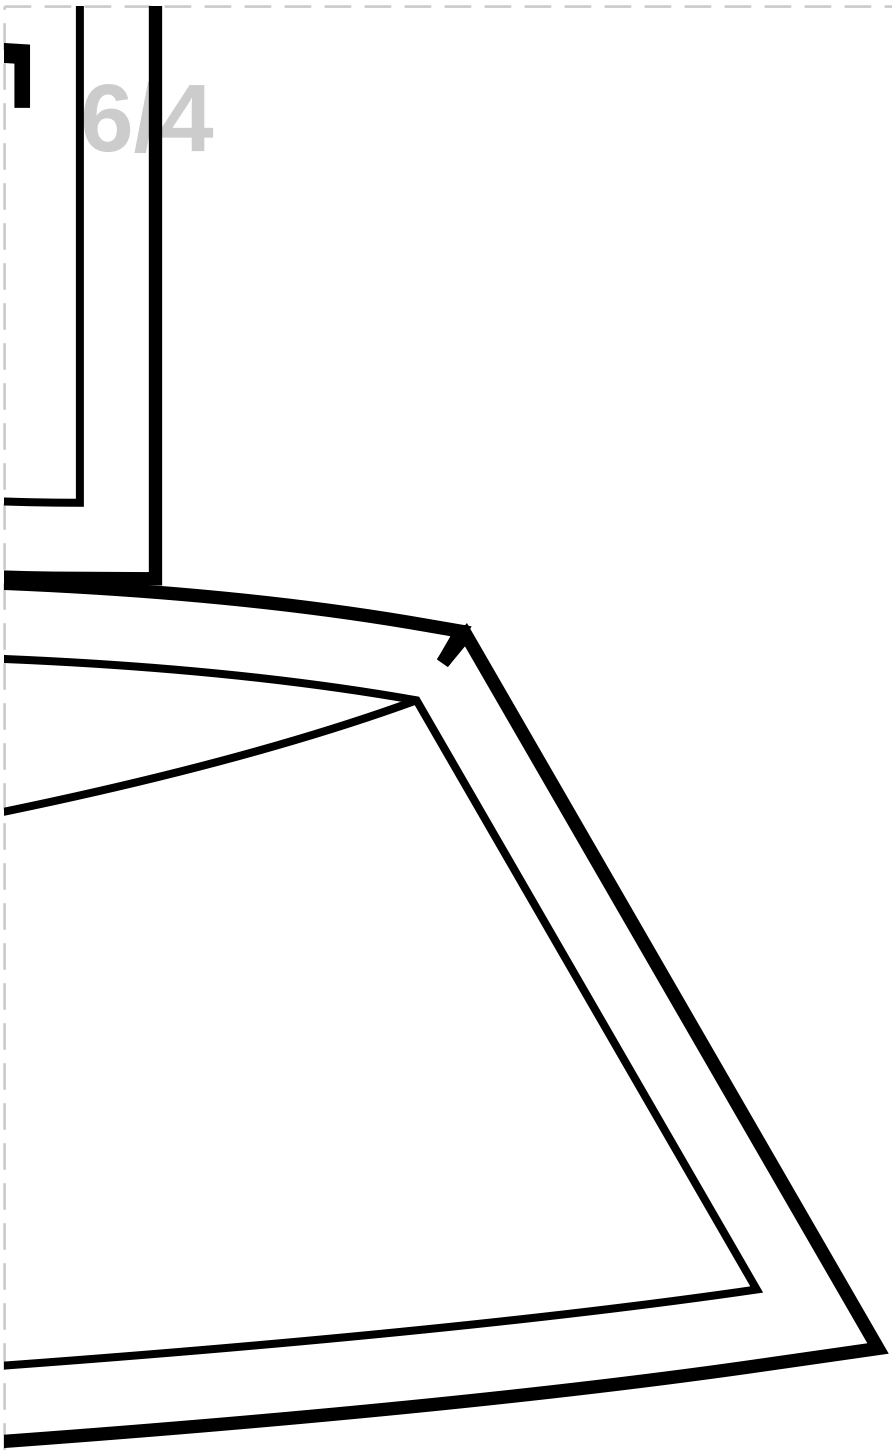

6/5