cozysewpatterns

Print this Calibration Test page first!

Size: Height: 167.75, Bust: 104.25, Waist: 87.5, Hips: 111
SIZE 14

Notes

How to print

Printing


Once your Calibration Test Page has been printed, measure the 4”x 4” (10cm) scale box with a ruler. If the lengths match, you can confidently print your pattern. If the rulers do not match, set your print settings to 100% or Actual and retry.

Cutting

Your printouts will always have a dashed border to perfectly match your sheets. Cut off the right edge of each page. Be careful not to cut beyond the dashed mark, otherwise your patterns will not align accurately.

Tapping

Group each sheet by the second number marked on each pate i.e. in a group 1, there are: 1/1, 2/1, 3/1, 4/1, etc. In a group 2: 1/2, 2/2 etc. 2. Place page 1/1 on top of the page 2/1, overlapping the right side edge. Match corners and crosses and secure with a pin or tape. Then use a scotch tape to permanently attach the sheets together.

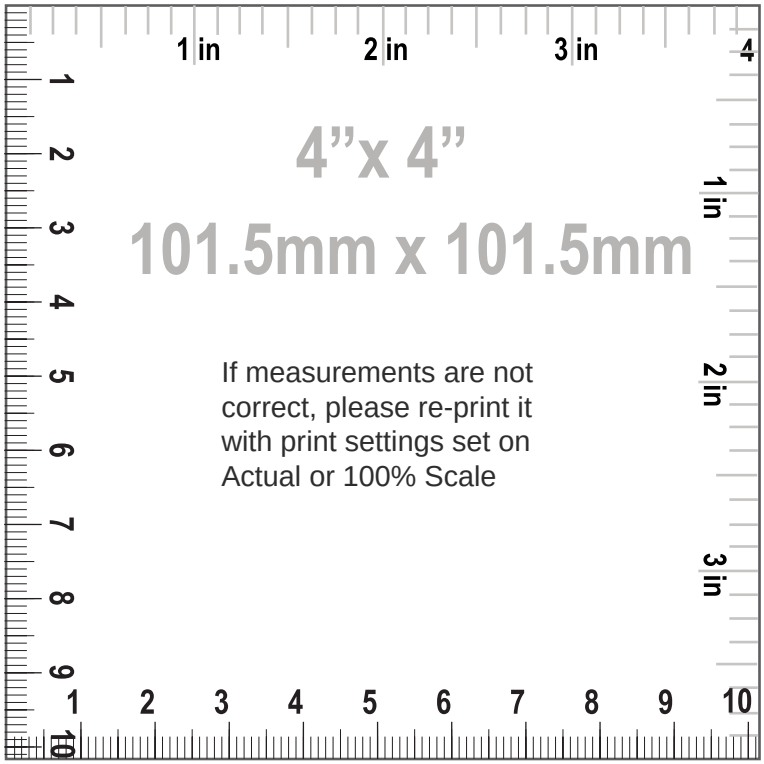

SIZE 14
Seam Allowance: 1 (3/8 in)

Pattern pieces:

1. "CENTER FRONT", MAIN FABRIC, FUSIBLE INTERFACING: Cut 2
2. "SIDE FRONT", MAIN FABRIC, FUSIBLE INTERFACING: Cut 2
3. "CENTER BACK", MAIN FABRIC, FUSIBLE INTERFACING: Cut 2
4. "SIDE BACK", MAIN FABRIC, FUSIBLE INTERFACING: Cut 2
5. "FRONT NECK FACING", MAIN FABRIC, FUSIBLE INTERFACING: Cut 2
6. "FRONT ARMHOLE FACING", MAIN FABRIC, FUSIBLE INTERFACING: Cut 2
7. "BACK NECK FACING", MAIN FABRIC, FUSIBLE INTERFACING: Cut 1
8. "BACK ARMHOLE FACING", MAIN FABRIC, FUSIBLE INTERFACING: Cut 2
9. "PATCH POCKET", MAIN FABRIC: Cut 2


Pattern Specs (Circumferences are divided by 2):


1. Hem max 3.00 none (1 1/8 in)
2. Seam allowance max 2.00 none (3/4 in)
3. Seam allowance p max 1.50 none (5/8 in)
4. Stretch factor 1.00 none (3/8 in)
5. Shoulder pads thickness 1.00 none (3/8 in)
6. Pocket entry length 11.26 cm (4 3/8 in)
7. Waist to pocket length 2.47 cm (1 in)
8. Side seam pocket position 6.61 cm (2 5/8 in)
9. Button diameter 1.50 cm (5/8 in)
10. Front buttons quantity 6.00 pc
11. Front length from HPS to hem 61.71 cm (24 1/4 in)
12. Across chest 58.72 cm (23 1/8 in)
13. Center front length to hem 43.84 cm (17 1/4 in)
14. Center back length to hem 58.52 cm (23 in)
15. Across front 40.59 cm (16 in)
16. Across back 41.45 cm (16 3/8 in)
17. Across shoulders 41.59 cm (16 3/8 in)
18. Side seam 33.80 cm (13 1/4 in)
19. Waist 51.12 cm (20 1/8 in)
20. Low hips 63.40 cm (25 in)


21. Blazer hemline sweep 61.91 cm (24 3/8 in)
22. Armhole length 55.19 cm (21 3/4 in)
23. Neck opening 21.29 cm (8 3/8 in)
24. Front neck drop 15.65 cm (6 1/8 in)
25. Back neck drop 4.14 cm (1 5/8 in)
26. Shoulder width 13.15 cm (5 1/8 in)
27. Apex to apex 21.85 cm (8 5/8 in)
28. Seam allowance poc max 3.00 none (1 1/8 in)
29. Hem poc max 6.00 none (2 3/8 in)
30. Pocket height 12.39 cm (4 7/8 in)


cozysewpatterns


Paper Size: LETTER;
Print Actual Size (100% Scale);

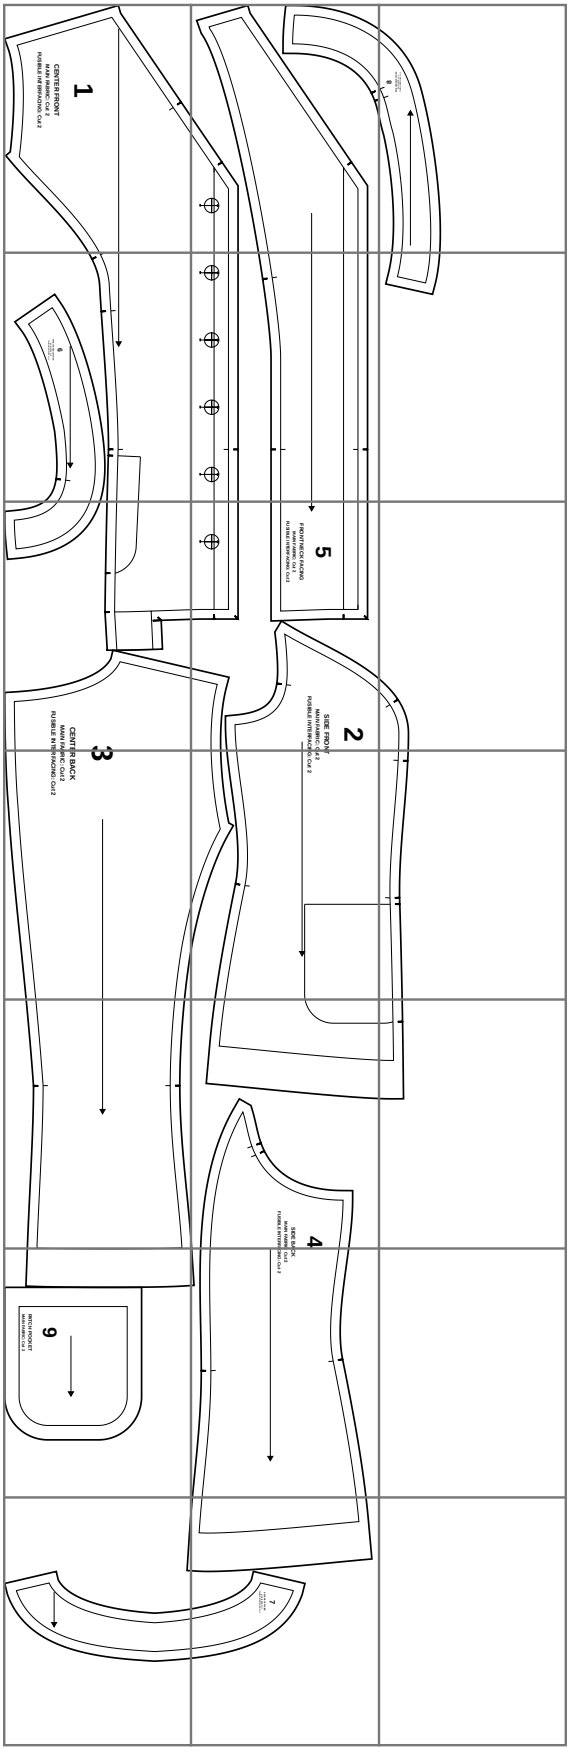

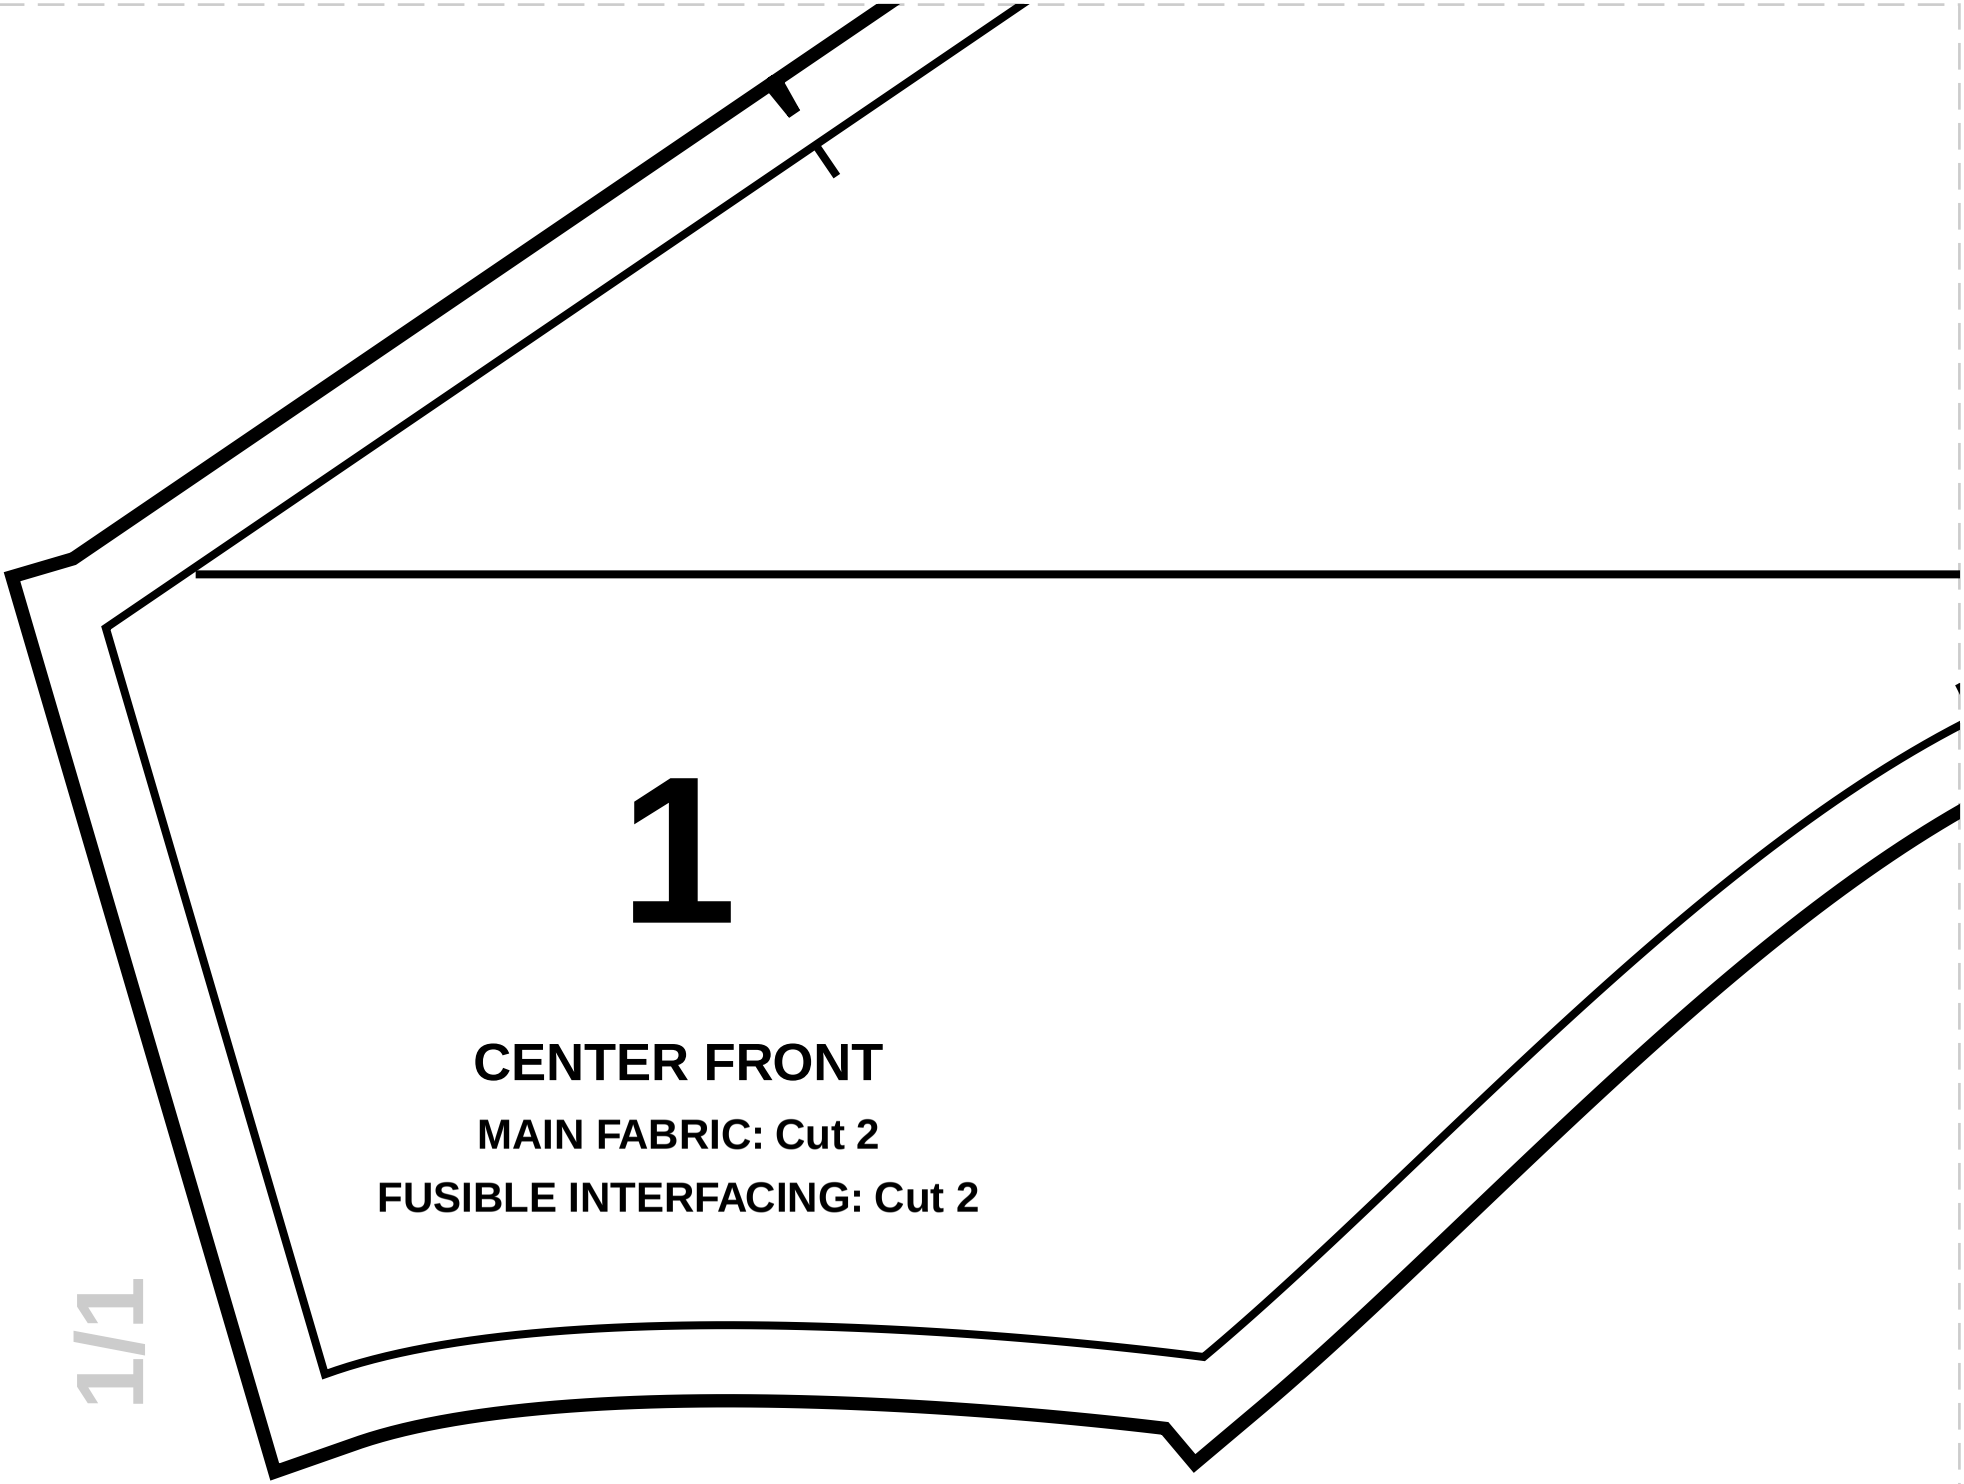
1
CENTER FRONT
MAIN FABRIC: Cut 2
FUSIBLE INTERFACING: Cut 2

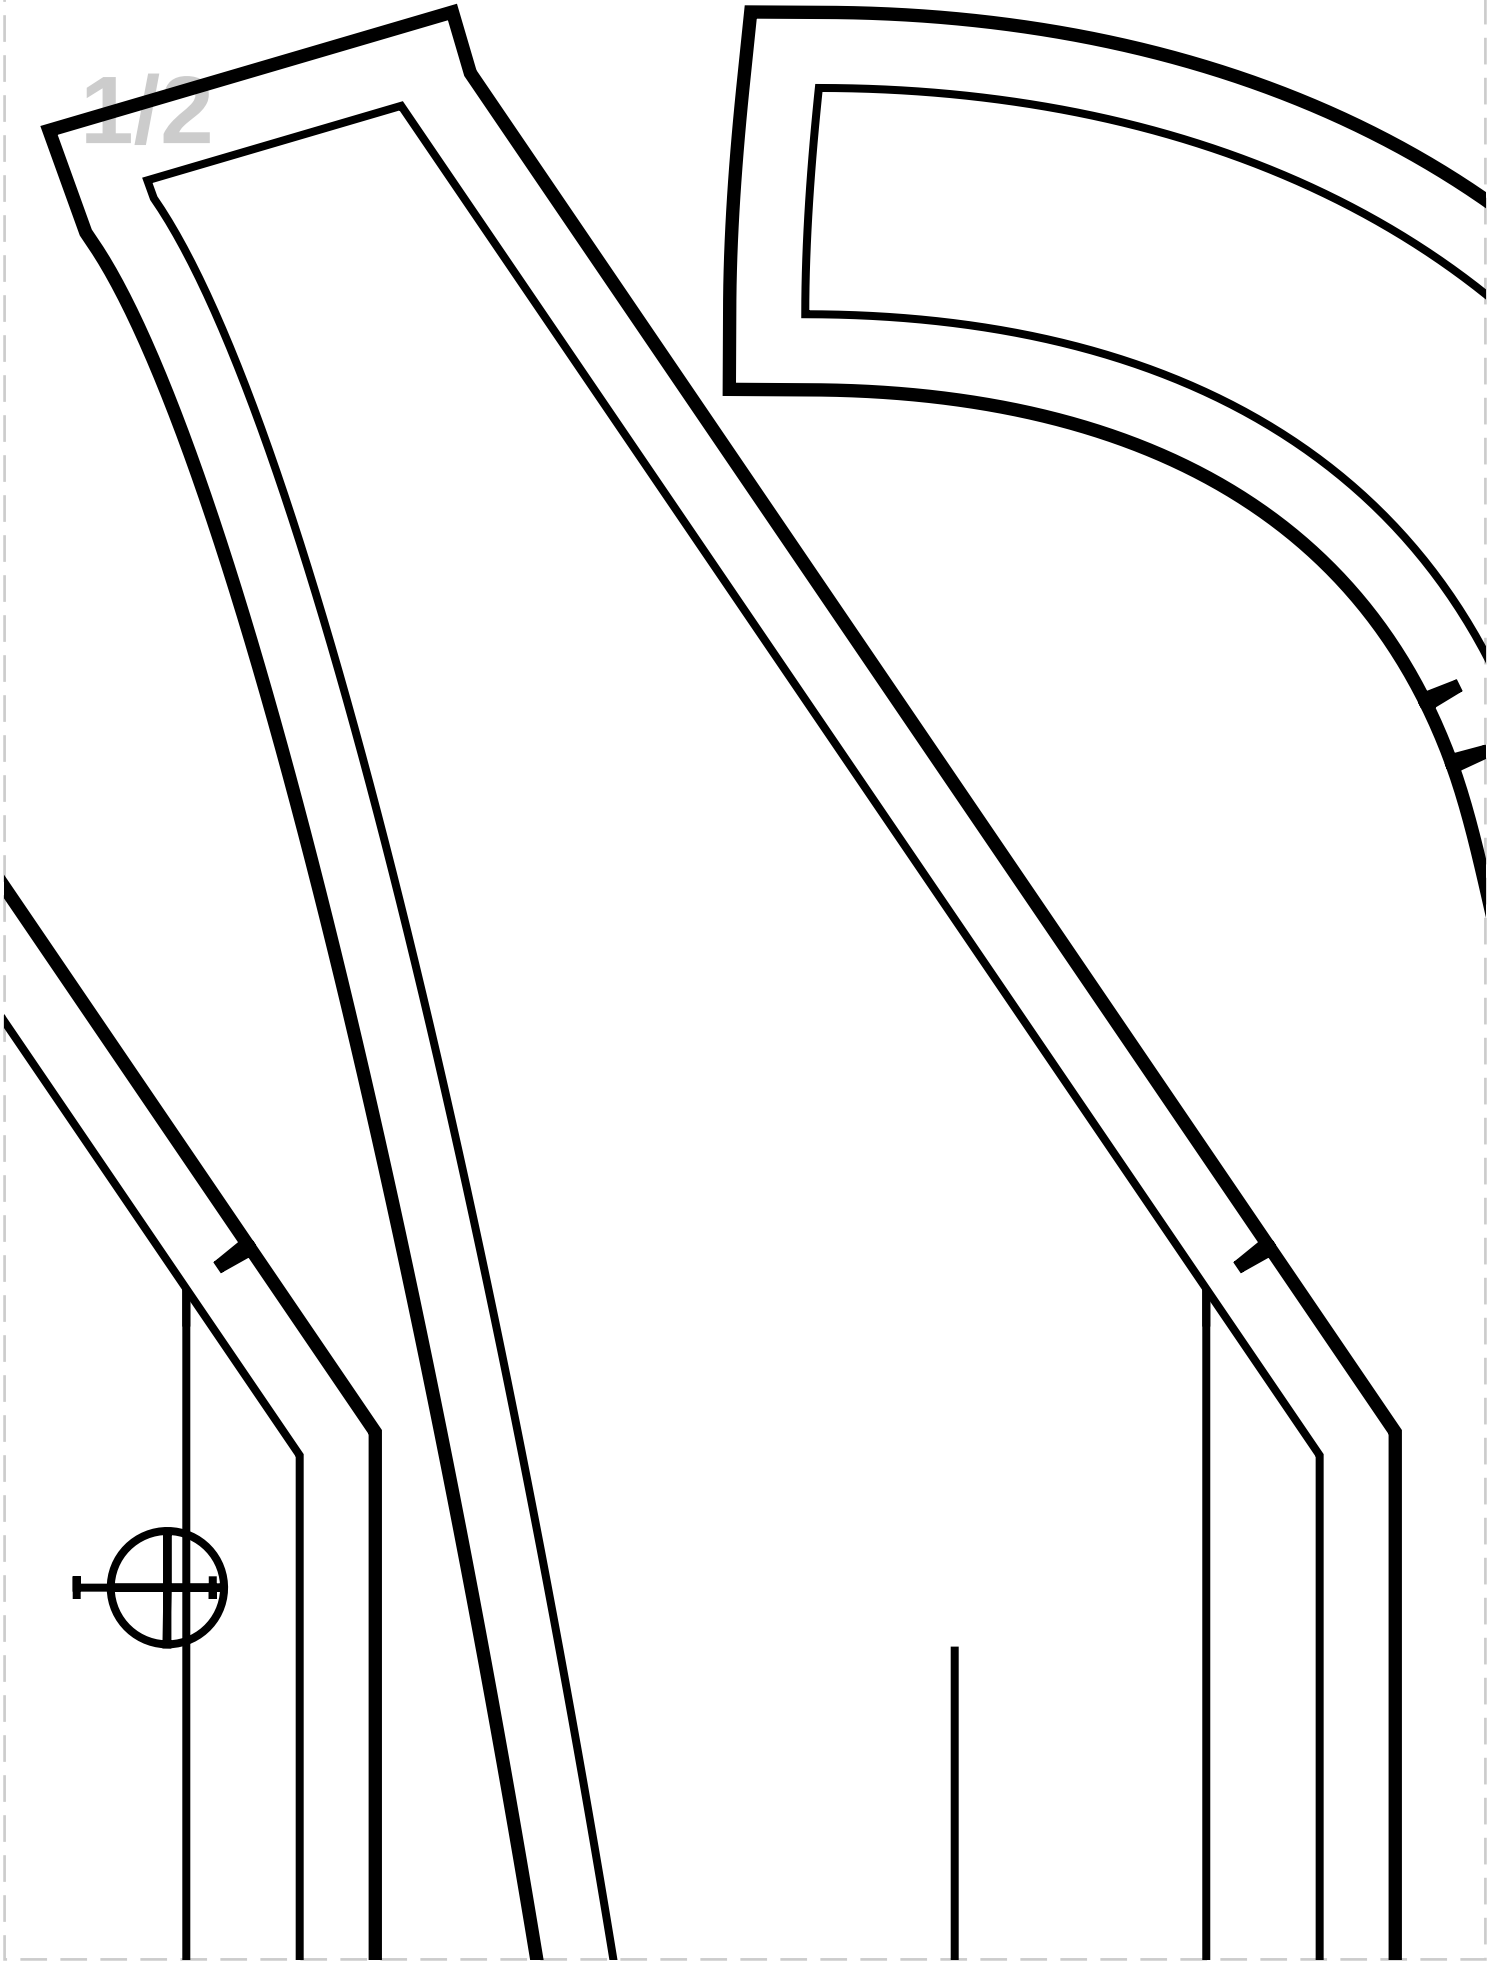

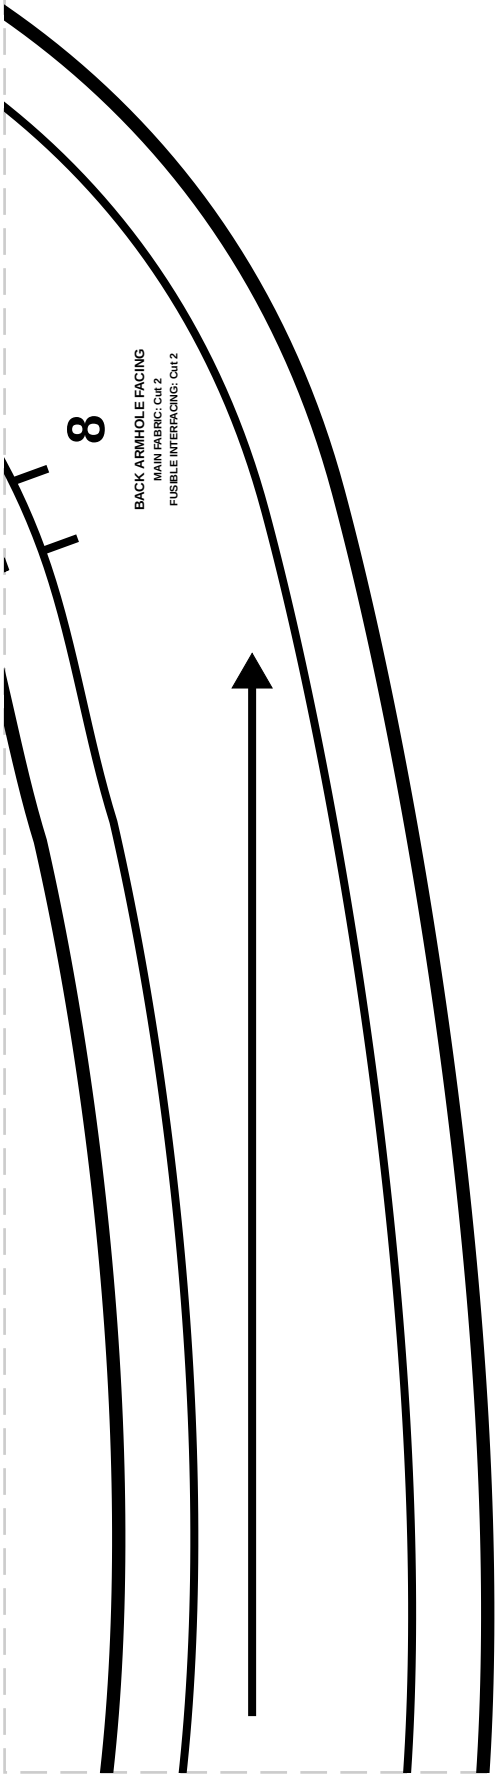
8
BACK ARMHOLE FACING
MAIN FABRIC: Cut 2
FUSIBLE INTERFACING: Cut 2

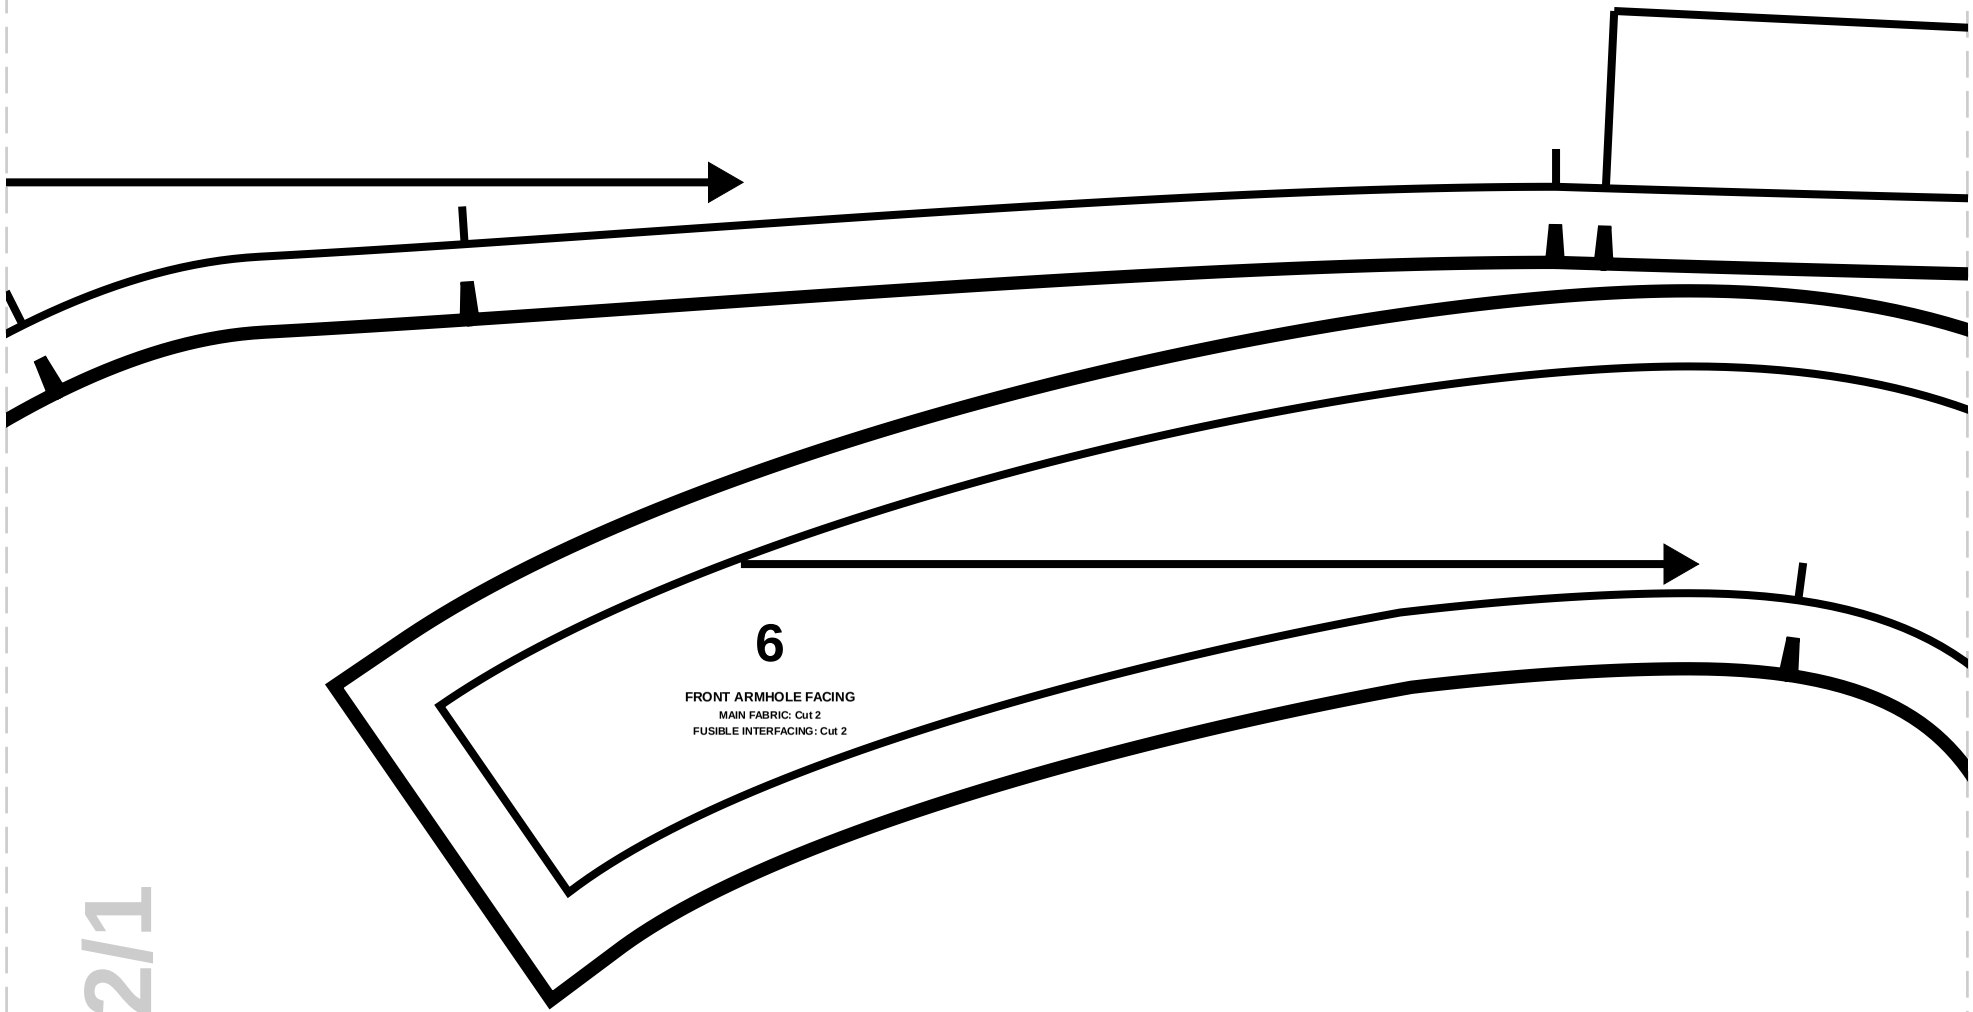


6


FRONT ARMHOLE FACING


MAIN FABRIC: Cut 2


FUSIBLE INTERFACING: Cut 2


2/1

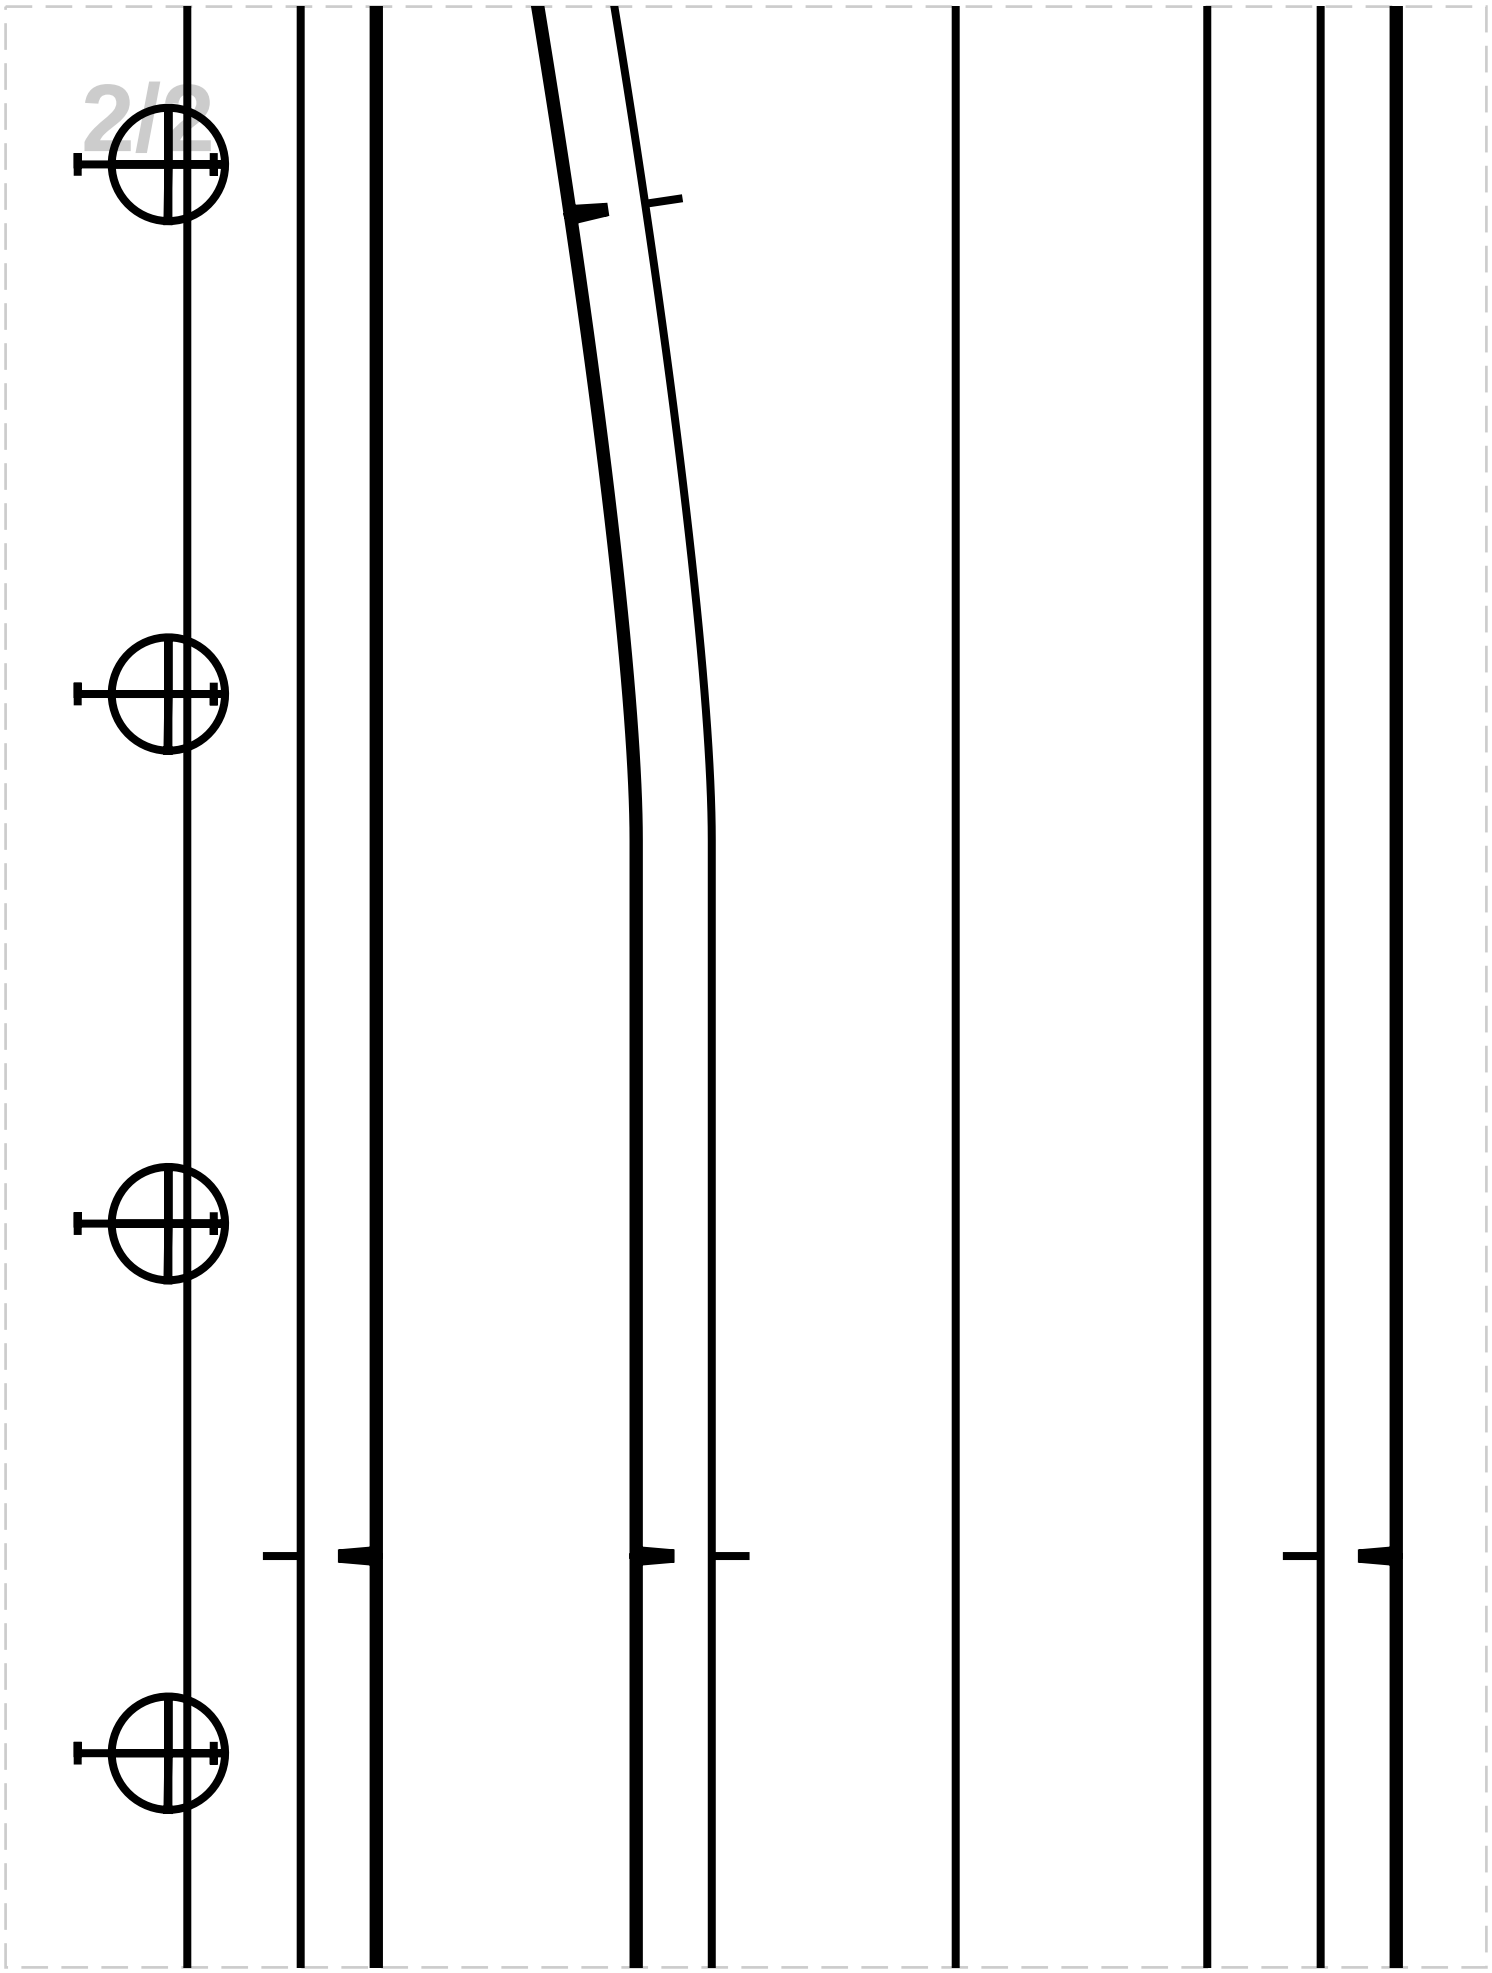

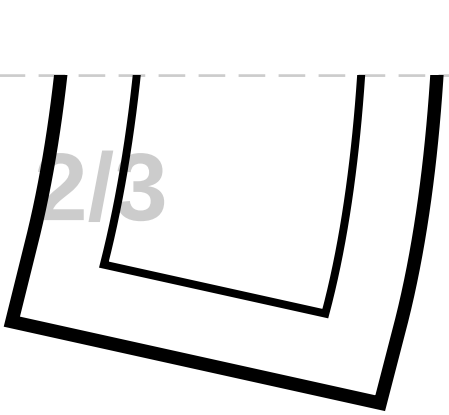
2/3

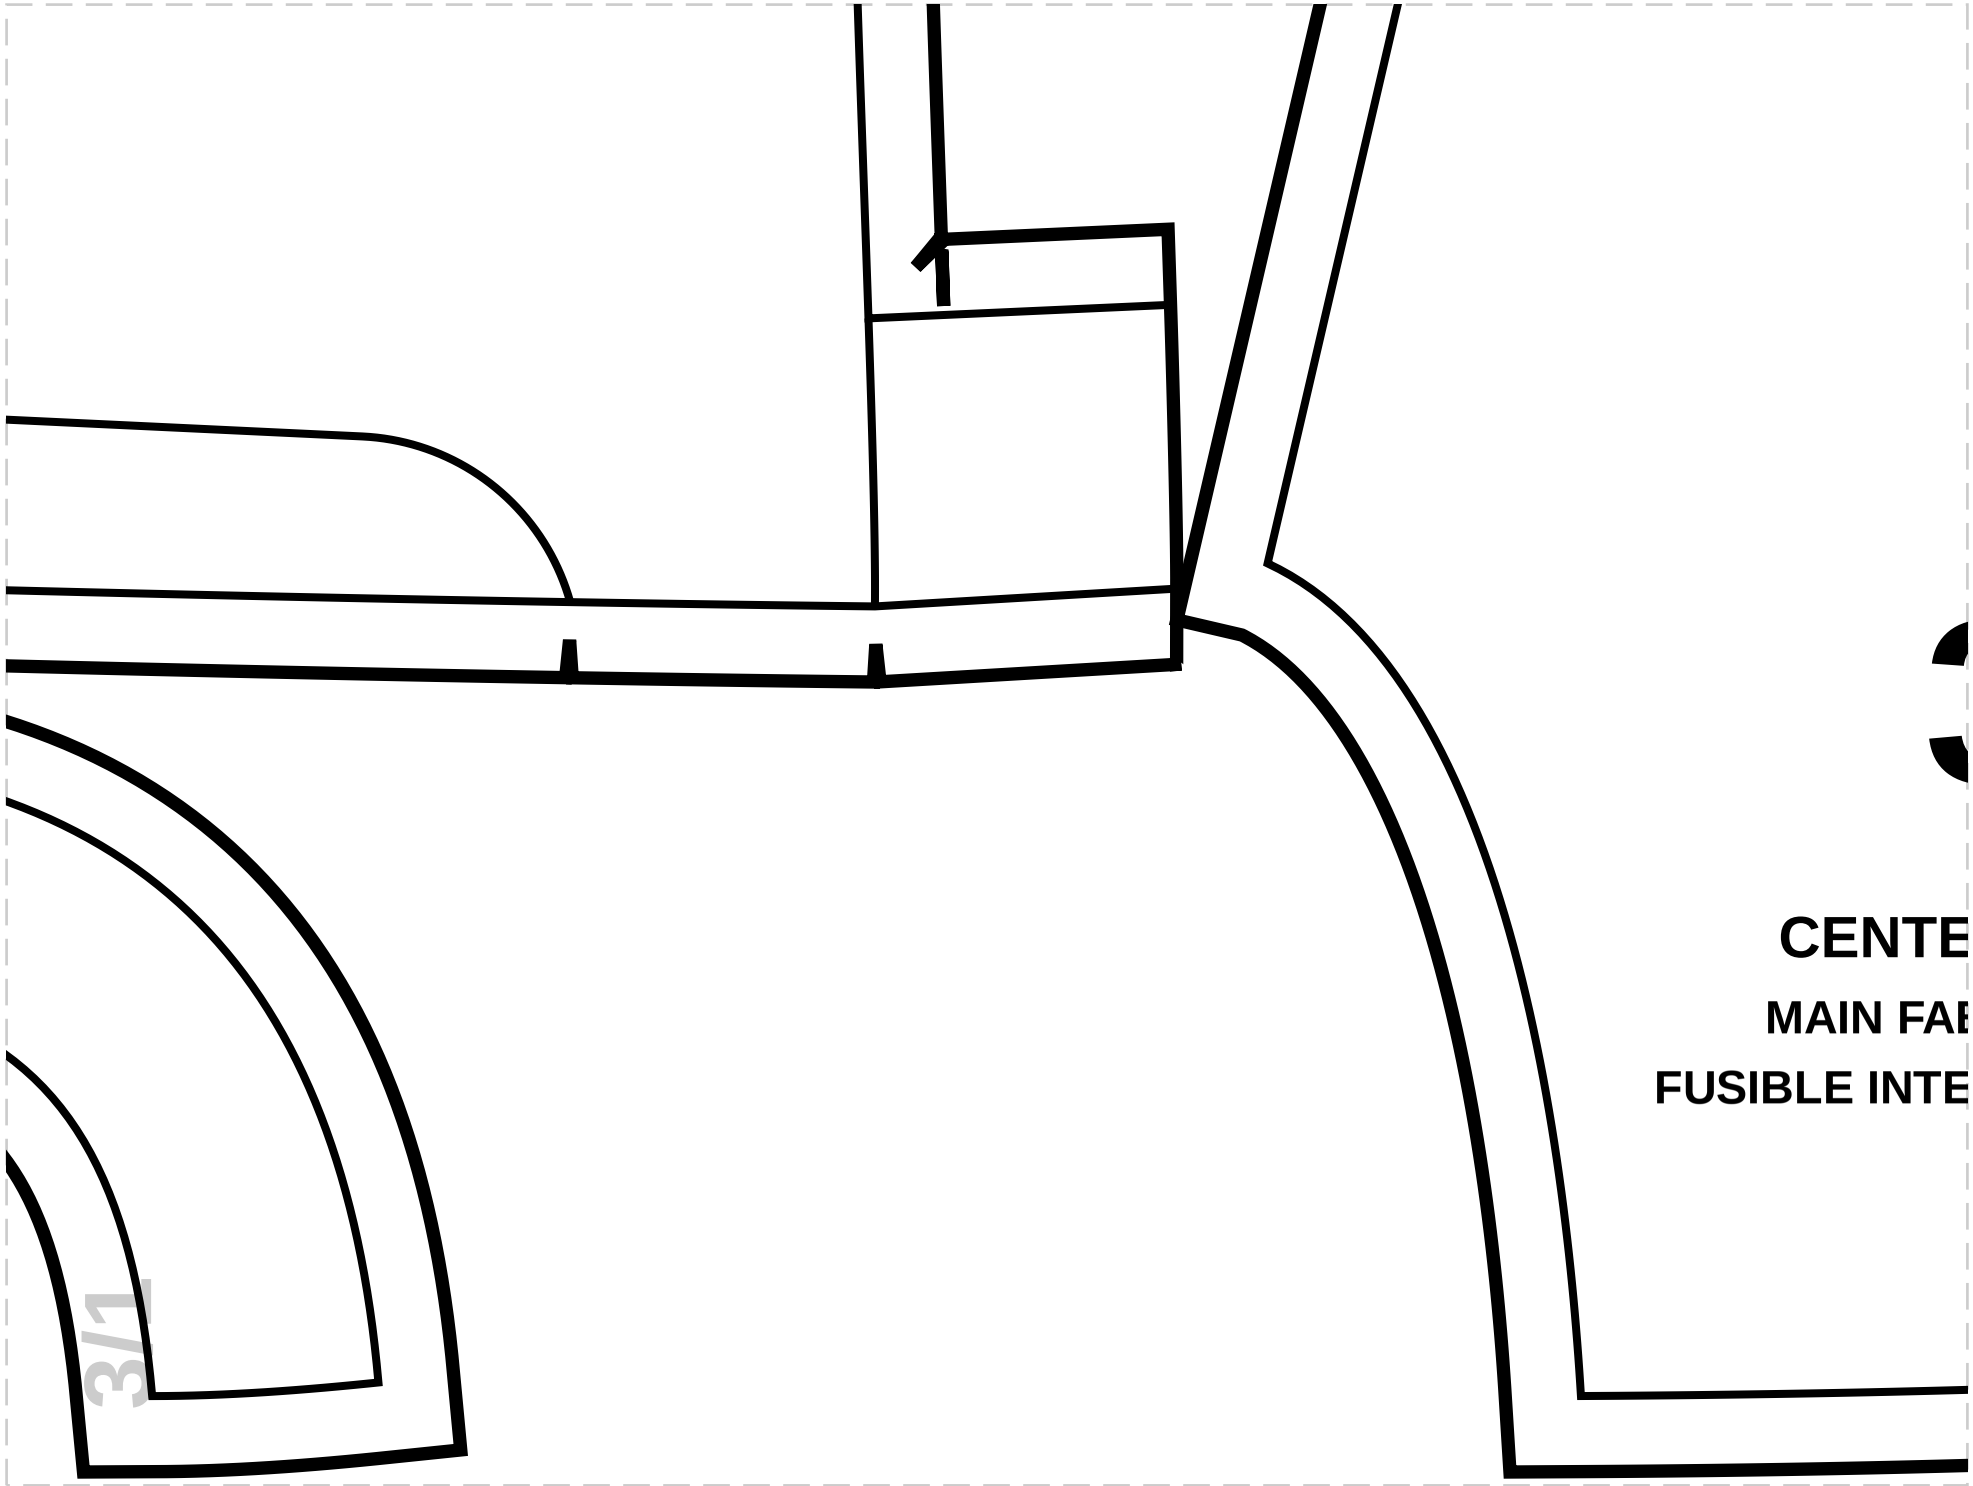
CENTE
MAIN FAB
FUSIBLE INTE
3/1

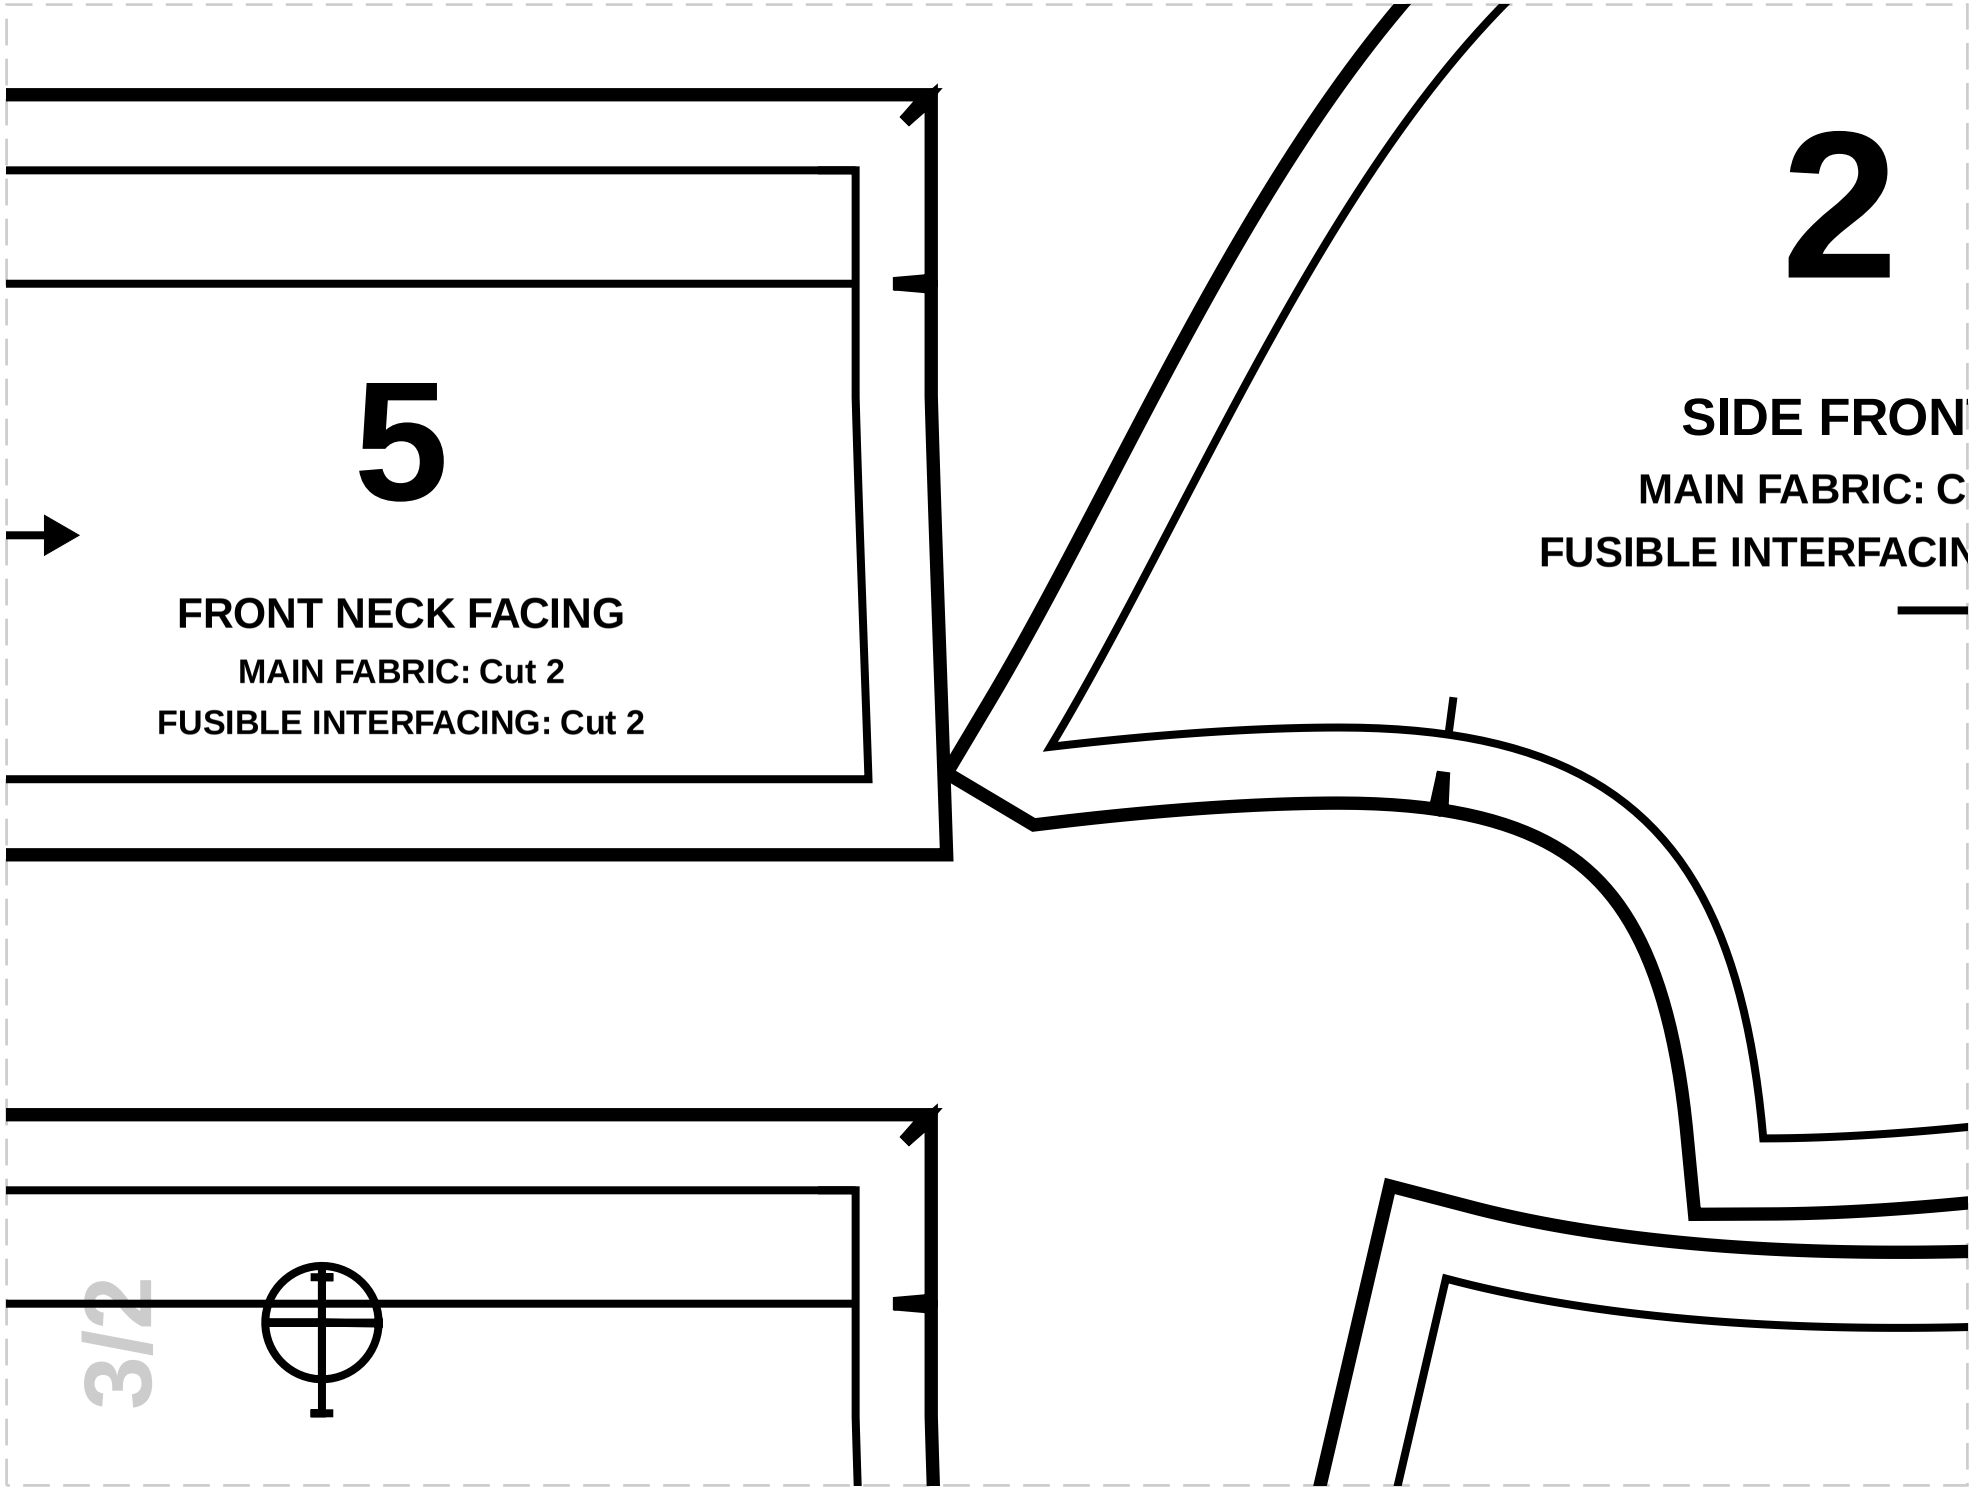
5
FRONT NECK FACING
MAIN FABRIC: Cut 2
FUSIBLE INTERFACING: Cut 2
2
SIDE FRON
MAIN FABRIC: C
FUSIBLE INTERFACIN
3/2

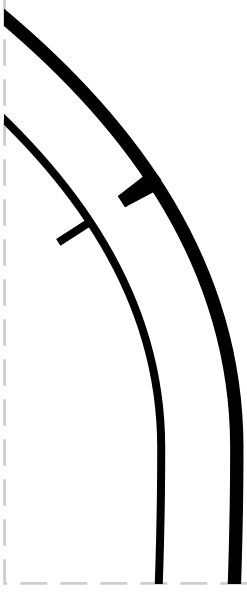

3

ER BACK

BRIC: Cut 2


ERFACING: Cut 2


T/4/1


T


ut 2


NG: Cut 2

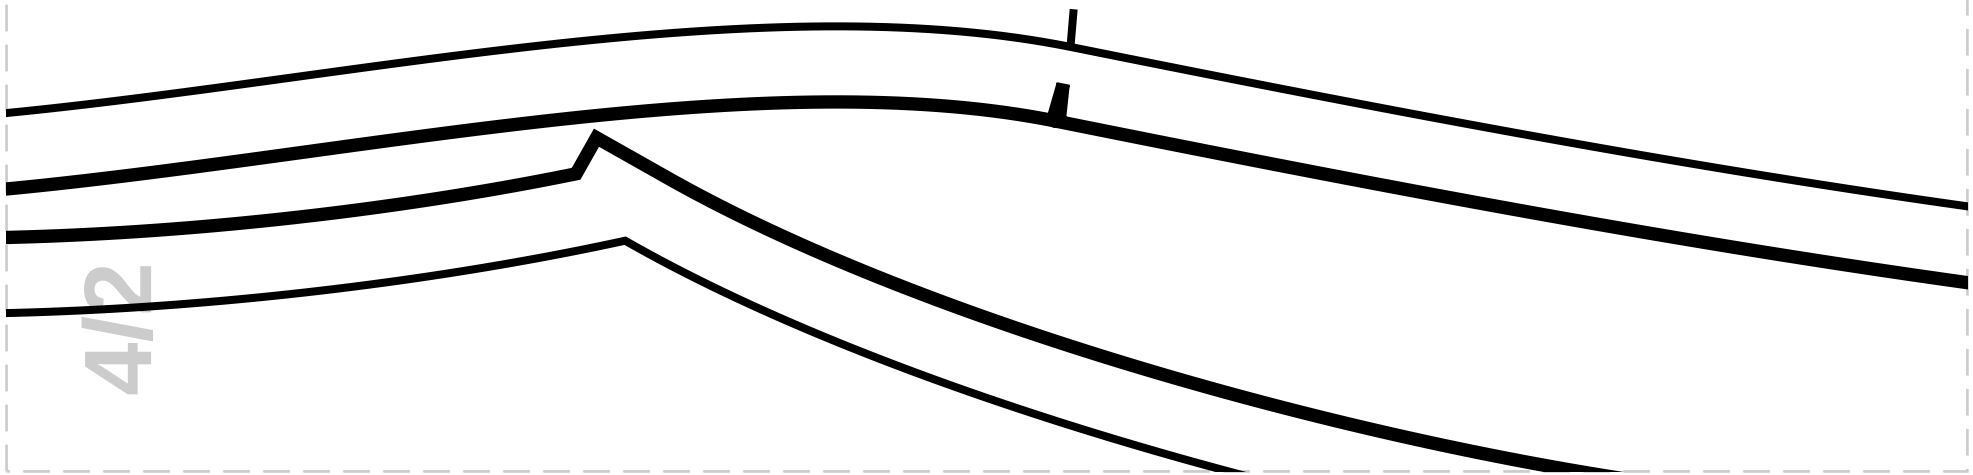


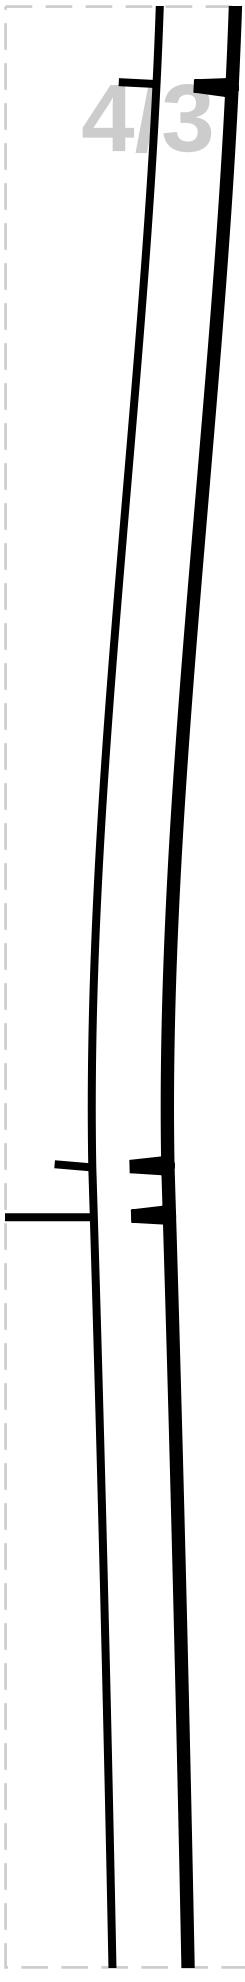


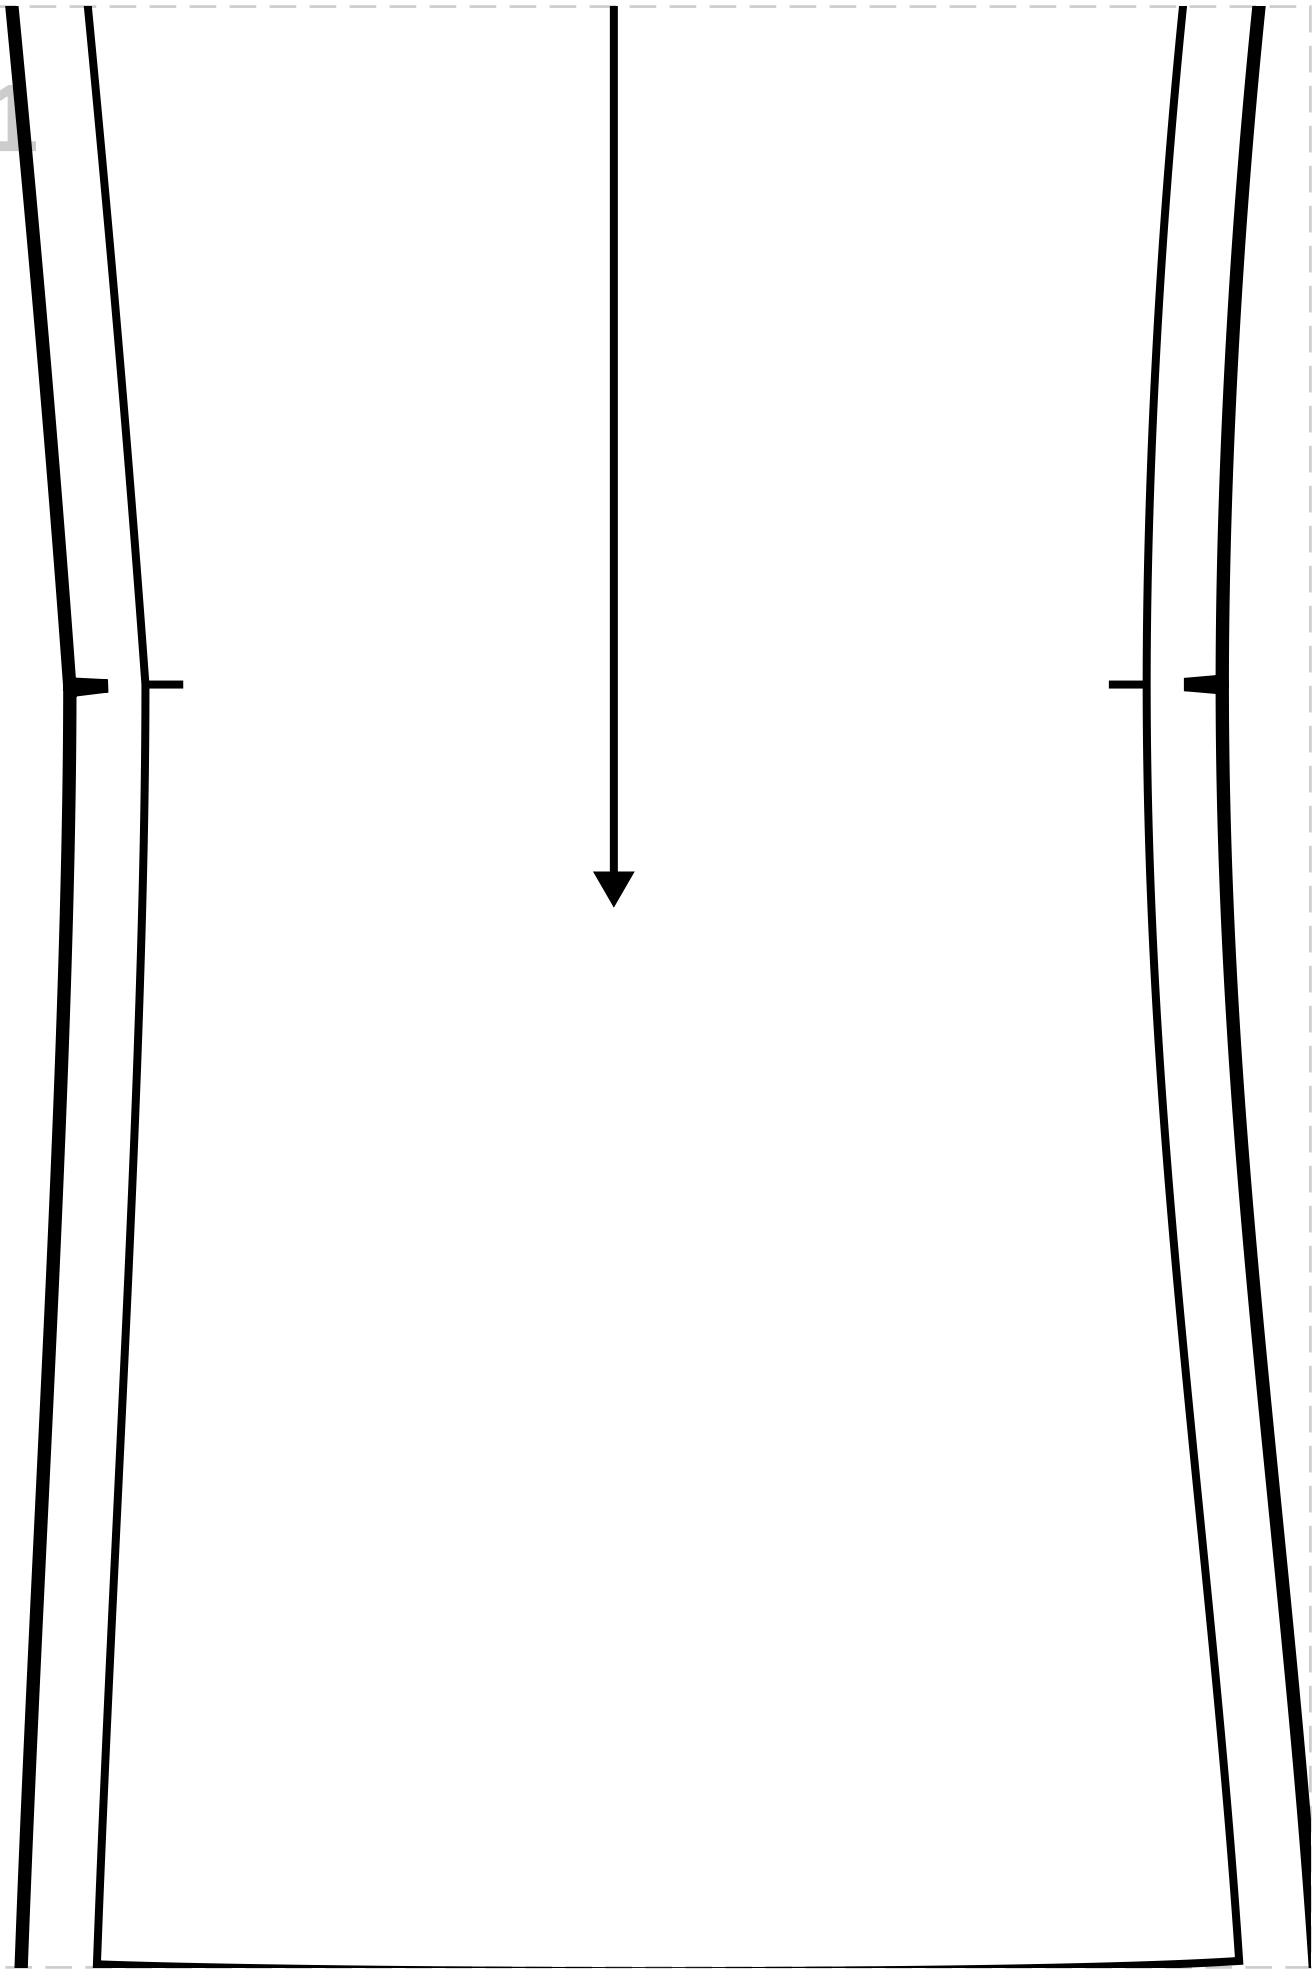

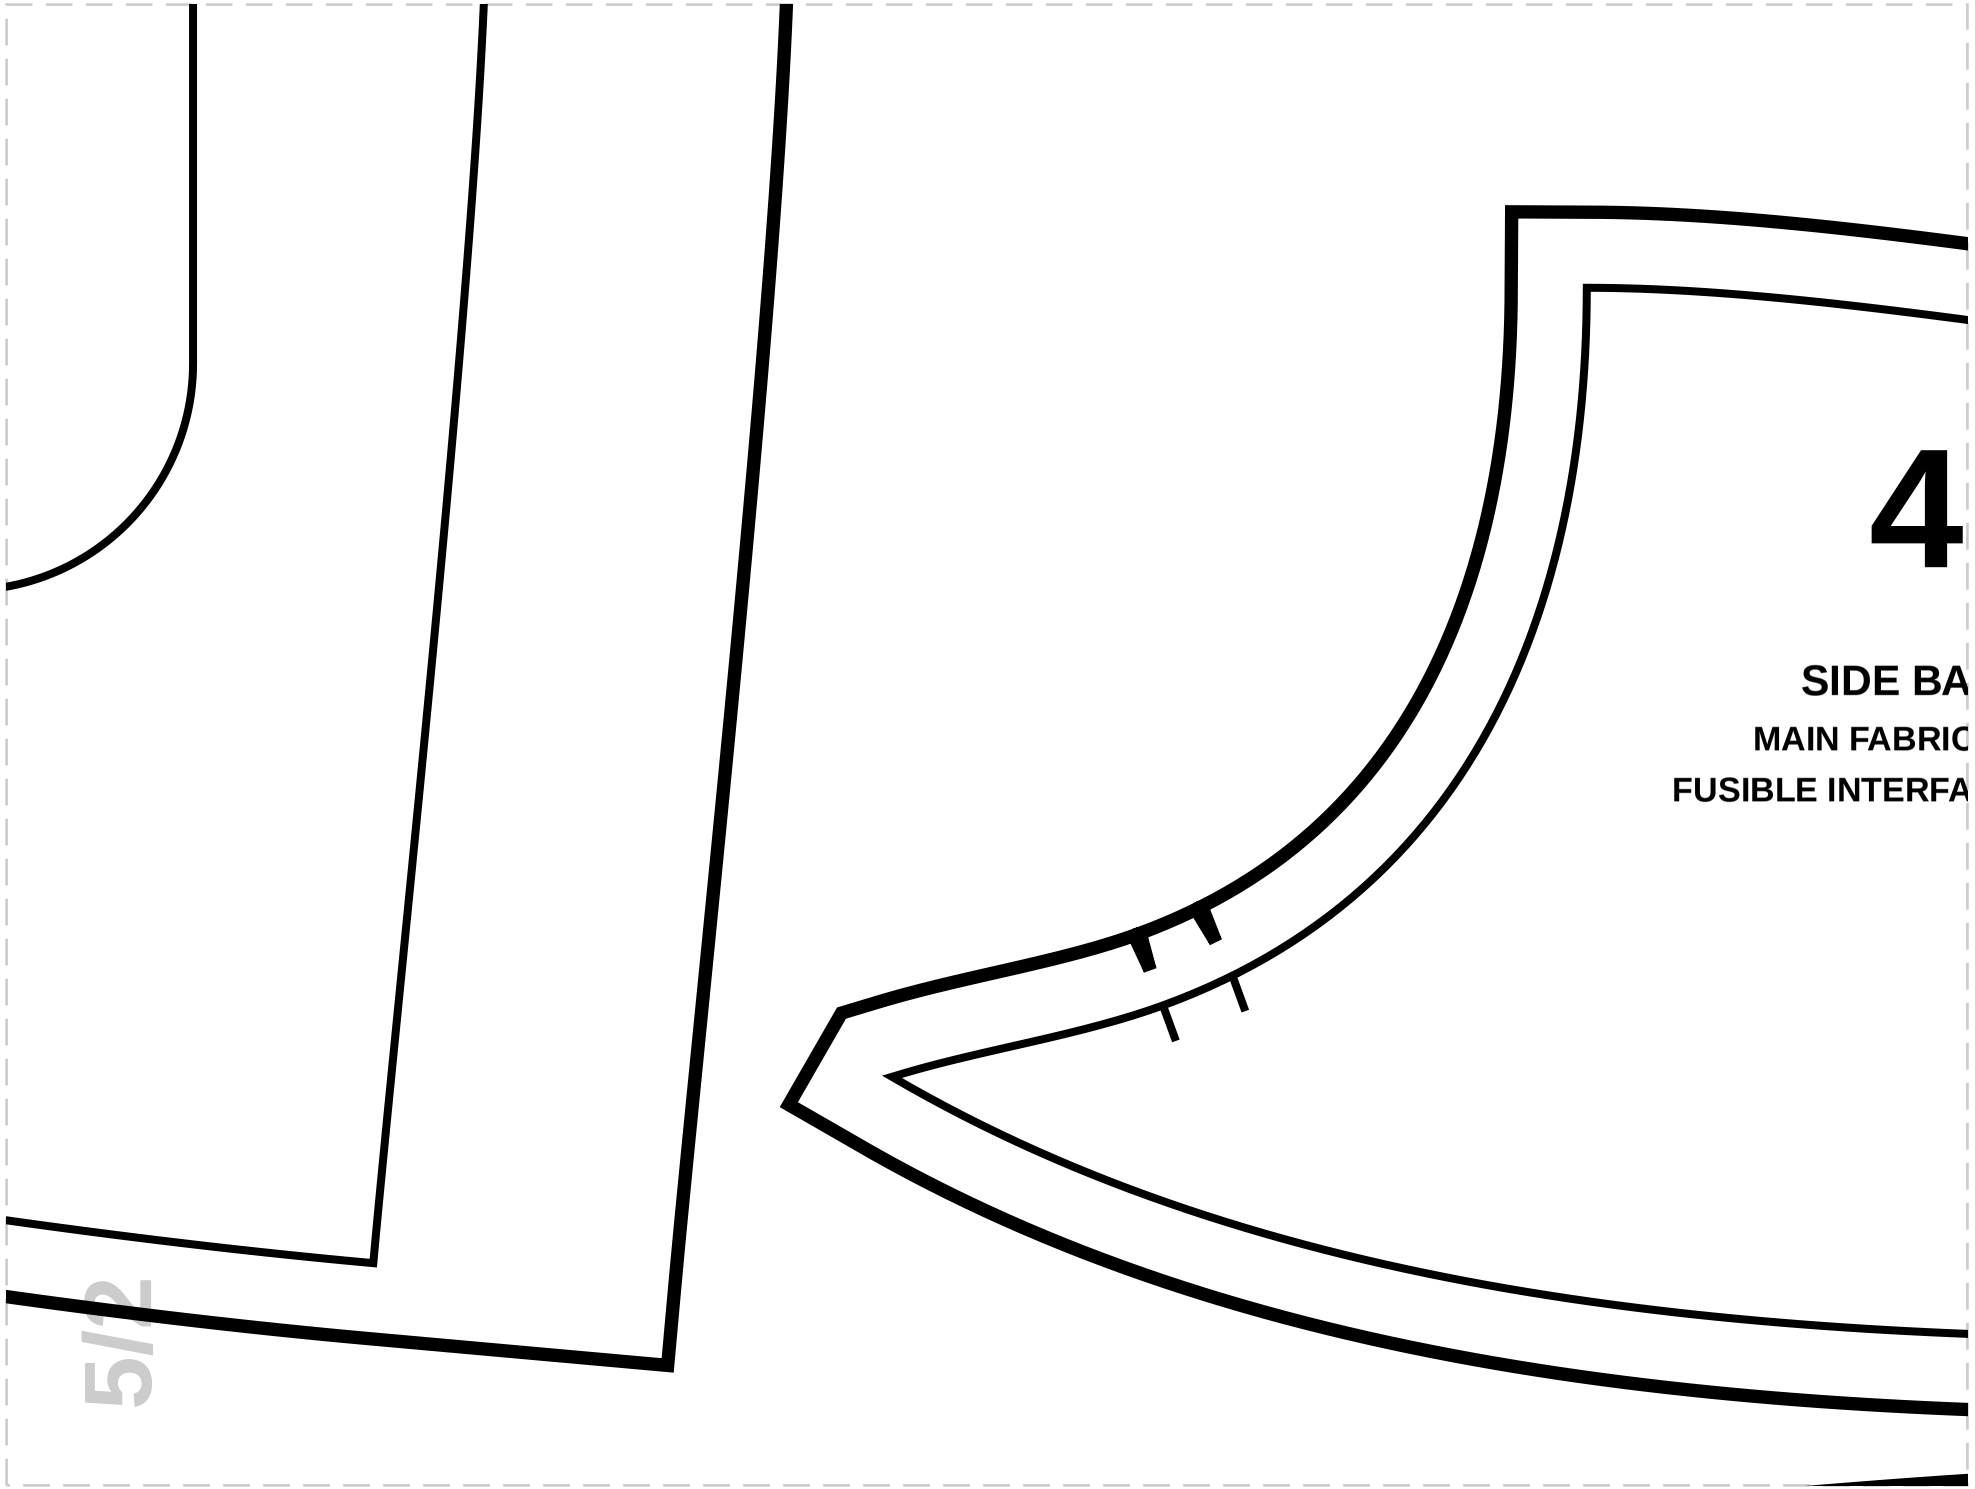
4
SIDE BA
MAIN FABRIC
FUSIBLE INTERFA
5/2

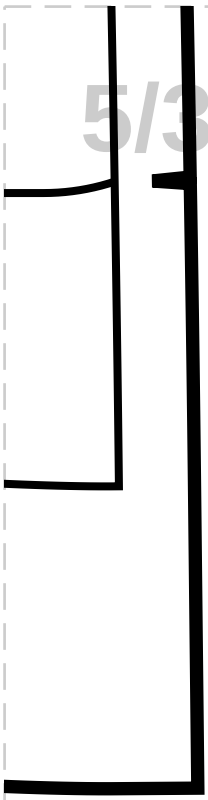


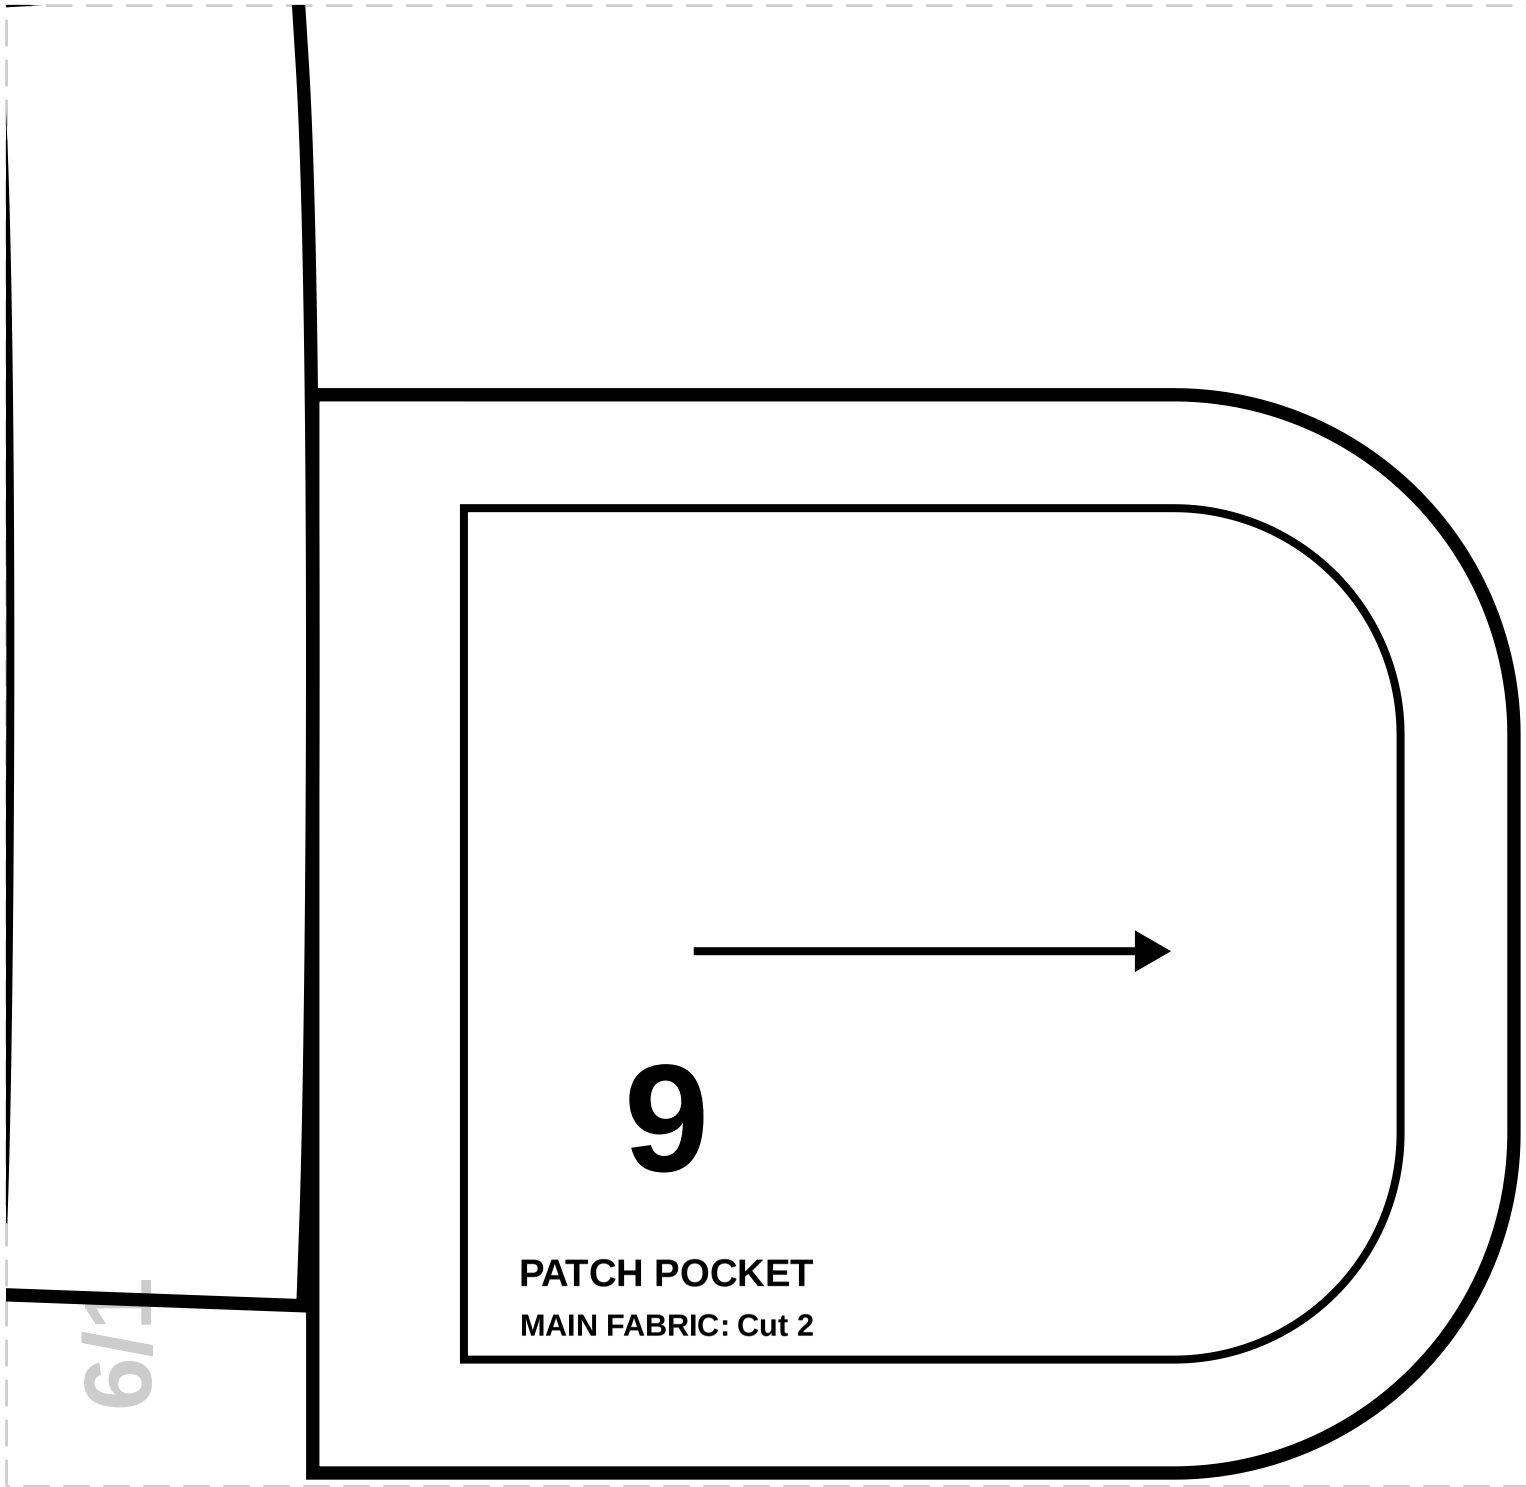

9
PATCH POCKET
MAIN FABRIC: Cut 2

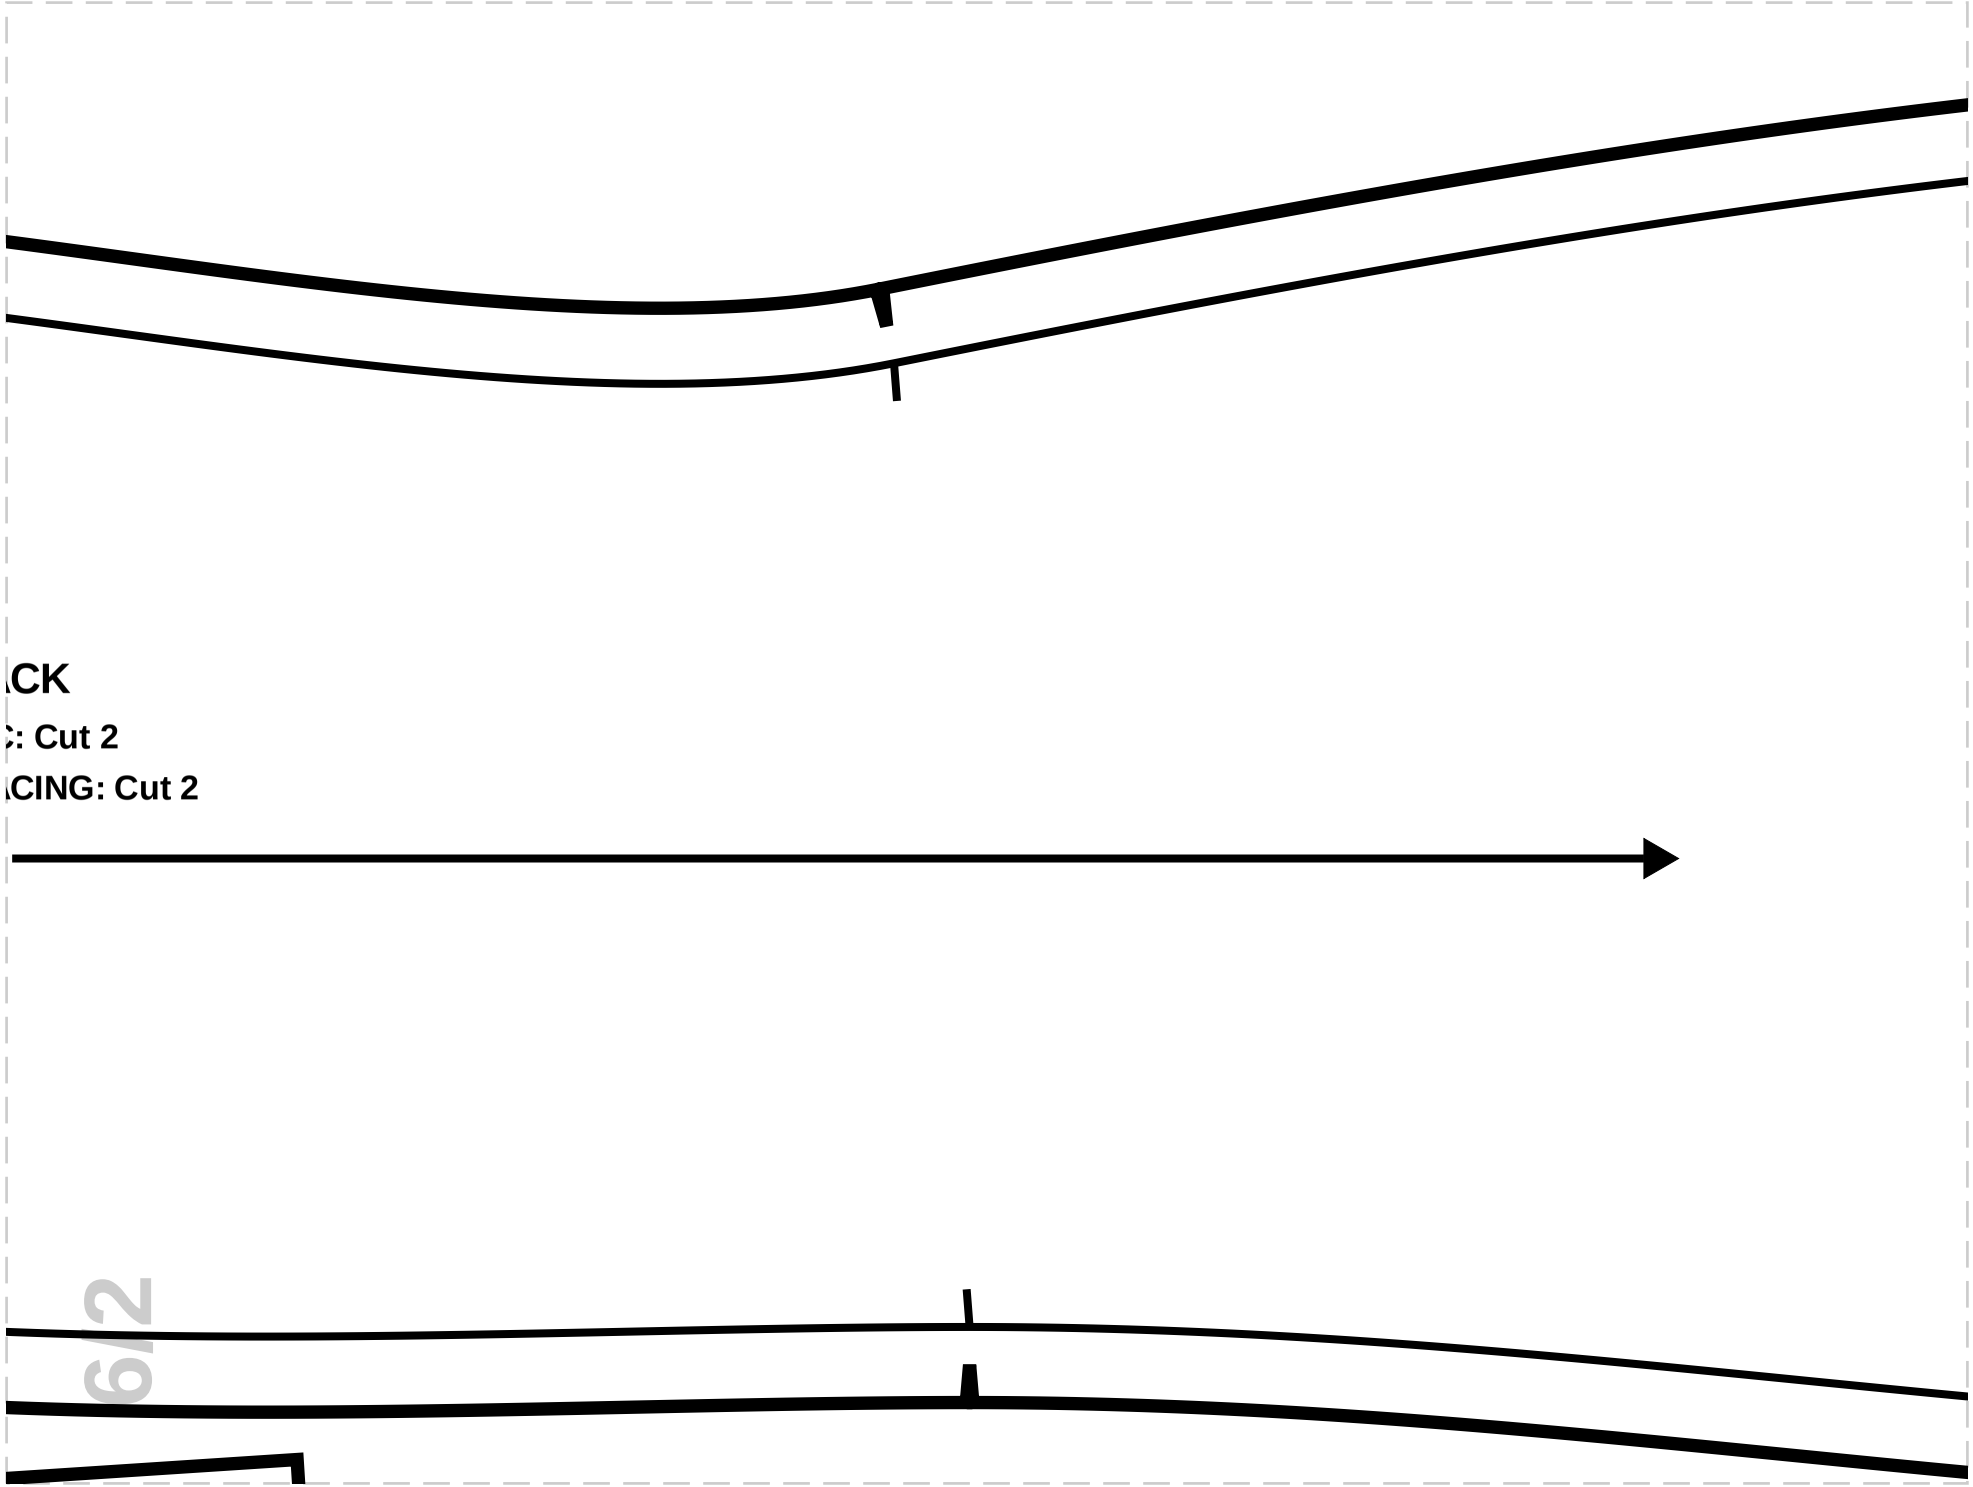
CK
: Cut 2
CING: Cut 2
642

6/3

7/1

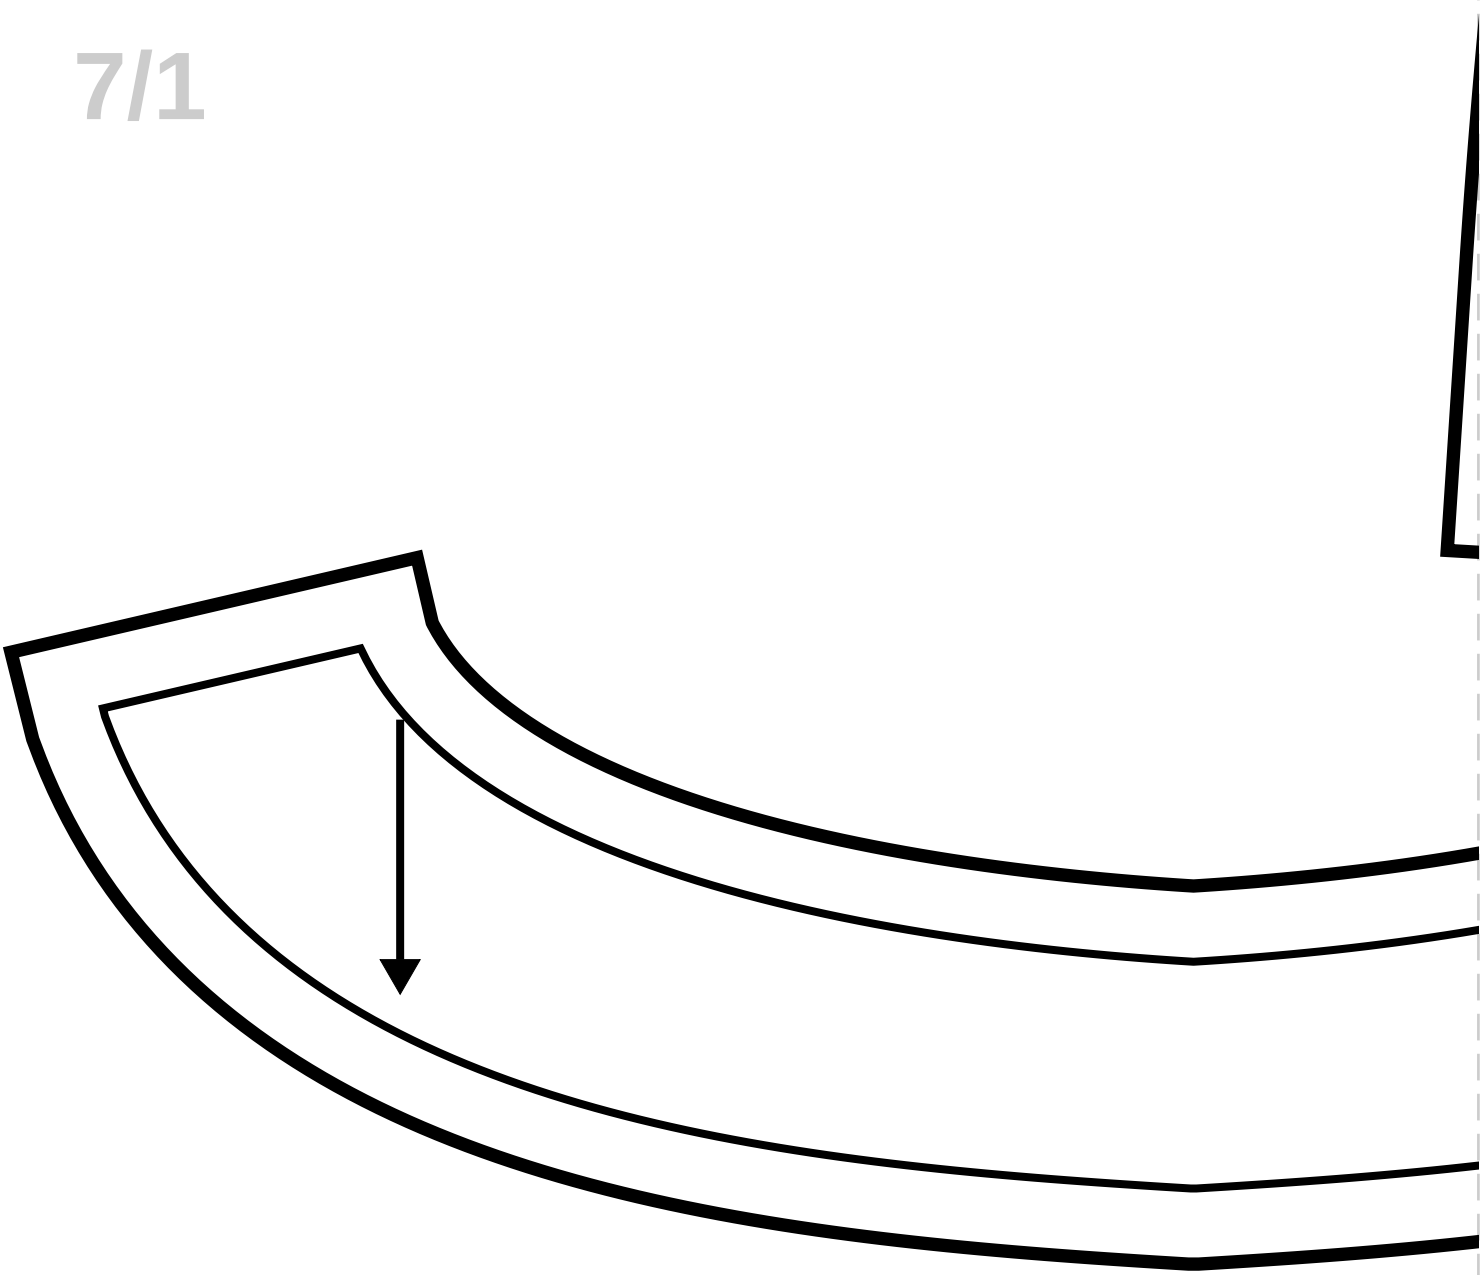

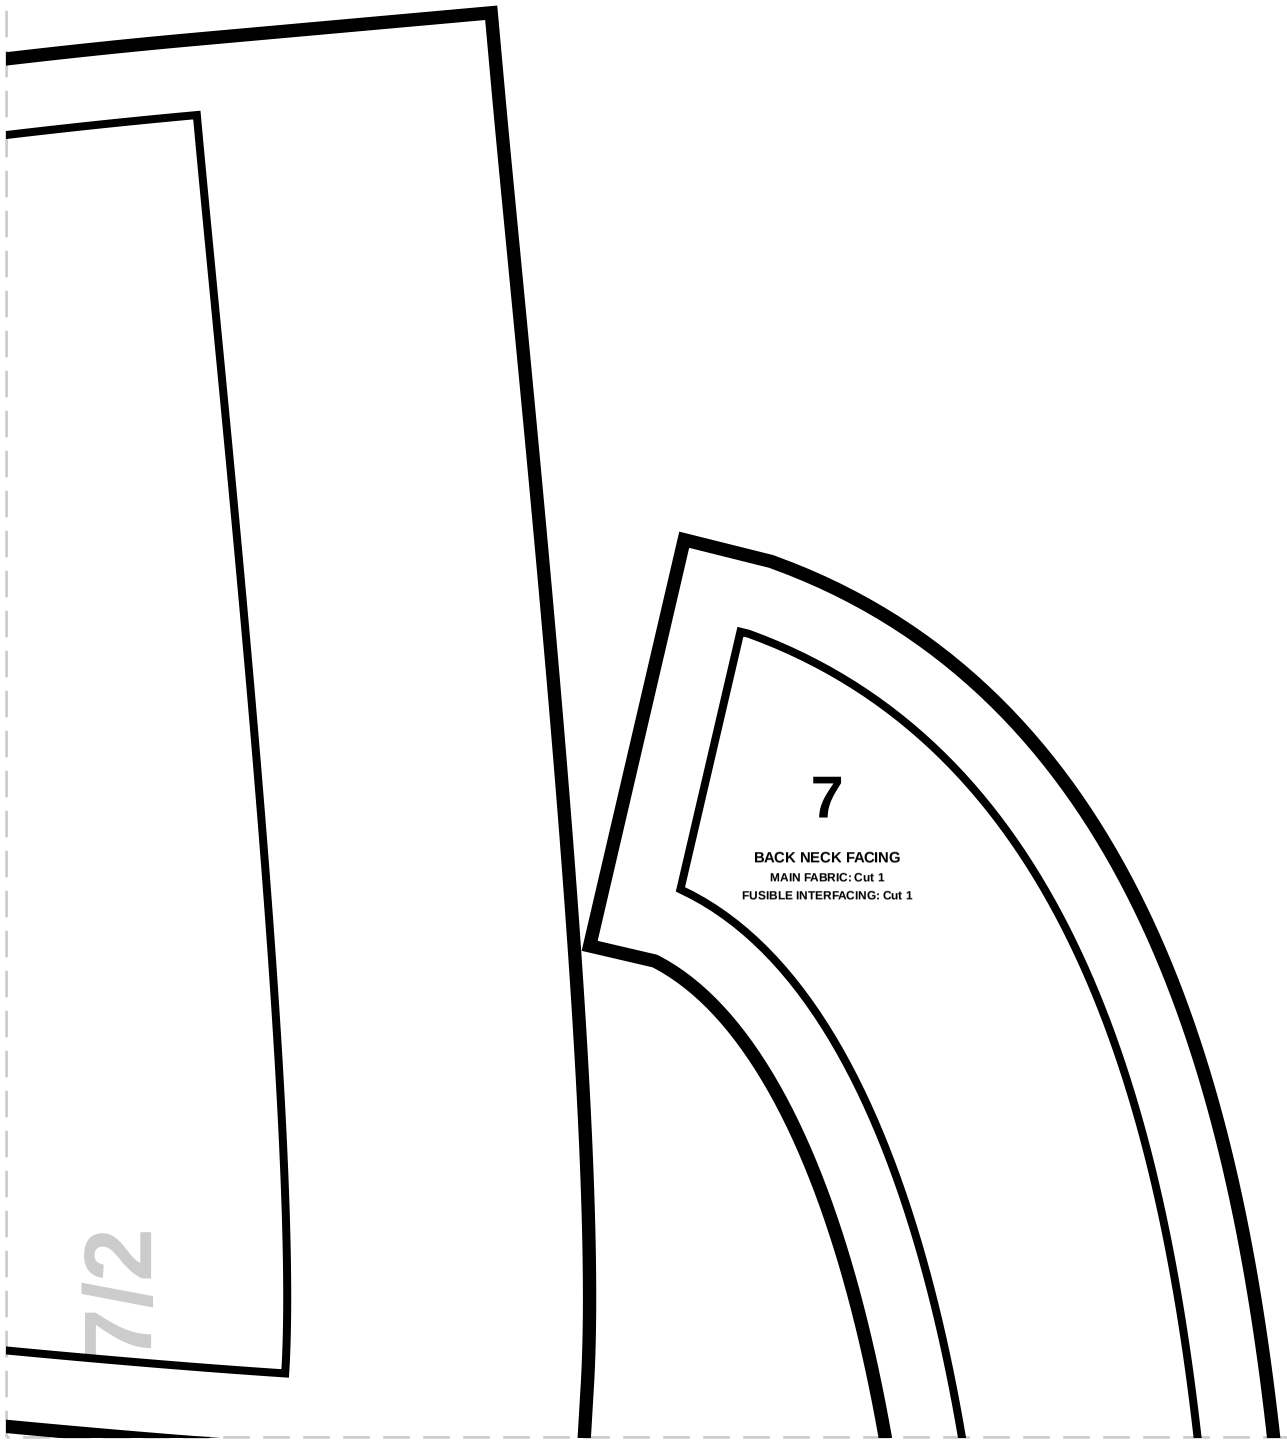
7
BACK NECK FACING
MAIN FABRIC: Cut 1
FUSIBLE INTERFACING: Cut 1
7/2

7/3