cozysewpatterns

Print this Calibration Test page first!

Size: Height: 167.75, Bust: 109.25, Waist: 93.25, Hips: 115.5
SIZE 16

Notes

How to print

Printing


Once your Calibration Test Page has been printed, measure the 4”x 4” (10cm) scale box with a ruler. If the lengths match, you can confidently print your pattern. If the rulers do not match, set your print settings to 100% or Actual and retry.

Cutting

Your printouts will always have a dashed border to perfectly match your sheets. Cut off the right edge of each page. Be careful not to cut beyond the dashed mark, otherwise your patterns will not align accurately.

Tapping

Group each sheet by the second number marked on each pate i.e. in a group 1, there are: 1/1, 2/1, 3/1, 4/1, etc. In a group 2: 1/2, 2/2 etc. 2. Place page 1/1 on top of the page 2/1, overlapping the right side edge. Match corners and crosses and secure with a pin or tape. Then use a scotch tape to permanently attach the sheets together.

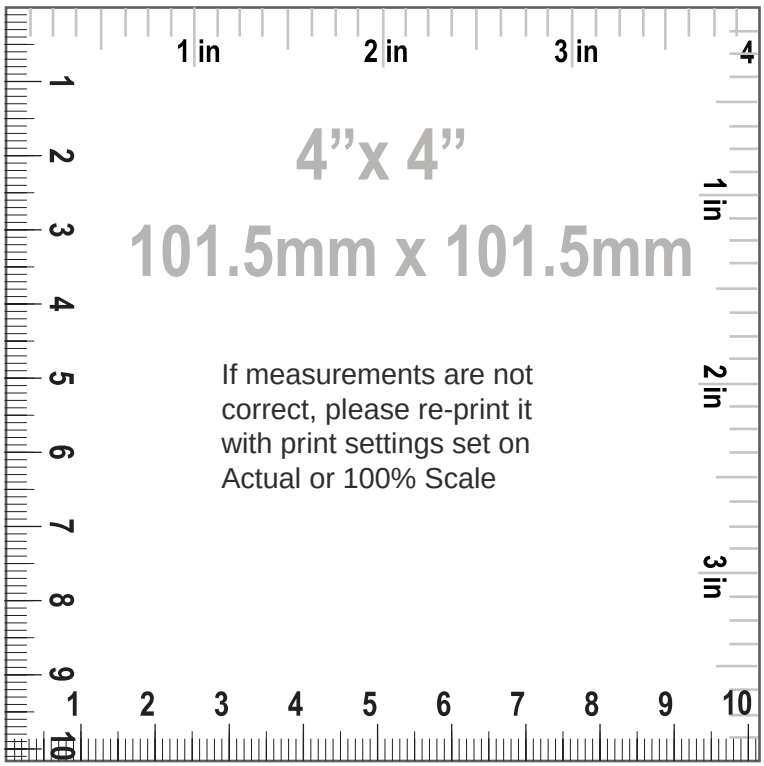

SIZE 16
Seam Allowance: 1 (3/8 in)

Pattern pieces:

1. "CENTER FRONT", MAIN FABRIC, FUSIBLE INTERFACING: Cut 2
2. "SIDE FRONT", MAIN FABRIC, FUSIBLE INTERFACING: Cut 2
3. "CENTER BACK", MAIN FABRIC, FUSIBLE INTERFACING: Cut 2
4. "SIDE BACK", MAIN FABRIC, FUSIBLE INTERFACING: Cut 2
5. "FRONT NECK FACING", MAIN FABRIC, FUSIBLE INTERFACING: Cut 2
6. "FRONT ARMHOLE FACING", MAIN FABRIC, FUSIBLE INTERFACING: Cut 2
7. "BACK NECK FACING", MAIN FABRIC, FUSIBLE INTERFACING: Cut 1
8. "BACK ARMHOLE FACING", MAIN FABRIC, FUSIBLE INTERFACING: Cut 2
9. "PATCH POCKET", MAIN FABRIC: Cut 2


Pattern Specs (Circumferences are divided by 2):


1. Hem max 3.00 none (1 1/8 in)
2. Seam allowance max 2.00 none (3/4 in)
3. Seam allowance p max 1.50 none (5/8 in)
4. Stretch factor 1.00 none (3/8 in)
5. Shoulder pads thickness 1.00 none (3/8 in)
6. Pocket entry length 11.55 cm (4 1/2 in)
7. Waist to pocket length 2.50 cm (1 in)
8. Side seam pocket position 7.84 cm (3 1/8 in)
9. Button diameter 1.50 cm (5/8 in)
10. Front buttons quantity 6.00 pc
11. Front length from HPS to hem 62.34 cm (24 1/2 in)
12. Across chest 61.75 cm (24 1/4 in)
13. Center front length to hem 44.03 cm (17 3/8 in)
14. Center back length to hem 58.59 cm (23 1/8 in)
15. Across front 42.69 cm (16 3/4 in)
16. Across back 42.40 cm (16 3/4 in)
17. Across shoulders 42.13 cm (16 5/8 in)
18. Side seam 33.72 cm (13 1/4 in)
19. Waist 54.10 cm (21 1/4 in)
20. Low hips 66.23 cm (26 1/8 in)

21. Blazer hemline sweep 64.72 cm (25 1/2 in)
22. Armhole length 56.43 cm (22 1/4 in)
23. Neck opening 21.59 cm (8 1/2 in)
24. Front neck drop 16.06 cm (6 3/8 in)
25. Back neck drop 4.17 cm (1 5/8 in)
26. Shoulder width 13.28 cm (5 1/4 in)
27. Apex to apex 22.85 cm (9 in)
28. Seam allowance poc max 3.00 none (1 1/8 in)
29. Hem poc max 6.00 none (2 3/8 in)
30. Pocket height 12.70 cm (5 in)

cozysewpatterns

Paper Size: LETTER;
Print Actual Size (100% Scale);

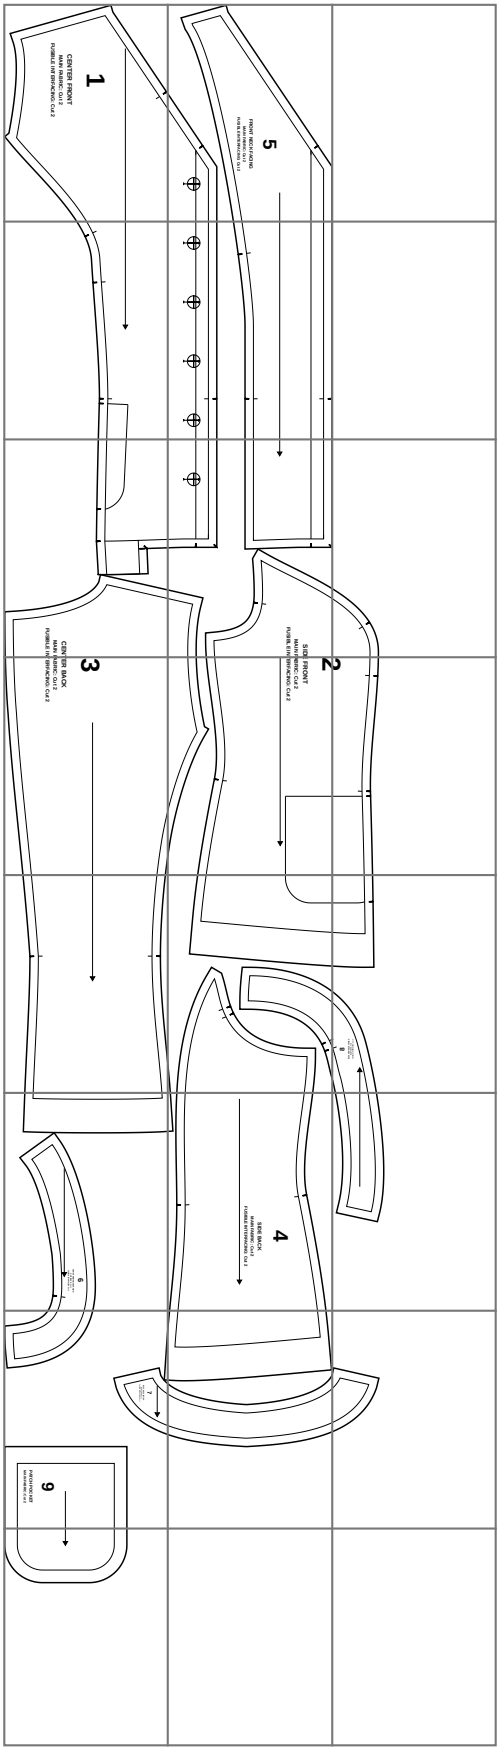

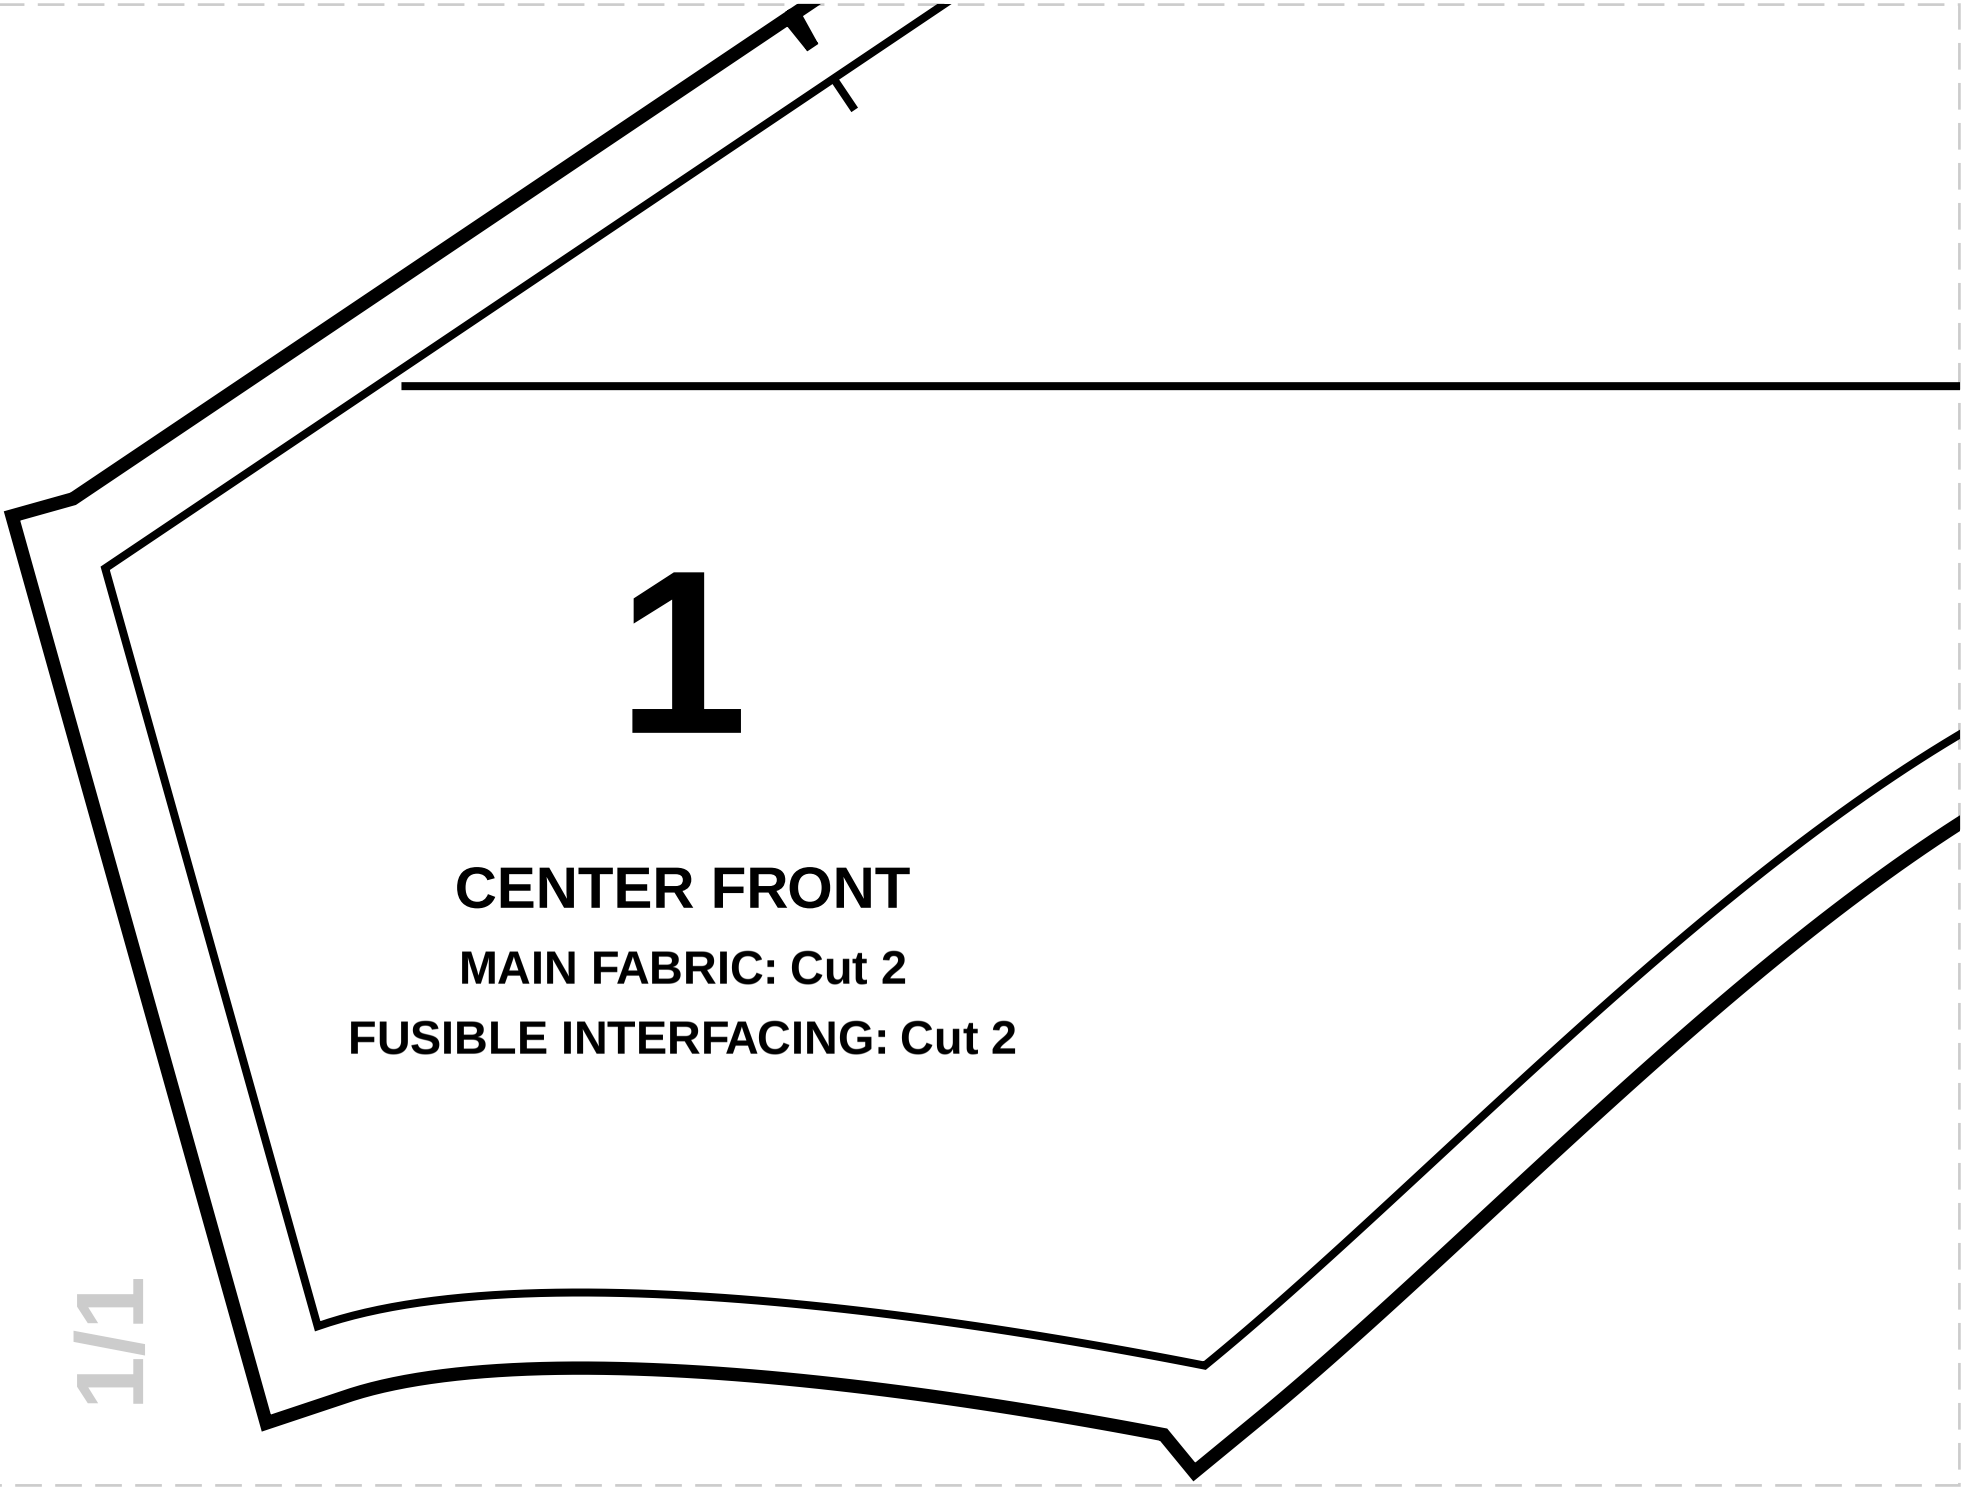


1

CENTER FRONT

MAIN FABRIC: Cut 2

FUSIBLE INTERFACING: Cut 2

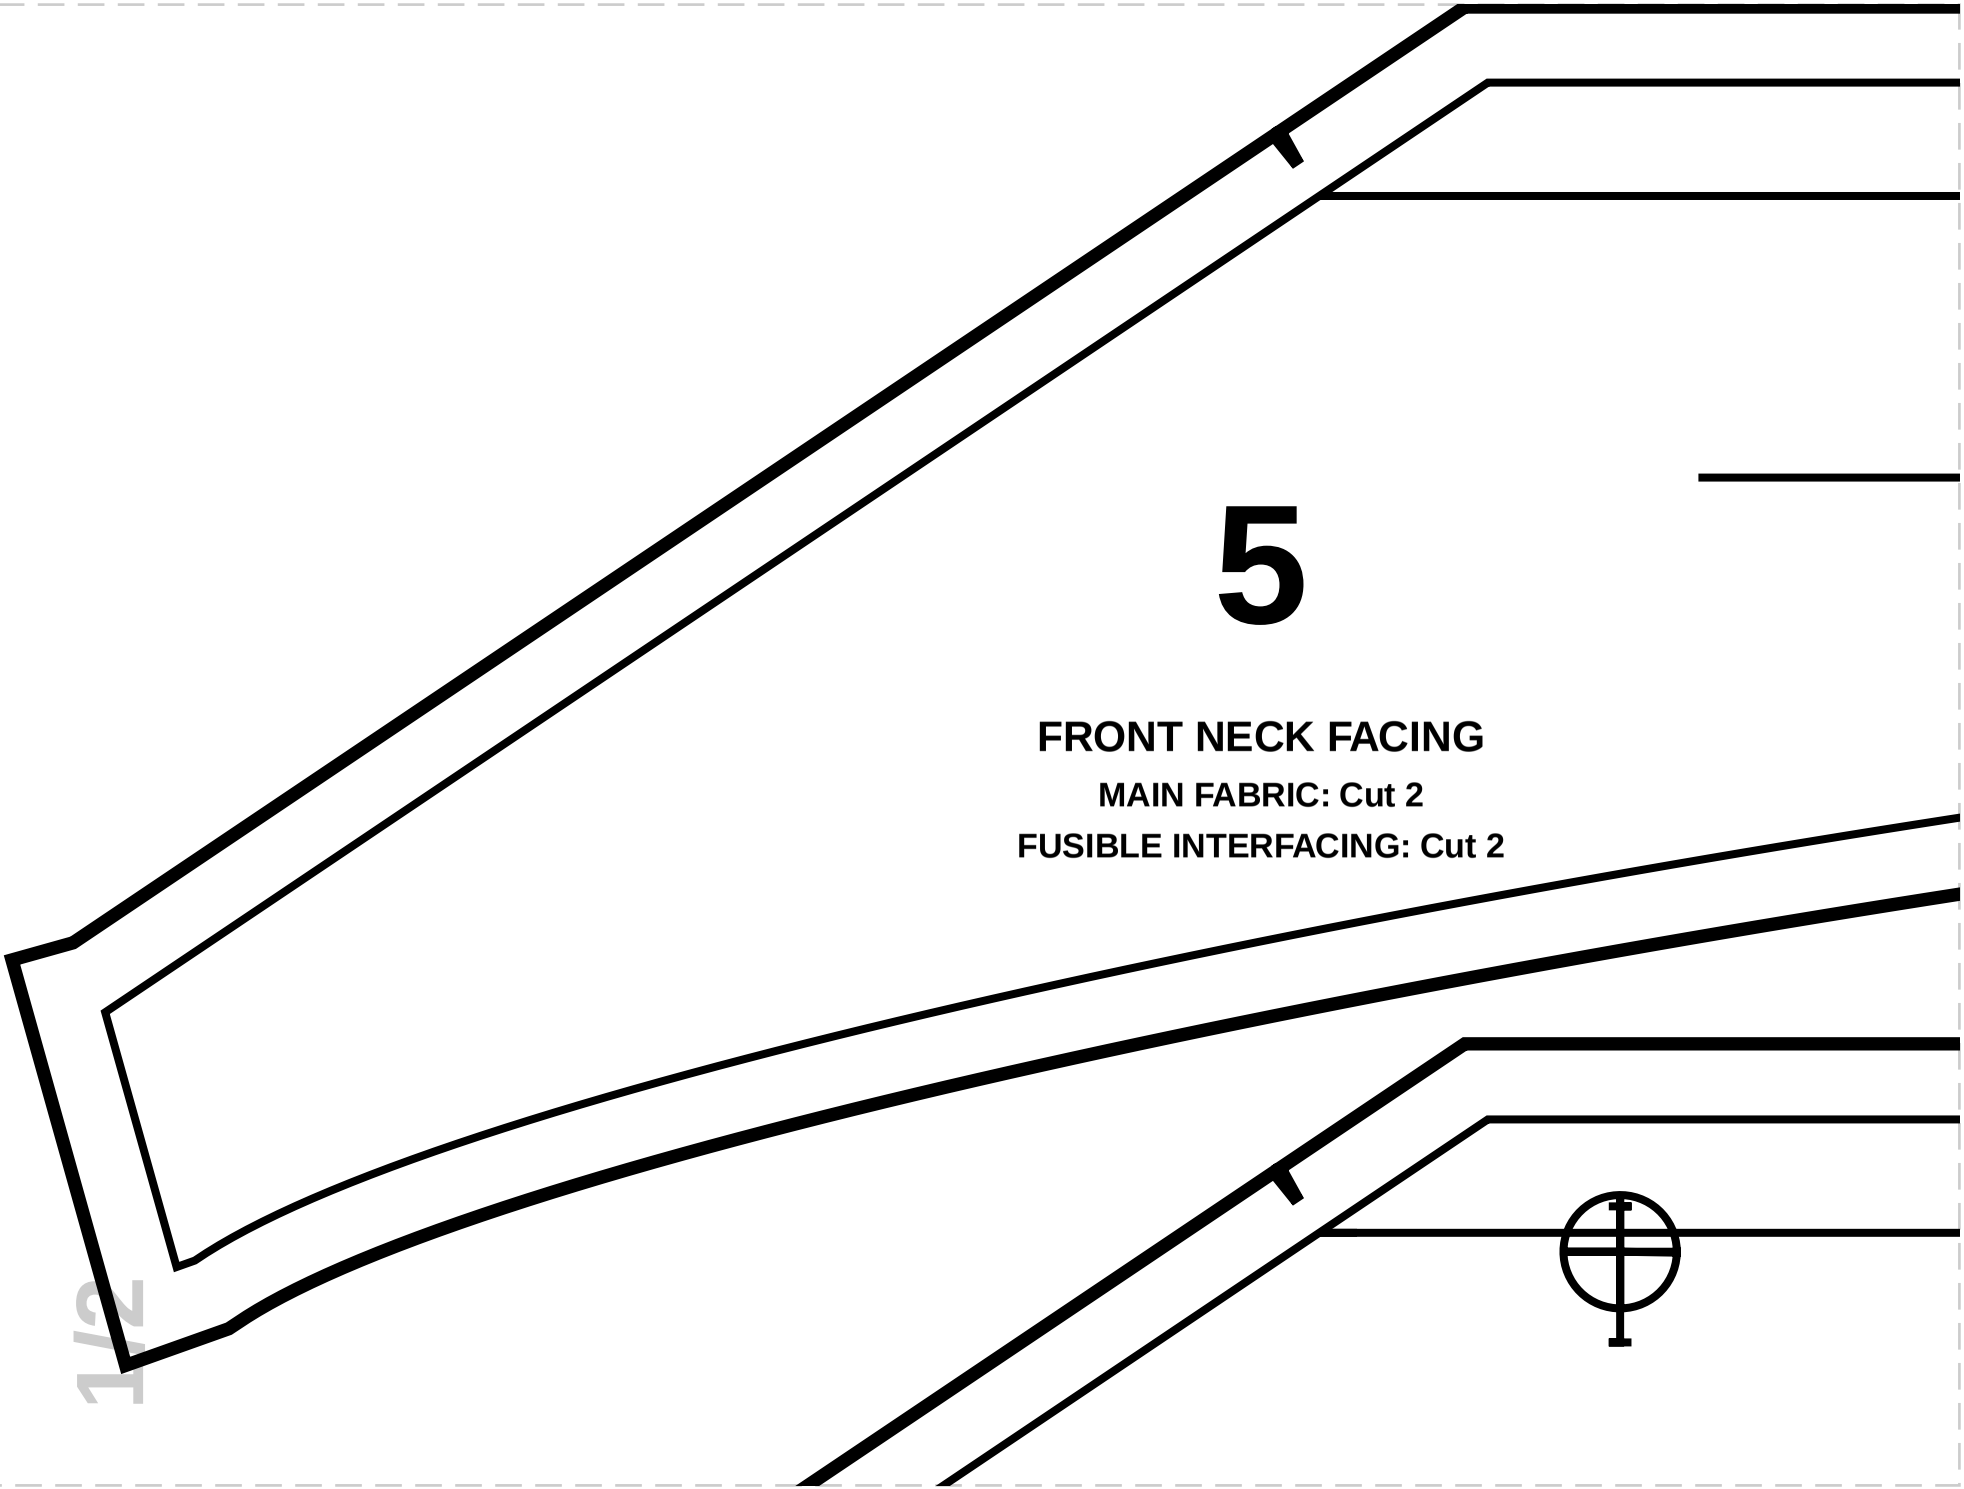


5


FRONT NECK FACING


MAIN FABRIC: Cut 2


FUSIBLE INTERFACING: Cut 2


2/1

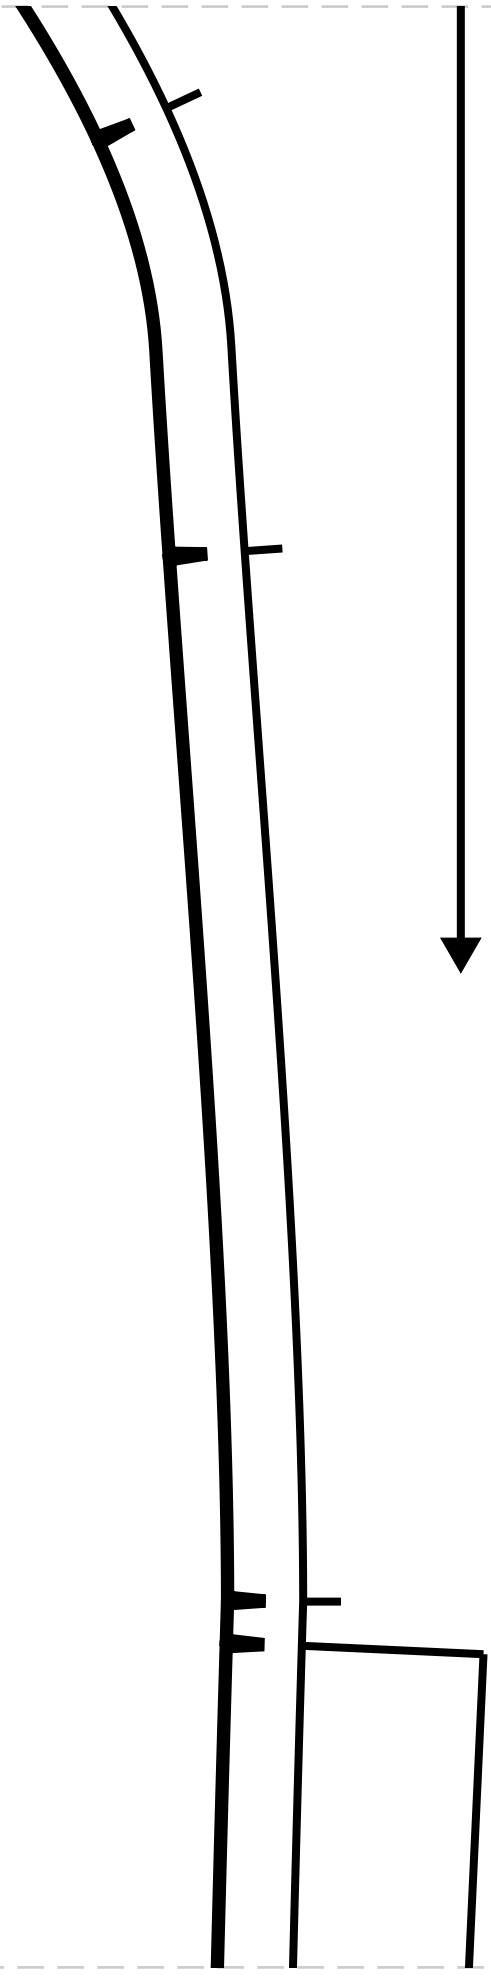

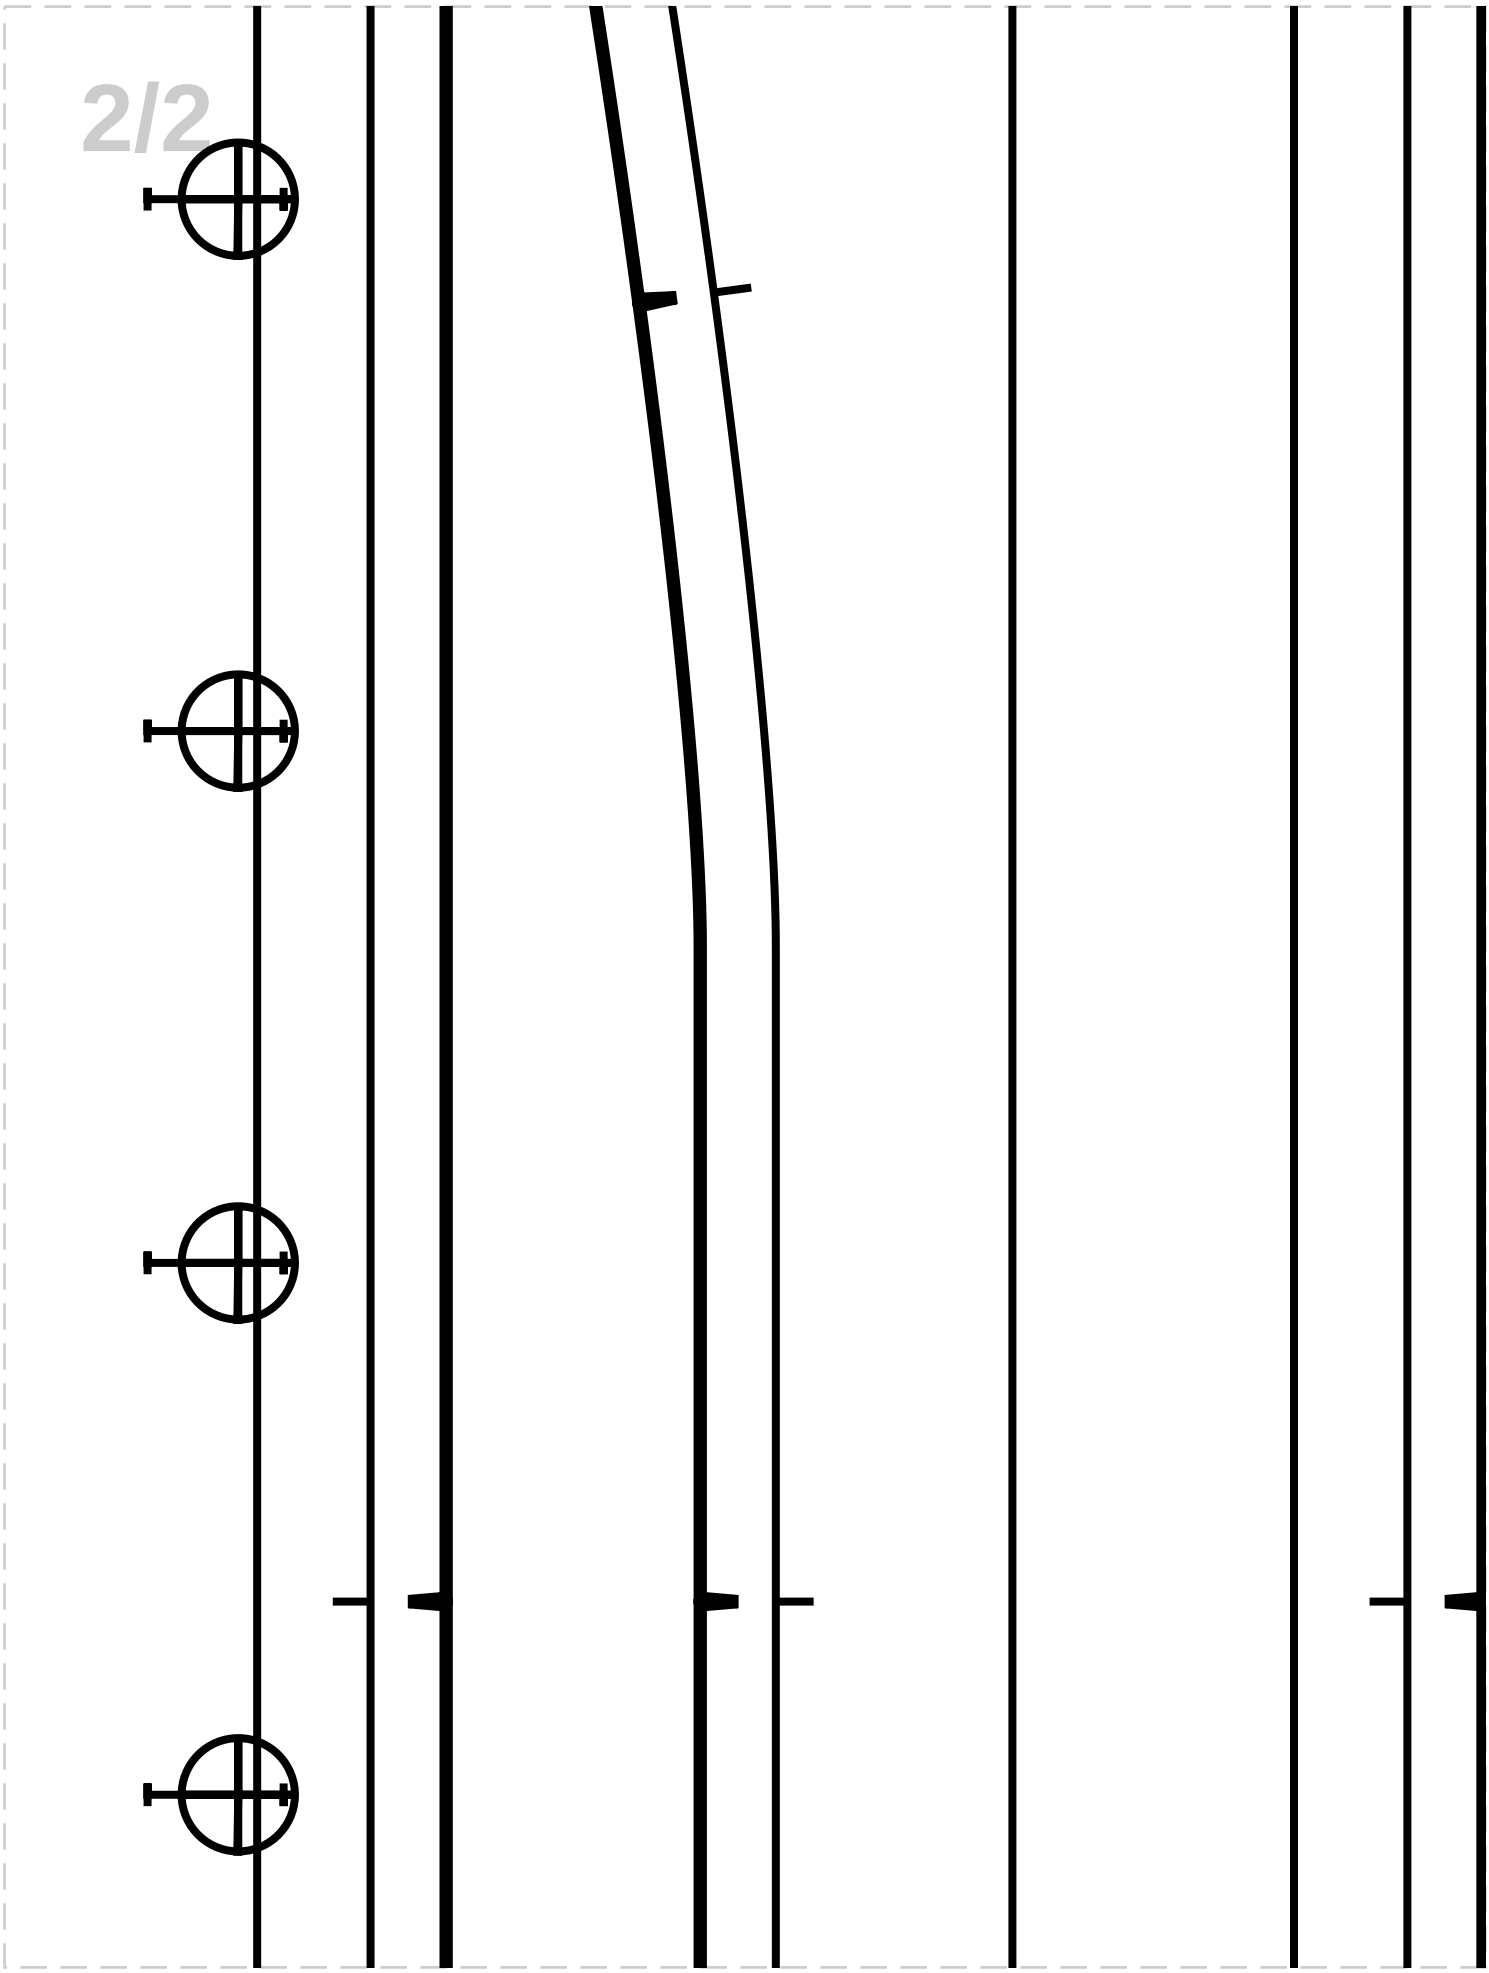

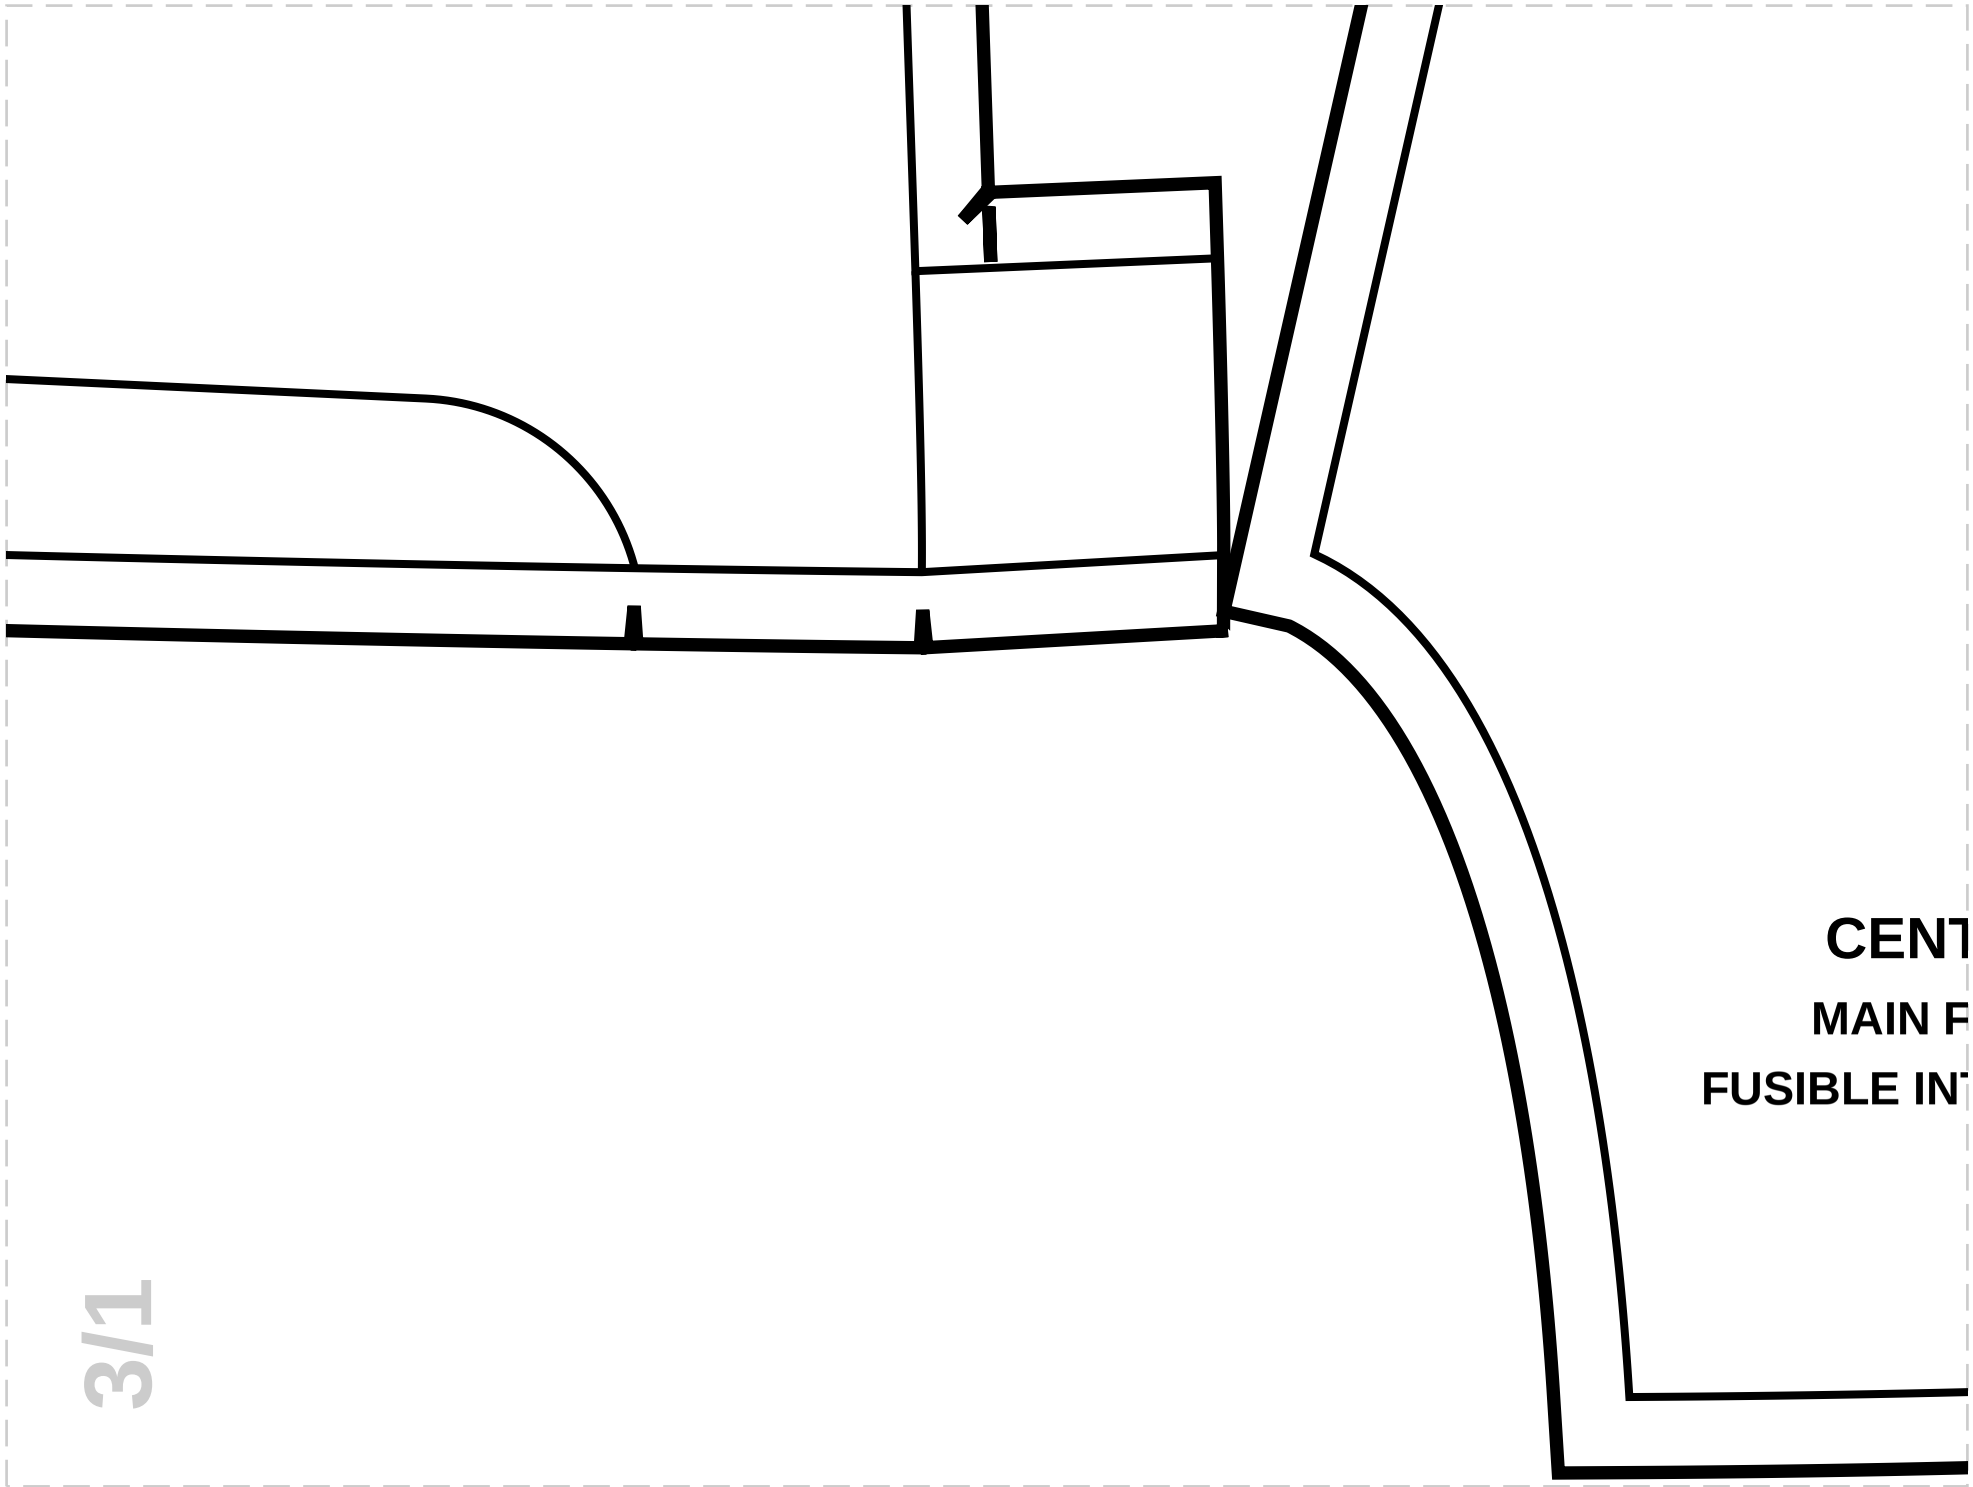
CENT
MAIN F
FUSIBLE IN

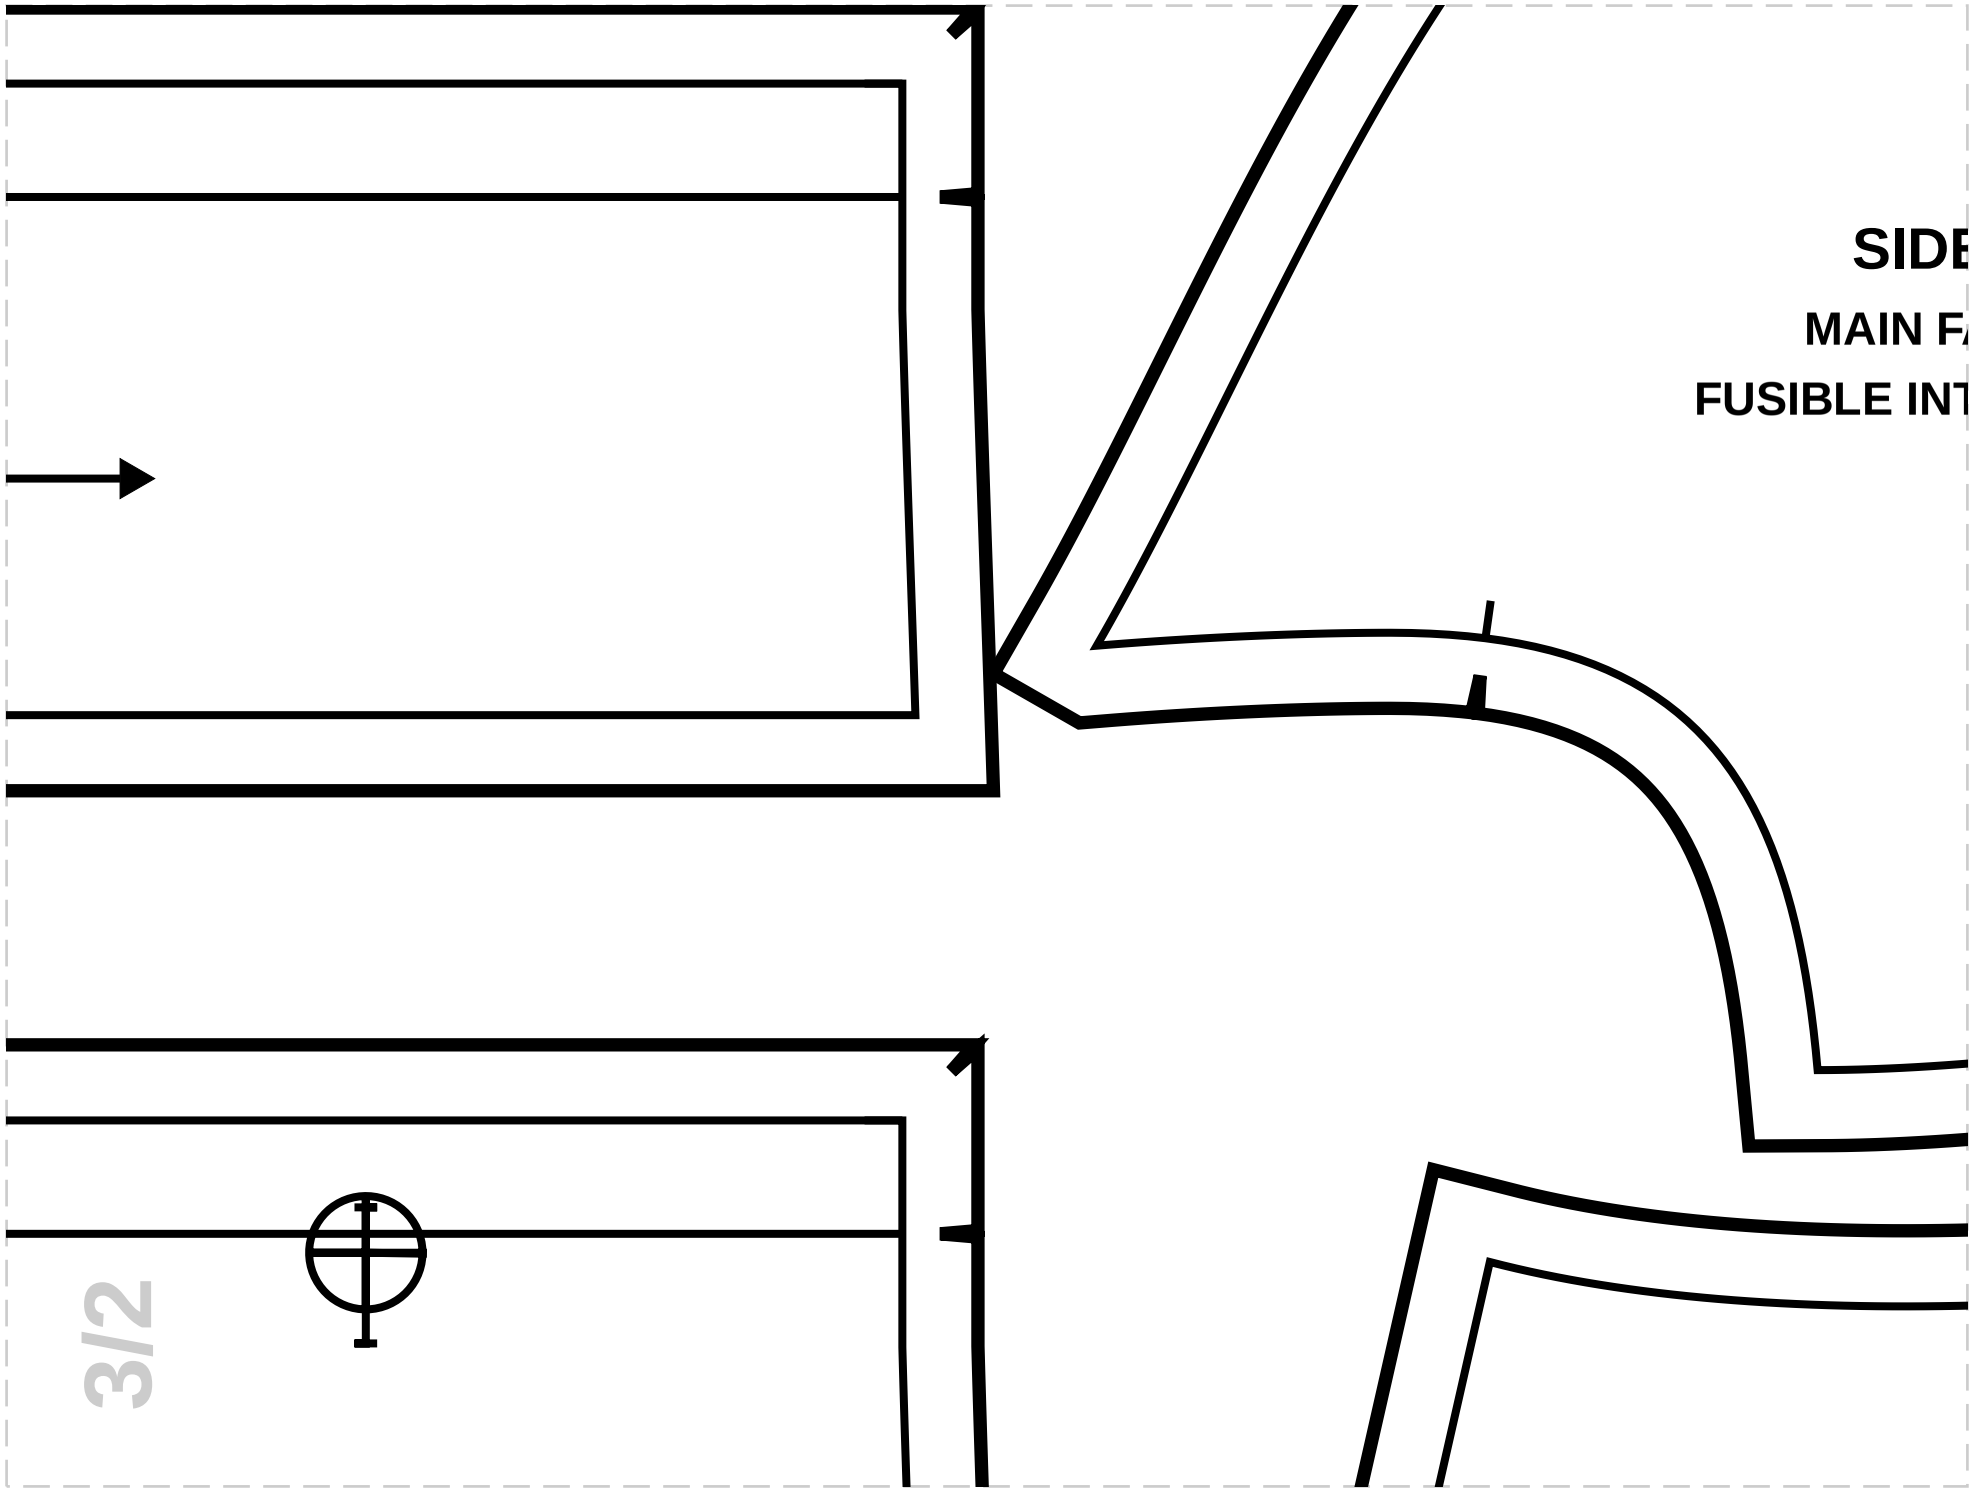
SIDE
MAIN F
FUSIBLE INT
3/2

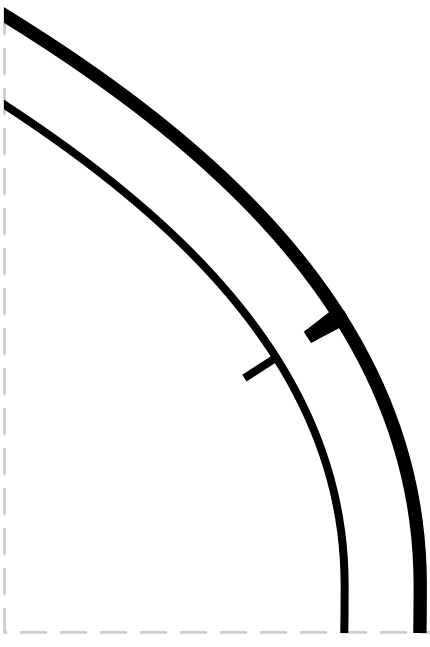

3

TER BACK

FABRIC: Cut 2


TERFACING: Cut 2


Z


E FRONT


ABRIC: Cut 2


TERFACING: Cut 2

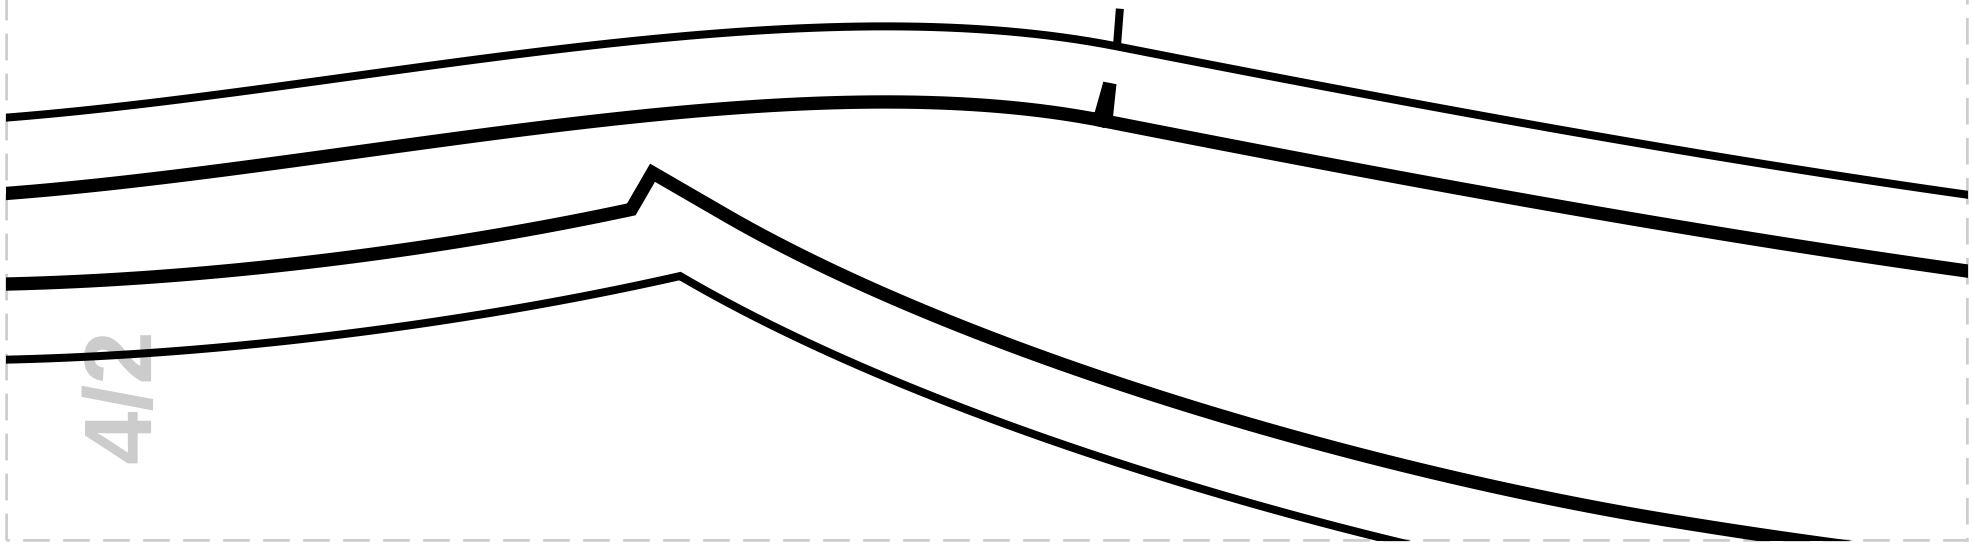

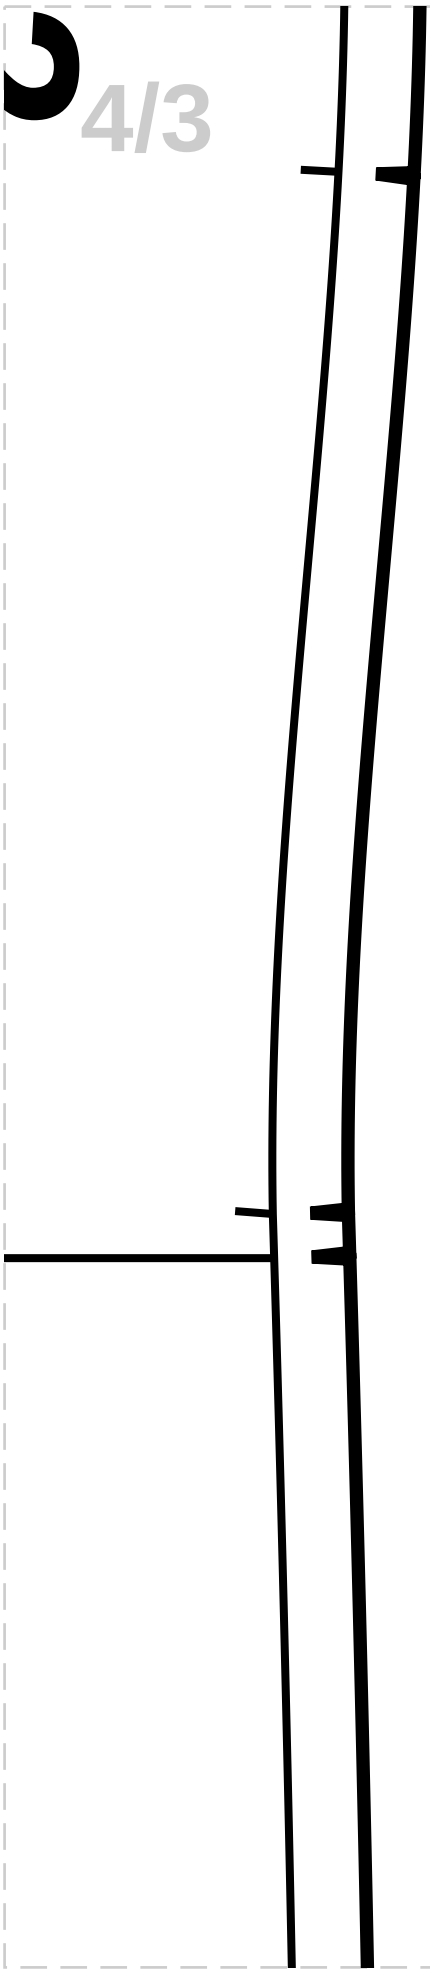
4/3

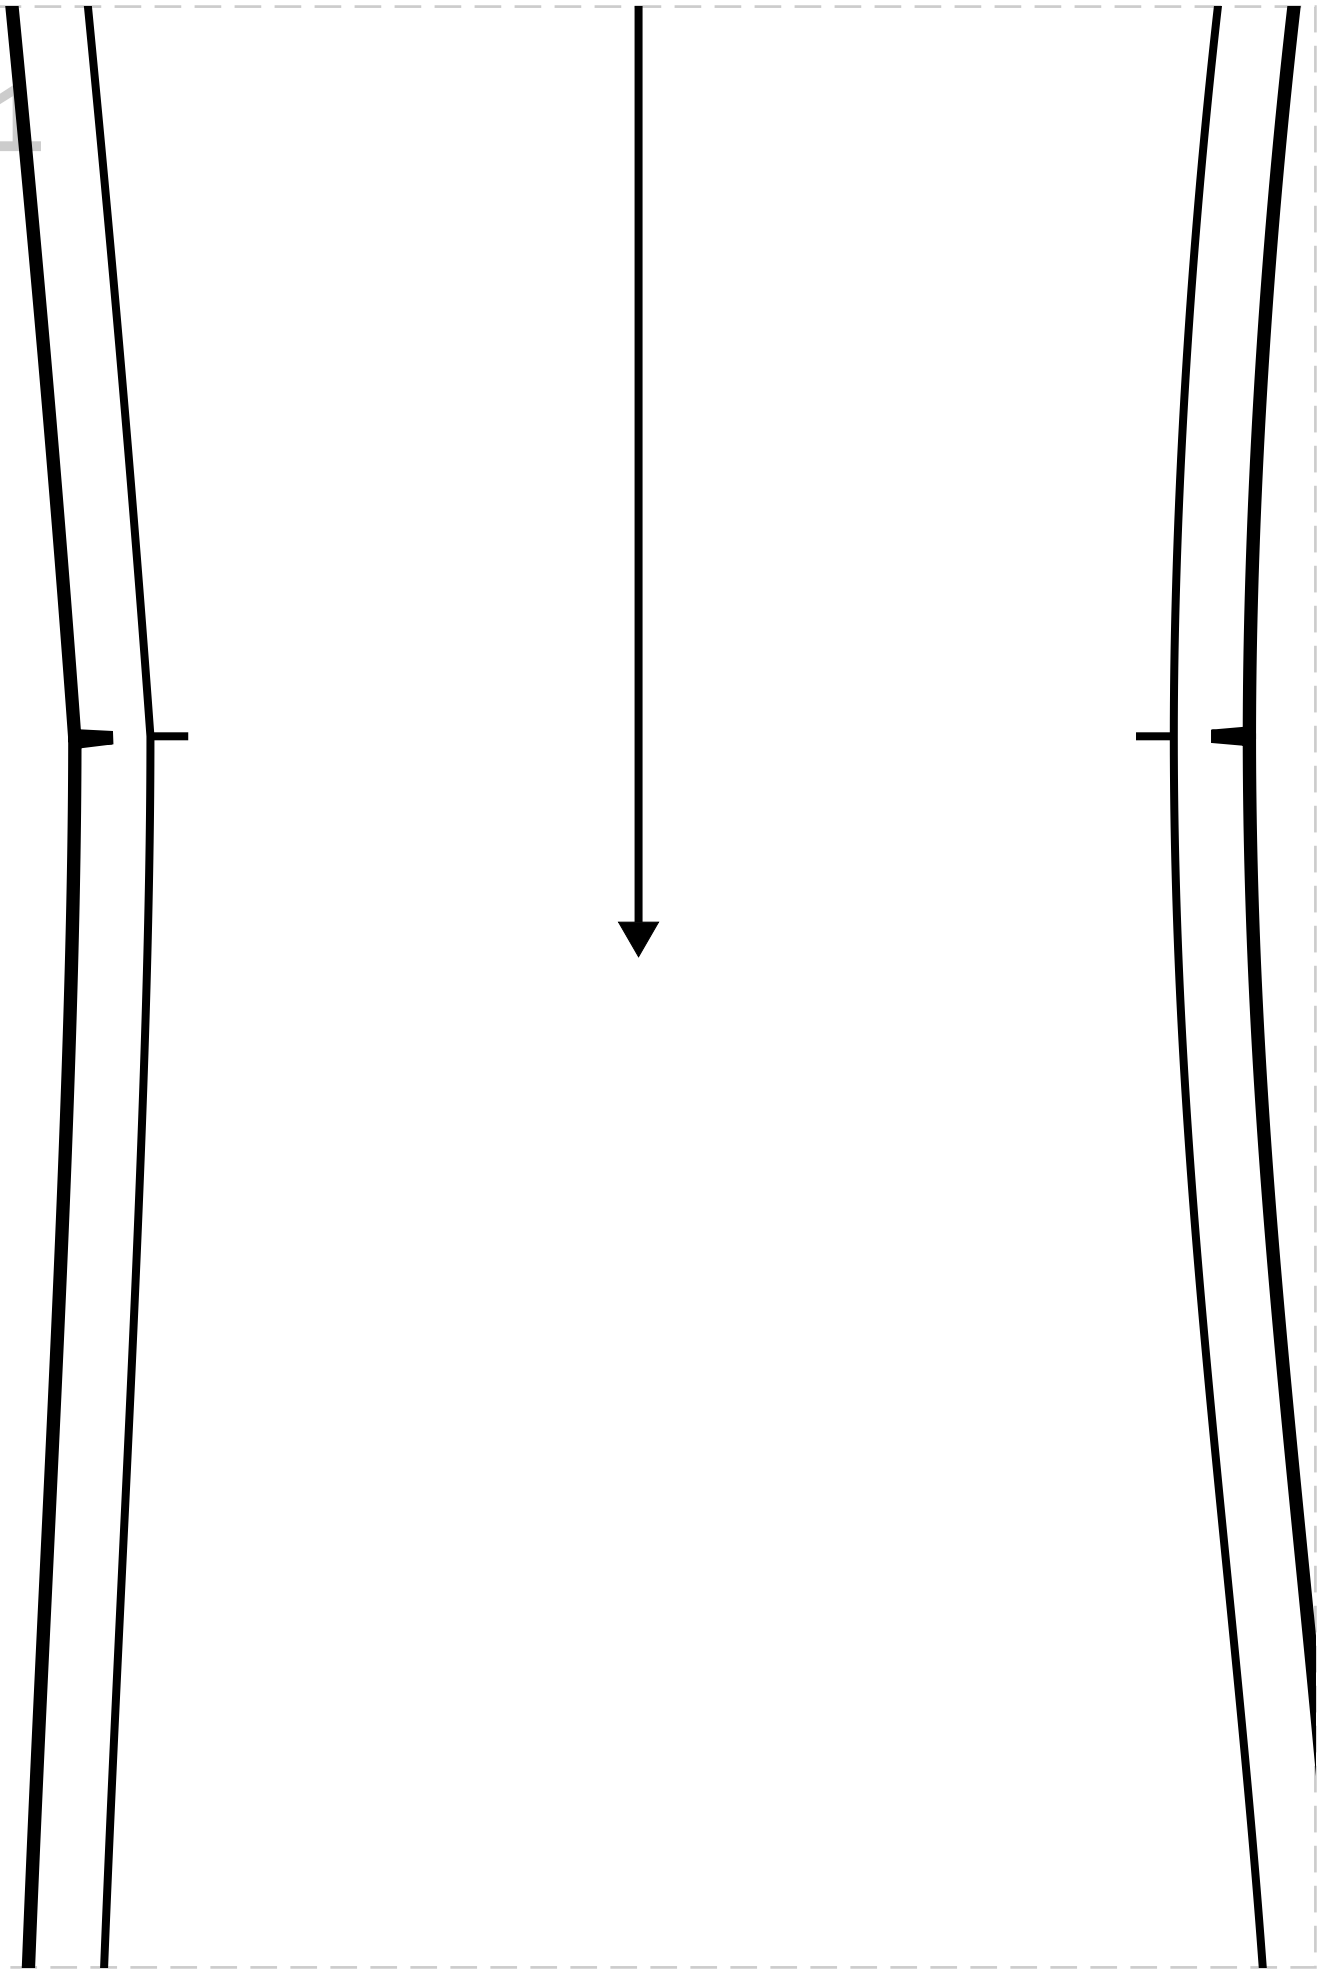

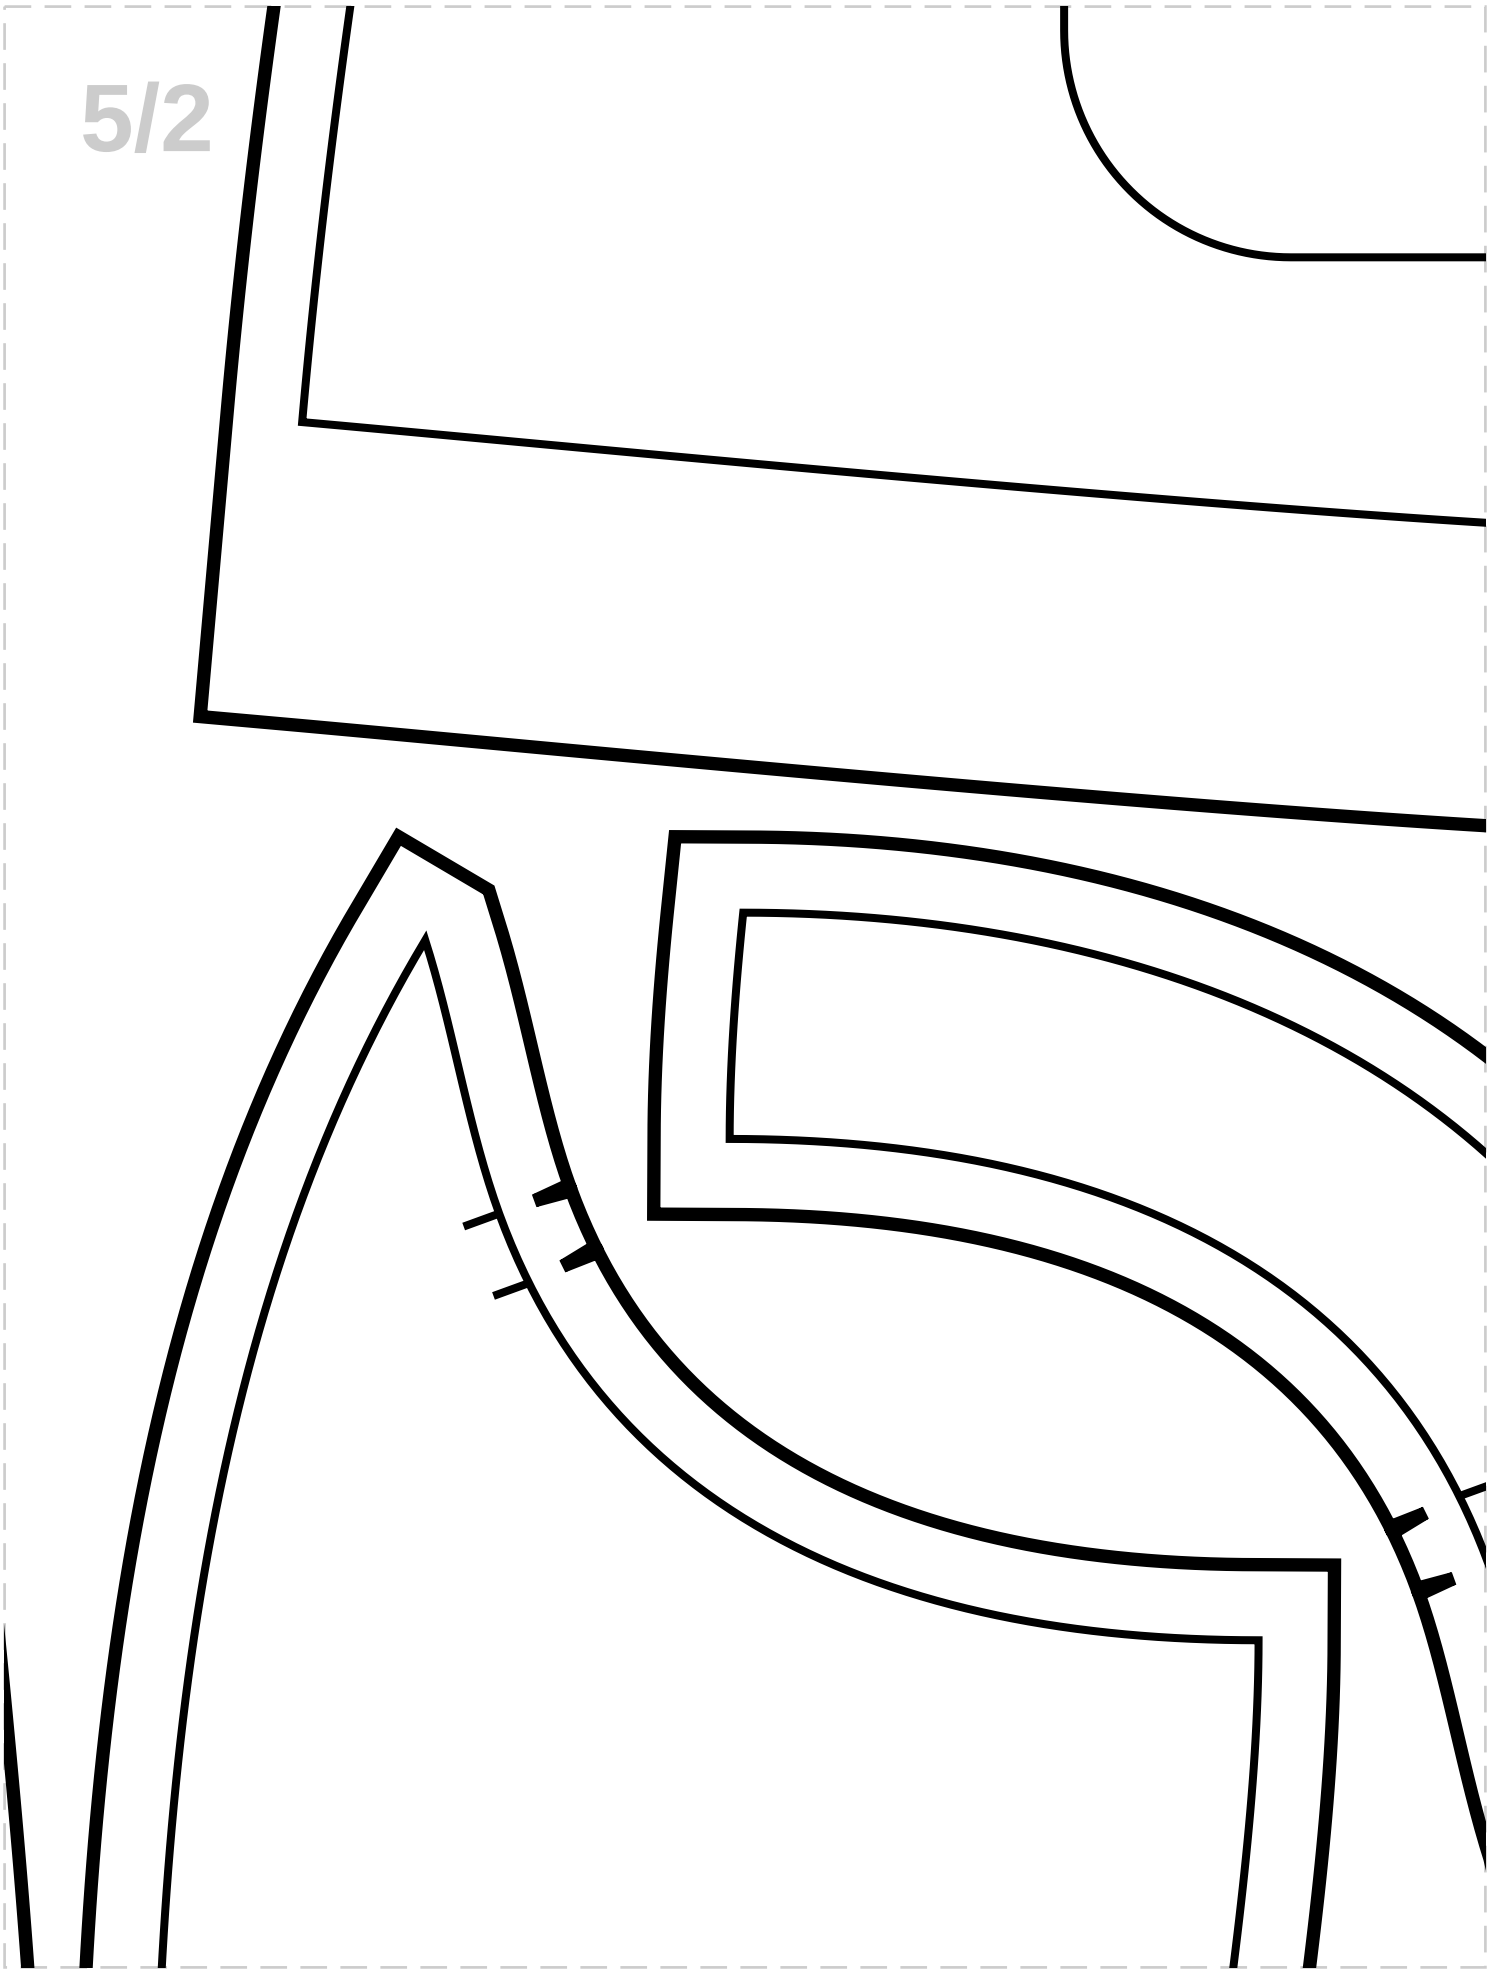

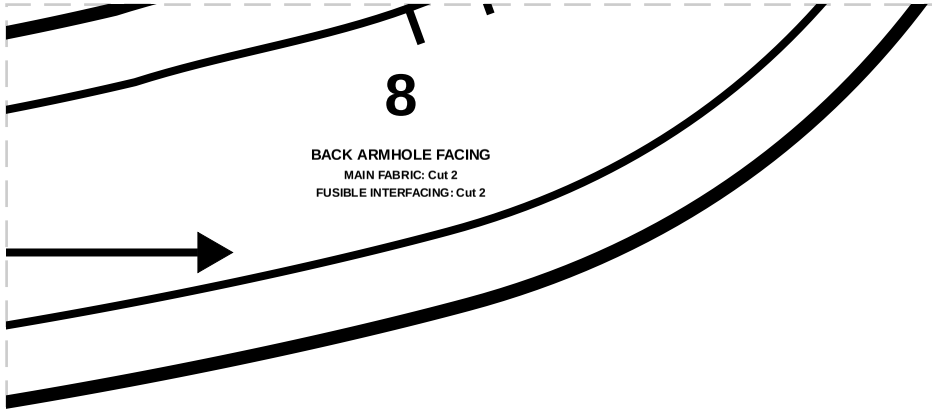



8


BACK ARMHOLE FACING

MAIN FABRIC: Cut 2

FUSIBLE INTERFACING: Cut 2

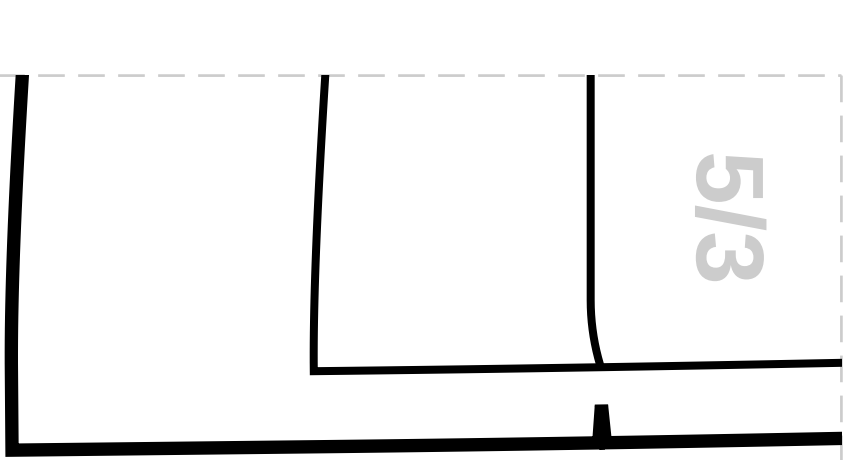

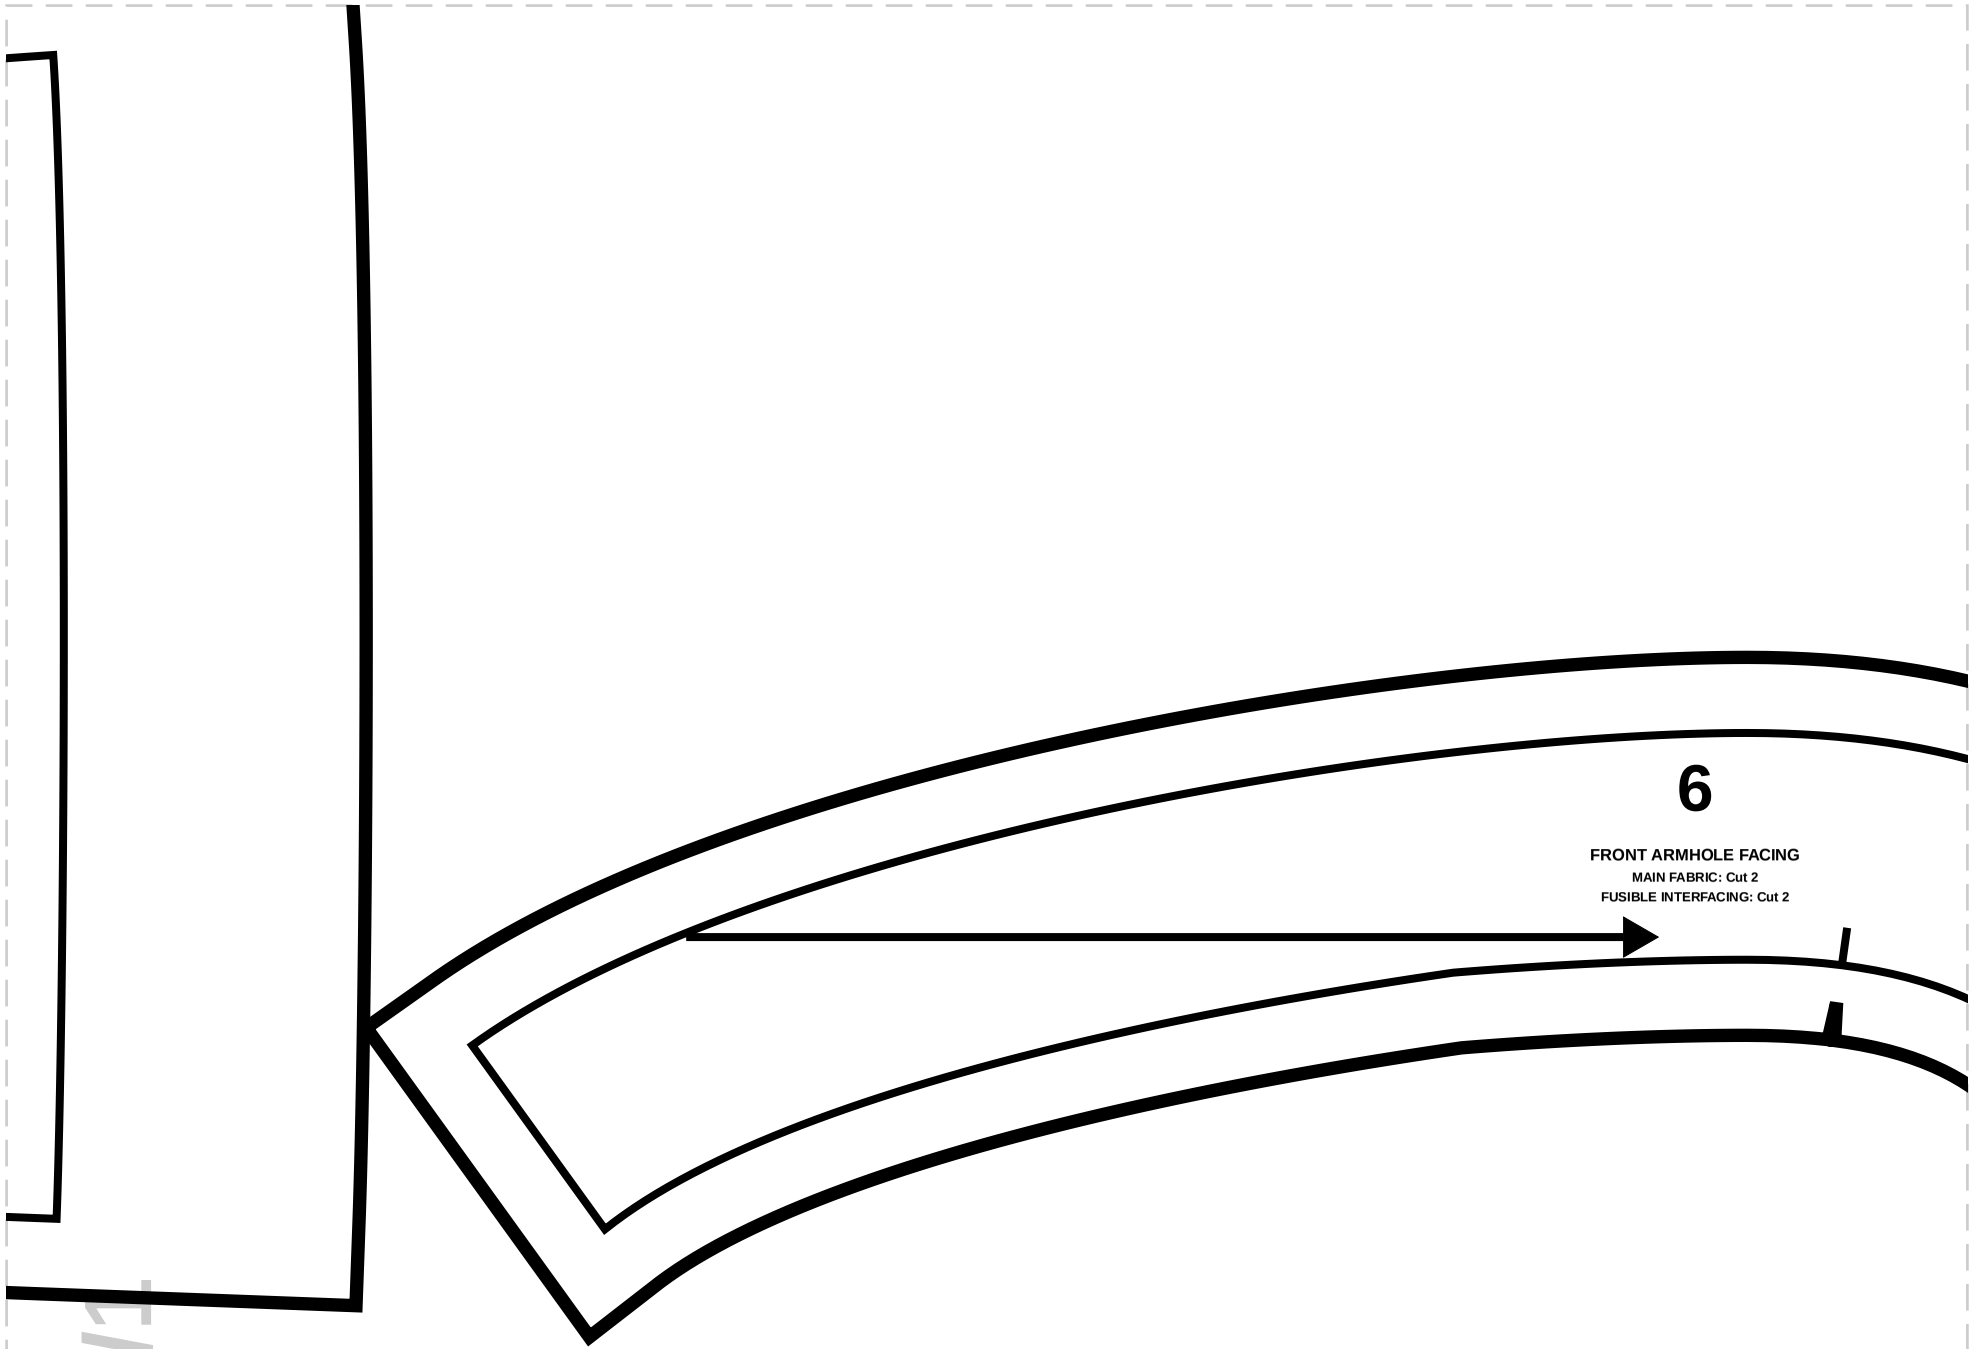
6
FRONT ARMHOLE FACING
MAIN FABRIC: Cut 2
FUSIBLE INTERFACING: Cut 2

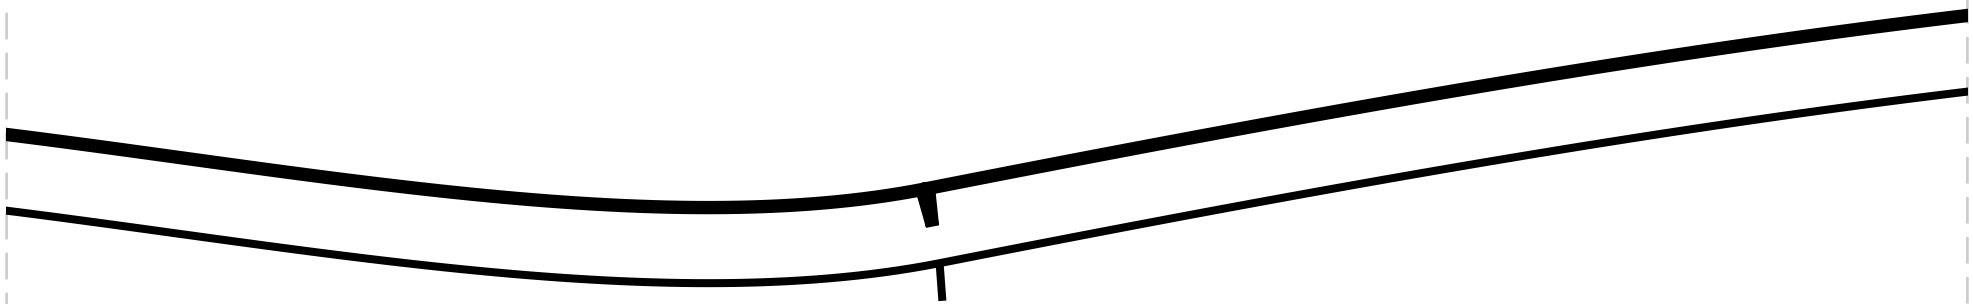


4


SIDE BACK


MAIN FABRIC: Cut 2

FUSIBLE INTERFACING: Cut 2



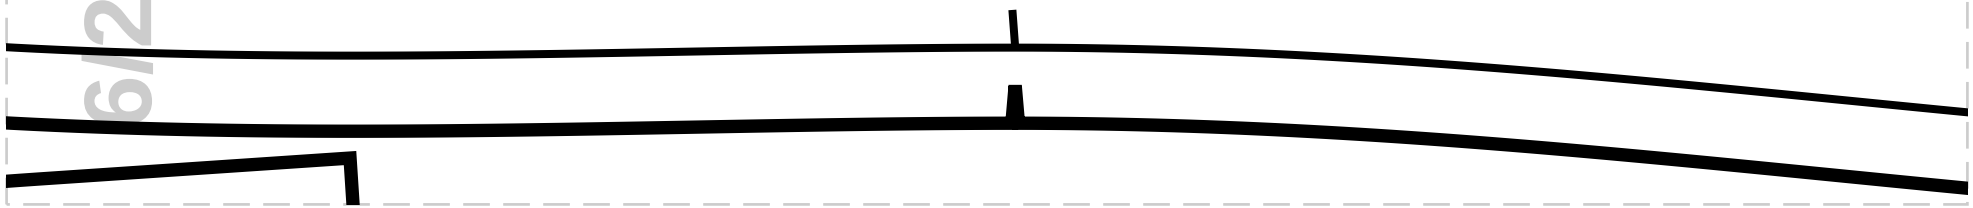

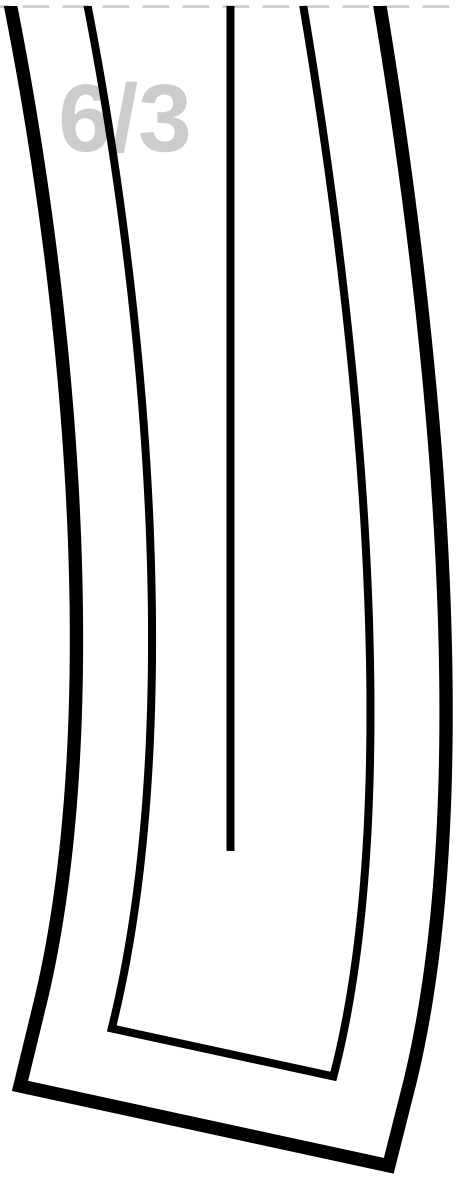

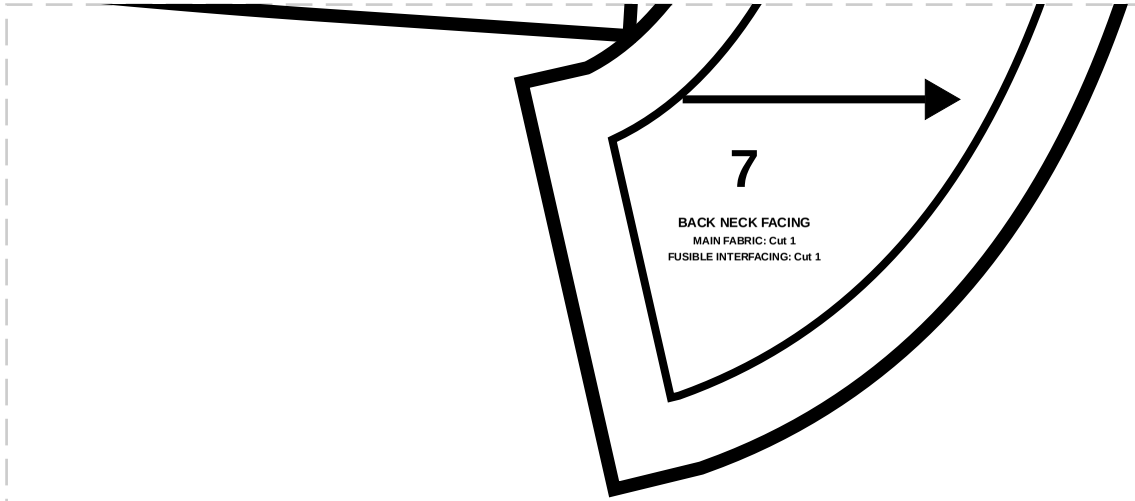


7


BACK NECK FACING

MAIN FABRIC: Cut 1

FUSIBLE INTERFACING: Cut 1

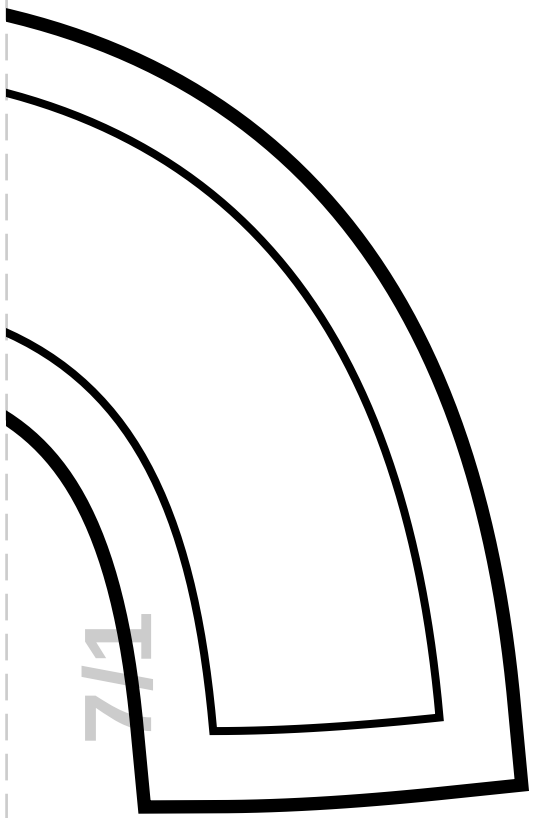


7/7

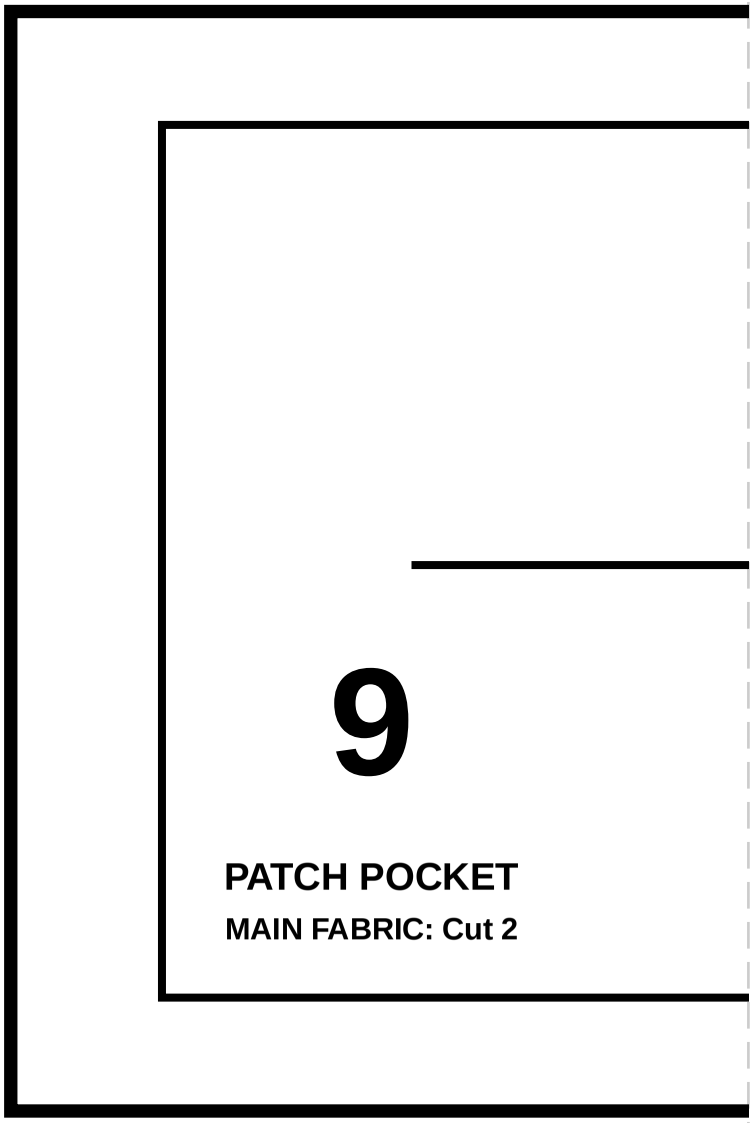


9


PATCH POCKET

MAIN FABRIC: Cut 2

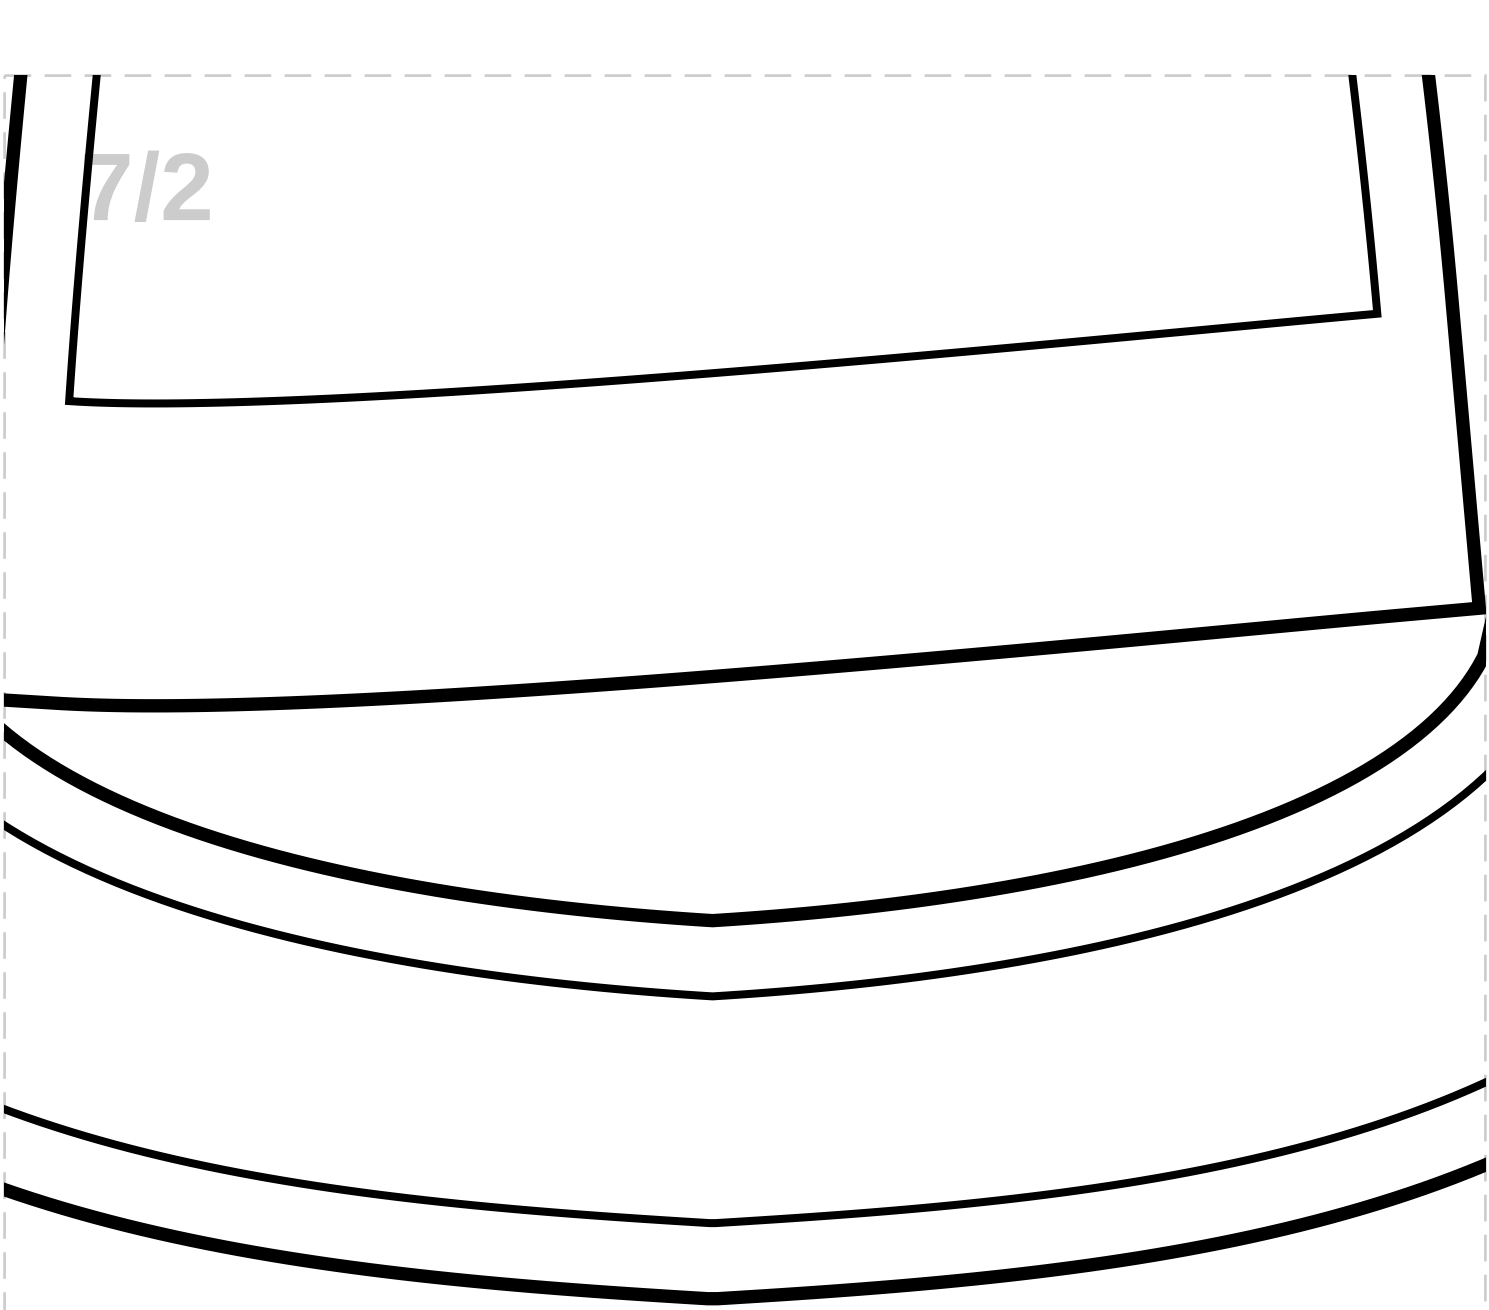

7/3

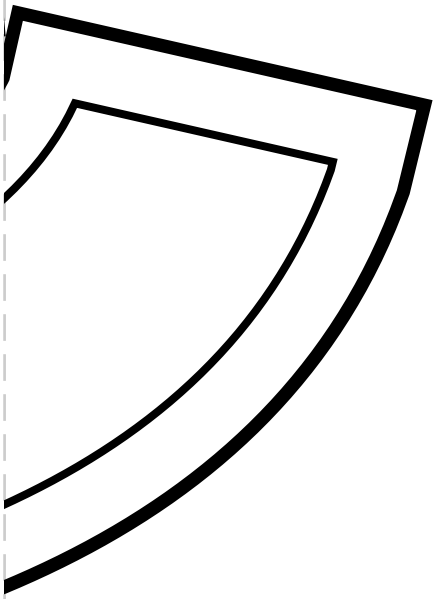

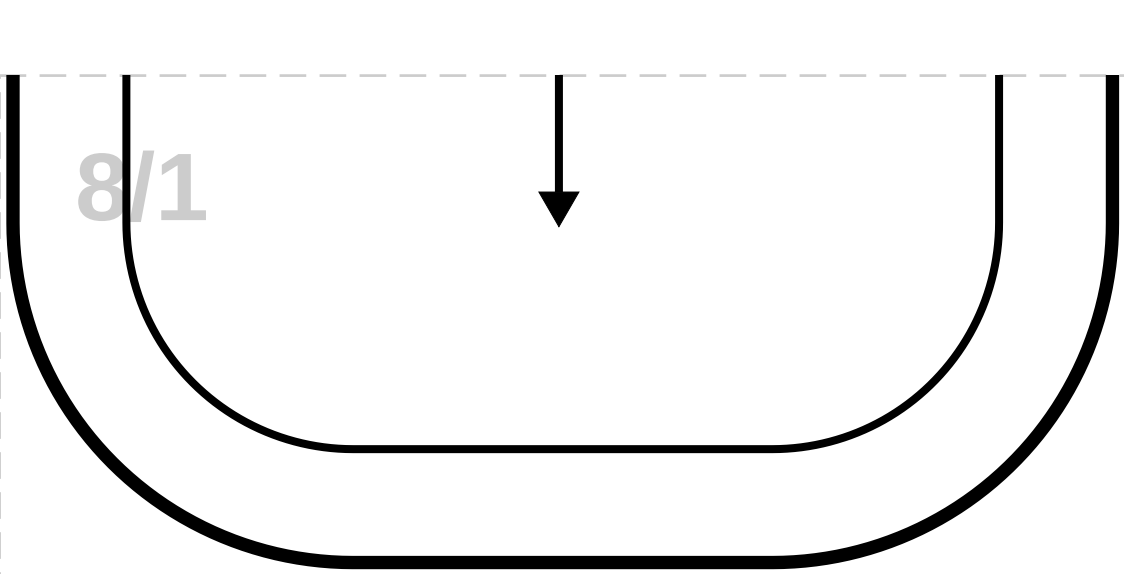

8/2

8/3