
cozysewpatterns

Print this Calibration Test page first!

Size: Height: 167.75, Bust: 124.25, Waist: 110.5, Hips: 130.75
SIZE 22

Notes

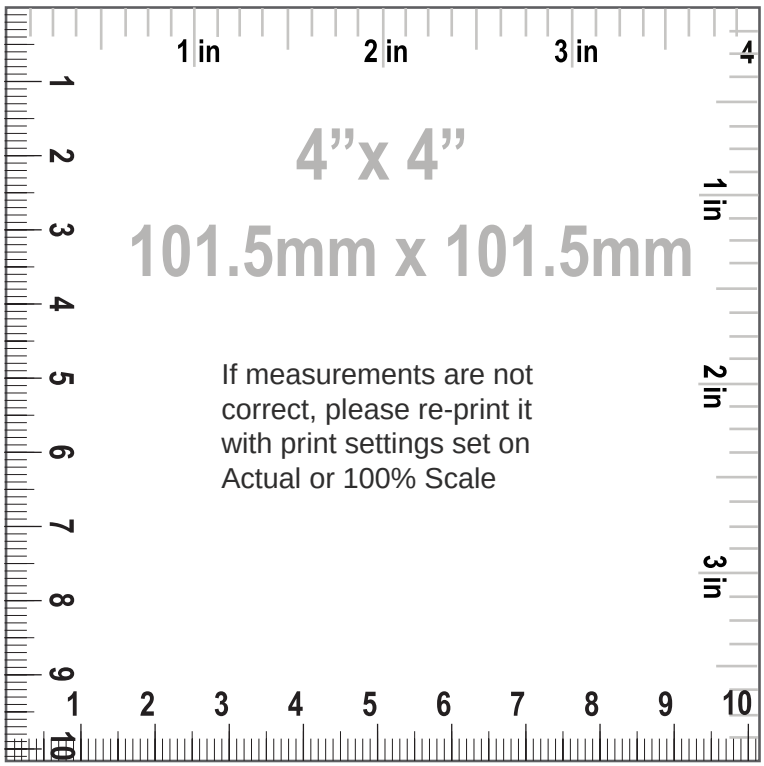

How to print

Printing

Once your Calibration Test Page has been printed, measure the 4”x 4” (10cm) scale box with a ruler. If the lengths match, you can confidently print your pattern. If the rulers do not match, set your print settings to 100% or Actual and retry.

Cutting

Your printouts will always have a dashed border to perfectly match your sheets. Cut off the right edge of each page. Be careful not to cut beyond the dashed mark, otherwise your patterns will not align accurately.

Tapping

Group each sheet by the second number marked on each pate i.e. in a group 1, there are: 1/1, 2/1, 3/1, 4/1, etc. In a group 2: 1/2, 2/2 etc. 2. Place page 1/1 on top of the page 2/1, overlapping the right side edge. Match corners and crosses and secure with a pin or tape. Then use a scotch tape to permanently attach the sheets together.

SIZE 22
Seam Allowance: 1 (3/8 in)

Pattern pieces:

1. "CENTER FRONT", MAIN FABRIC, FUSIBLE INTERFACING: Cut 2
2. "SIDE FRONT", MAIN FABRIC, FUSIBLE INTERFACING: Cut 2
3. "CENTER BACK", MAIN FABRIC, FUSIBLE INTERFACING: Cut 2
4. "SIDE BACK", MAIN FABRIC, FUSIBLE INTERFACING: Cut 2
5. "FRONT NECK FACING", MAIN FABRIC, FUSIBLE INTERFACING: Cut 2
6. "FRONT ARMHOLE FACING", MAIN FABRIC, FUSIBLE INTERFACING: Cut 2
7. "BACK NECK FACING", MAIN FABRIC, FUSIBLE INTERFACING: Cut 1
8. "BACK ARMHOLE FACING", MAIN FABRIC, FUSIBLE INTERFACING: Cut 2
9. "PATCH POCKET", MAIN FABRIC: Cut 2


Pattern Specs (Circumferences are divided by 2):

1. Hem max 3.00 none (1 1/8 in)
2. Seam allowance max 2.00 none (3/4 in)
3. Seam allowance p max 1.50 none (5/8 in)
4. Stretch factor 1.00 none (3/8 in)
5. Shoulder pads thickness 1.00 none (3/8 in)
6. Pocket entry length 12.39 cm (4 7/8 in)
7. Waist to pocket length 2.60 cm (1 in)
8. Side seam pocket position 11.42 cm (4 1/2 in)
9. Button diameter 1.50 cm (5/8 in)
10. Front buttons quantity 6.00 pc
11. Front length from HPS to hem 64.97 cm (25 5/8 in)
12. Across chest 70.79 cm (27 7/8 in)
13. Center front length to hem 45.26 cm (17 7/8 in)
14. Center back length to hem 59.35 cm (23 3/8 in)
15. Across front 48.46 cm (19 1/8 in)
16. Across back 45.49 cm (17 7/8 in)
17. Across shoulders 44.13 cm (17 3/8 in)
18. Side seam 33.73 cm (13 1/4 in)
19. Waist 63.07 cm (24 7/8 in)
20. Low hips 74.55 cm (29 3/8 in)

21. Blazer hemline sweep 73.09 cm (28 3/4 in)
22. Armhole length 61.17 cm (24 1/8 in)
23. Neck opening 22.75 cm (9 in)
24. Front neck drop 17.40 cm (6 7/8 in)
25. Back neck drop 4.25 cm (1 5/8 in)
26. Shoulder width 13.77 cm (5 3/8 in)
27. Apex to apex 25.85 cm (10 1/8 in)
28. Seam allowance poc max 3.00 none (1 1/8 in)
29. Hem poc max 6.00 none (2 3/8 in)
30. Pocket height 13.63 cm (5 3/8 in)

cozysewpatterns

Paper Size: LETTER;
Print Actual Size (100% Scale);

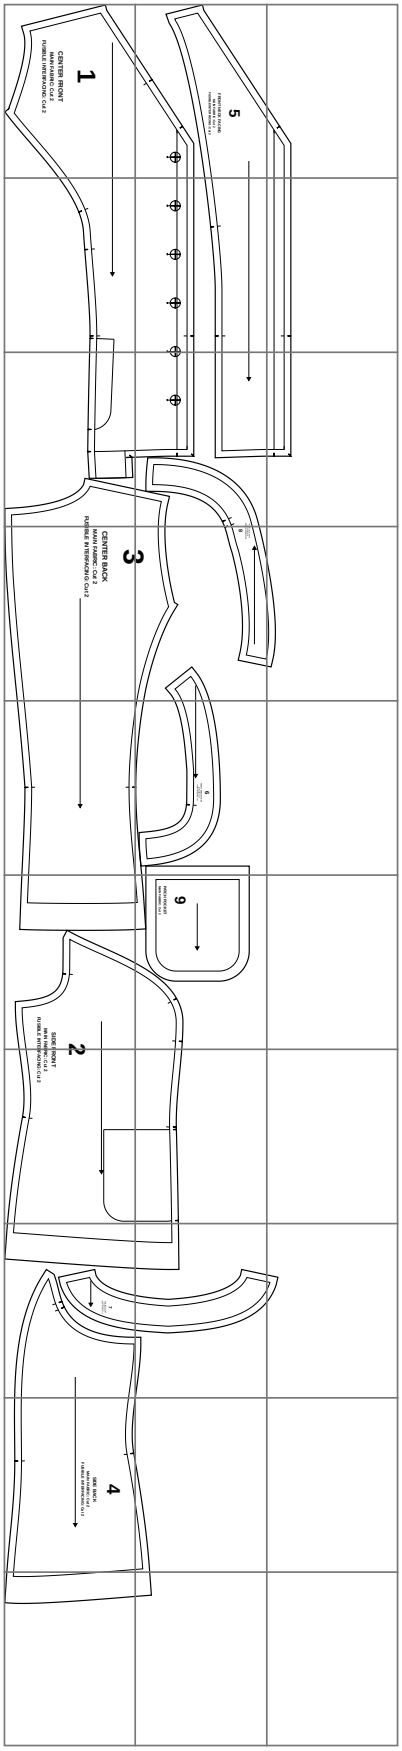

1

CENTER FRONT

MAIN FABRIC: Cut 2


FUSIBLE INTERFACING: Cut 2

5


FRONT NECK FACING

MAIN FABRIC: Cut 2


FUSIBLE INTERFACING: Cut 2

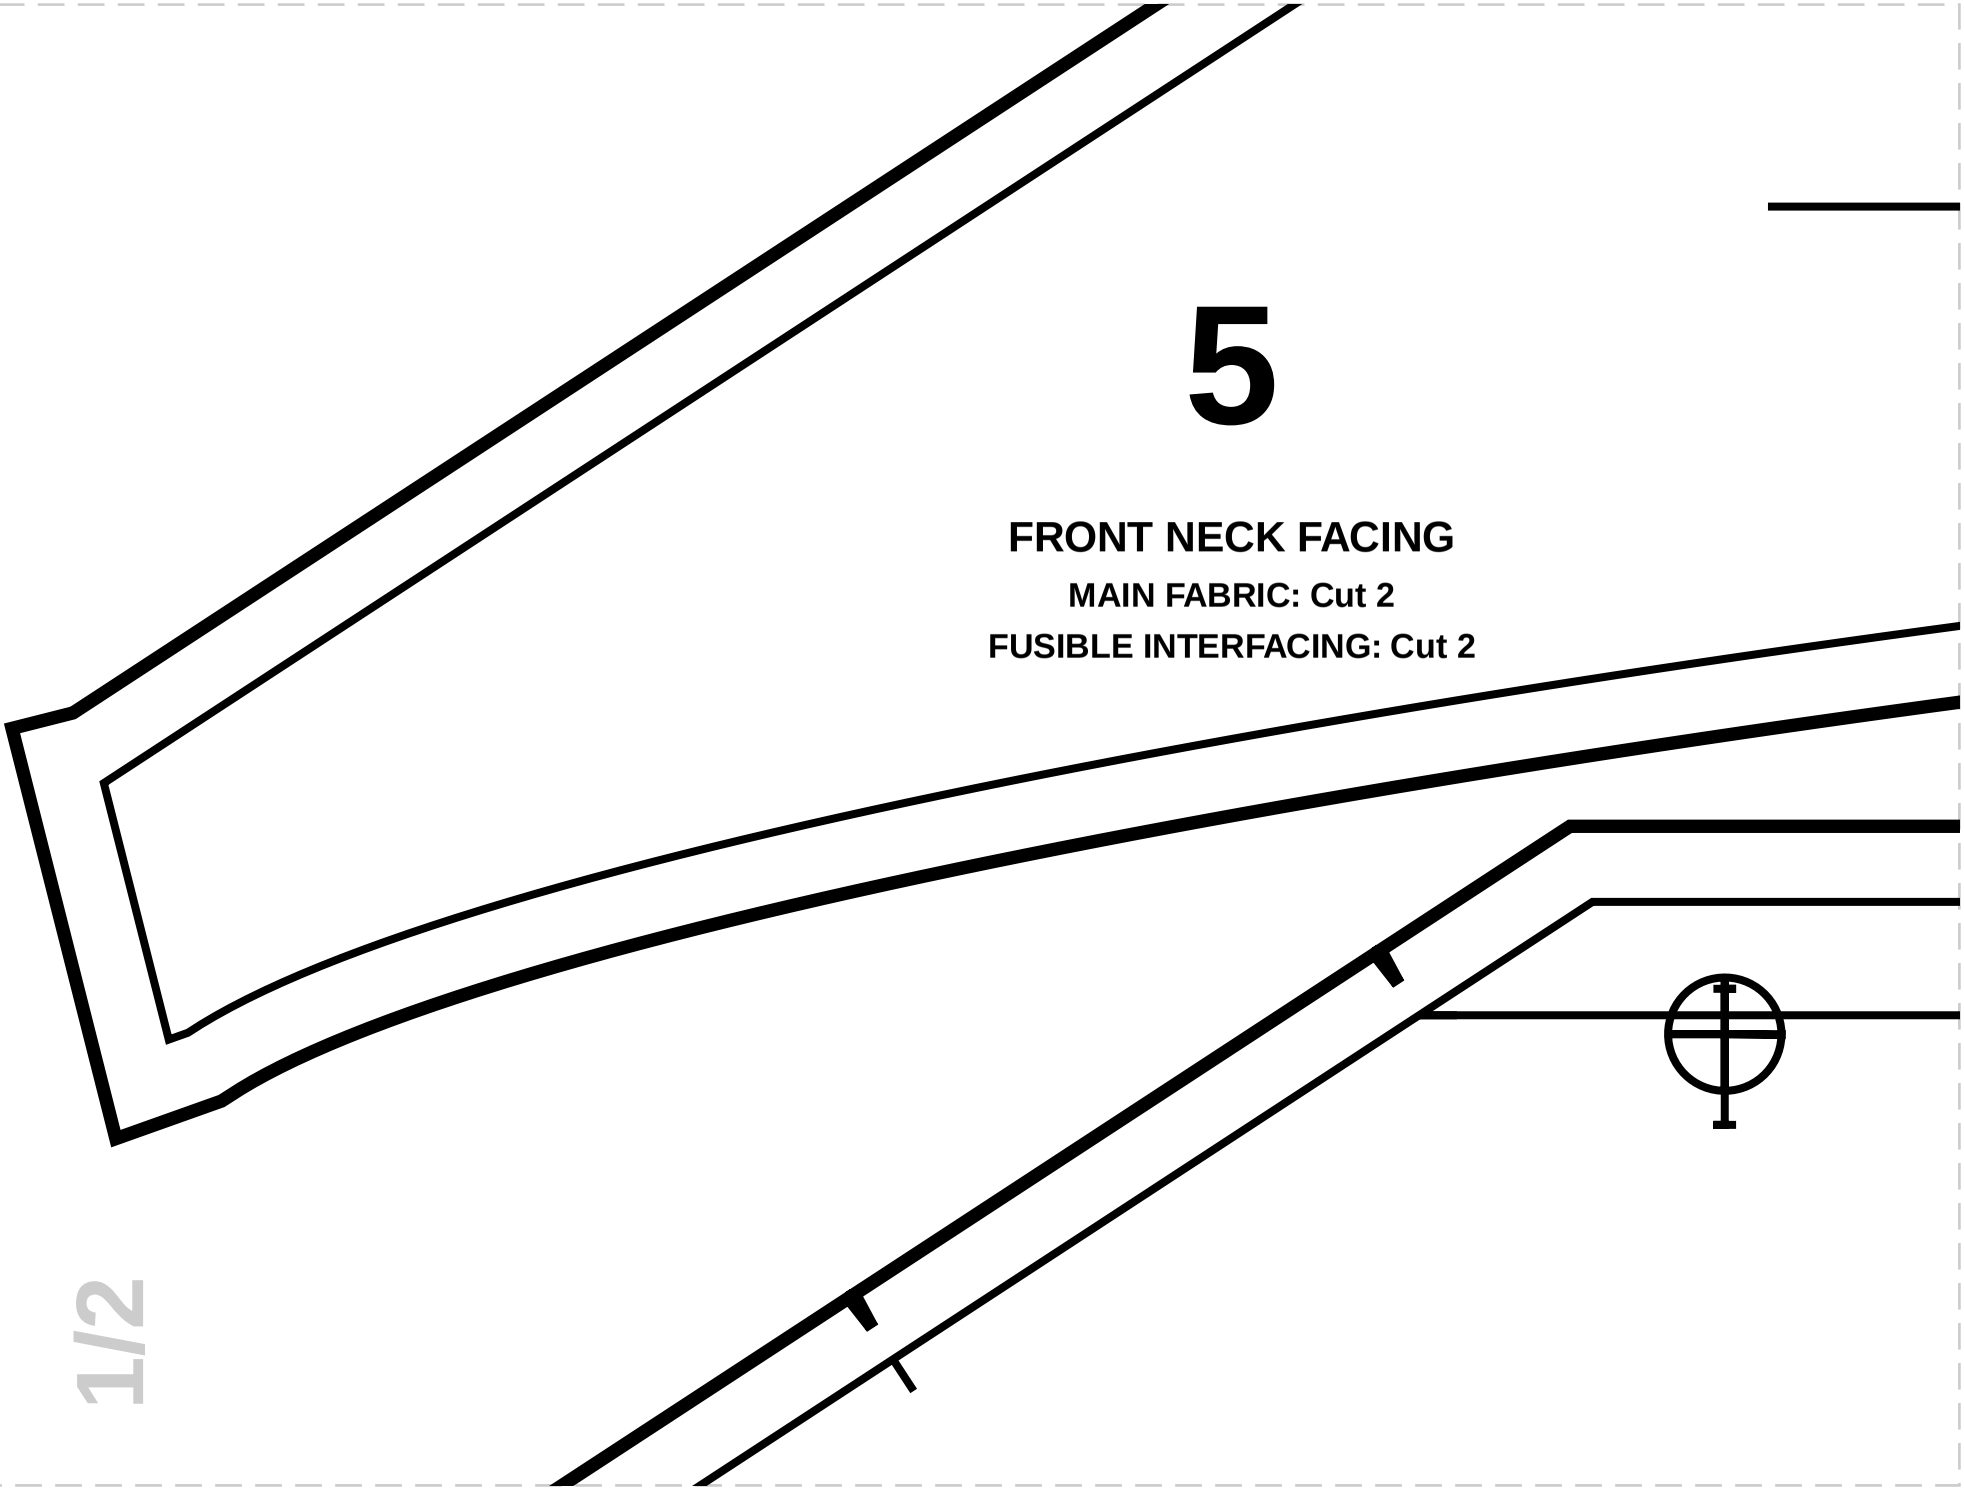



1/2

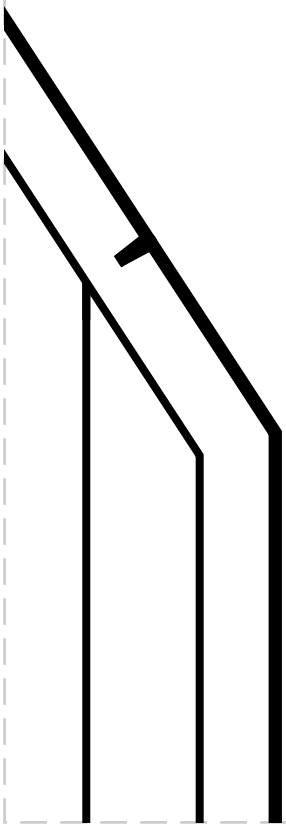



2/1

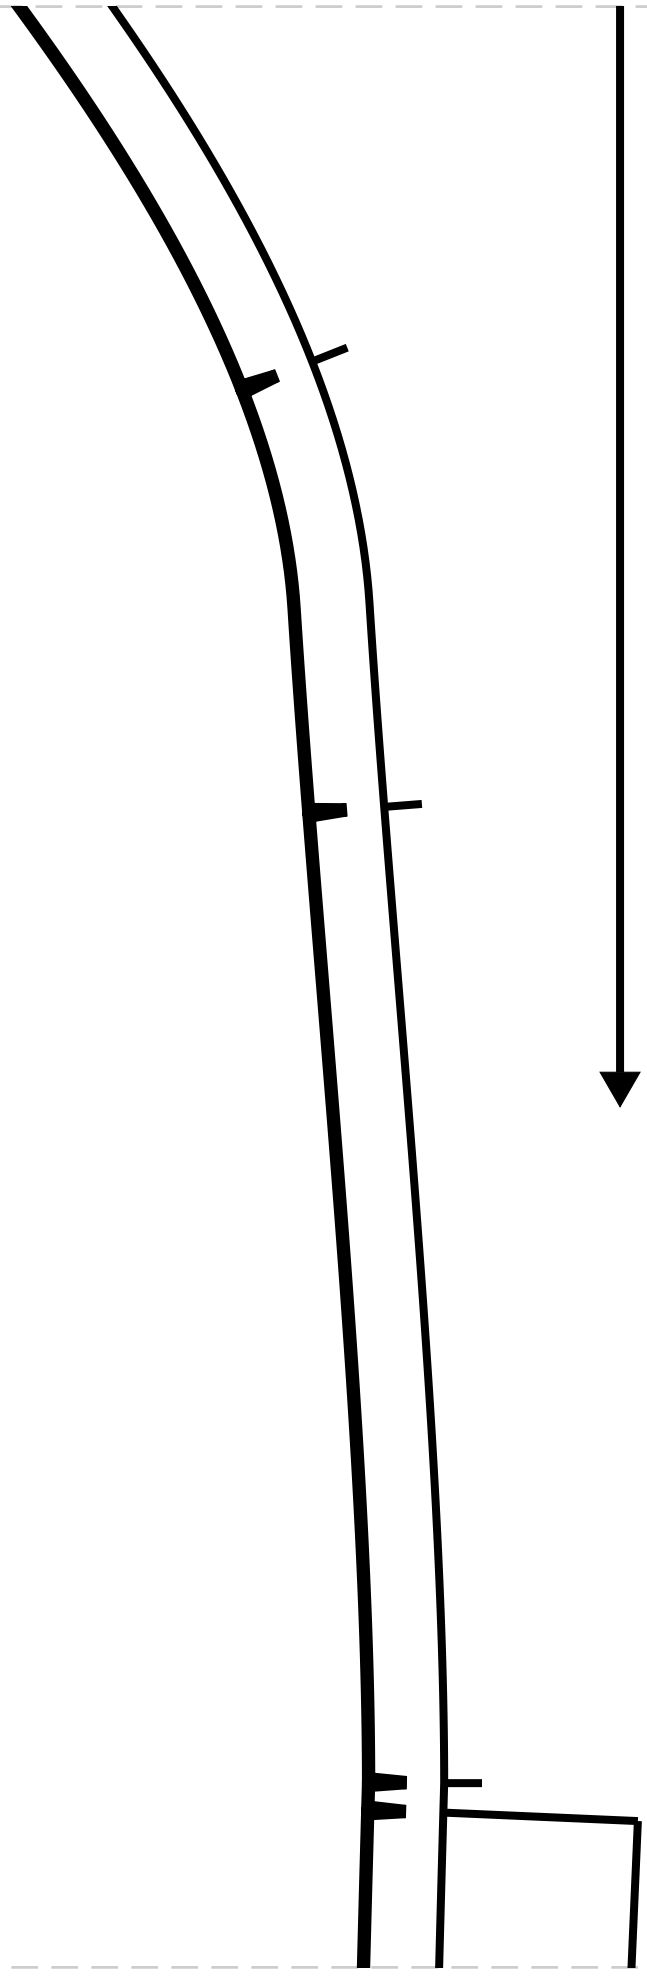


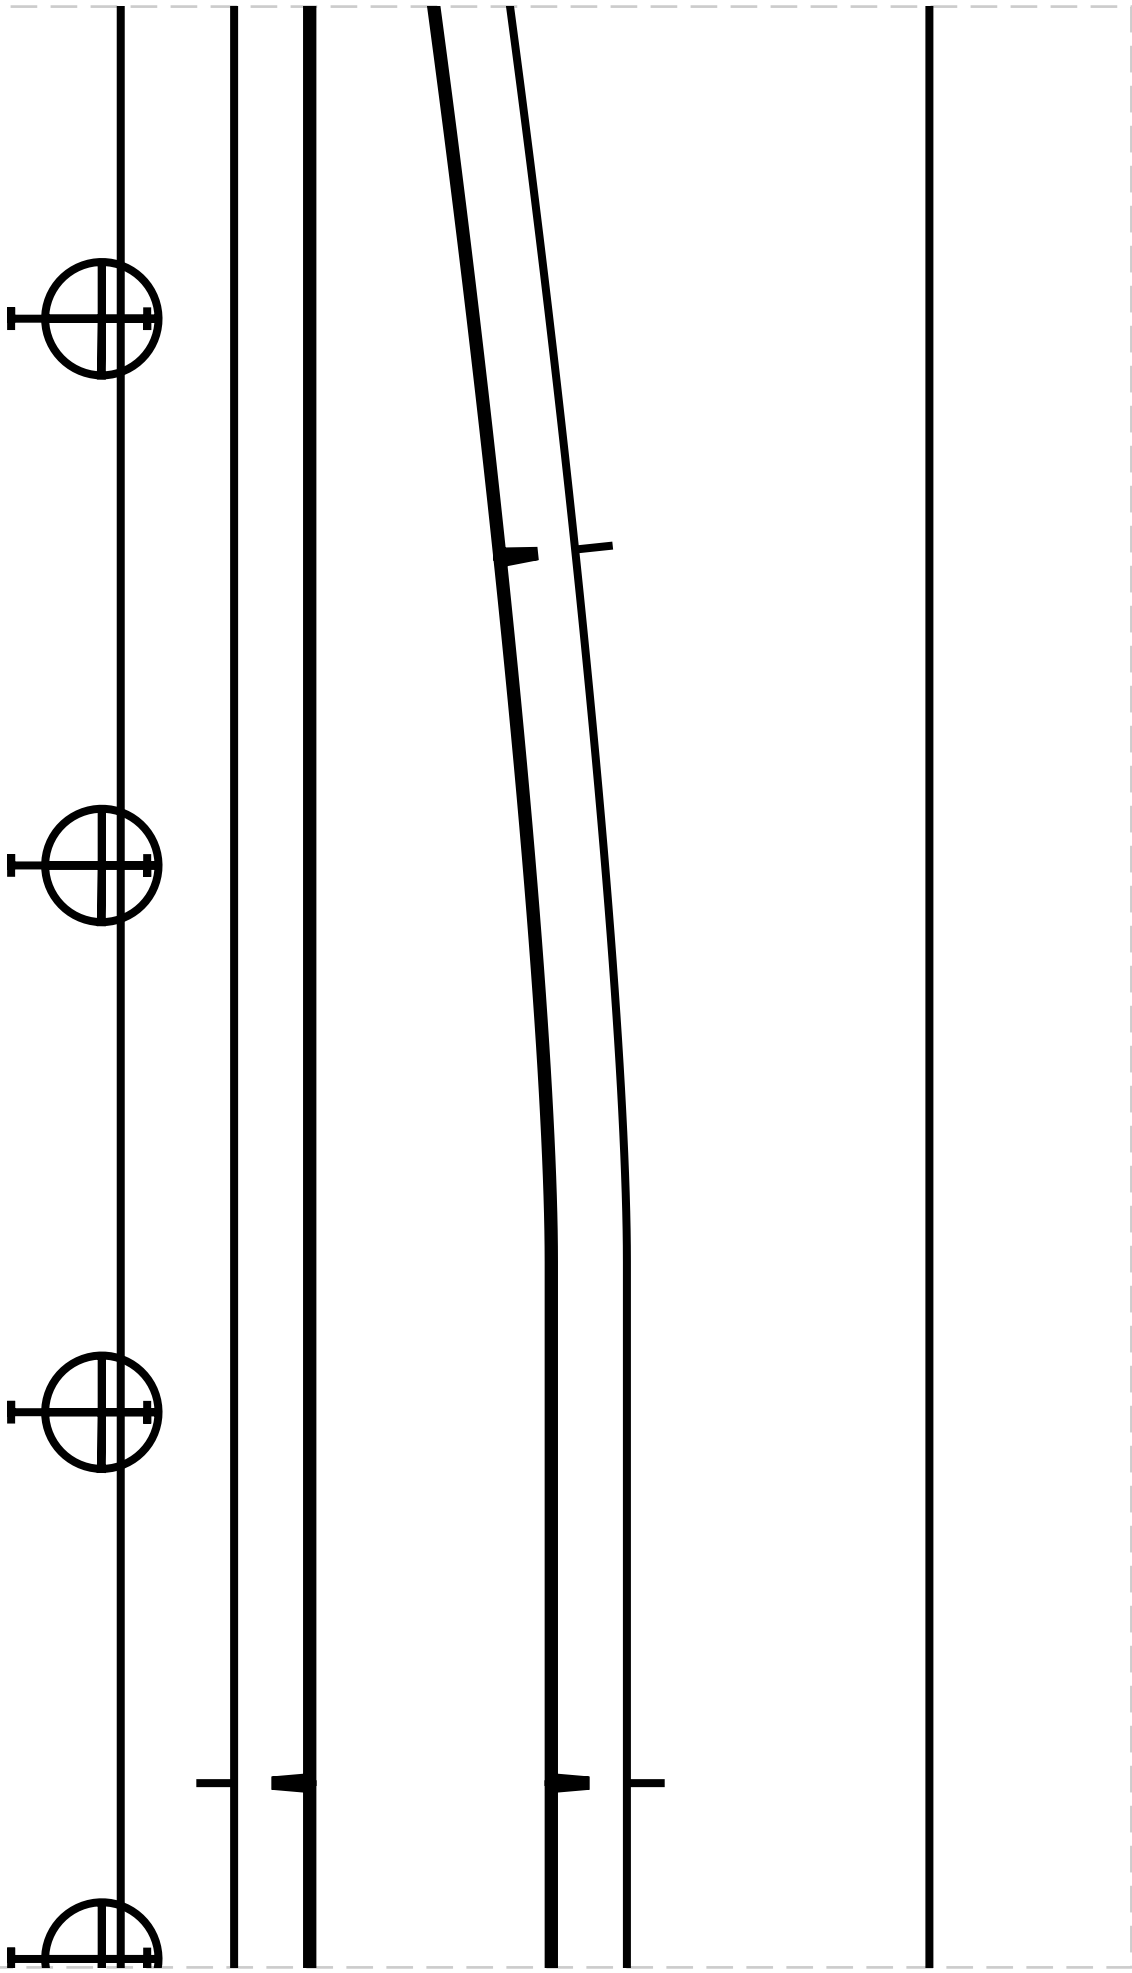

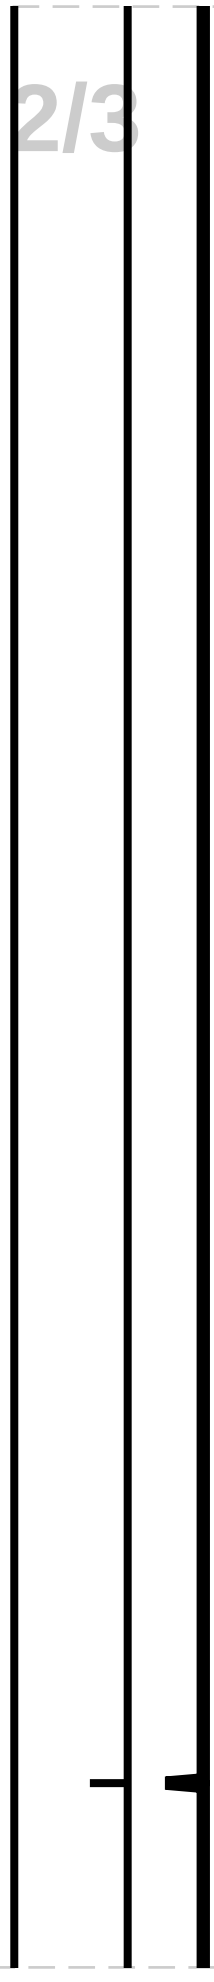

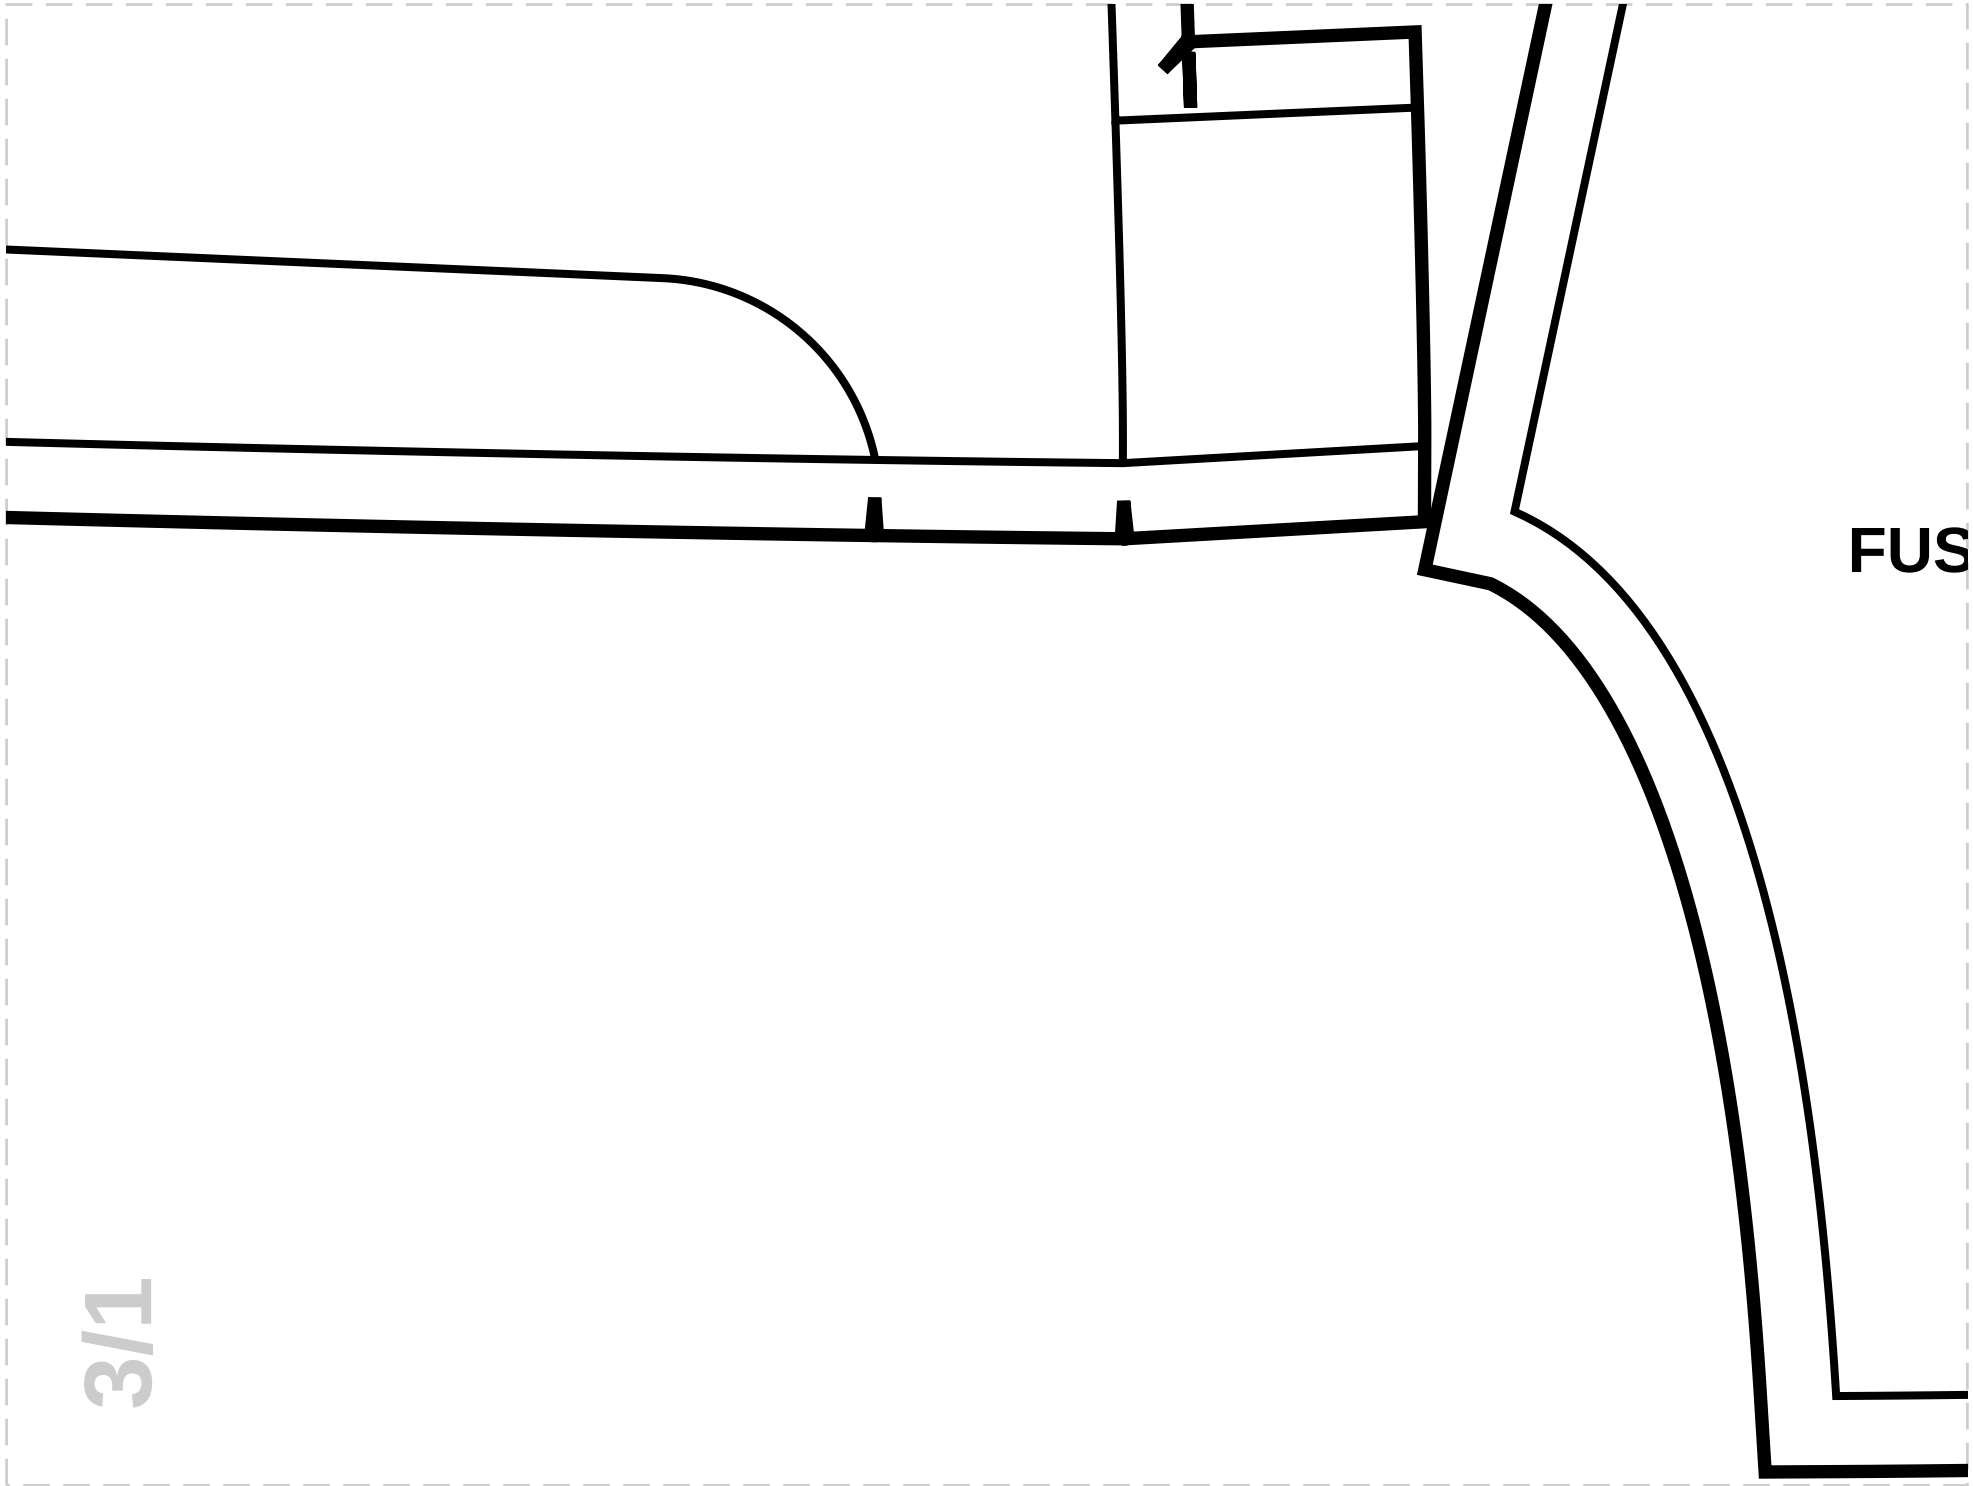
1
FUS

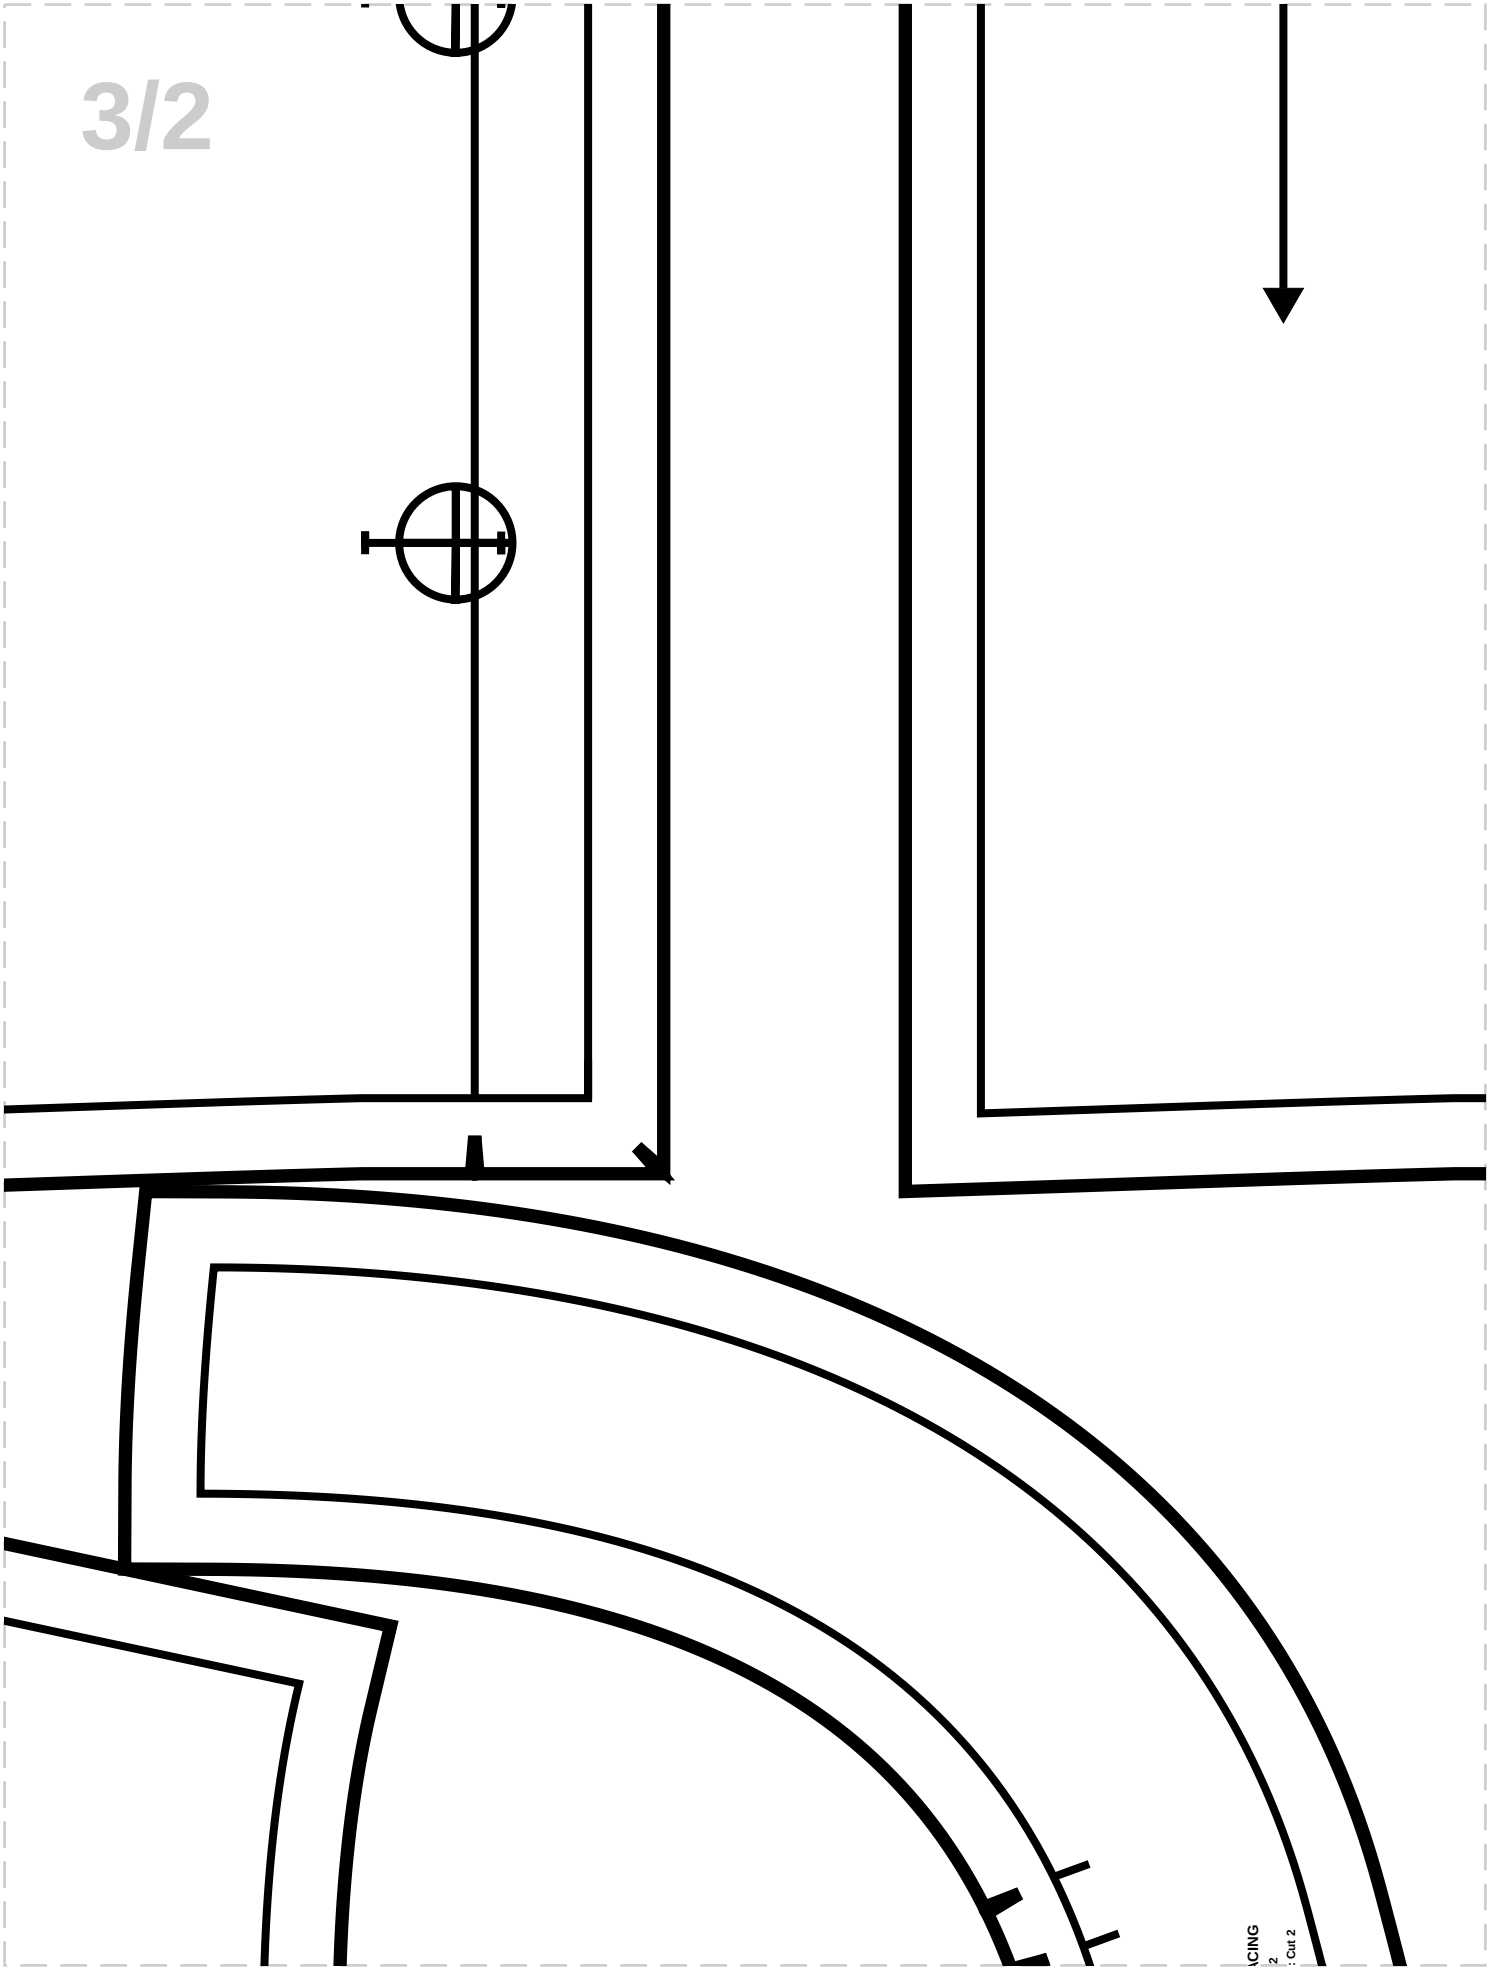
ACING
2
: Cut 2

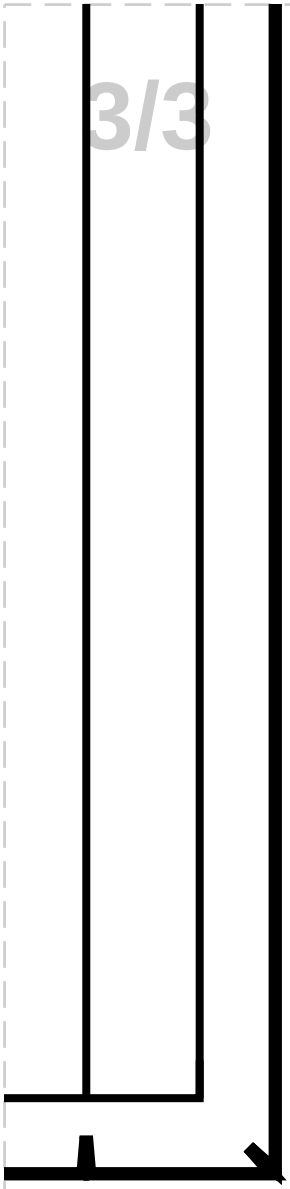

3

CENTER BACK

MAIN FABRIC: Cut 2

IBLE INTERFACING: Cut 2

4/2

5


8


BACK ARMHOLE FA

MAIN FABRIC: Cut

FUSIBLE INTERFACING




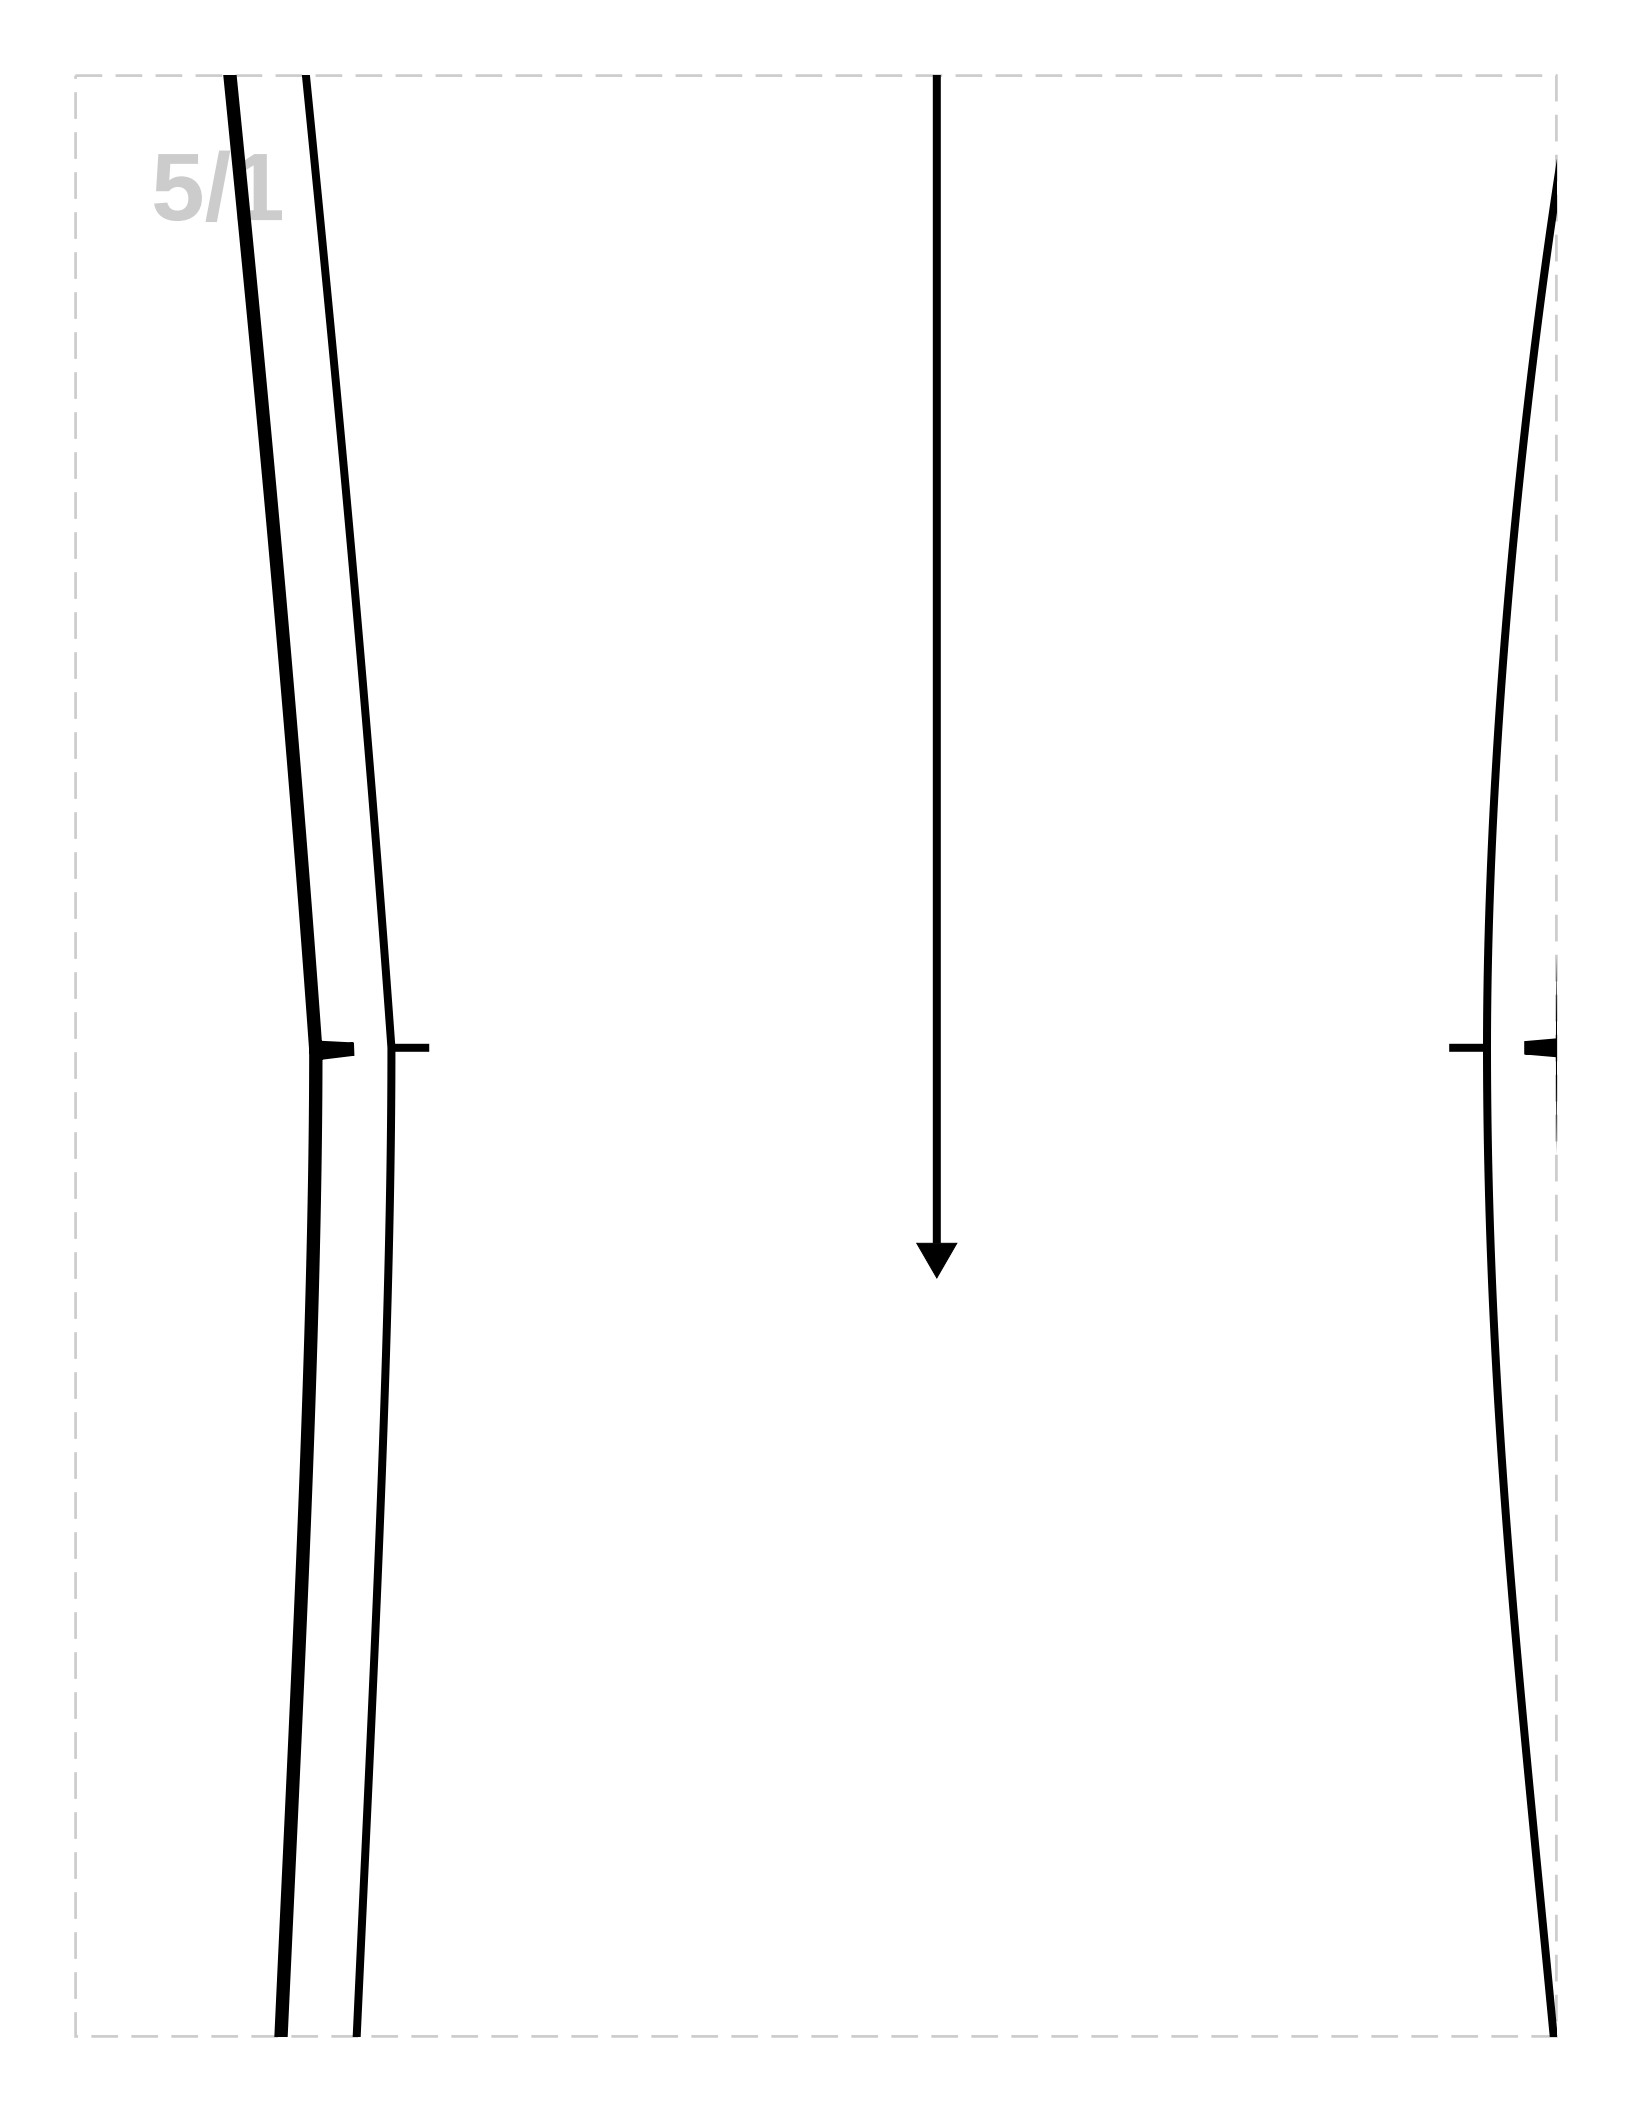


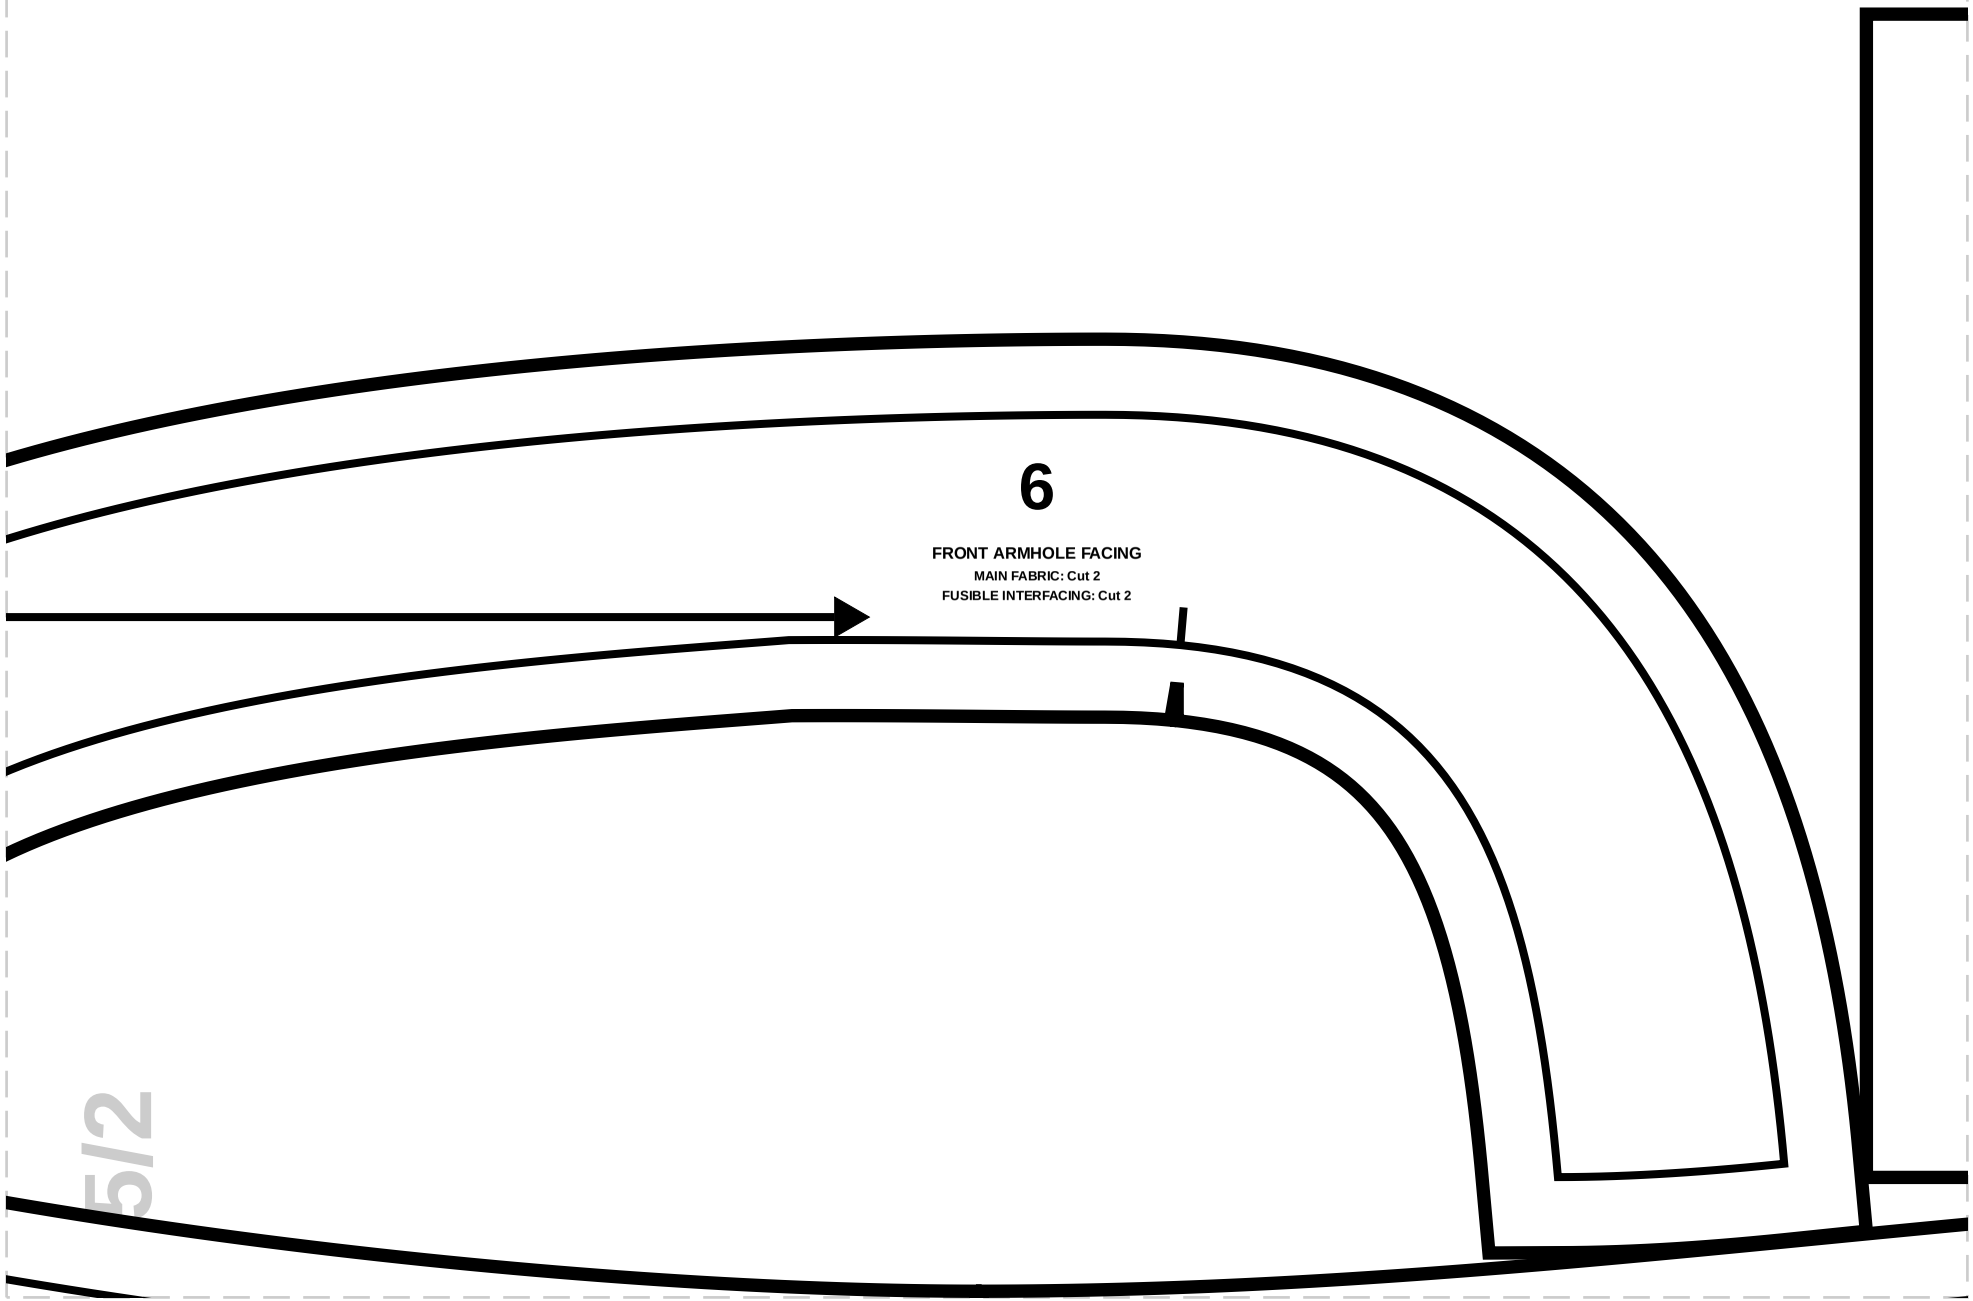
6
FRONT ARMHOLE FACING
MAIN FABRIC: Cut 2
FUSIBLE INTERFACING: Cut 2


5/2

5/3

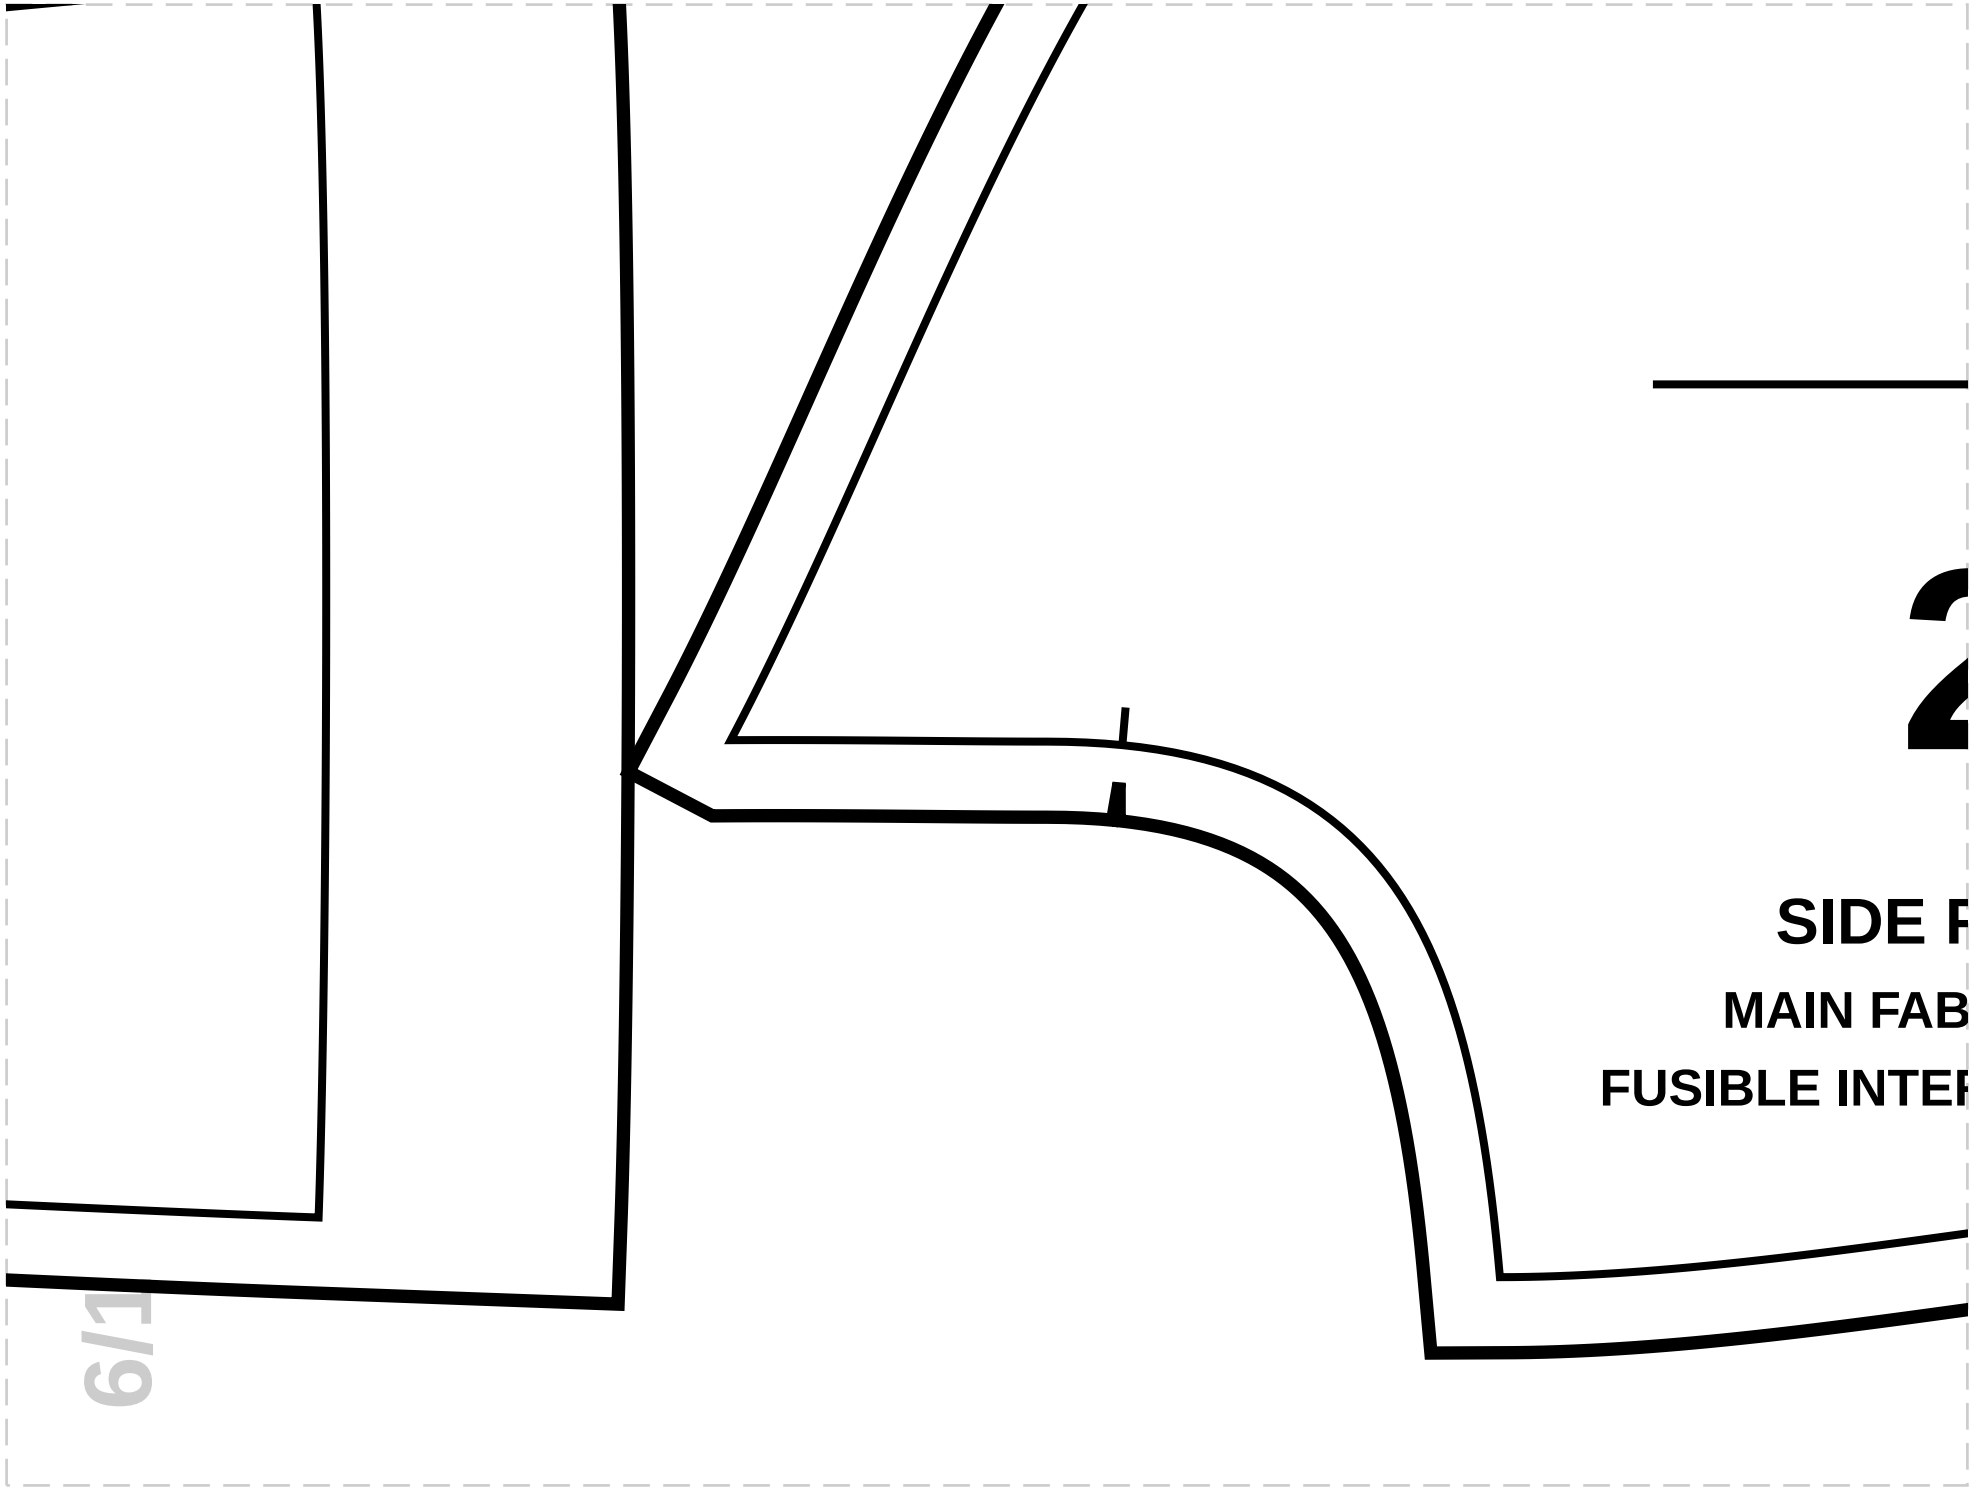
2
SIDE P
MAIN FAB
FUSIBLE INTER

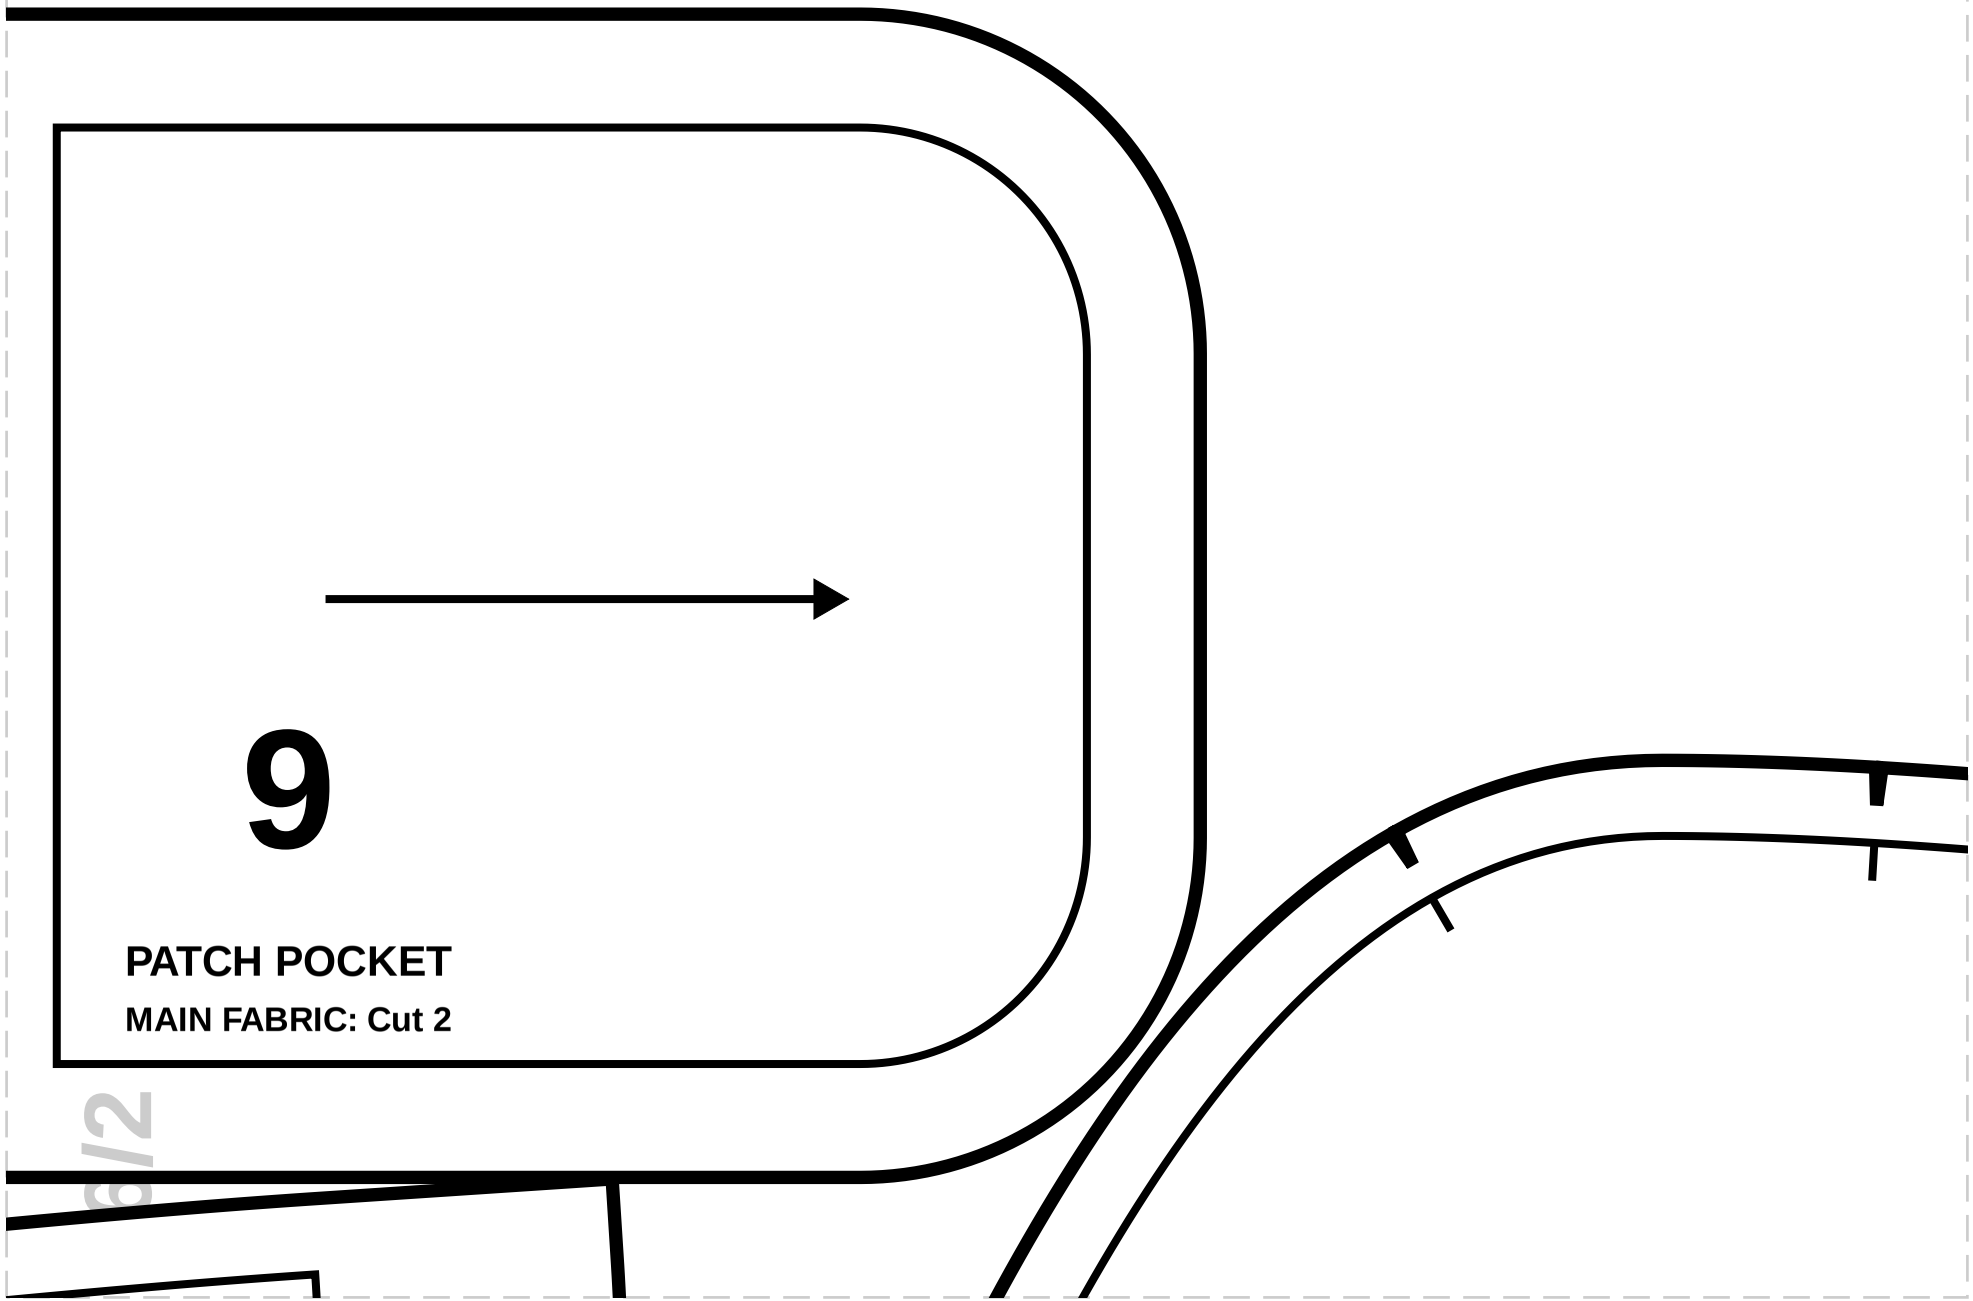
9
PATCH POCKET
MAIN FABRIC: Cut 2

6/3

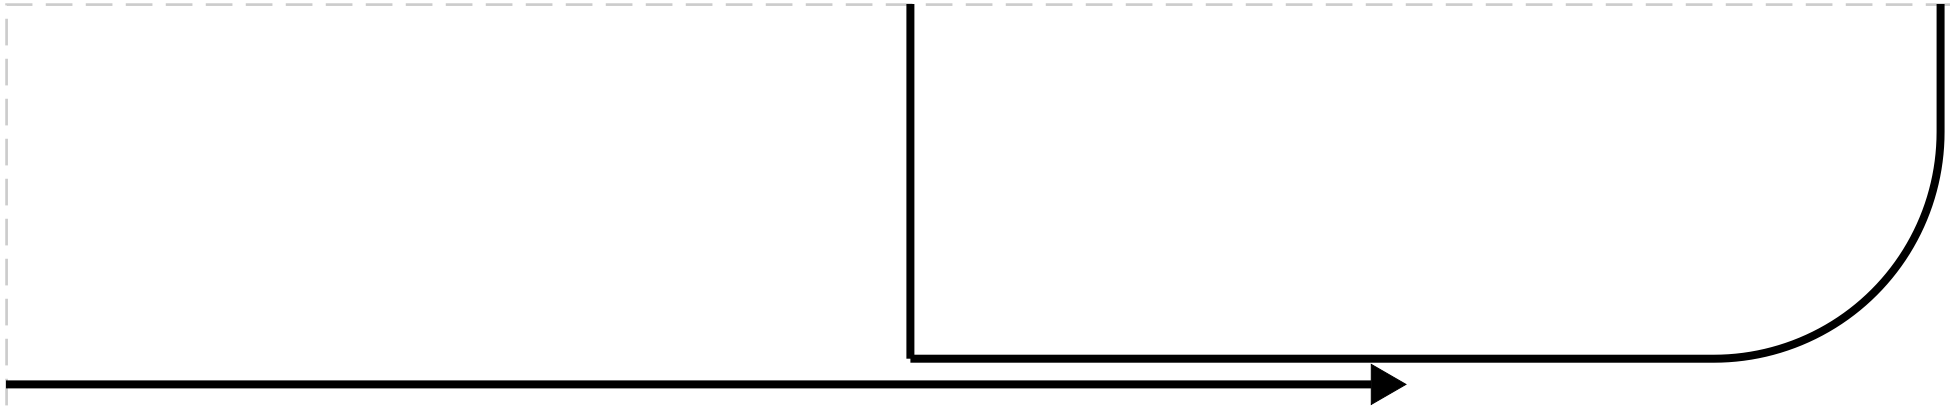



2

FRONT


RIC: Cut 2


RFACING: Cut 2

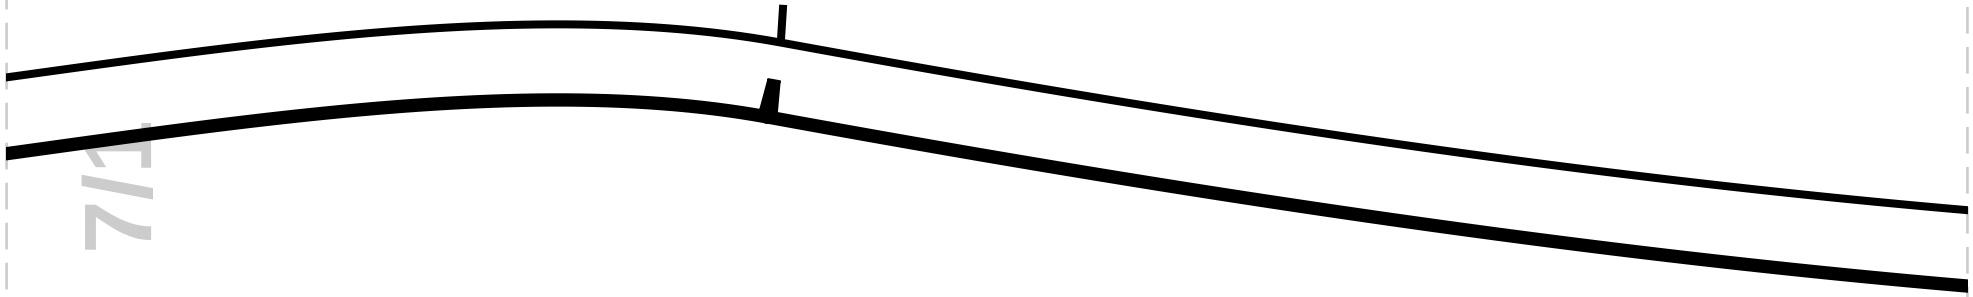

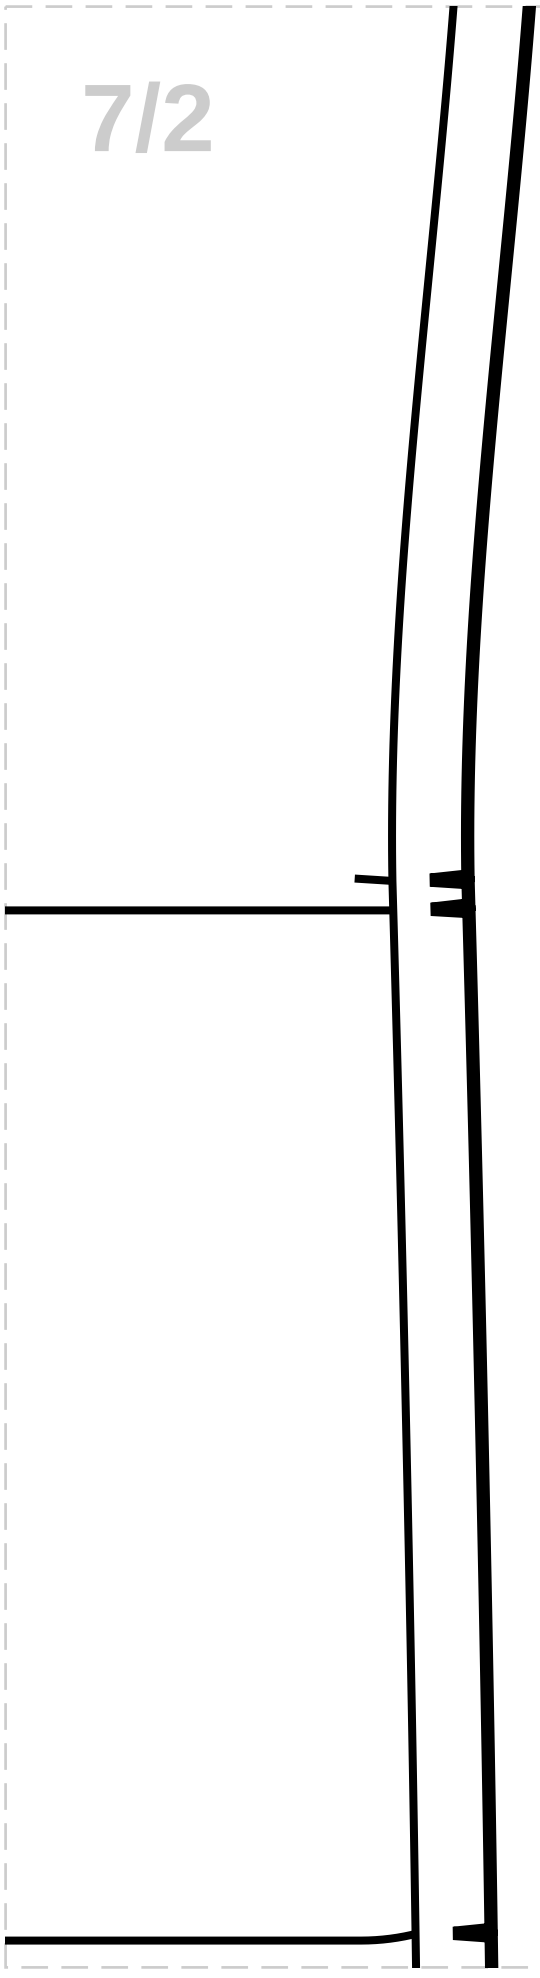


7/3

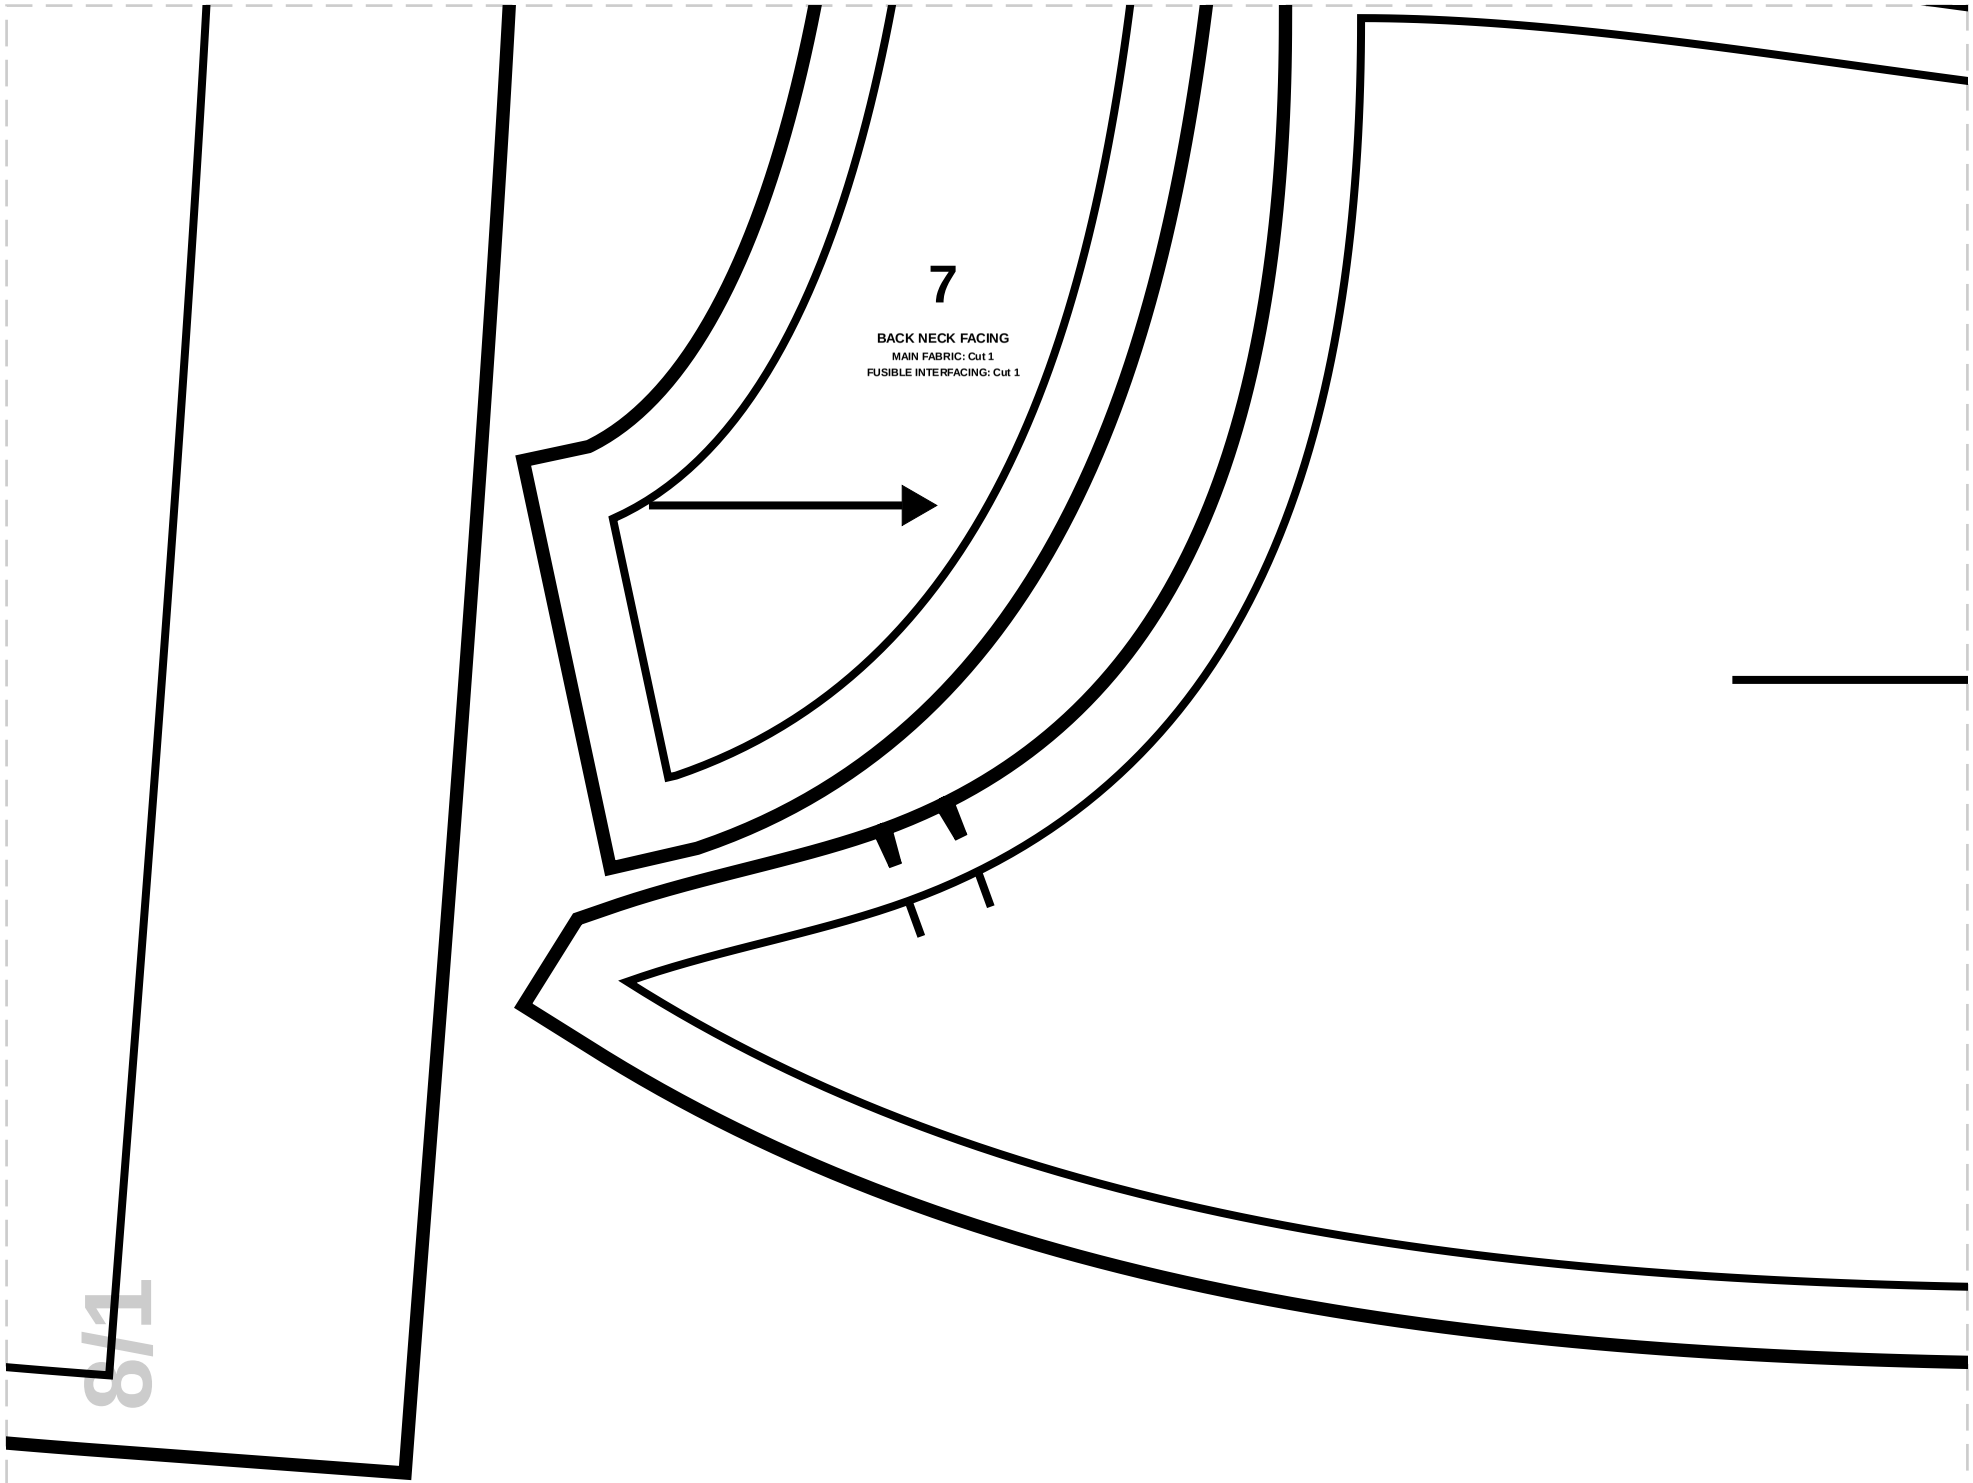
7
BACK NECK FACING
MAIN FABRIC: Cut 1
FUSIBLE INTERFACING: Cut 1
T/8
1/4

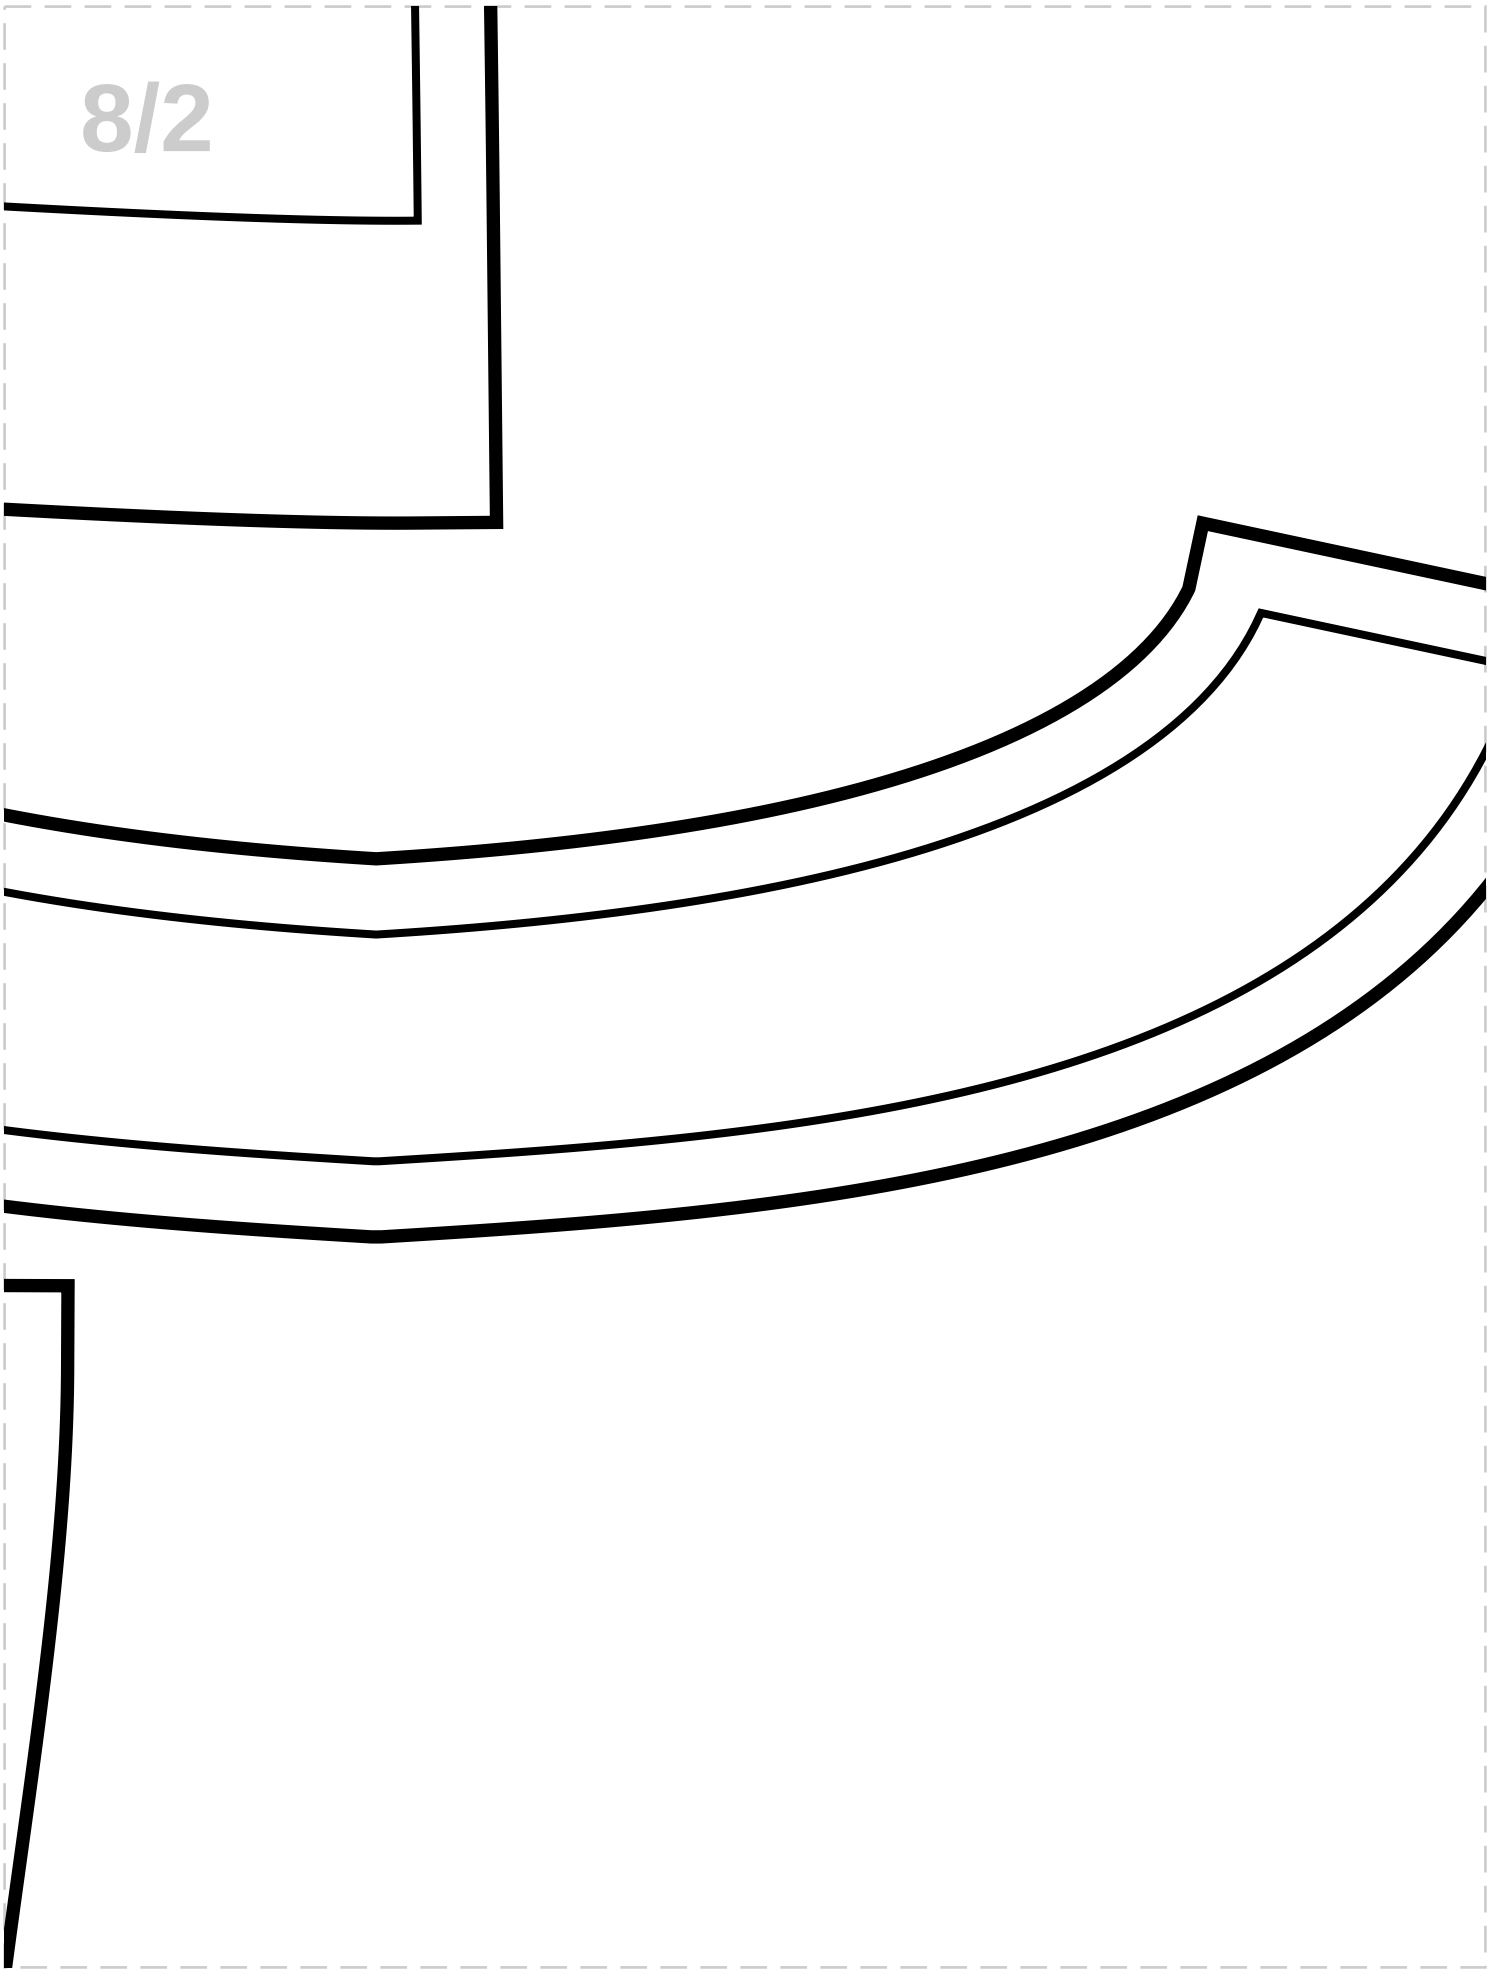

8/3




4


SIDE BACK

MAIN FABRIC: Cut 2

FUSIBLE INTERFACING: Cut 2

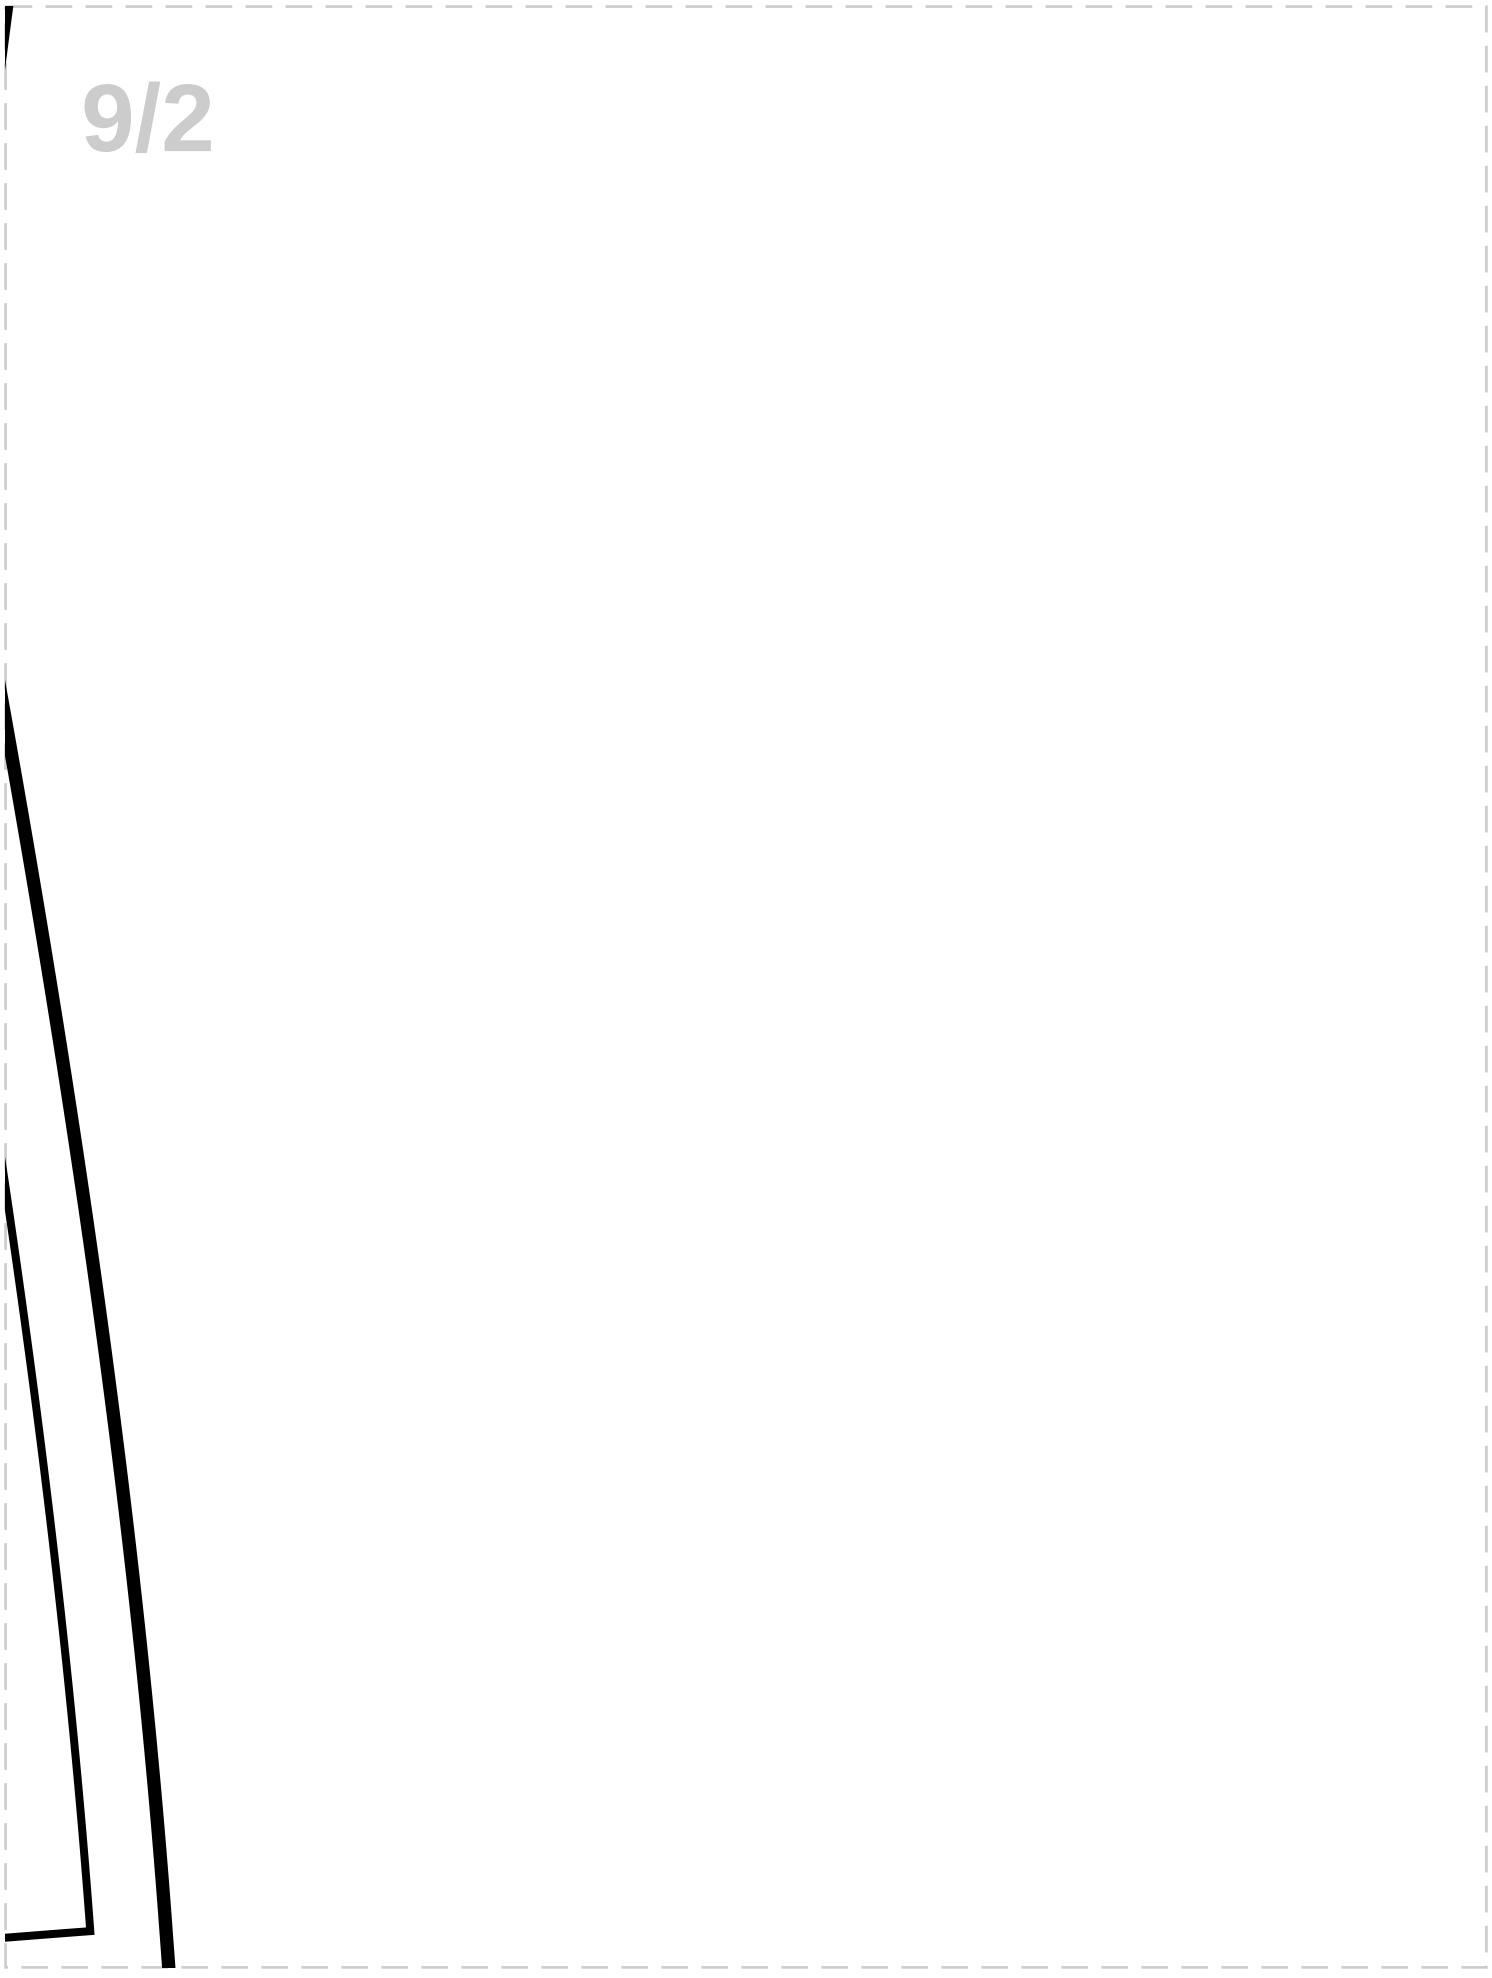

9/3

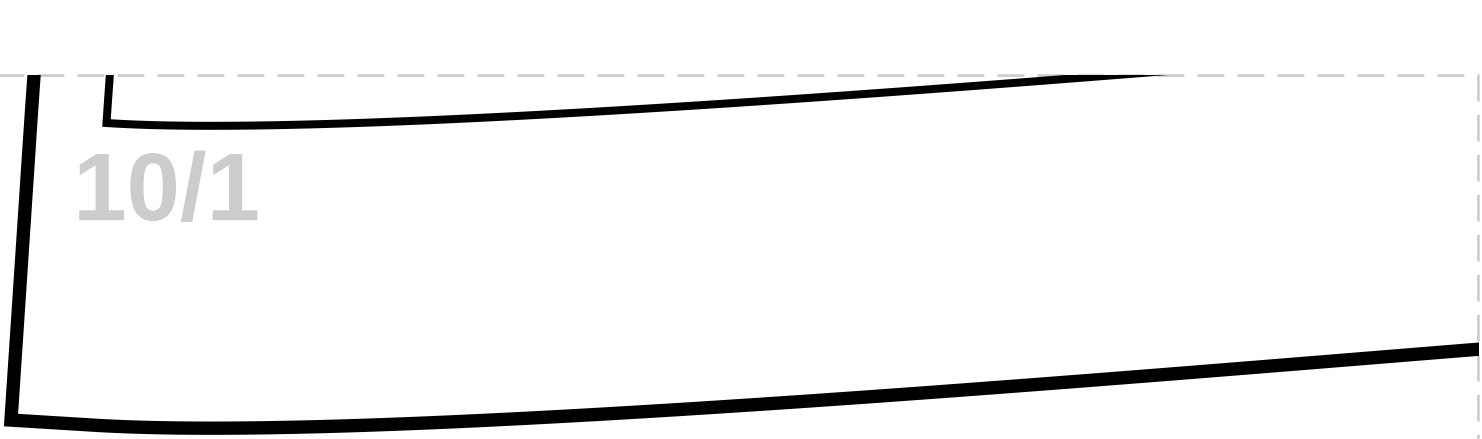
10/1

10/3