cozysewpatterns

Print this Calibration Test page first!

Size: Height: 99.1, Bust: 54.6, Waist: 50.5, Hips: 54.6
SIZE 3 99

Notes

How to print

Printing


Once your Calibration Test Page has been printed, measure the 4”x 4” (10cm) scale box with a ruler. If the lengths match, you can confidently print your pattern. If the rulers do not match, set your print settings to 100% or Actual and retry.

Cutting

Your printouts will always have a dashed border to perfectly match your sheets. Cut off the right edge of each page. Be careful not to cut beyond the dashed mark, otherwise your patterns will not align accurately.

Tapping

Group each sheet by the second number marked on each pate i.e. in a group 1, there are: 1/1, 2/1, 3/1, 4/1, etc. In a group 2: 1/2, 2/2 etc. 2. Place page 1/1 on top of the page 2/1, overlapping the right side edge. Match corners and crosses and secure with a pin or tape. Then use a scotch tape to permanently attach the sheets together.

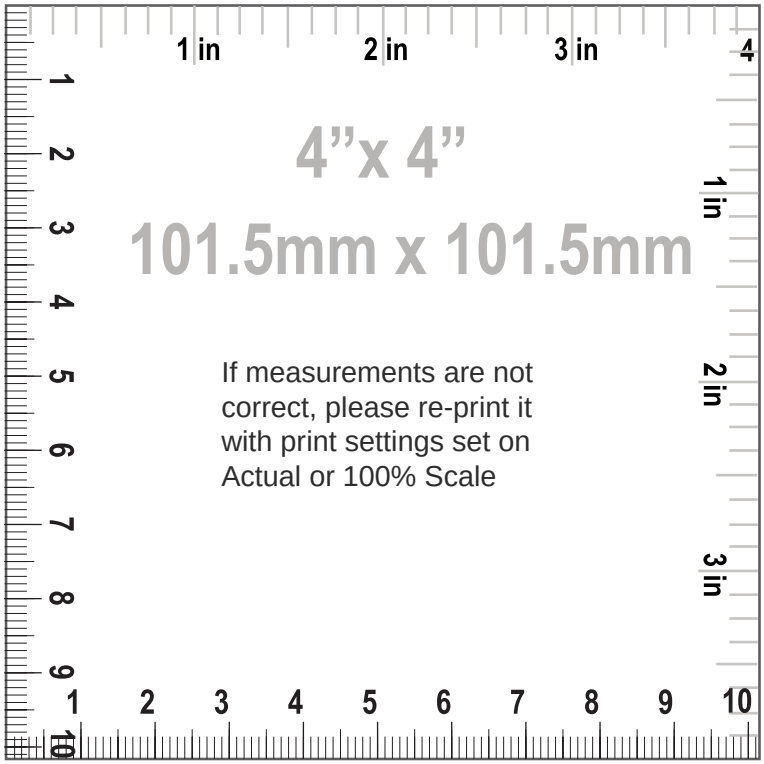

SIZE 3 99
Seam Allowance: 1 (3/8 in)

Pattern pieces:

1. "RIGHT FRONT", MAIN FABRIC: Cut 1
2. "LEFT FRONT", MAIN FABRIC: Cut 1
3. "BACK", MAIN FABRIC: Cut 1
4. "SLEEVE", MAIN FABRIC: Cut 2
5. "LEFT FRONT BUTTON FACING", MAIN FABRIC, FUSIBLE INTERFACING: Cut 1
6. "BACK NECK FACING", MAIN FABRIC, FUSIBLE INTERFACING: Cut 1
7. "COLLAR", MAIN FABRIC, FUSIBLE INTERFACING: Cut 2
8. "FRONT CLOSURE FACING", MAIN FABRIC, FUSIBLE INTERFACING: Cut 2
9. "RIGHT FRONT PLACKET", MAIN FABRIC, FUSIBLE INTERFACING: Cut 1


Pattern Specs (Circumferences are divided by 2):

1. Hem max 3.00 none (1 1/8 in)
2. Seam allowance max 2.00 none (3/4 in)
3. Stretch factor 1.00 none (3/8 in)
4. Stretch factor horizontal 1.00 none (3/8 in)
5. Stretch factor vertical 1.00 none (3/8 in)
6. Button diameter 1.00 cm (3/8 in)
7. Front buttons quantity 5.00 pc
8. Front length from HPS to hem 40.24 cm (15 7/8 in)
9. Across chest 29.80 cm (11 3/4 in)
10. Center front length to hem 32.59 cm (12 7/8 in)
11. Center back length to hem 36.26 cm (14 1/4 in)
12. Across front 21.53 cm (8 1/2 in)
13. Across back 21.72 cm (8 1/2 in)
14. Across shoulders 25.33 cm (10 in)
15. Side seam 20.46 cm (8 in)
16. Waist 34.10 cm (13 3/8 in)
17. Hemline sweep 40.21 cm (15 7/8 in)
18. Armhole length front 16.46 cm (6 1/2 in)
19. Armhole length back 17.59 cm (6 7/8 in)

20. Neck opening 14.04 cm (5 1/2 in)
21. Neckline length 38.06 cm (15 in)
22. Front neck drop 7.63 cm (3 in)
23. Back neck drop 2.57 cm (1 in)
24. Shoulder width 5.98 cm (2 3/8 in)
25. Placket length 32.59 cm (12 7/8 in)
26. Placket width 2.05 cm (3/4 in)
27. Collar width 9.50 cm (3 3/4 in)
28. Collar edges length 9.00 cm (3 1/2 in)
29. Sleeve length 37.32 cm (14 3/4 in)
30. Sleeve upper arm width 22.68 cm (8 7/8 in)
31. Sleeve opening 17.86 cm (7 in)

cozysewpatterns


Paper Size: A4;
Print Actual Size (100% Scale);

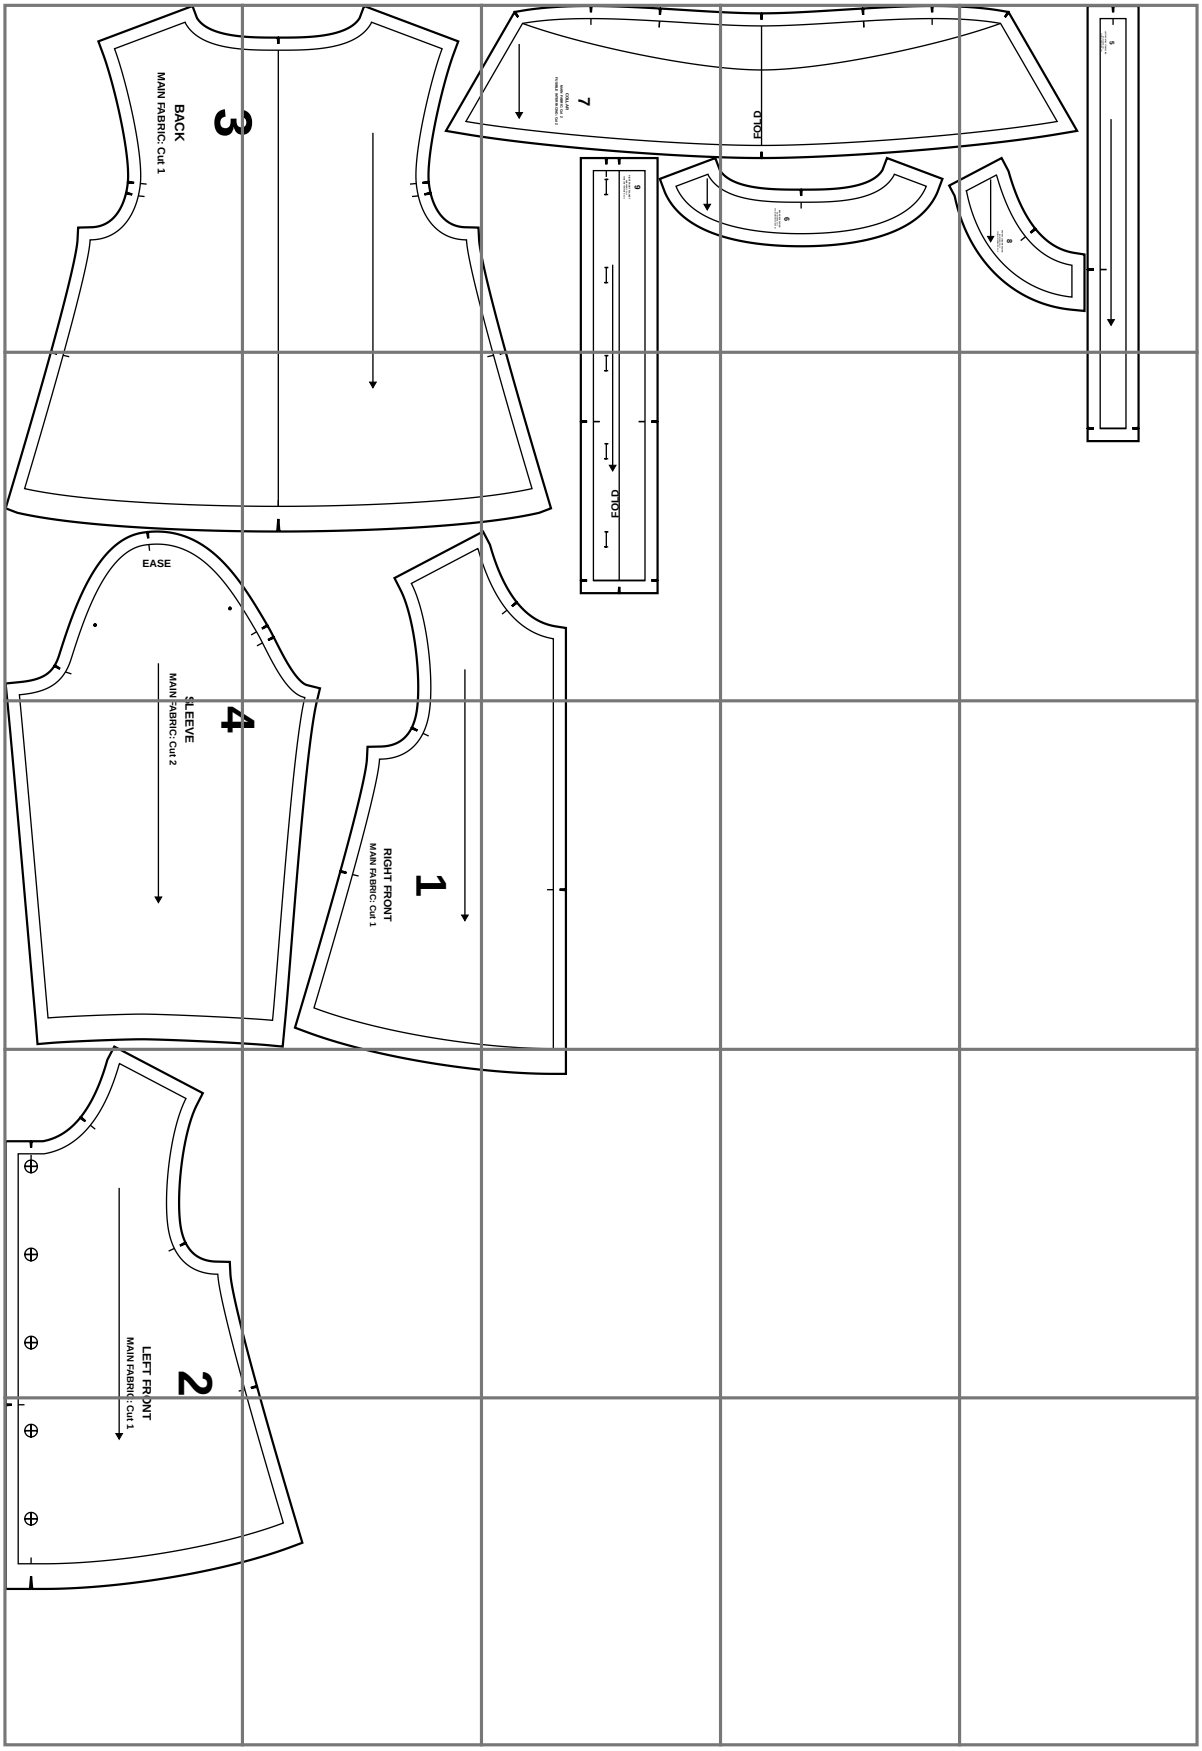



3

BACK

MAIN FABRIC: Cut 1

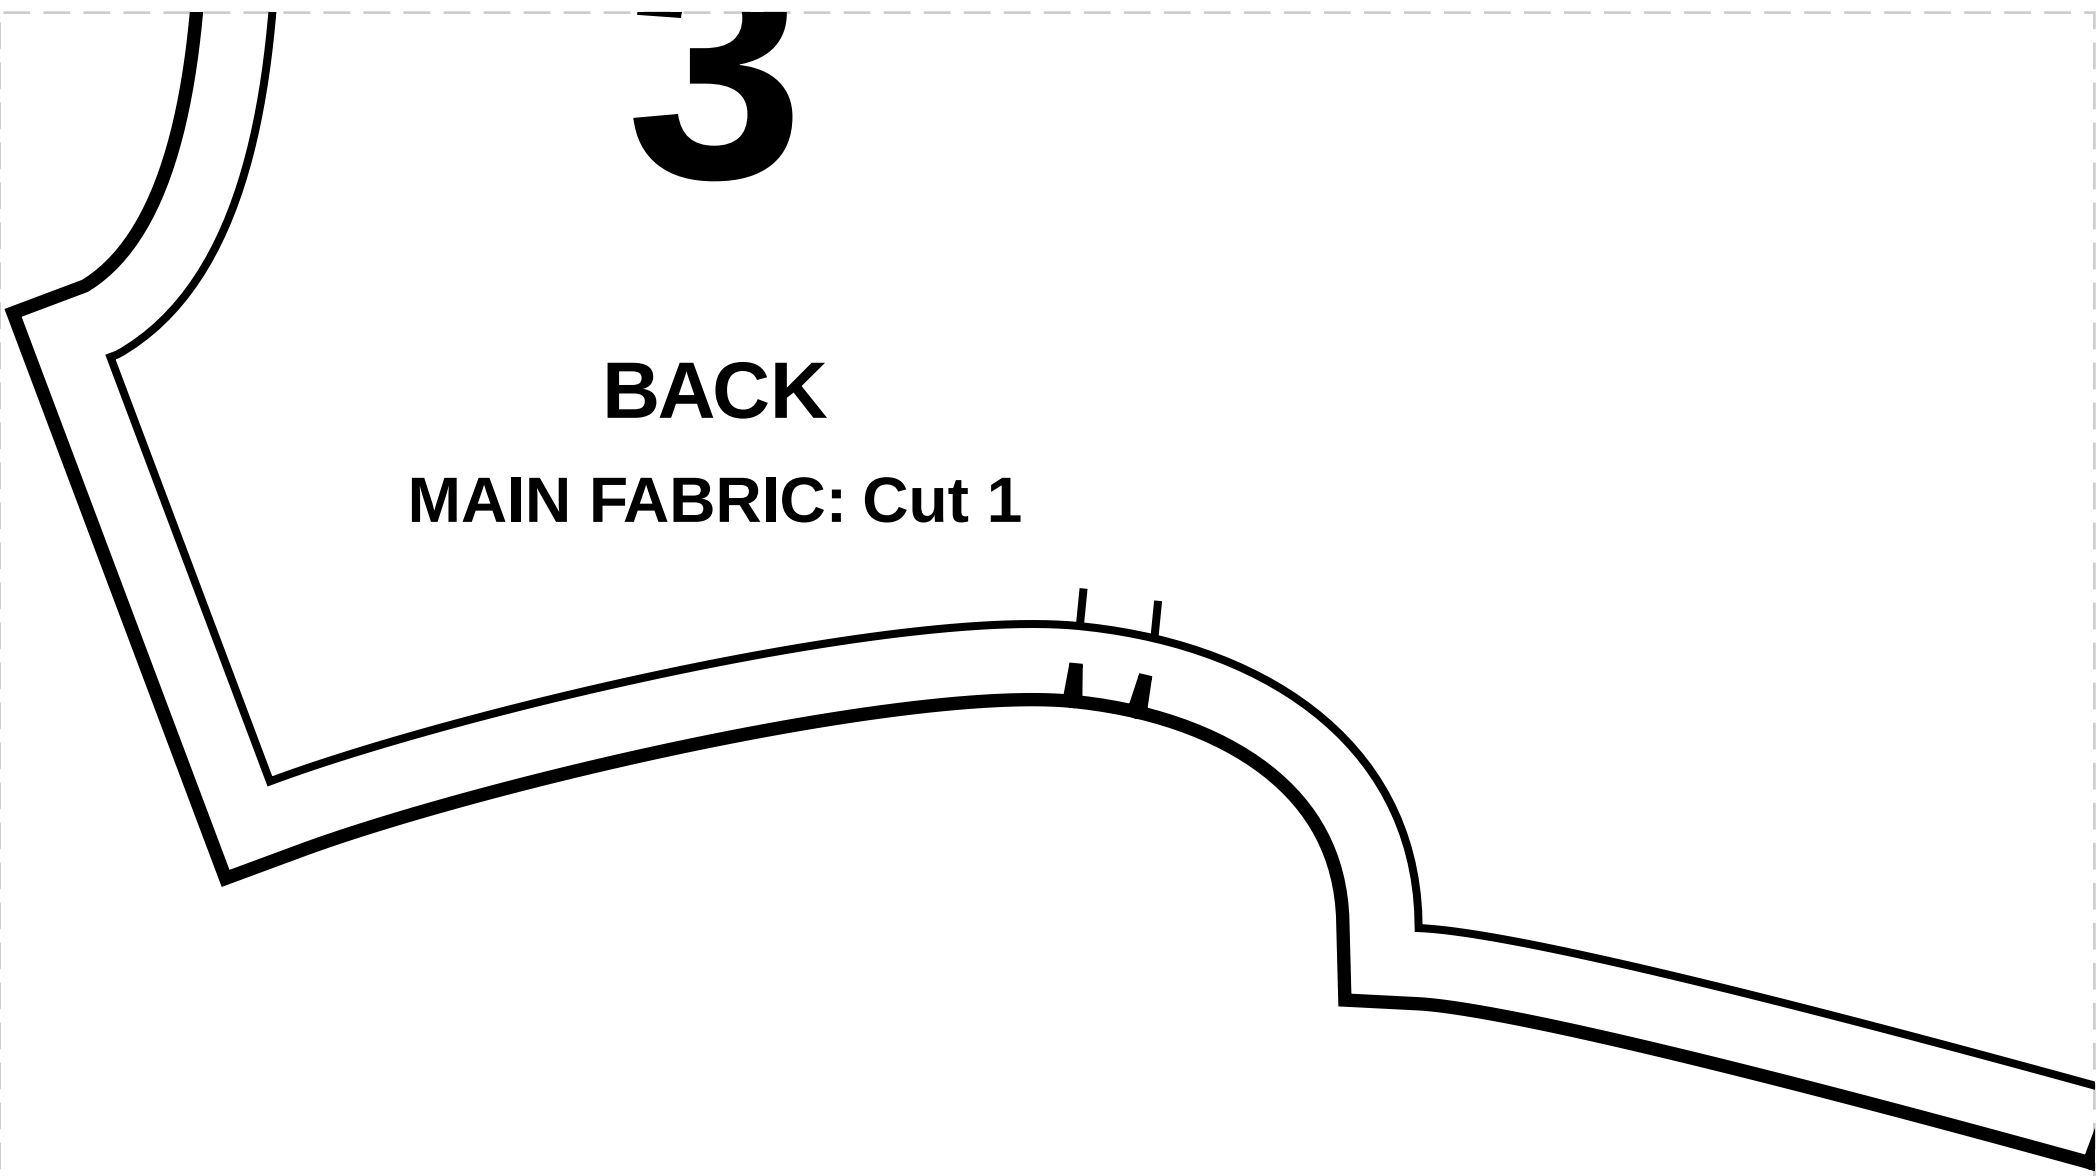

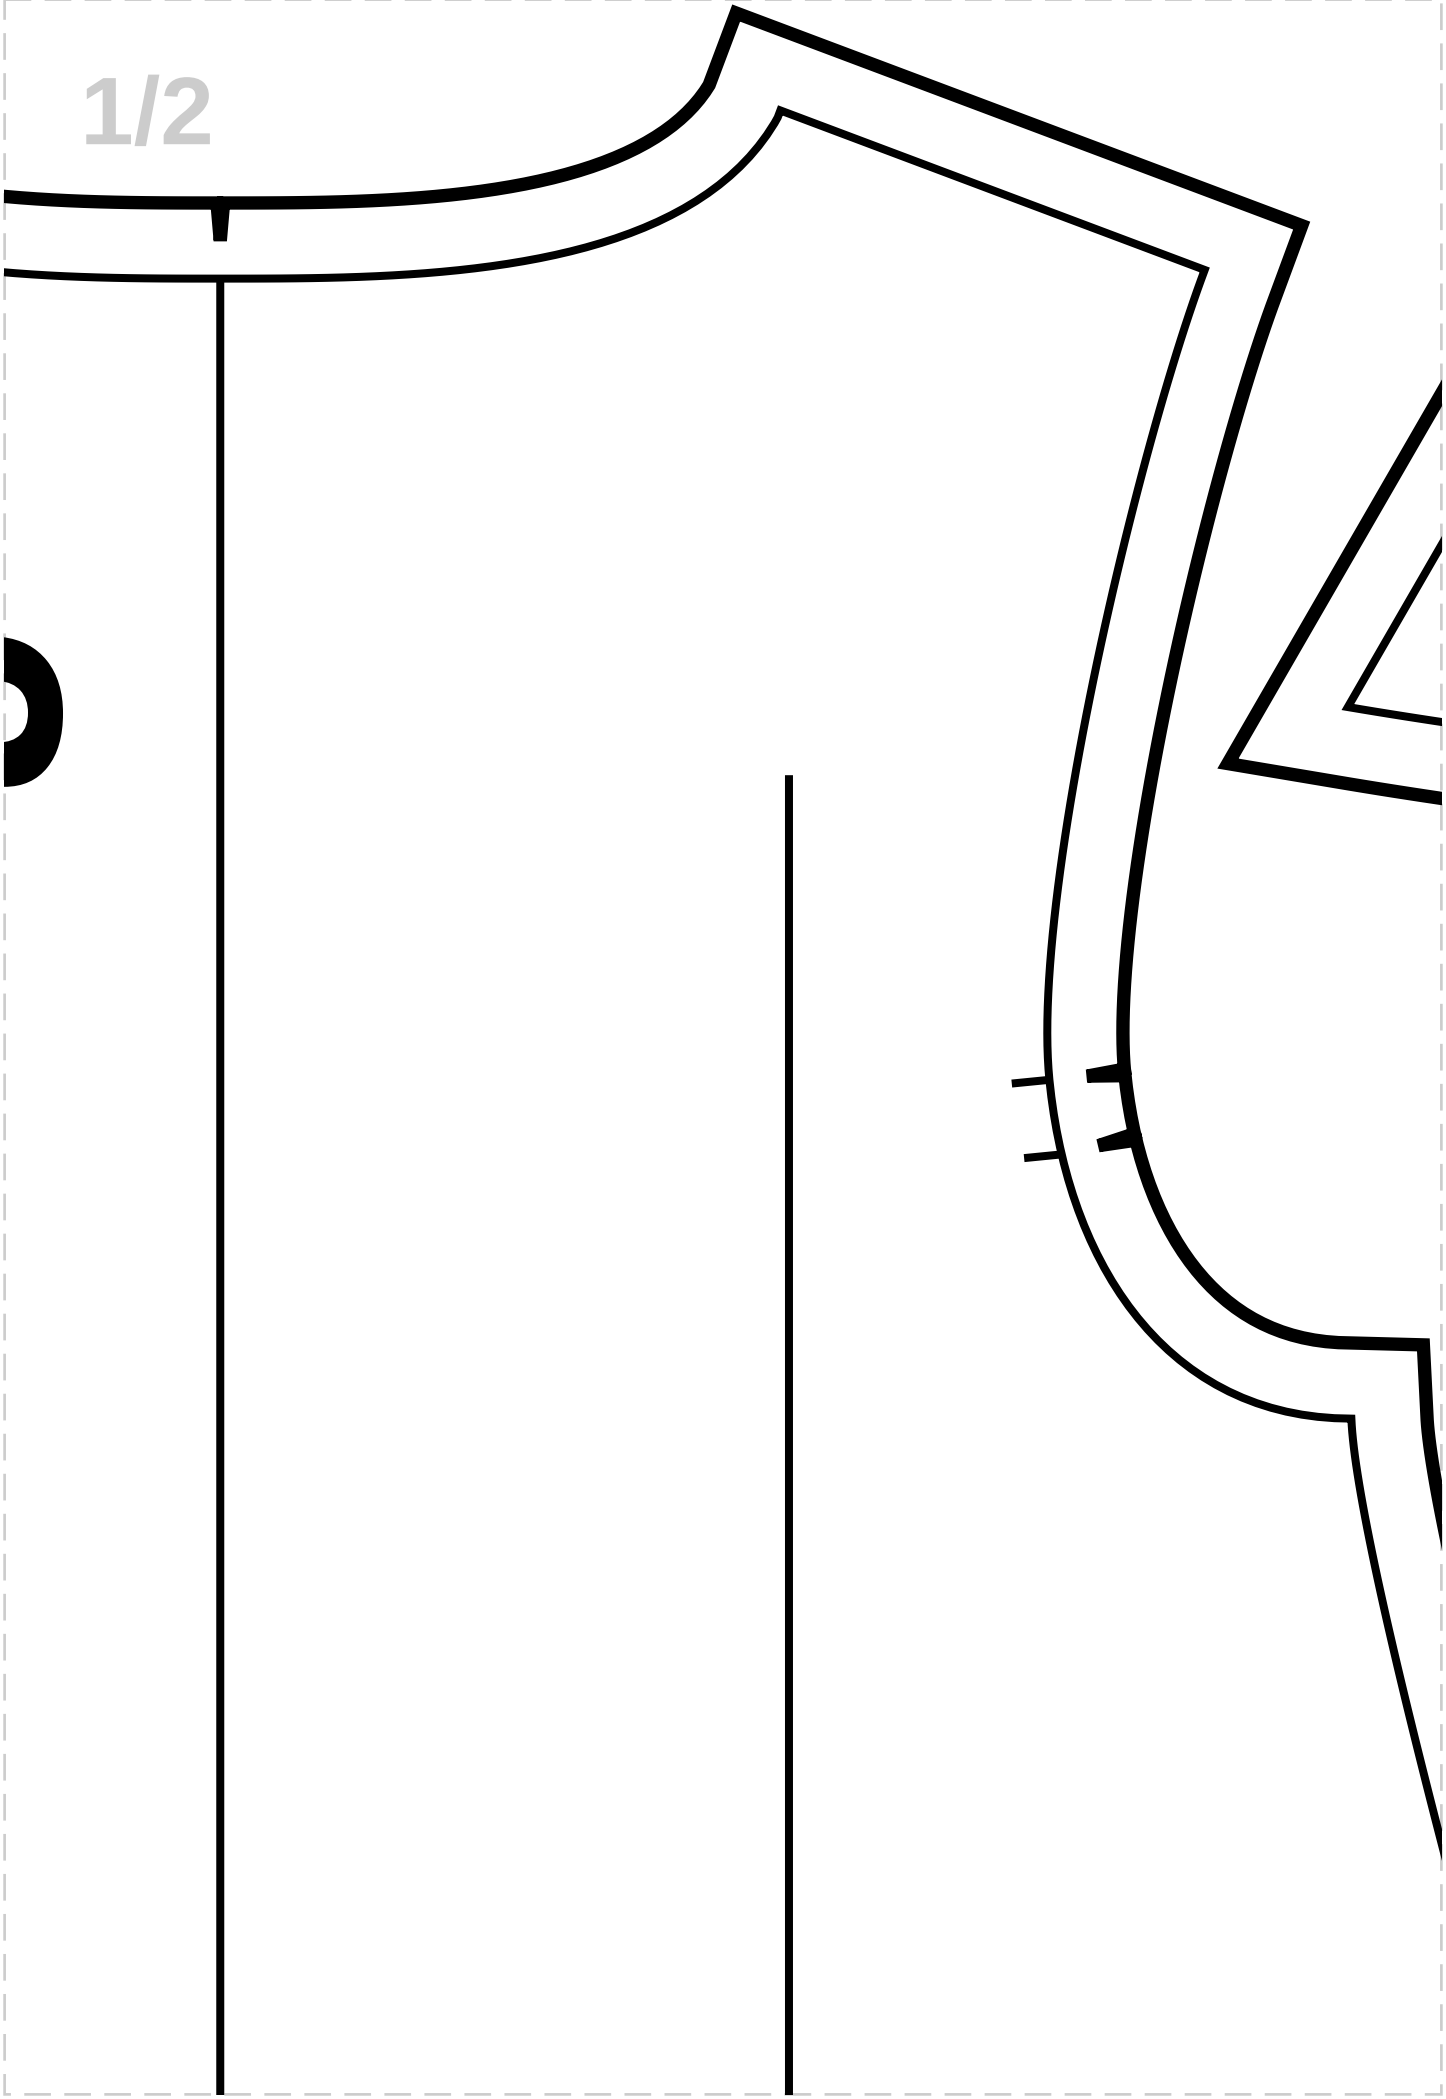

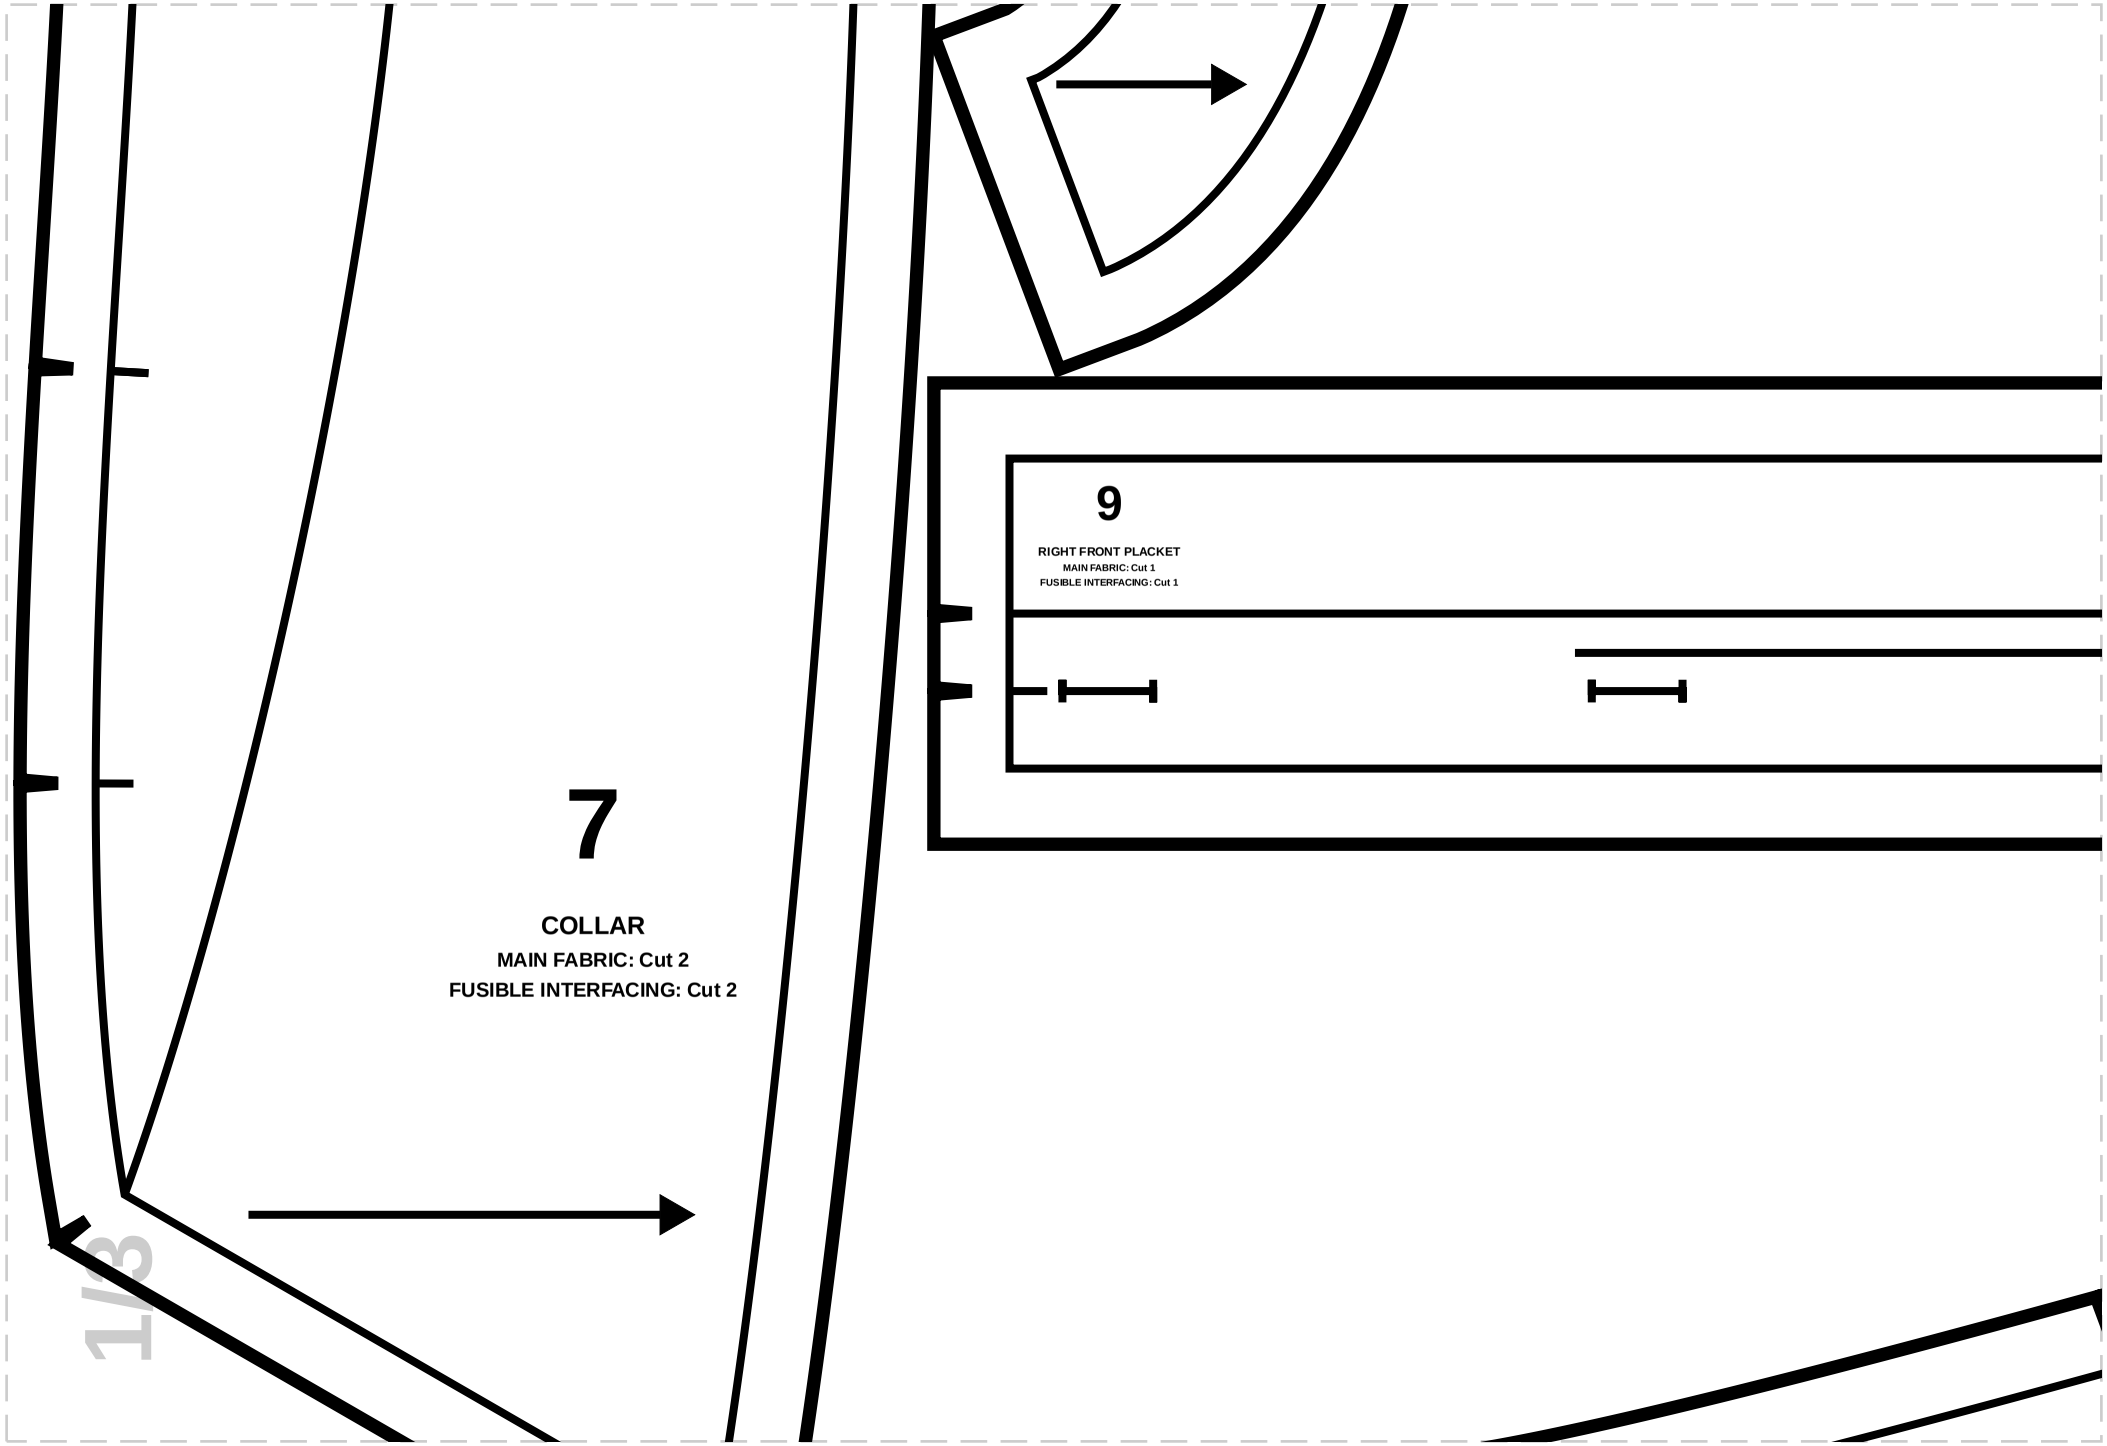
9
RIGHT FRONT PLACKET
MAIN FABRIC: Cut 1
FUSIBLE INTERFACING: Cut 1
7
COLLAR
MAIN FABRIC: Cut 2
FUSIBLE INTERFACING: Cut 2

1/4


FOLD


6


BACK NECK FACING


MAIN FABRIC: Cut 1


FUSIBLE INTERFACING: Cut 1

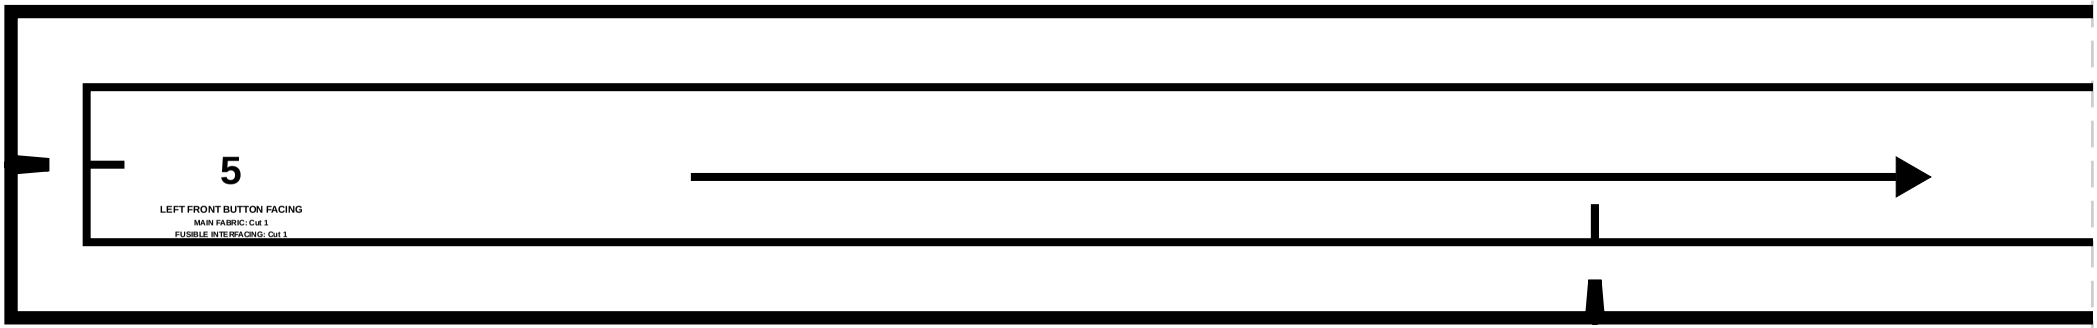

5
LEFT FRONT BUTTON FACING
MAIN FABRIC: Cut 1
FUSIBLE INTERFACING: Cut 1

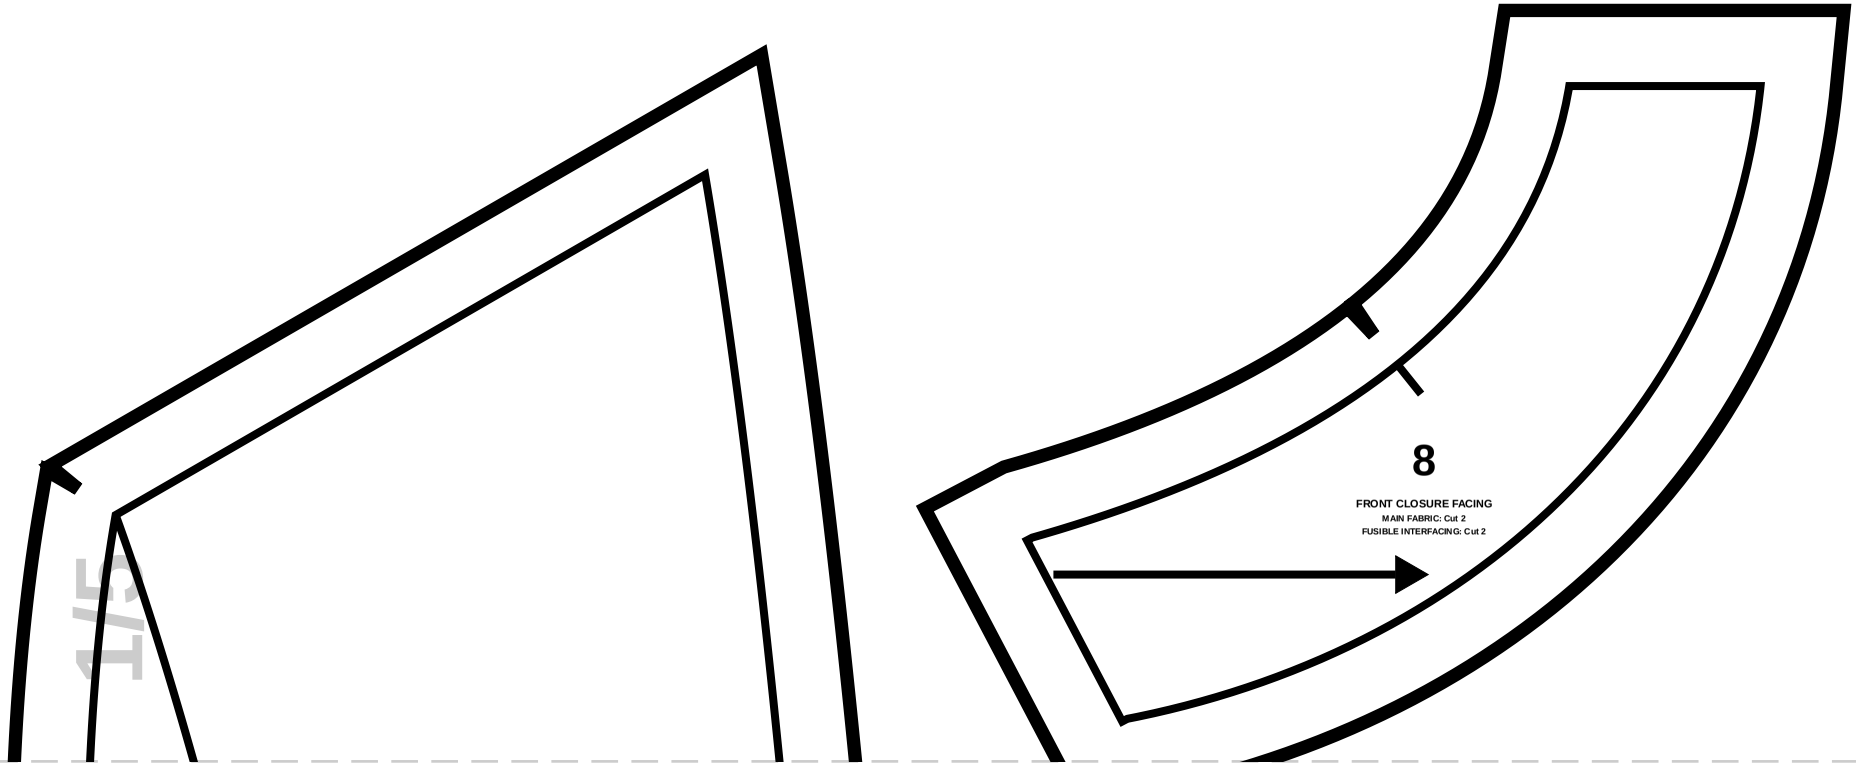
8
FRONT CLOSURE FACING
MAIN FABRIC: Cut 2
FUSIBLE INTERFACING: Cut 2

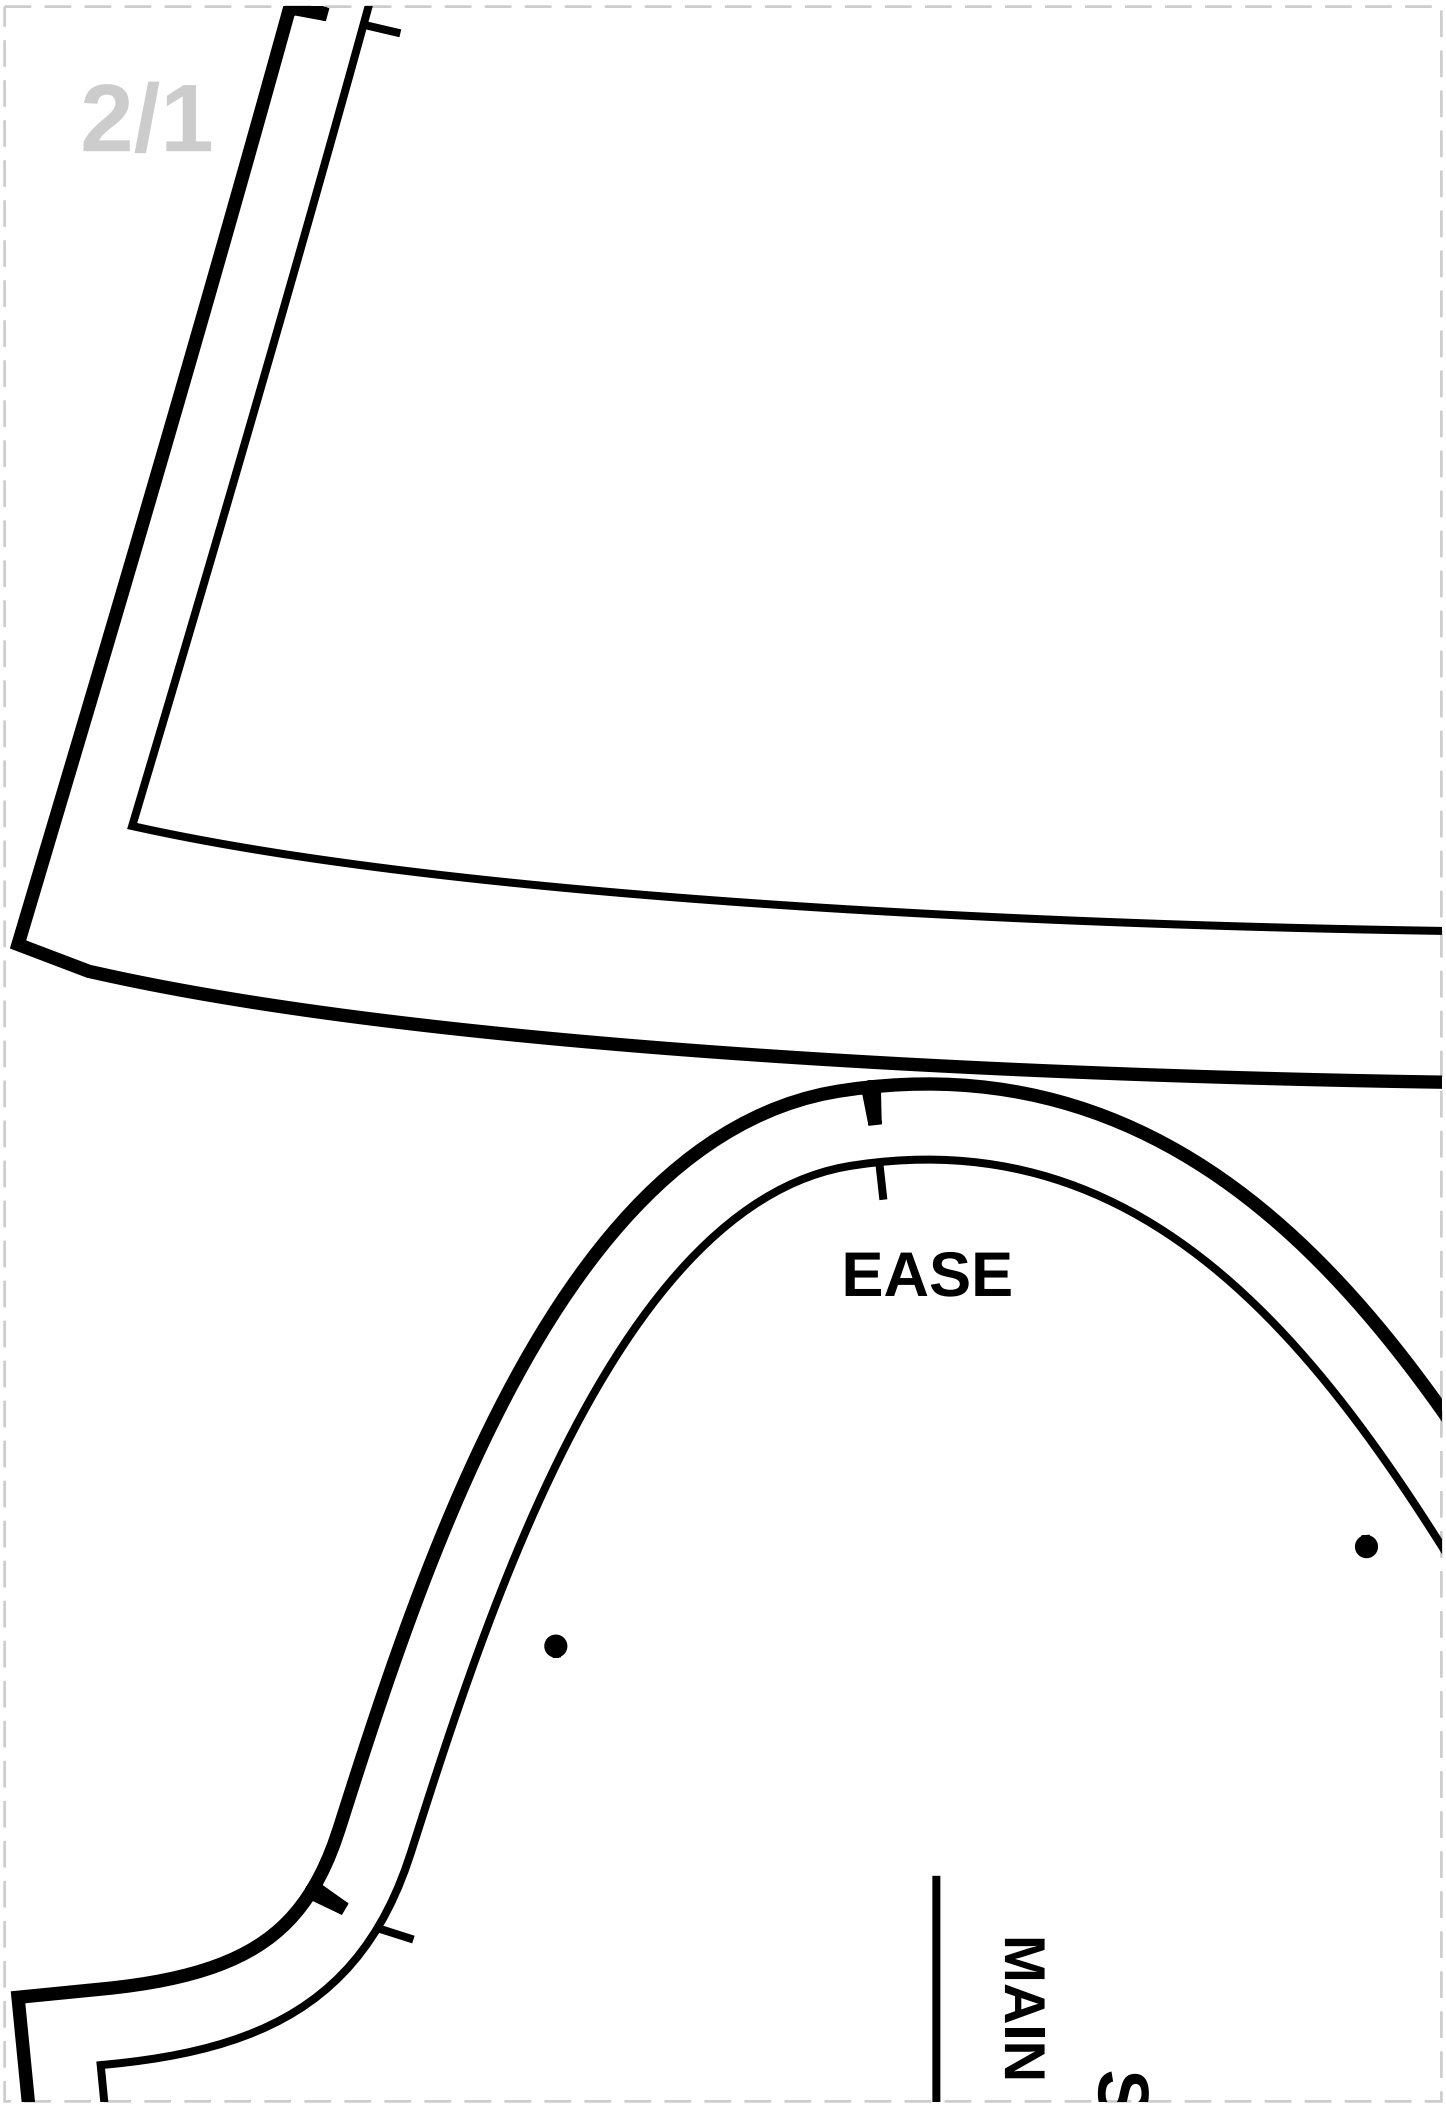
2/1
EASE
MAIN

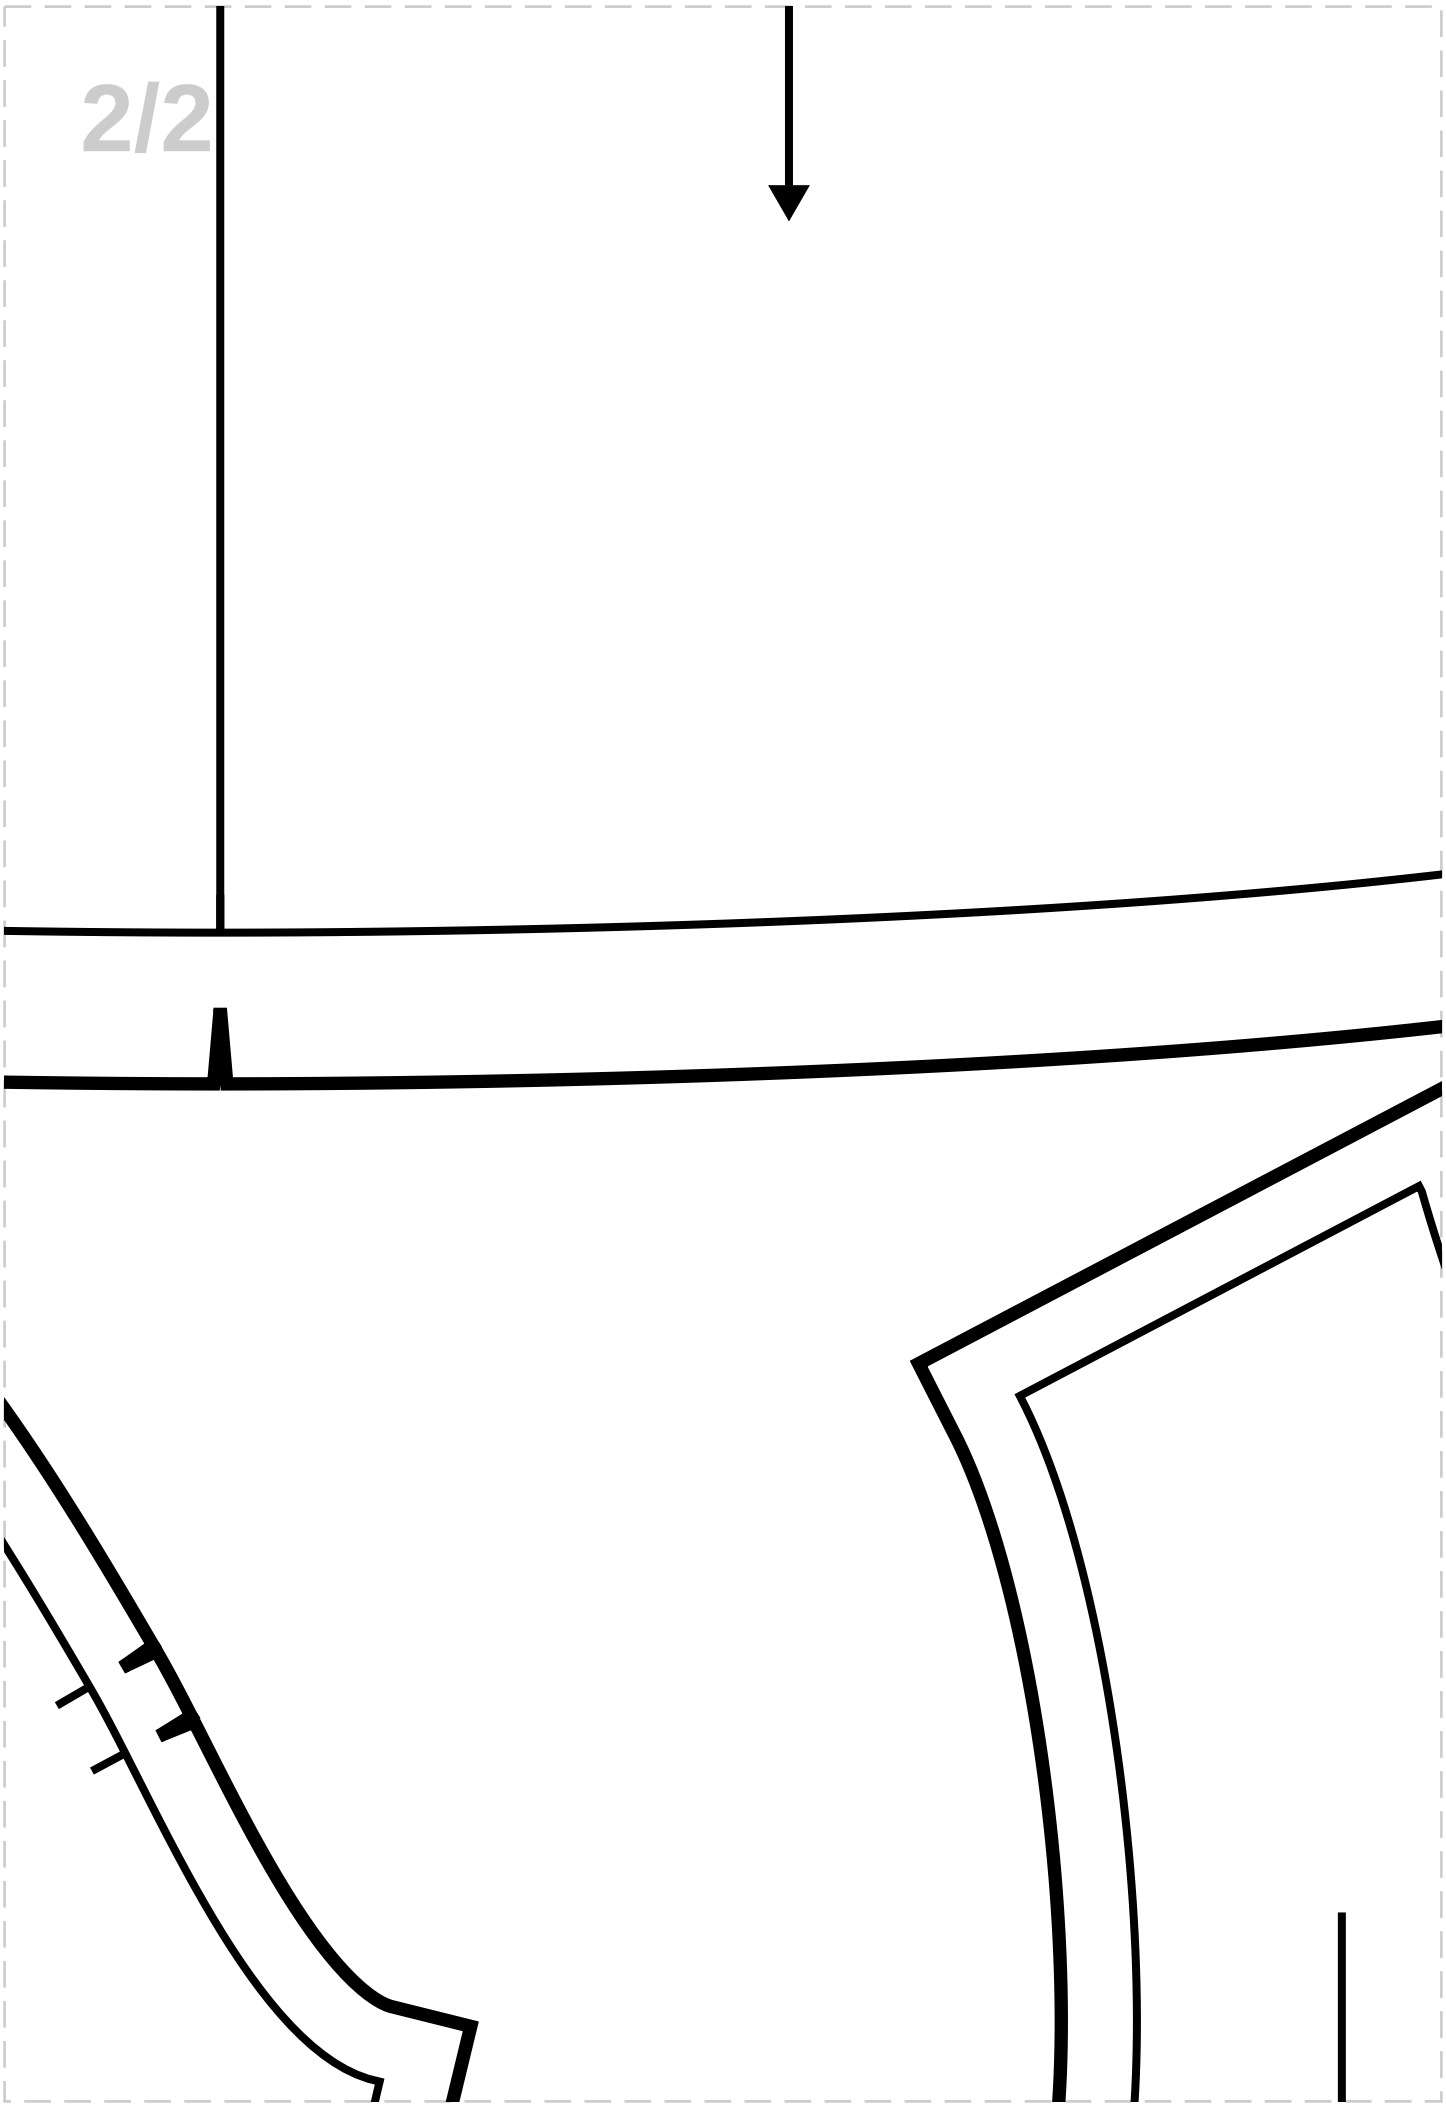

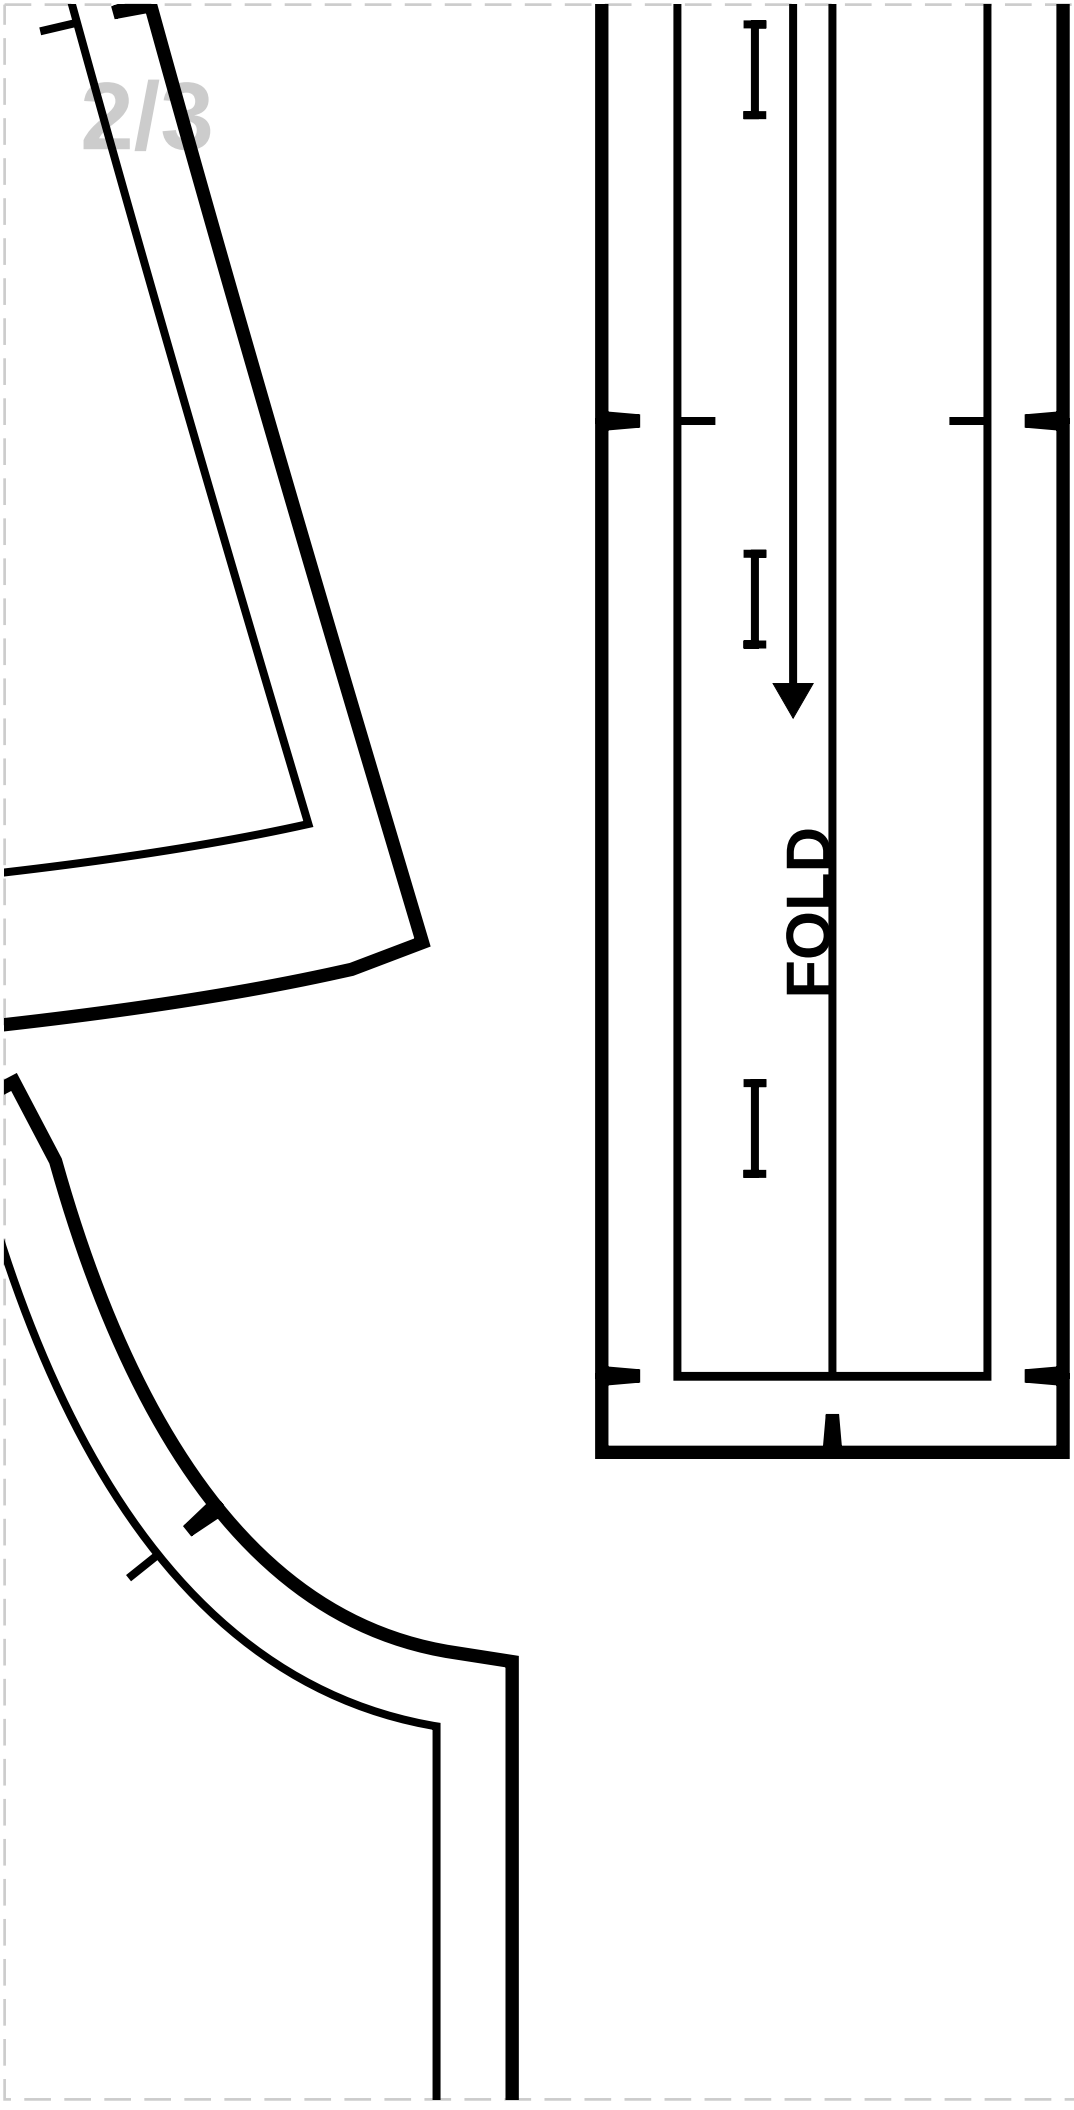

FOLD

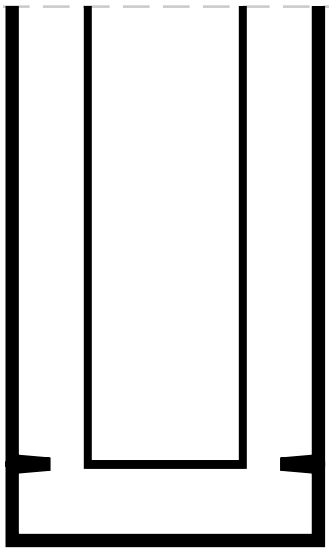


4


SLEEVE


FABRIC: Cut 2

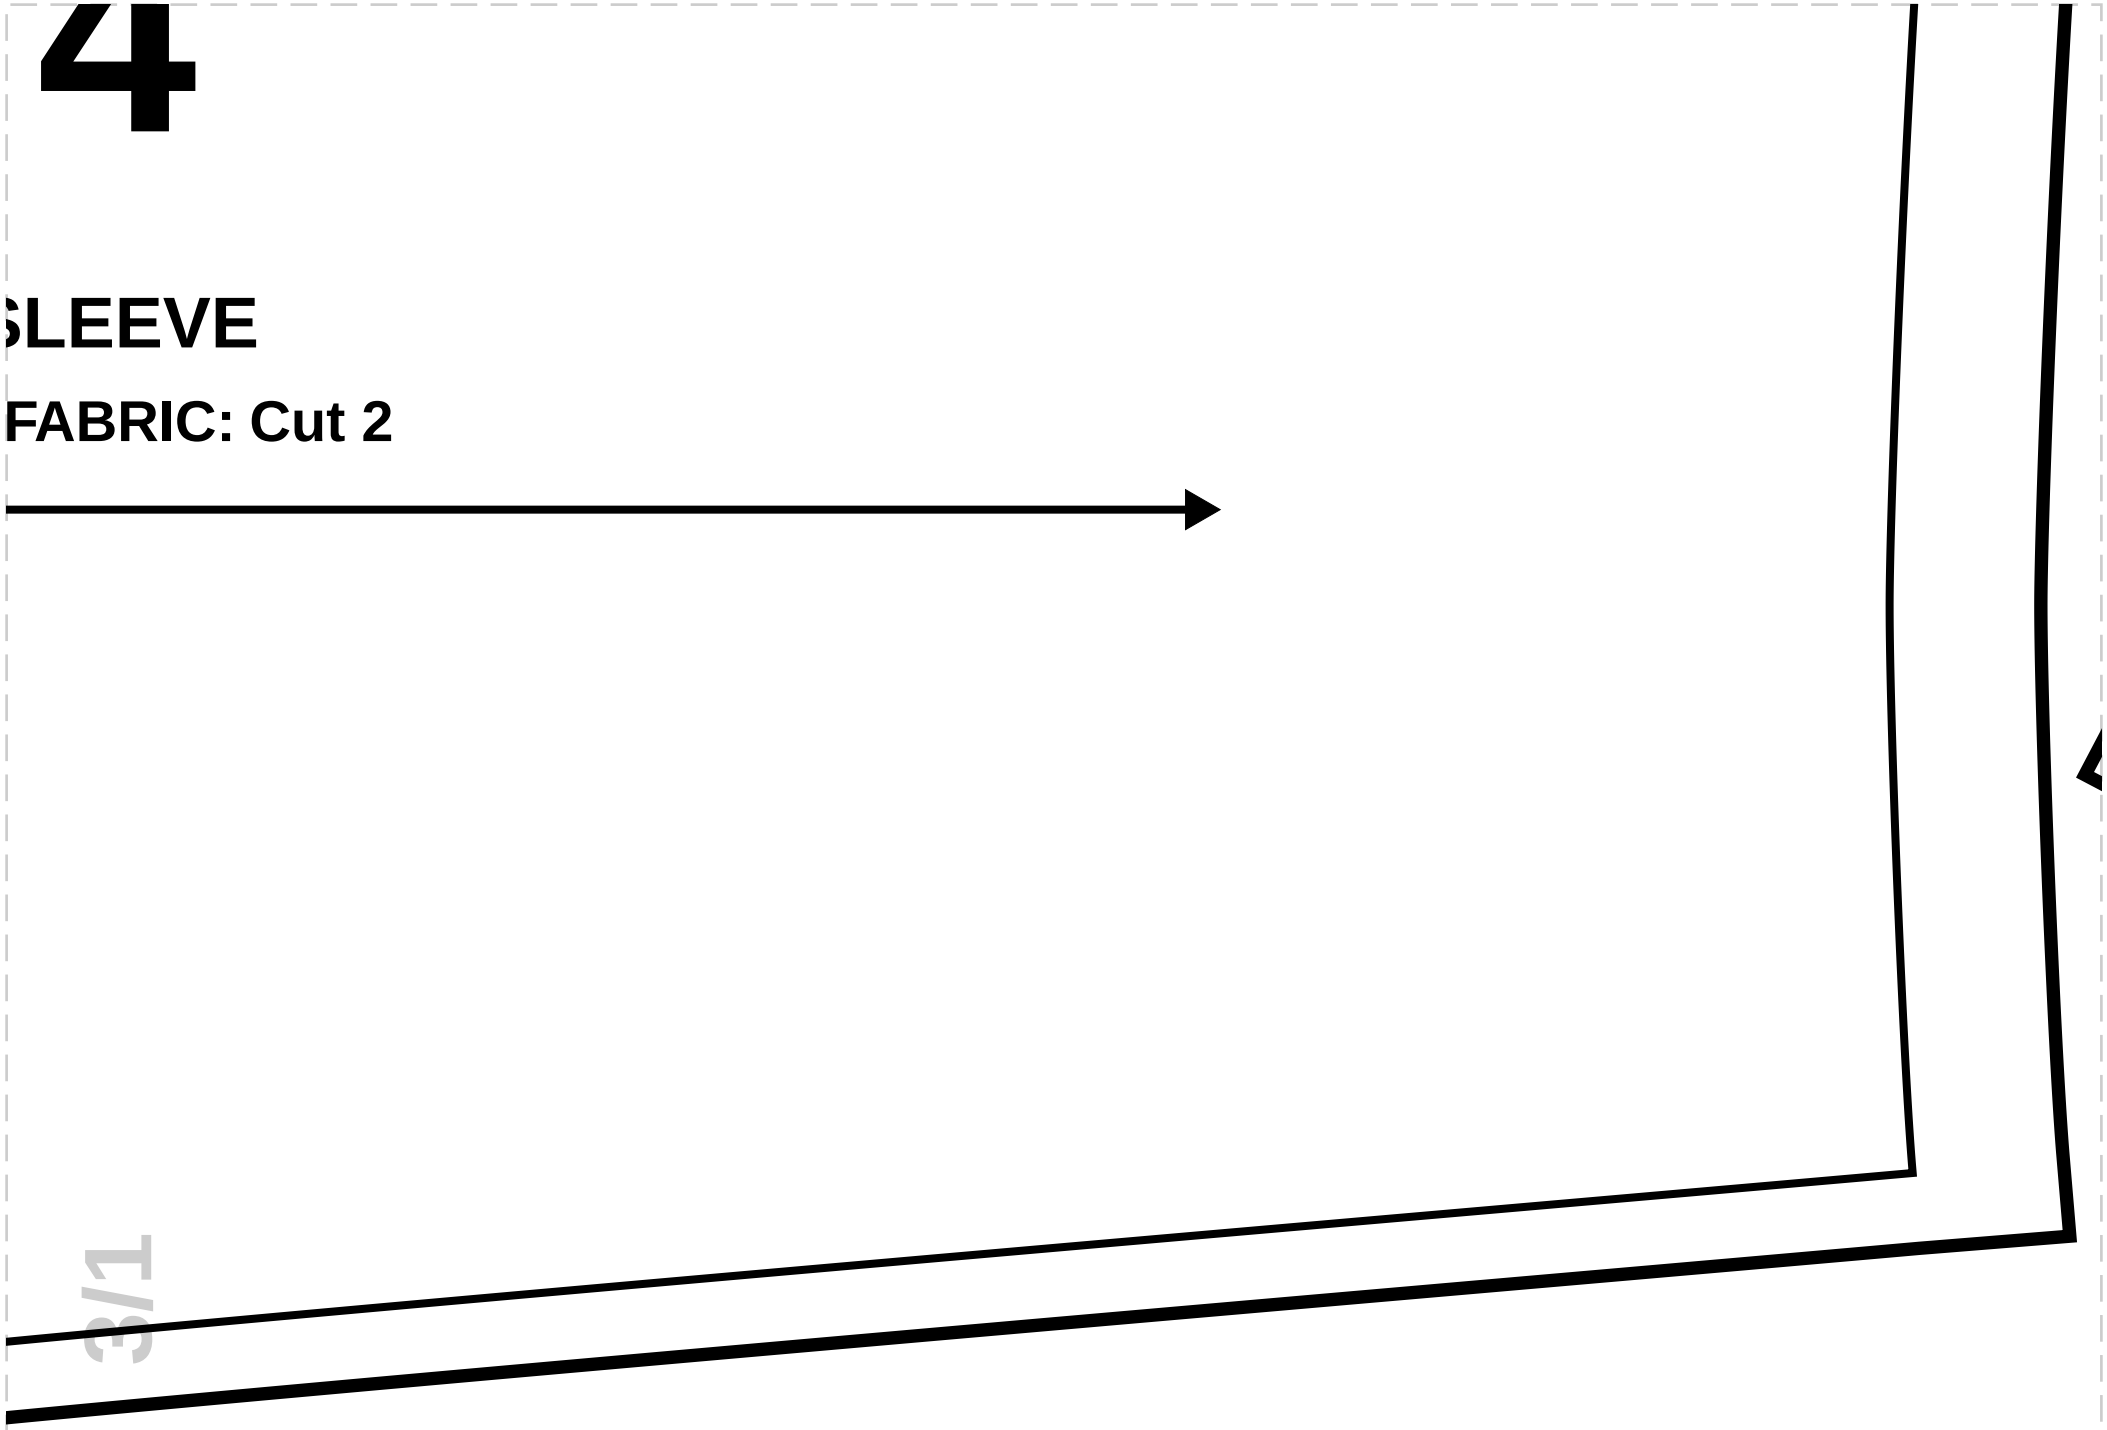

3/1

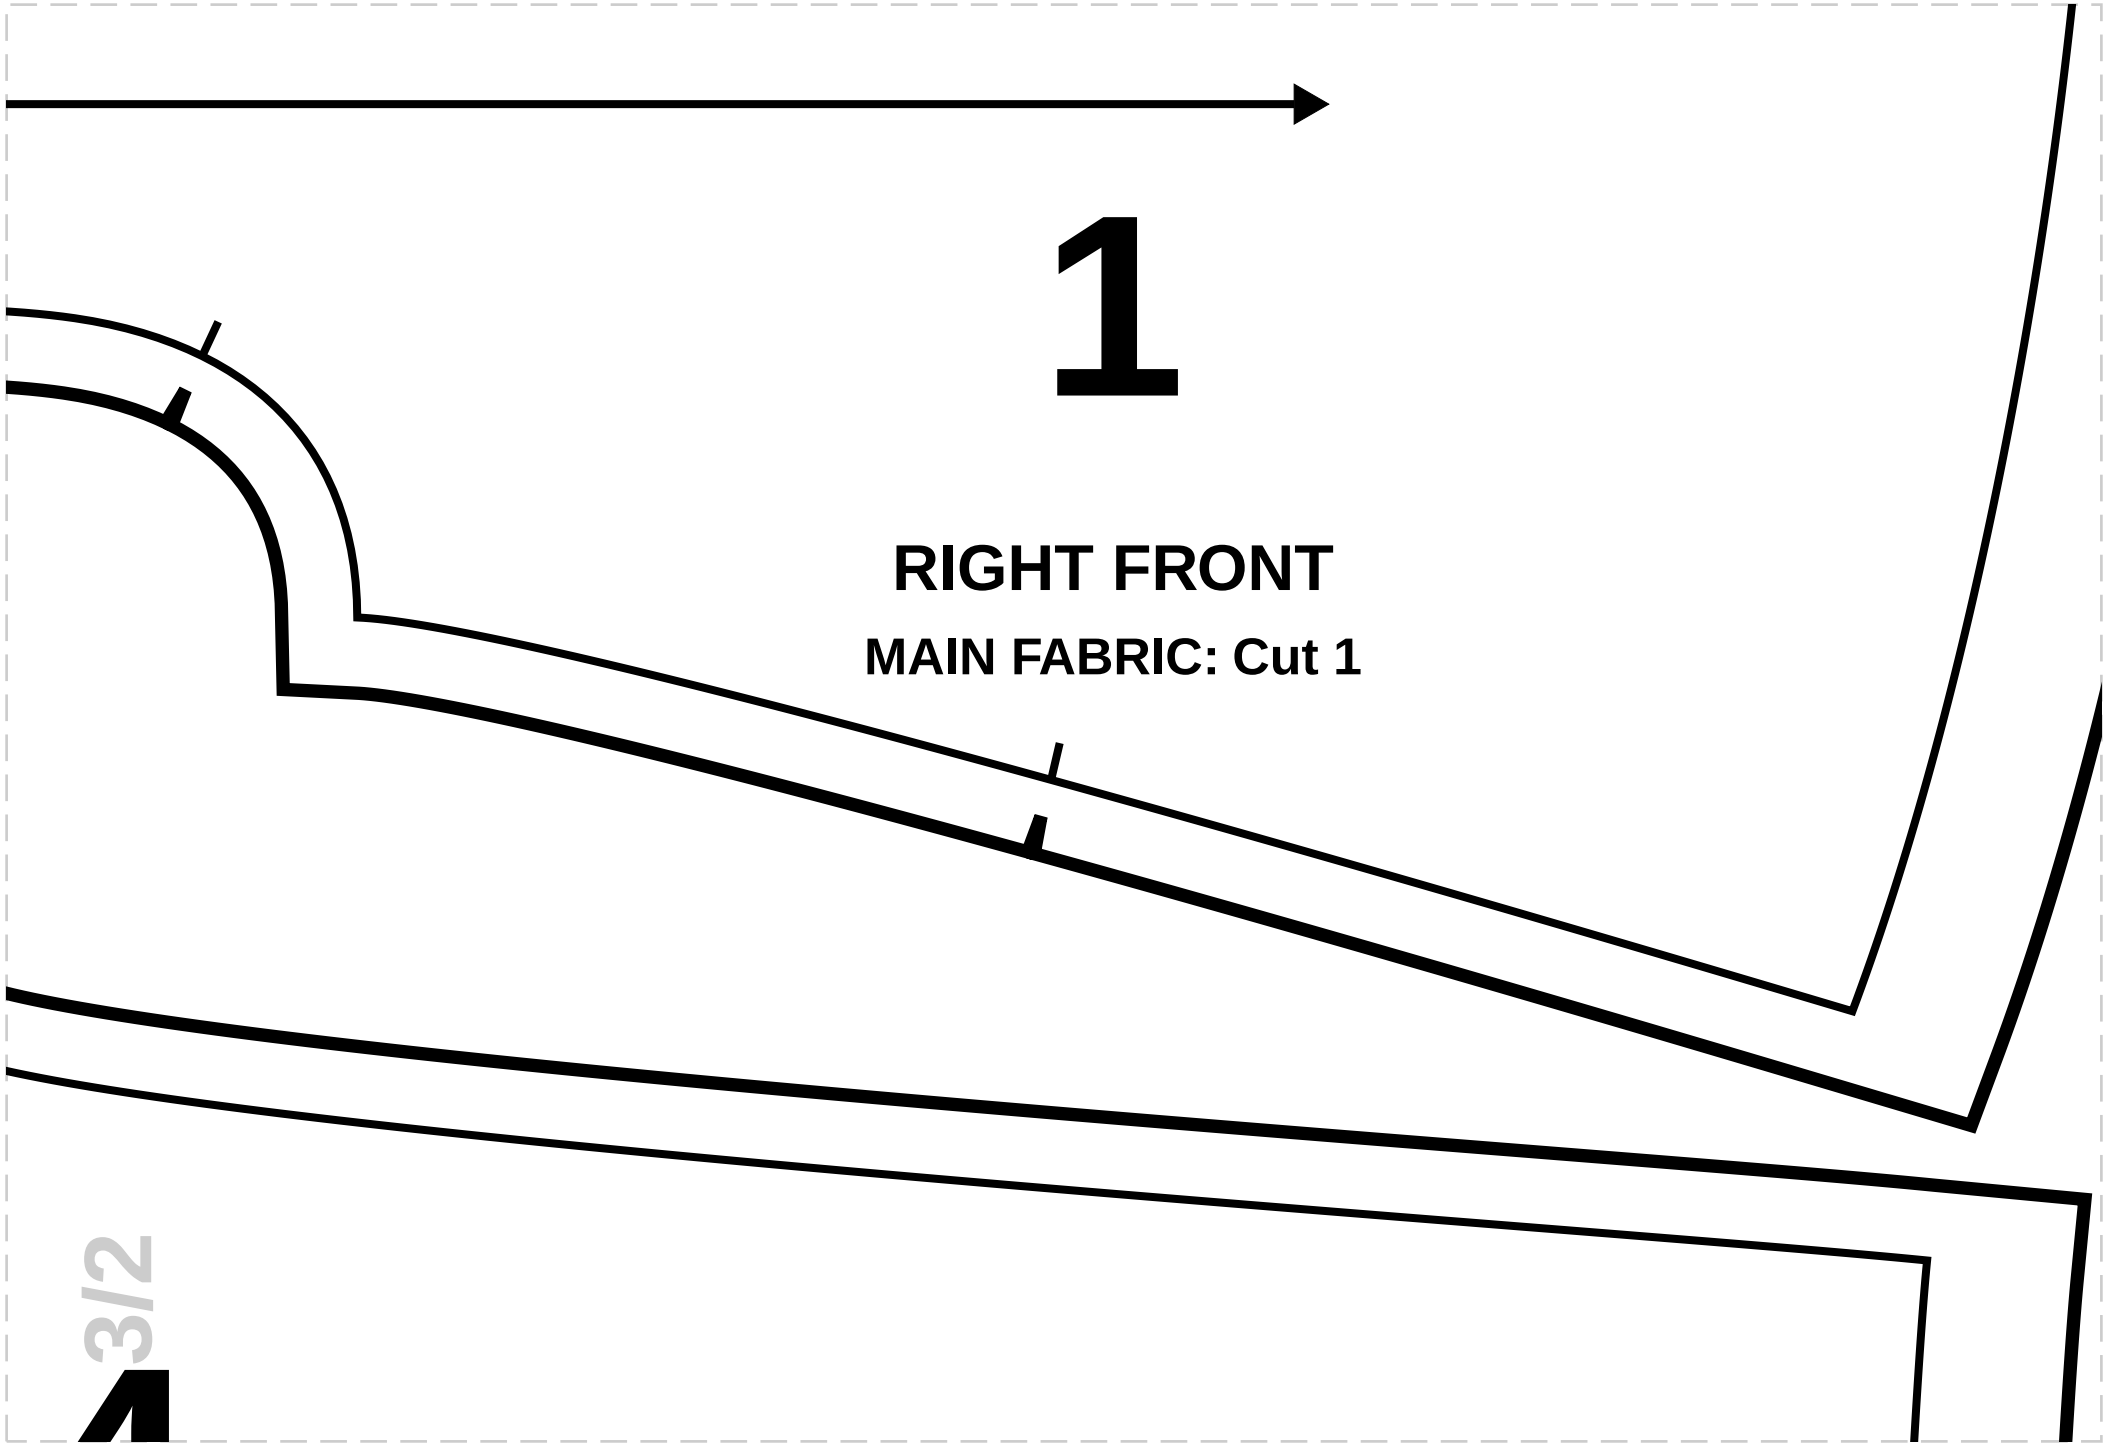
1
RIGHT FRONT
MAIN FABRIC: Cut 1
3/2

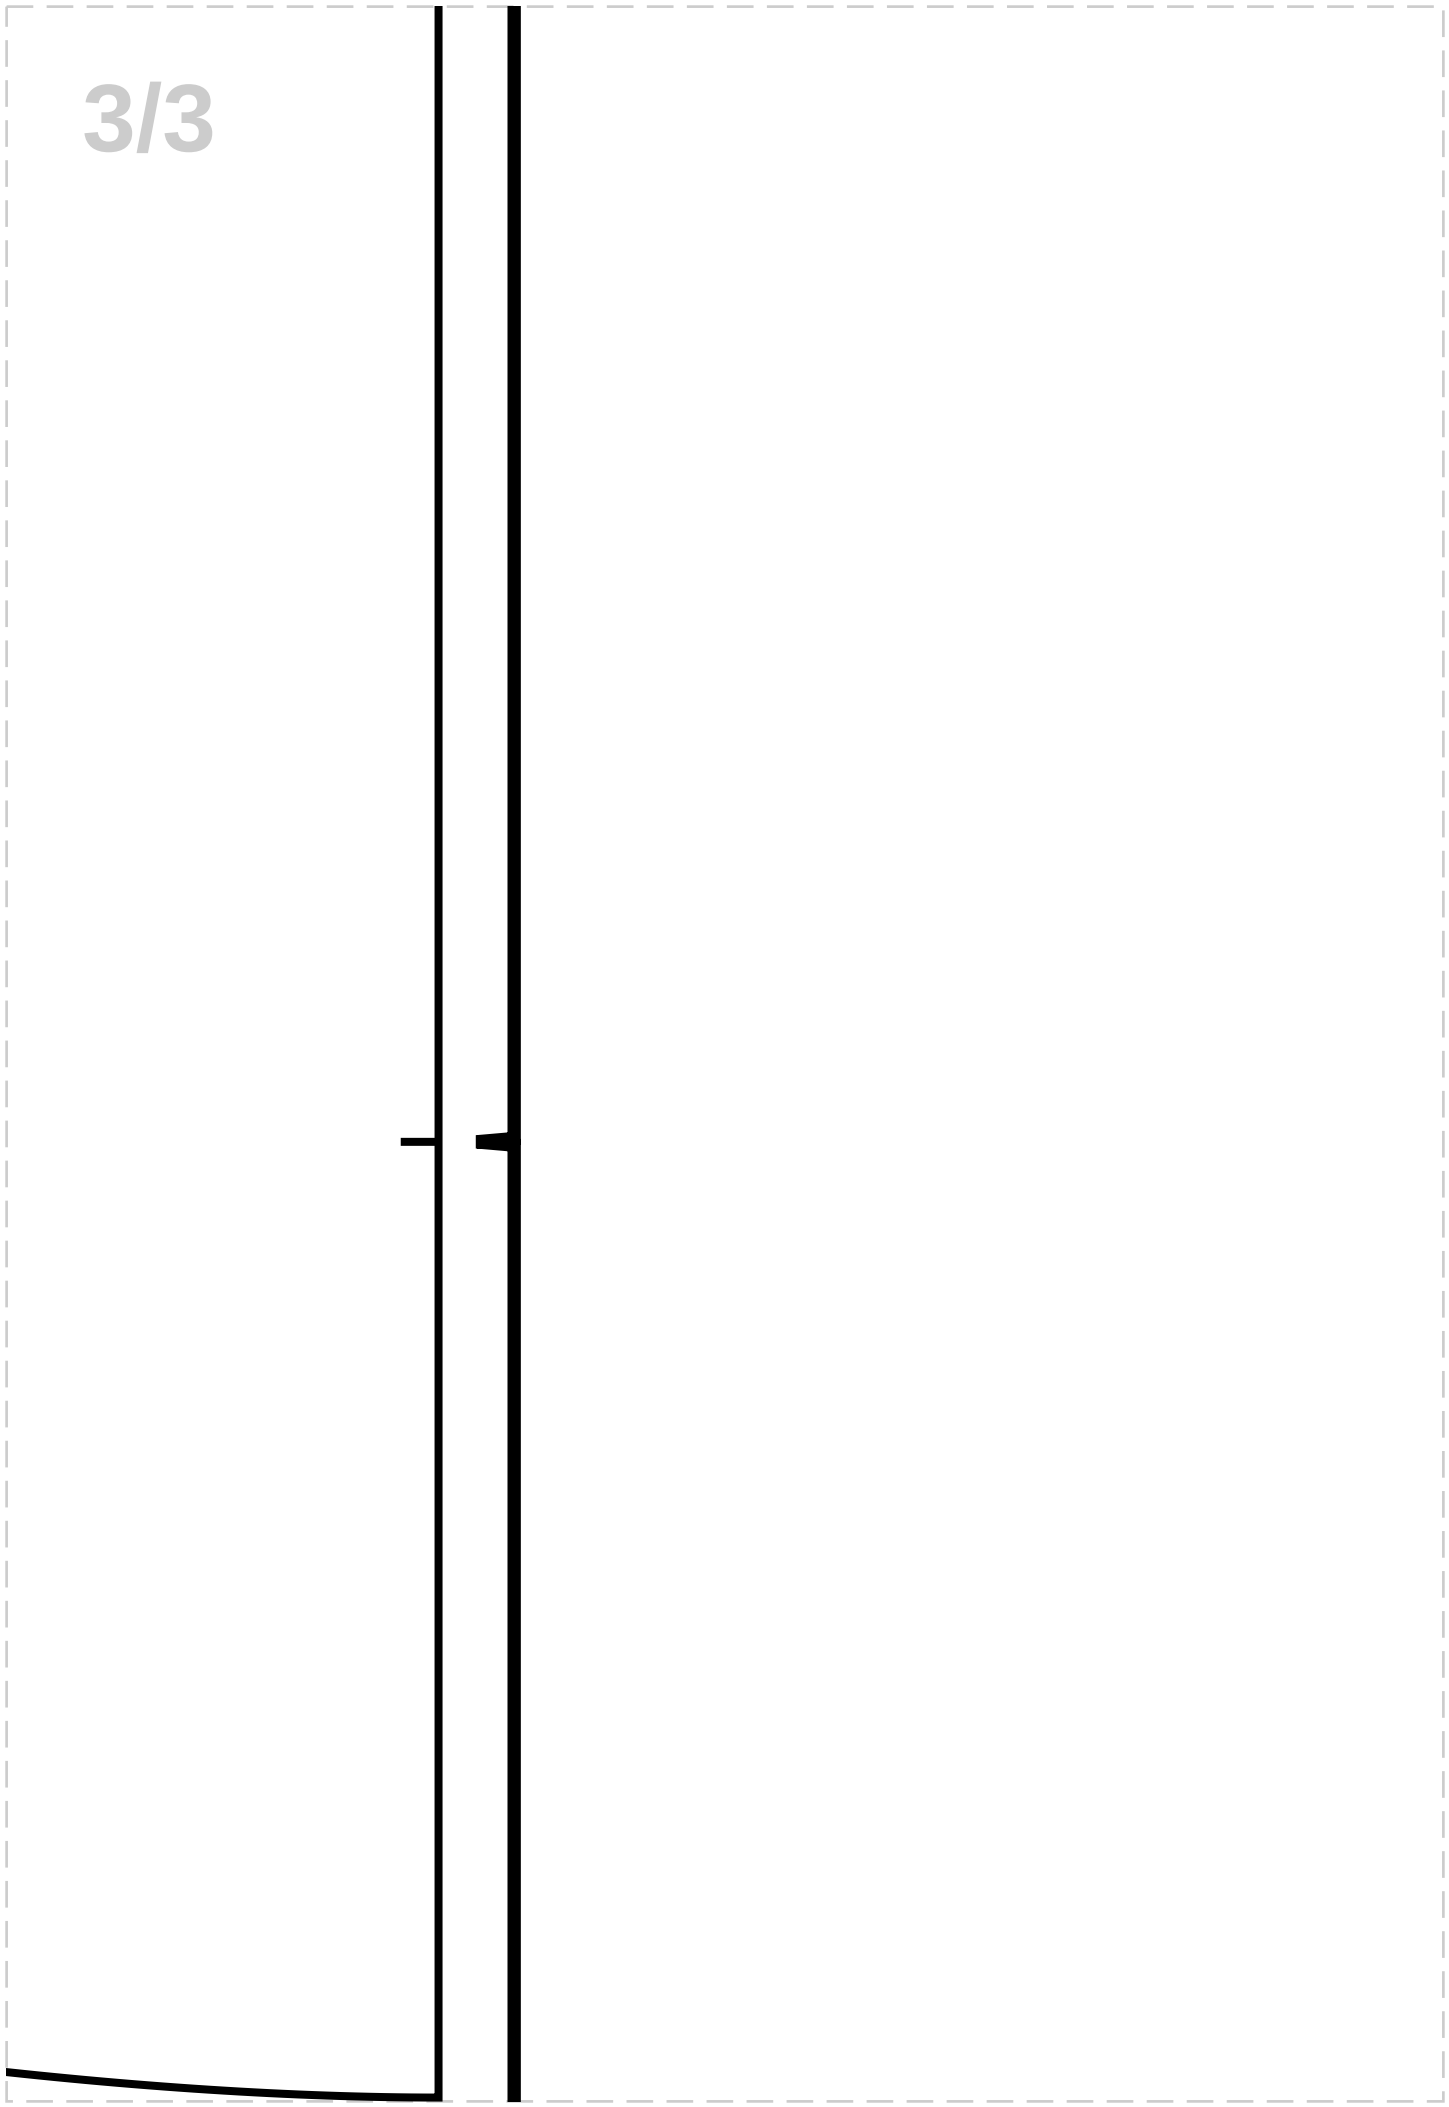

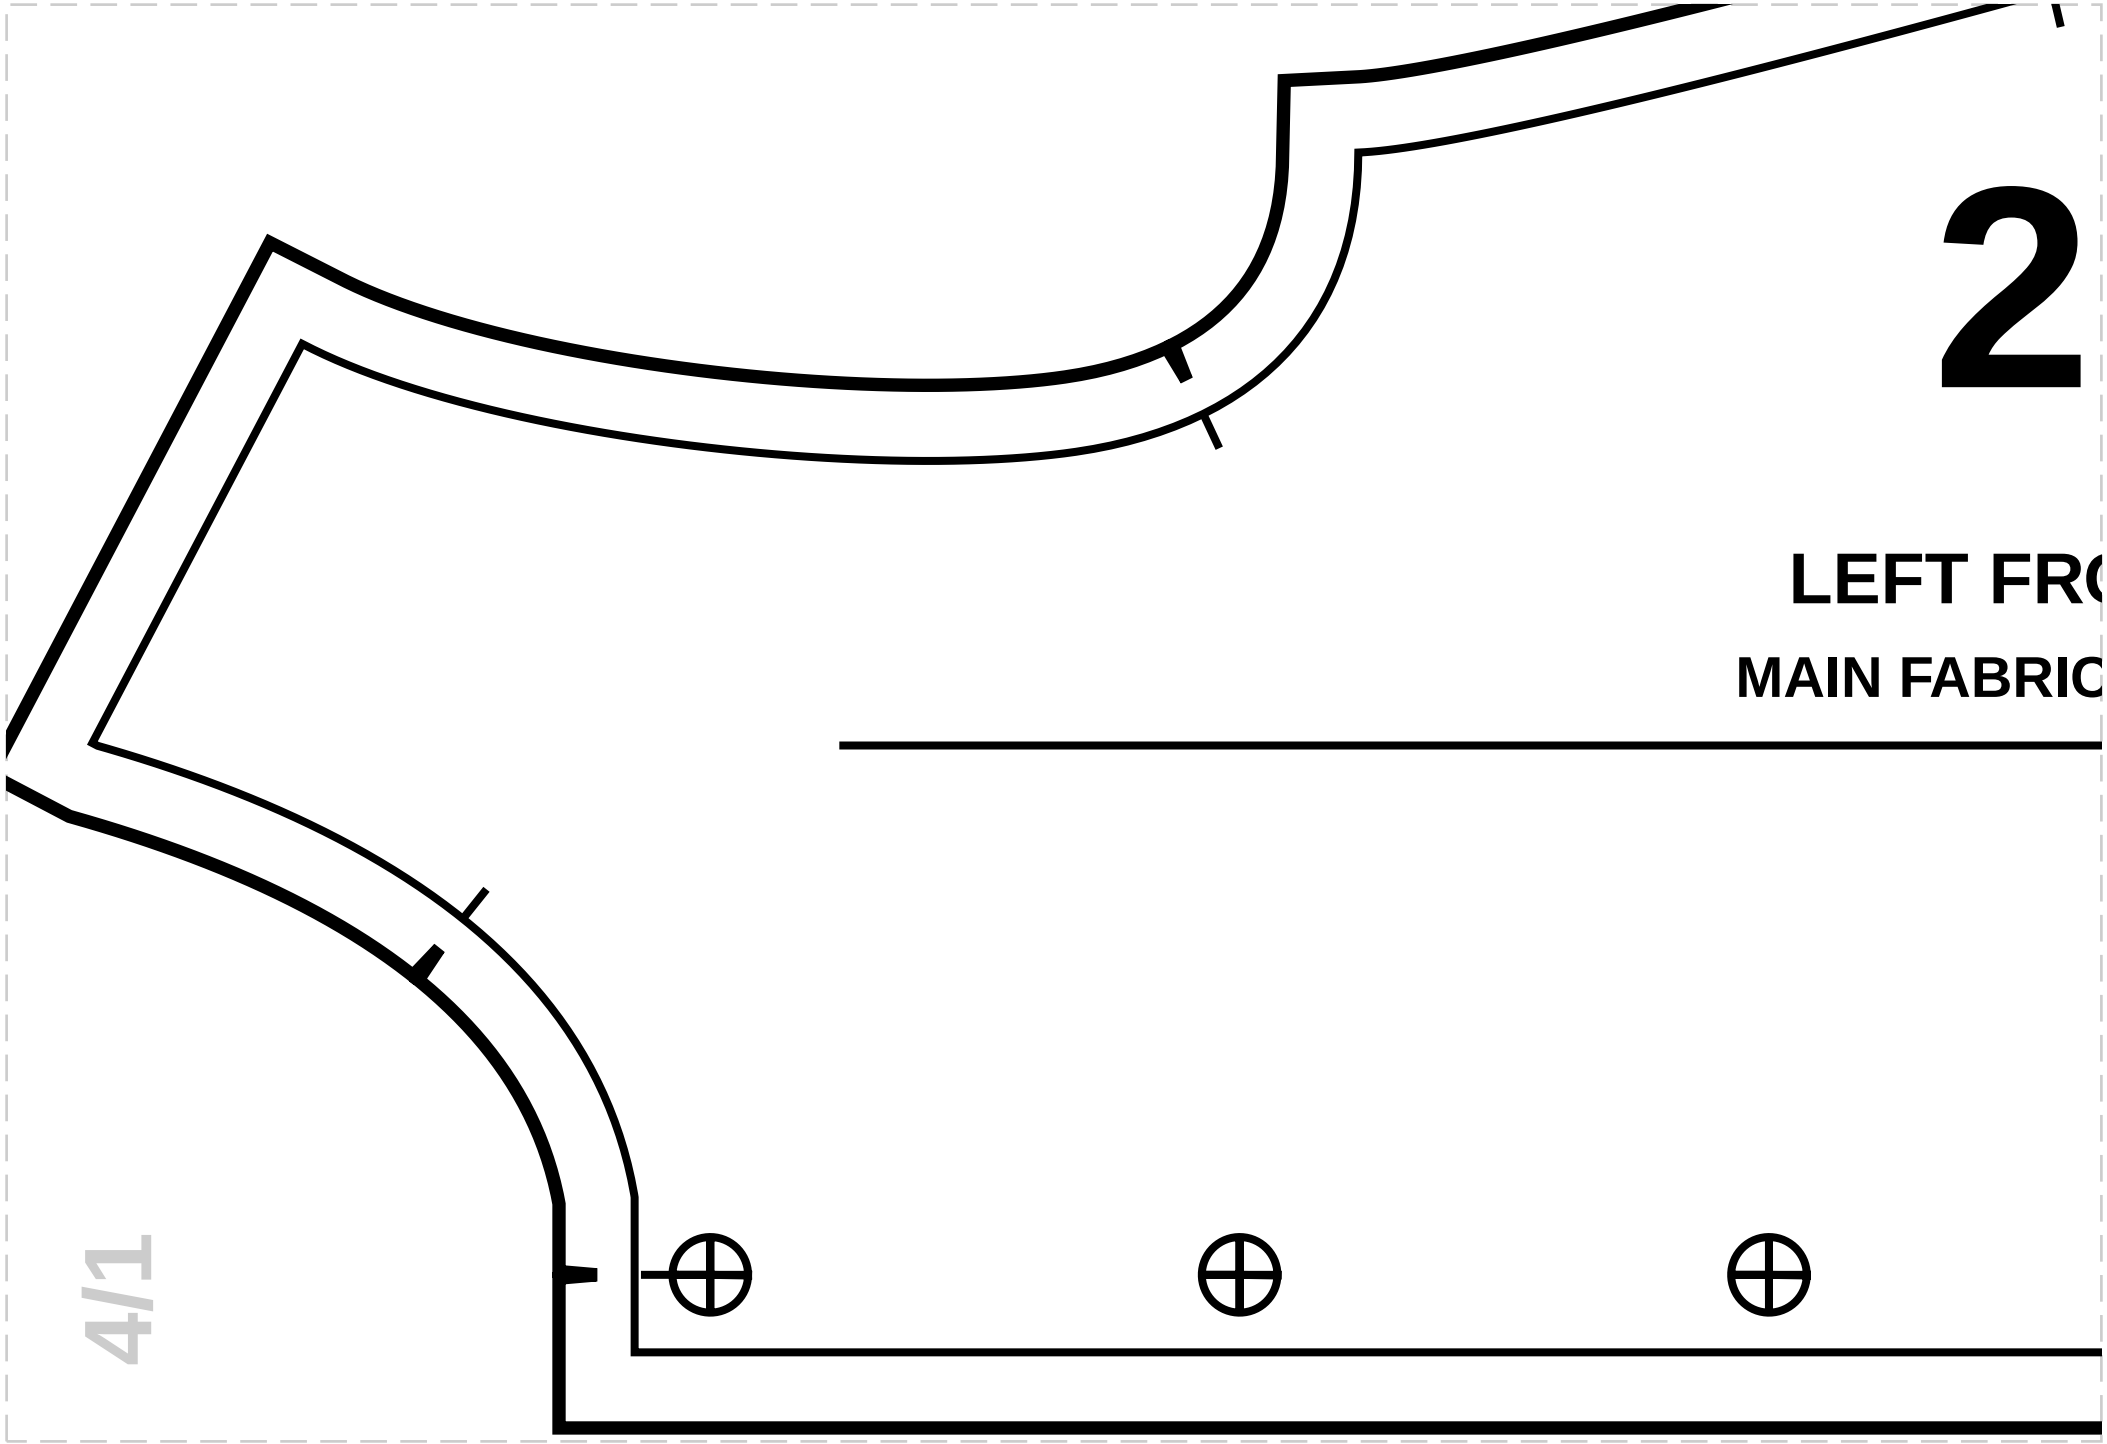



2


LEFT FR

MAIN FABRIC

4/1

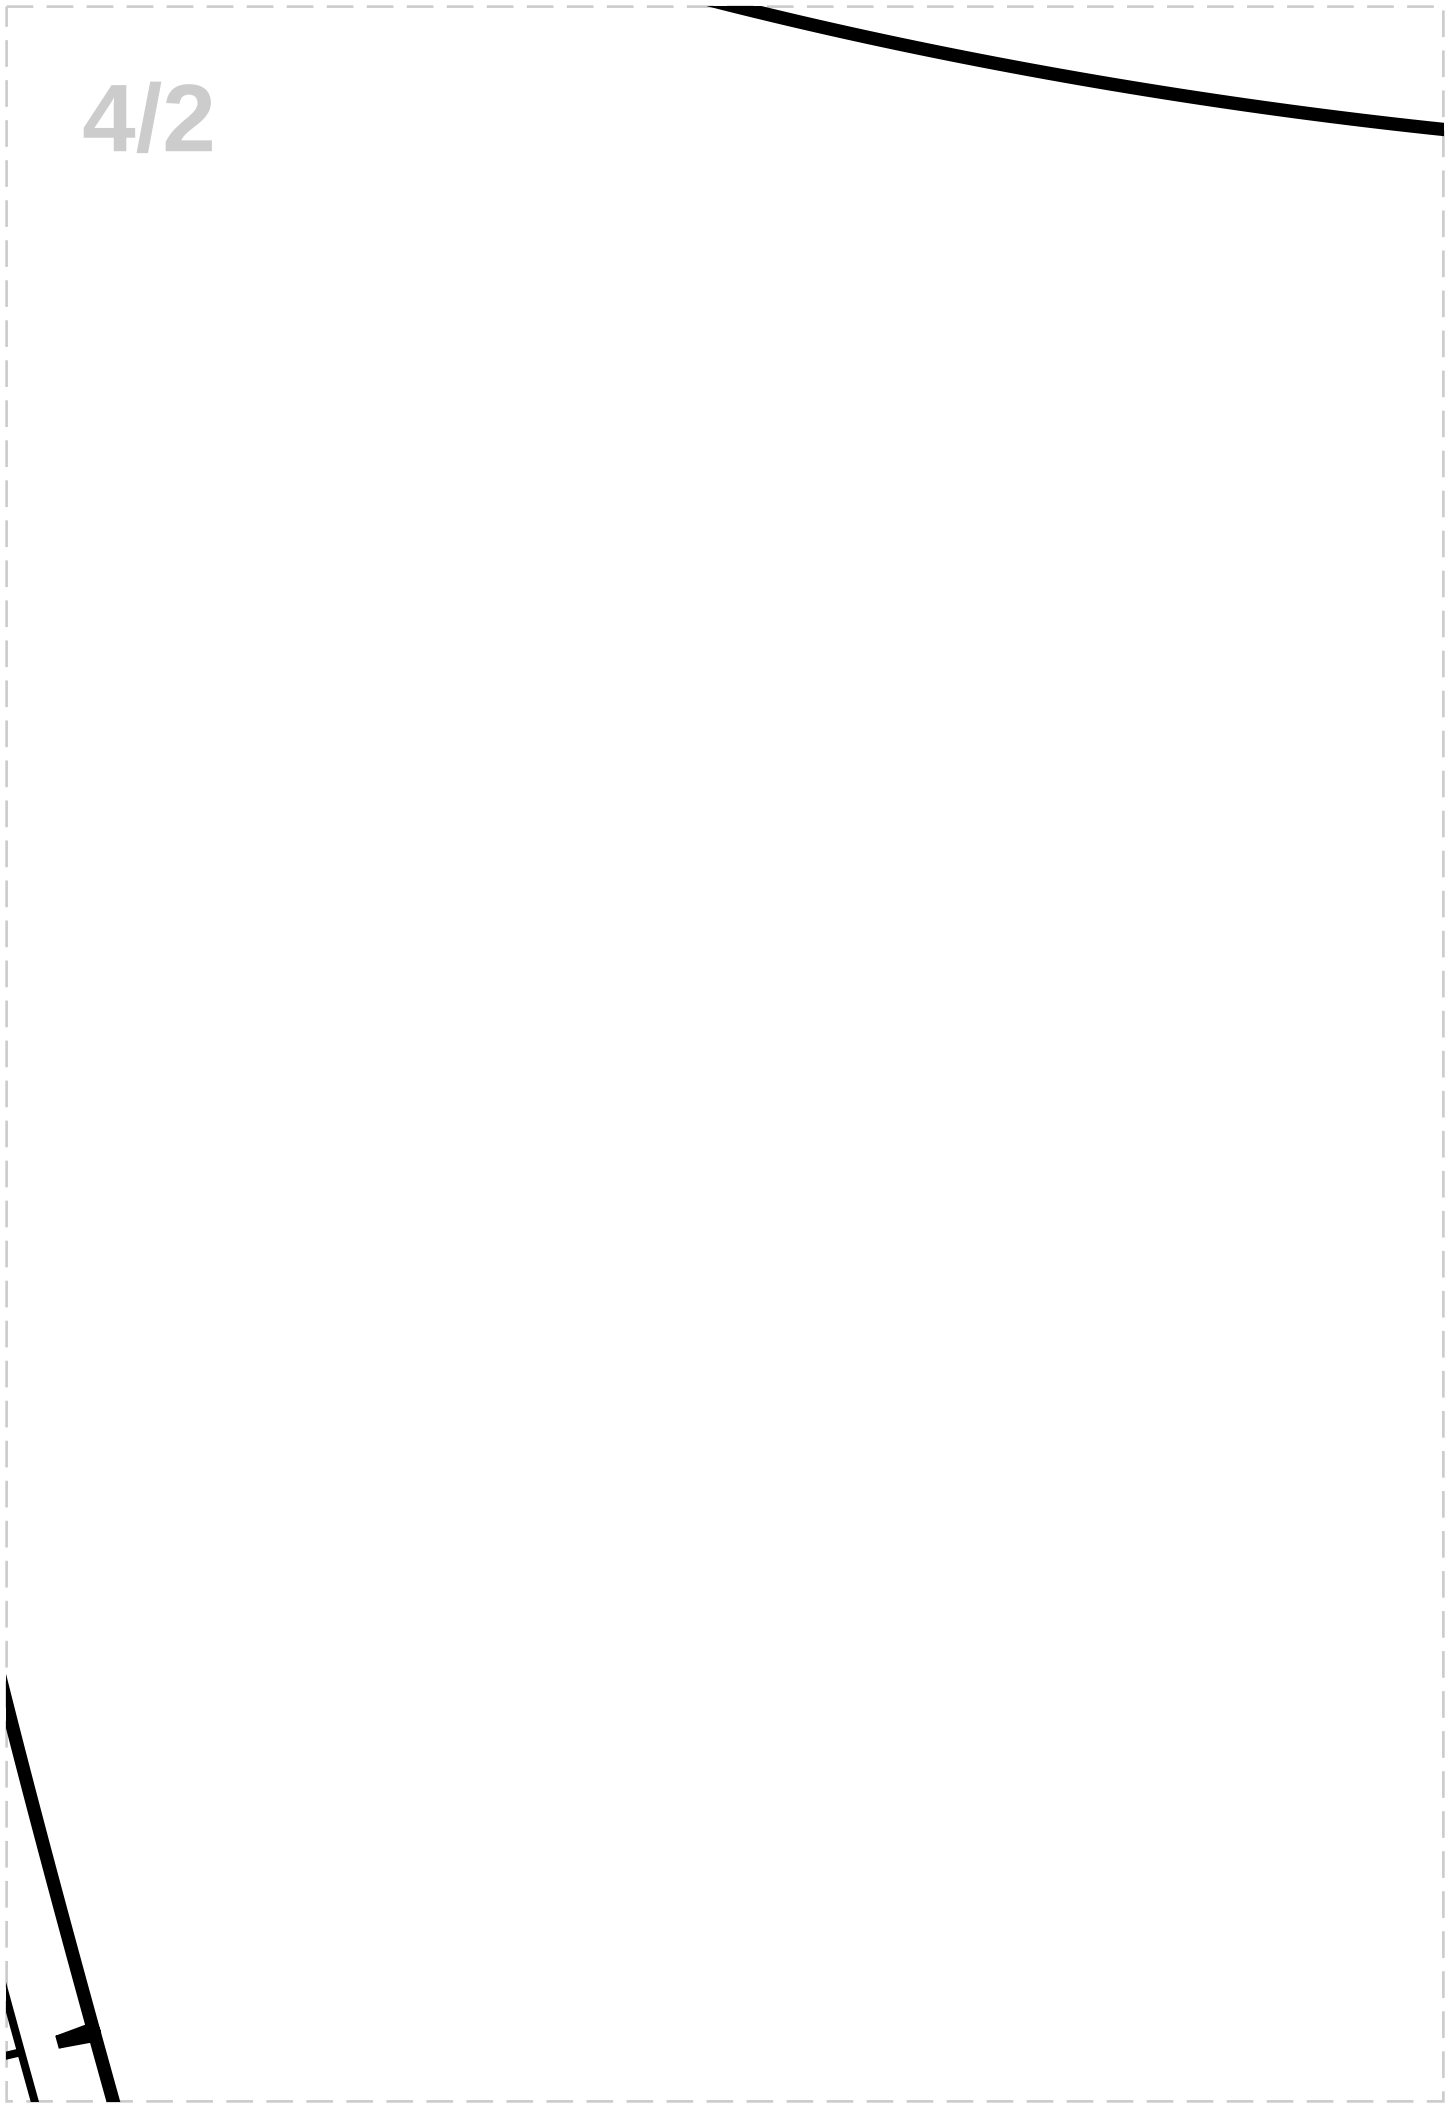

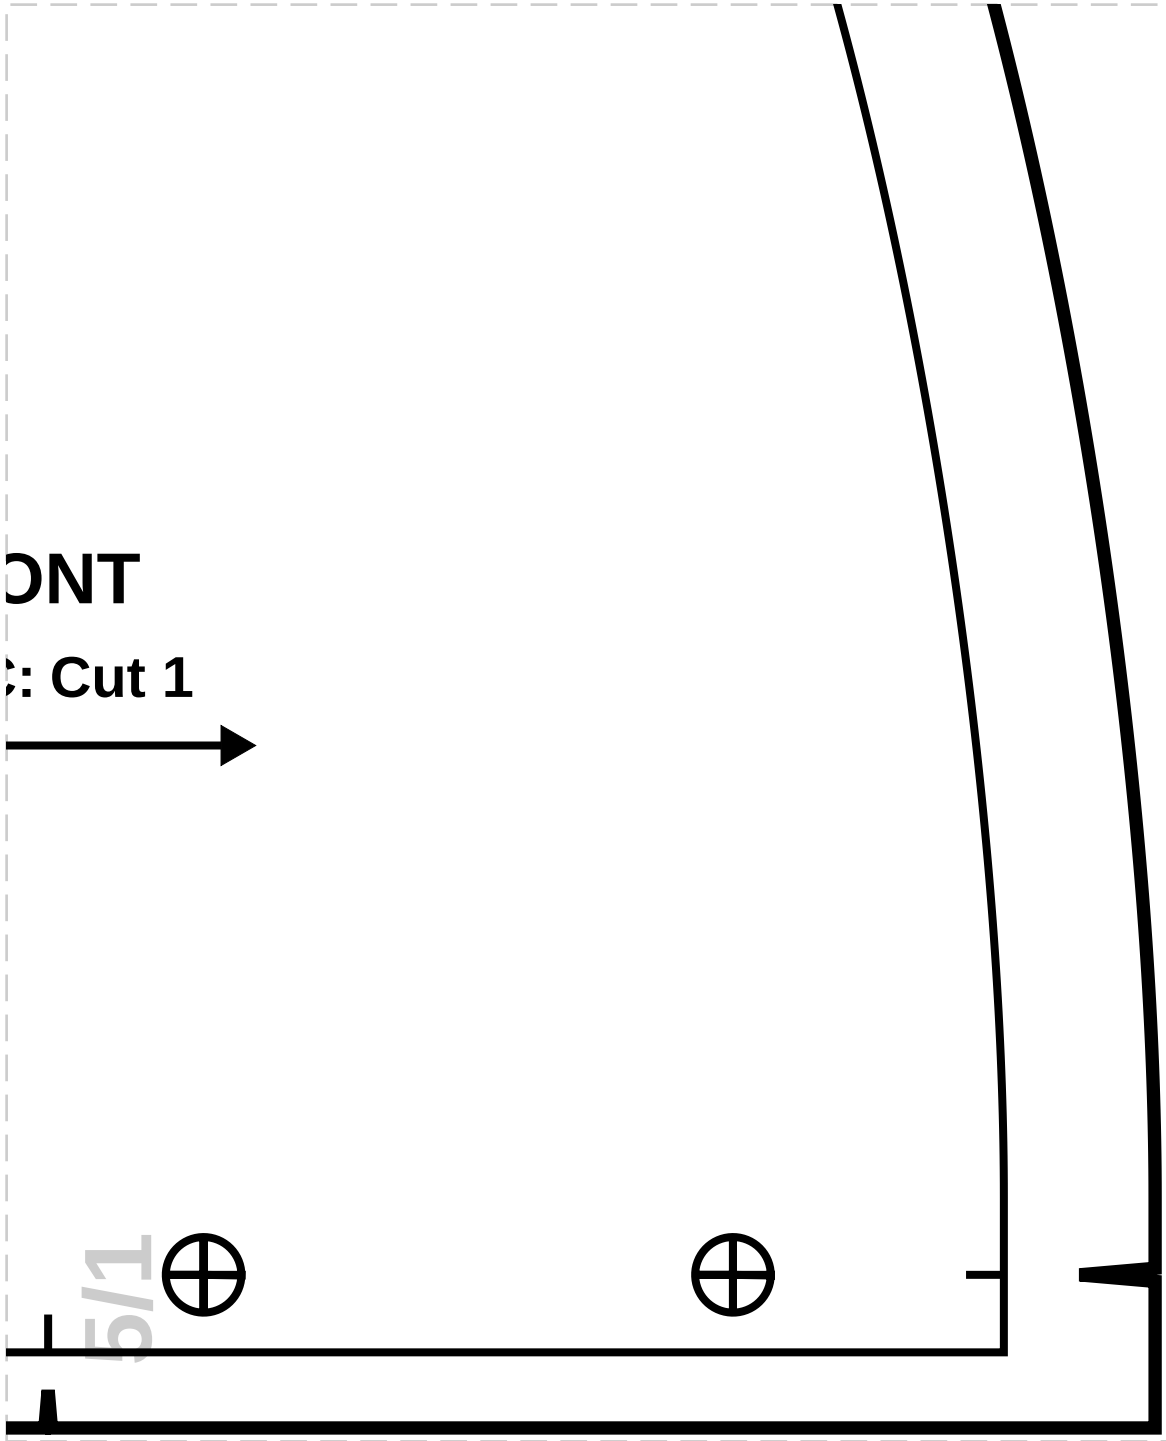
ONT
: Cut 1

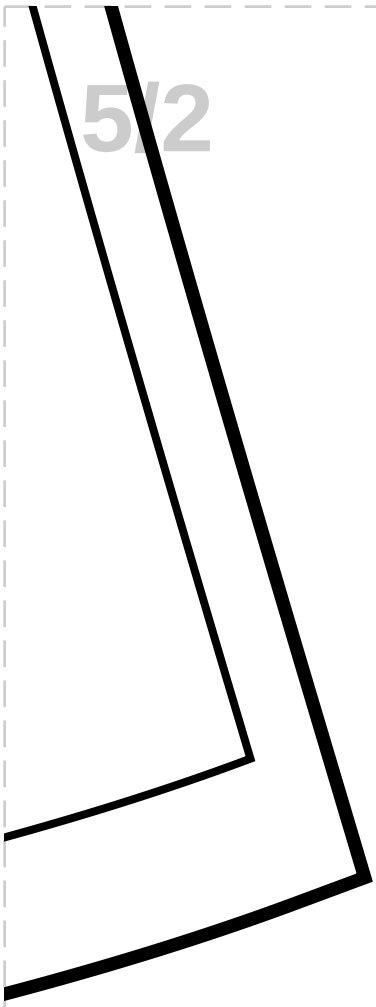

5/3

5/4