cozysewpatterns

Print this Calibration Test page first!

Size: Height: 91.4, Bust: 53.3, Waist: 48.9, Hips: 52.7
SIZE 2 91

Notes

How to print

Printing


Once your Calibration Test Page has been printed, measure the 4”x 4” (10cm) scale box with a ruler. If the lengths match, you can confidently print your pattern. If the rulers do not match, set your print settings to 100% or Actual and retry.

Cutting

Your printouts will always have a dashed border to perfectly match your sheets. Cut off the right edge of each page. Be careful not to cut beyond the dashed mark, otherwise your patterns will not align accurately.

Tapping

Group each sheet by the second number marked on each pate i.e. in a group 1, there are: 1/1, 2/1, 3/1, 4/1, etc. In a group 2: 1/2, 2/2 etc. 2. Place page 1/1 on top of the page 2/1, overlapping the right side edge. Match corners and crosses and secure with a pin or tape. Then use a scotch tape to permanently attach the sheets together.

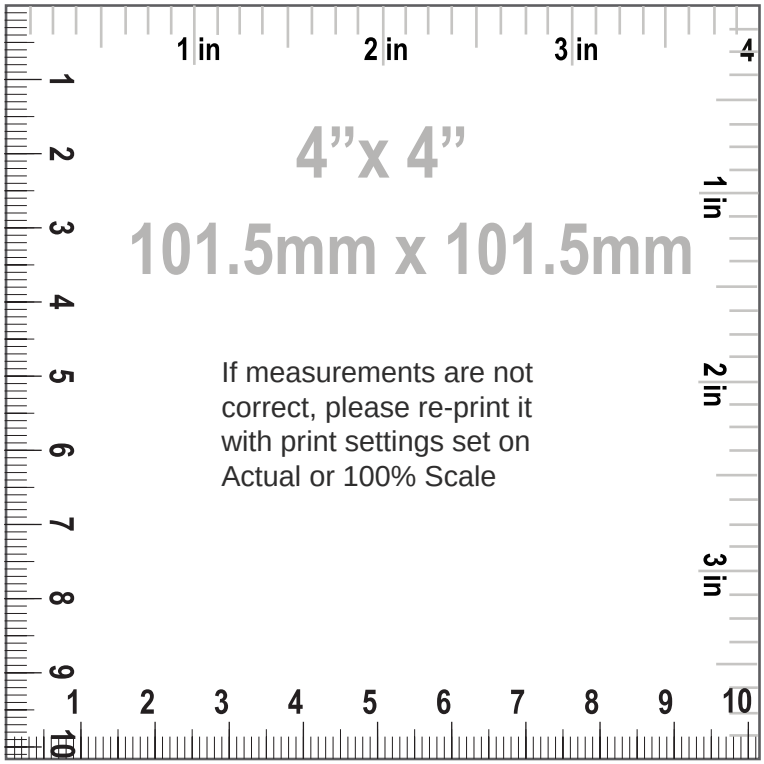

SIZE 2 91
Seam Allowance: 1 (3/8 in)

Pattern pieces:

1. "RIGHT FRONT", MAIN FABRIC: Cut 1
2. "LEFT FRONT", MAIN FABRIC: Cut 1
3. "BACK", MAIN FABRIC: Cut 1
4. "SLEEVE", MAIN FABRIC: Cut 2
5. "LEFT FRONT BUTTON FACING", MAIN FABRIC, FUSIBLE INTERFACING: Cut 1
6. "BACK NECK FACING", MAIN FABRIC, FUSIBLE INTERFACING: Cut 1
7. "COLLAR", MAIN FABRIC, FUSIBLE INTERFACING: Cut 2
8. "FRONT CLOSURE FACING", MAIN FABRIC, FUSIBLE INTERFACING: Cut 2
9. "RIGHT FRONT PLACKET", MAIN FABRIC, FUSIBLE INTERFACING: Cut 1


Pattern Specs (Circumferences are divided by 2):

1. Hem max 3.00 none (1 1/8 in)
2. Seam allowance max 2.00 none (3/4 in)
3. Stretch factor 1.00 none (3/8 in)
4. Stretch factor horizontal 1.00 none (3/8 in)
5. Stretch factor vertical 1.00 none (3/8 in)
6. Button diameter 1.00 cm (3/8 in)
7. Front buttons quantity 5.00 pc
8. Front length from HPS to hem 37.58 cm (14 3/4 in)
9. Across chest 29.15 cm (11 1/2 in)
10. Center front length to hem 30.18 cm (11 7/8 in)
11. Center back length to hem 33.83 cm (13 3/8 in)
12. Across front 20.75 cm (8 1/8 in)
13. Across back 21.22 cm (8 3/8 in)
14. Across shoulders 24.06 cm (9 1/2 in)
15. Side seam 18.75 cm (7 3/8 in)
16. Waist 32.98 cm (13 in)
17. Hemline sweep 38.43 cm (15 1/8 in)
18. Armhole length front 15.79 cm (6 1/4 in)
19. Armhole length back 17.09 cm (6 3/4 in)

20. Neck opening 13.64 cm (5 3/8 in)
21. Neckline length 37.01 cm (14 5/8 in)
22. Front neck drop 7.39 cm (2 7/8 in)
23. Back neck drop 2.54 cm (1 in)
24. Shoulder width 5.50 cm (2 1/8 in)
25. Placket length 30.18 cm (11 7/8 in)
26. Placket width 2.00 cm (3/4 in)
27. Collar width 9.50 cm (3 3/4 in)
28. Collar edges length 9.00 cm (3 1/2 in)
29. Sleeve length 34.55 cm (13 5/8 in)
30. Sleeve upper arm width 22.30 cm (8 3/4 in)
31. Sleeve opening 17.44 cm (6 7/8 in)

cozysewpatterns


Paper Size: LETTER;
Print Actual Size (100% Scale);

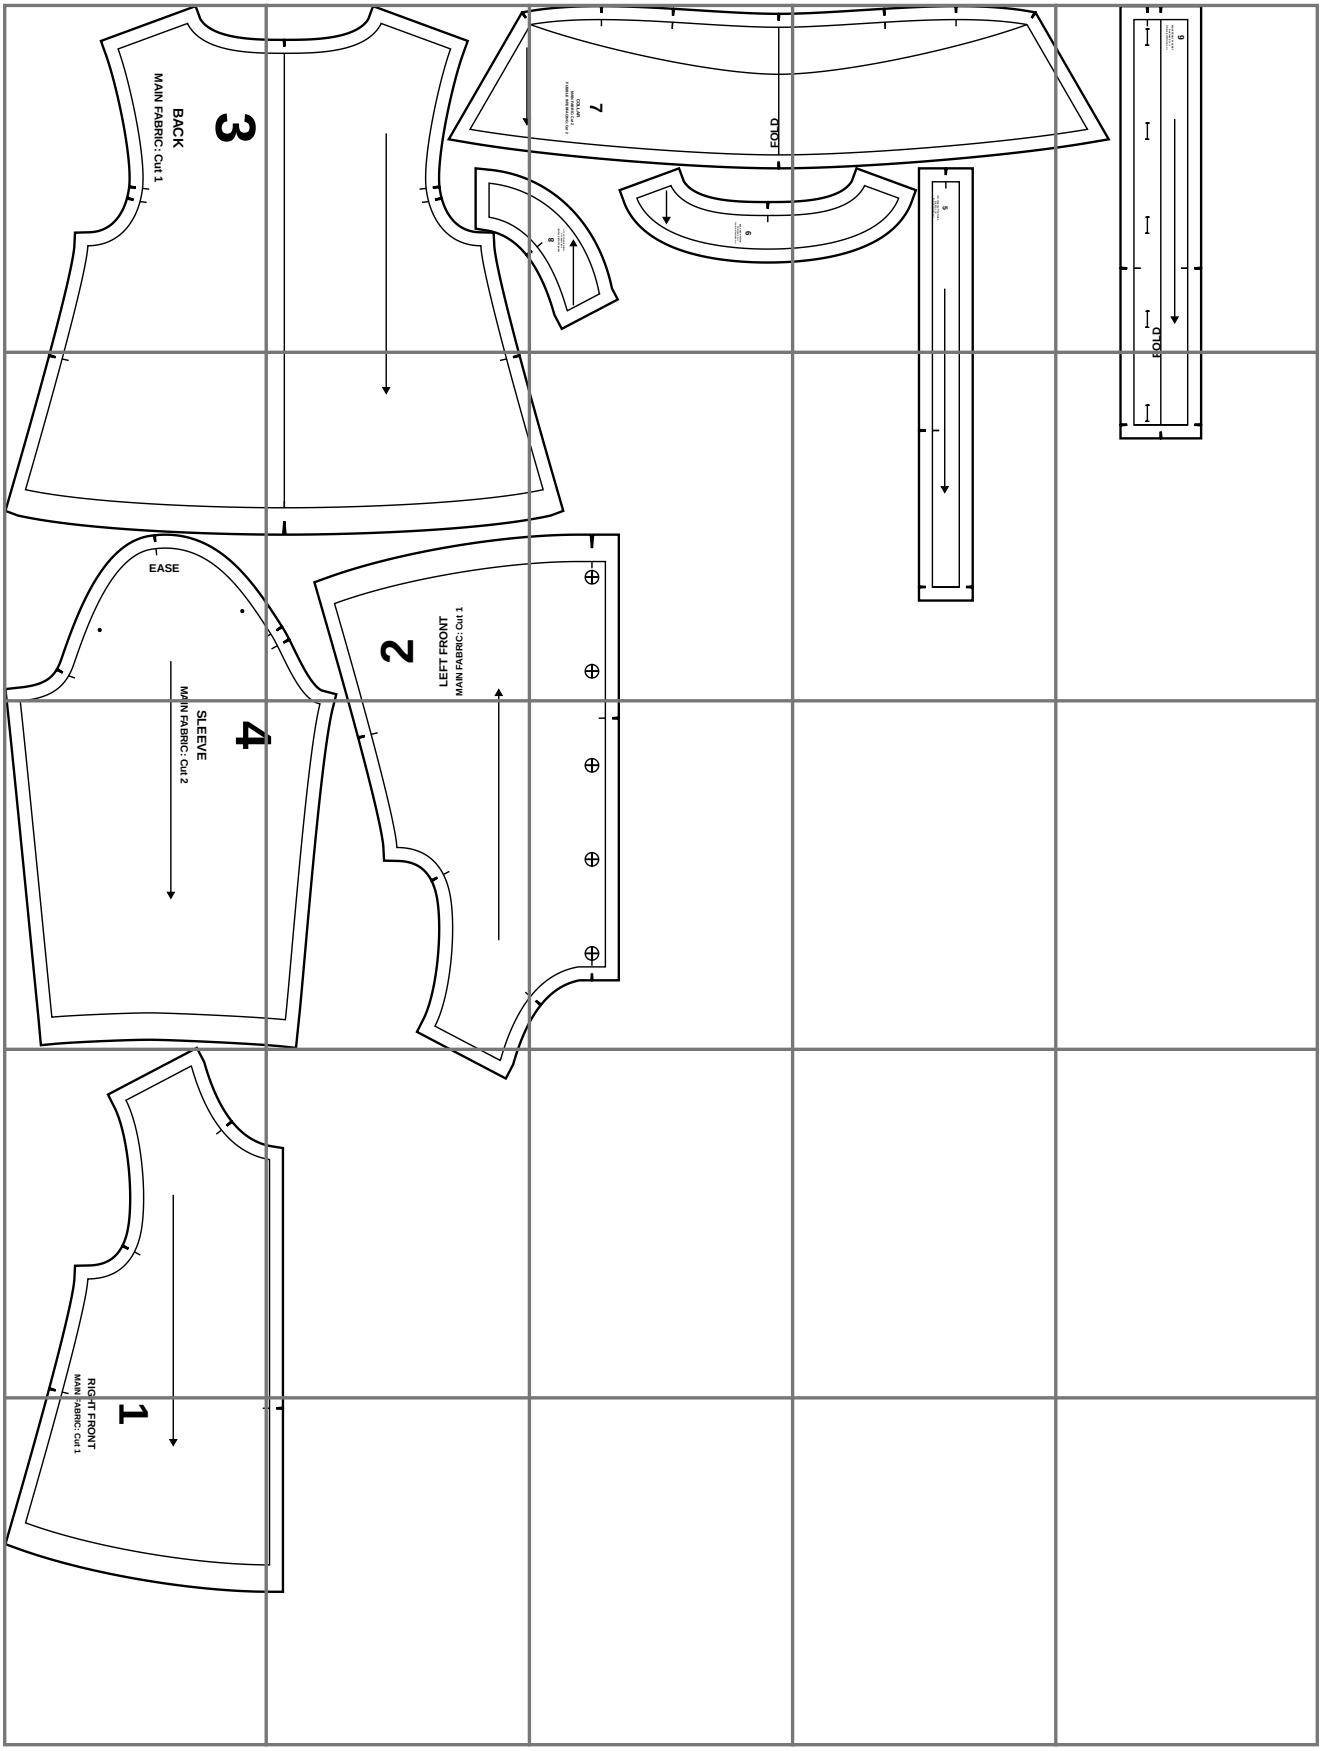



3


BACK


MAIN FABRIC: Cut 1

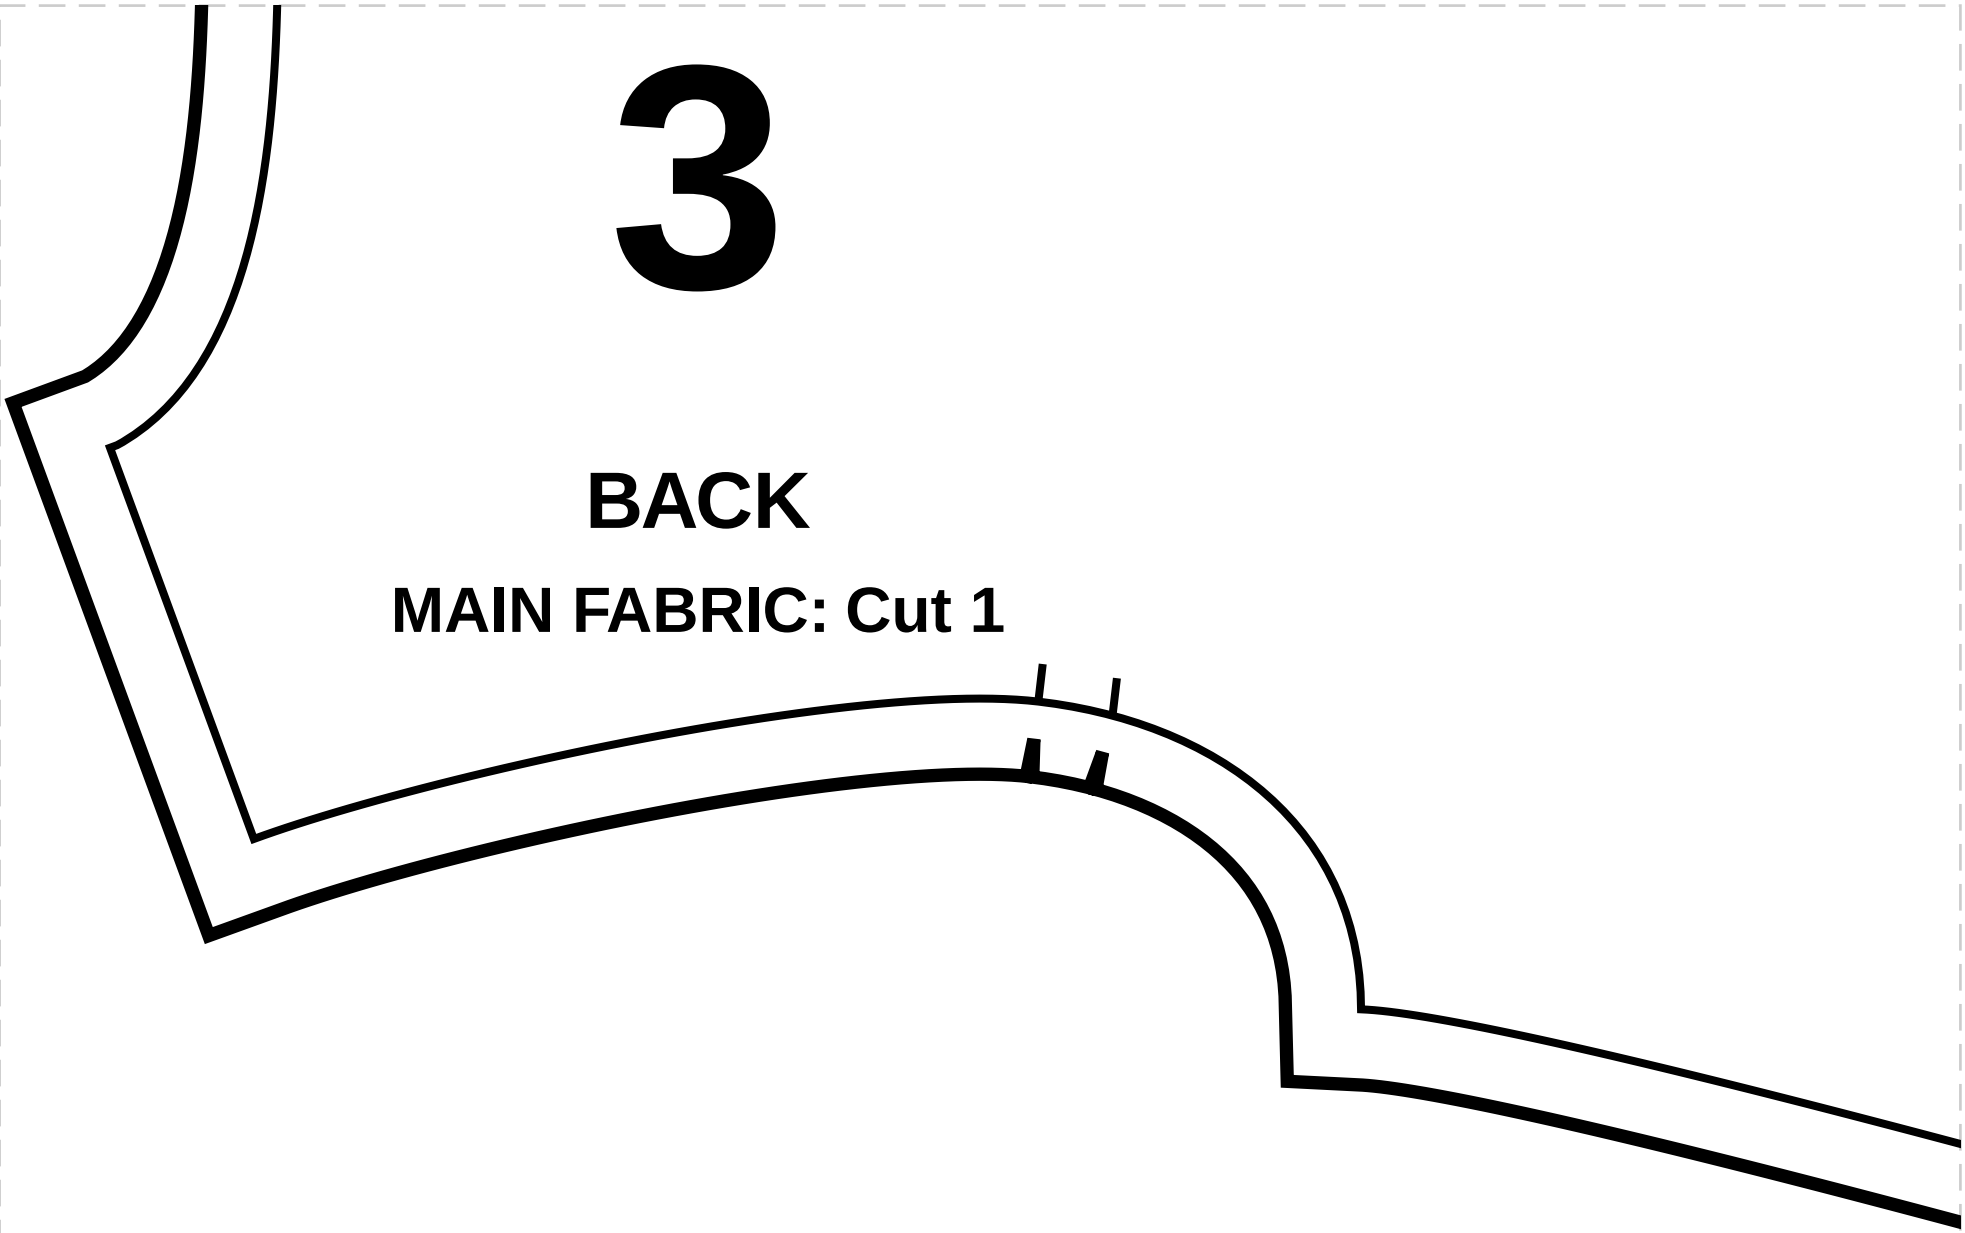


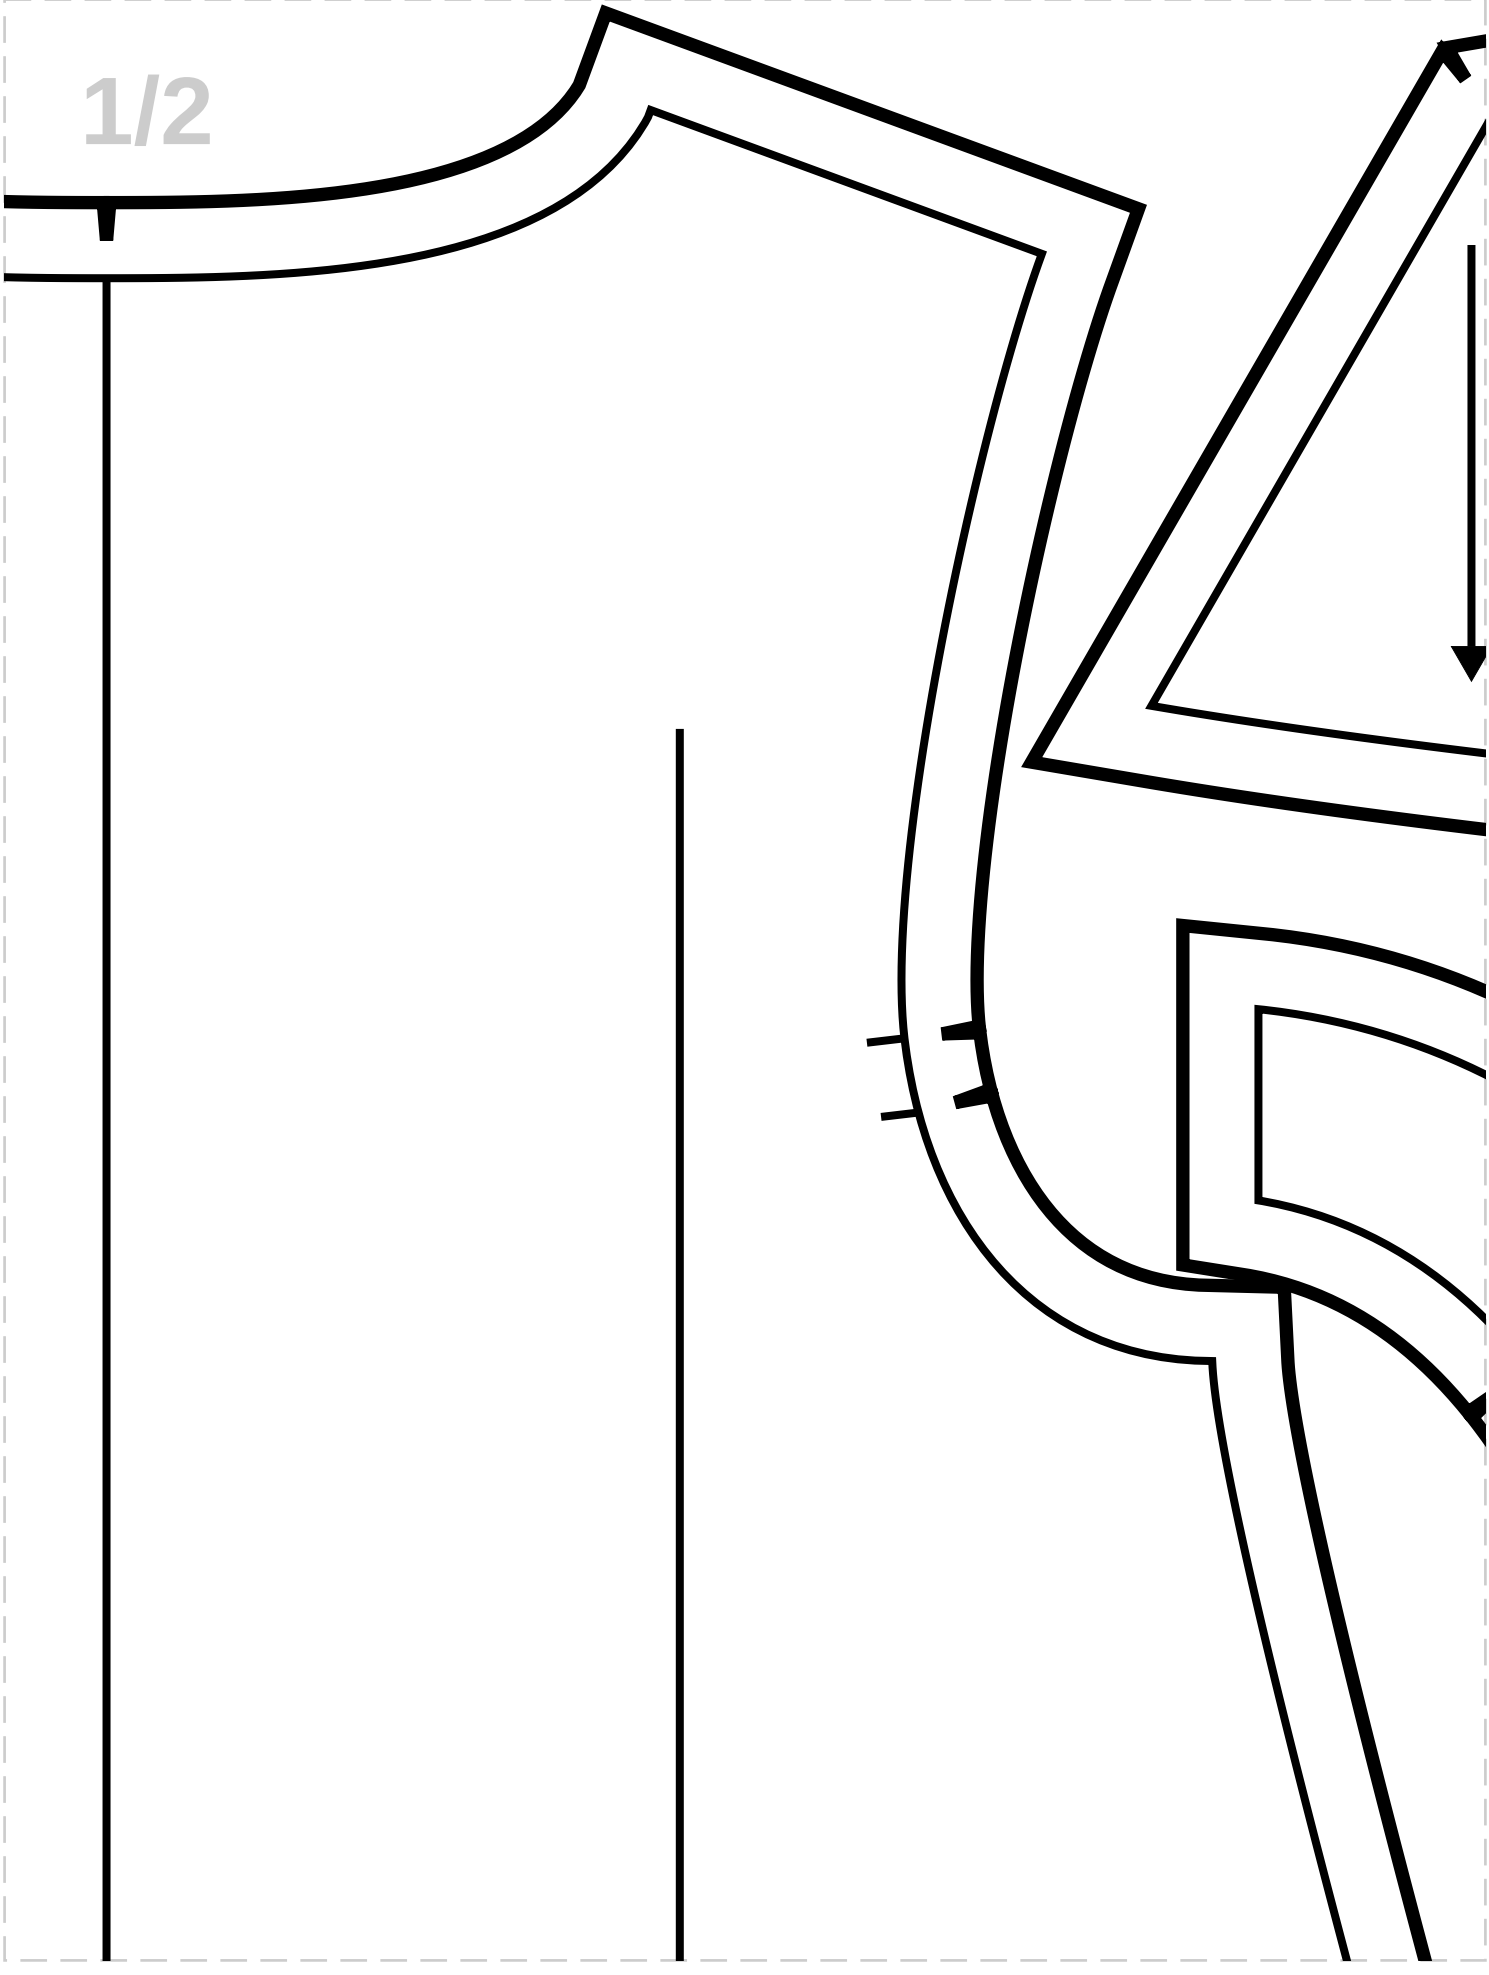


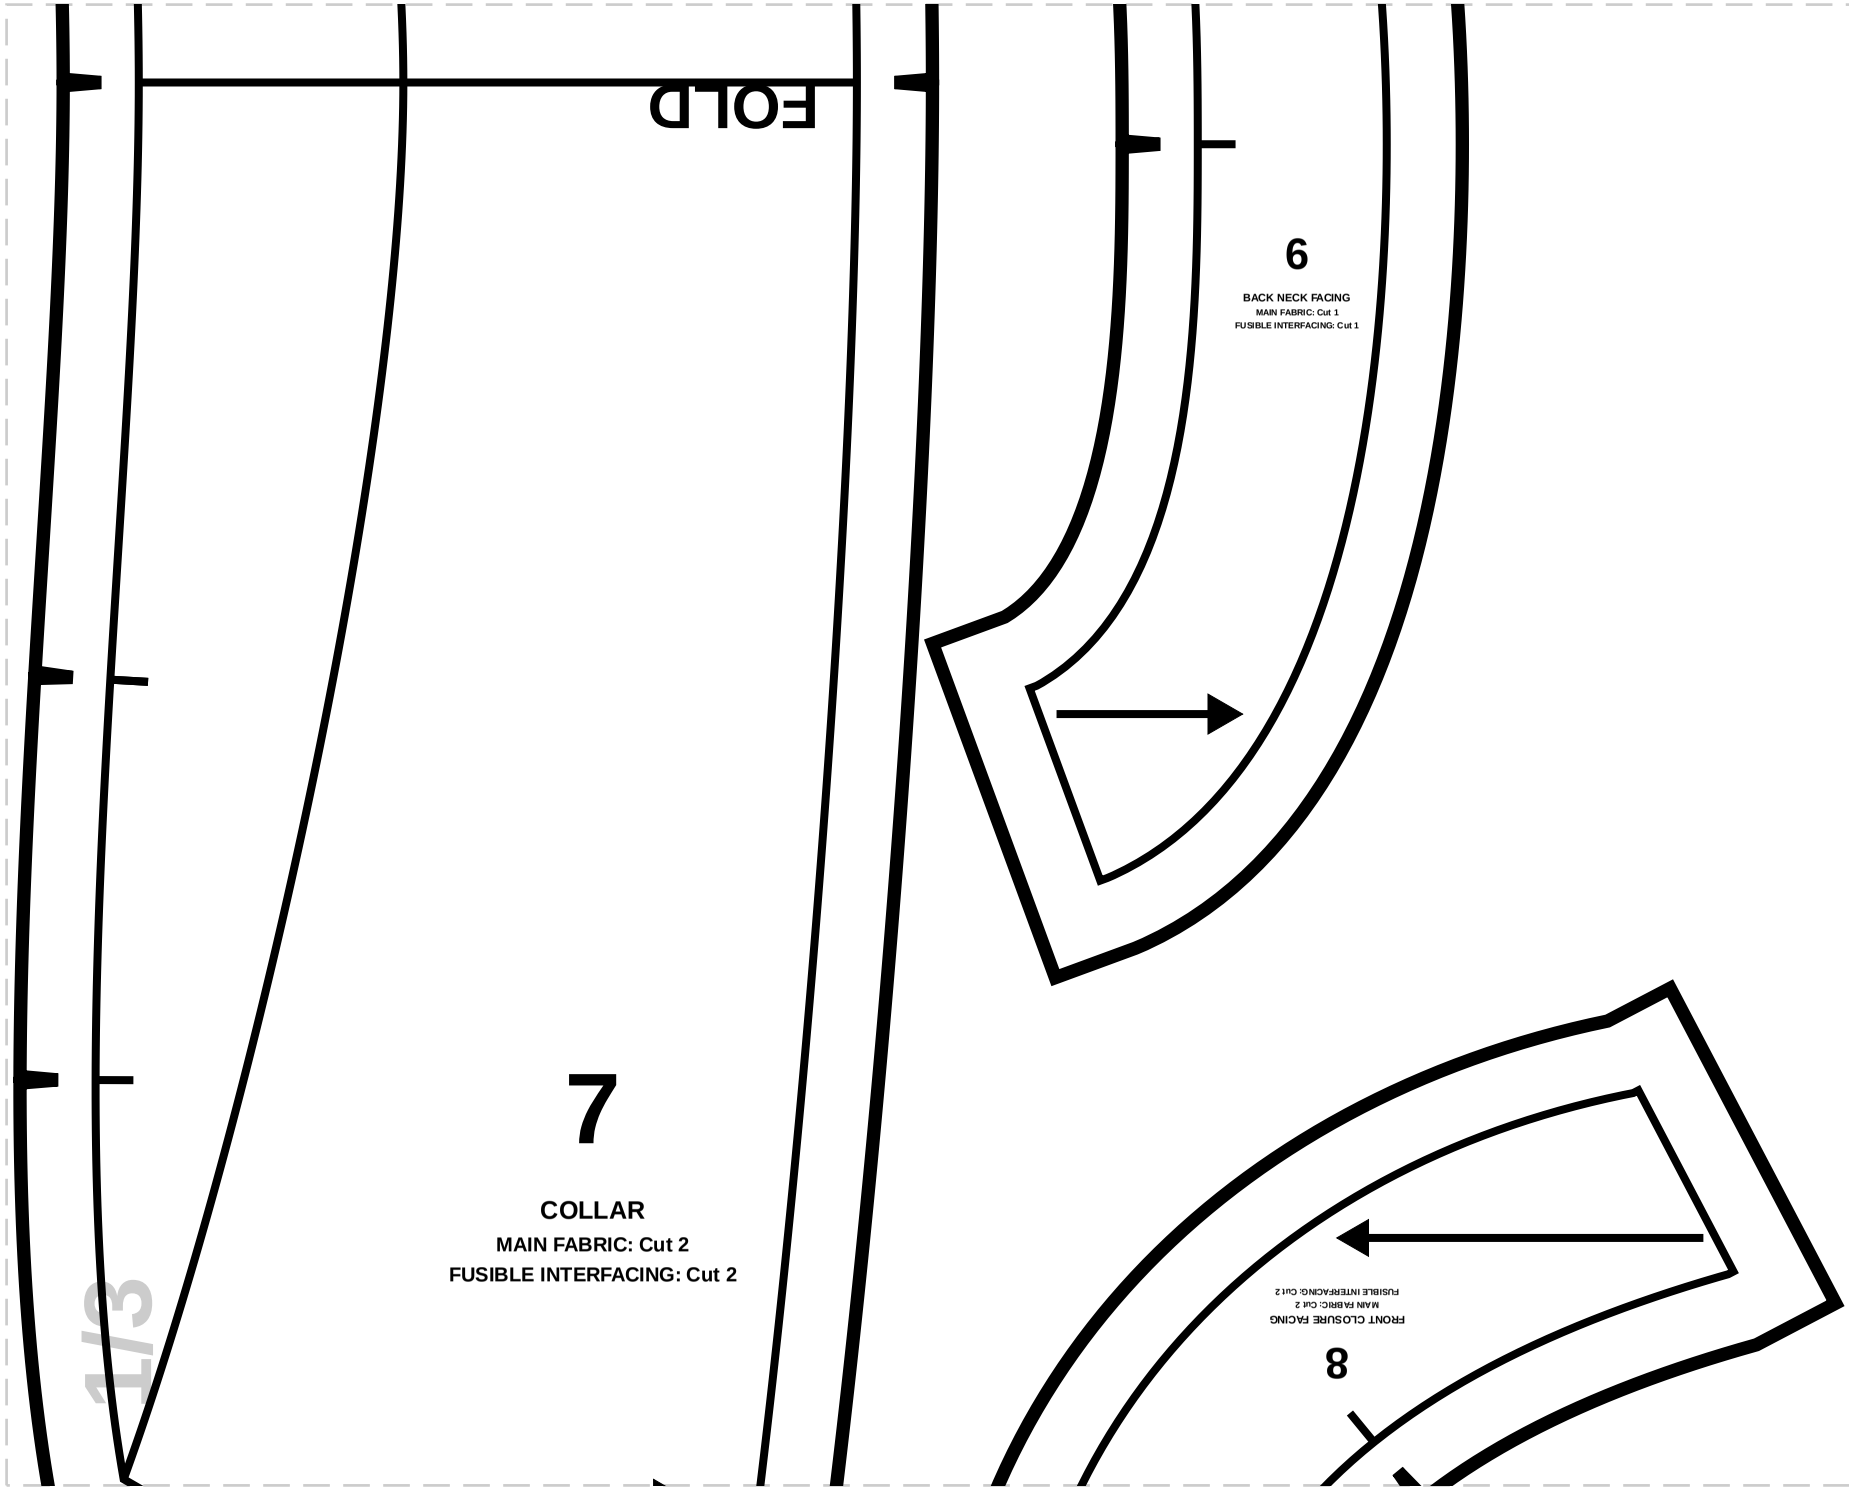

FOLD
6
BACK NECK FACING
MAIN FABRIC: Cut 1
FUSIBLE INTERFACING: Cut 1
7
COLLAR
MAIN FABRIC: Cut 2
FUSIBLE INTERFACING: Cut 2
8
FRONT CLOSURE FACING
MAIN FABRIC: Cut 2
FUSIBLE INTERFACING: Cut 2
1/3

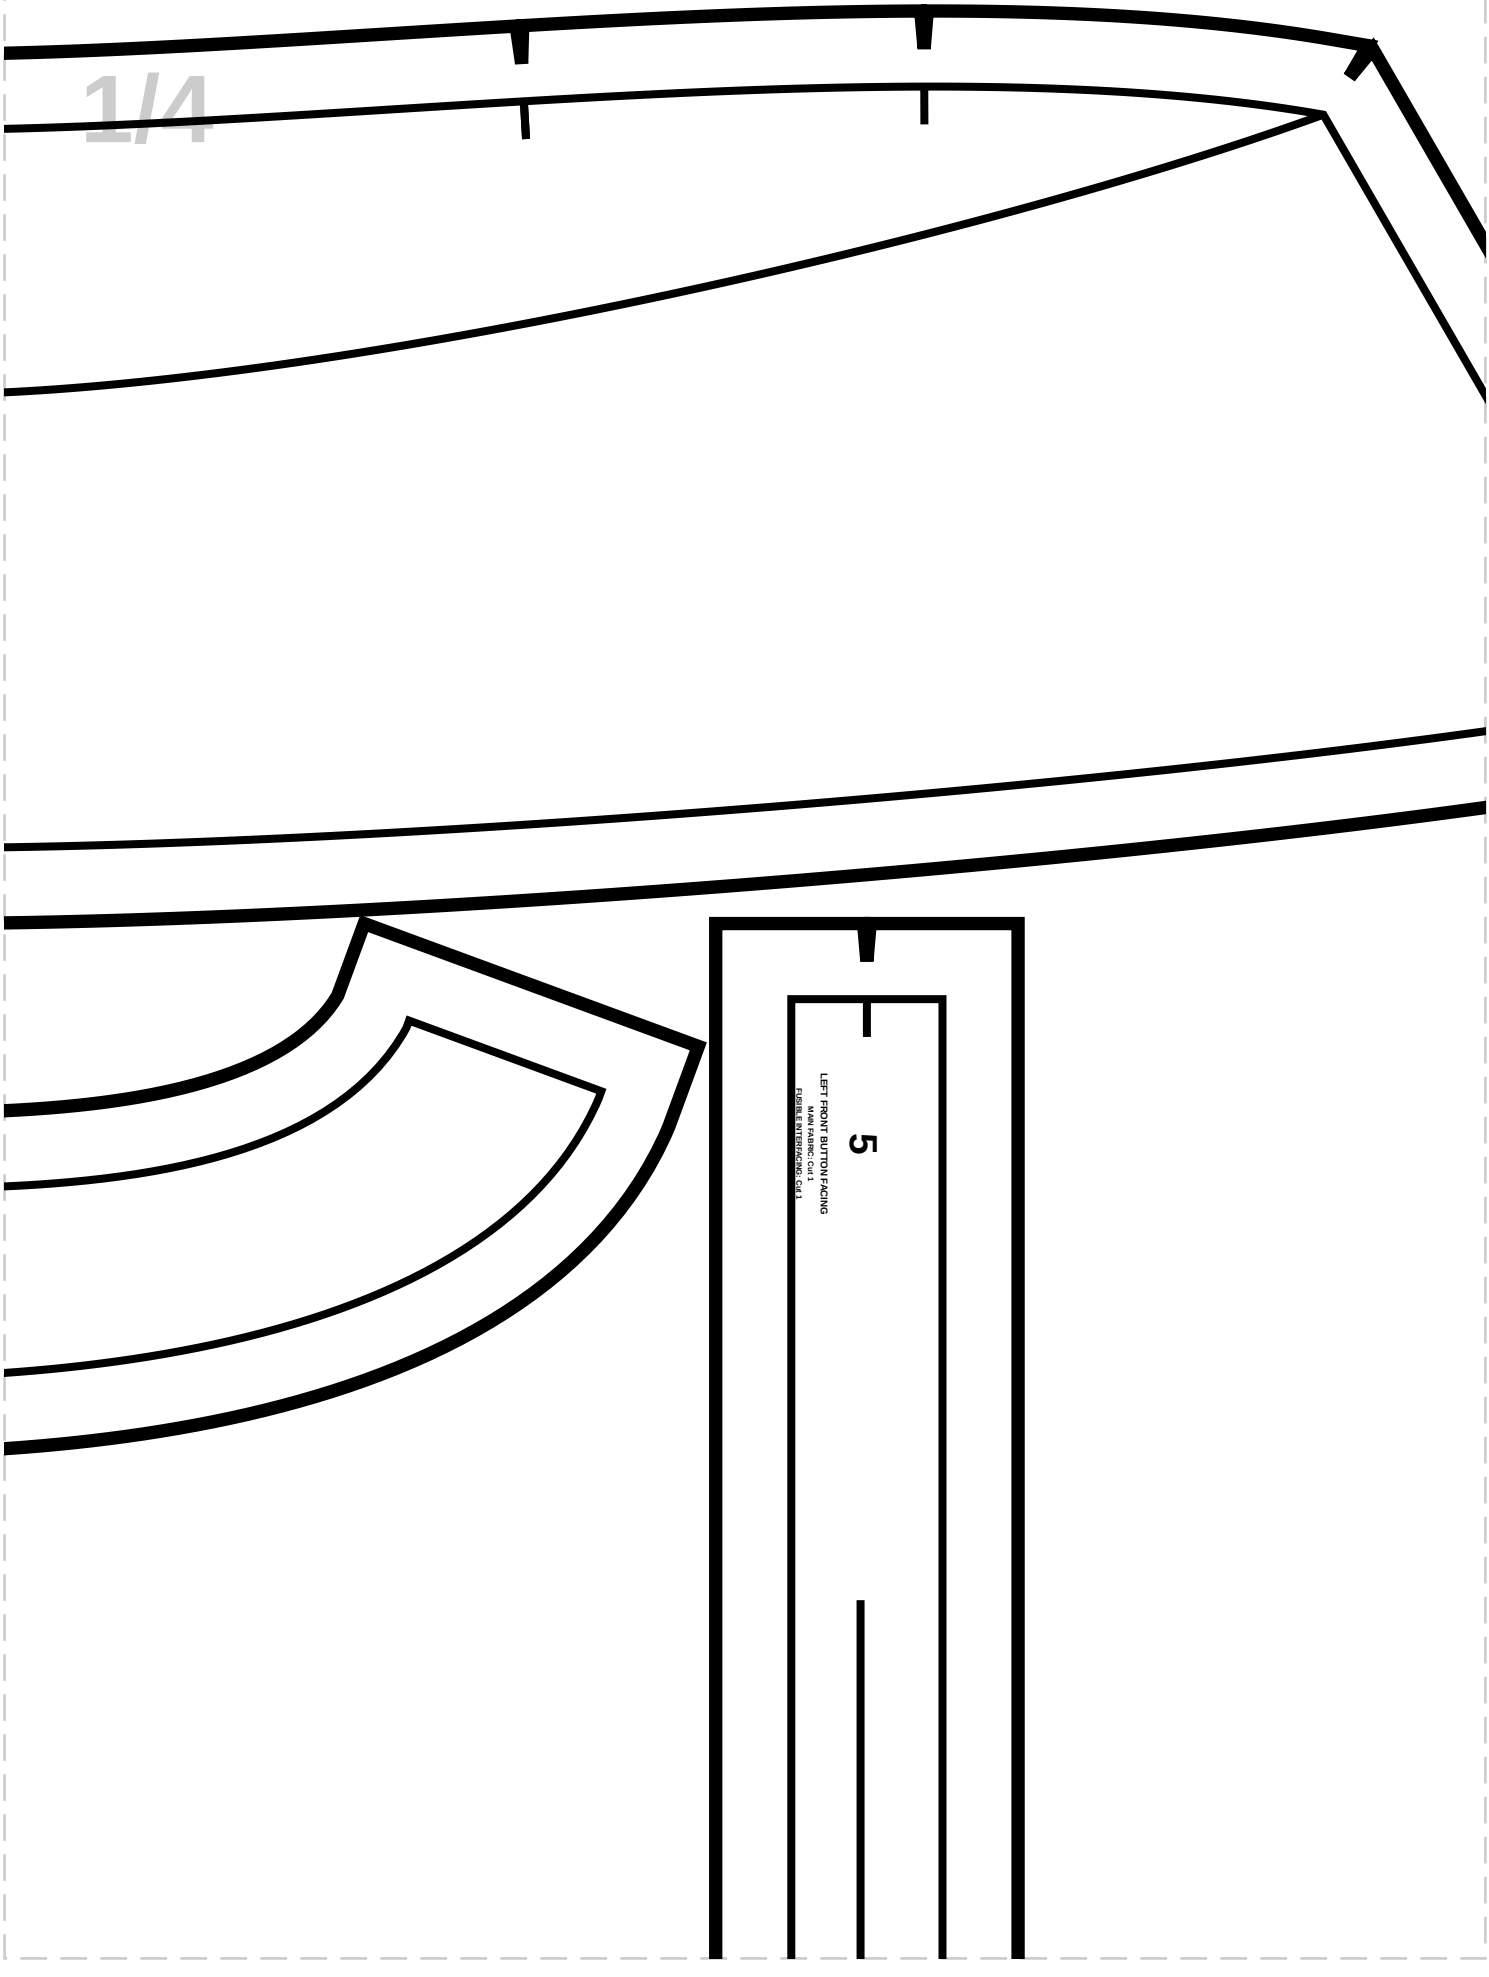

5
LEFT FRONT BUTTON FACING
CUT 1 ON FOLD
FUSIBLE INTERFACING
Cut 1

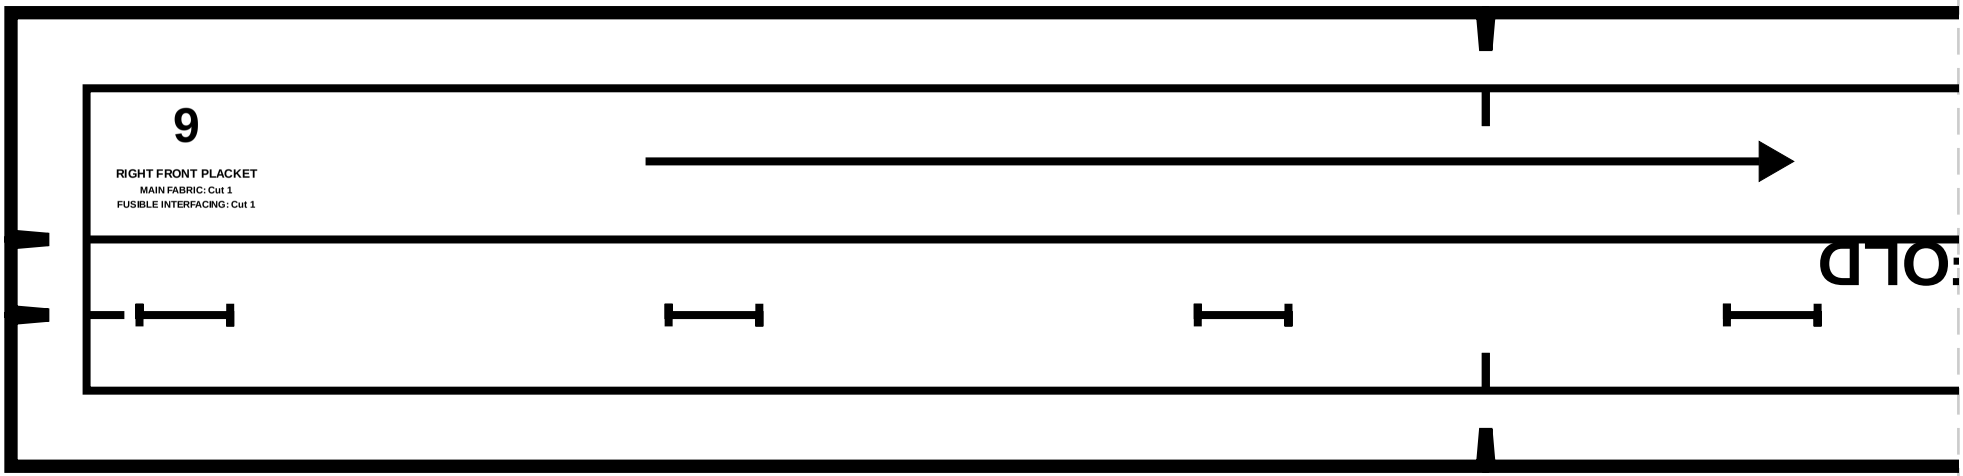

9
RIGHT FRONT PLACKET
MAIN FABRIC: Cut 1
FUSIBLE INTERFACING: Cut 1
FOLD

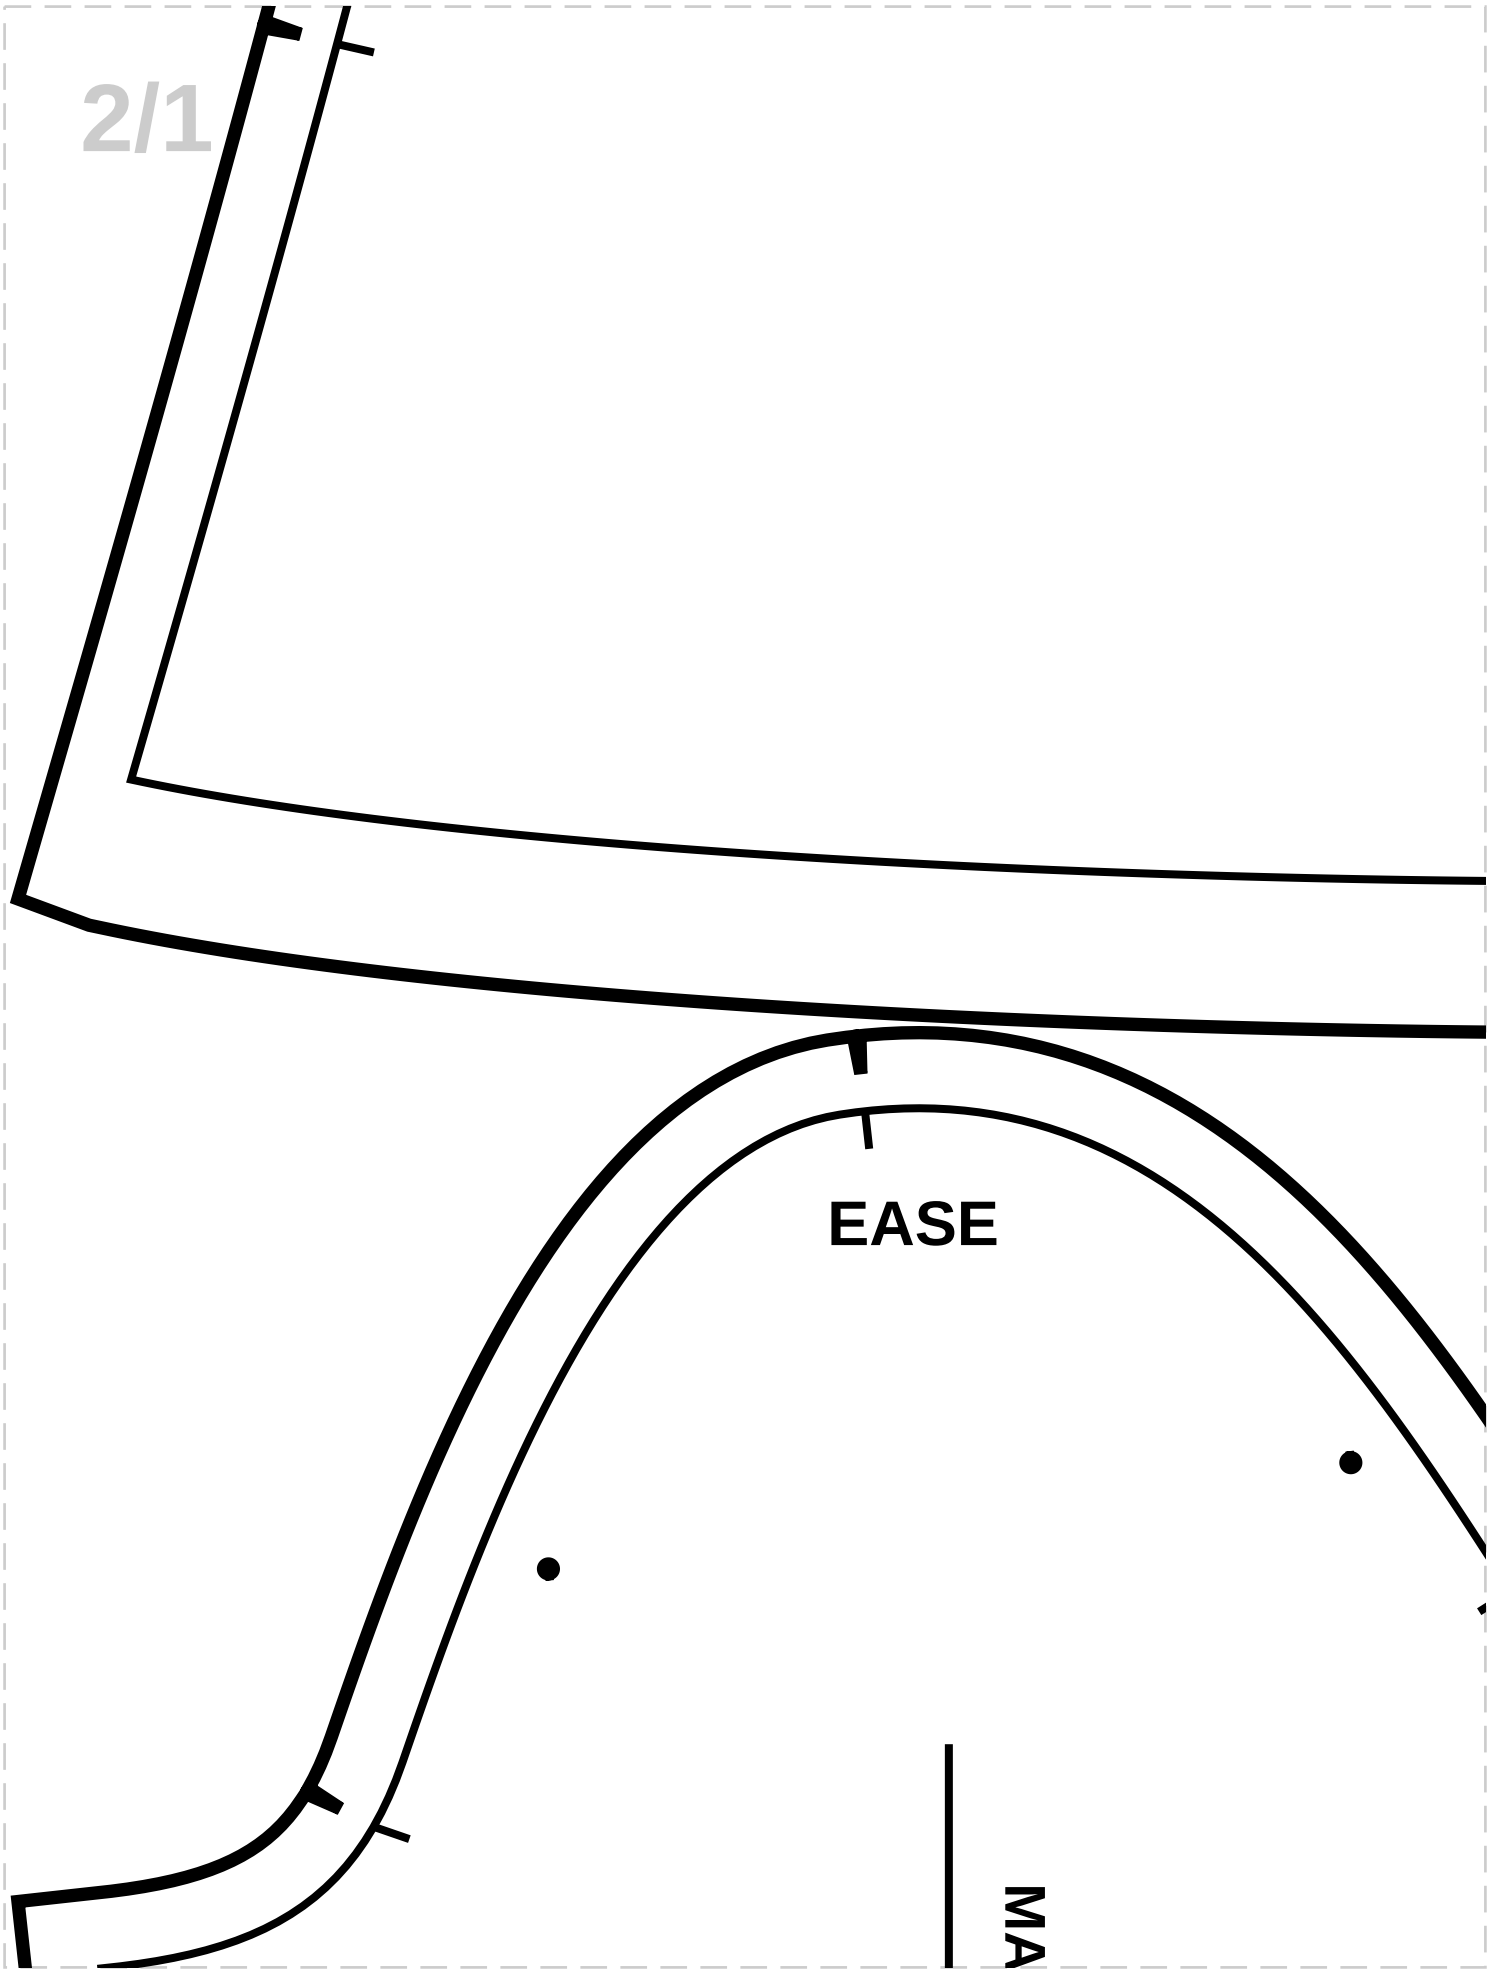
2/1
EASE
MA

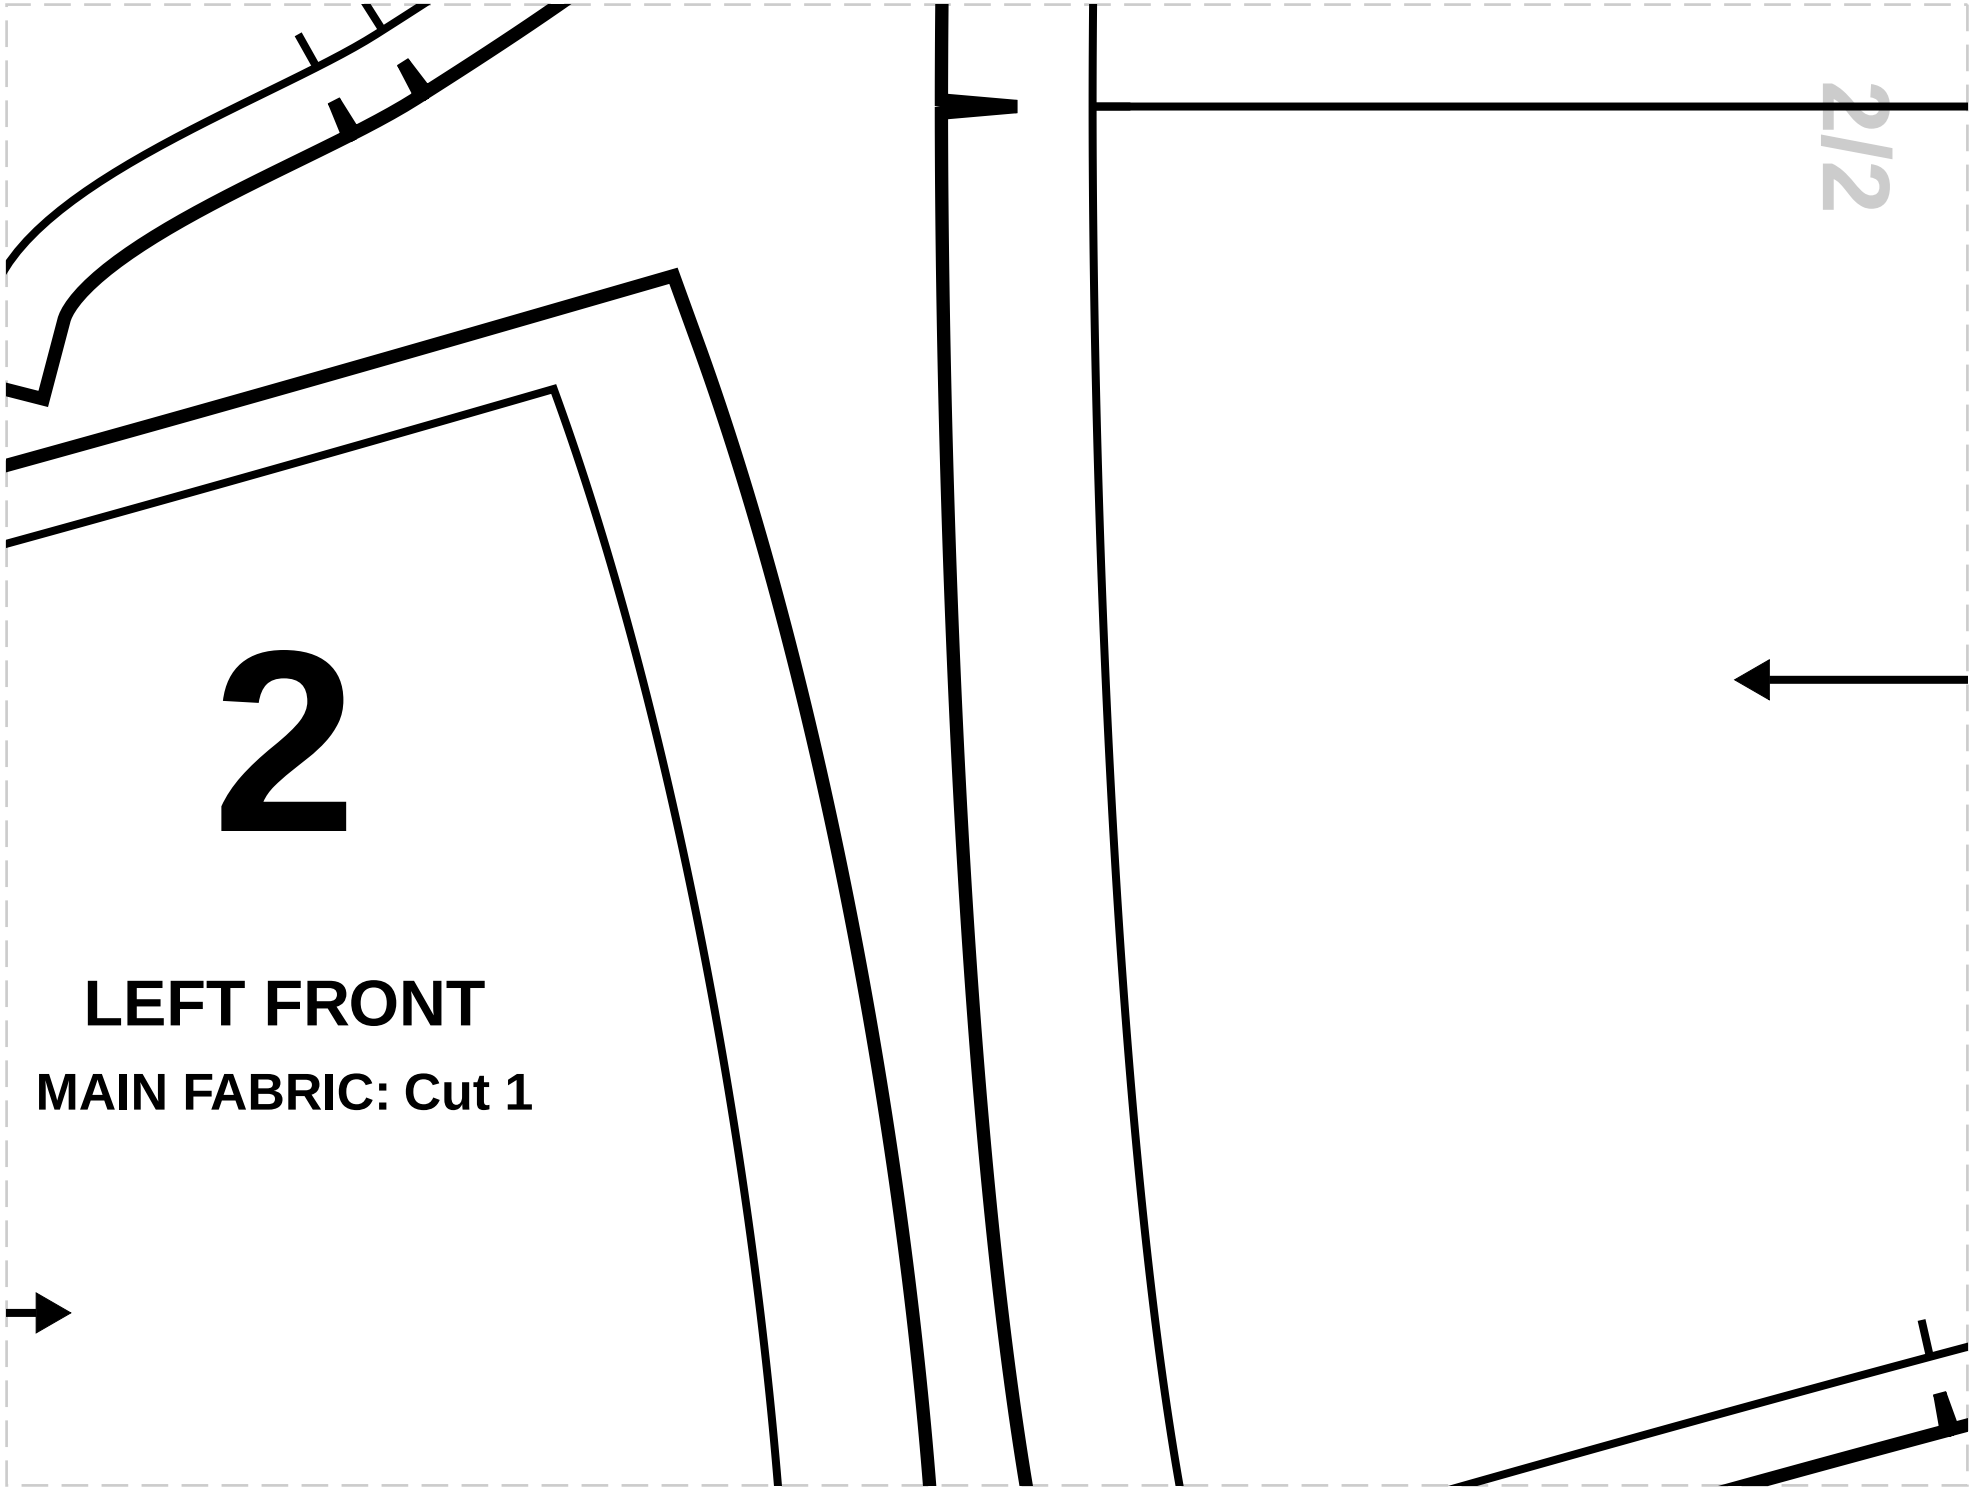
2
LEFT FRONT
MAIN FABRIC: Cut 1

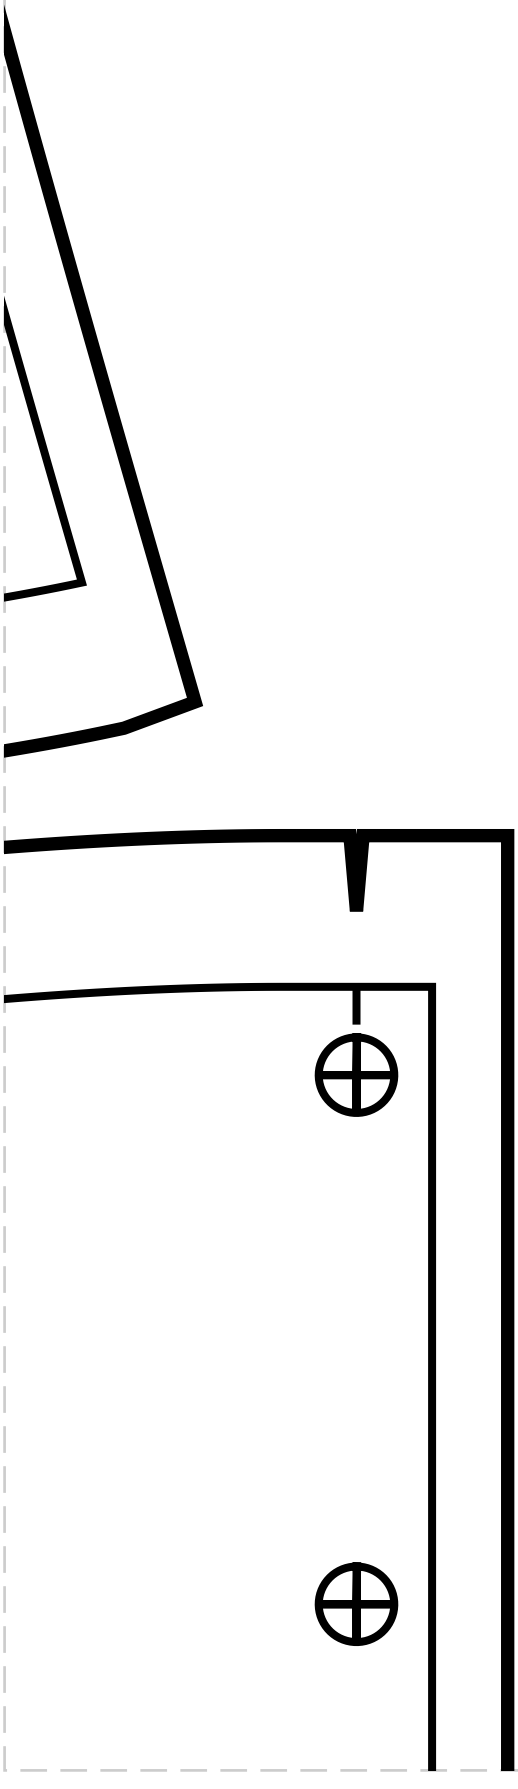

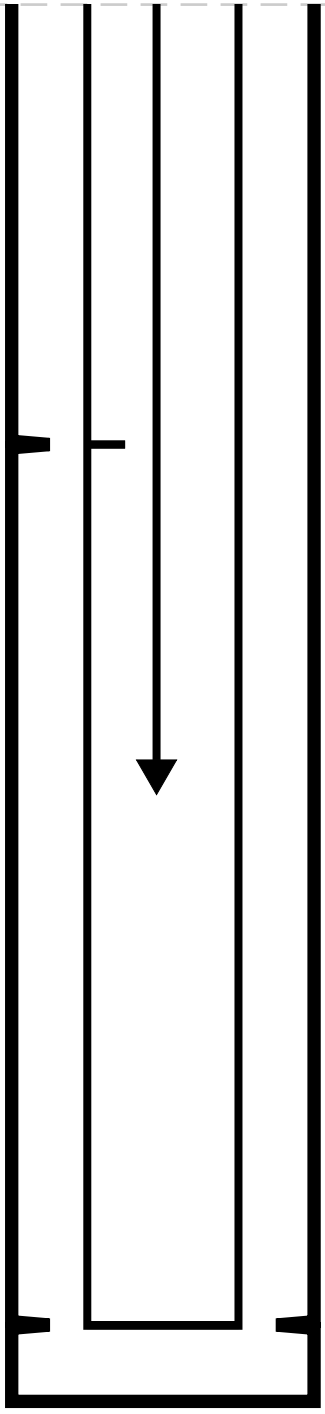


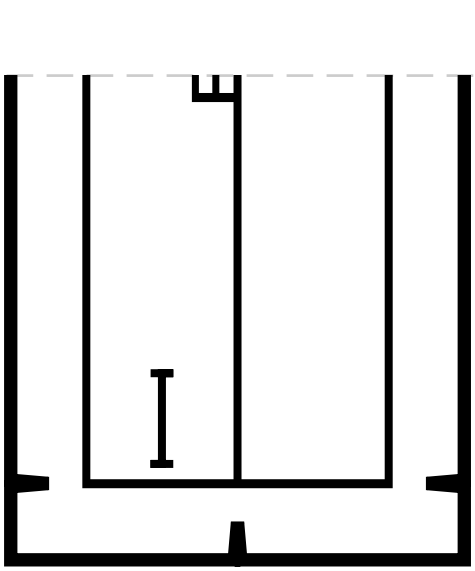


4


SLEEVE

IN FABRIC: Cut 2

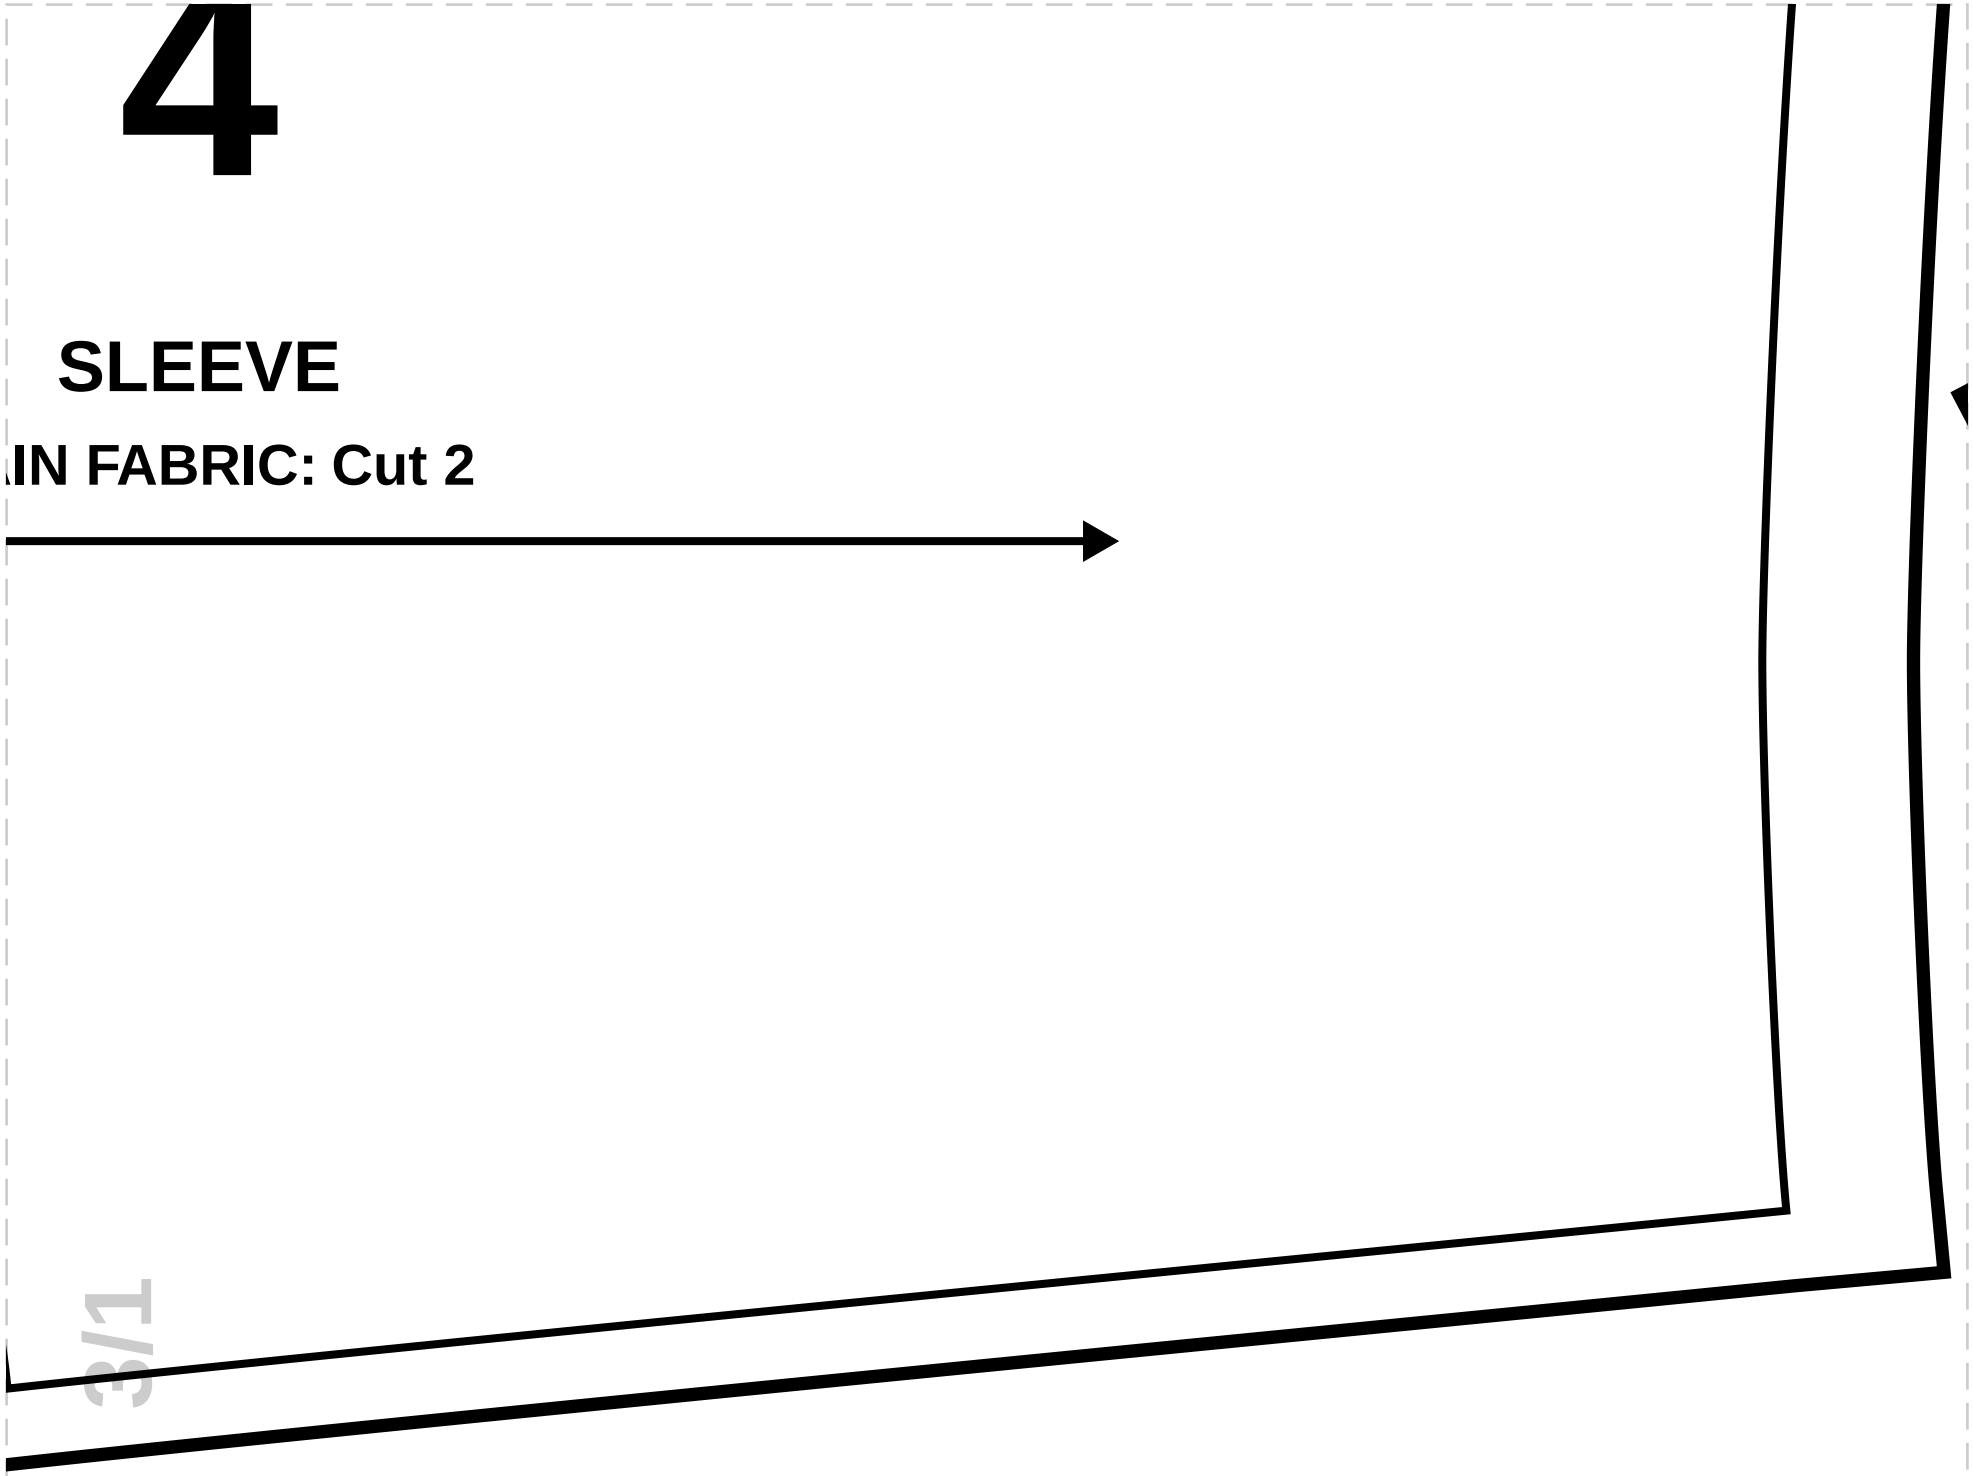



3/1

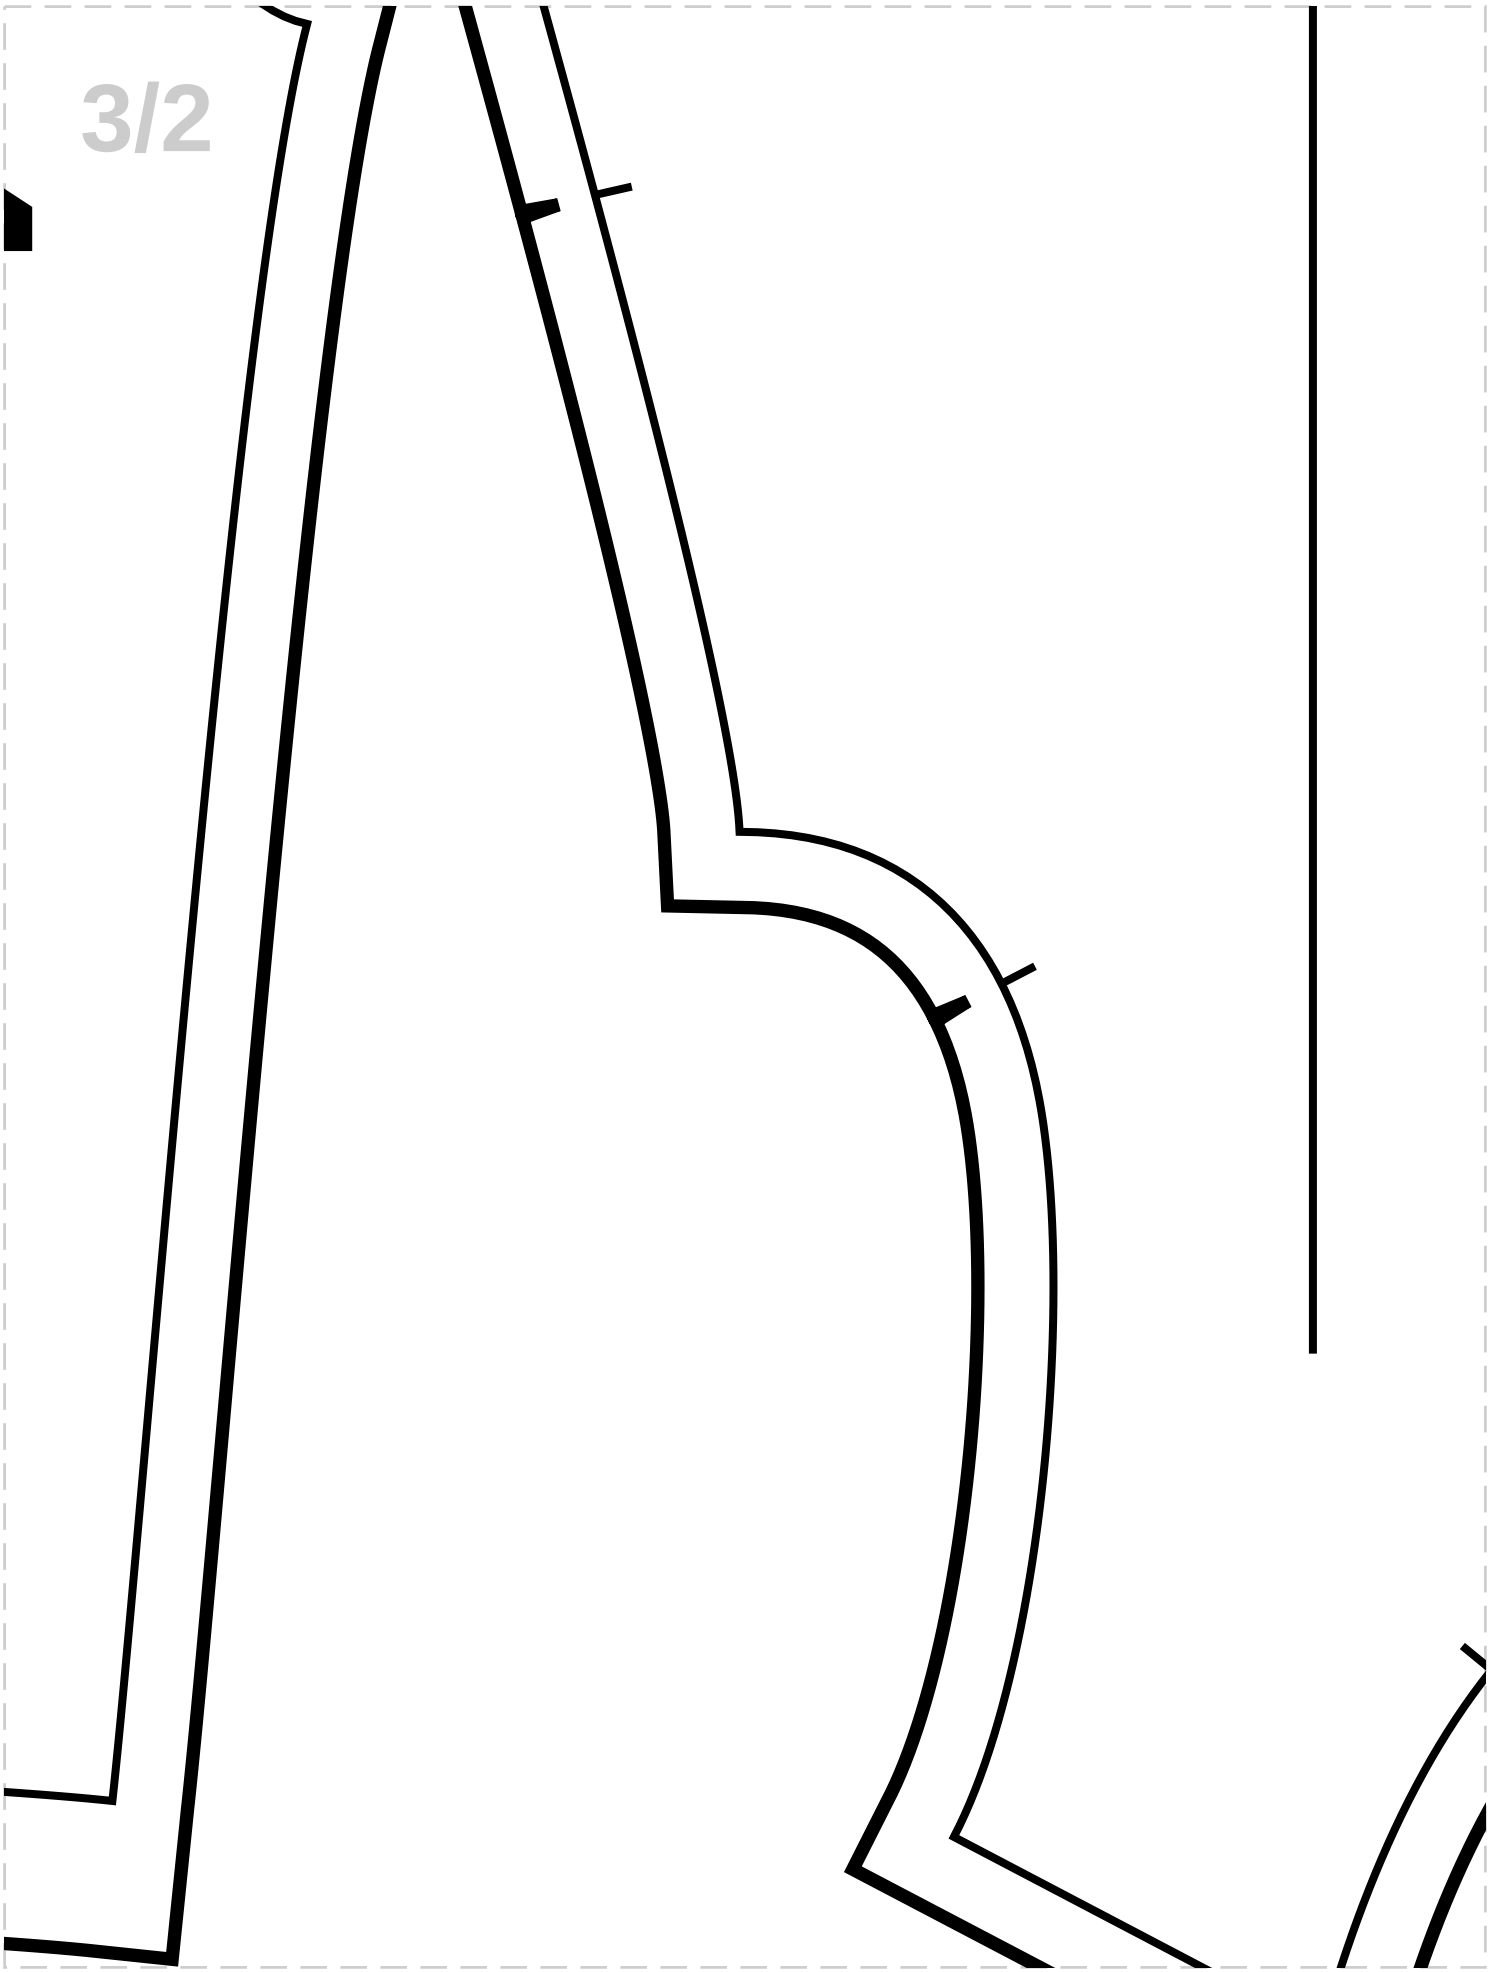

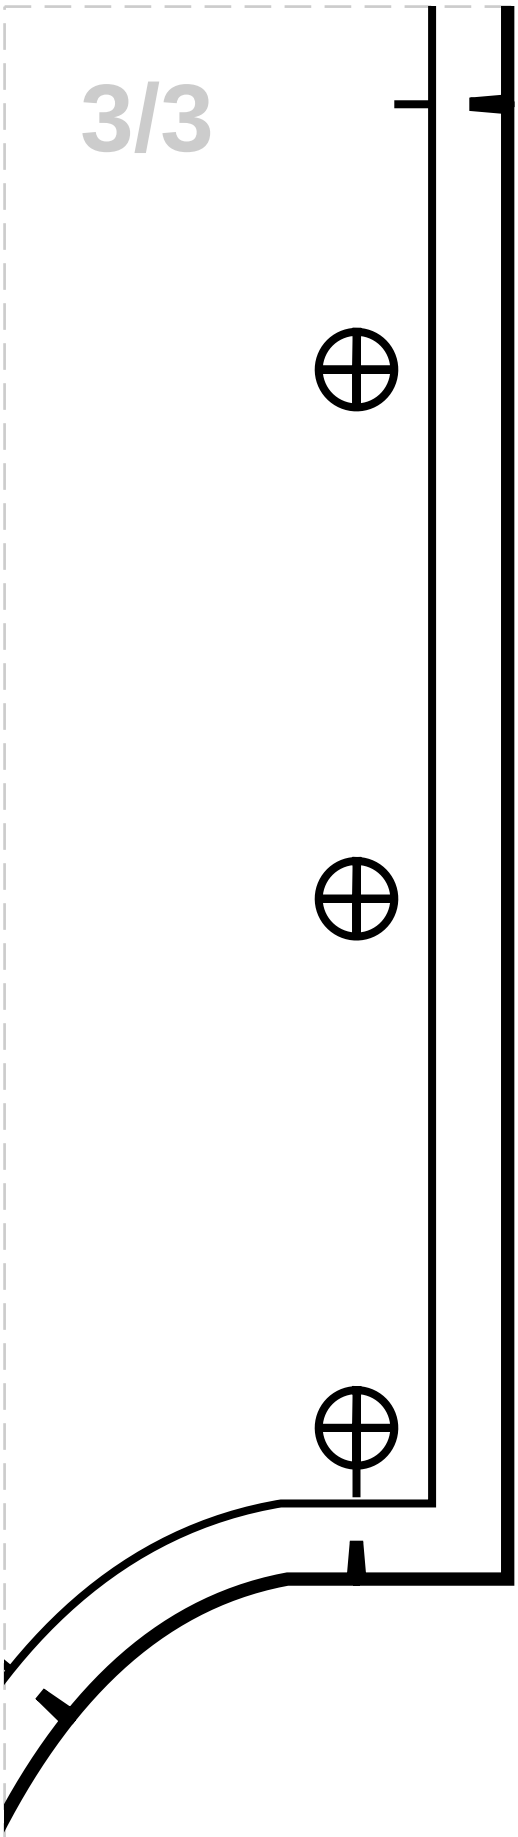


4/1

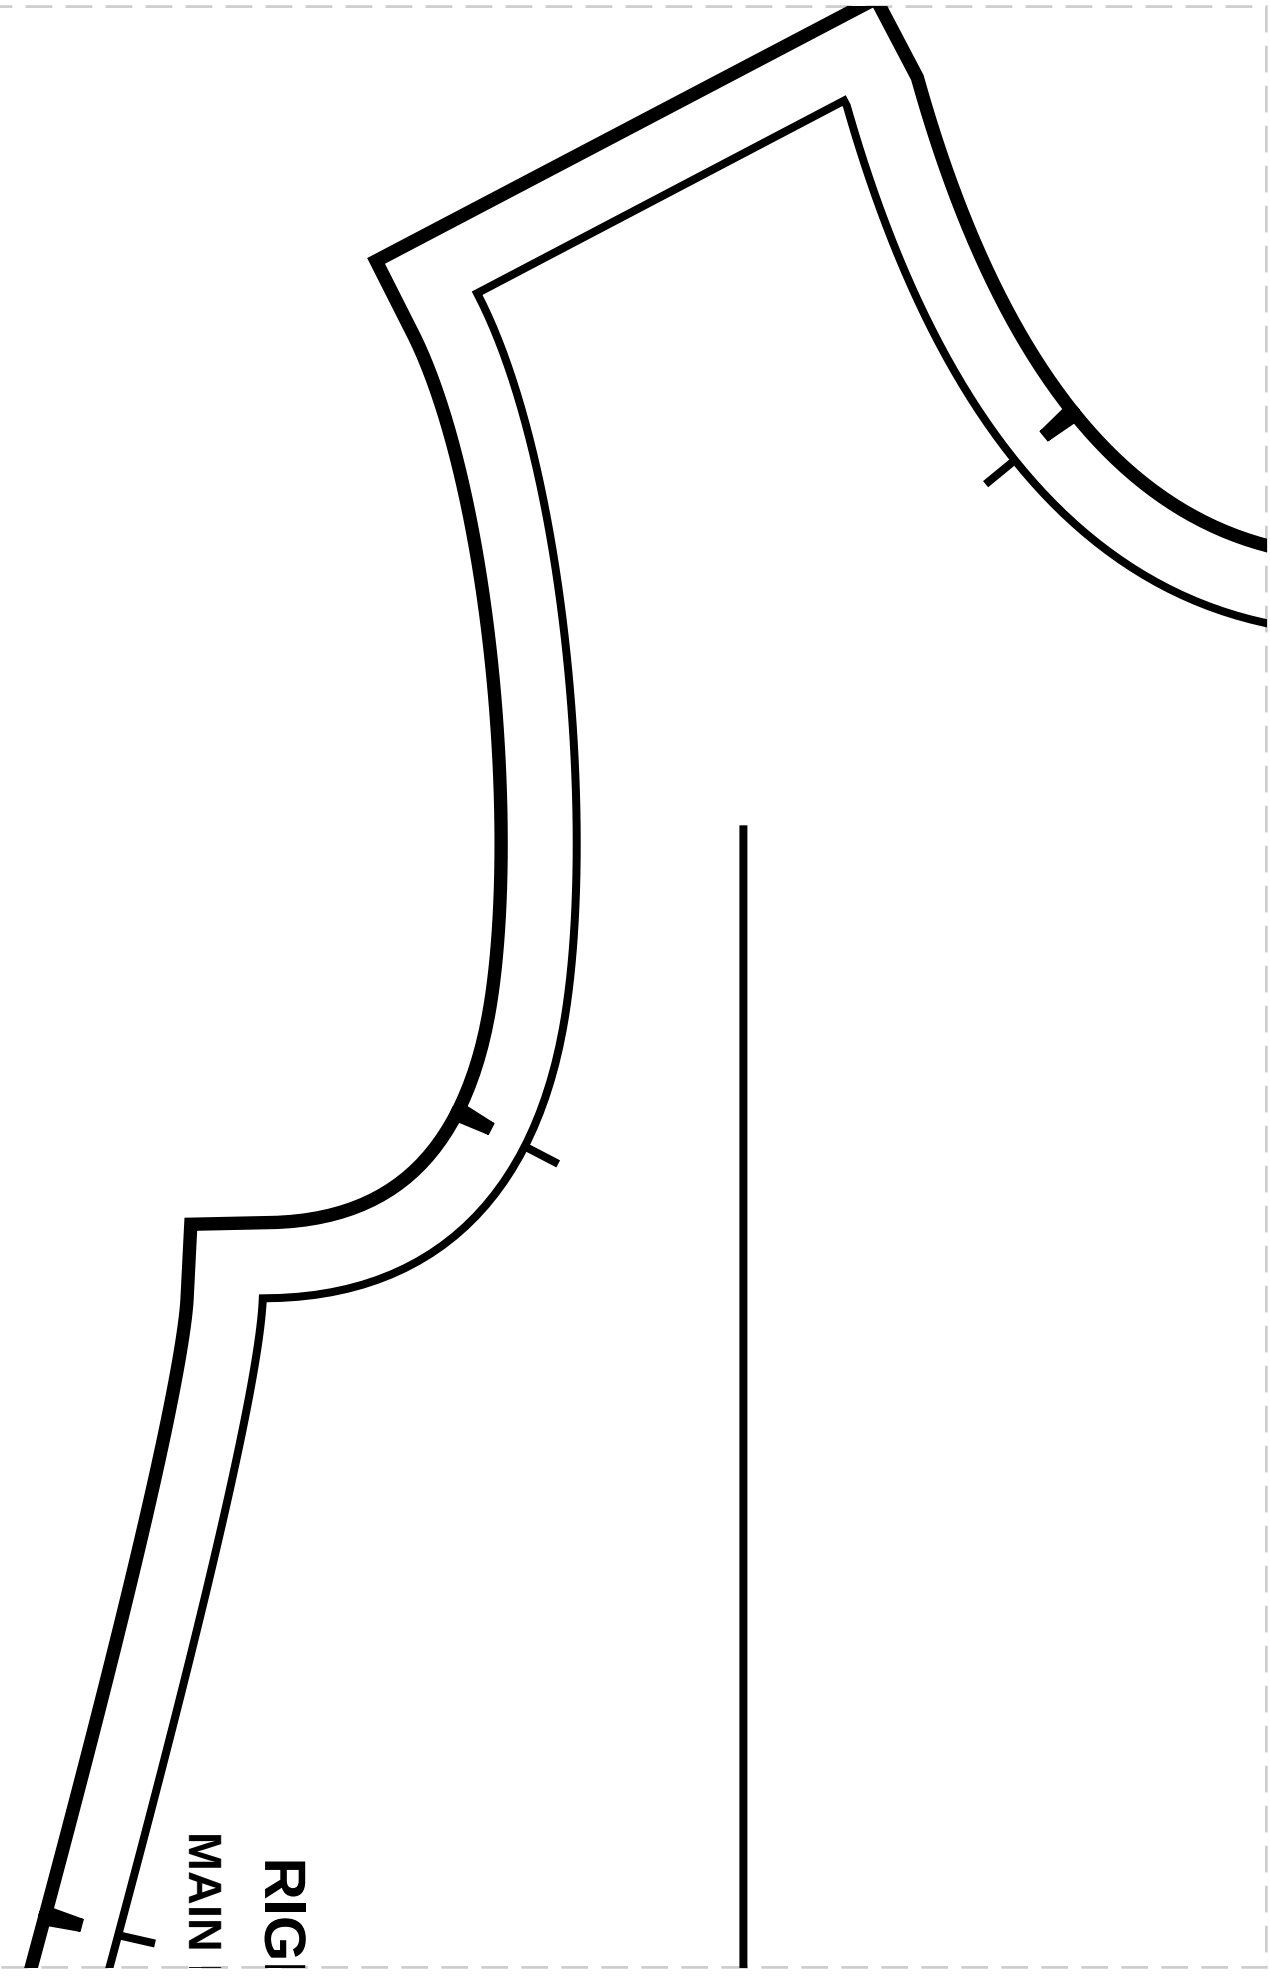

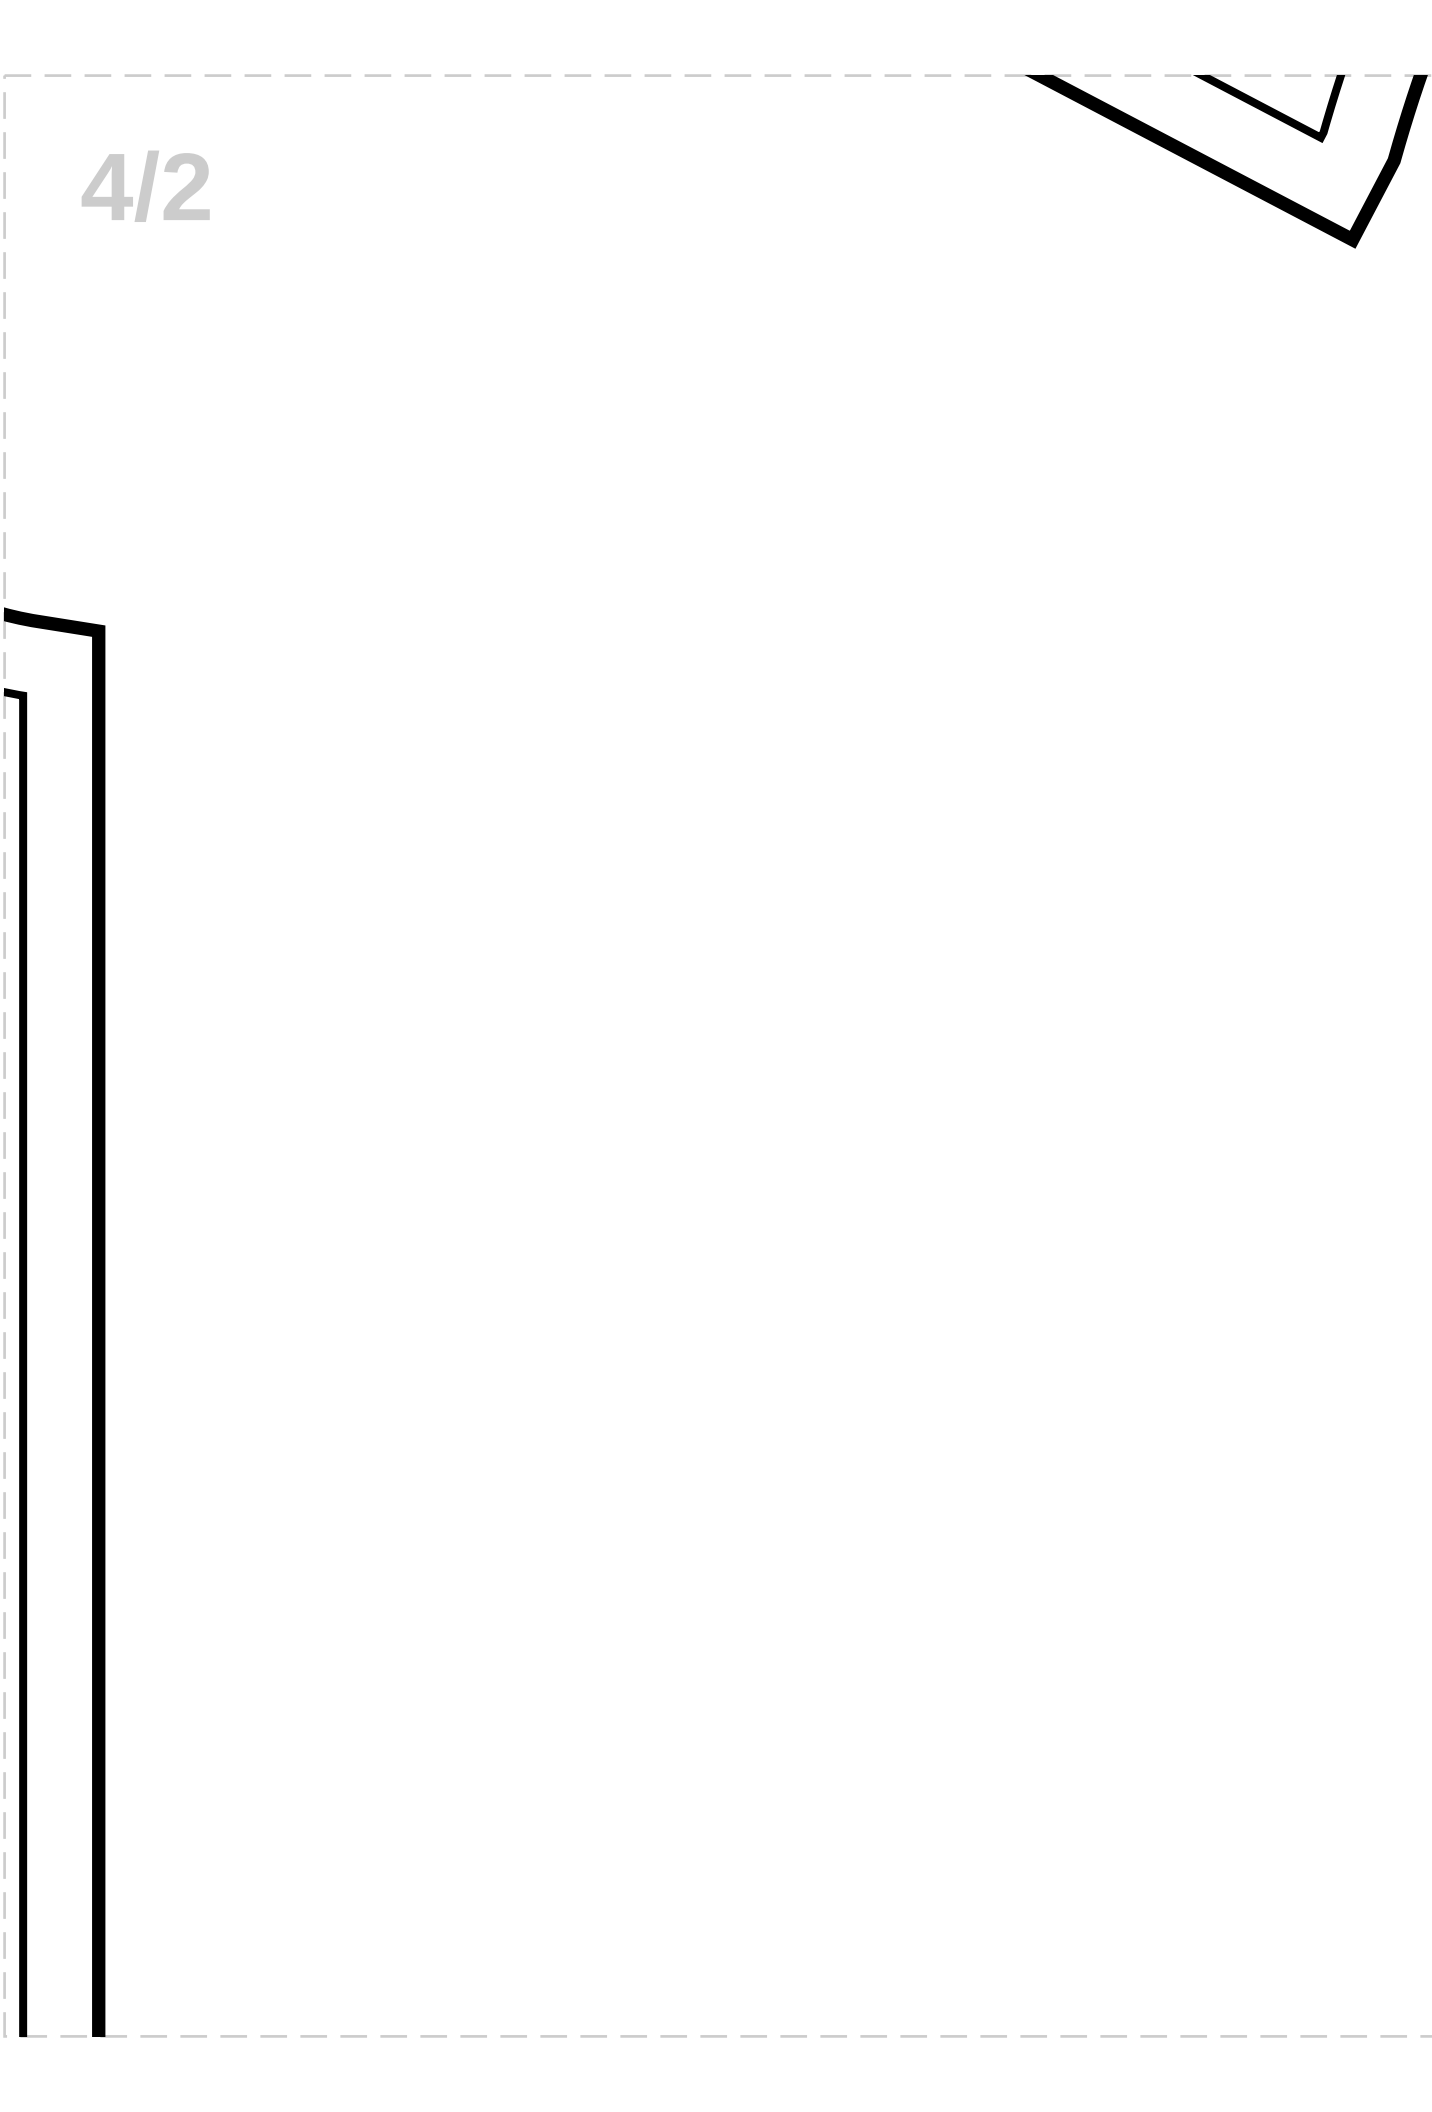

4/3

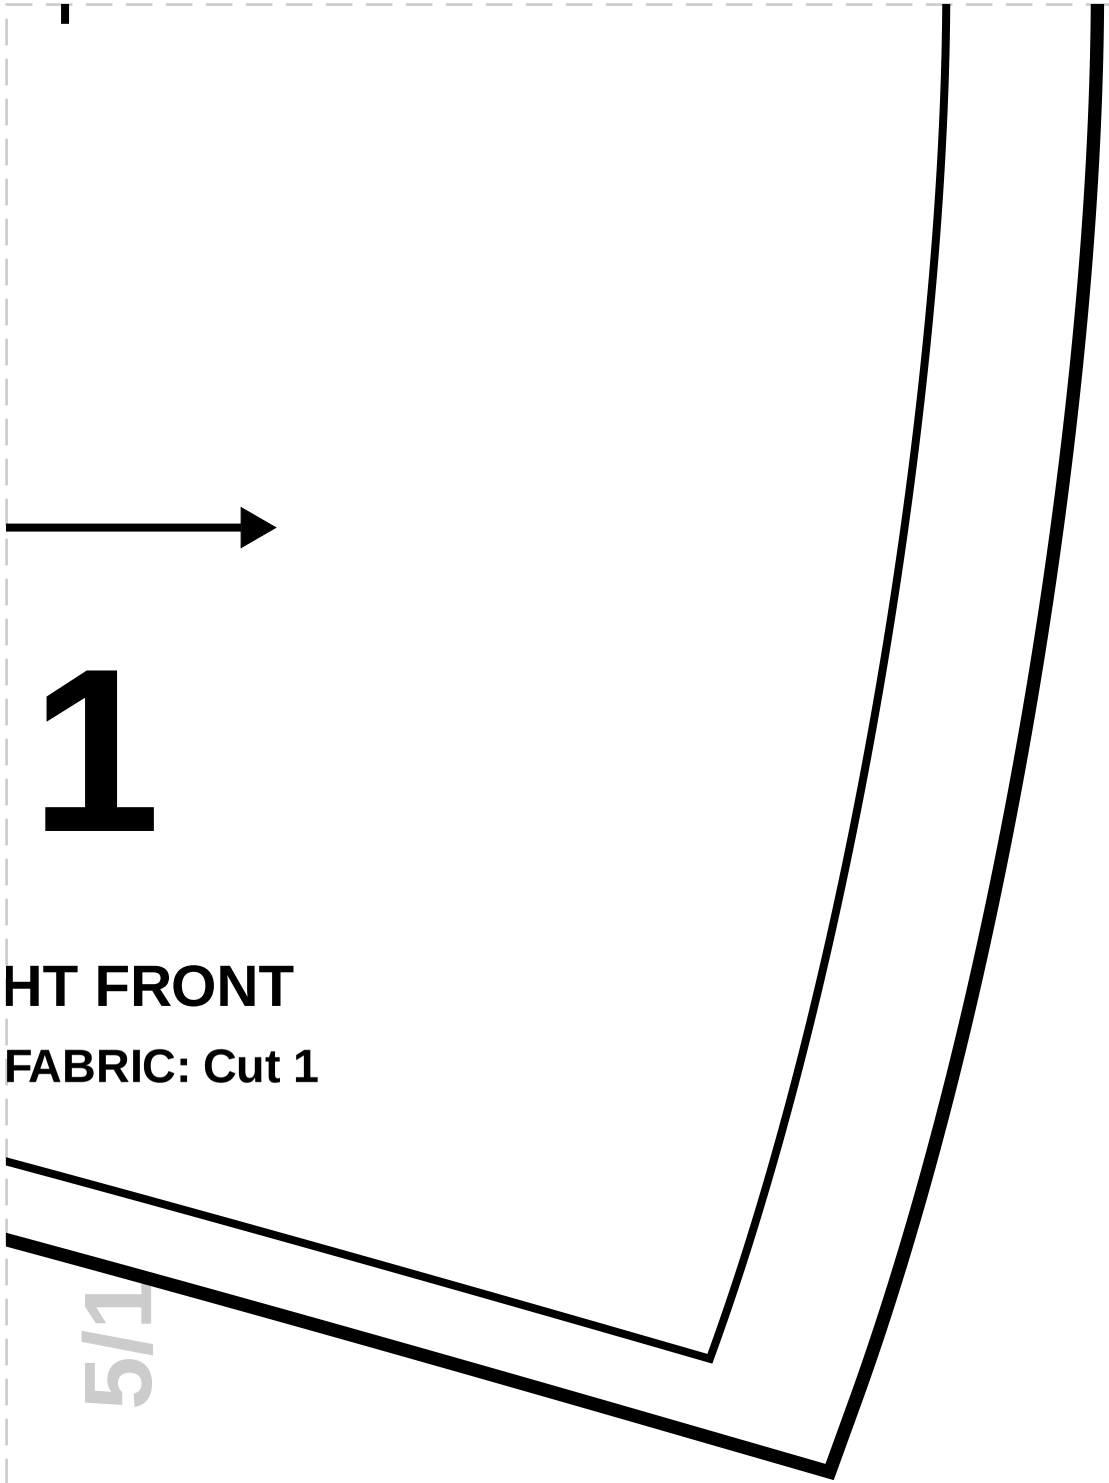


1

HT FRONT

FABRIC: Cut 1

5/1


5/2

5/3

5/4