cozysewpatterns

Print this Calibration Test page first!

Size: Height: 106.7, Bust: 56.5, Waist: 52.1, Hips: 57.5
SIZE 4 107

Notes

How to print

Printing


Once your Calibration Test Page has been printed, measure the 4”x 4” (10cm) scale box with a ruler. If the lengths match, you can confidently print your pattern. If the rulers do not match, set your print settings to 100% or Actual and retry.

Cutting

Your printouts will always have a dashed border to perfectly match your sheets. Cut off the right edge of each page. Be careful not to cut beyond the dashed mark, otherwise your patterns will not align accurately.

Tapping

Group each sheet by the second number marked on each pate i.e. in a group 1, there are: 1/1, 2/1, 3/1, 4/1, etc. In a group 2: 1/2, 2/2 etc. 2. Place page 1/1 on top of the page 2/1, overlapping the right side edge. Match corners and crosses and secure with a pin or tape. Then use a scotch tape to permanently attach the sheets together.

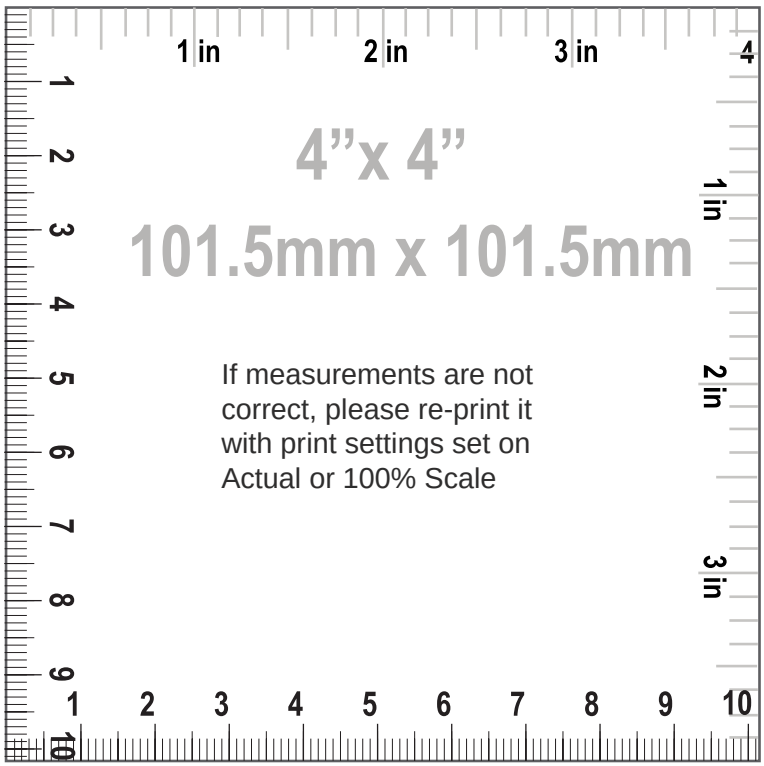

SIZE 4 107
Seam Allowance: 1 (3/8 in)

Pattern pieces:

1. "RIGHT FRONT", MAIN FABRIC: Cut 1
2. "LEFT FRONT", MAIN FABRIC: Cut 1
3. "BACK", MAIN FABRIC: Cut 1
4. "SLEEVE", MAIN FABRIC: Cut 2
5. "LEFT FRONT BUTTON FACING", MAIN FABRIC, FUSIBLE INTERFACING: Cut 1
6. "BACK NECK FACING", MAIN FABRIC, FUSIBLE INTERFACING: Cut 1
7. "COLLAR", MAIN FABRIC, FUSIBLE INTERFACING: Cut 2
8. "FRONT CLOSURE FACING", MAIN FABRIC, FUSIBLE INTERFACING: Cut 2
9. "RIGHT FRONT PLACKET", MAIN FABRIC, FUSIBLE INTERFACING: Cut 1


Pattern Specs (Circumferences are divided by 2):

1. Hem max 3.00 none (1 1/8 in)
2. Seam allowance max 2.00 none (3/4 in)
3. Stretch factor 1.00 none (3/8 in)
4. Stretch factor horizontal 1.00 none (3/8 in)
5. Stretch factor vertical 1.00 none (3/8 in)
6. Button diameter 1.00 cm (3/8 in)
7. Front buttons quantity 5.00 pc
8. Front length from HPS to hem 43.02 cm (16 7/8 in)
9. Across chest 30.75 cm (12 1/8 in)
10. Center front length to hem 35.06 cm (13 3/4 in)
11. Center back length to hem 38.78 cm (15 1/4 in)
12. Across front 22.52 cm (8 7/8 in)
13. Across back 22.45 cm (8 7/8 in)
14. Across shoulders 26.90 cm (10 5/8 in)
15. Side seam 22.23 cm (8 3/4 in)
16. Waist 35.64 cm (14 in)
17. Hemline sweep 42.55 cm (16 3/4 in)
18. Armhole length front 17.21 cm (6 3/4 in)
19. Armhole length back 18.17 cm (7 1/8 in)

20. Neck opening 14.63 cm (5 3/4 in)
21. Neckline length 39.59 cm (15 5/8 in)
22. Front neck drop 7.94 cm (3 1/8 in)
23. Back neck drop 2.62 cm (1 in)
24. Shoulder width 6.52 cm (2 5/8 in)
25. Placket length 35.06 cm (13 3/4 in)
26. Placket width 2.50 cm (1 in)
27. Collar width 9.50 cm (3 3/4 in)
28. Collar edges length 9.00 cm (3 1/2 in)
29. Sleeve length 40.04 cm (15 3/4 in)
30. Sleeve upper arm width 23.69 cm (9 3/8 in)
31. Sleeve opening 18.66 cm (7 3/8 in)

cozysewpatterns


Paper Size: LETTER;
Print Actual Size (100% Scale);

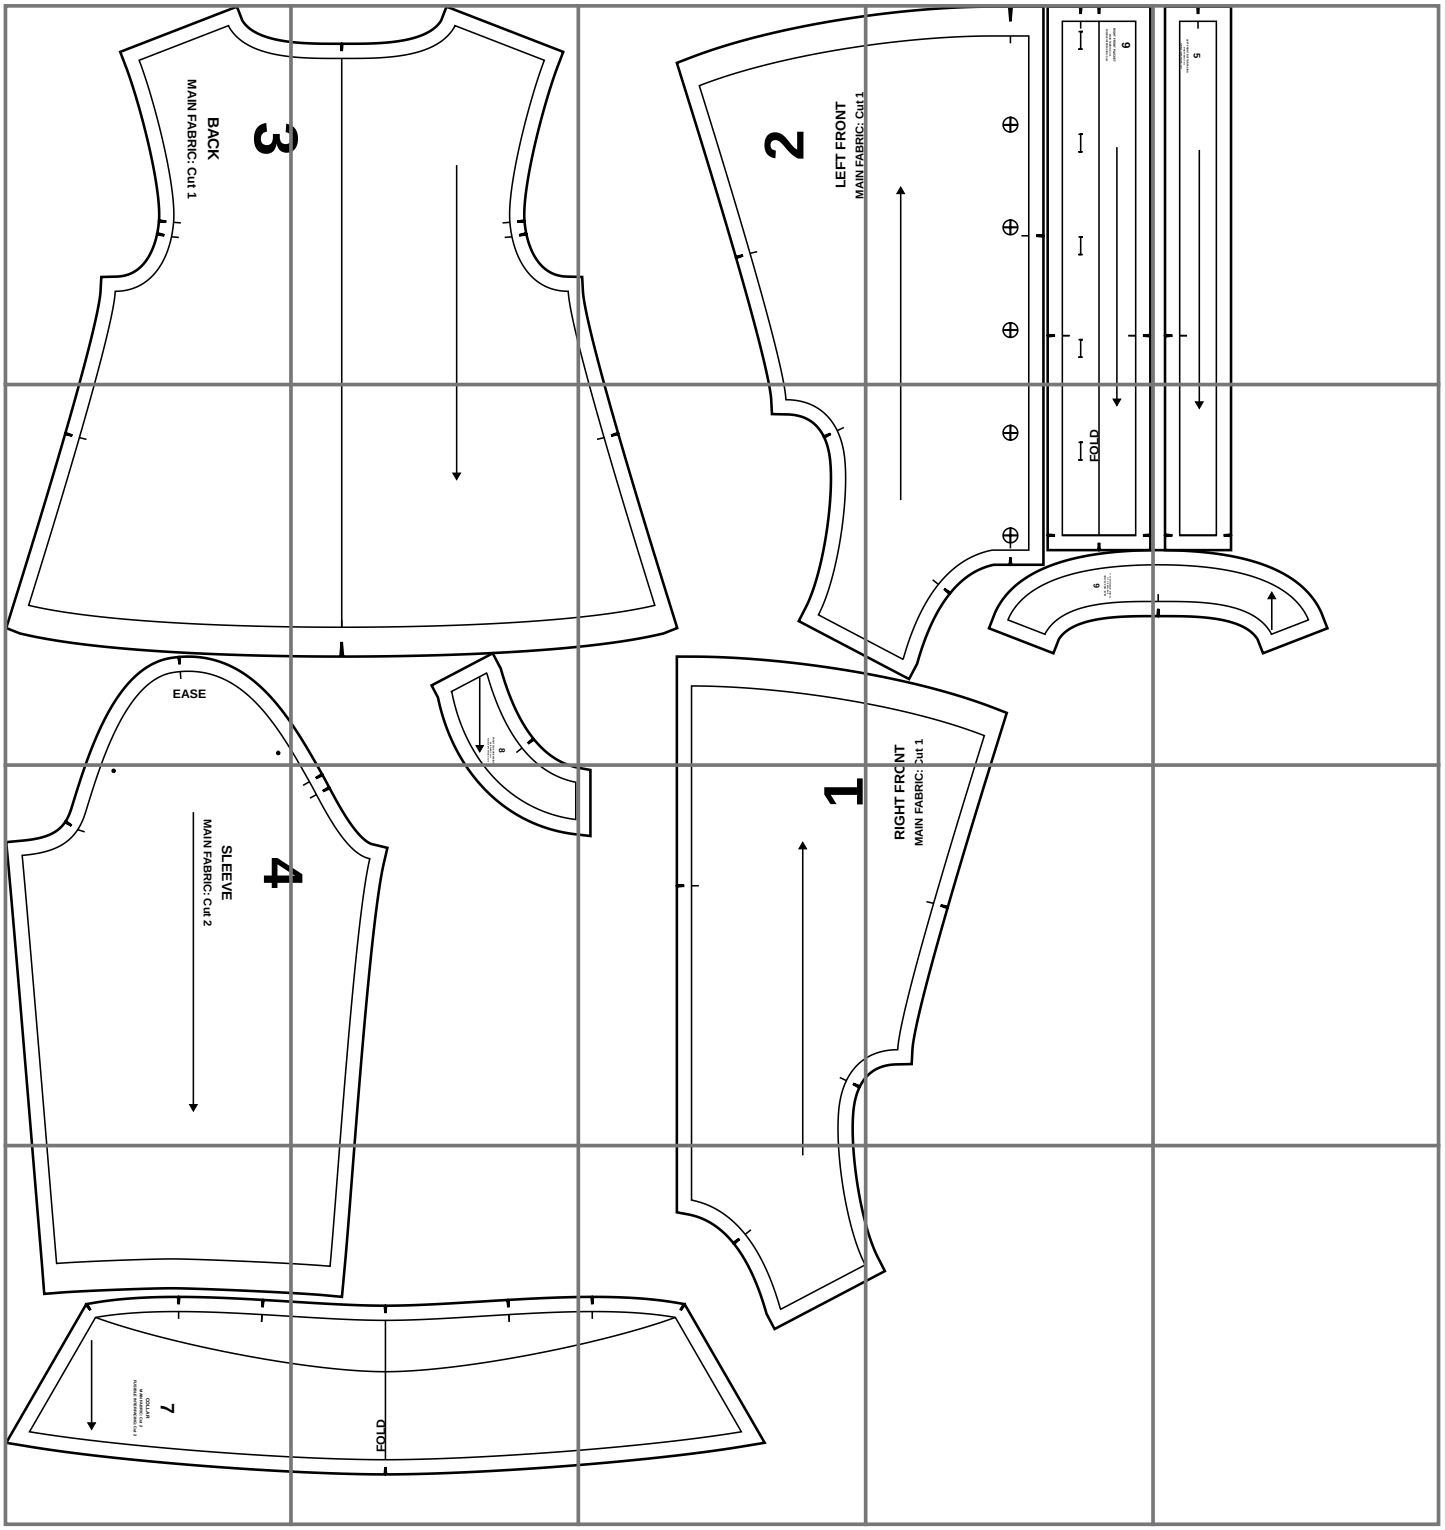



3

BACK

MAIN FABRIC: Cut 1

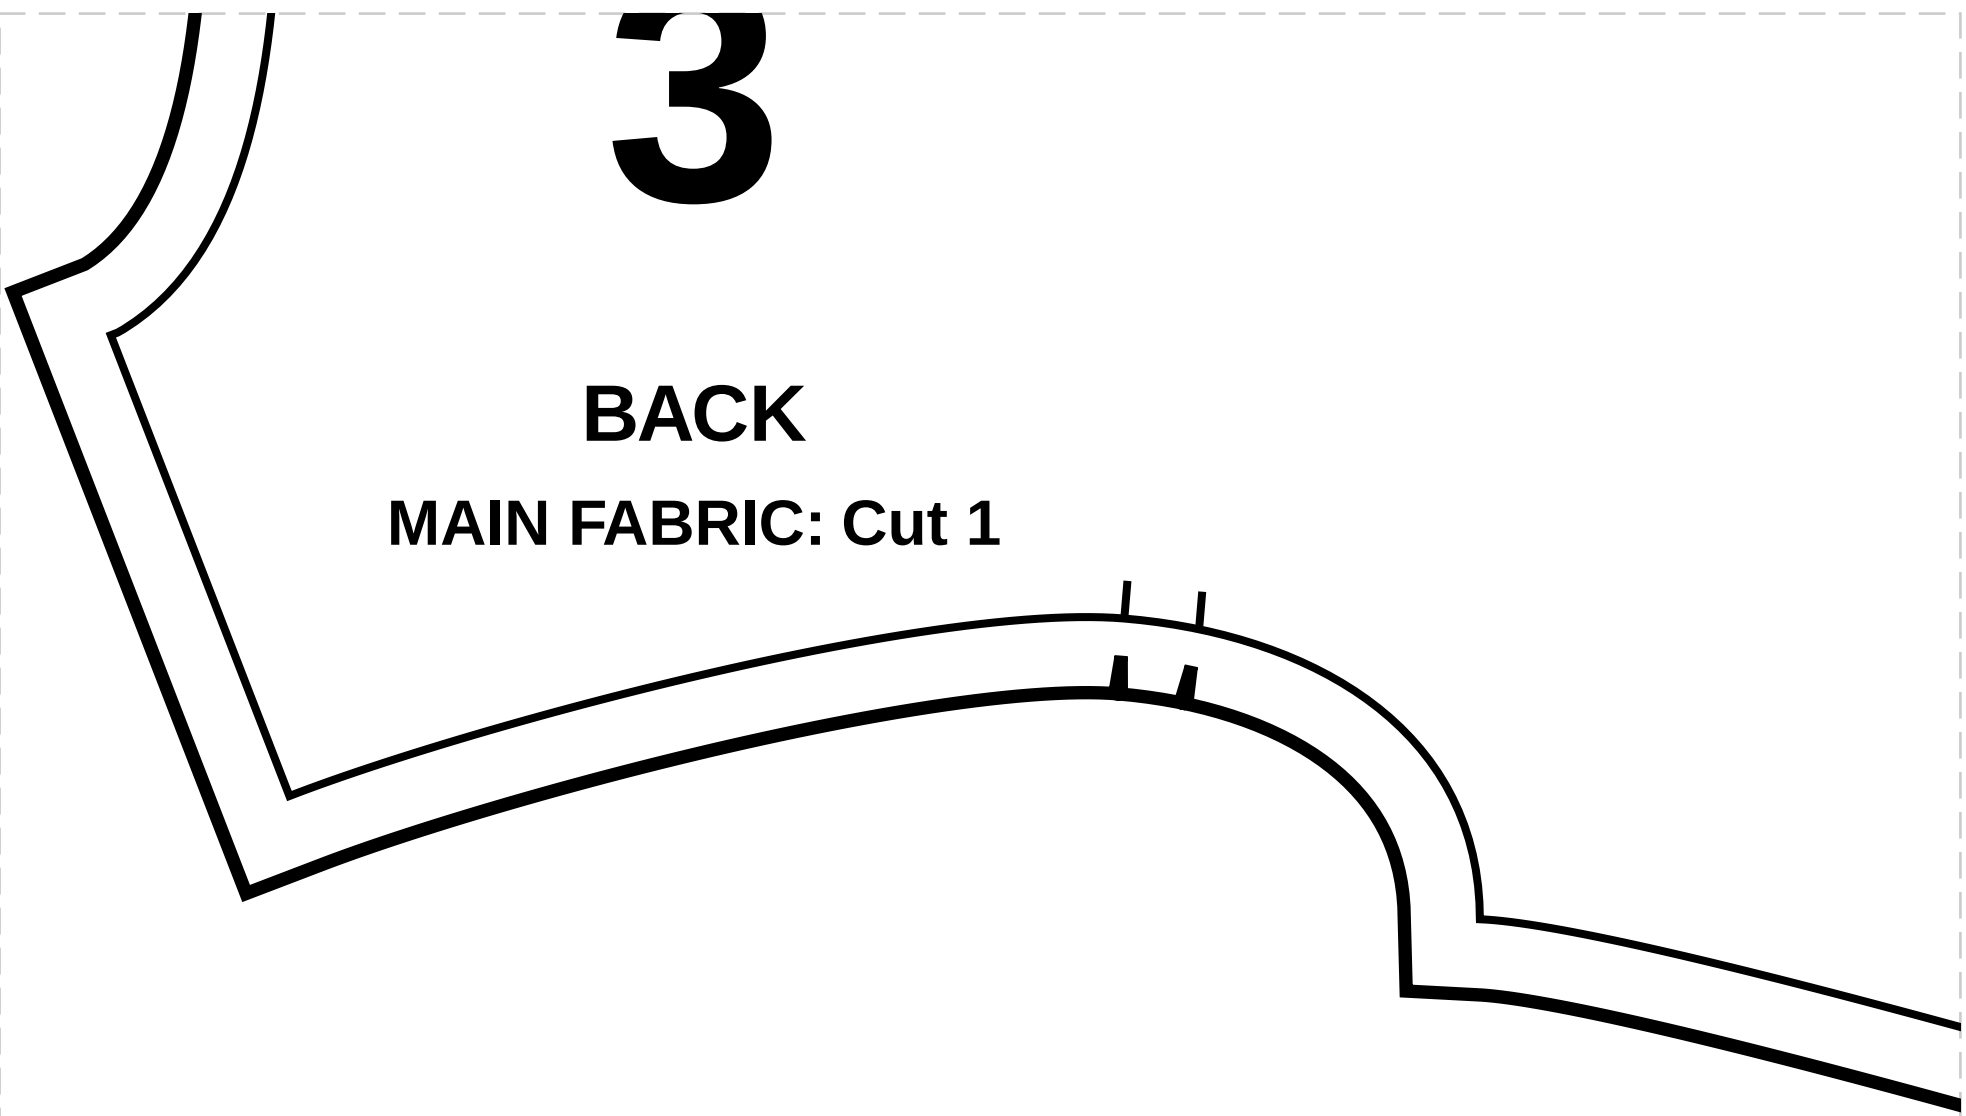

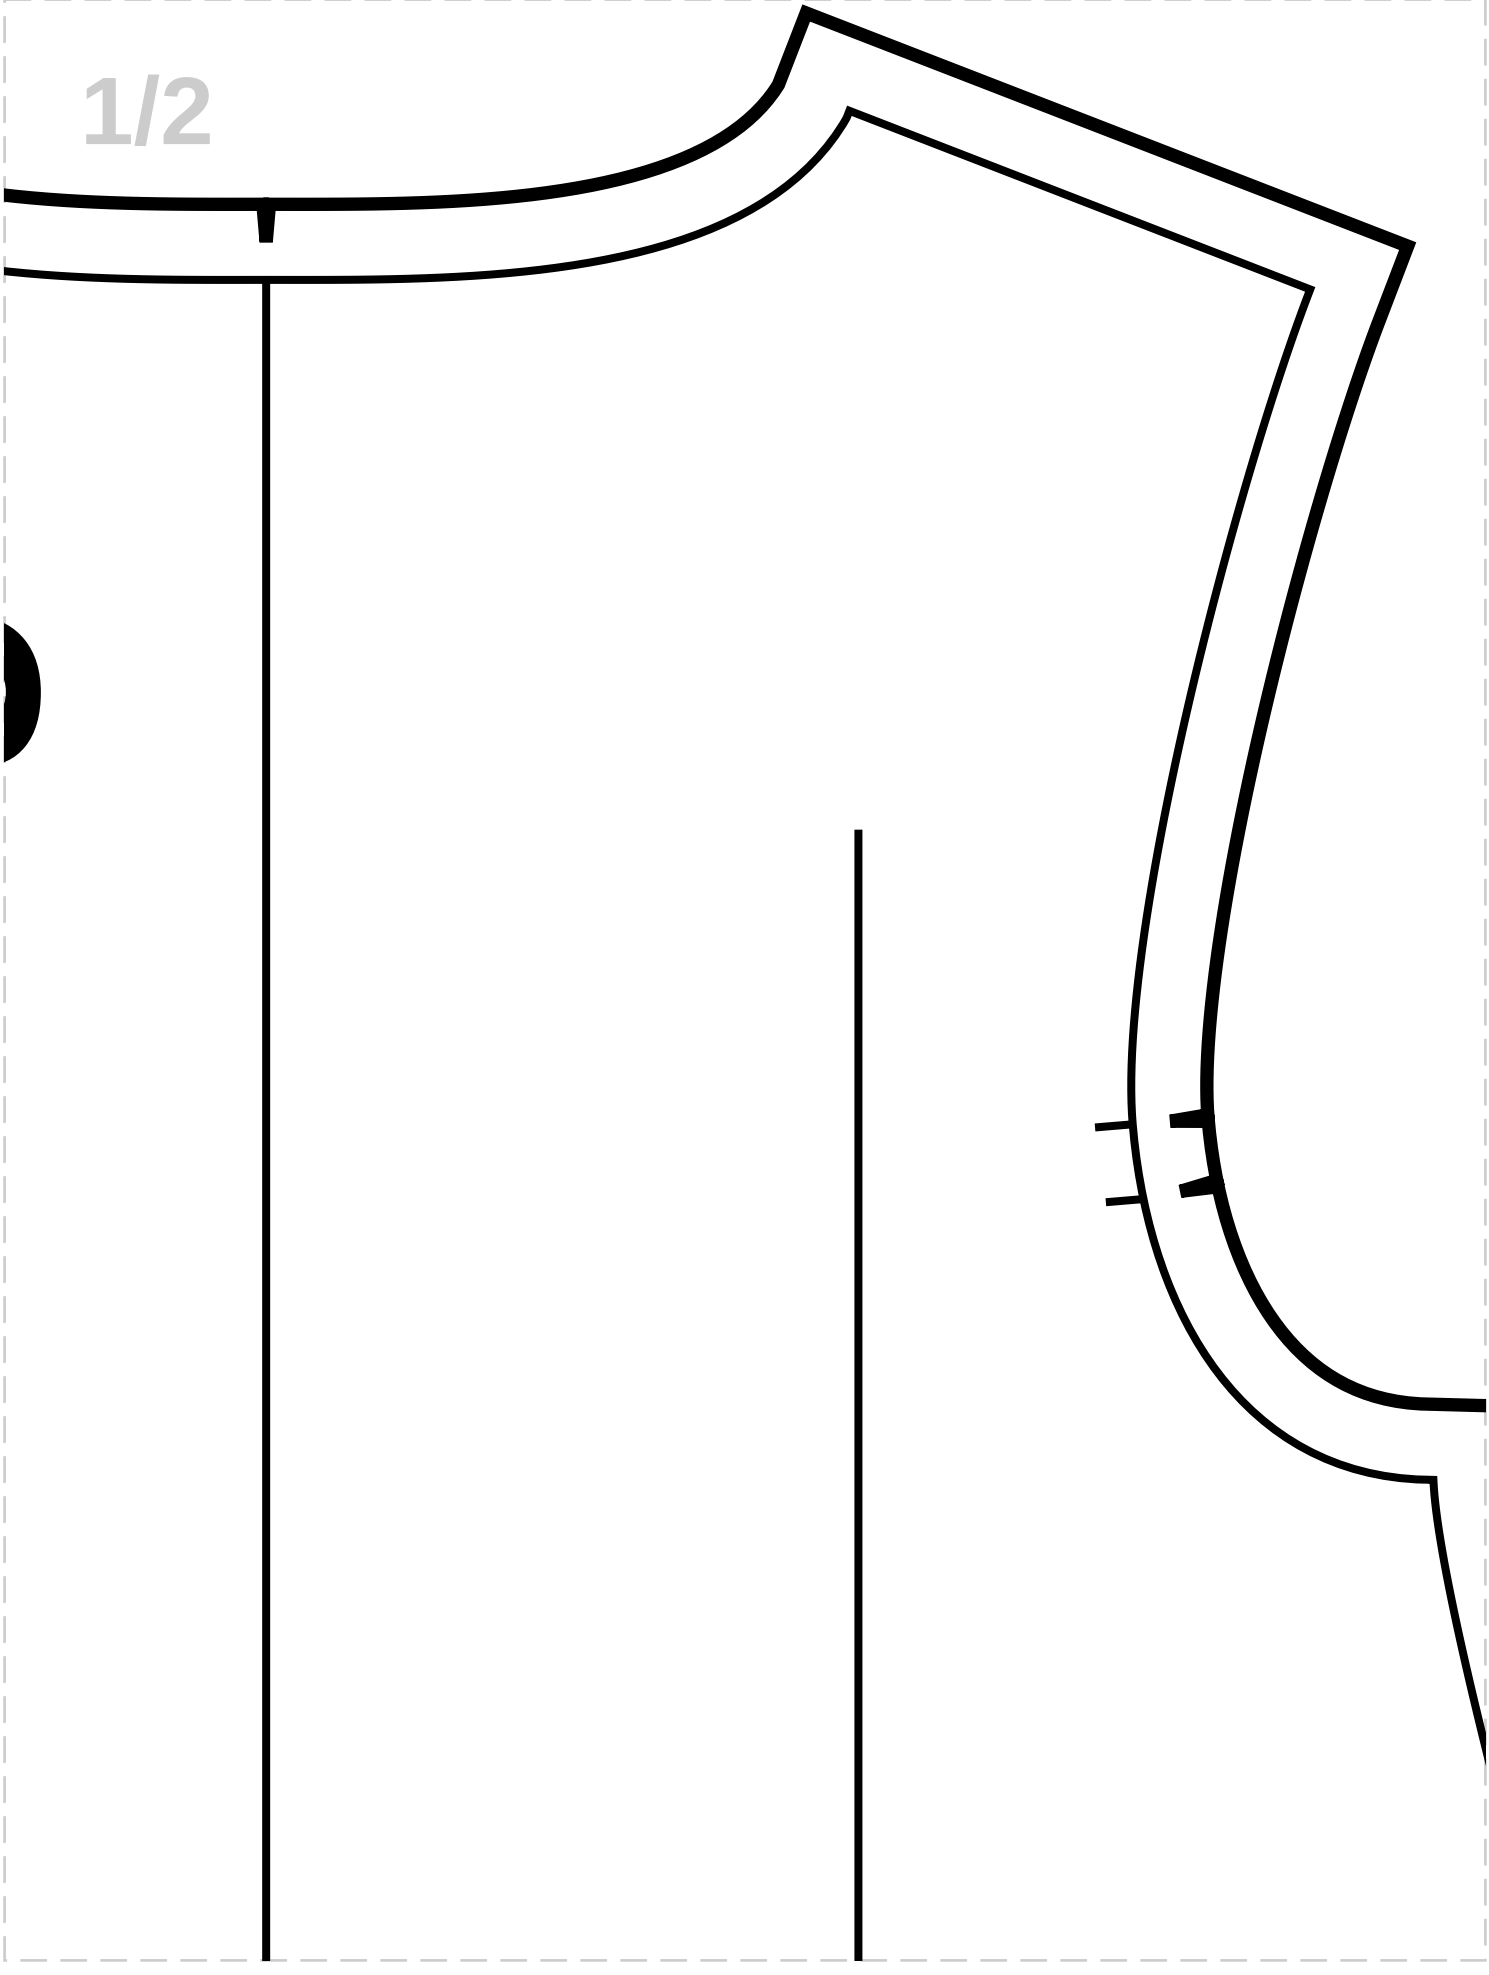


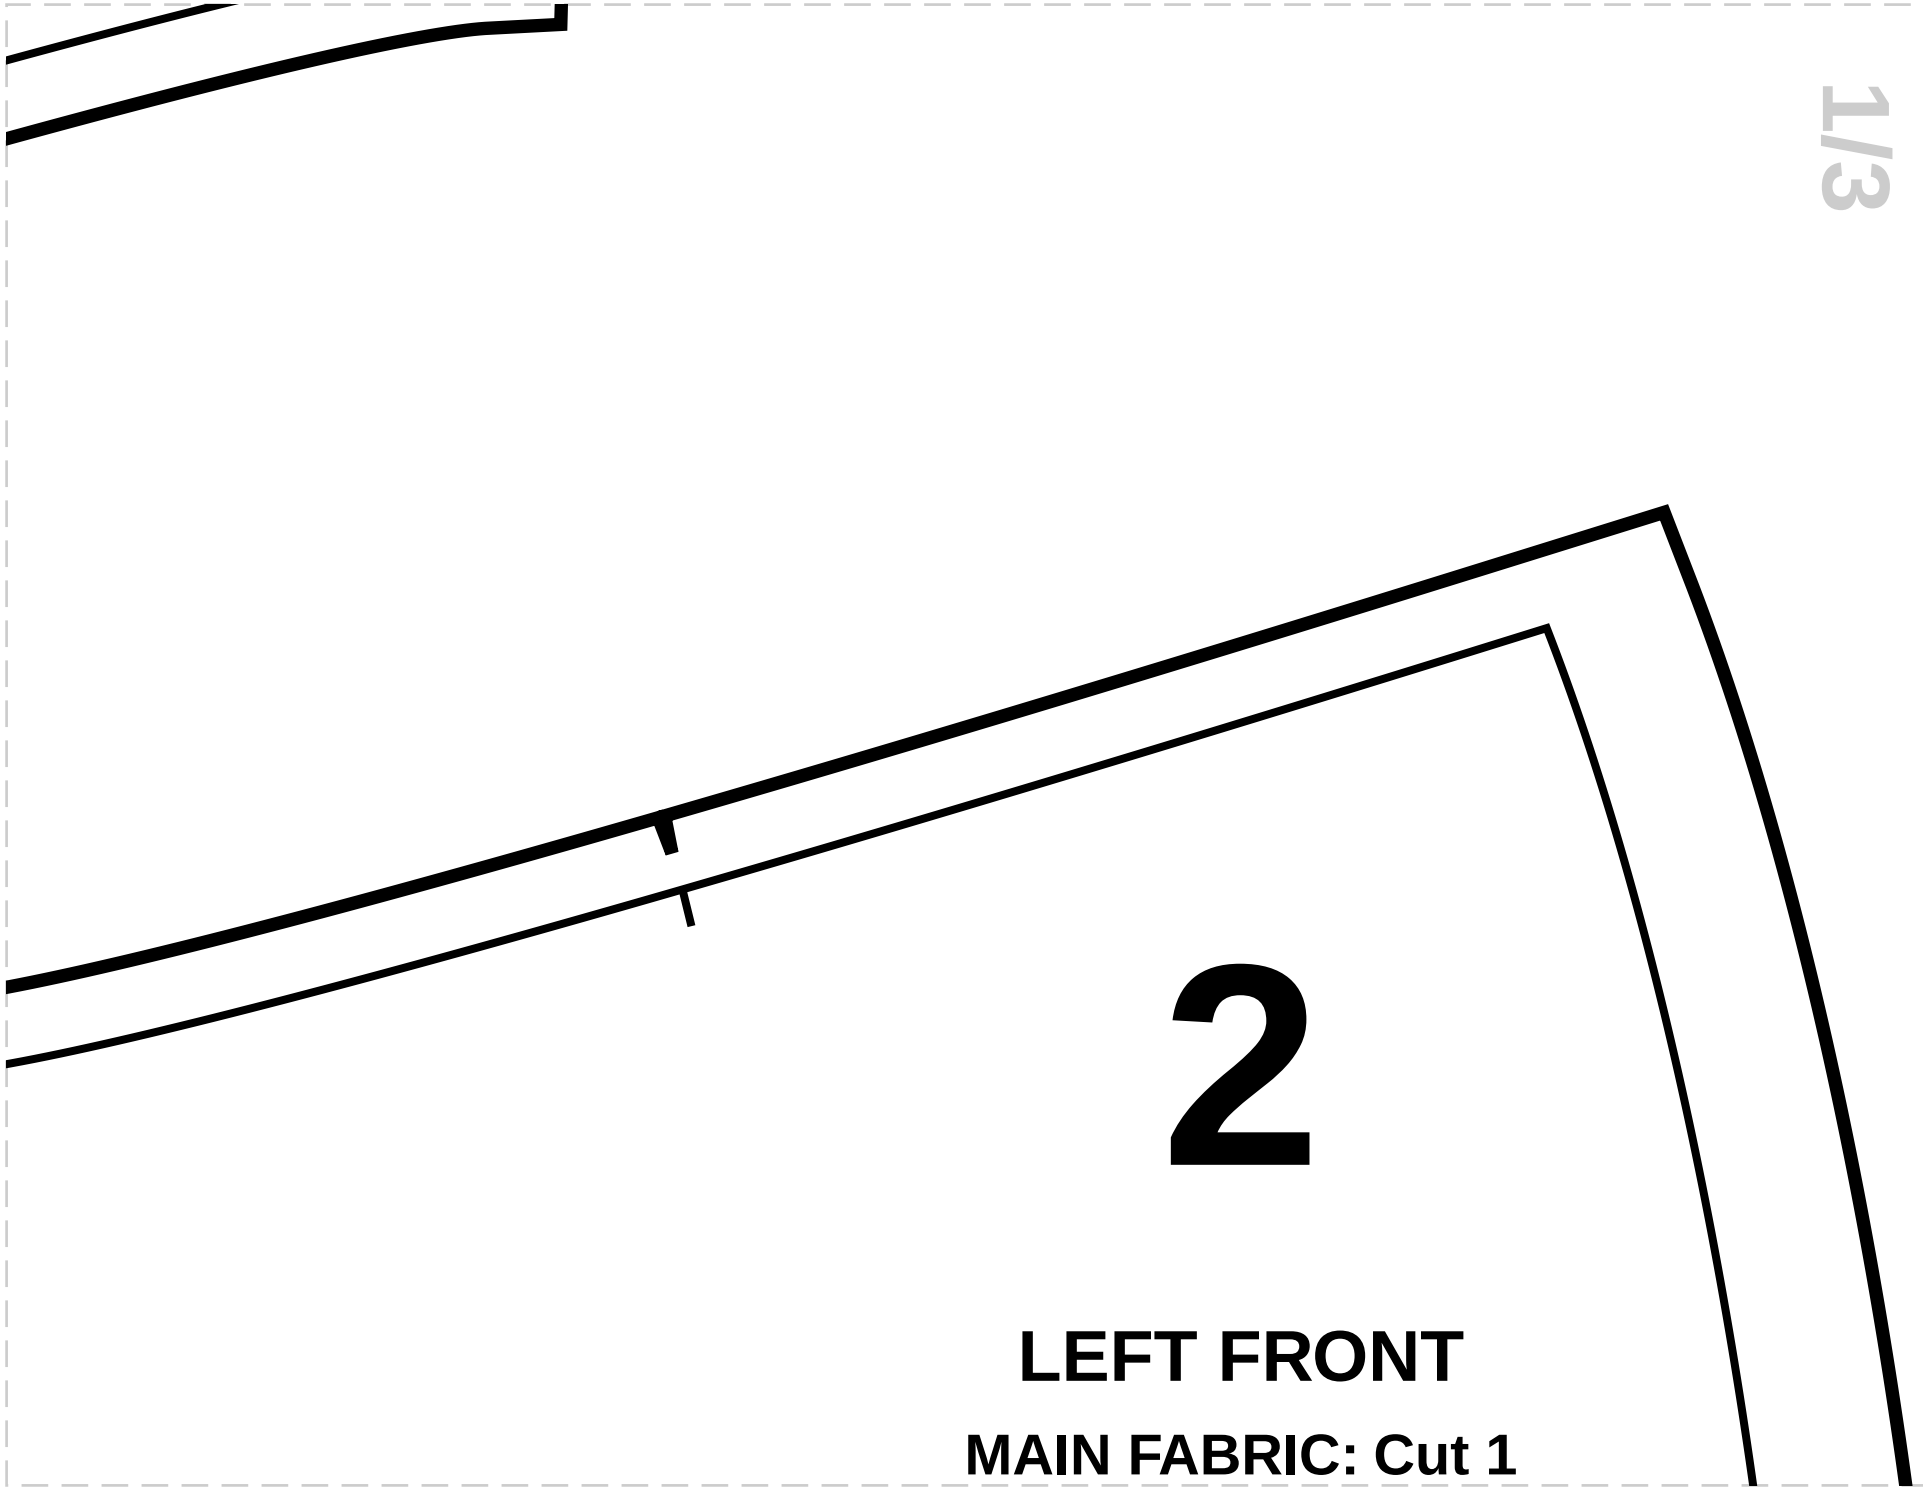



2


LEFT FRONT


MAIN FABRIC: Cut 1

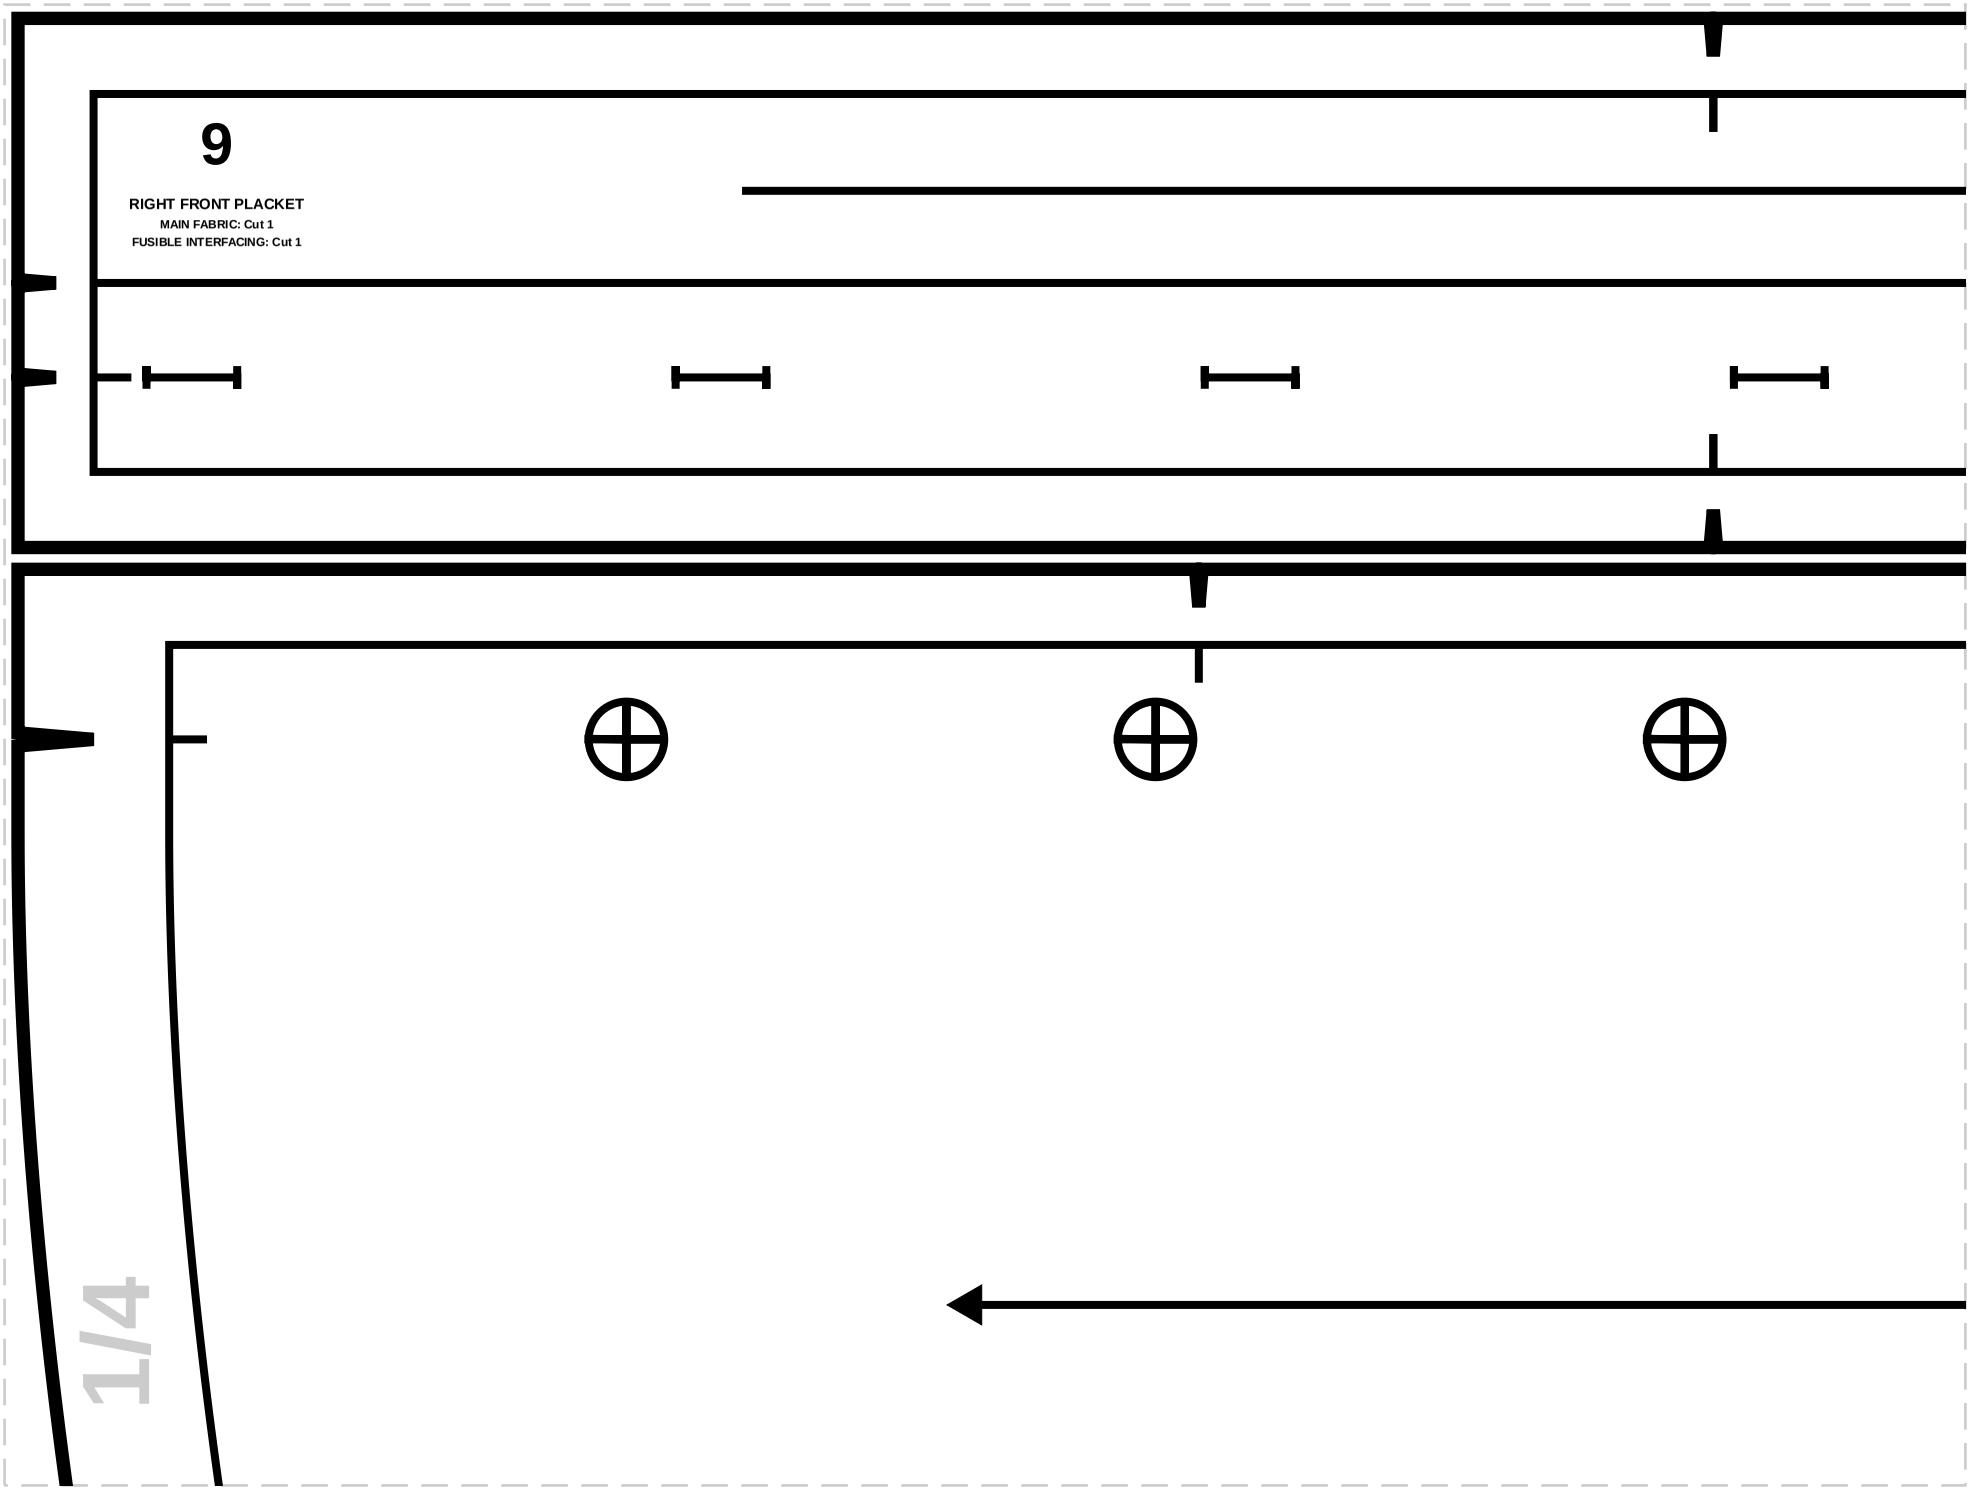

9
RIGHT FRONT PLACKET
MAIN FABRIC: Cut 1
FUSIBLE INTERFACING: Cut 1
1/4

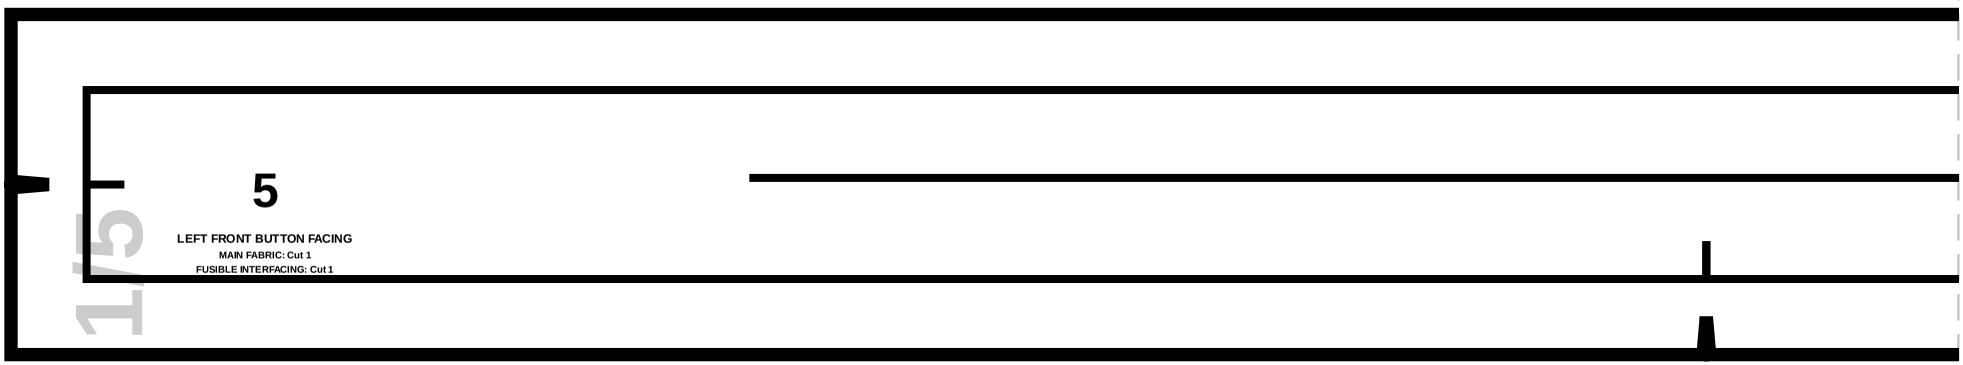

5
LEFT FRONT BUTTON FACING
MAIN FABRIC: Cut 1
FUSIBLE INTERFACING: Cut 1
175

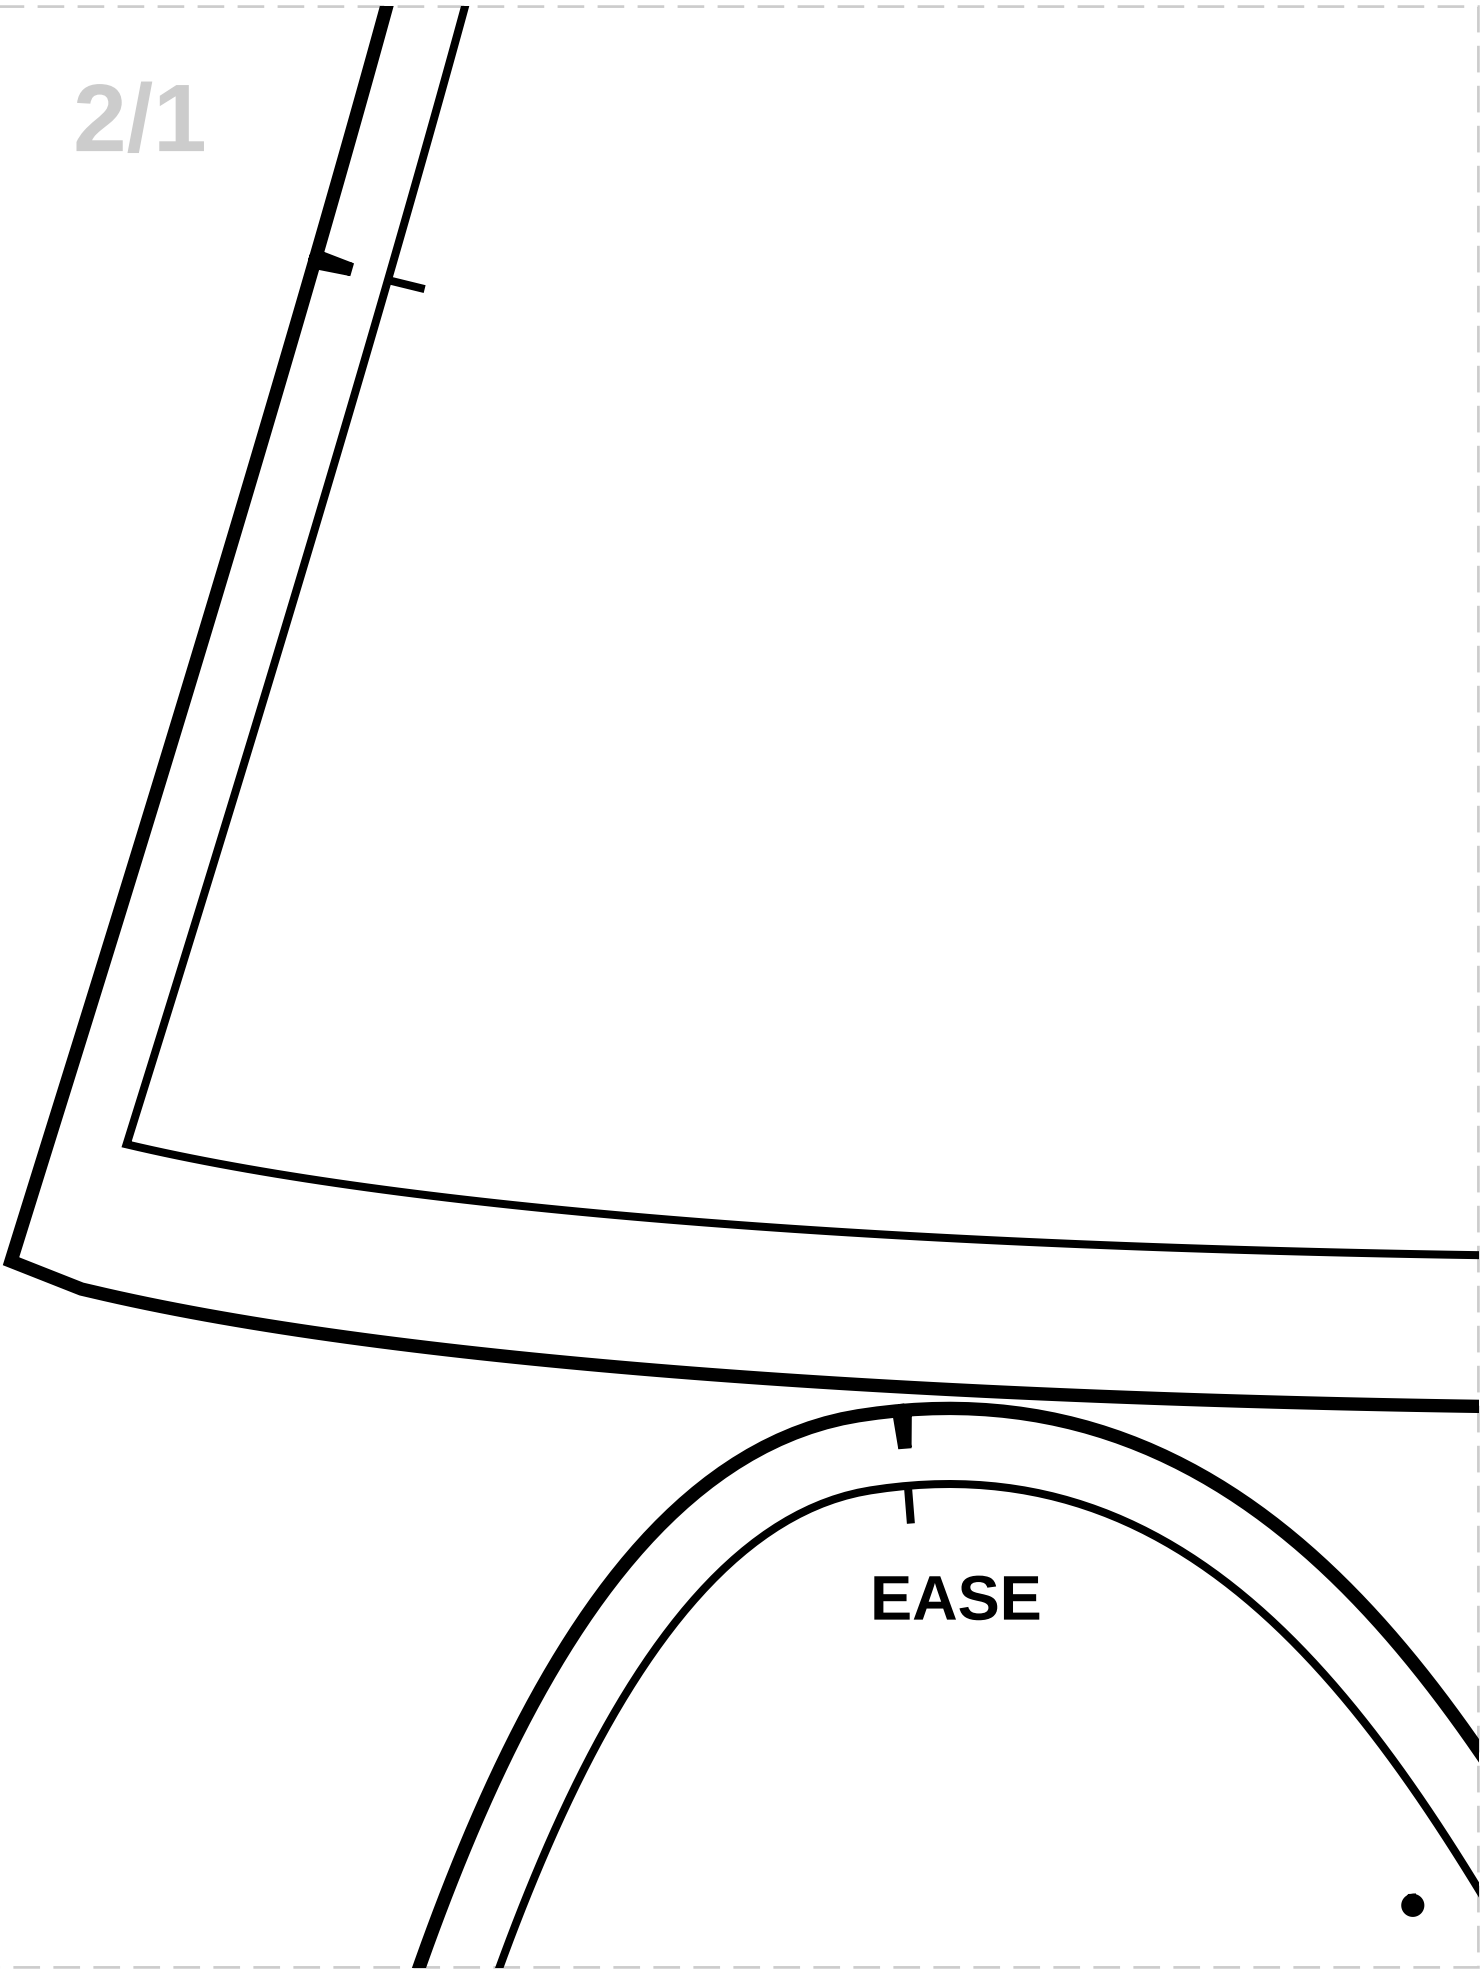
EASE

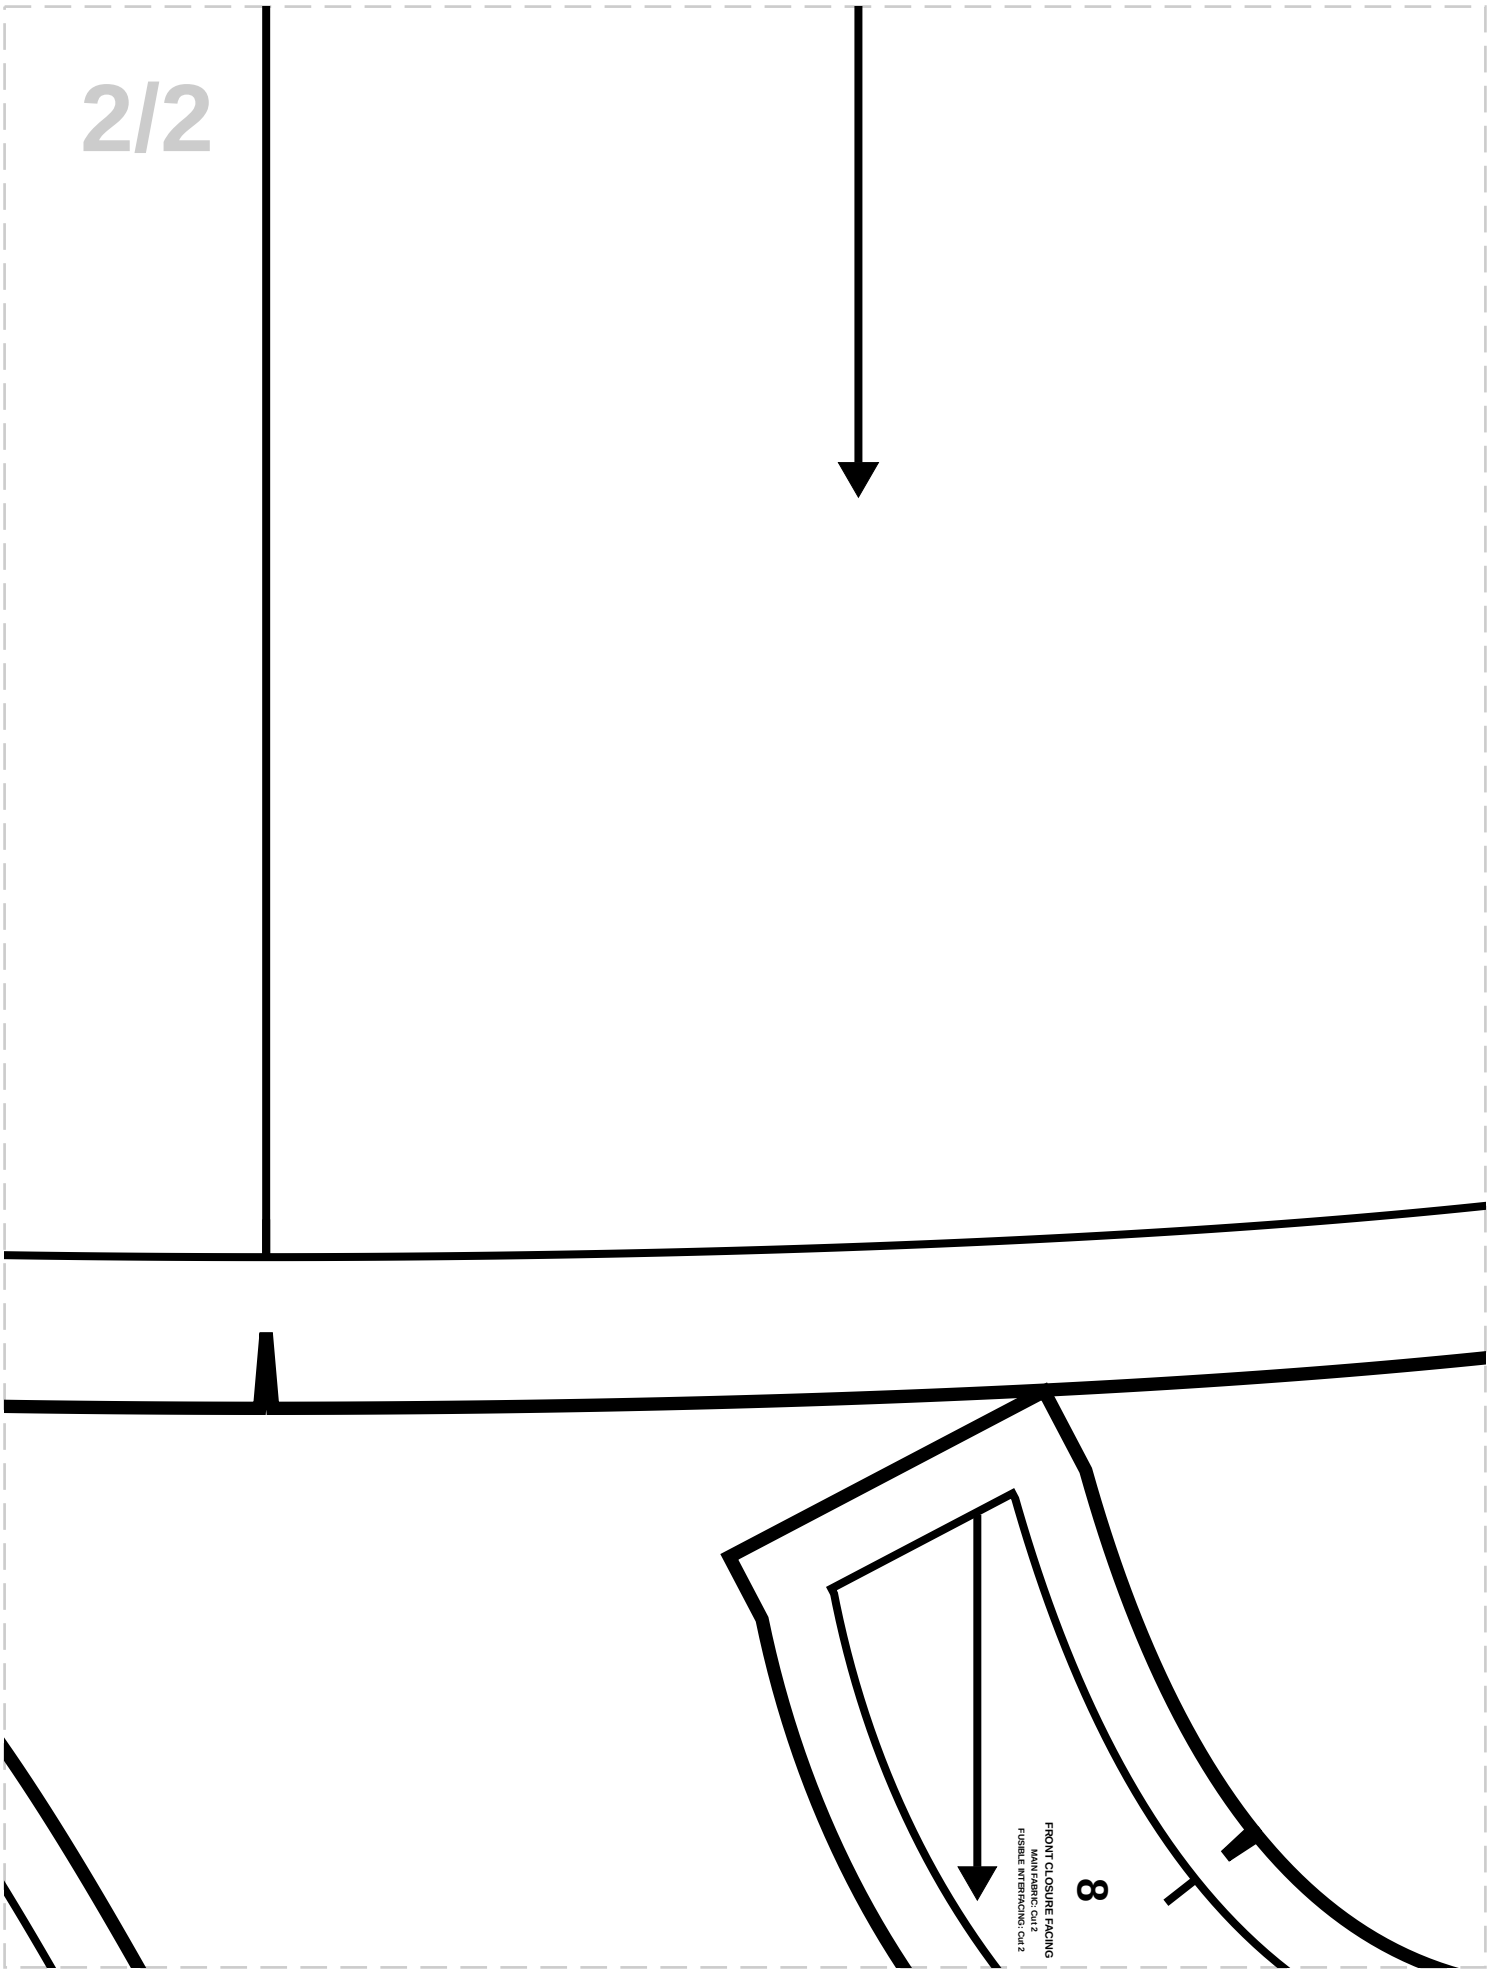
8
FRONT CLOSURE FACING
MAIN FABRIC: Cut 2
FUSIBLE INTERFACING: Cut 2

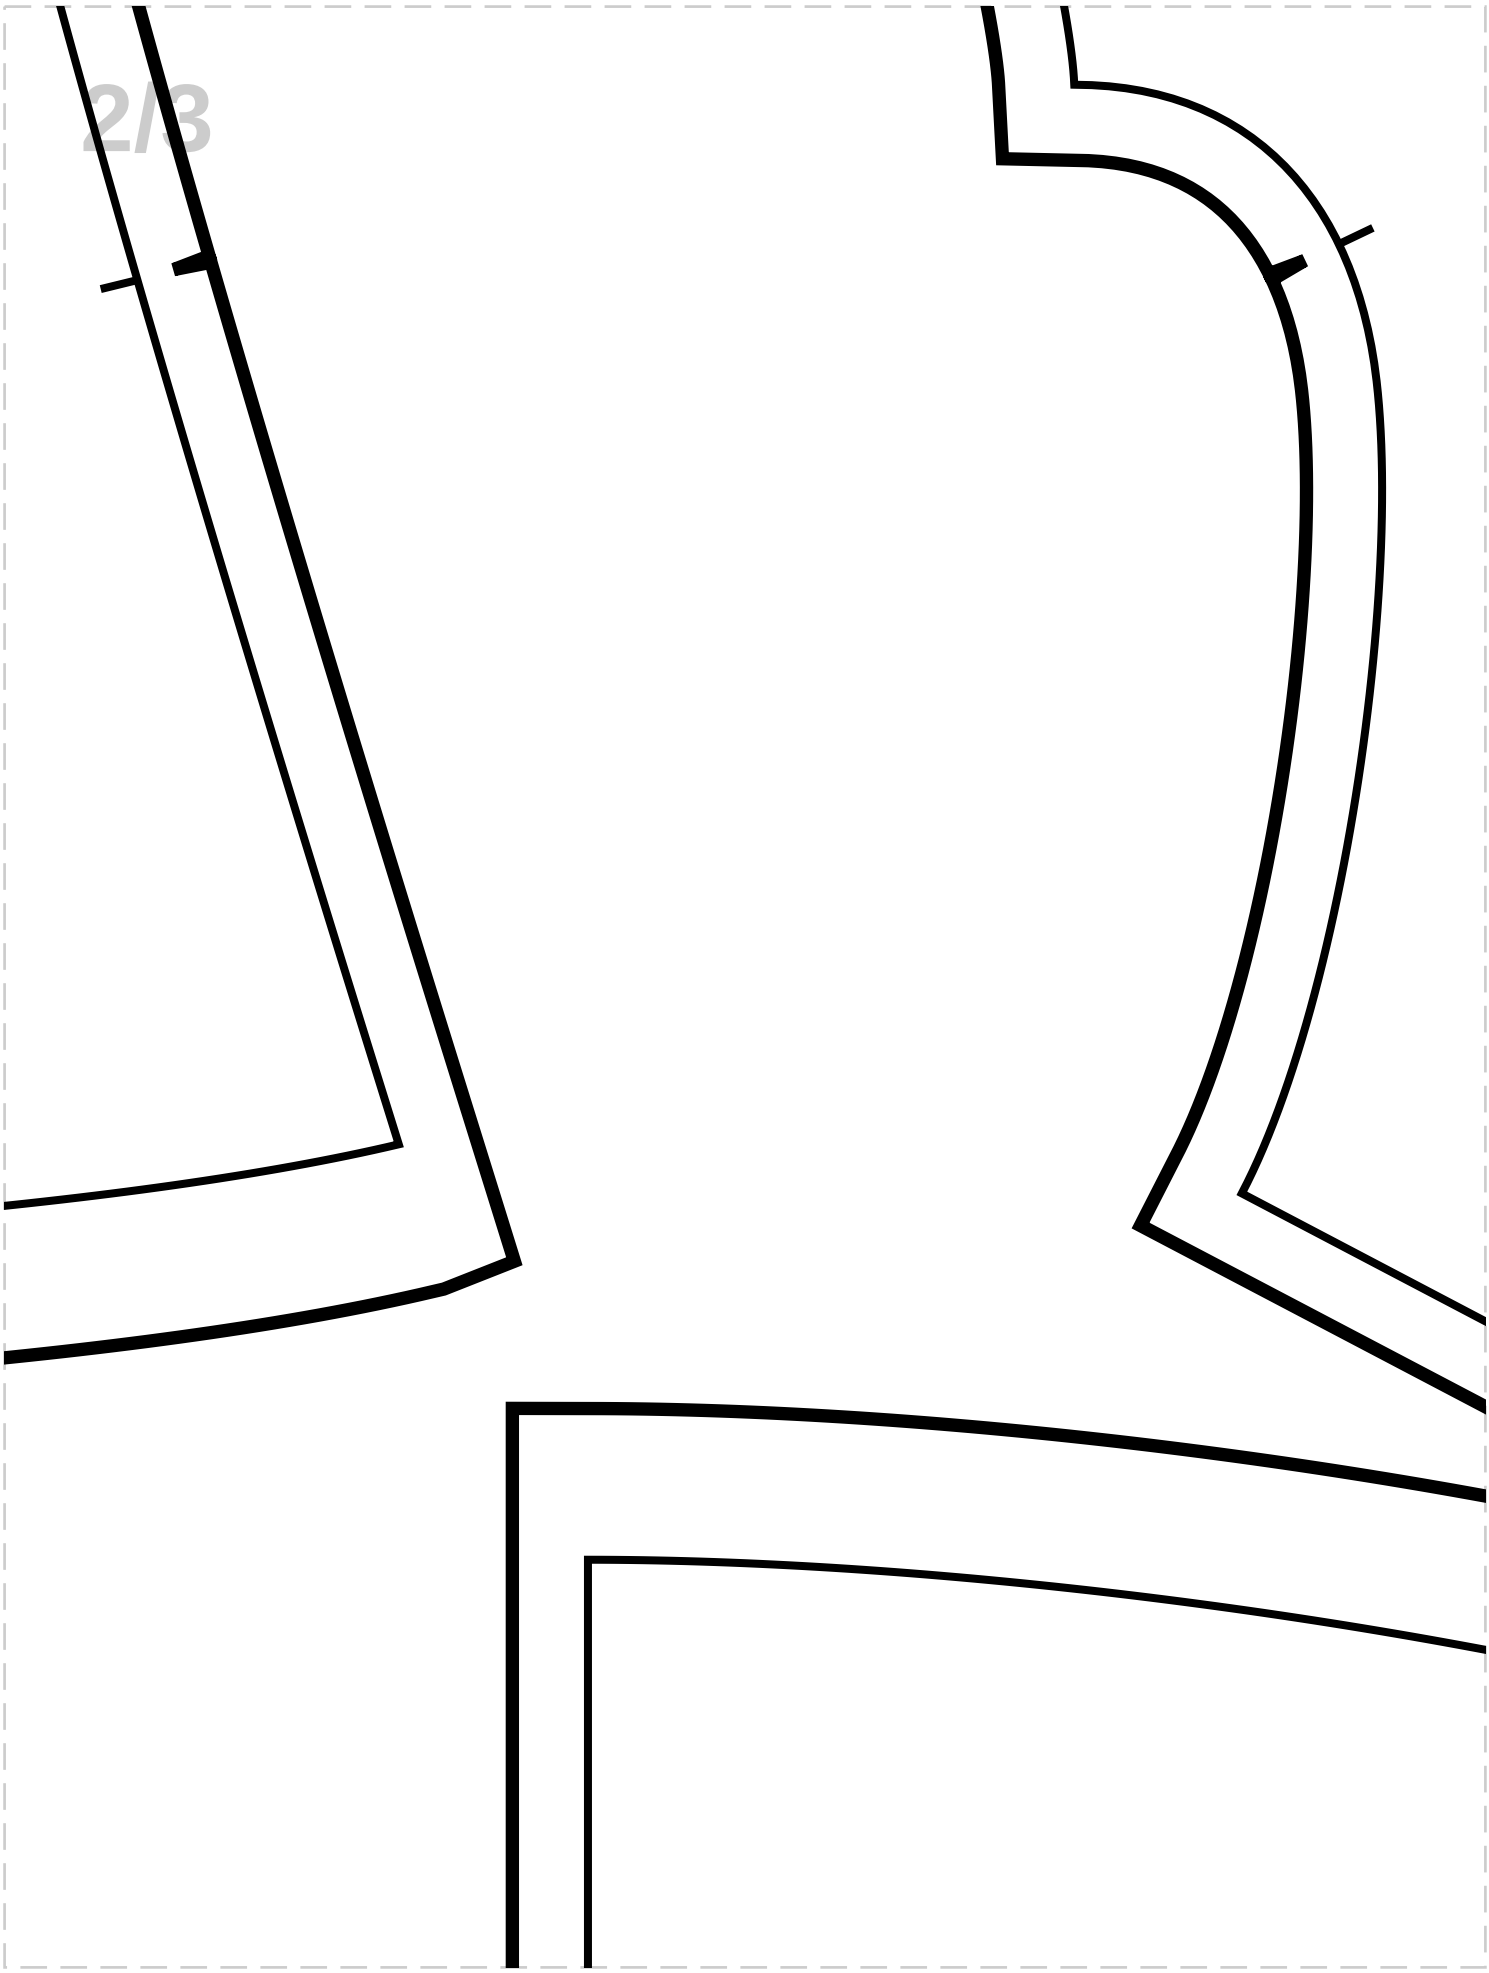

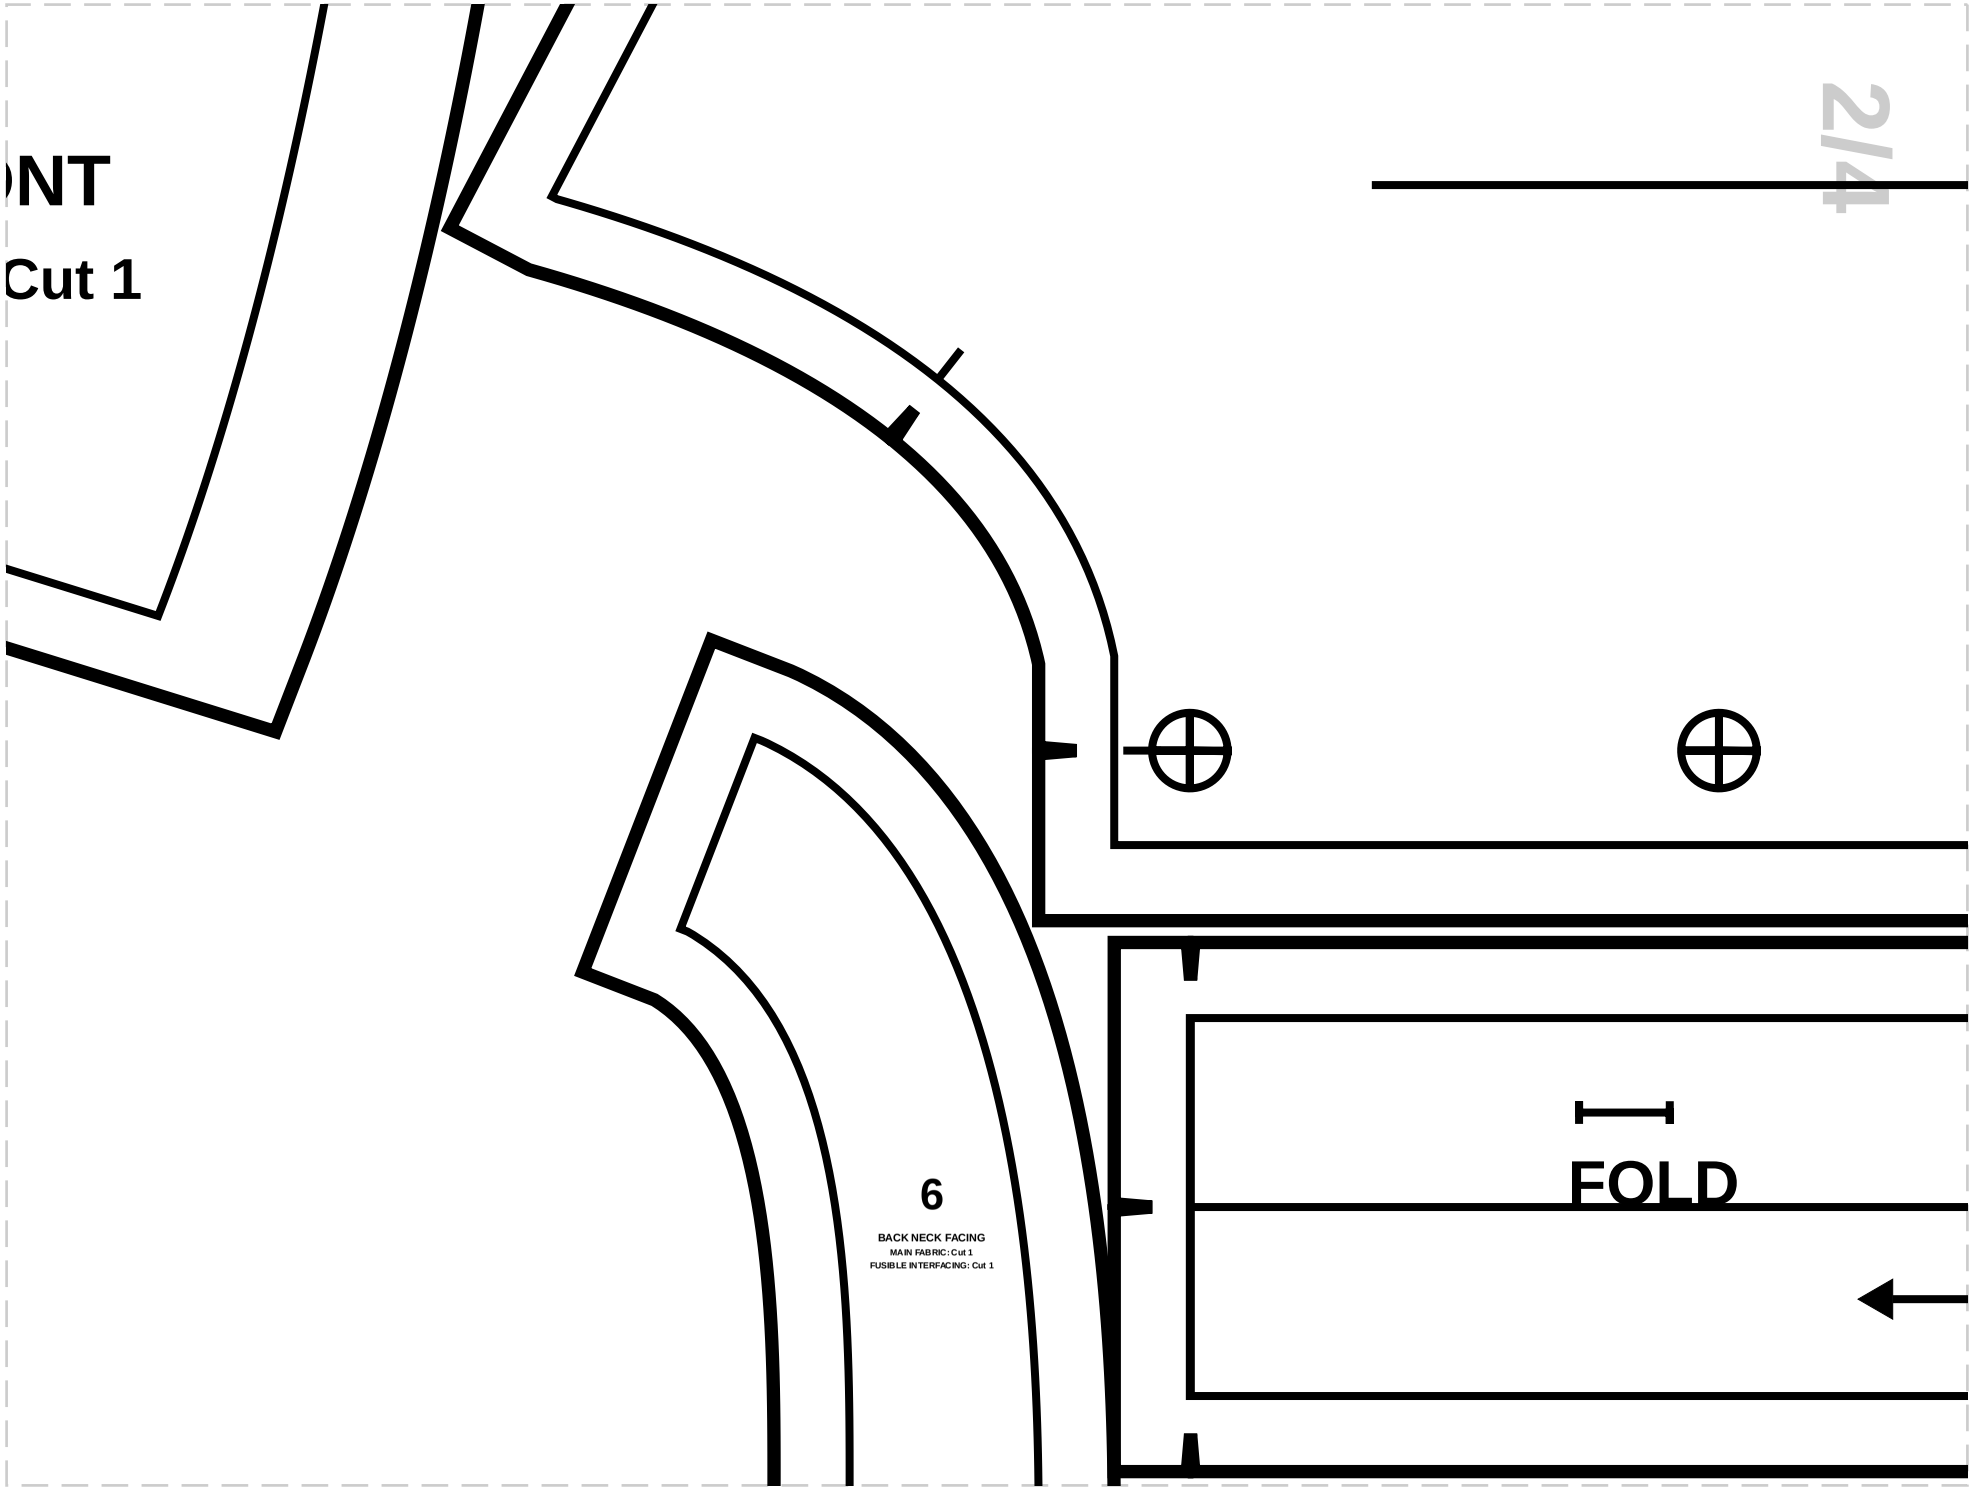

)NT
Cut 1
6
BACK NECK FACING
MAIN FABRIC: Cut 1
FUSIBLE INTERFACING: Cut 1
FOLD

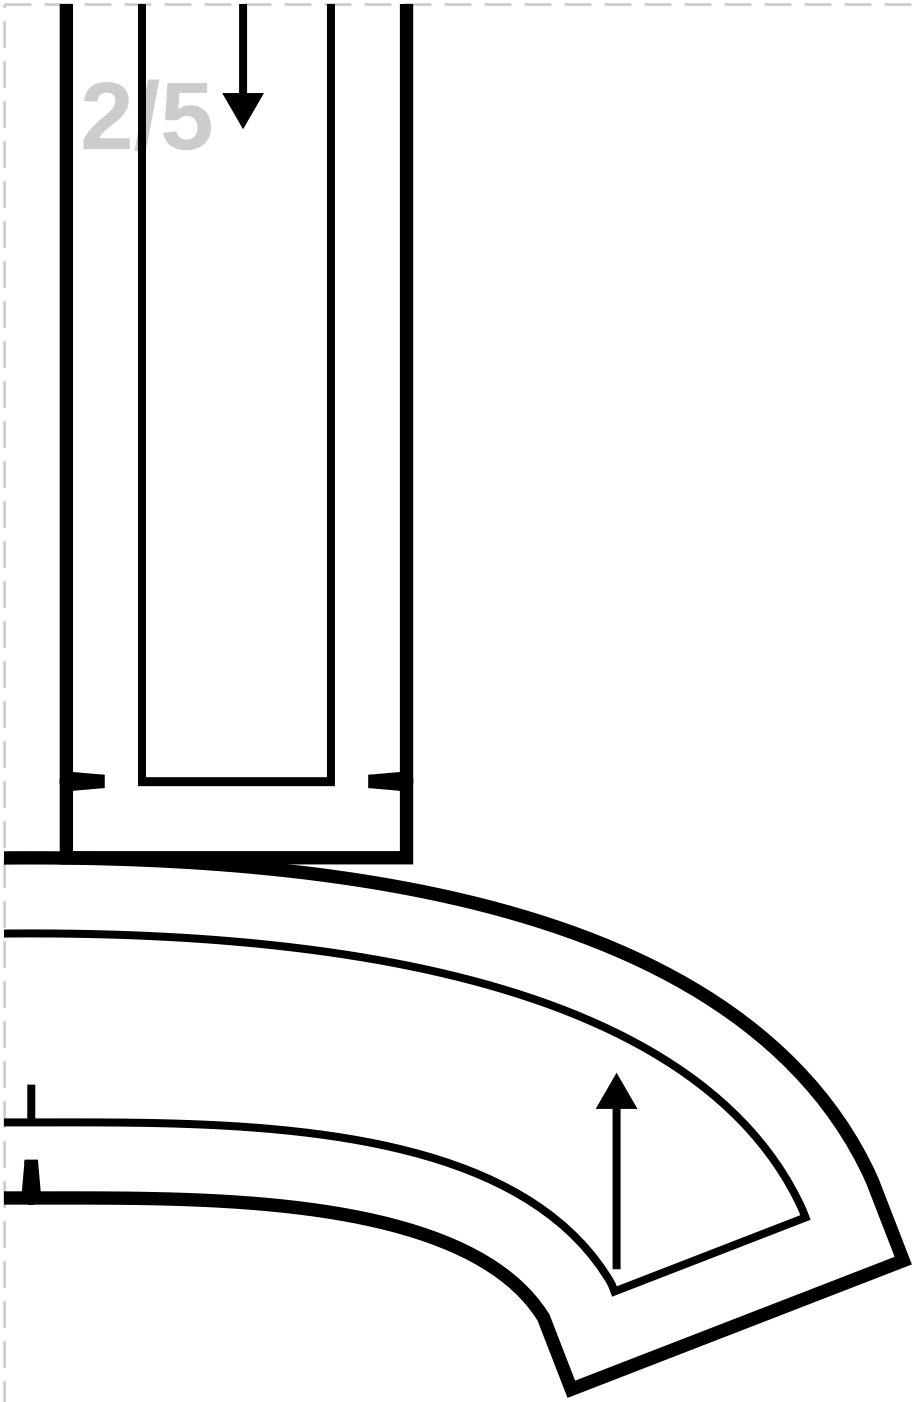


4


SLEEVE

MAIN FABRIC: Cut 2

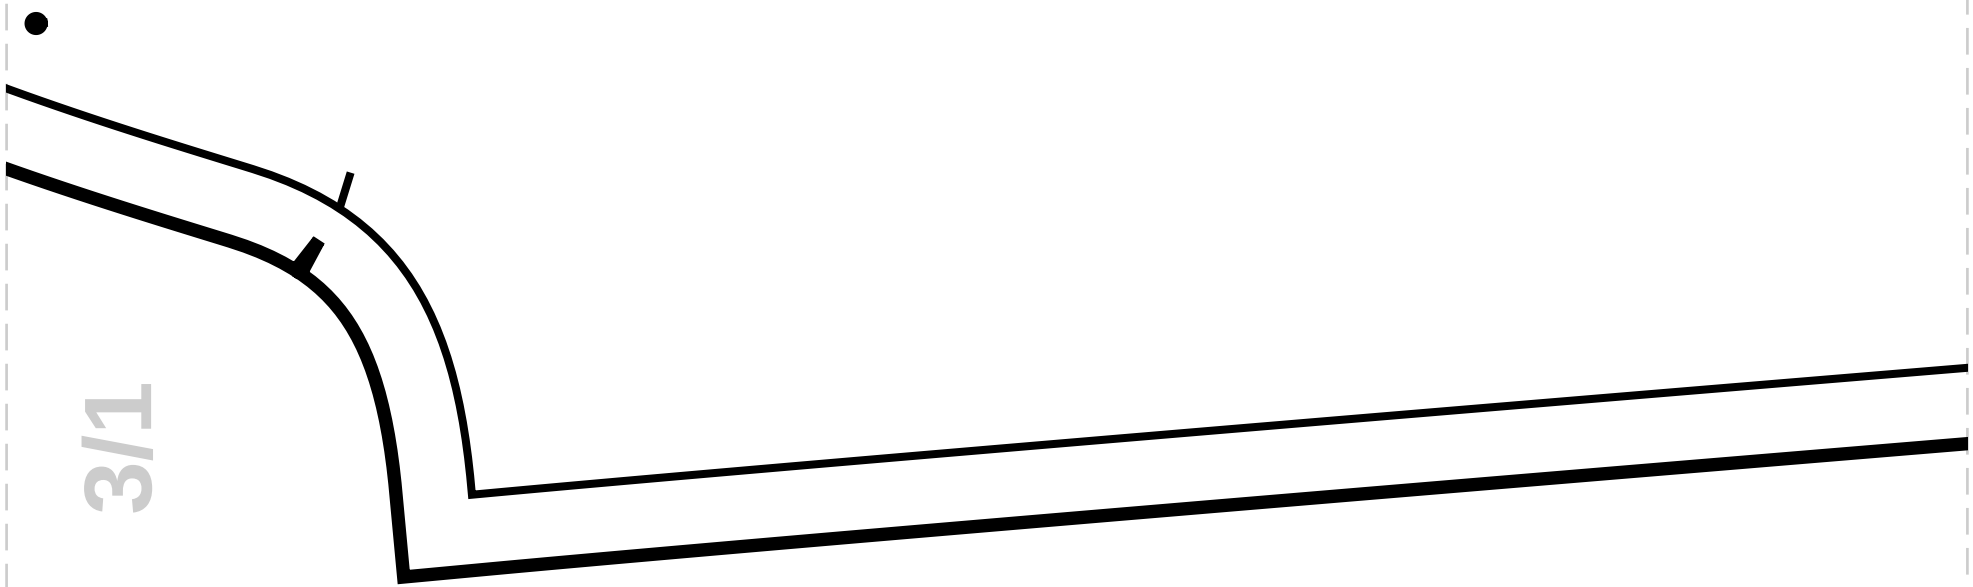

3/1

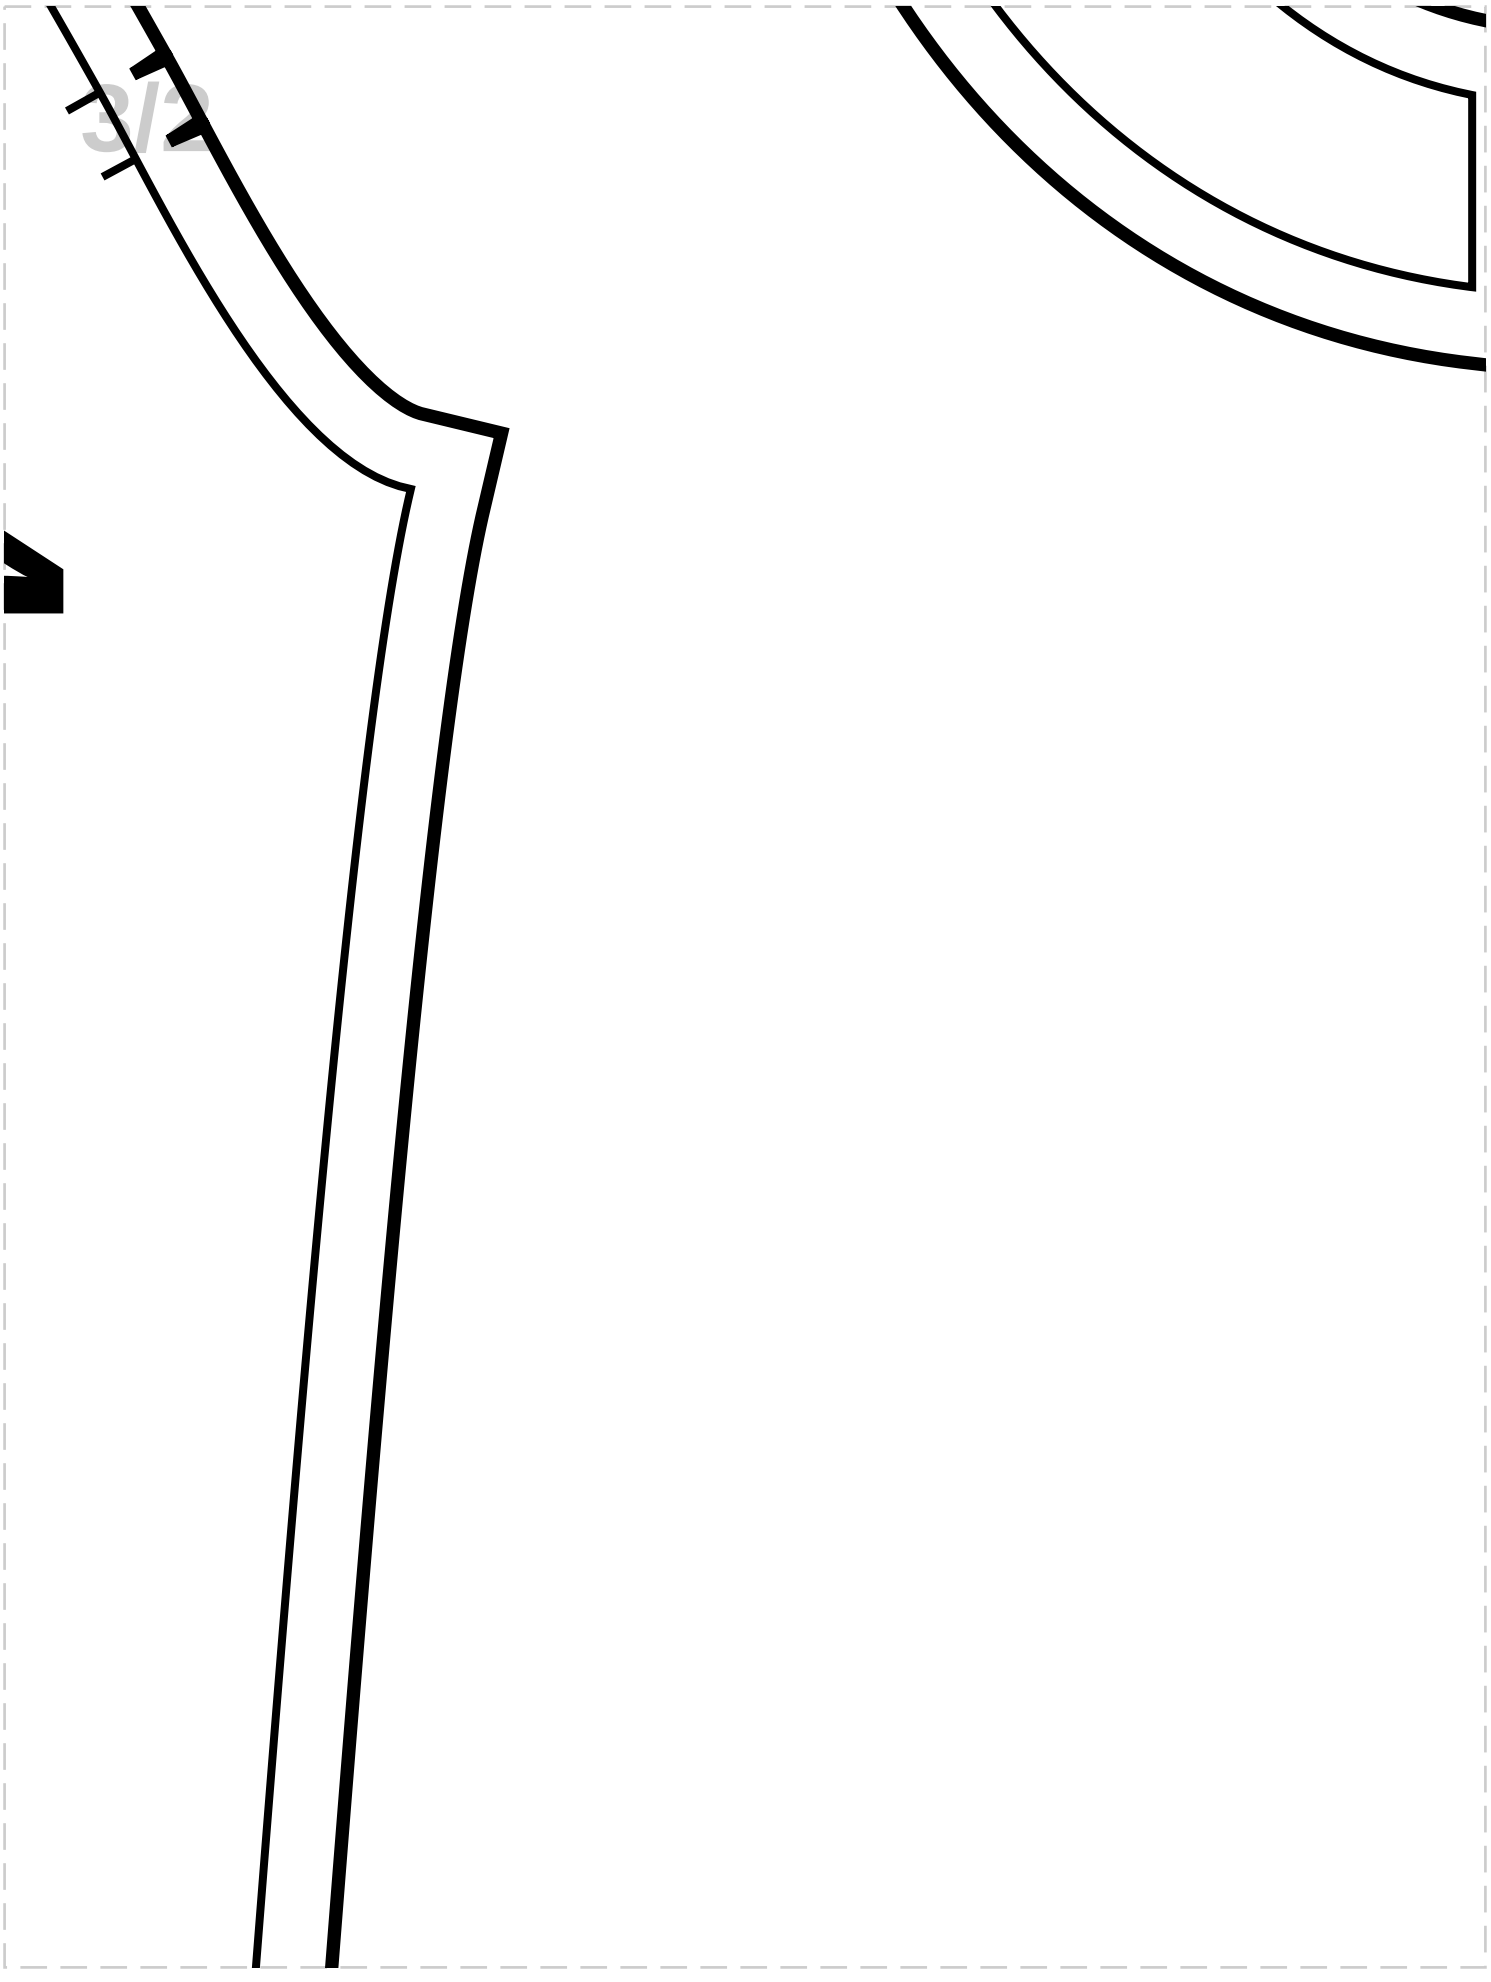


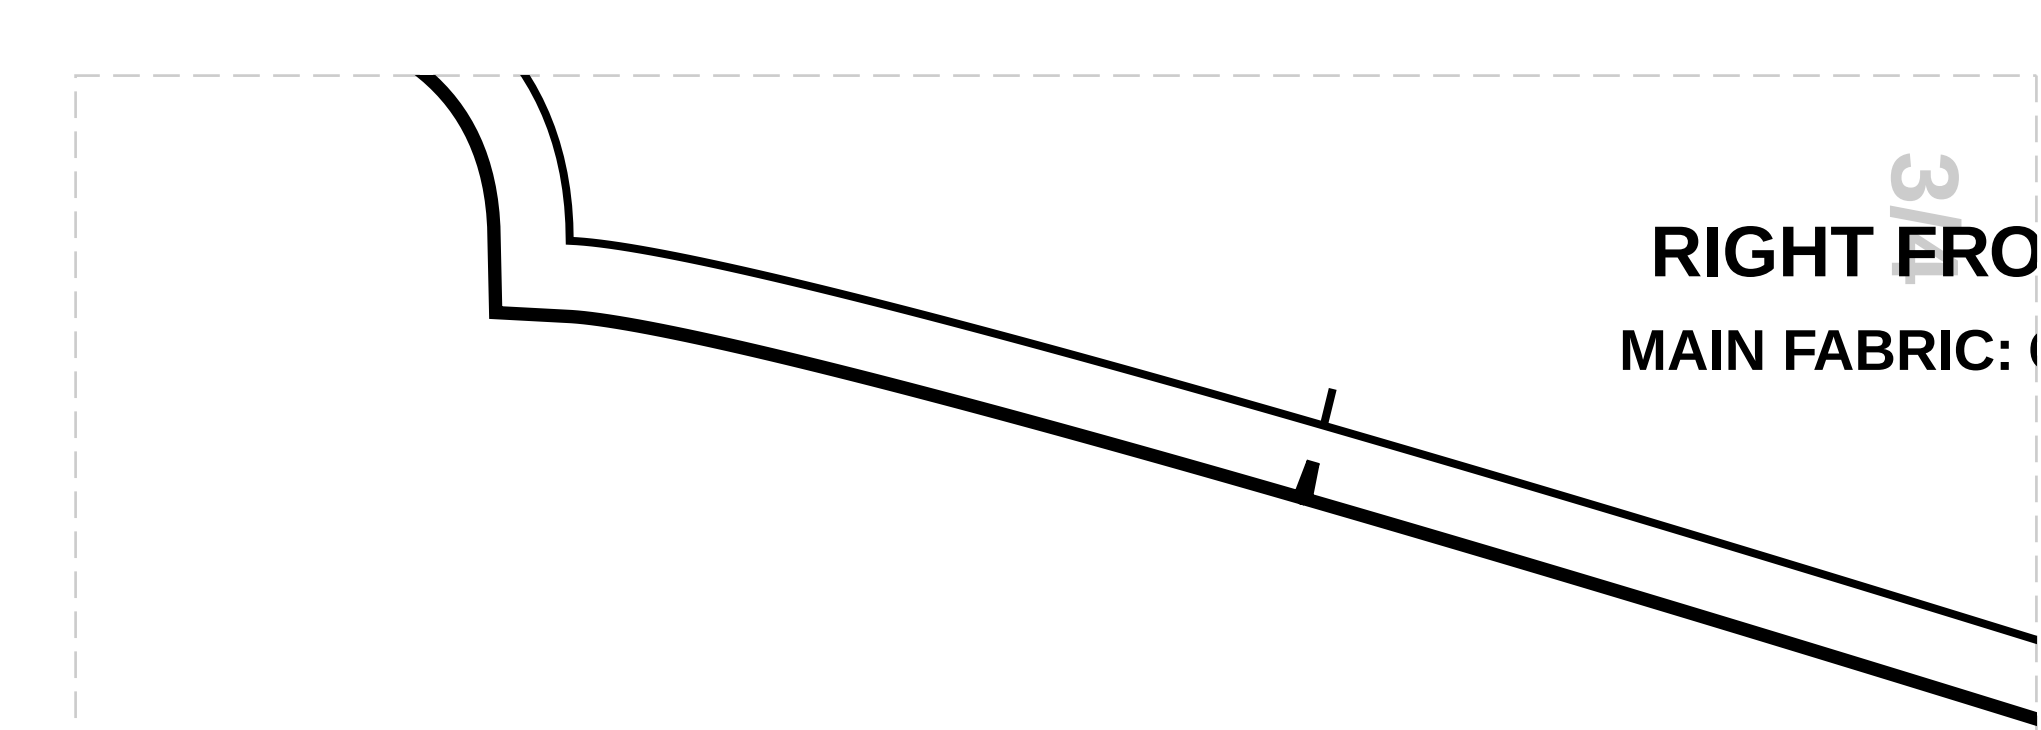


3/1

RIGHT FRO

MAIN FABRIC: (

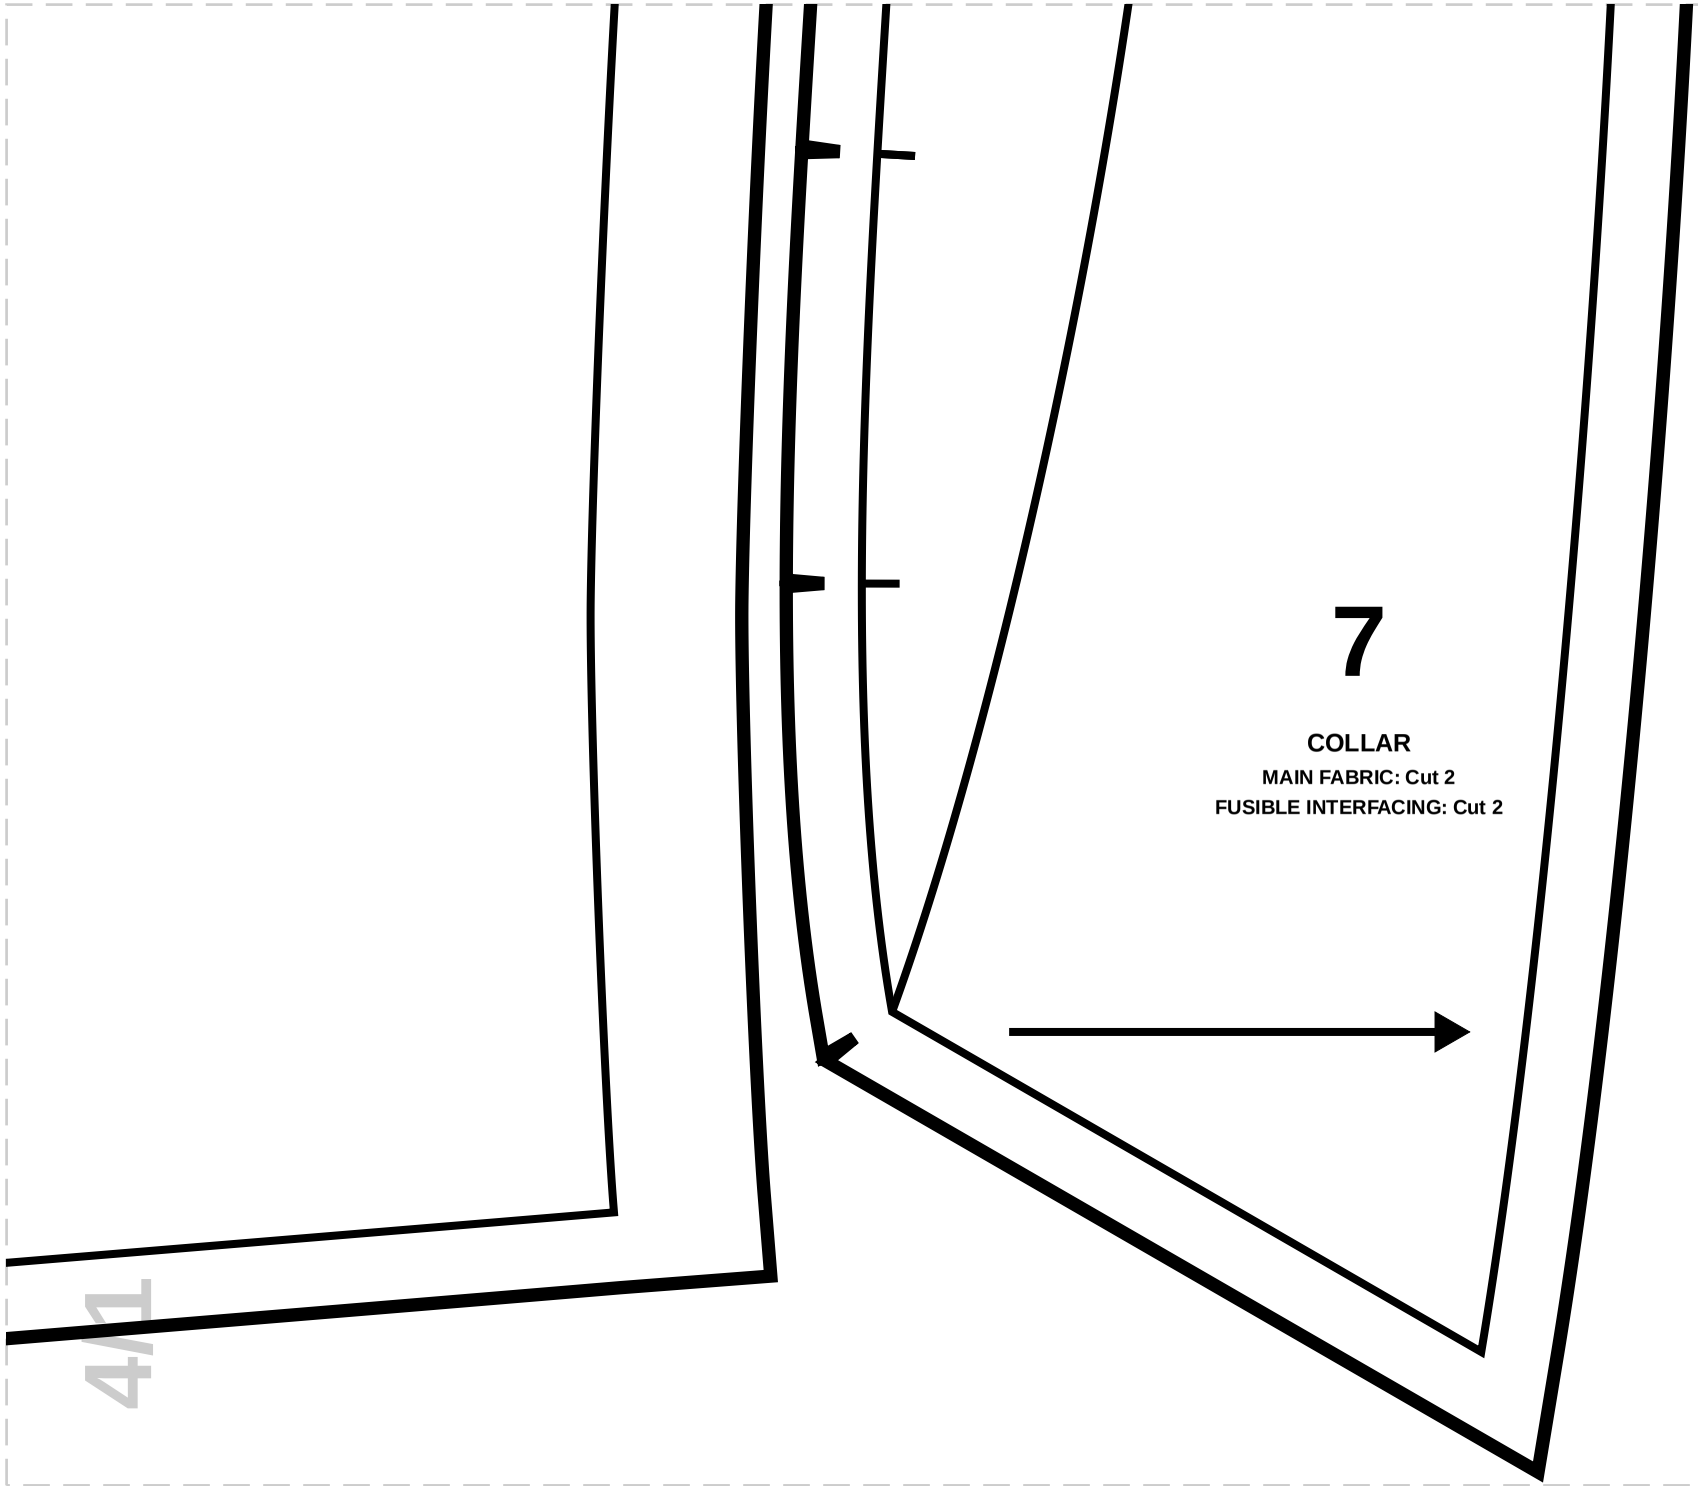
7
COLLAR
MAIN FABRIC: Cut 2
FUSIBLE INTERFACING: Cut 2

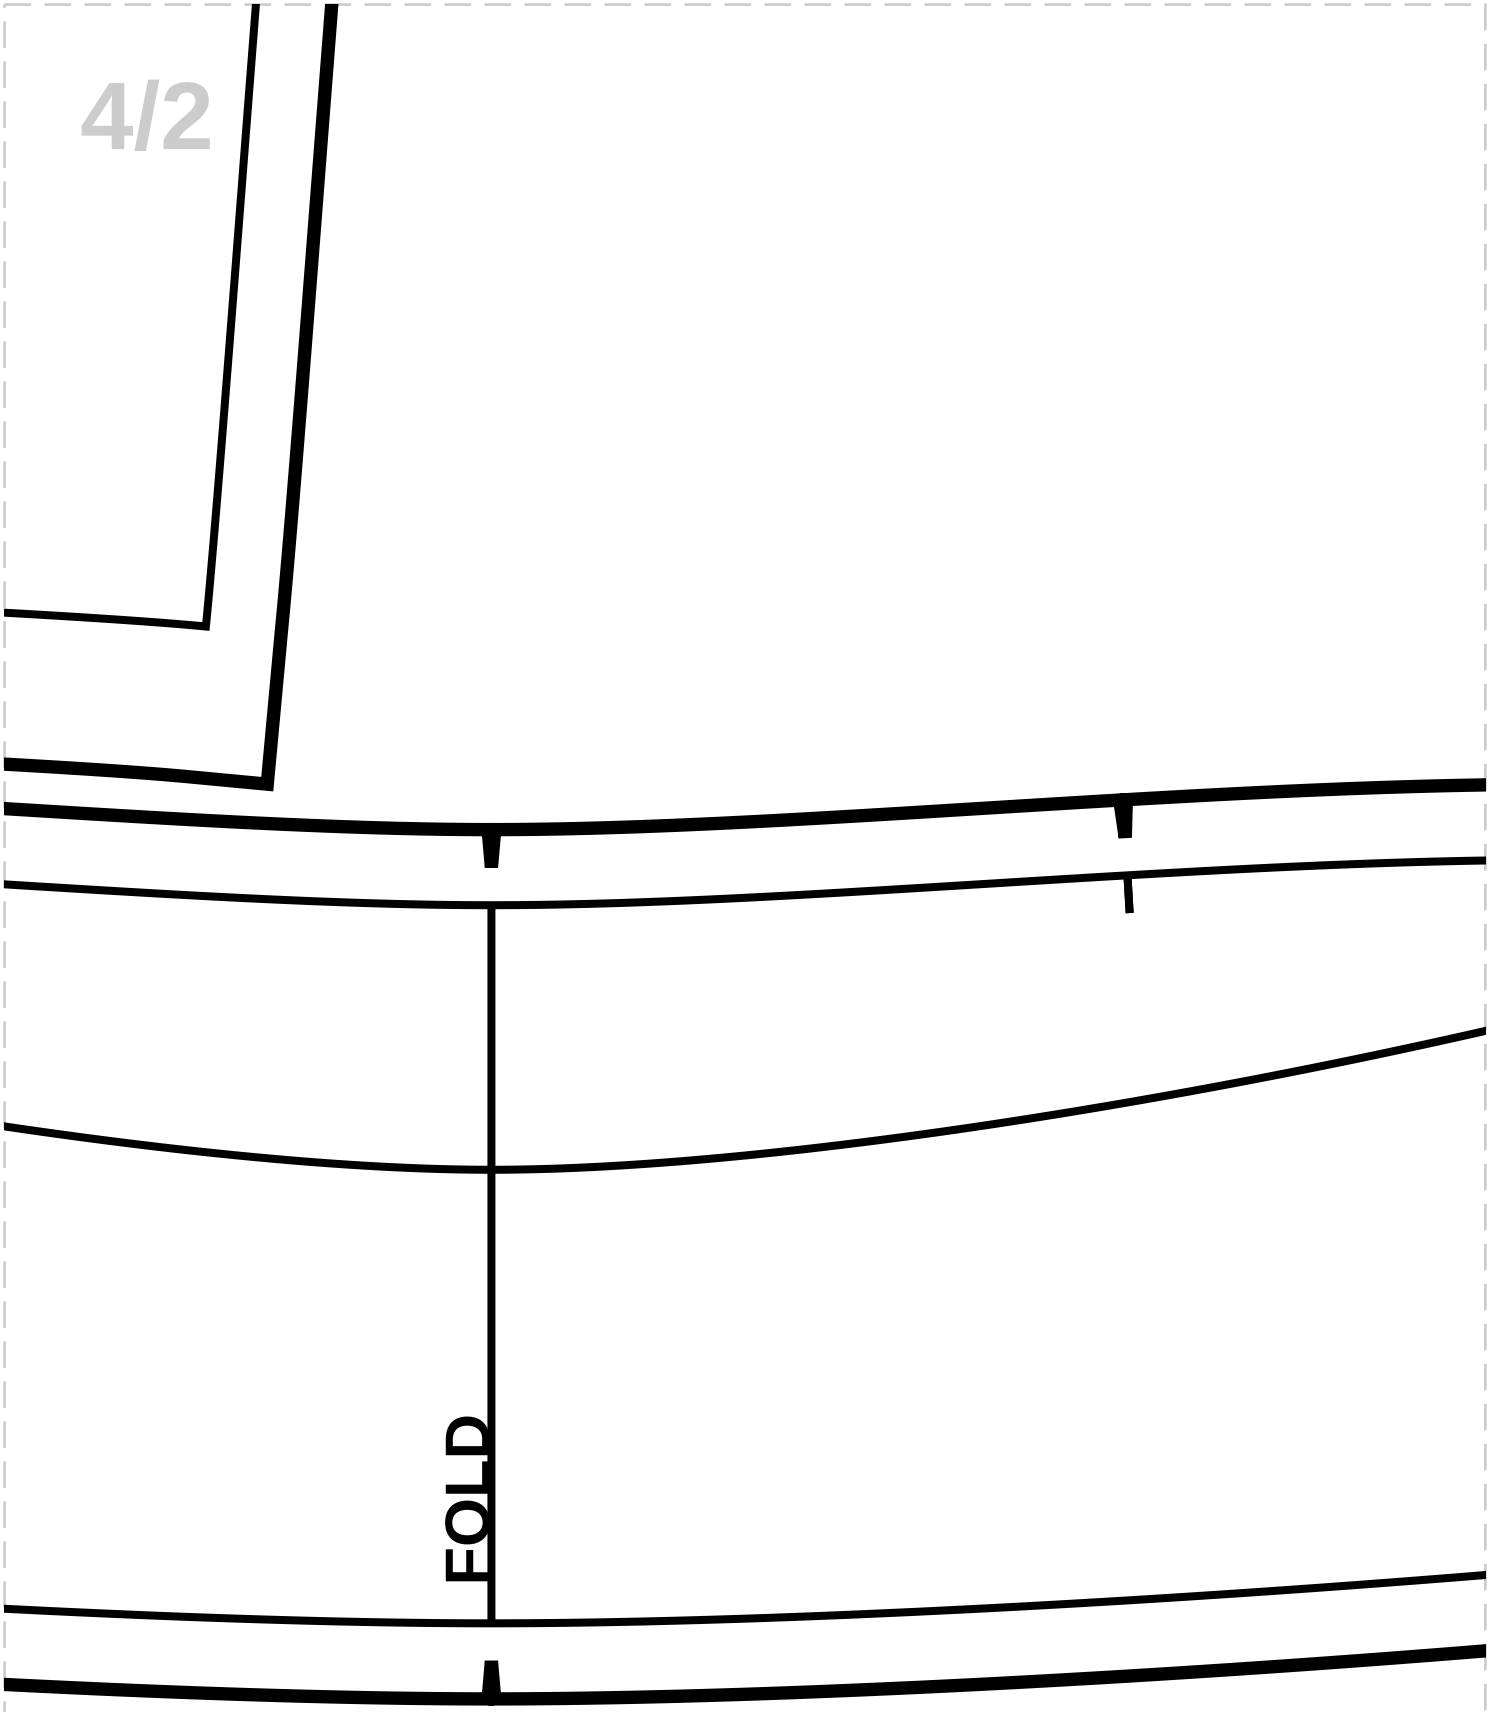
FOLD

