
cozysewpatterns

Print this Calibration Test page first!

Size: Height: 127, Bust: 58.5, Waist: 52.75, Hips: 62.75
SIZE 7 127

Notes

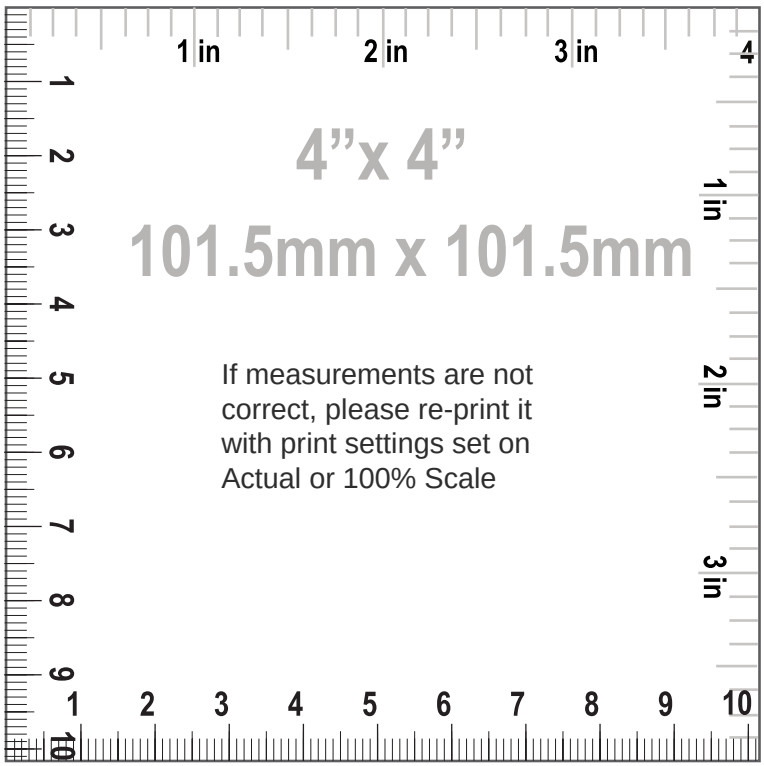

How to print

Printing

Once your Calibration Test Page has been printed, measure the 4”x 4” (10cm) scale box with a ruler. If the lengths match, you can confidently print your pattern. If the rulers do not match, set your print settings to 100% or Actual and retry.

Cutting

Your printouts will always have a dashed border to perfectly match your sheets. Cut off the right edge of each page. Be careful not to cut beyond the dashed mark, otherwise your patterns will not align accurately.

Tapping

Group each sheet by the second number marked on each pate i.e. in a group 1, there are: 1/1, 2/1, 3/1, 4/1, etc. In a group 2: 1/2, 2/2 etc. 2. Place page 1/1 on top of the page 2/1, overlapping the right side edge. Match corners and crosses and secure with a pin or tape. Then use a scotch tape to permanently attach the sheets together.

SIZE 7 127
Seam Allowance: 1 (3/8 in)

Pattern pieces:

1. "RIGHT FRONT", MAIN FABRIC: Cut 1
2. "LEFT FRONT", MAIN FABRIC: Cut 1
3. "BACK", MAIN FABRIC: Cut 1
4. "SLEEVE", MAIN FABRIC: Cut 2
5. "LEFT FRONT BUTTON FACING", MAIN FABRIC, FUSIBLE INTERFACING: Cut 1
6. "BACK NECK FACING", MAIN FABRIC, FUSIBLE INTERFACING: Cut 1
7. "COLLAR", MAIN FABRIC, FUSIBLE INTERFACING: Cut 2
8. "FRONT CLOSURE FACING", MAIN FABRIC, FUSIBLE INTERFACING: Cut 2
9. "RIGHT FRONT PLACKET", MAIN FABRIC, FUSIBLE INTERFACING: Cut 1


Pattern Specs (Circumferences are divided by 2):


1. Hem max 3.00 none (1 1/8 in)
2. Seam allowance max 2.00 none (3/4 in)
3. Stretch factor 1.00 none (3/8 in)
4. Stretch factor horizontal 1.00 none (3/8 in)
5. Stretch factor vertical 1.00 none (3/8 in)
6. Button diameter 1.00 cm (3/8 in)
7. Front buttons quantity 6.00 pc
8. Front length from HPS to hem 49.36 cm (19 3/8 in)
9. Across chest 31.75 cm (12 1/2 in)
10. Center front length to hem 40.61 cm (16 in)
11. Center back length to hem 44.22 cm (17 3/8 in)
12. Across front 24.22 cm (9 1/2 in)
13. Across back 23.21 cm (9 1/8 in)
14. Across shoulders 30.83 cm (12 1/8 in)
15. Side seam 26.58 cm (10 1/2 in)
16. Waist 38.04 cm (15 in)
17. Hemline sweep 47.19 cm (18 5/8 in)
18. Armhole length front 18.74 cm (7 3/8 in)
19. Armhole length back 18.54 cm (7 1/4 in)


20. Neck opening 15.44 cm (6 1/8 in)
21. Neckline length 41.39 cm (16 1/4 in)
22. Front neck drop 8.73 cm (3 3/8 in)
23. Back neck drop 2.82 cm (1 1/8 in)
24. Shoulder width 7.84 cm (3 1/8 in)
25. Placket length 40.61 cm (16 in)
26. Placket width 2.50 cm (1 in)
27. Collar width 9.50 cm (3 3/4 in)
28. Collar edges length 9.00 cm (3 1/2 in)
29. Sleeve length 47.38 cm (18 5/8 in)
30. Sleeve upper arm width 23.63 cm (9 1/4 in)
31. Sleeve opening 19.97 cm (7 7/8 in)

cozysewpatterns

Paper Size: LETTER;
Print Actual Size (100% Scale);

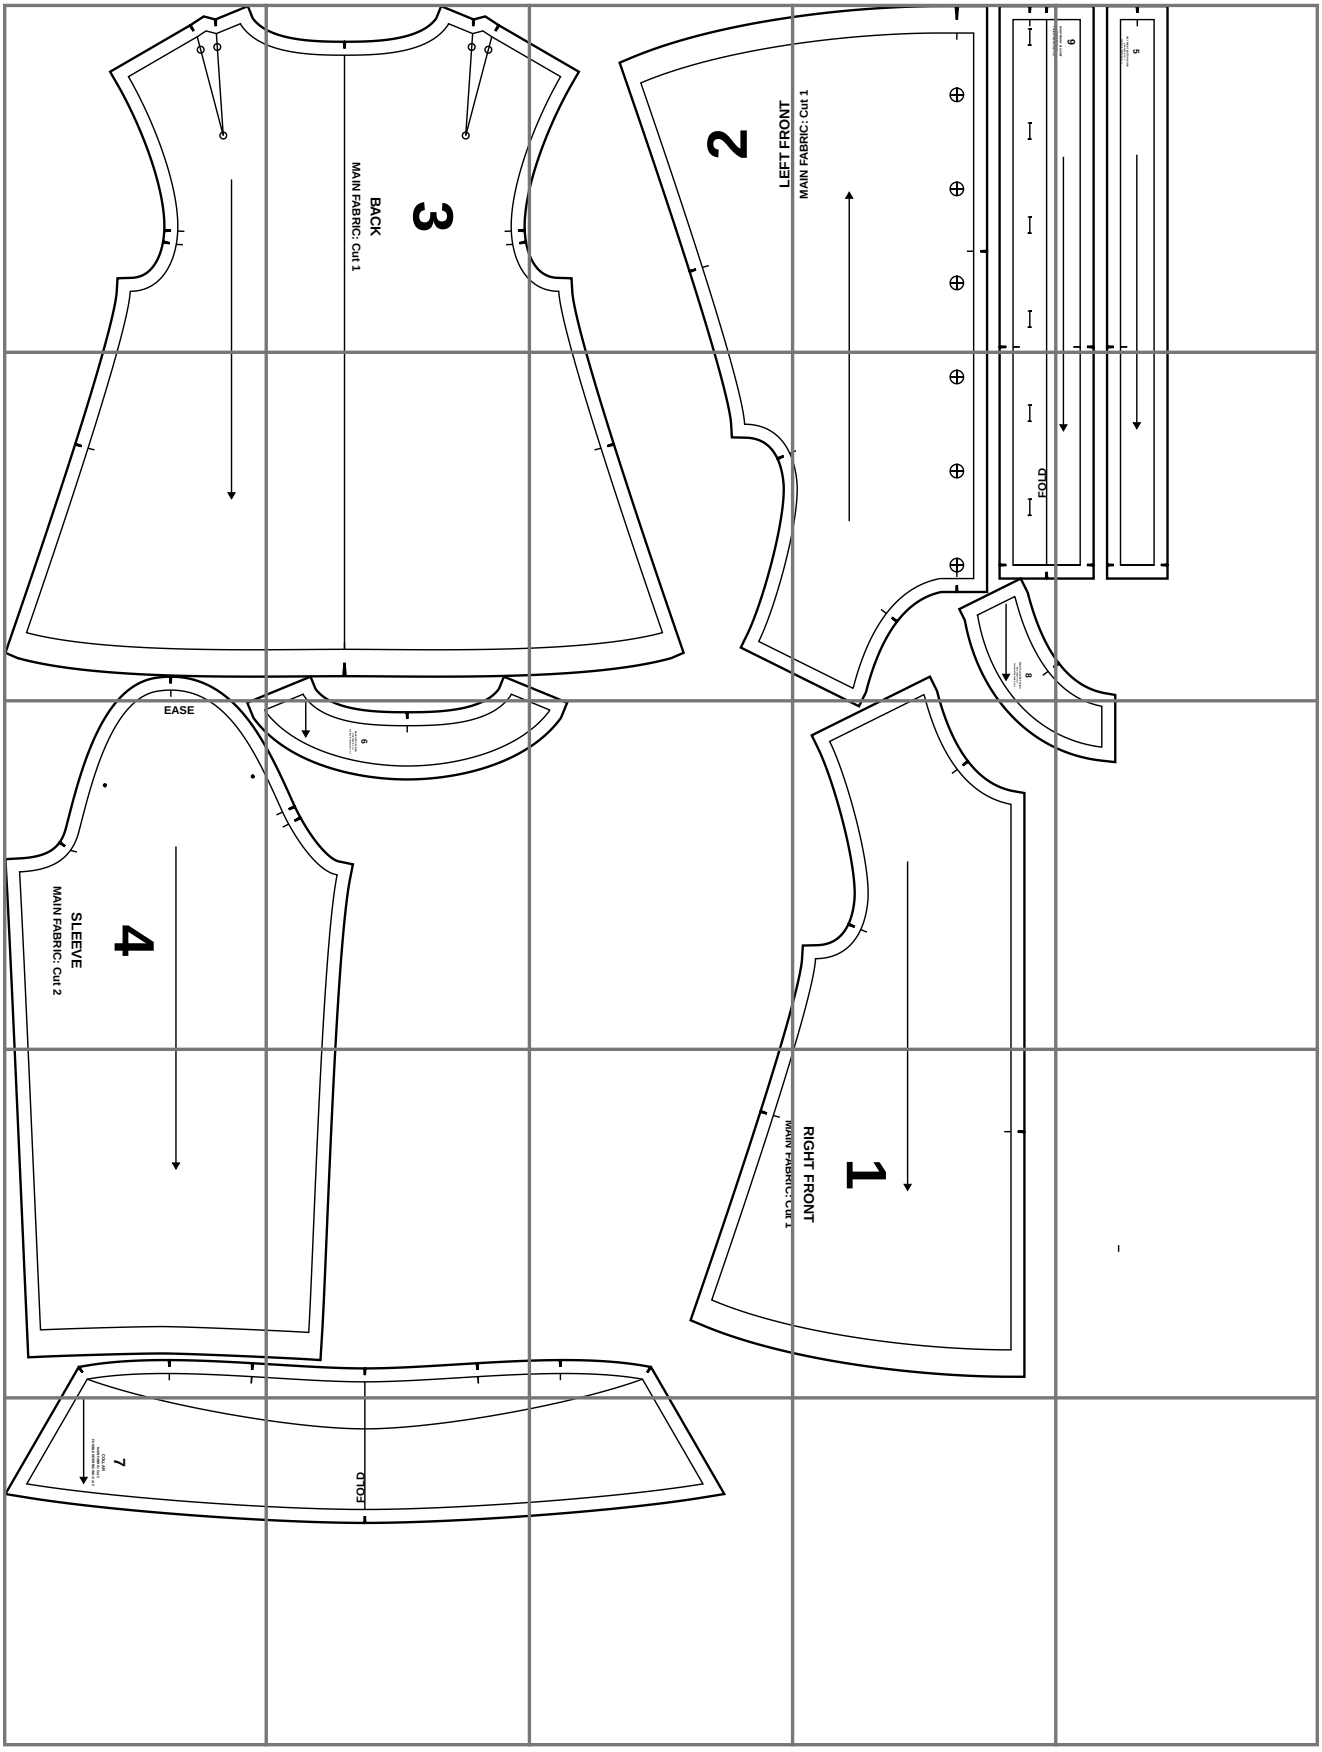

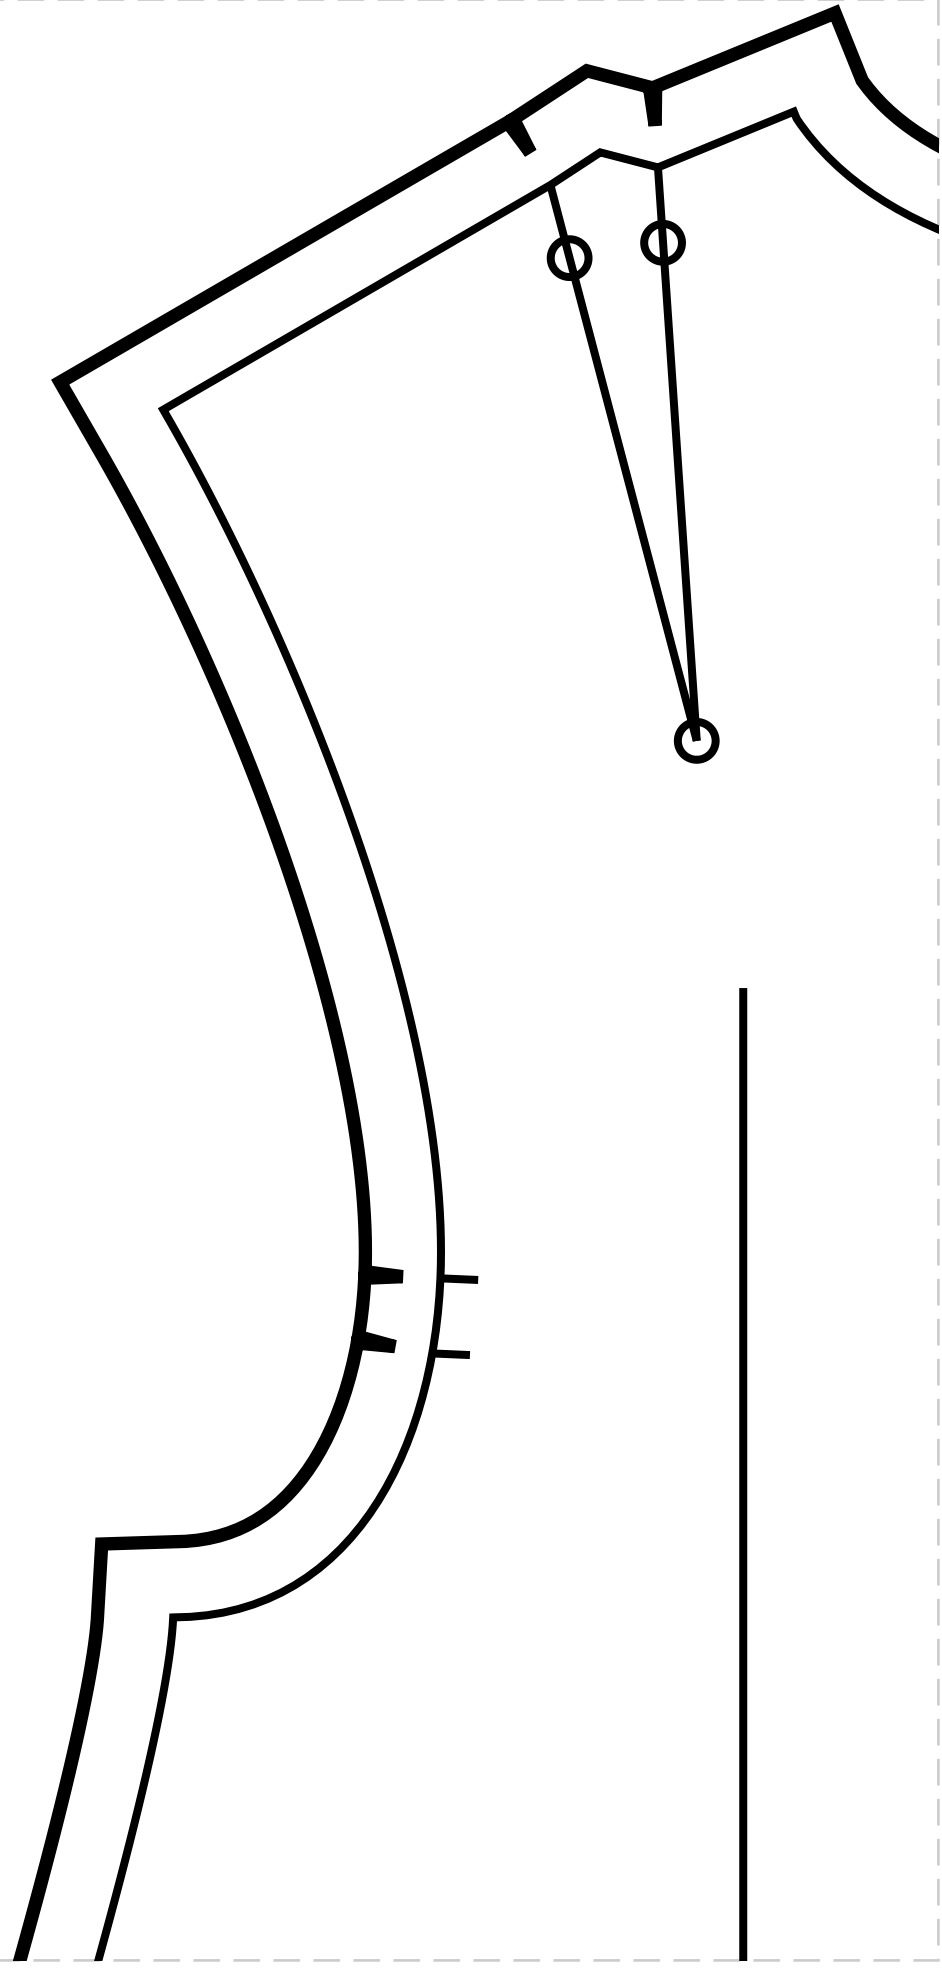


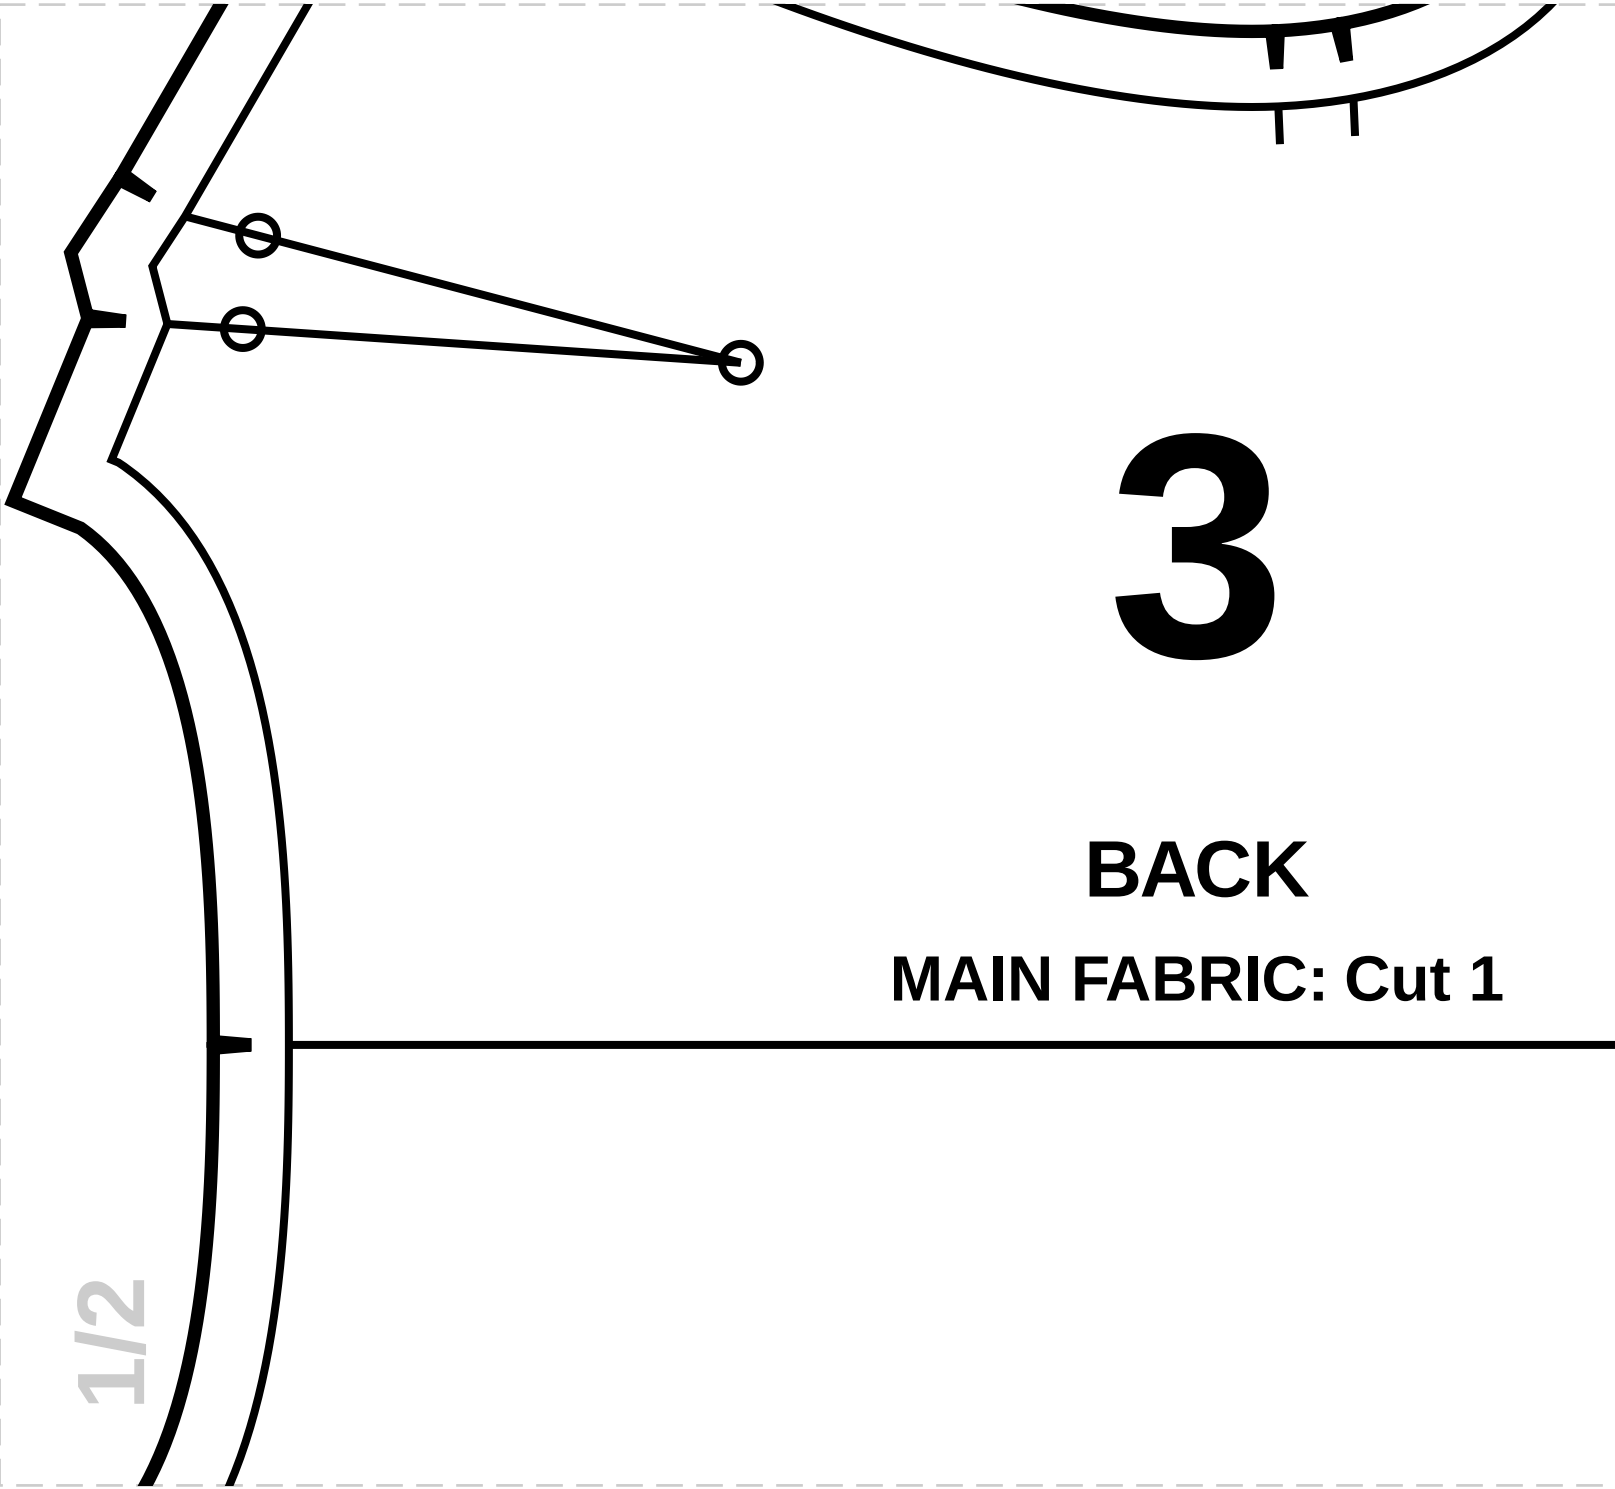

3

BACK


MAIN FABRIC: Cut 1

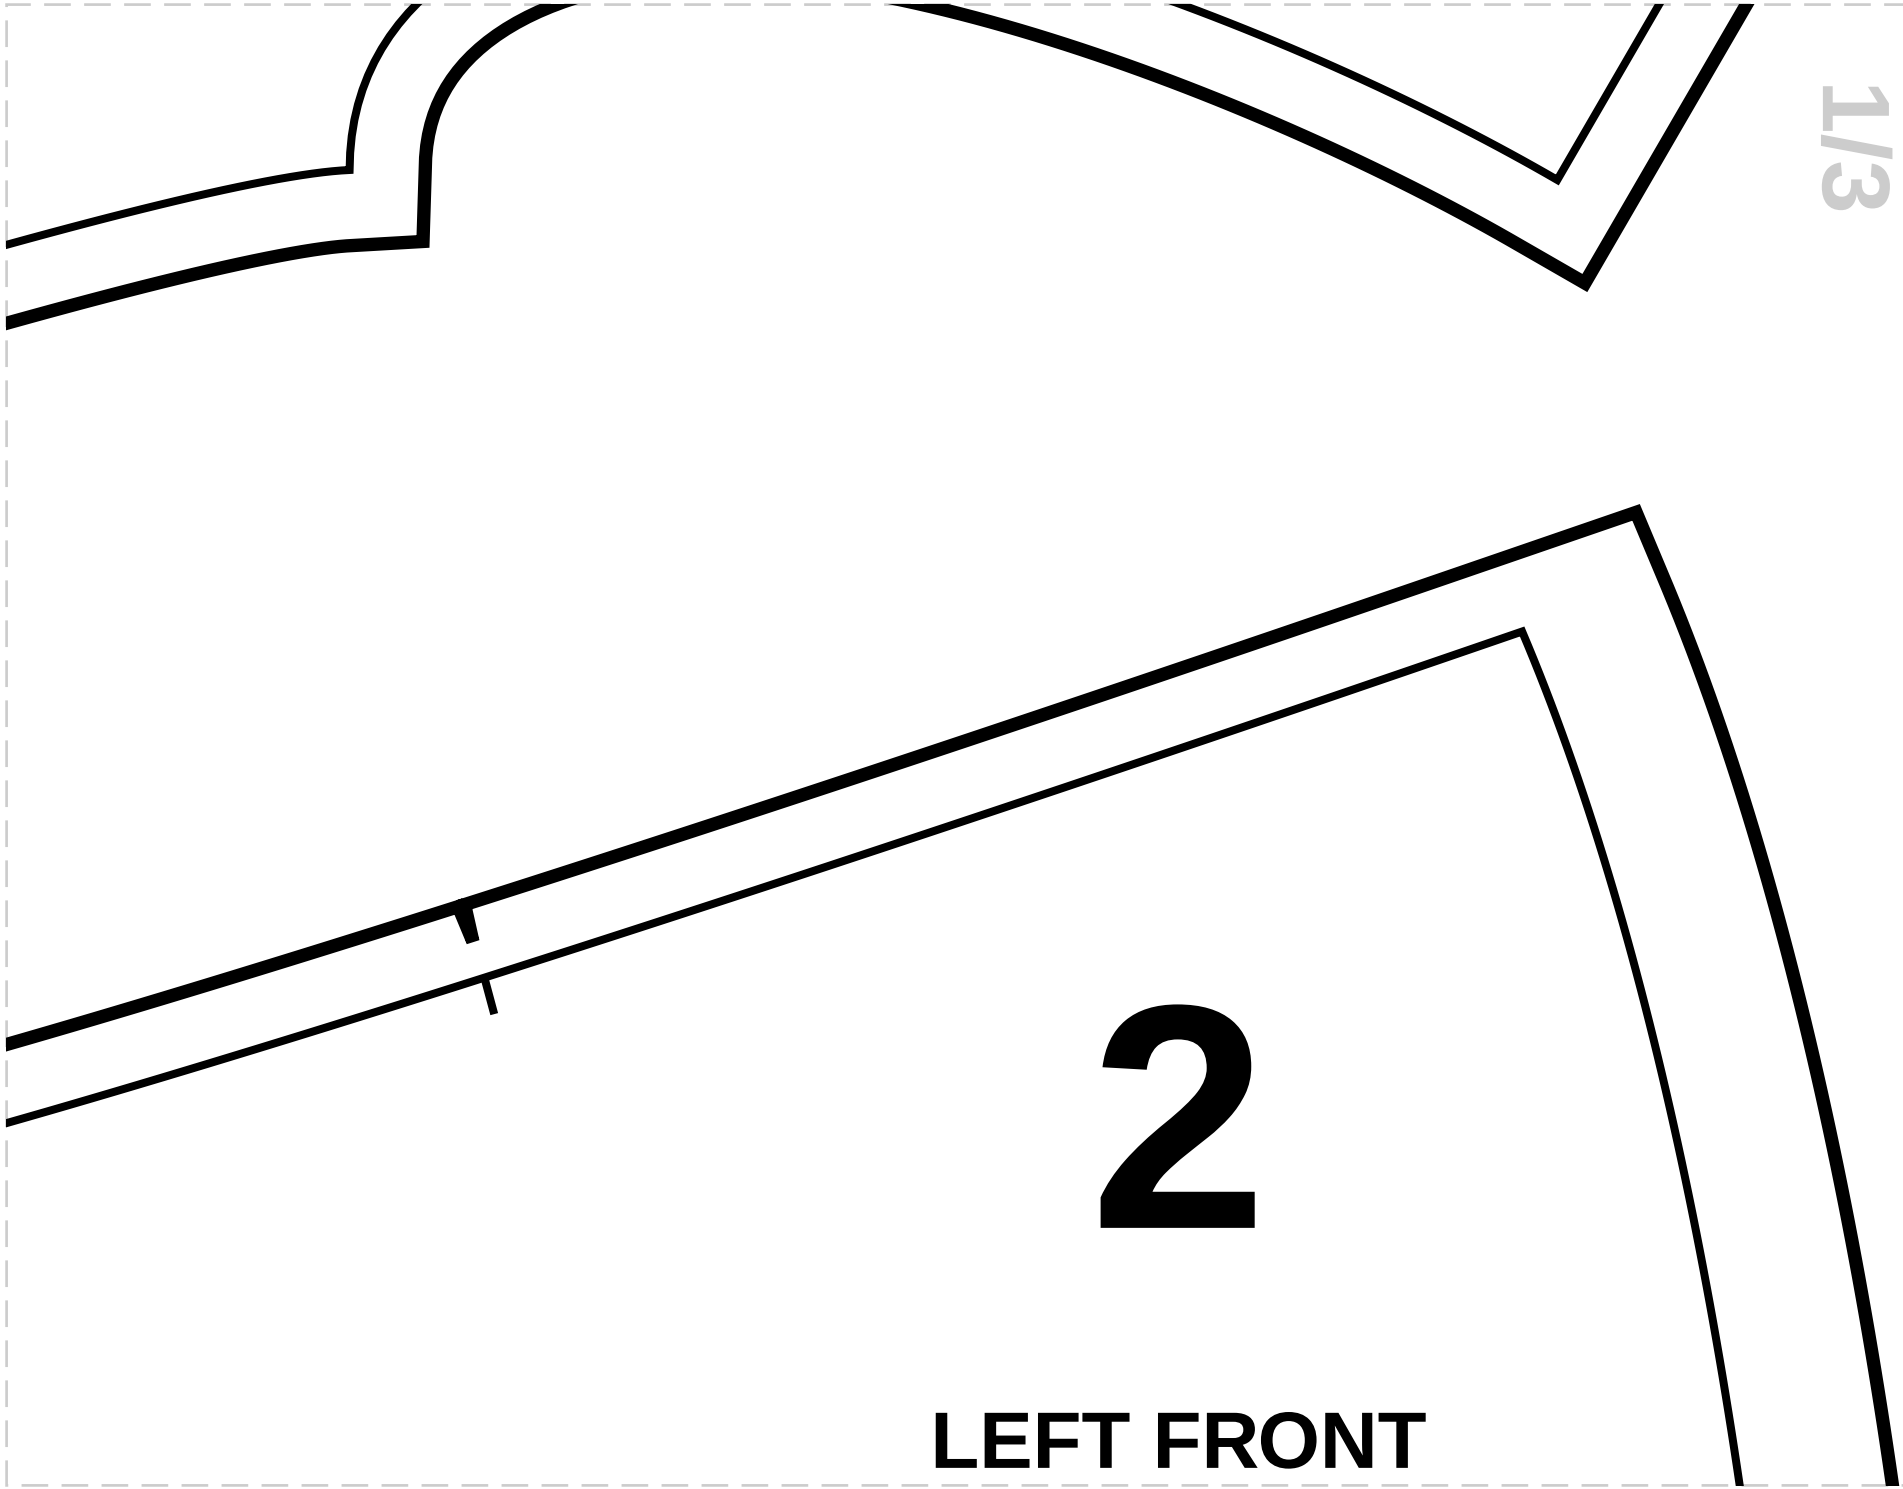

2
LEFT FRONT


1/4


MAIN FABRIC: Cut 1

FUSIBLE INTERFACING: Cut 1

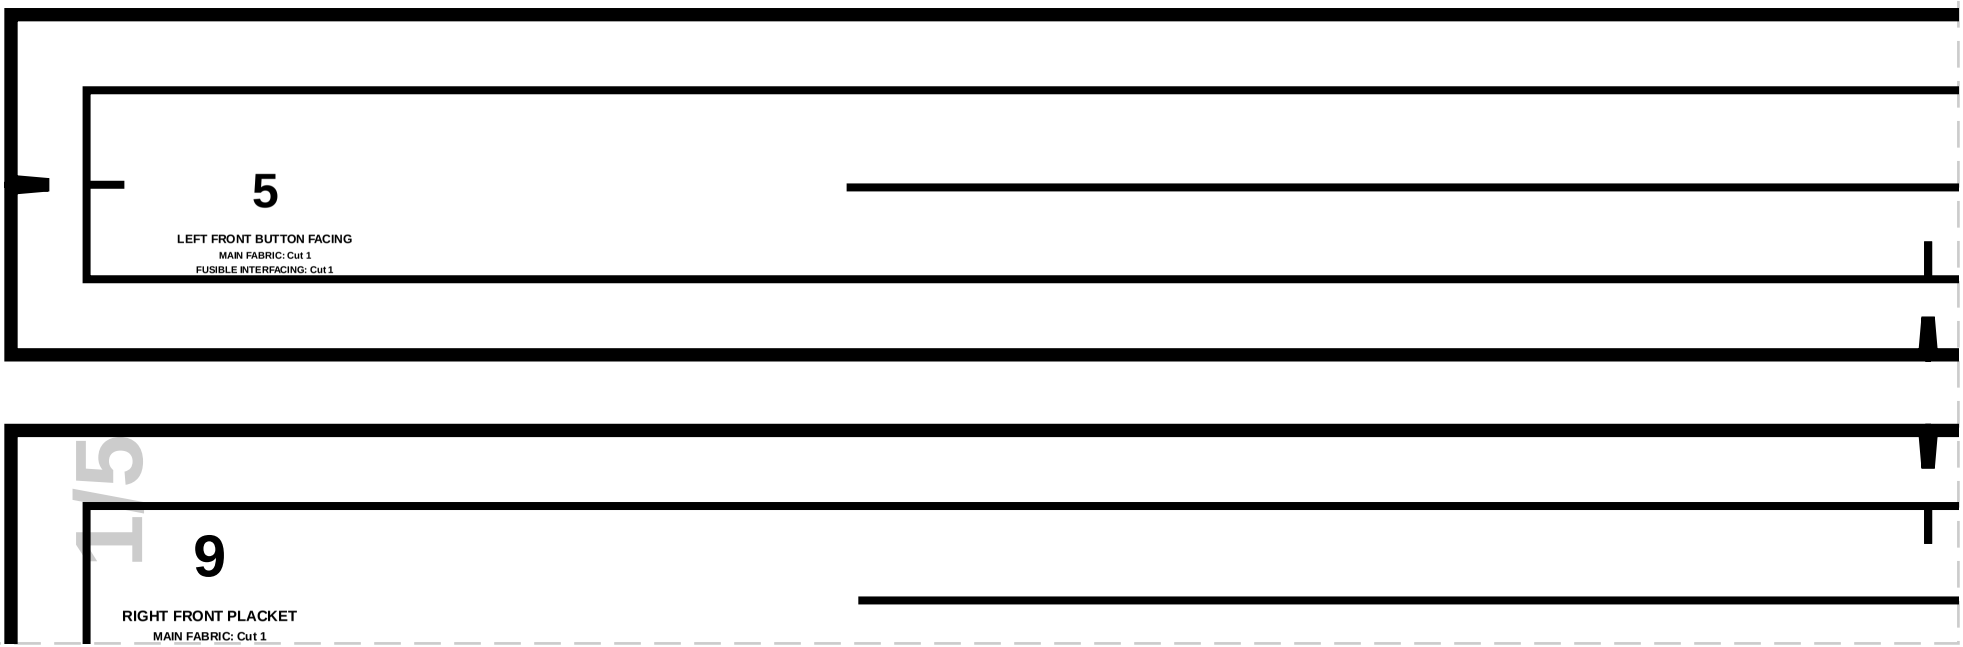

5
LEFT FRONT BUTTON FACING
MAIN FABRIC: Cut 1
FUSIBLE INTERFACING: Cut 1
1/5
9
RIGHT FRONT PLACKET
MAIN FABRIC: Cut 1

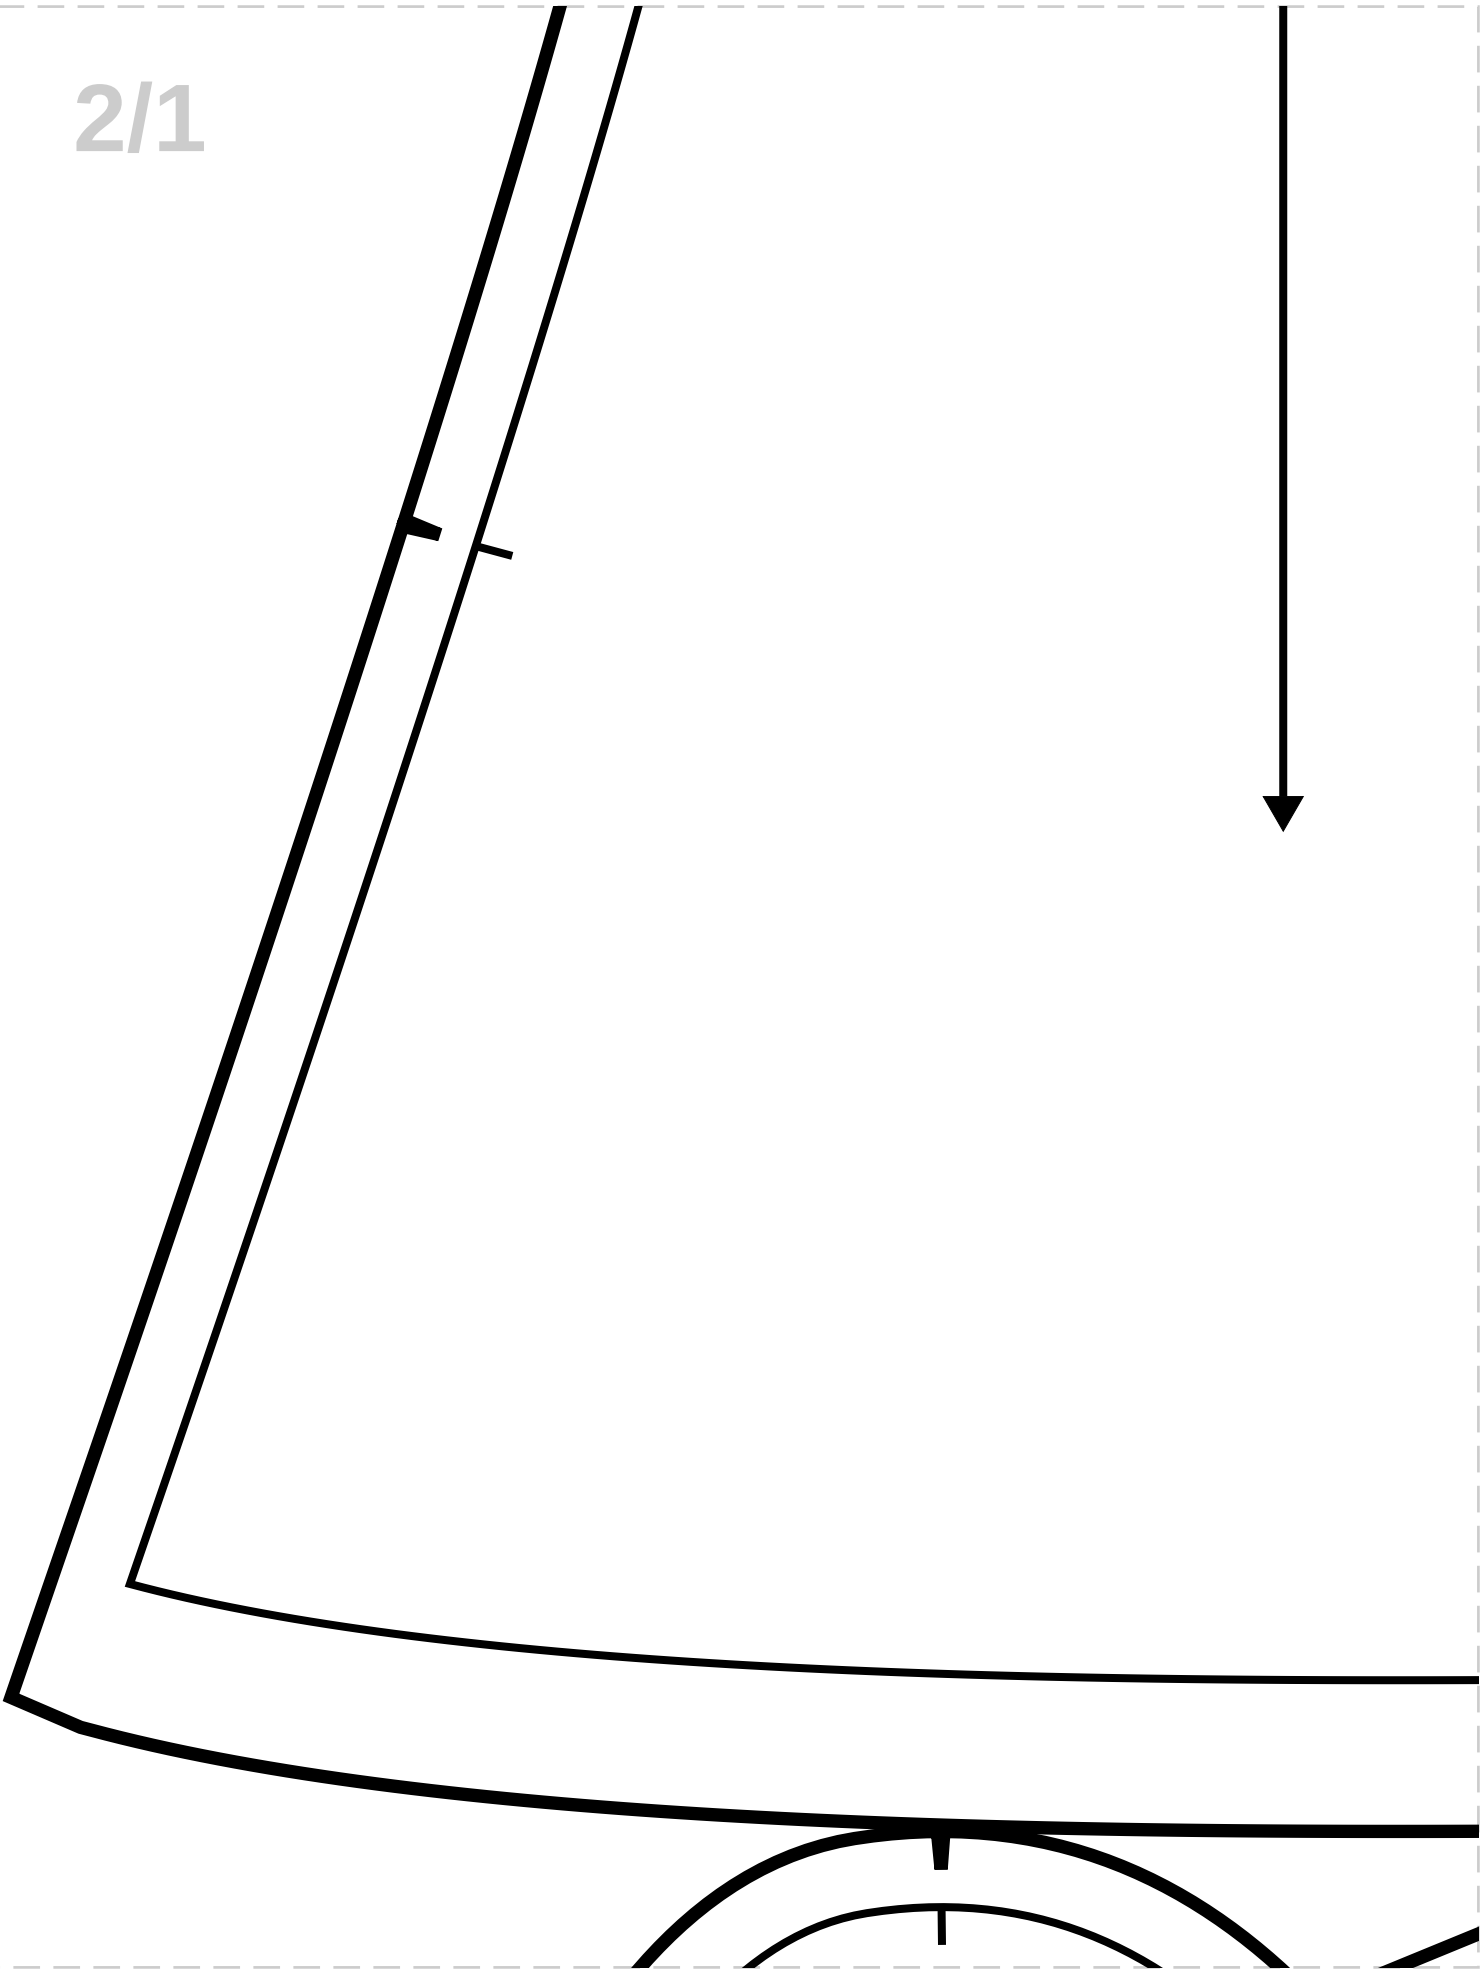


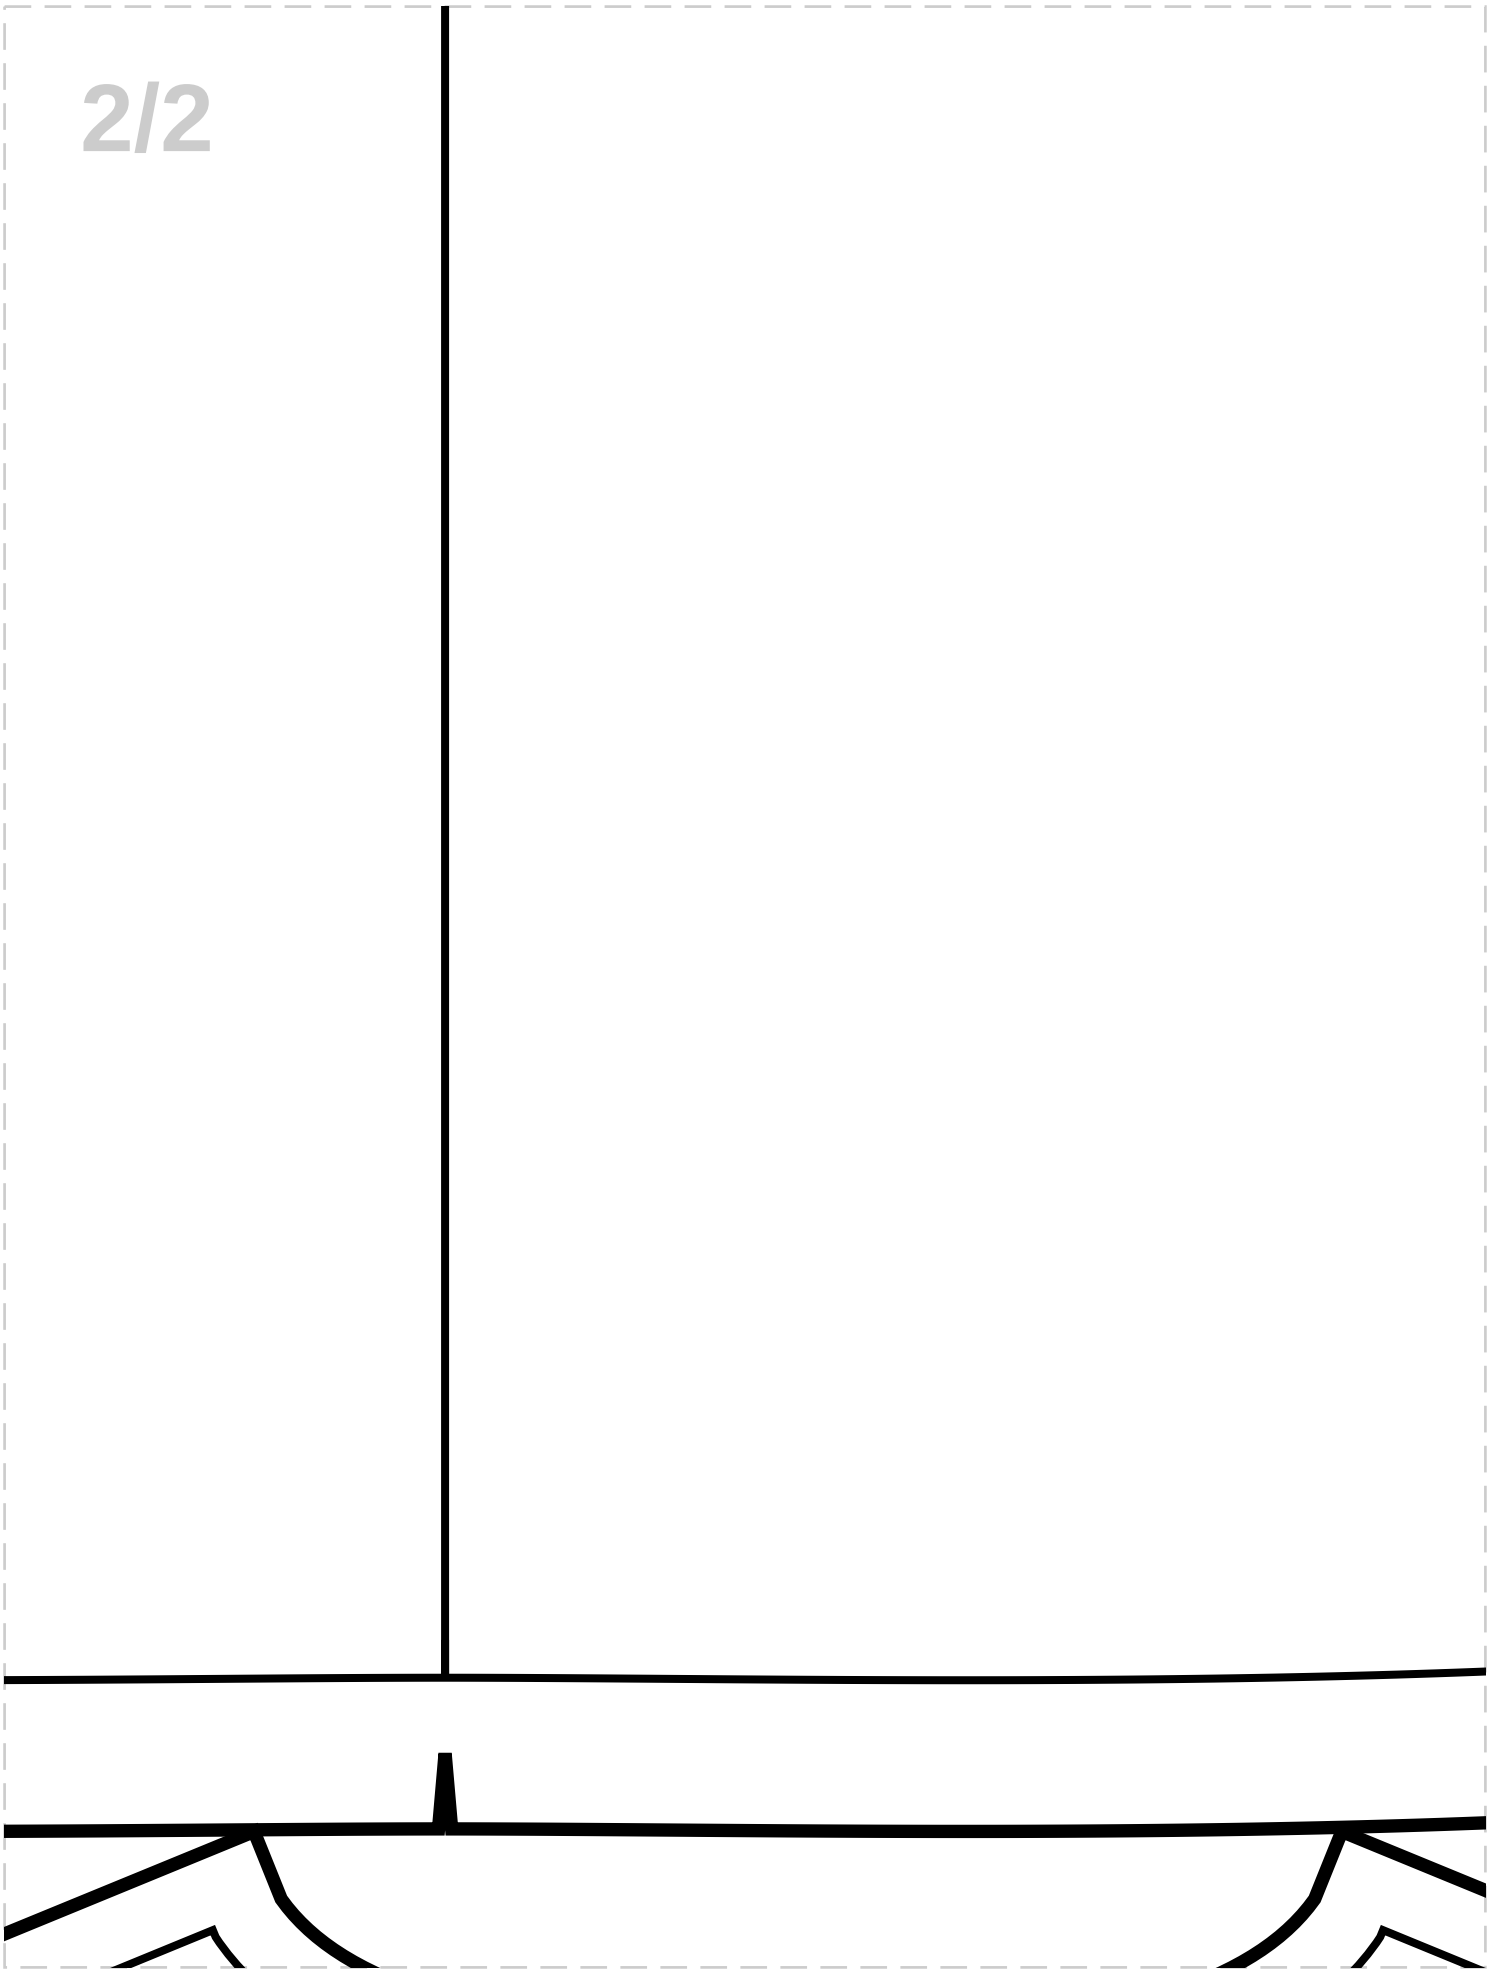


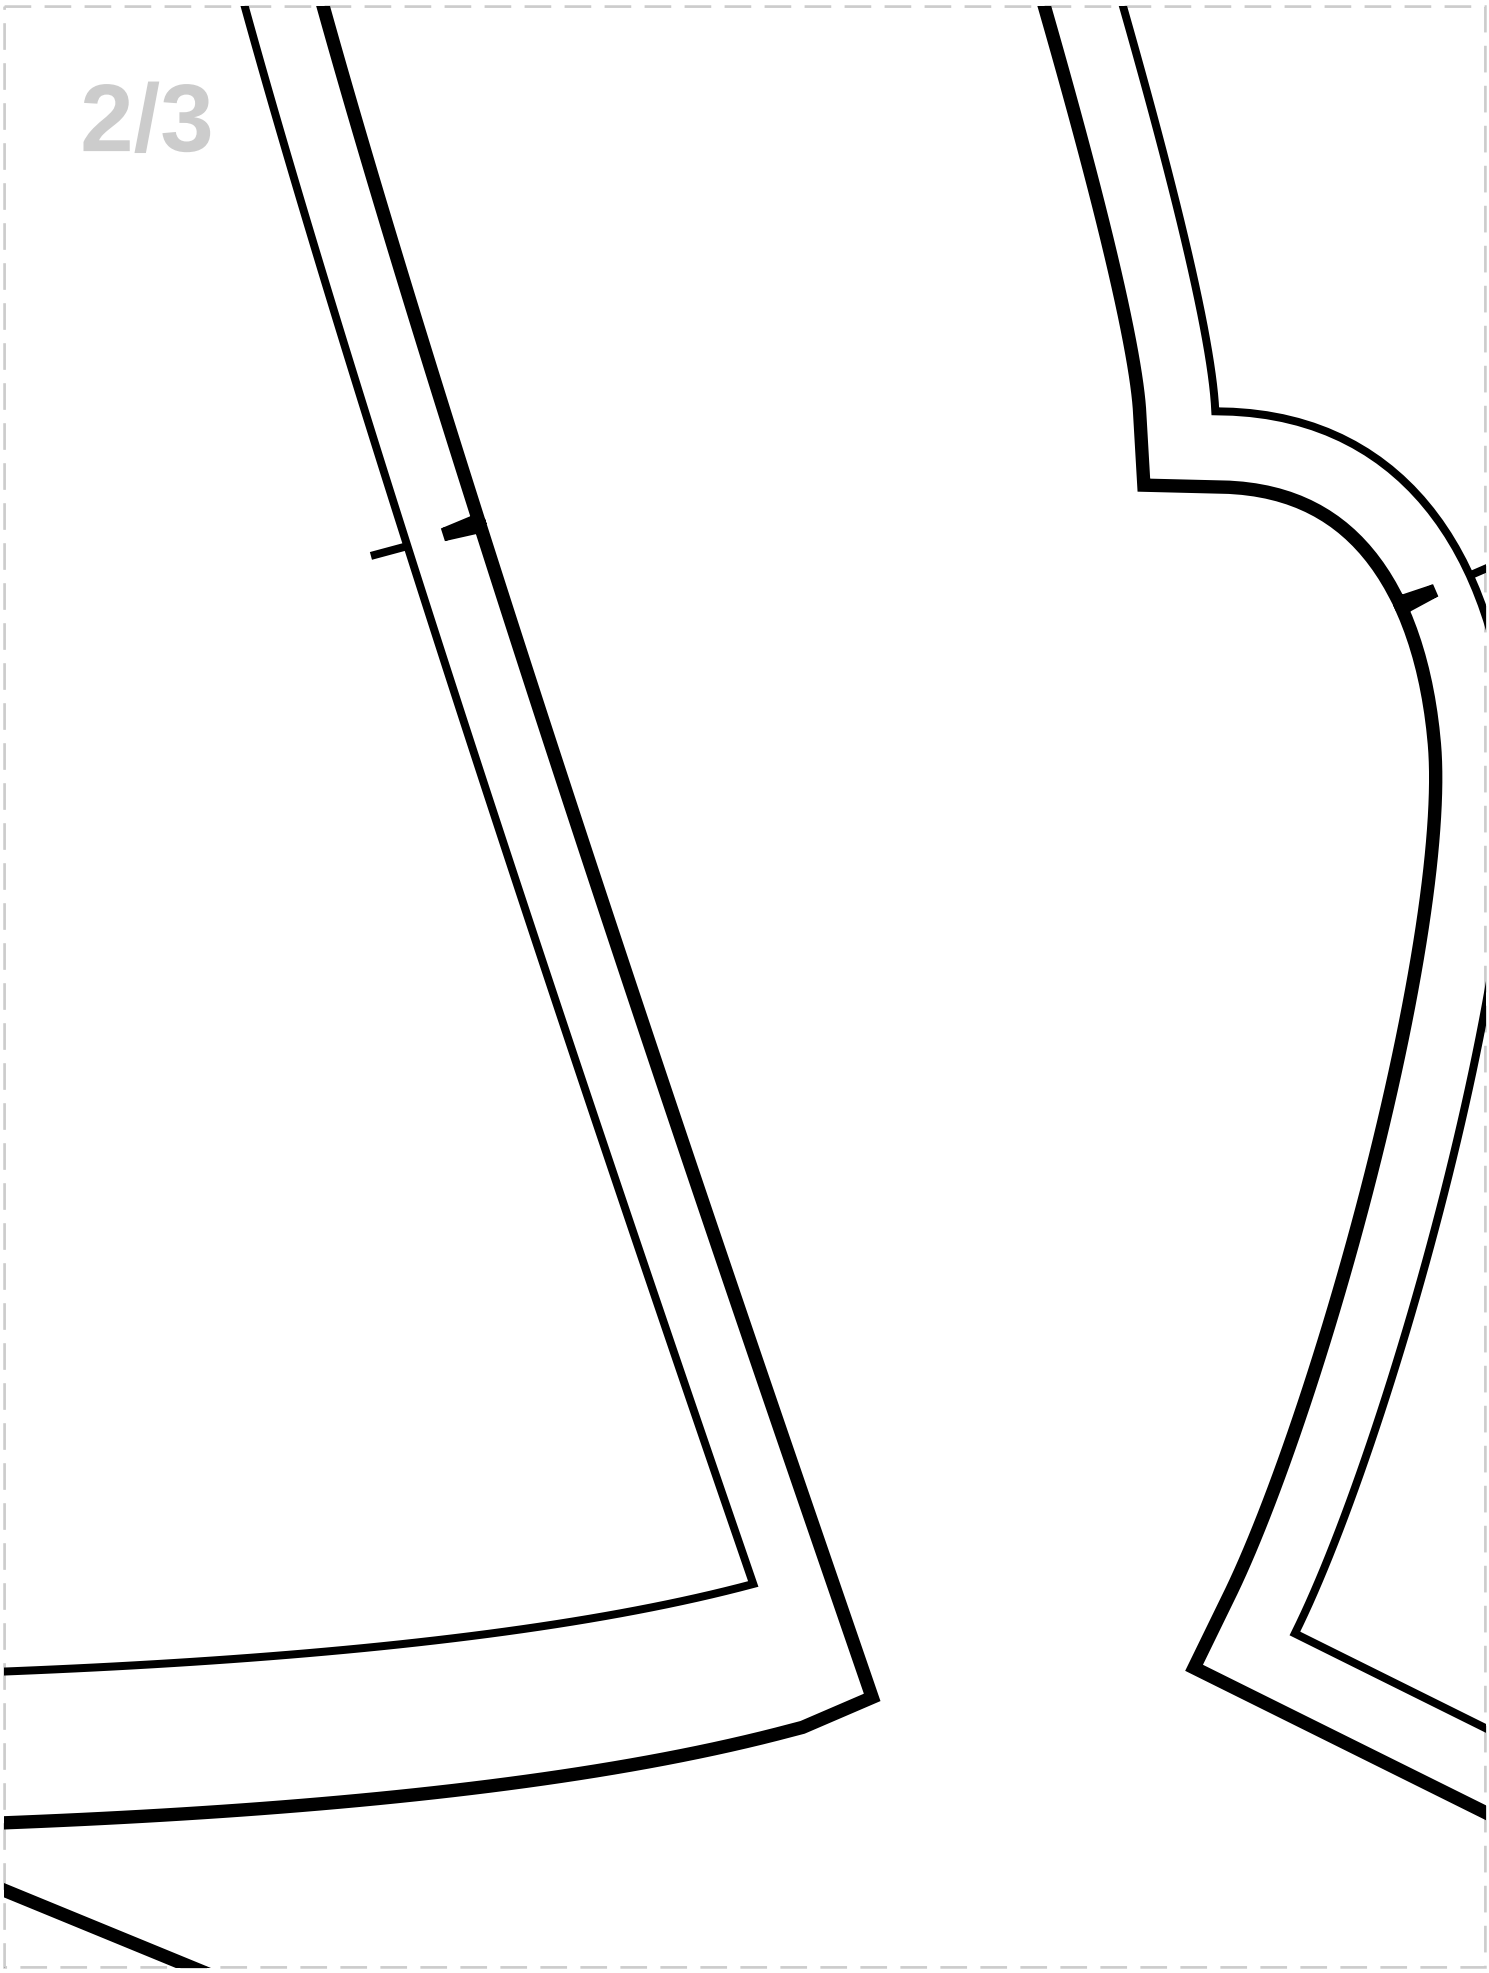

FOLD
FRONT CLOSURE FACING
MAIN FABRIC: Cut 2
FUSIBLE INTERFACING: Cut 2
8

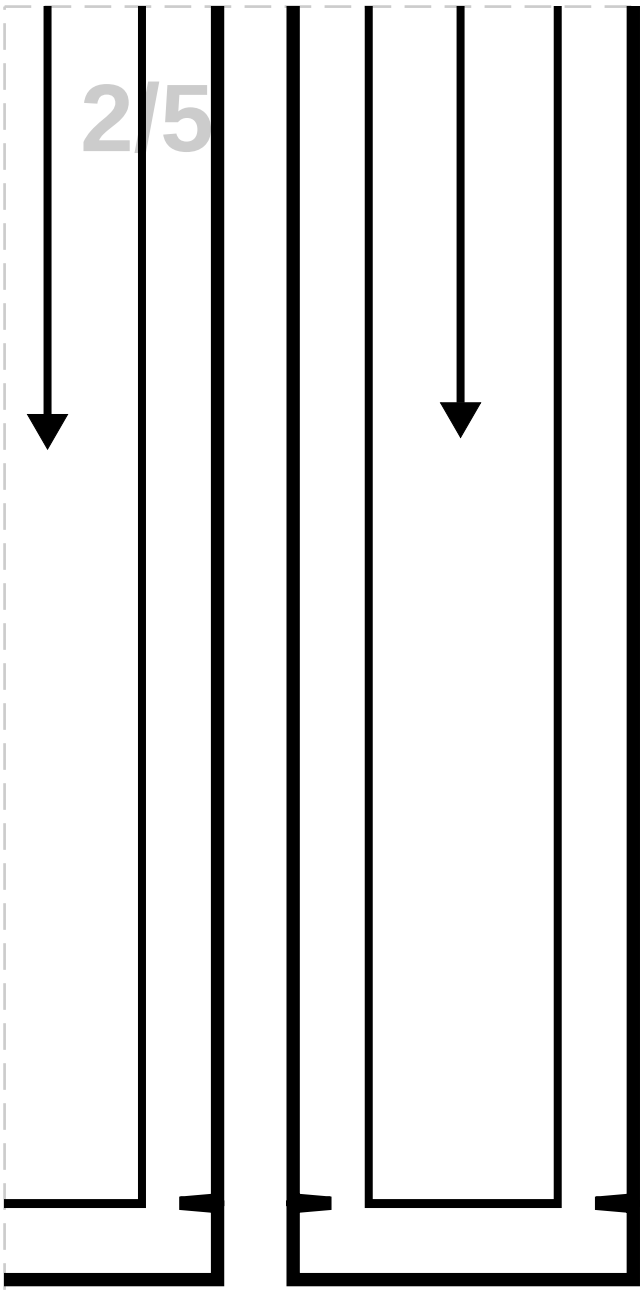




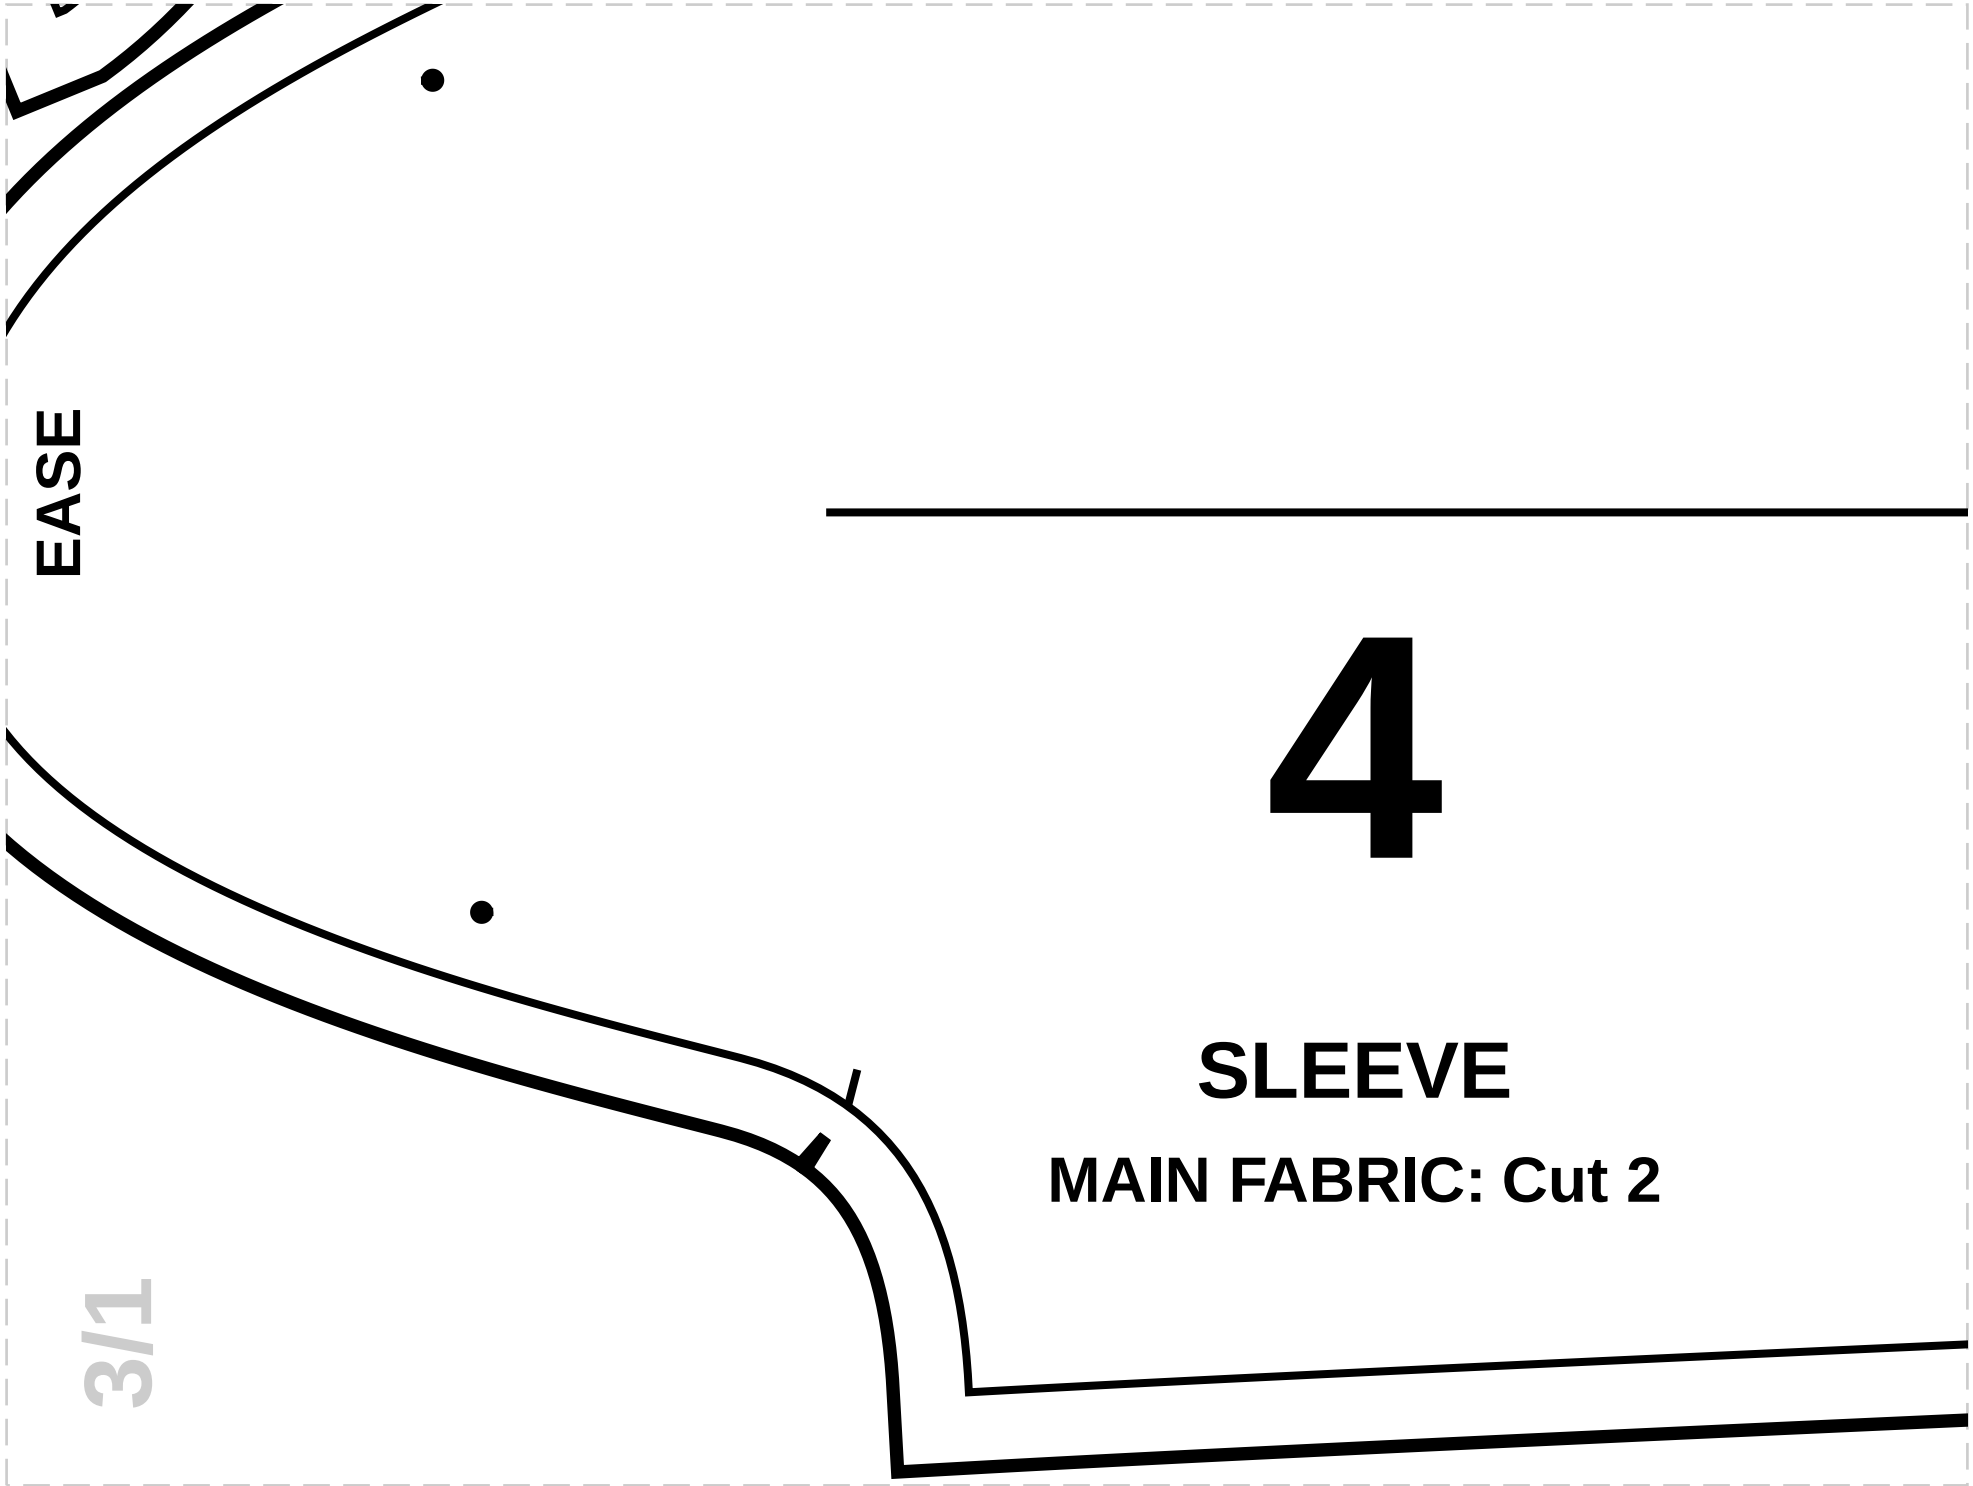


4


SLEEVE


MAIN FABRIC: Cut 2

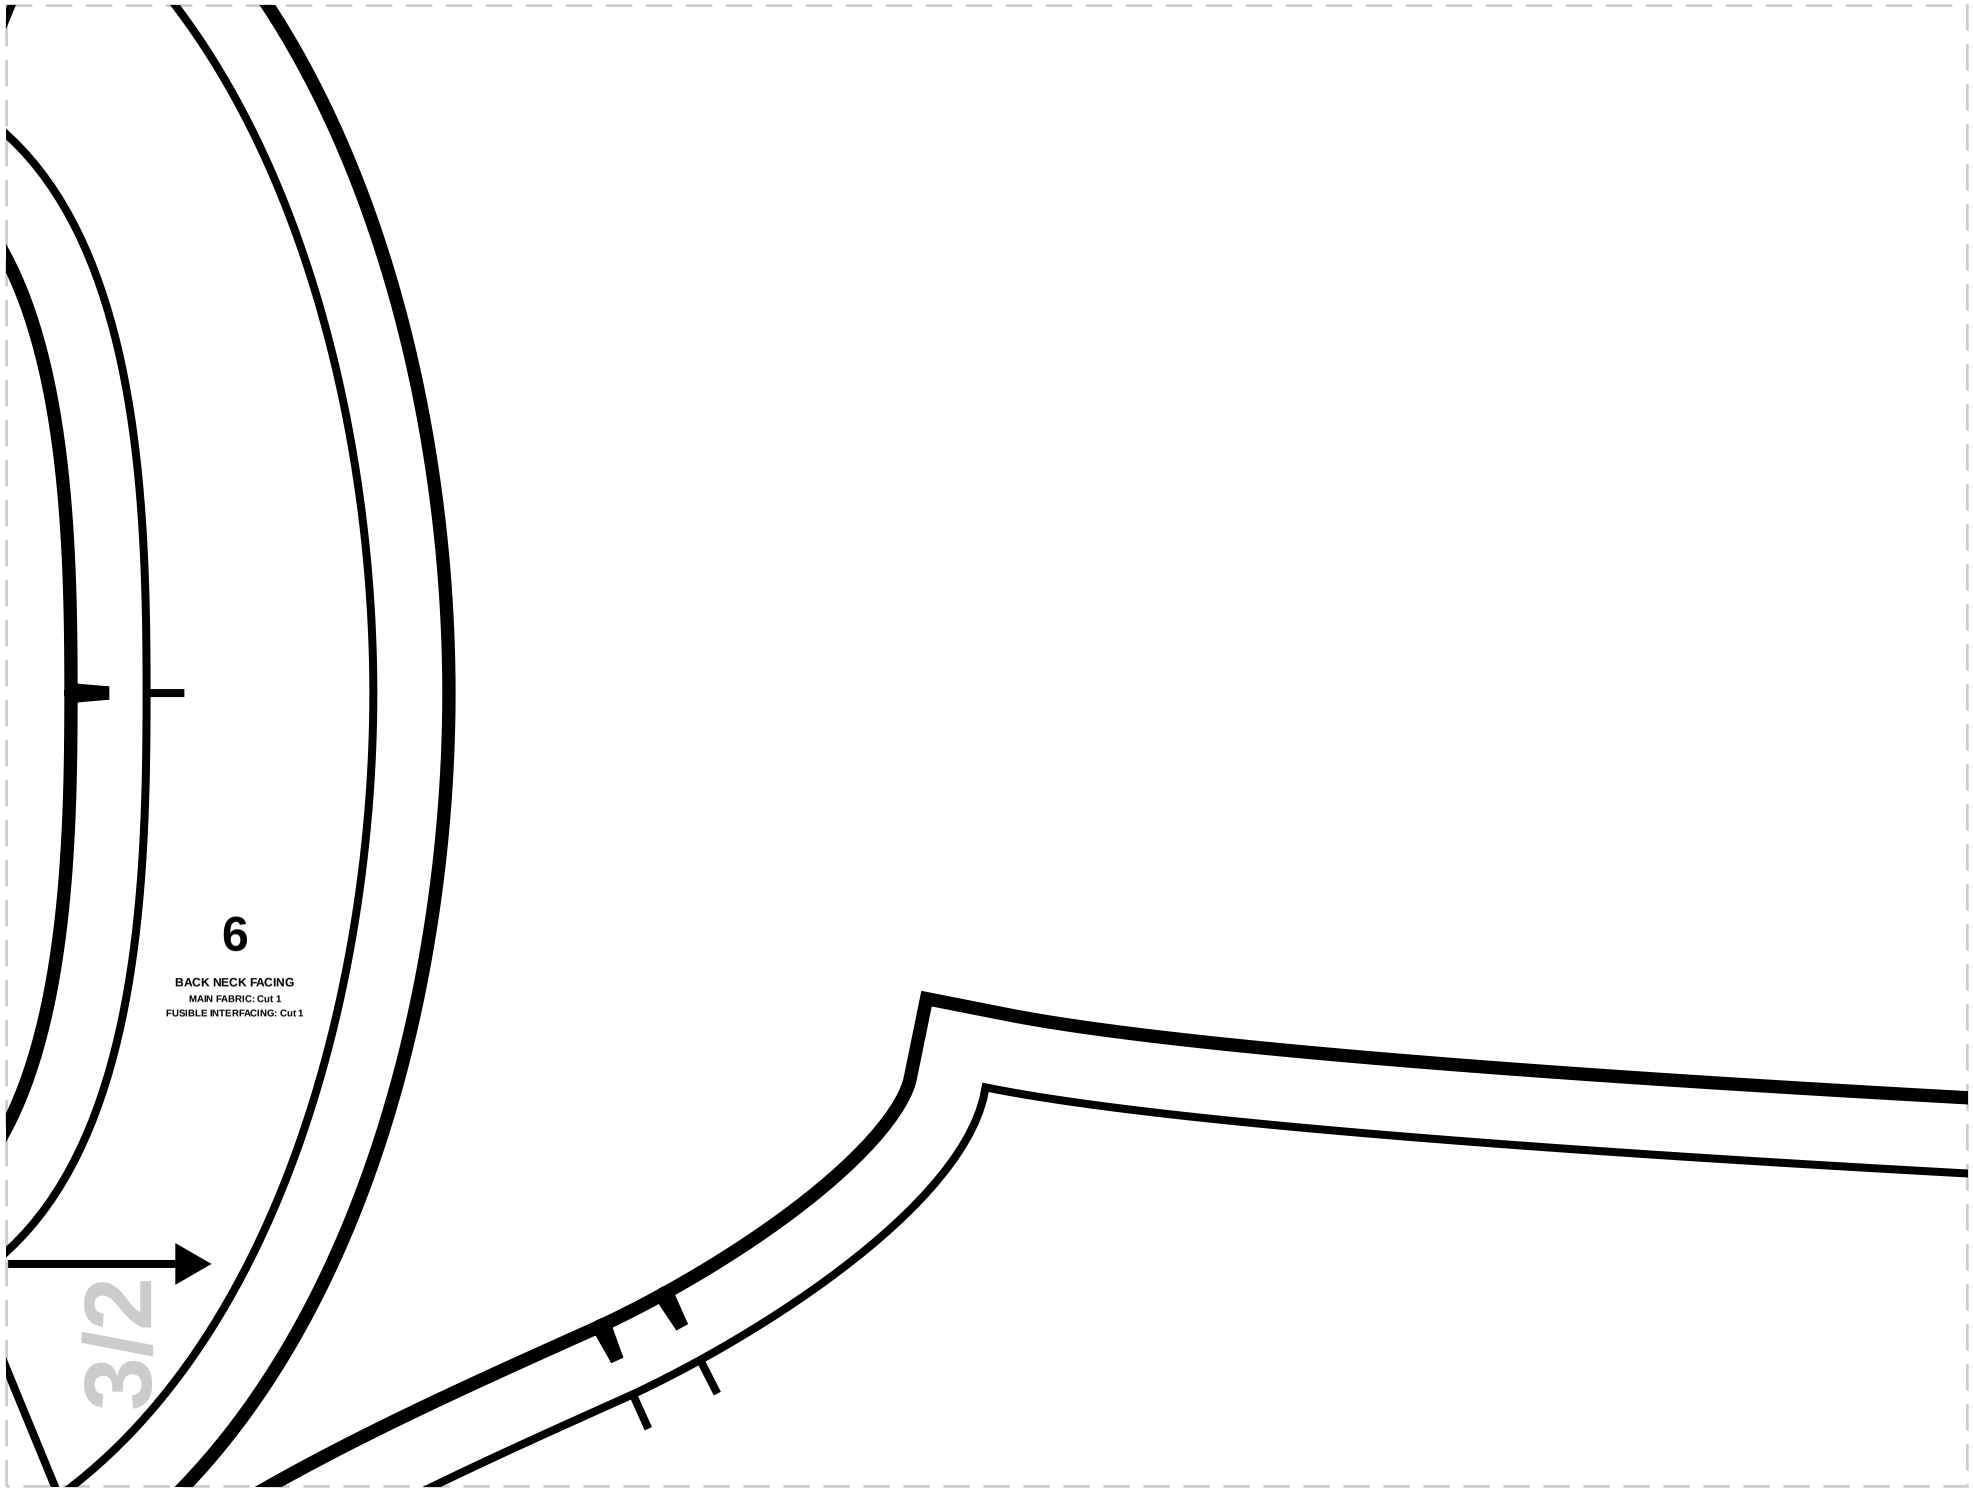

6
BACK NECK FACING
MAIN FABRIC: Cut 1
FUSIBLE INTERFACING: Cut 1
3/2



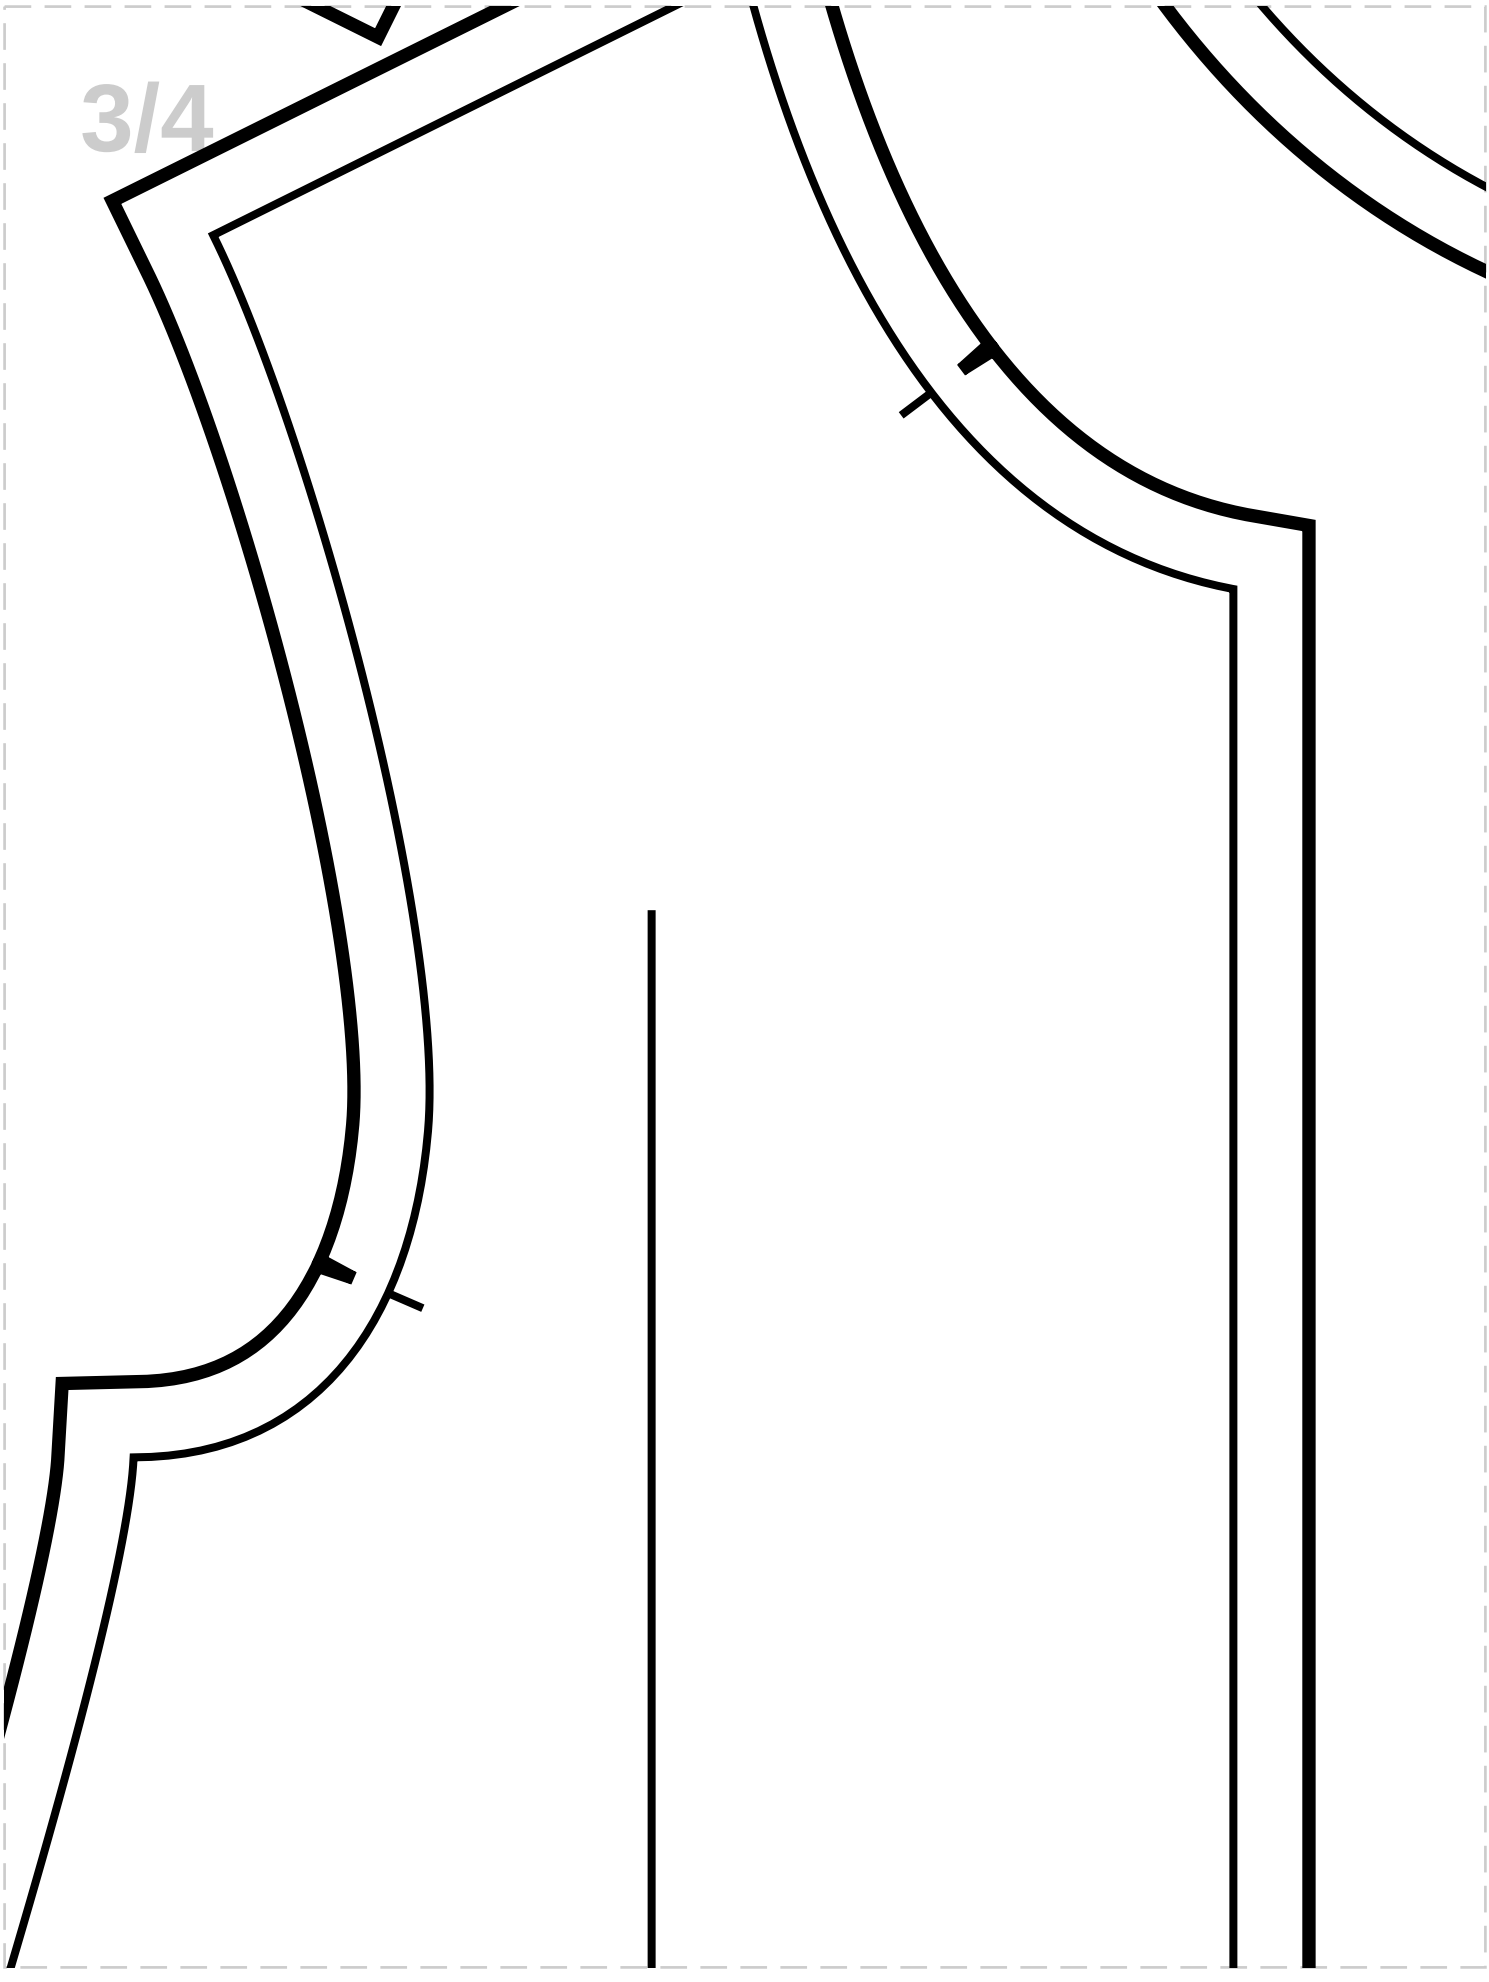




3/4

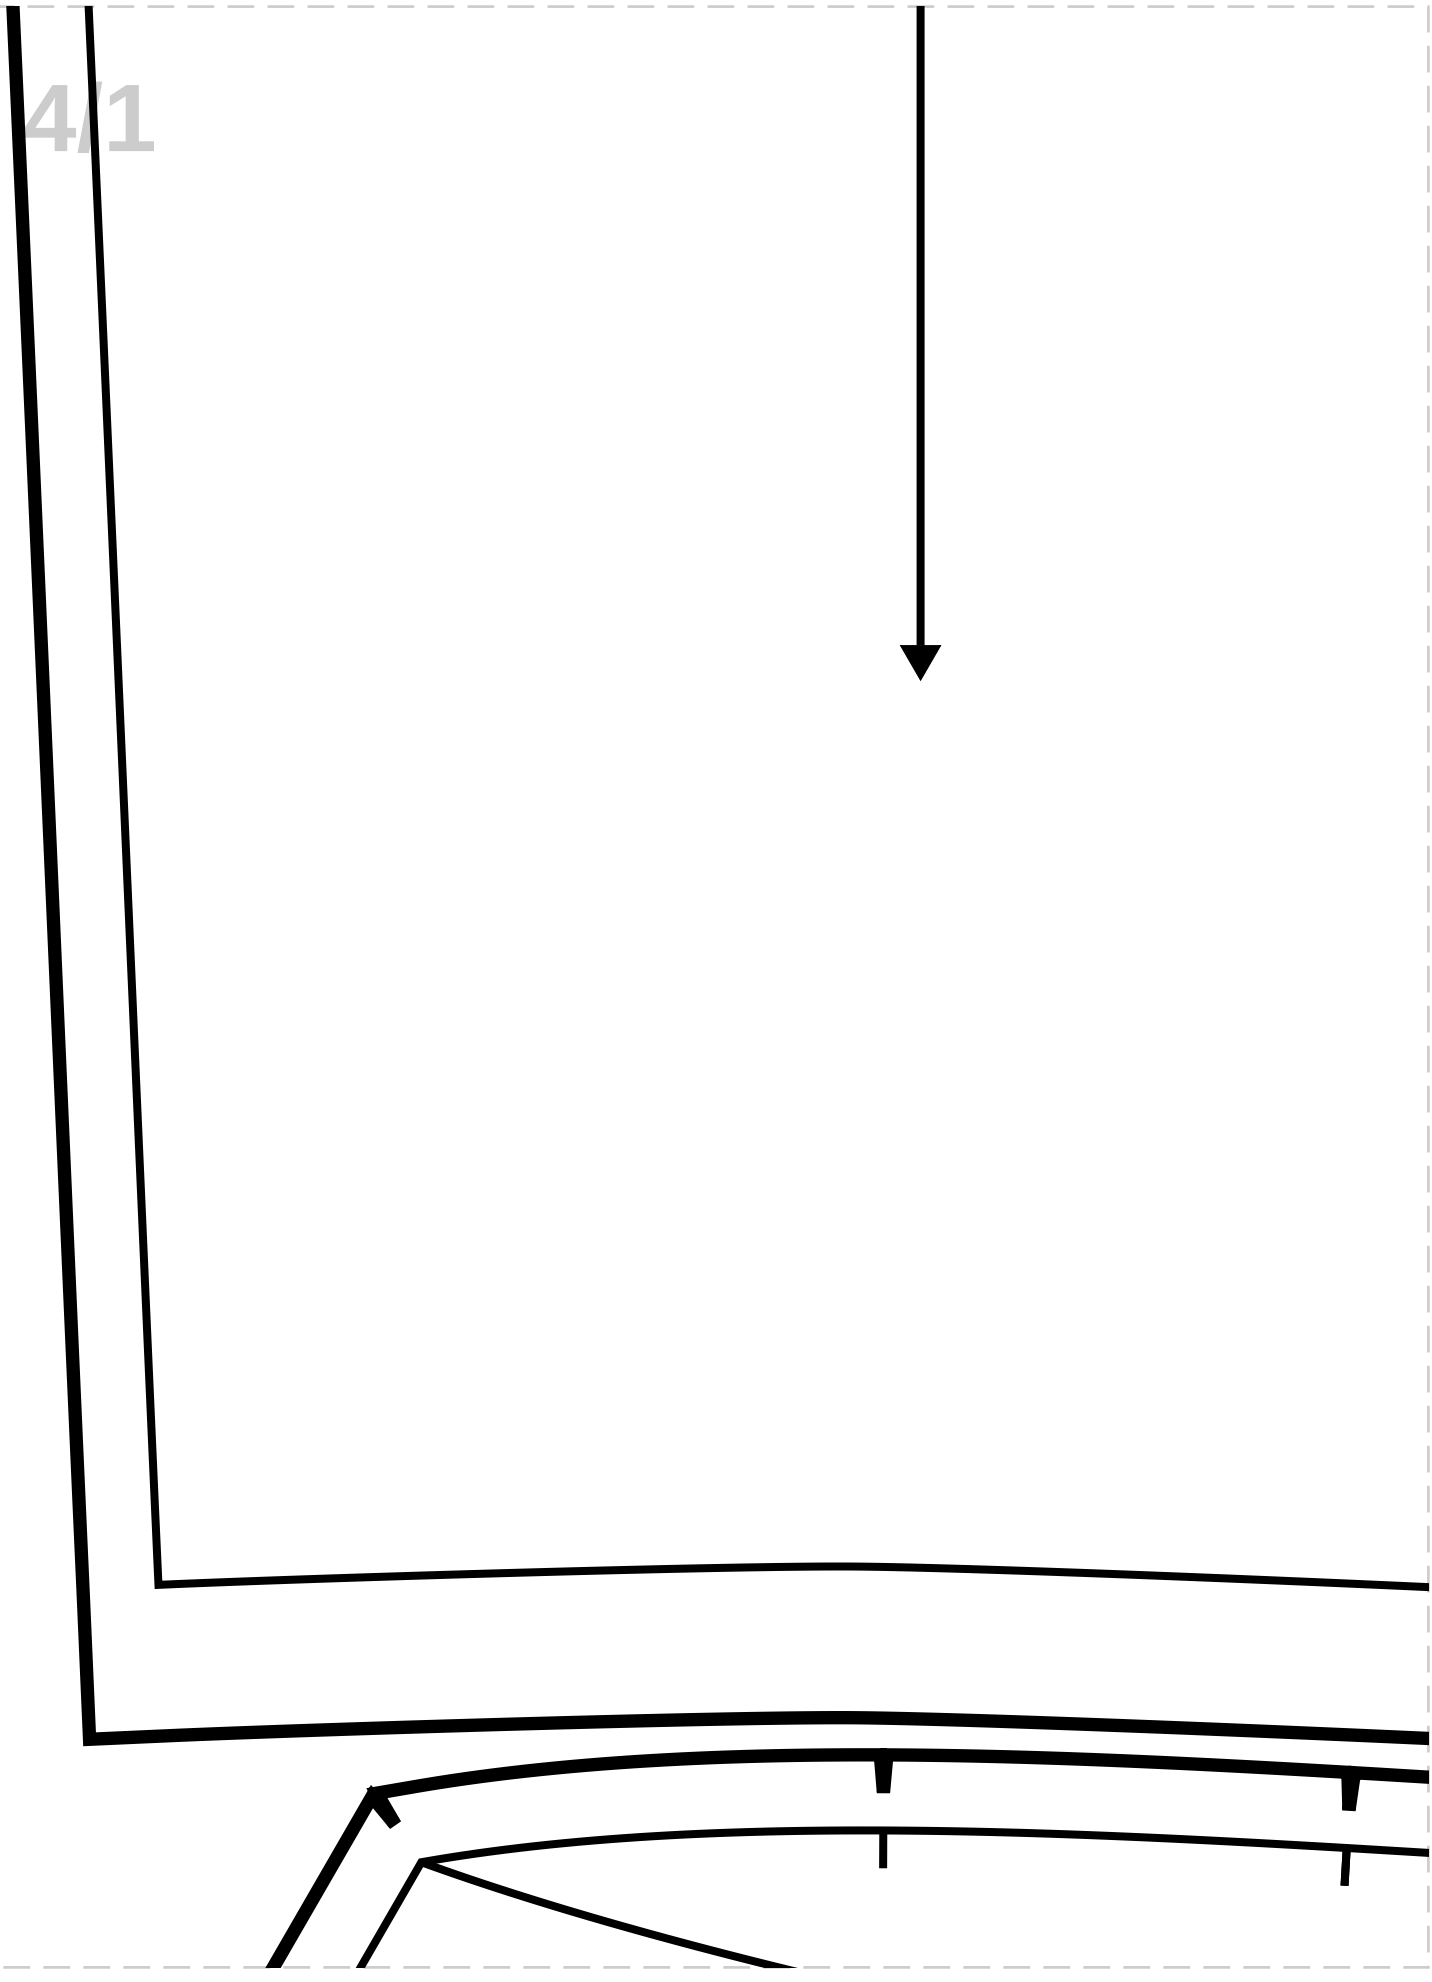


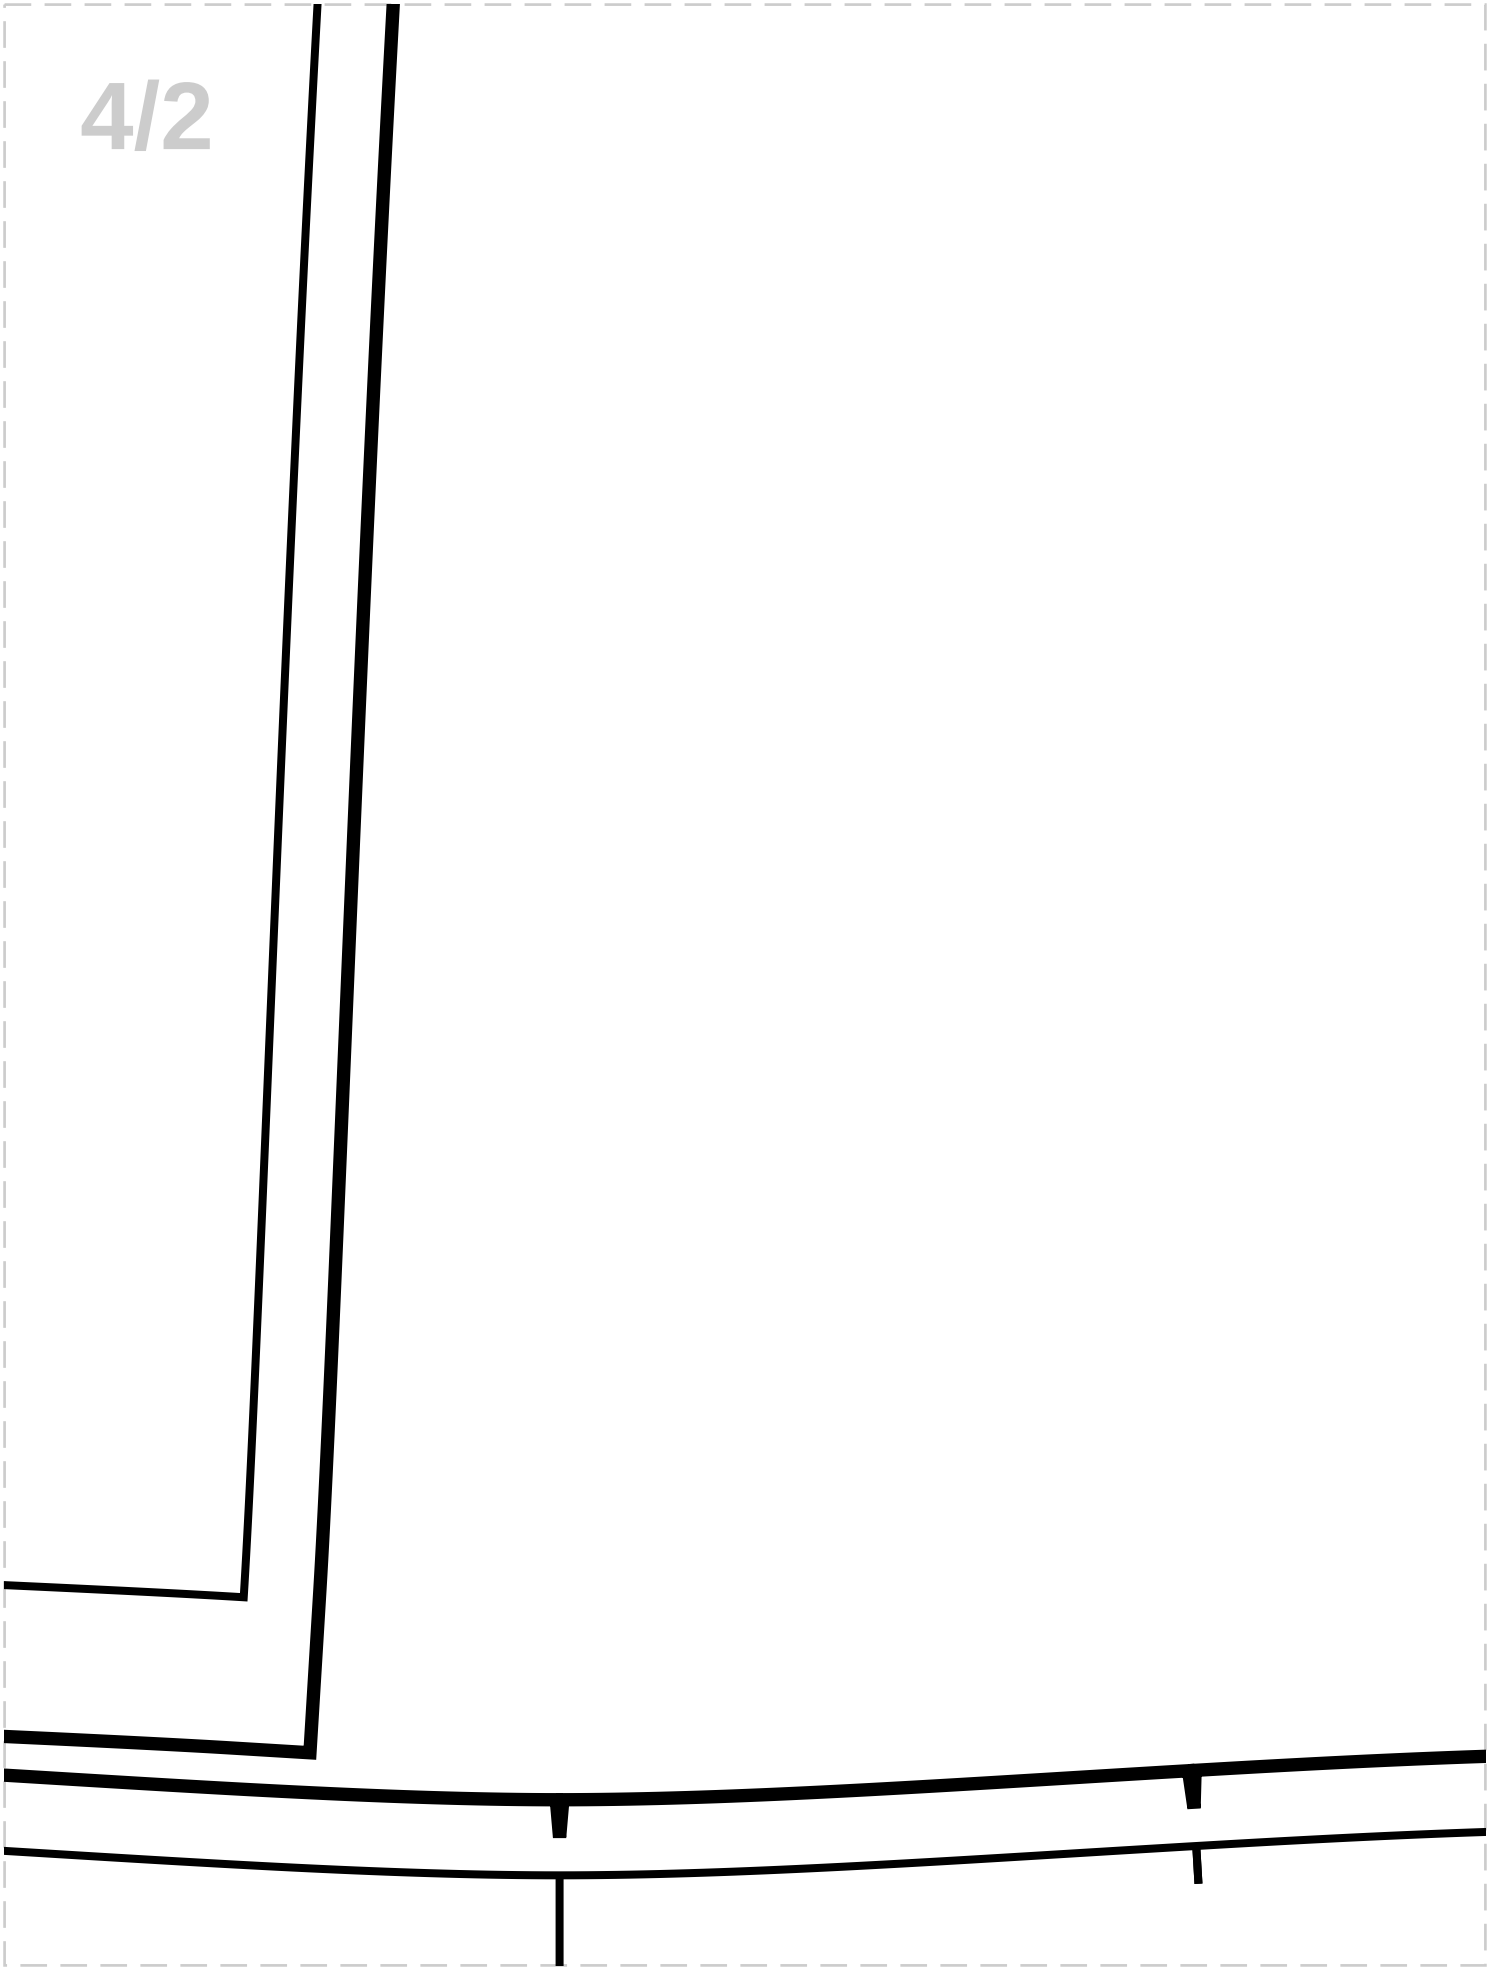

MAIN FABRIC: Cut 1

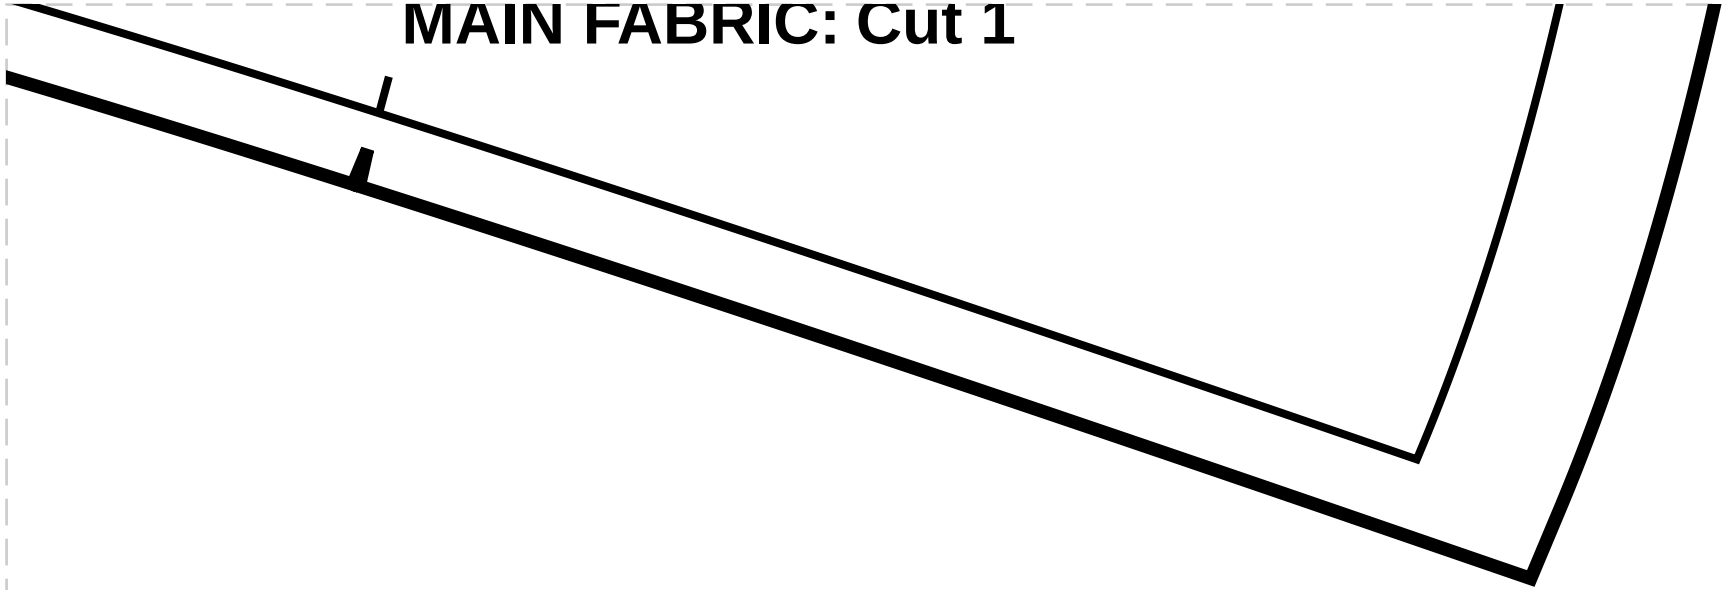


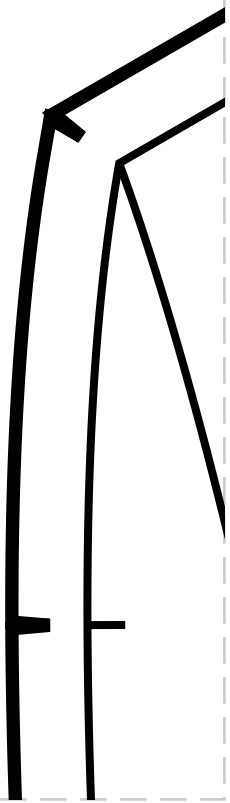

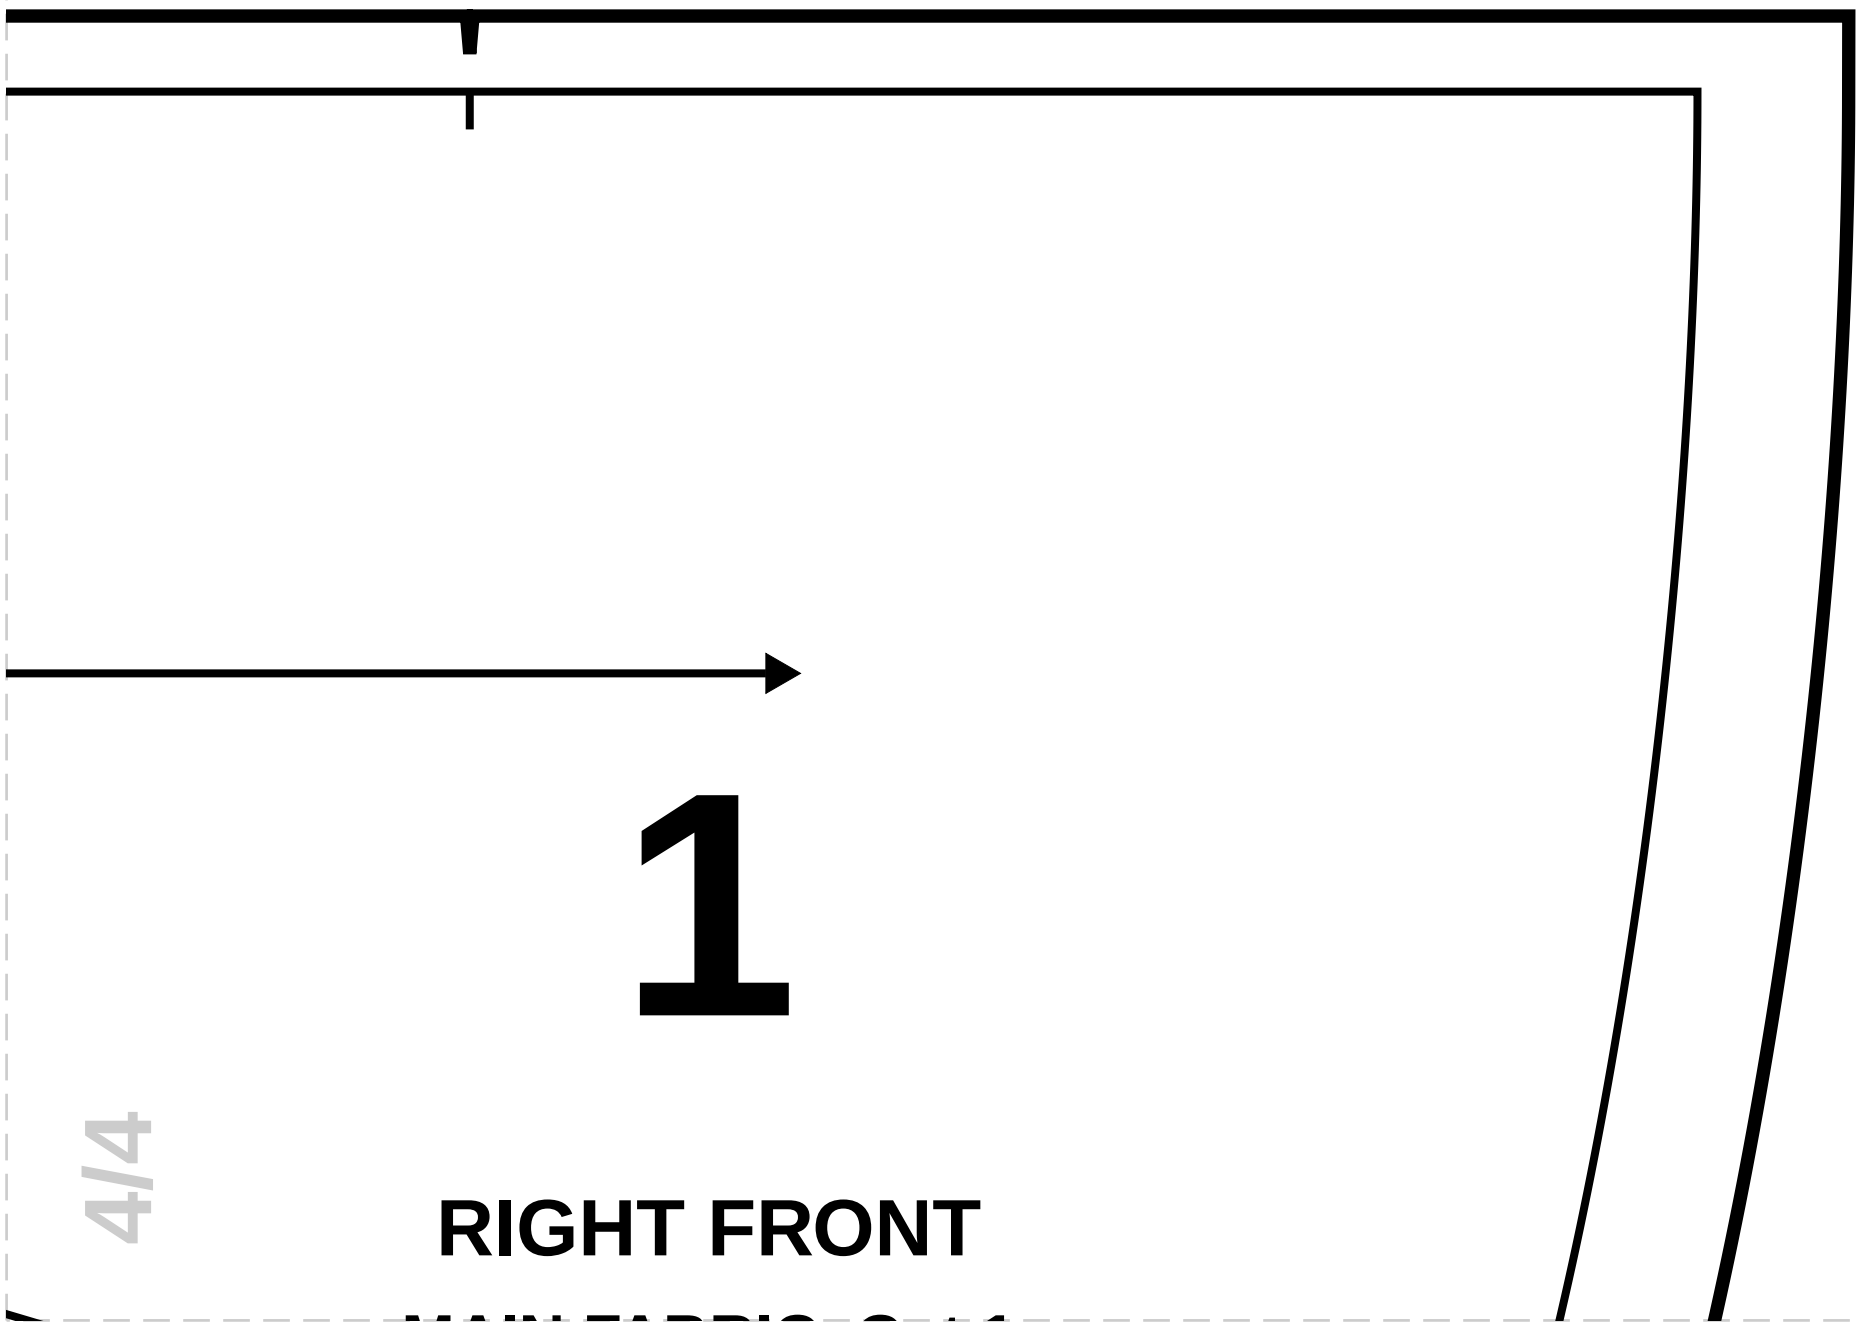

4/4

RIGHT FRONT

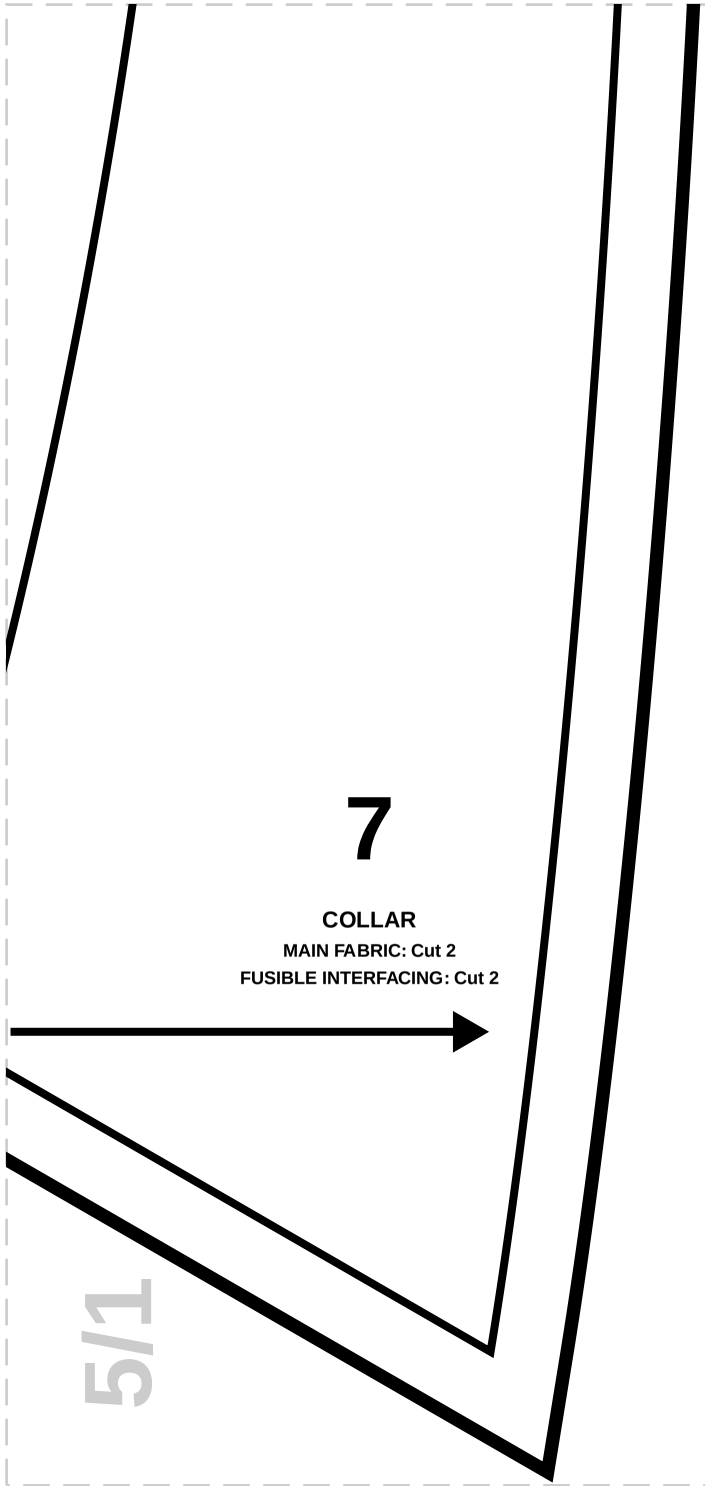


7


COLLAR

MAIN FABRIC: Cut 2

FUSIBLE INTERFACING: Cut 2

5/1

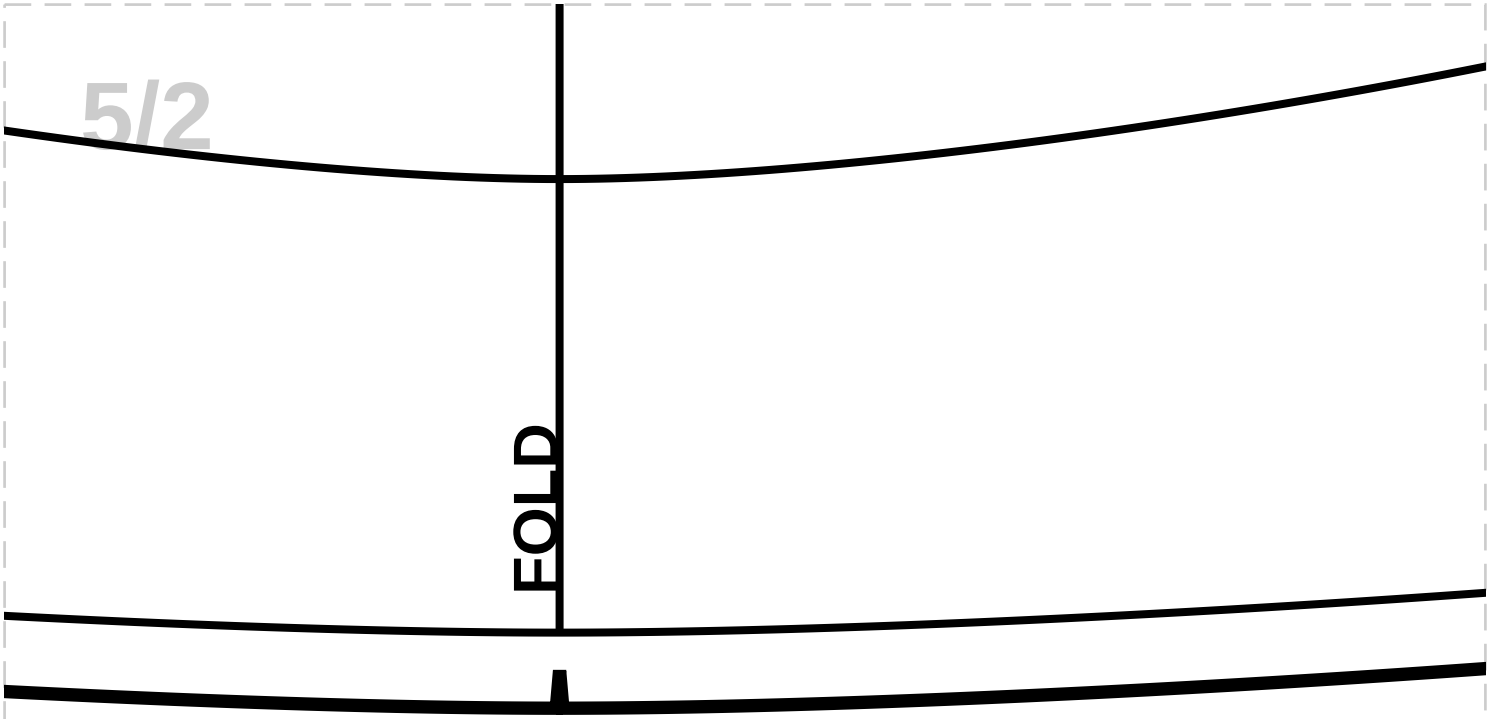
FOLD

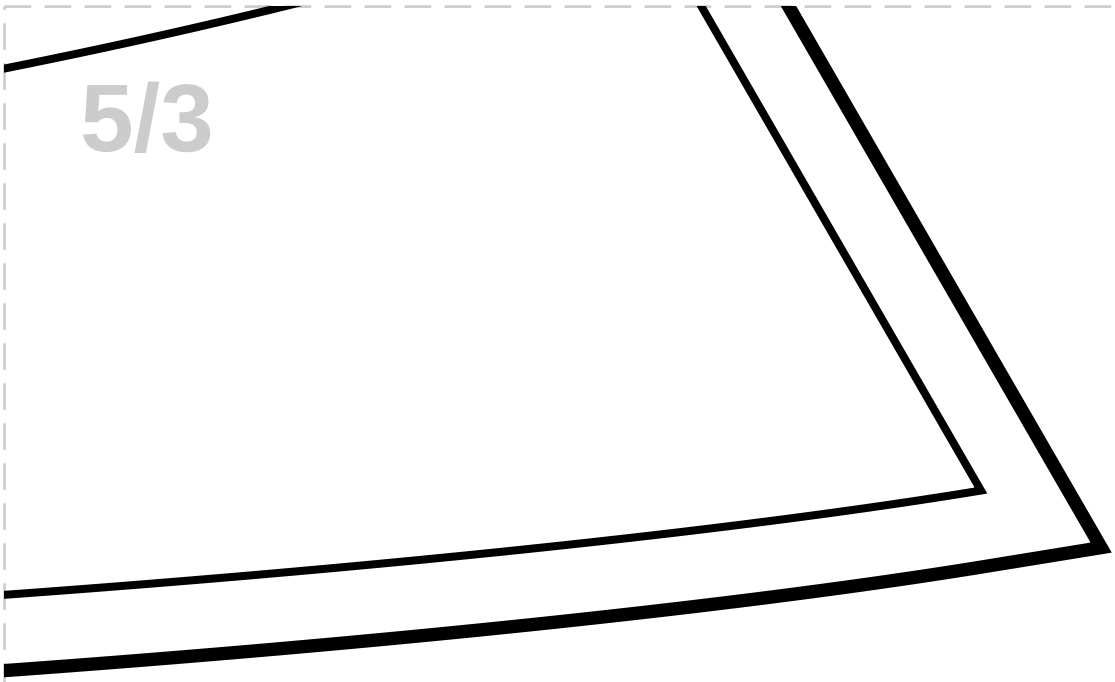

5/4